



**RADIATED EMISSIONS PORTION OF
FCC CFR47 PART 24 SUBPART E
CERTIFICATION TEST REPORT**

FOR

SINGLE BAND 1XR TT CDMA PHONE

FCC MODEL NUMBER: K33BIC-04

FCC ID: OVF-K33BIC04

REPORT NUMBER: 09U12980-1, Revision A

ISSUE DATE: DECEMBER 18, 2009

Prepared for

**KYOCERA WIRELESS CORP
10300 CAMPUS POINT DRIVE
SAN DIEGO, CA 92121, U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	12/16/09	Initial Issue	T. Chan
A	12/18/09	Revised EUT description.	A. Zaffar

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>SOFTWARE AND FIRMWARE</i>	6
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	6
5.5. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. <i>RADIATED OUTPUT POWER</i>	11
7.2. <i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	13
8. SETUP PHOTOS	15

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: KYOCERA WIRELESS
10300 CAMPUS POINT DRIVE
SAN DIEGO, CA 92121, USA

EUT DESCRIPTION: SINGLE BAND 1XR TT CDMA PHONE

MODEL: K33BIC-04

SERIAL NUMBER: F0000034278648

DATE TESTED: DECEMBER 14 and 15, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
Radiated Emissions Portion of FCC Part 24E	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



THU CHAN
EMC MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



MENGISTU MEKURIA
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47, and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Single-Band CDMA Phone that manufactured by Kyocera Wireless Corporations.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum EIRP output powers based on average reading are as follows:

1850 to 1910 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low CH - 1851.25	CDMA2000	25.10	323.6
Mid CH - 1880.00		24.90	309.0
High CH - 1908.75		25.90	389.0

5.3. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

5.4. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT was investigated for X, Y, and Z-Positions, and the worst position among X, Y, and Z with AC/DC adapter. After the investigations X-position without AC/DC adapter turns out to be the worst-case.

PROCEDURE USED TO ESTABLISH TEST SIGNAL

3G-CDMA2000 1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
CDMA2000 Mobil Test	B.10.11, L

1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 4145
> Network ID (NID) > 0

Once "Active Cell" show "Connected " then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Kyocera	TXTVL10148	936S-001Y	DoC
Headset	N/A	N/A	TX-55C	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC Input	1	Mini-USB	Un-Shielded	2.0 m	N/A
2	Audio	1	Mini-Jack	Un-Shielded	1.5 m	Mic on the Cable

TEST SETUP

The EUT is a CDMA phone and is tested as a standalone configuration. Communications Test Set is used to link the device under test.

SETUP DIAGRAM FOR TESTS

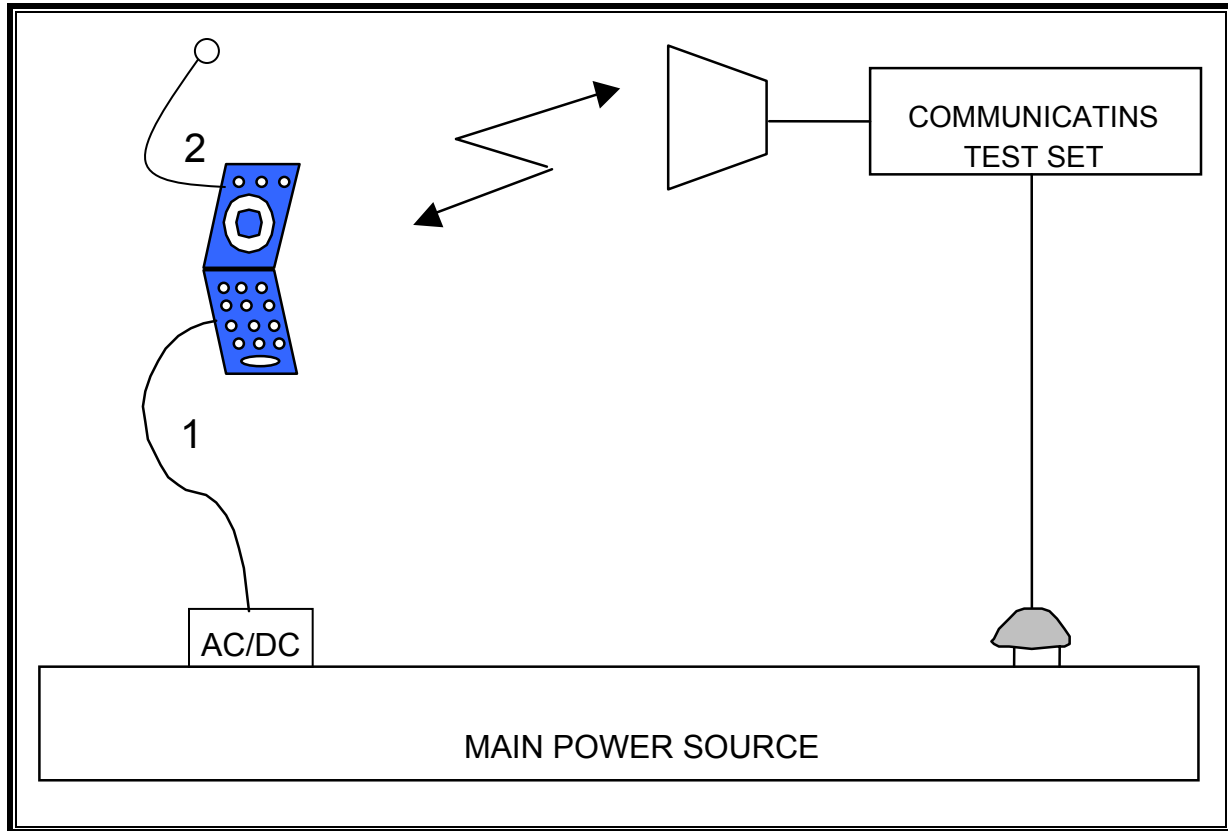

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	02/04/10
Antenna, Horn, 18 GHz	EMCO	3115	C00945	01/29/10
Antenna, Horn, 18 GHz	EMCO	3115	C00783	01/29/10
Antenna, Horn, 18 GHz	EMCO	3115	C00943	01/29/10
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Signal Generator	R & S	SMP04	C00953	02/16/11
Communication Test Set	R & S	CMU 200	C00944	12/16/10
Communications Test Set	Agilent / HP	E5515C	C01086	06/12/10
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	08/24/10
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	08/31/10

7. LIMITS AND RESULTS

7.1. RADIATED OUTPUT POWER

LIMITS

24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17.

RESULTS

PCS OUTPUT POWER (EIRP)

High Frequency Fundamental Measurement Compliance Certification Services Chamber B							
Company:		KYOCERA WIRELESS COMMUNICATIONS					
Project #:		09U12980					
Date:		12/14/2009					
Test Engineer:		MENGISTU MEKURIA					
Configuration:		EUT WITH HEADSET					
Mode:		TX, CDMA PCS BAND					
Test Equipment:							
Receiving: Horn T59, and Camber B SMA Cables							
Substitution: Horn T72 Substitution, 6ft SMA Cable (208947003) Warehouse							
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.850	-19.5	V	40.2	20.7	33.0	-12.3	
1.850	-14.4	H	39.5	25.1	33.0	-7.9	
1.880	-20.4	V	40.3	19.9	33.0	-13.2	
1.880	-15.2	H	40.1	24.9	33.0	-8.1	
1.910	-19.6	V	40.2	20.6	33.0	-12.4	
1.910	-14.2	H	40.1	25.9	33.0	-7.1	
Rev. 1.24.7							

7.2. FIELD STRENGTH OF SPURIOUS RADIATION

LIMIT

§24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 24.238 (b)

RESULTS

PCS Spurious & Harmonic (EIRP)

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement											
Company:		KYOCERA WIRELESS COMMUNICATIONS									
Project #:		09U12980									
Date:		12/15/2009									
Test Engineer:		MENGI STU MEKURIA									
Configuration:		EUT WITH HEADSET									
Mode:		TX, CDMA PCS BAND									
Chamber		Pre-amplifier			Filter			Limit			
5m Chamber A		T144 8449B			Filter 1			FCC PART 24			
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch (1851.25MHz)											
1.088	-60.7	H	3.0	32.3	39.3	1.0	-66.7	-13.0	-53.7		
1.412	-38.7	H	3.0	34.5	38.6	1.0	-41.8	-13.0	-28.8		
2.668	-52.1	H	3.0	41.1	37.4	1.0	-47.5	-13.0	-34.5		
3.703	-63.5	H	3.0	45.0	36.8	1.0	-54.3	-13.0	-41.3		
5.554	-66.2	H	3.0	49.9	36.3	1.0	-51.5	-13.0	-38.5		
1.088	-60.4	V	3.0	31.5	39.3	1.0	-67.2	-13.0	-54.2		
1.412	-38.6	V	3.0	34.4	38.6	1.0	-41.8	-13.0	-28.8		
2.668	-51.6	V	3.0	42.3	37.4	1.0	-45.7	-13.0	-32.7		
3.703	-61.1	V	3.0	44.9	36.8	1.0	-52.0	-13.0	-39.0		
5.554	-65.6	V	3.0	49.3	36.3	1.0	-51.7	-13.0	-38.7		
Mid Ch(1880.00MHz)											
1.145	-56.2	H	3.0	32.7	39.2	1.0	-61.7	-13.0	-48.7		
1.558	-45.3	H	3.0	35.6	38.3	1.0	-46.9	-13.0	-33.9		
2.739	-51.9	H	3.0	41.5	37.4	1.0	-46.9	-13.0	-33.9		
3.760	-65.5	H	3.0	45.2	36.8	1.0	-56.1	-13.0	-43.1		
5.640	-67.9	H	3.0	50.1	36.3	1.0	-53.1	-13.0	-40.1		
1.145	-56.4	V	3.0	32.0	39.2	1.0	-62.6	-13.0	-49.6		
1.558	-45.4	V	3.0	35.8	38.3	1.0	-46.9	-13.0	-33.9		
2.739	-51.5	V	3.0	42.5	37.4	1.0	-45.4	-13.0	-32.4		
3.760	-63.2	V	3.0	45.1	36.8	1.0	-53.9	-13.0	-40.9		
5.640	-67.9	V	3.0	49.4	36.3	1.0	-53.8	-13.0	-40.8		
Hi Ch(1908.75MHz)											
1.203	-58.6	H	3.0	33.1	39.1	1.0	-63.6	-13.0	-50.6		
1.699	-43.9	H	3.0	37.0	38.1	1.0	-44.0	-13.0	-31.0		
2.810	-56.7	H	3.0	41.9	37.4	1.0	-51.2	-13.0	-38.2		
3.818	-62.2	H	3.0	45.3	36.7	1.0	-52.6	-13.0	-39.6		
5.726	-68.1	H	3.0	50.2	36.3	1.0	-53.2	-13.0	-40.2		
1.204	-55.0	V	3.0	32.5	39.1	1.0	-60.5	-13.0	-47.5		
1.699	-43.1	V	3.0	37.4	38.1	1.0	-42.8	-13.0	-29.8		
2.810	-56.7	V	3.0	42.8	37.4	1.0	-50.4	-13.0	-37.4		
3.818	-58.5	V	3.0	45.2	36.7	1.0	-49.1	-13.0	-36.1		
5.726	-67.2	V	3.0	49.5	36.3	1.0	-53.0	-13.0	-40.0		
Rev. 03.03.09											