



**FCC CFR47 PART 24 SUBPART E  
CLASS II PERMISSIVE CHANGE**

**CERTIFICATION TEST REPORT**

**FOR**

**SINGLE BAND 1XRTT CDMA PHONE**

**MODEL NUMBER: K33BIC- 04**

**FCC ID: OVF- K33BIC04**

**REPORT NUMBER: 10U13261-1**

**ISSUE DATE: JUNE 10, 2010**

*Prepared for*

**KYOCERA COMMUNICATIONS, INC.  
10300 CAMPUS POINT DRIVE  
SAN DIEGO, CA 92121, U.S.A.**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	06/10/10	Initial Issue	T. Chan

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>SAMPLE CALCULATION</i> .....	5
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE</i> .....	6
5.3. <i>MAXIMUM OUTPUT POWER</i> .....	6
5.4. <i>SOFTWARE AND FIRMWARE</i> .....	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	6
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>10</b>
<b>7. LIMITS AND RESULTS</b> .....	<b>11</b>
7.1. <i>RADIATED OUTPUT POWER</i> .....	11
7.2. <i>FIELD STRENGTH OF SPURIOUS RADIATION</i> .....	13
<b>8. SETUP PHOTOS</b> .....	<b>15</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** KYOCERA COMMUNICATIONS, INC.  
10300 CAMPUS POINT DRIVE  
SAN DIEGO, CA 92121, USA

**EUT DESCRIPTION:** SINGLE BAND 1XR TT CDMA PHONE

**MODEL:** K33BIC-04

**SERIAL NUMBER:** F0000037984721

**DATE TESTED:** JUNE 10, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 24E	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



THU CHAN  
EMC MANAGER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



MENGISTU MEKURIA  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47, and FCC CFR Part 24.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Single-Band CDMA Phone that manufactured by Kyocera Communications, Inc.

### 5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

New PCB layout. No change in BOM, schematic diagram or mechanical design.

### 5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum EIRP output powers based on average readings are as follows:

1850 to 1910 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Output Power (dBm)	EIRP Output Power (mW)
Low CH - 1851.25	CDMA2000	26.40	436.5
Mid CH - 1880.00		25.80	380.2
High CH - 1908.75		26.70	467.7

### 5.4. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT was investigated for X, Y, and Z-Positions, and the worst position among X, Y, and Z with AC/DC adapter and headset. After the investigations X-position with headset only turns out to be the worst-case.

## PROCEDURE USED TO ESTABLISH TEST SIGNAL

### **3G-CDMA2000 1xRTT**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
CDMA2000 Mobil Test	B.10.11, L

#### 1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps  
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 4145  
> Network ID (NID) > 0

Once "Active Cell" show "Connected " then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Kyocera	TXTVL10148	936S-001Y	DoC
Headset	Kyocera	N/A	N/A	N/A

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC Input	1	Micro-USB	Un-Shielded	2.0 m	N/A
2	Audio	1	Mini-Jack	Un-Shielded	1.5 m	Mic on the Cable

### TEST SETUP

The EUT is a CDMA phone and is tested as a standalone configuration. Communications Test Set is used to link the device under test.



**SETUP DIAGRAM FOR TESTS**

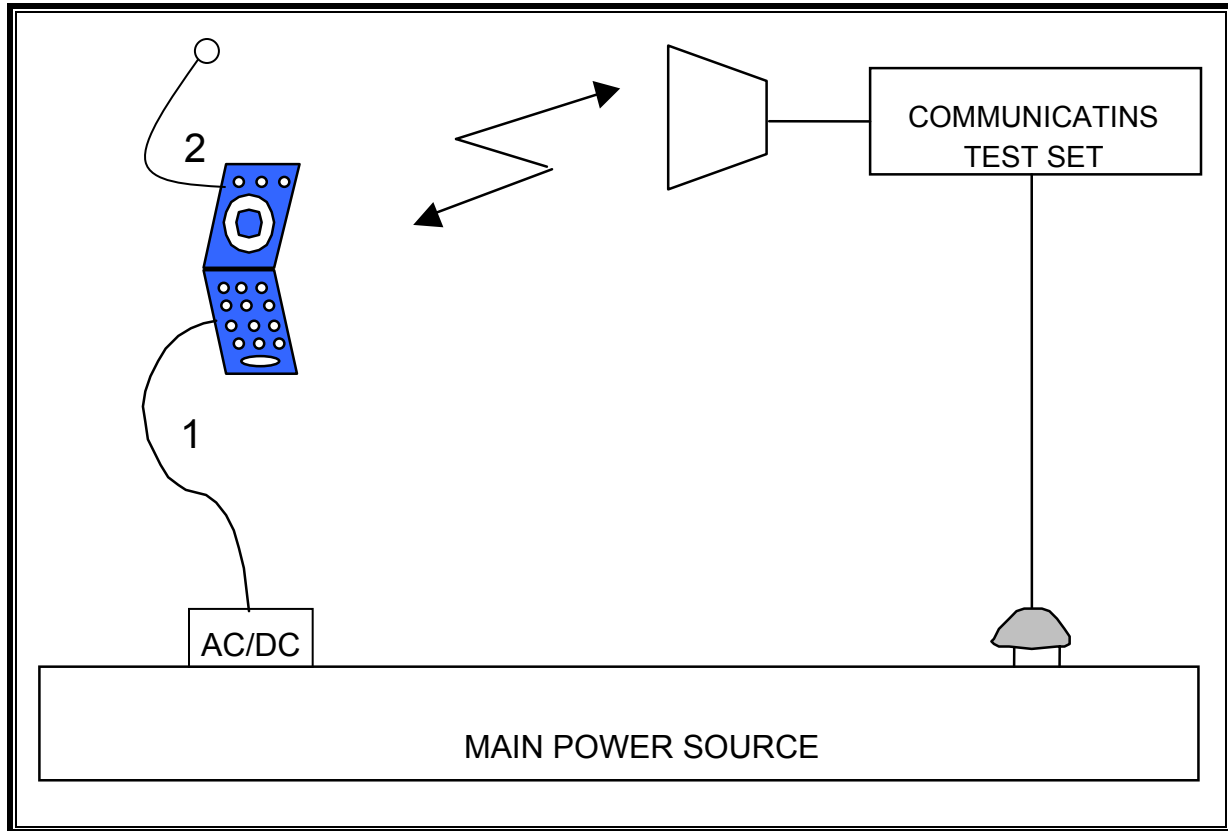

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	08/04/10
Antenna, Horn, 18 GHz	EMCO	3115	C00945	07/29/10
Antenna, Horn, 18 GHz	EMCO	3115	C00943	01/29/10
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Signal Generator	R & S	SMP04	C00953	02/16/11
Communications Test Set	Agilent / HP	E5515C	N/A	02/22/11
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	08/24/10

## **7. LIMITS AND RESULTS**

### **7.1. RADIATED OUTPUT POWER**

#### **LIMITS**

24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

#### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 2.2.17.

#### **RESULTS**

**PCS OUTPUT POWER (EIRP)**

High Frequency Fundamental Measurement Compliance Certification Services Chamber A							
<b>Company:</b>		KYOCERA COMMUNICATIONS, INC.					
<b>Project #:</b>		10U13261					
<b>Date:</b>		6/10/2010					
<b>Test Engineer:</b>		MENGISTU MEKURIA					
<b>Configuration:</b>		EUT WITH HEADSET AND AC ADAPTER					
<b>Mode:</b>		TX 1XR TT PCS BAND					
<b>Test Equipment:</b>							
Receiving: Horn T73, and Camber B SMA Cables							
Substitution: Horn T72 Substitution, 6ft SMA Cable (208947003) Warehouse							
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.851	-23.3	V	40.4	17.2	33.0	-15.9	
1.851	-13.4	H	39.7	26.4	33.0	-6.7	
1.880	-22.7	V	39.9	17.3	33.0	-15.8	
1.880	-14.3	H	40.1	25.8	33.0	-7.2	
1.988	-22.2	V	39.8	17.6	33.0	-15.4	
1.988	-13.5	H	40.2	26.7	33.0	-6.3	
Rev. 1.24.7							

## **7.2. FIELD STRENGTH OF SPURIOUS RADIATION**

### **LIMIT**

§24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 24.238 (b)

### **RESULTS**

**PCS Spurious & Harmonic (EIRP)**

Compliance Certification Services  
 Above 1GHz High Frequency Substitution Measurement

Company: KYOCERA COMMUNICATIONS, INC.  
 Project #: 10U13261  
 Date: 6/10/2010  
 Test Engineer: MENGISTU MEKURIA  
 Configuration: EUT WITH HEADSET AND AC ADAPTER  
 Mode: TX 1xRTT PCS BAND

Chamber

Pre-amplifier

Filter

Limit

5m Chamber A

T144 8449B

Filter 1

FCC PART 24

f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch (1851.25 MHz)</b>										
1.088	-61.1	V	3.0	31.5	39.3	1.0	-68.0	-13.0	-55.0	
1.412	-38.5	V	3.0	34.4	38.6	1.0	-41.7	-13.0	-28.7	
2.668	-52.3	V	3.0	42.3	37.4	1.0	-46.4	-13.0	-33.4	
3.703	-63.7	V	3.0	44.9	36.8	1.0	-54.6	-13.0	-41.6	
1.088	-61.1	H	3.0	32.3	39.3	1.0	-67.0	-13.0	-54.0	
1.412	-39.3	H	3.0	34.5	38.6	1.0	-42.3	-13.0	-29.3	
2.668	-52.3	H	3.0	41.1	37.4	1.0	-47.6	-13.0	-34.6	
3.703	-61.6	H	3.0	45.0	36.8	1.0	-52.4	-13.0	-39.4	
<b>Mid Ch. (1880.00 MHz)</b>										
1.145	-57.2	V	3.0	32.0	39.2	1.0	-63.4	-13.0	-50.4	
1.558	-45.3	V	3.0	35.8	38.3	1.0	-46.7	-13.0	-33.7	
2.739	-52.3	V	3.0	42.5	37.4	1.0	-46.2	-13.0	-33.2	
3.760	-66.5	V	3.0	45.1	36.8	1.0	-57.2	-13.0	-44.2	
1.145	-56.6	H	3.0	32.7	39.2	1.0	-62.0	-13.0	-49.0	
1.558	-45.8	H	3.0	35.7	38.3	1.0	-47.4	-13.0	-34.4	
2.739	-52.1	H	3.0	41.5	37.4	1.0	-47.0	-13.0	-34.0	
3.760	-65.7	H	3.0	45.2	36.8	1.0	-56.3	-13.0	-43.3	
<b>Hi Ch. (1908.75)</b>										
1.203	-55.7	V	3.0	32.5	39.1	1.0	-61.2	-13.0	-48.2	
1.699	-43.0	V	3.0	37.4	38.1	1.0	-42.7	-13.0	-29.7	
2.810	-57.5	V	3.0	42.8	37.4	1.0	-51.1	-13.0	-38.1	
3.818	-62.1	V	3.0	45.2	36.7	1.0	-52.7	-13.0	-39.7	
1.203	-59.0	H	3.0	33.1	39.1	1.0	-63.9	-13.0	-50.9	
1.699	-44.5	H	3.0	37.0	38.1	1.0	-44.5	-13.0	-31.5	
2.810	-56.9	H	3.0	41.9	37.4	1.0	-51.4	-13.0	-38.4	
3.818	-64.4	H	3.0	45.3	36.7	1.0	-54.8	-13.0	-41.8	

Rev. 03.03.09