

## Appendix A (Addendum): SAR Distribution Plots HEAD

Test Laboratory: Kyocera Communications, Inc.


Date: 6/29/2010

### 1900MHz Validation @ 20dBm Probe 3036, DAE 603 and Dipole 5d016, 062910


Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1  
 Medium: HSL1900,Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom: SAM 12,Phantom section: Flat Section  
**DASY4 Configuration:**  
 Probe: ES3DV3 - SN3036, ConvF(4.92, 4.92, 4.92), Calibrated: 8/20/2009  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  
 Electronics: DAE4 Sn603,Calibrated: 9/15/2009  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186  
**Temperature:**Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

**1900MHz Validation @20dBm/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 4.82 mW/g

**1900MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 58.0 V/m; Power Drift = -0.026 dB  
 Peak SAR (extrapolated) = 7.33 W/kg  
**SAR(1 g) = 4.07 mW/g; SAR(10 g) = 2.14 mW/g**  
 Maximum value of SAR (measured) = 4.59 mW/g

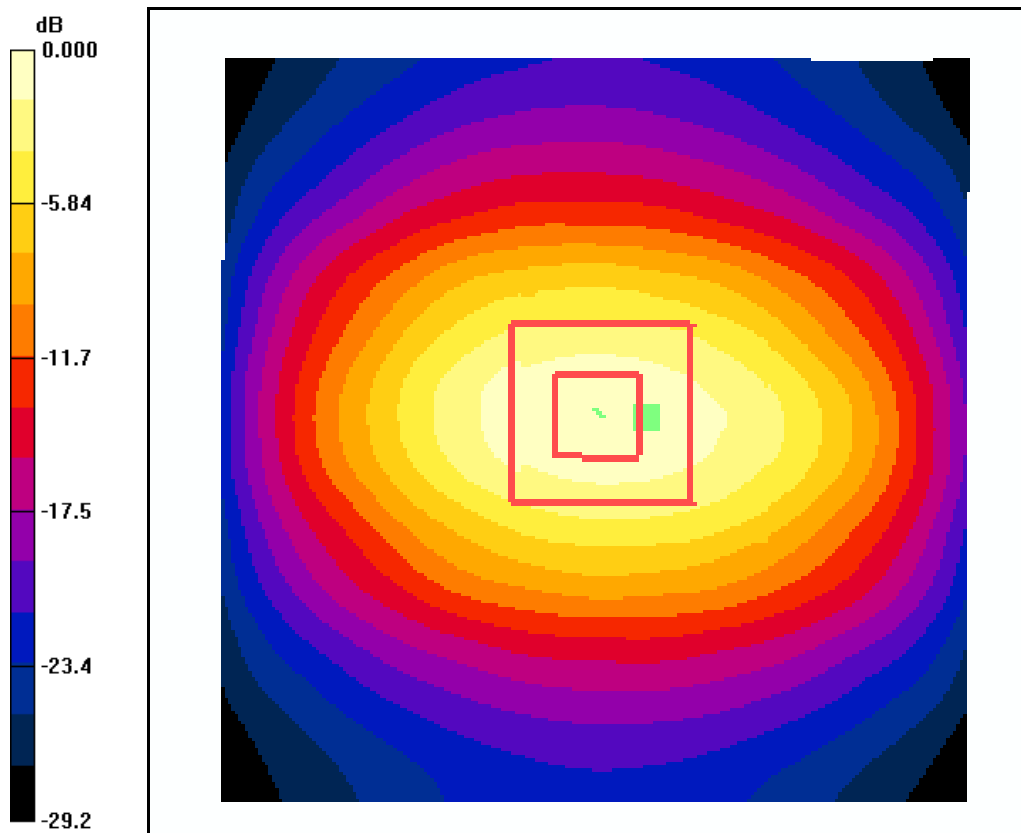

0 dB = 4.82mW/g

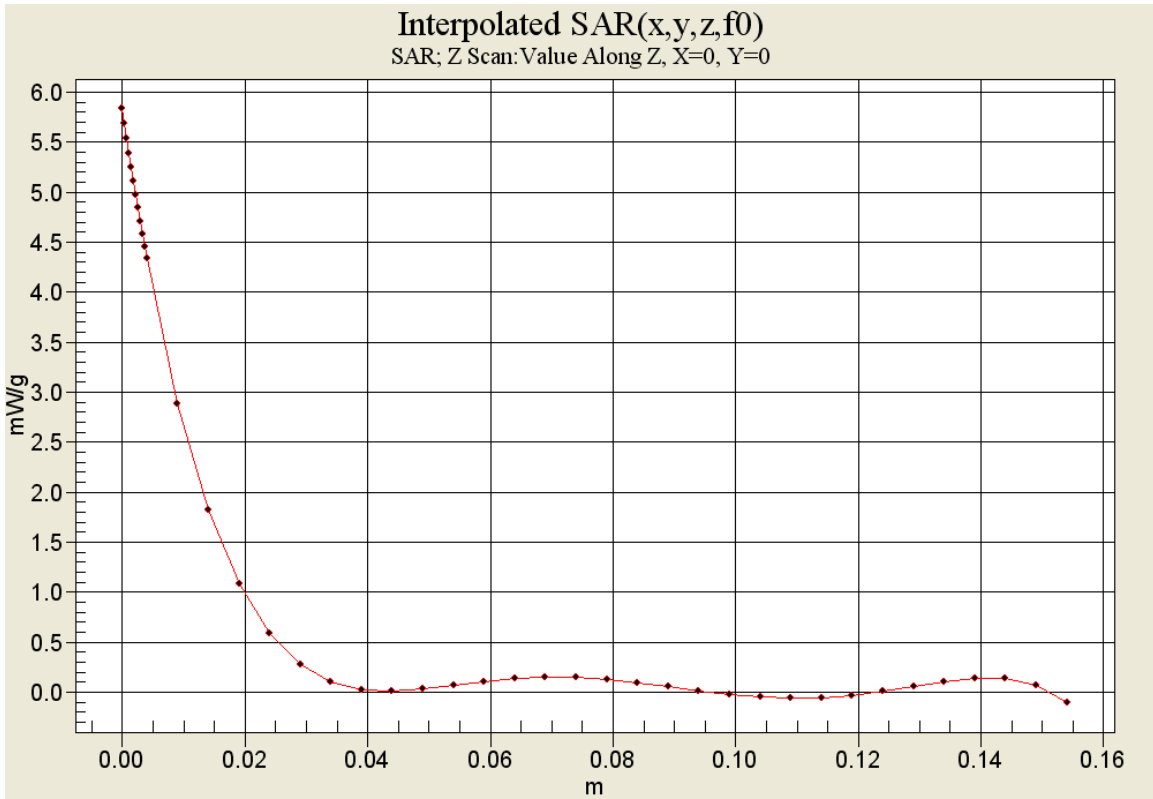

## MUSCLE

Test Laboratory: Kyocera Communications, Inc.

Date: 6/29/2010

### S1310 1900MHz Validation (in Muscle), Probe #3035, DAE #493, Dipole #5d016\_062910


Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1  
 Medium: M1900, Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom: SAM 12, Phantom section: Flat Section

**DASY4 Configuration:**

Probe: ES3DV3 - SN3035, ConvF(4.54, 4.54, 4.54), Calibrated: 8/20/2009  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  
 Electronics: DAE3 Sn493, Calibrated: 8/12/2009  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186  
**Temperature:** Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

**1900MHz Validation @20dBm/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 4.95 mW/g

**1900MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 54.4 V/m; Power Drift = 0.014 dB  
 Peak SAR (extrapolated) = 6.68 W/kg  
**SAR(1 g) = 3.93 mW/g; SAR(10 g) = 2.09 mW/g**  
 Maximum value of SAR (measured) = 4.47 mW/g

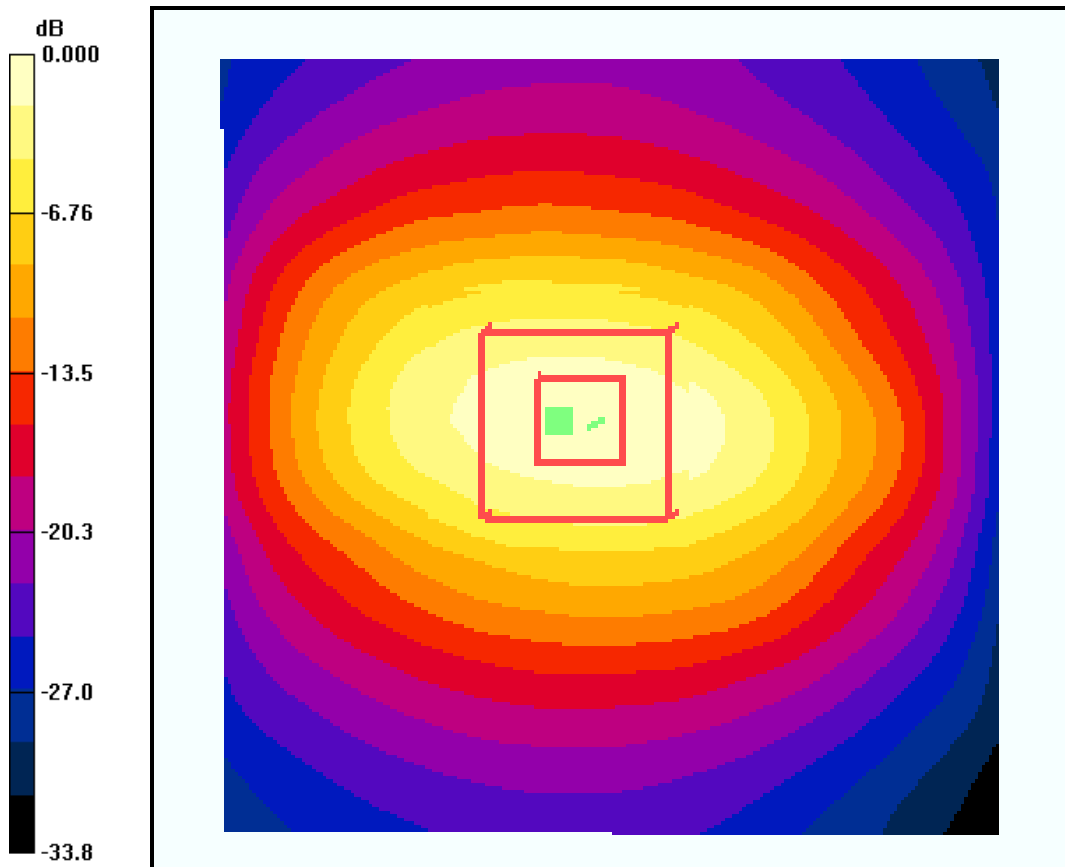

0 dB = 4.95mW/g

