

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 800 Channel 1013**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 824.7 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**CELL\_1013/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 97.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 129.2 V/m; Power Drift = -0.036 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>88.1 M4</b>	Grid 2 <b>94.5 M4</b>	Grid 3 <b>87.3 M4</b>
Grid 4 <b>89.6 M4</b>	Grid 5 <b>97.3 M4</b>	Grid 6 <b>89.4 M4</b>
Grid 7 <b>87.3 M4</b>	Grid 8 <b>91.8 M4</b>	Grid 9 <b>85.7 M4</b>

**CELL\_1013/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.141 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.100 A/m; Power Drift = 0.012 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.191 M4</b>	Grid 2 <b>0.132 M4</b>	Grid 3 <b>0.075 M4</b>
Grid 4 <b>0.191 M4</b>	Grid 5 <b>0.129 M4</b>	Grid 6 <b>0.077 M4</b>
Grid 7 <b>0.202 M4</b>	Grid 8 <b>0.141 M4</b>	Grid 9 <b>0.085 M4</b>



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

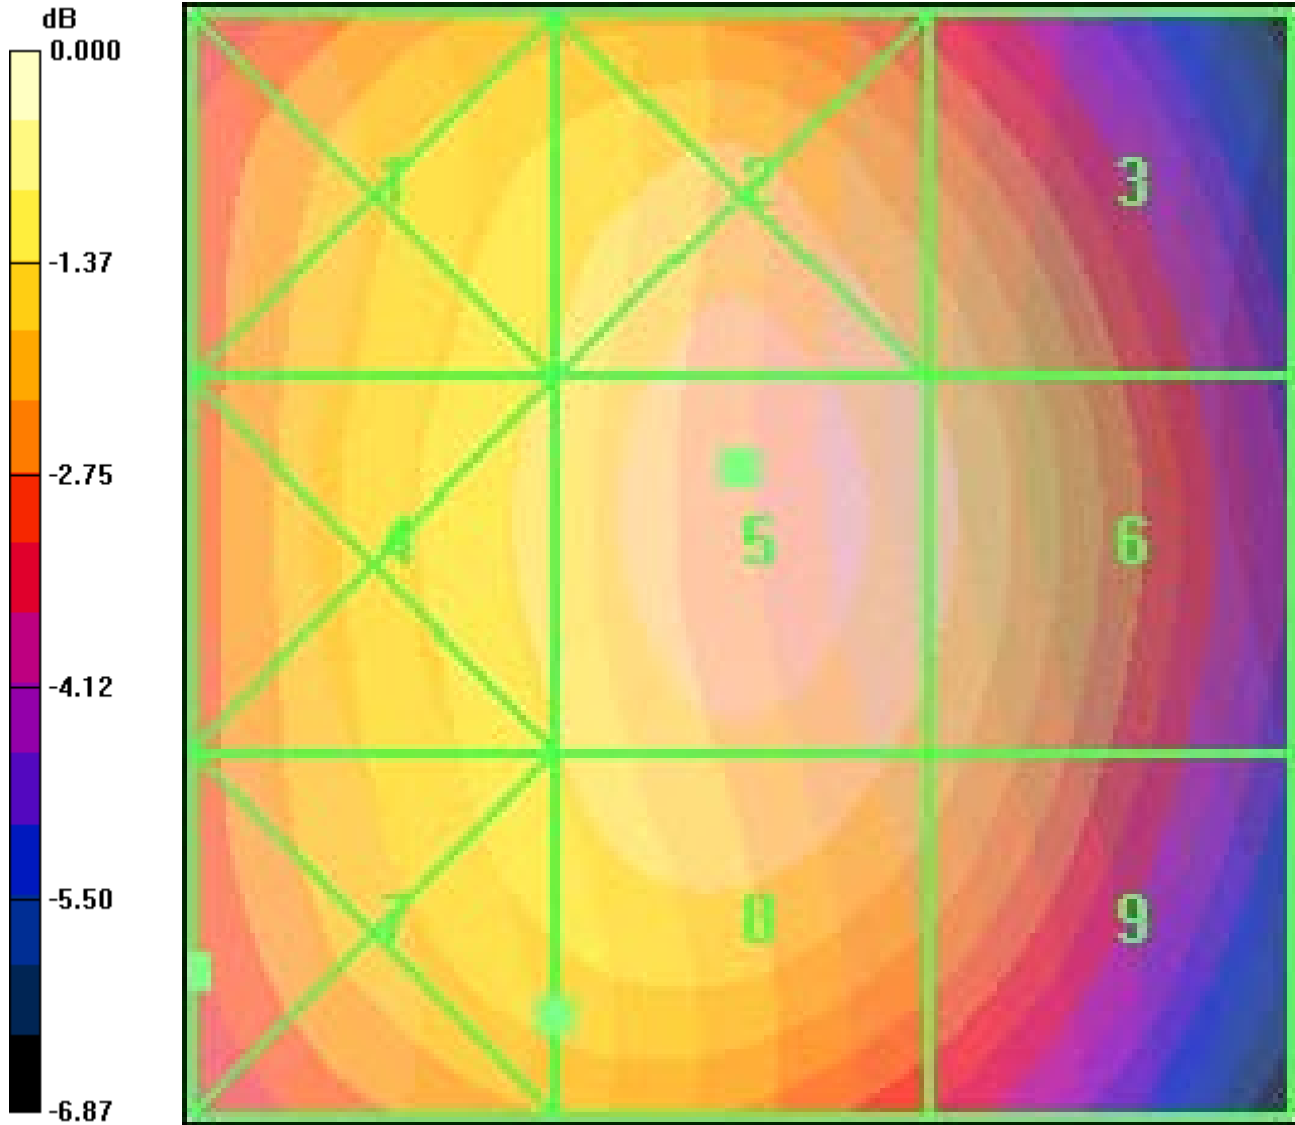

0 dB = 97.3V/m

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 800 Channel 383**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 836.49 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:** Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

**CELL\_383/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 90.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 118.8 V/m; Power Drift = 0.038 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>82.9 M4</b>	<b>89.1 M4</b>	<b>84.4 M4</b>
Grid 4	Grid 5	Grid 6
<b>84.2 M4</b>	<b>90.6 M4</b>	<b>86.3 M4</b>
Grid 7	Grid 8	Grid 9
<b>81.8 M4</b>	<b>87.2 M4</b>	<b>82.7 M4</b>

**CELL\_383/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.111 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.076 A/m; Power Drift = -0.088 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.159 M4</b>	<b>0.111 M4</b>	<b>0.068 M4</b>
Grid 4	Grid 5	Grid 6
<b>0.150 M4</b>	<b>0.101 M4</b>	<b>0.058 M4</b>
Grid 7	Grid 8	Grid 9
<b>0.154 M4</b>	<b>0.106 M4</b>	<b>0.064 M4</b>



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

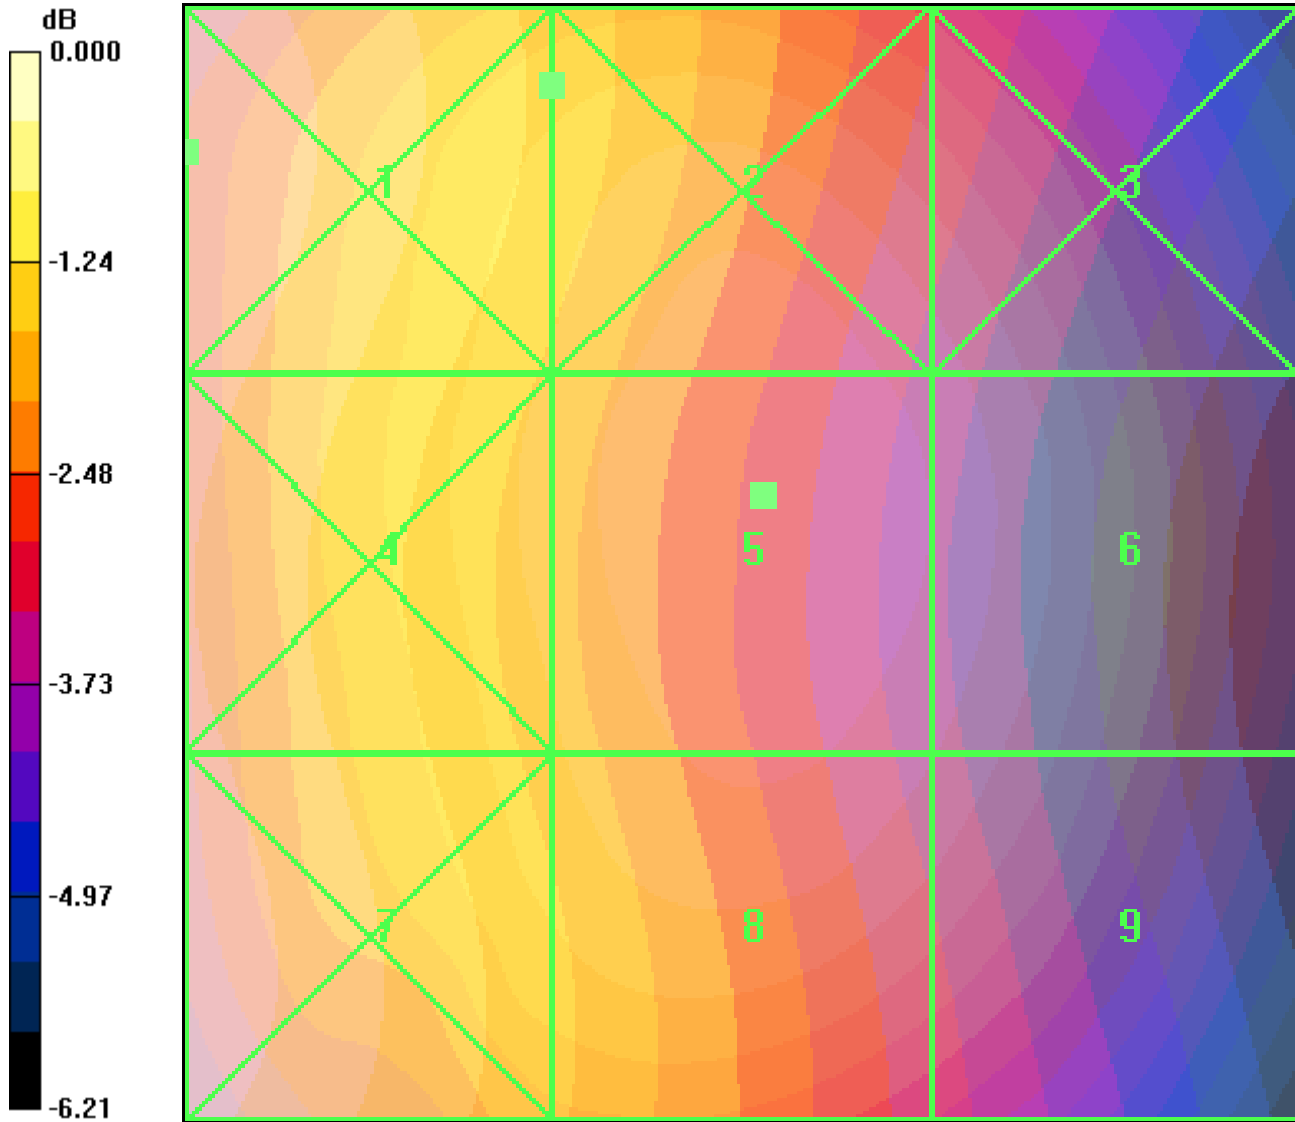

0 dB = 90.6V/m

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 800 Channel 777**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 848.31 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**CELL\_777/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 76.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 102.5 V/m; Power Drift = -0.142 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>70.4 M4</b>	Grid 2 <b>75.6 M4</b>	Grid 3 <b>72.0 M4</b>
Grid 4 <b>70.6 M4</b>	Grid 5 <b>76.9 M4</b>	Grid 6 <b>73.5 M4</b>
Grid 7 <b>67.8 M4</b>	Grid 8 <b>72.5 M4</b>	Grid 9 <b>69.4 M4</b>

**CELL\_777/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.101 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.067 A/m; Power Drift = -0.026 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.135 M4</b>	Grid 2 <b>0.089 M4</b>	Grid 3 <b>0.051 M4</b>
Grid 4 <b>0.133 M4</b>	Grid 5 <b>0.087 M4</b>	Grid 6 <b>0.052 M4</b>
Grid 7 <b>0.143 M4</b>	Grid 8 <b>0.101 M4</b>	Grid 9 <b>0.065 M4</b>



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

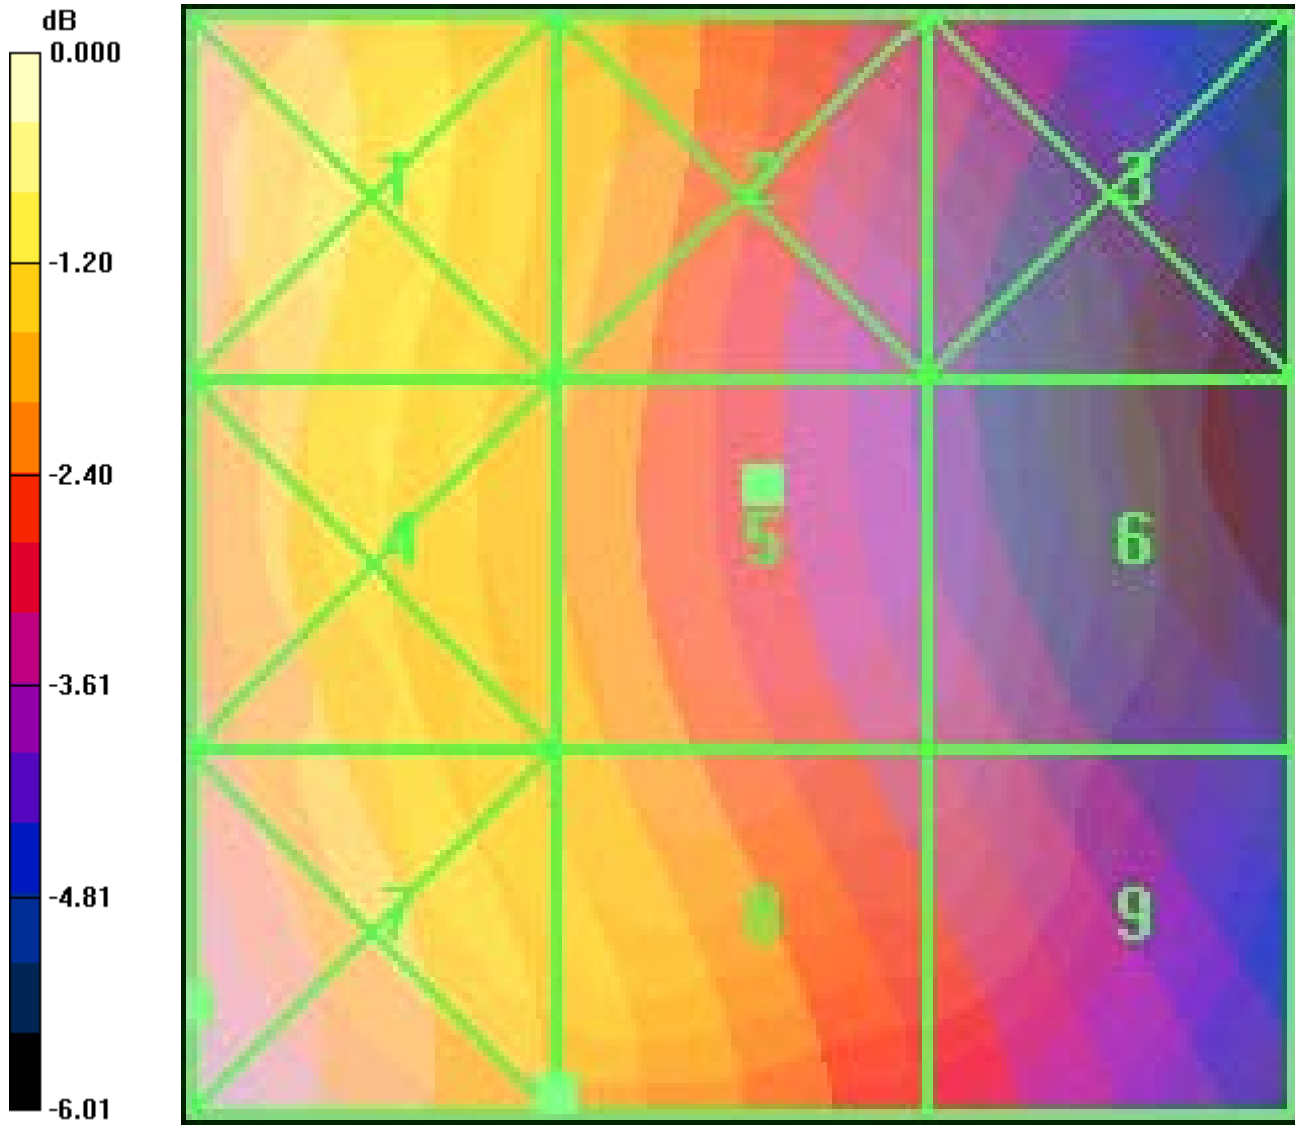


0 dB = 76.9V/m



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 800 Channel 1013 (360) E roll**

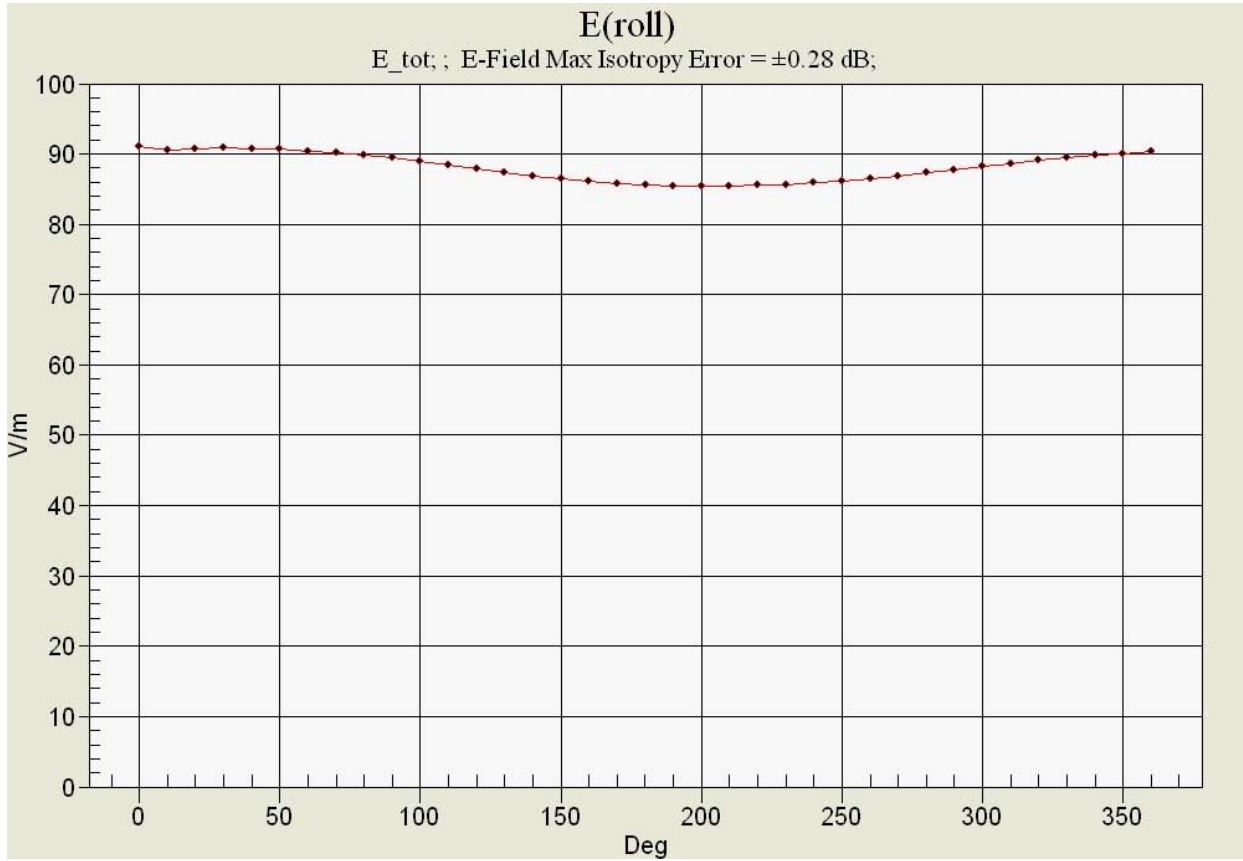

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1700 Channel 25**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 1711.25 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

**AWS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 46.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 56.1 V/m; Power Drift = 0.034 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>28.1 M4</b>	Grid 2 <b>37.8 M4</b>	Grid 3 <b>37.6 M4</b>
Grid 4 <b>39.6 M4</b>	Grid 5 <b>46.6 M4</b>	Grid 6 <b>45.4 M4</b>
Grid 7 <b>45.7 M4</b>	Grid 8 <b>48.0 M4</b>	Grid 9 <b>45.7 M4</b>

**AWS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.121 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.101 A/m; Power Drift = -0.207 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**


Peak H-field in A/m

Grid 1 <b>0.119 M4</b>	Grid 2 <b>0.101 M4</b>	Grid 3 <b>0.074 M4</b>
Grid 4 <b>0.153 M4</b>	Grid 5 <b>0.121 M4</b>	Grid 6 <b>0.080 M4</b>
Grid 7 <b>0.170 M4</b>	Grid 8 <b>0.134 M4</b>	Grid 9 <b>0.085 M4</b>





Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

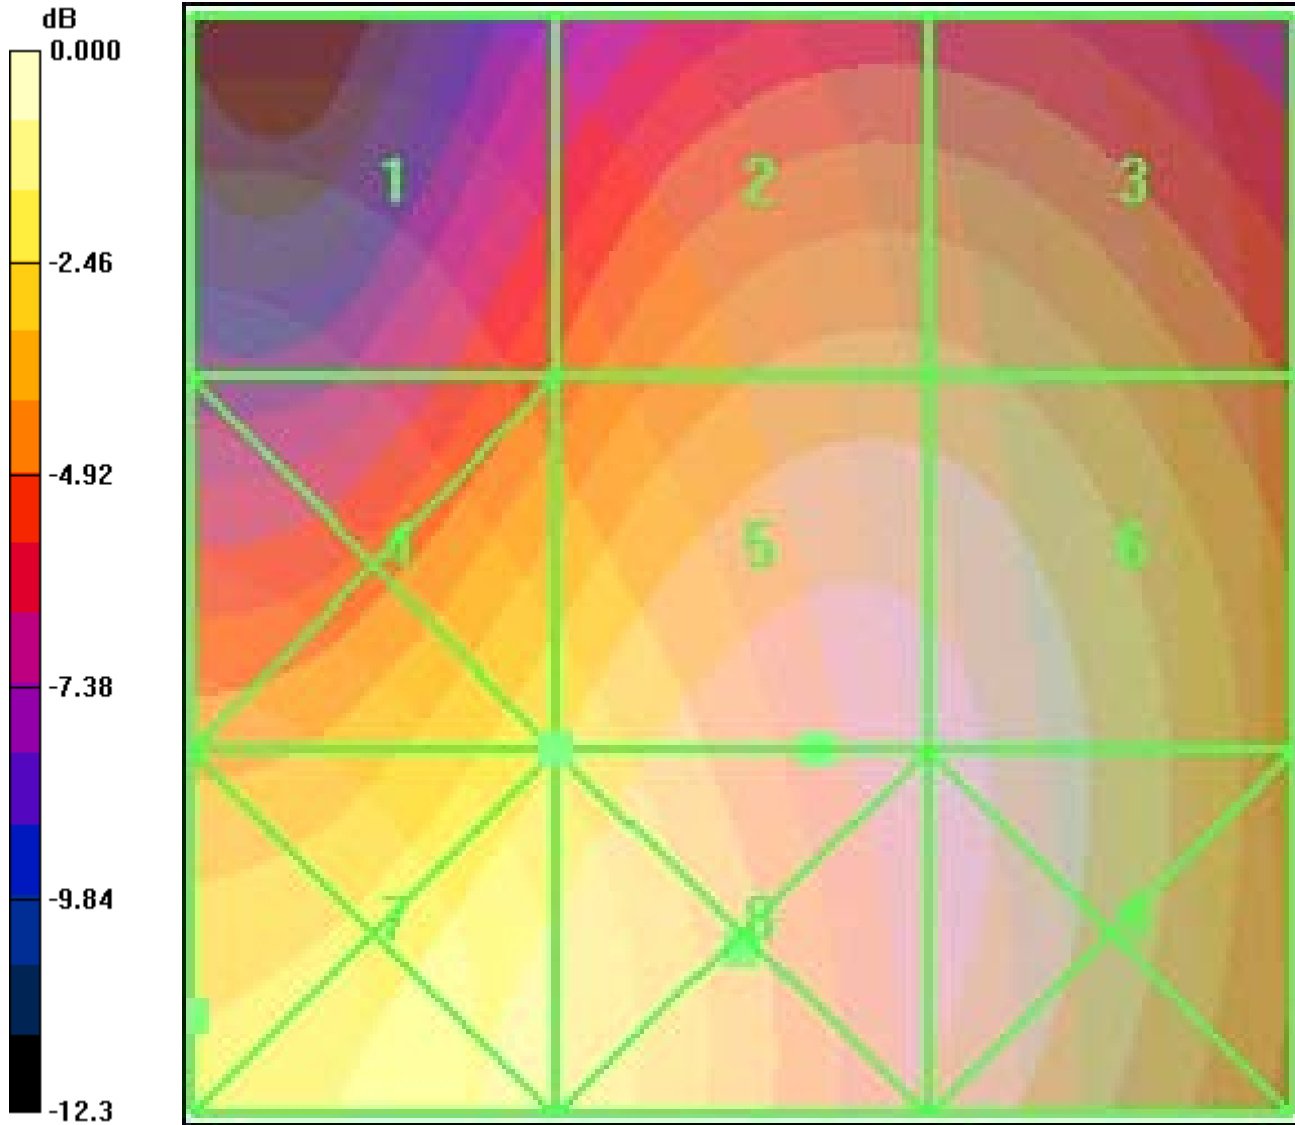

0 dB = 48.0V/m



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1700 Channel 450**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 1732.5 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010  
 Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186  
**Temperature:**  
 Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

**AWS\_450/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 55.0 V/m  
 Probe Modulation Factor = 1.00  
 Device Reference Point: 0.000, 0.000, -6.30 mm  
 Reference Value = 64.0 V/m; Power Drift = 0.020 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>33.8 M4</b>	Grid 2 <b>47.3 M4</b>	Grid 3 <b>47.3 M4</b>
Grid 4 <b>44.7 M4</b>	Grid 5 <b>55.0 M4</b>	Grid 6 <b>54.7 M4</b>
Grid 7 <b>50.3 M4</b>	Grid 8 <b>55.2 M4</b>	Grid 9 <b>54.7 M4</b>


**AWS\_450/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 0.144 A/m  
 Probe Modulation Factor = 1.00  
 Device Reference Point: 0.000, 0.000, -6.30 mm  
 Reference Value = 0.116 A/m; Power Drift = 0.118 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.136 M4</b>	Grid 2 <b>0.118 M4</b>	Grid 3 <b>0.086 M4</b>
Grid 4 <b>0.174 M4</b>	Grid 5 <b>0.144 M4</b>	Grid 6 <b>0.100 M4</b>
Grid 7 <b>0.195 M3</b>	Grid 8 <b>0.170 M4</b>	Grid 9 <b>0.123 M4</b>



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

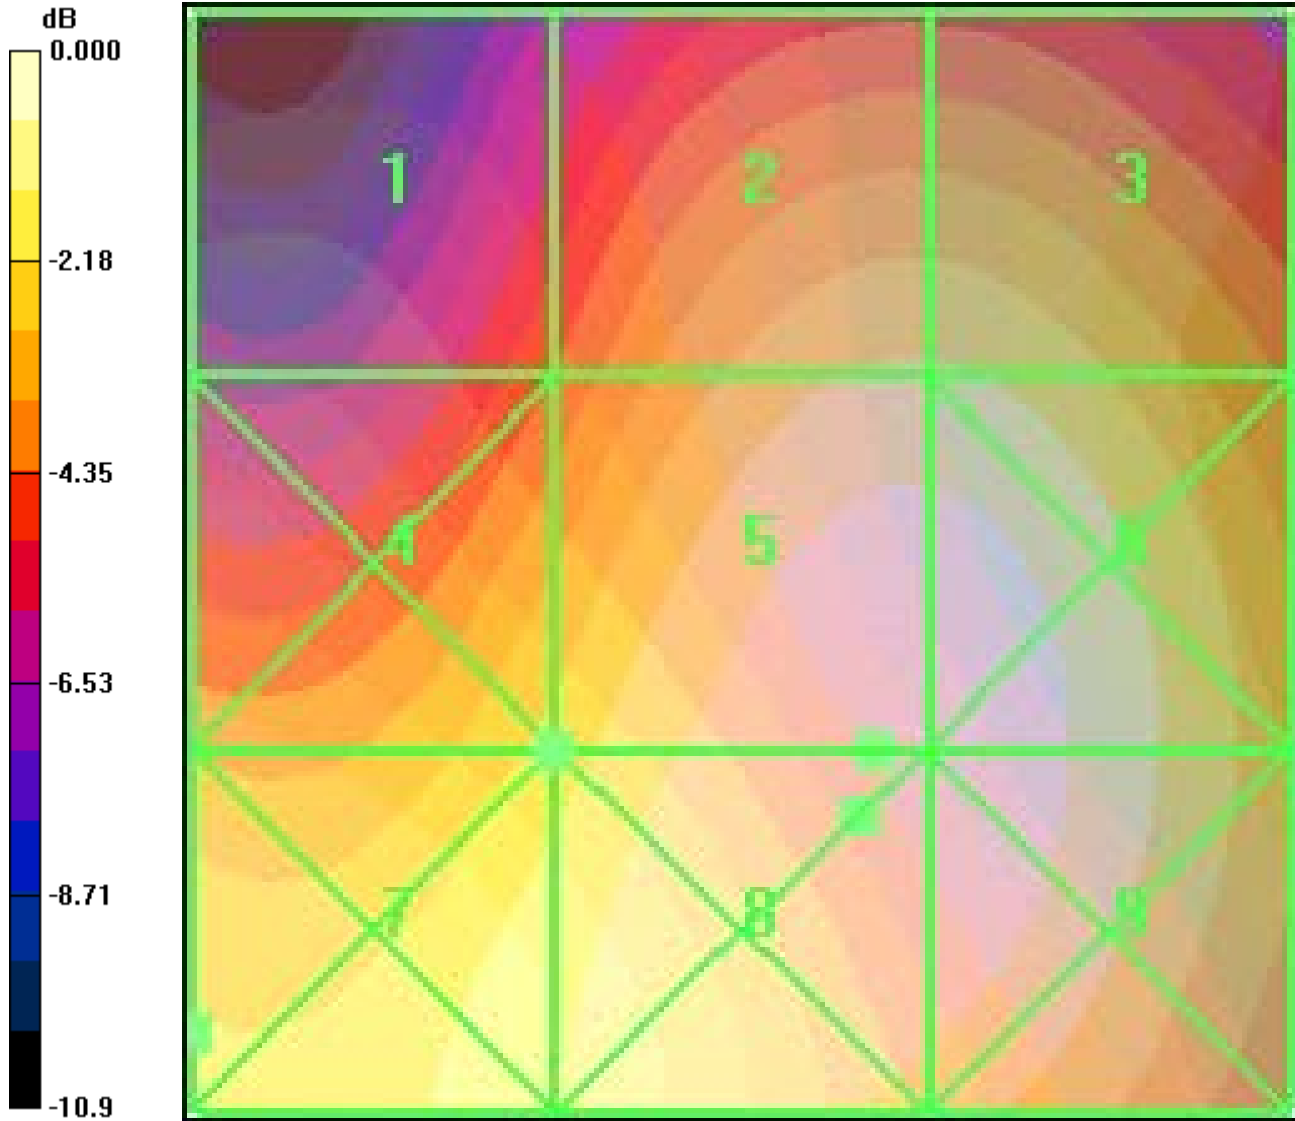

0 dB = 55.2V/m

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1700 Channel 875**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 1753.75 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

**AWS\_875/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 66.7 V/m; Power Drift = -0.120 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
<b>35.4 M4</b>	<b>45.3 M4</b>	<b>45.0 M4</b>
Grid 4	Grid 5	Grid 6
<b>45.5 M4</b>	<b>54.3 M4</b>	<b>53.3 M4</b>
Grid 7	Grid 8	Grid 9
<b>48.6 M4</b>	<b>54.6 M4</b>	<b>53.3 M4</b>

**AWS\_875/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.142 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.116 A/m; Power Drift = -0.046 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.140 M4</b>	<b>0.122 M4</b>	<b>0.085 M4</b>
Grid 4	Grid 5	Grid 6
<b>0.172 M4</b>	<b>0.142 M4</b>	<b>0.091 M4</b>
Grid 7	Grid 8	Grid 9
<b>0.184 M4</b>	<b>0.153 M4</b>	<b>0.098 M4</b>




Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

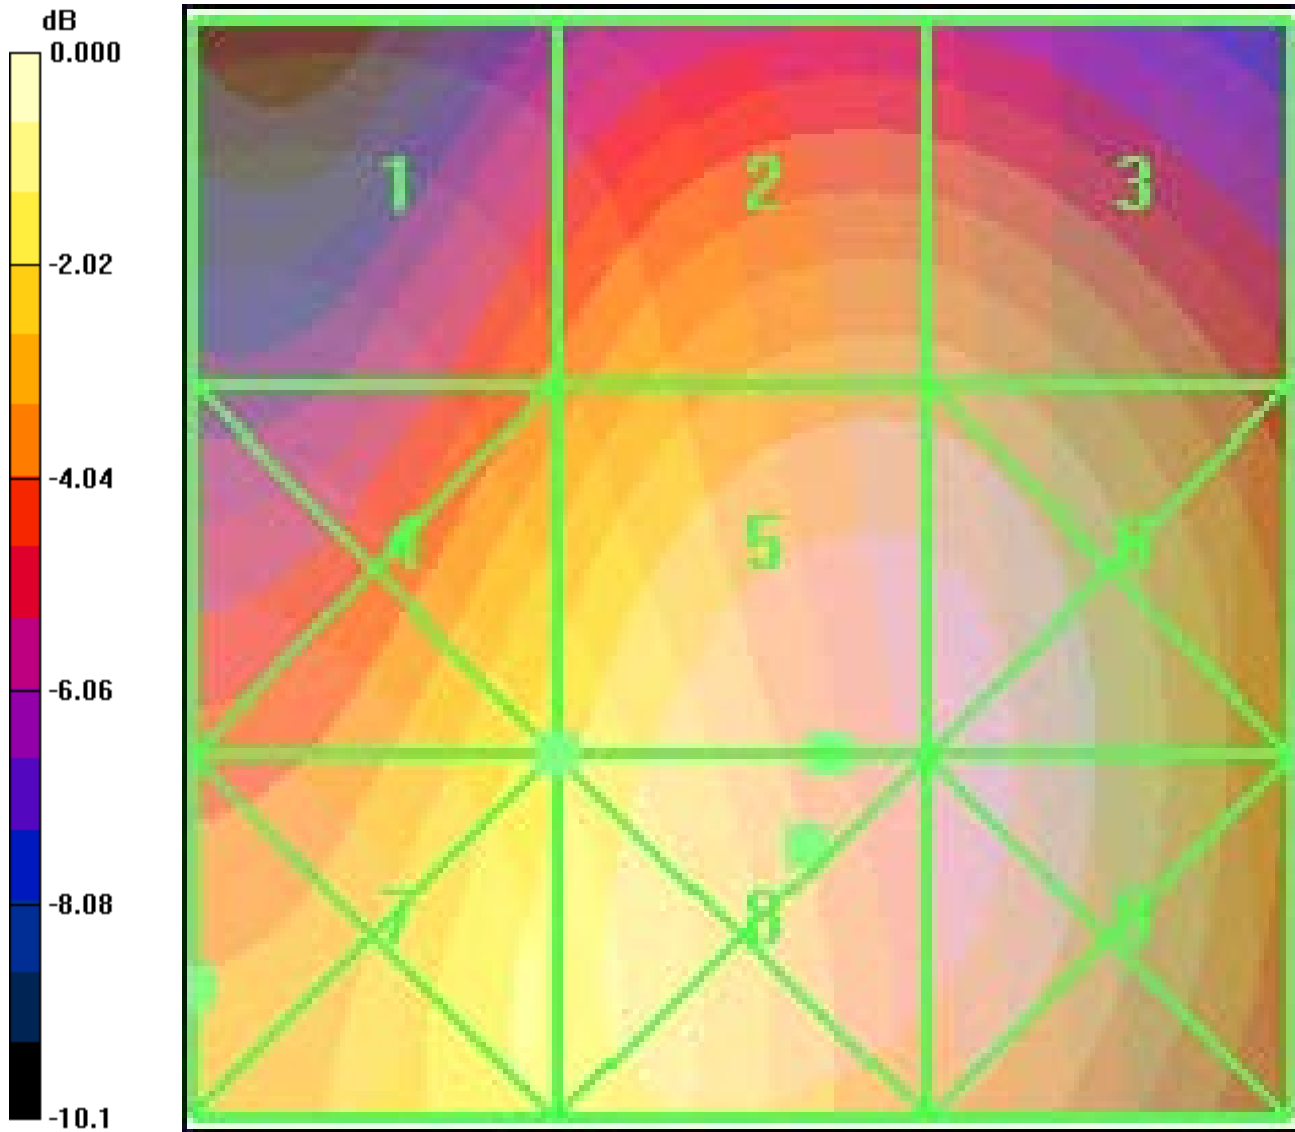

0 dB = 54.6V/m

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1700 Channel 450 (360) E roll**

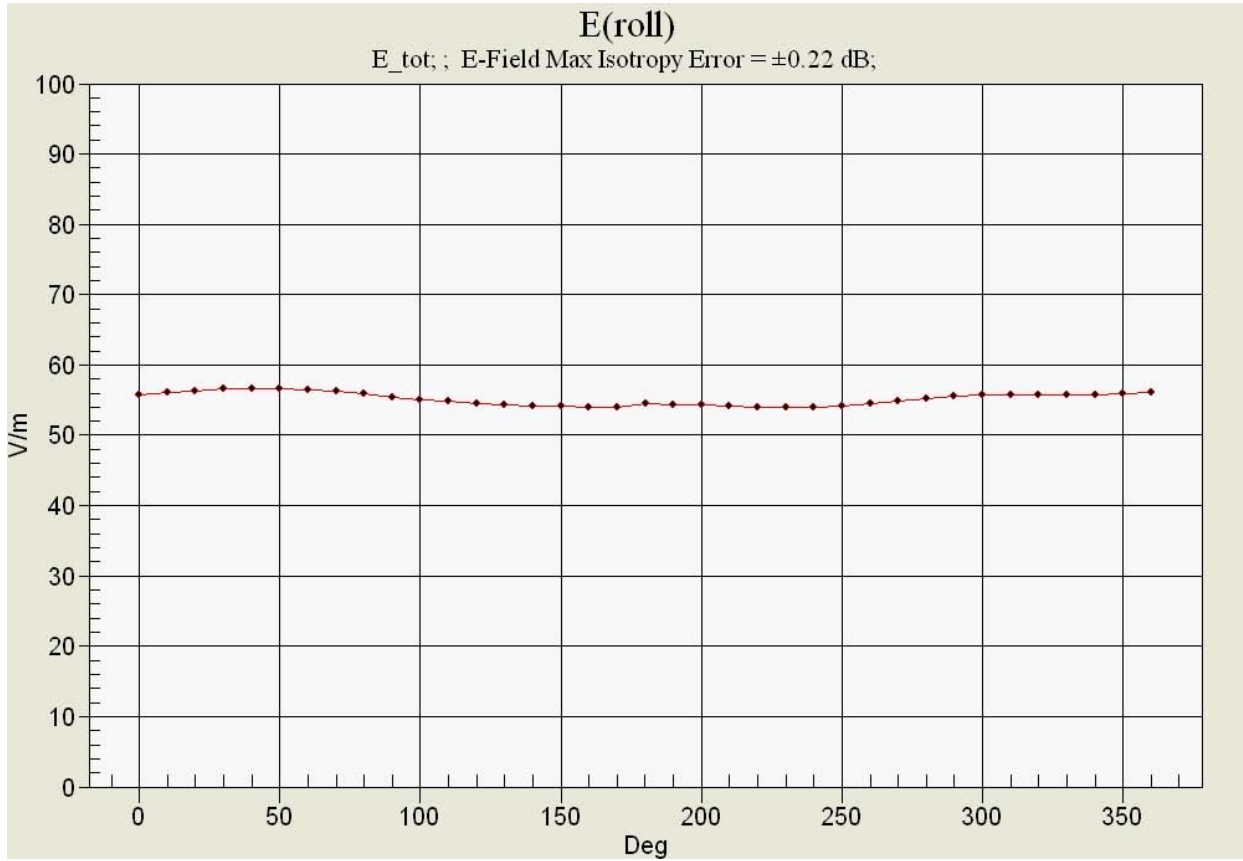

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1900 Channel 25**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 1850 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

**PCS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 61.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 74.8 V/m; Power Drift = -0.022 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>37.5 M4</b>	Grid 2 <b>55.1 M4</b>	Grid 3 <b>55.0 M4</b>
Grid 4 <b>45.8 M4</b>	Grid 5 <b>61.3 M4</b>	Grid 6 <b>61.0 M4</b>
Grid 7 <b>47.2 M4</b>	Grid 8 <b>61.1 M4</b>	Grid 9 <b>60.7 M4</b>

**PCS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.183 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.146 A/m; Power Drift = -0.077 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.175 M4</b>	Grid 2 <b>0.153 M4</b>	Grid 3 <b>0.101 M4</b>
Grid 4 <b>0.213 M3</b>	Grid 5 <b>0.183 M4</b>	Grid 6 <b>0.121 M4</b>
Grid 7 <b>0.223 M3</b>	Grid 8 <b>0.196 M3</b>	Grid 9 <b>0.134 M4</b>



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

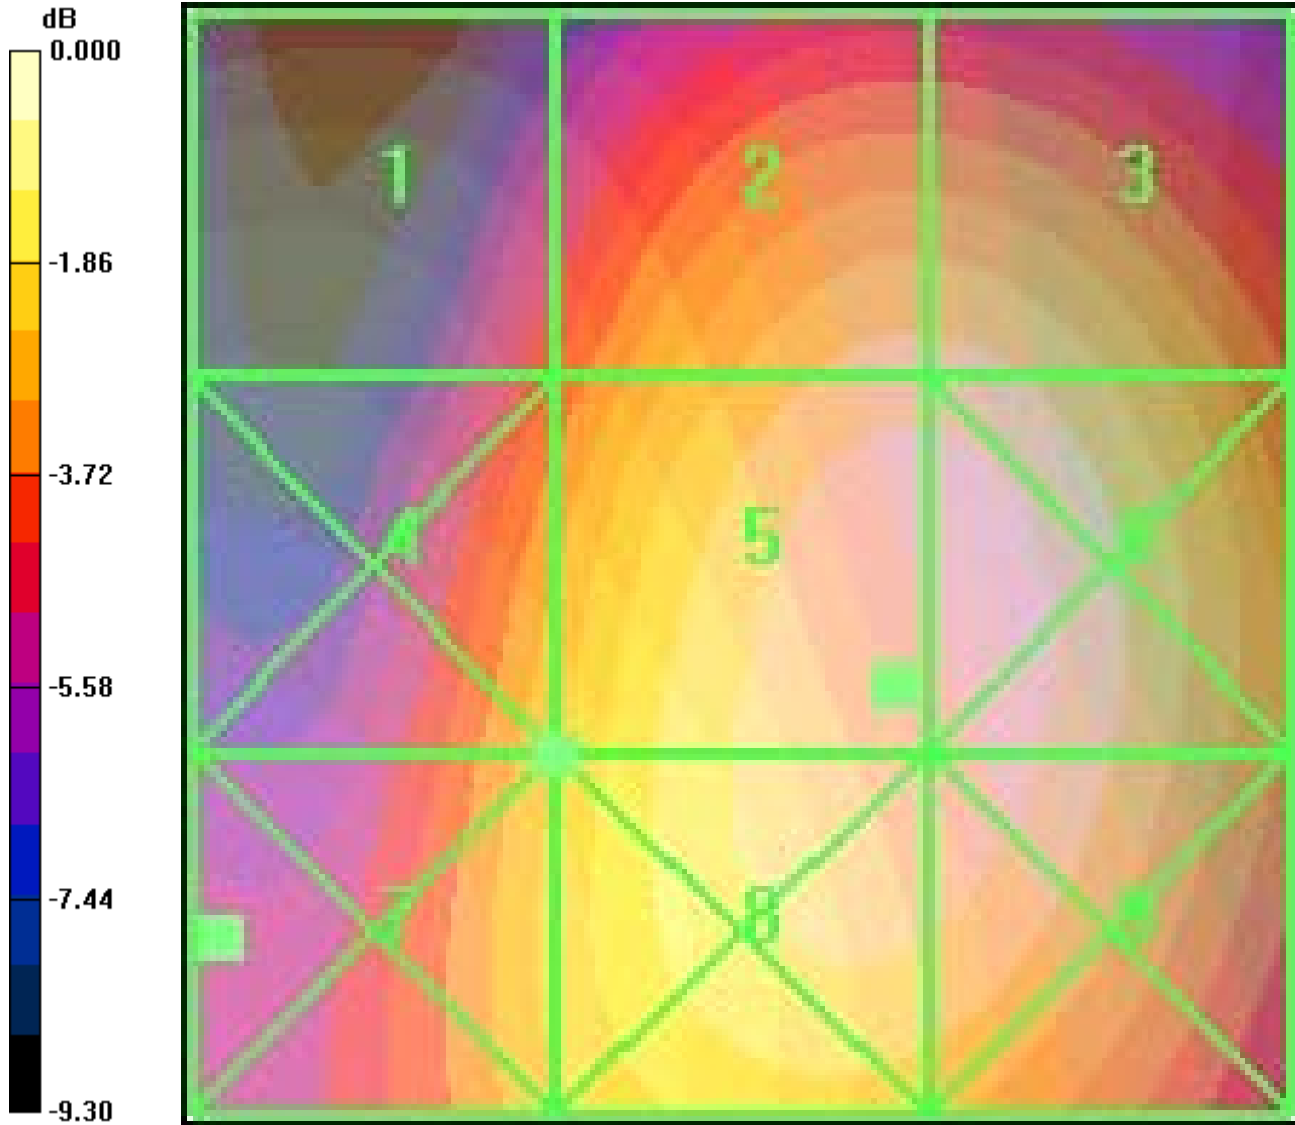



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1900 Channel 600**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 1880 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

**PCS\_600/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 57.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 68.5 V/m; Power Drift = -0.040 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>34.7 M4</b>	Grid 2 <b>50.7 M4</b>	Grid 3 <b>50.8 M4</b>
Grid 4 <b>42.2 M4</b>	Grid 5 <b>57.3 M4</b>	Grid 6 <b>57.3 M4</b>
Grid 7 <b>44.4 M4</b>	Grid 8 <b>57.3 M4</b>	Grid 9 <b>57.1 M4</b>

**PCS\_600/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.176 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.144 A/m; Power Drift = 0.104 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.173 M4</b>	Grid 2 <b>0.153 M4</b>	Grid 3 <b>0.100 M4</b>
Grid 4 <b>0.198 M3</b>	Grid 5 <b>0.176 M4</b>	Grid 6 <b>0.117 M4</b>
Grid 7 <b>0.203 M3</b>	Grid 8 <b>0.186 M4</b>	Grid 9 <b>0.130 M4</b>



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

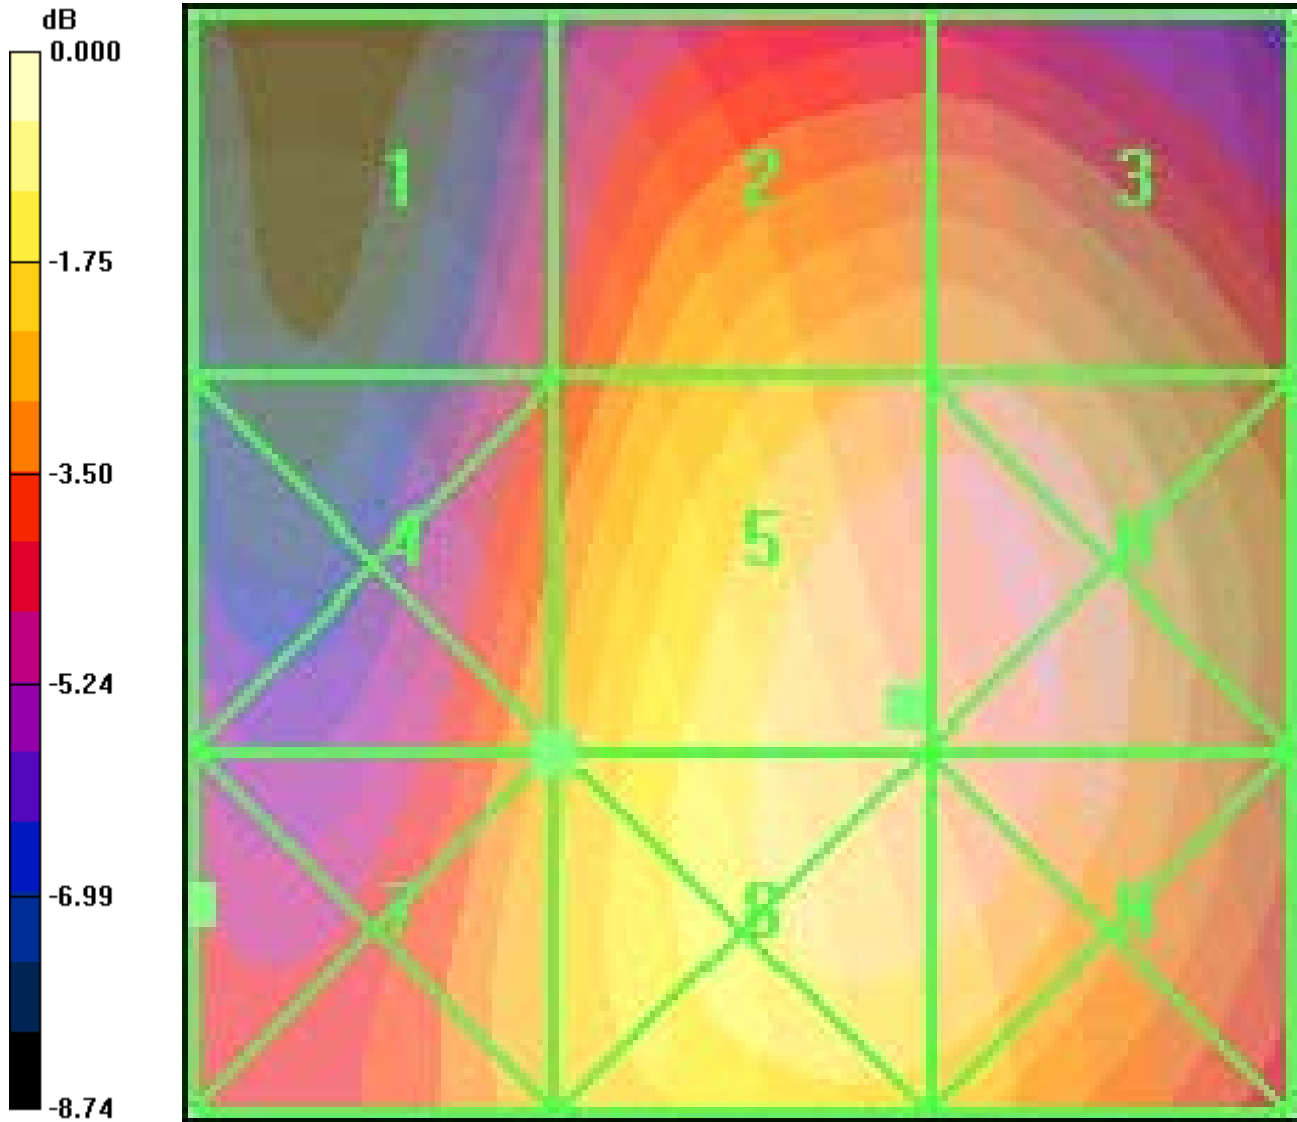

0 dB = 57.3V/m



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1900 Channel 1175**

Date: 01/13/2011

Communication System: CDMA\_Triband, Frequency: 1910 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010  
 Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186  
**Temperature:**  
 Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

**PCS\_1175/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 54.5 V/m  
 Probe Modulation Factor = 1.00  
 Device Reference Point: 0.000, 0.000, -6.30 mm  
 Reference Value = 63.2 V/m; Power Drift = -0.089 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>33.6 M4</b>	Grid 2 <b>50.2 M4</b>	Grid 3 <b>50.3 M4</b>
Grid 4 <b>37.2 M4</b>	Grid 5 <b>54.5 M4</b>	Grid 6 <b>54.7 M4</b>
Grid 7 <b>40.2 M4</b>	Grid 8 <b>54.1 M4</b>	Grid 9 <b>54.2 M4</b>


**PCS\_1175/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 0.151 A/m  
 Probe Modulation Factor = 1.00  
 Device Reference Point: 0.000, 0.000, -6.30 mm  
 Reference Value = 0.131 A/m; Power Drift = -0.085 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.149 M4</b>	Grid 2 <b>0.134 M4</b>	Grid 3 <b>0.093 M4</b>
Grid 4 <b>0.168 M4</b>	Grid 5 <b>0.151 M4</b>	Grid 6 <b>0.107 M4</b>
Grid 7 <b>0.173 M4</b>	Grid 8 <b>0.160 M4</b>	Grid 9 <b>0.113 M4</b>



Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

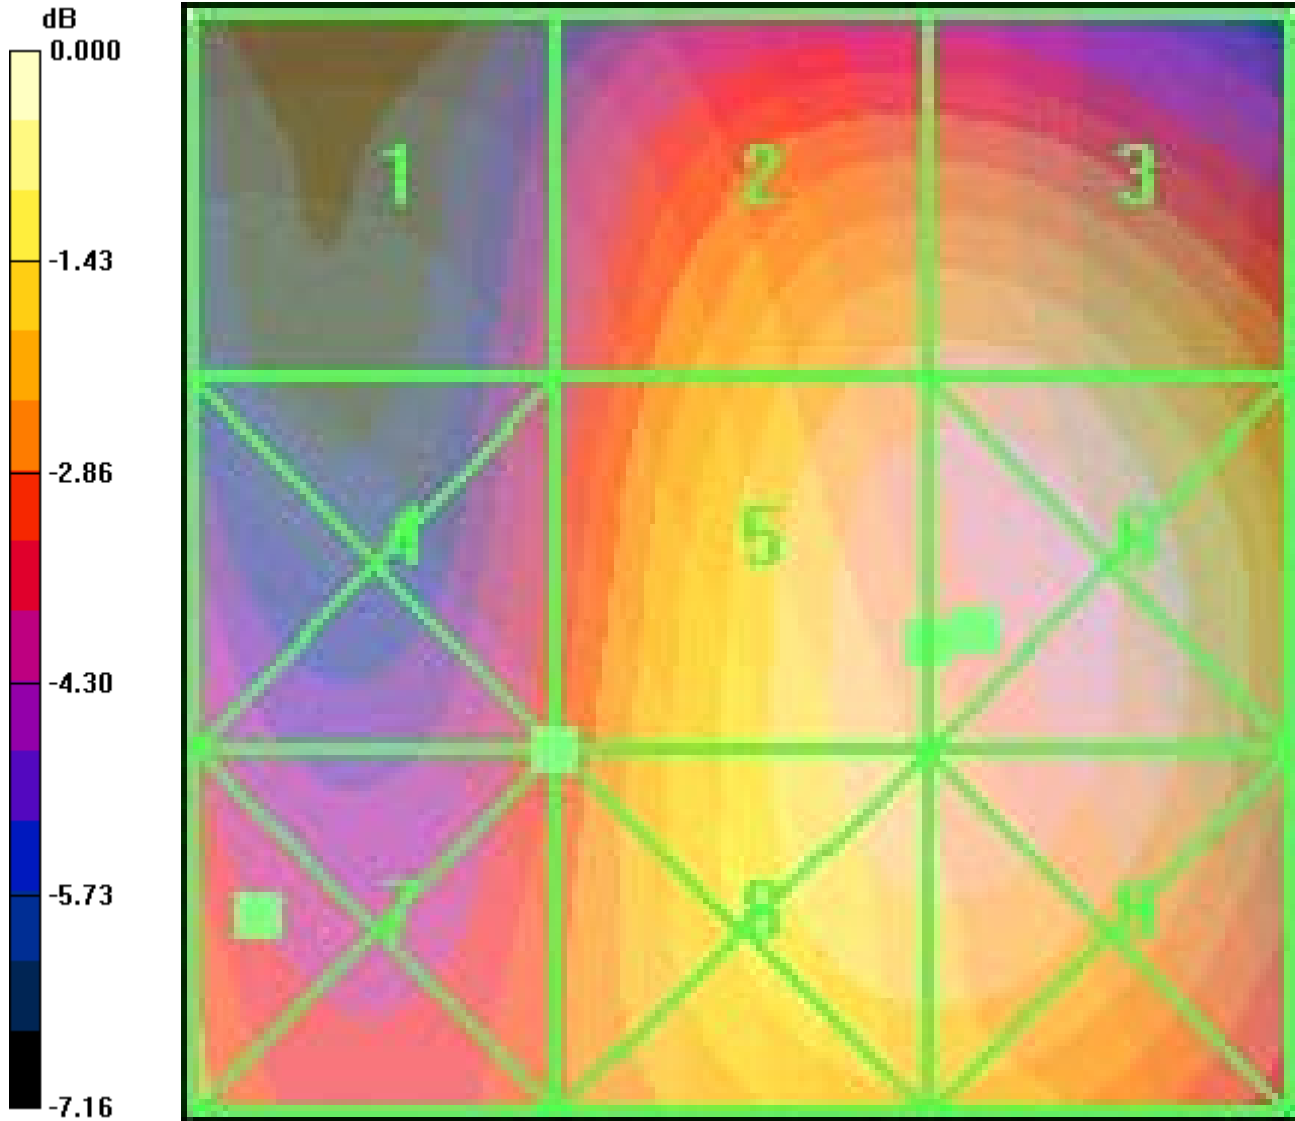

0 dB = 54.7V/m

Applicant	Kyocera
FCC ID:	OVF-K33BIC06
Report #:	CT-K33BIC-06A C2PC_20RFC-0111-R0

**CDMA 1900 Channel 25 (360) E roll**

