



Applicant:	Kyocera
FCC ID:	OVF-K5301
Report #:	CT- K5301-C2PC 9A-0811-R0

EXHIBIT 9 APPENDIX A: SAR VALIDATION PLOTS

Validation for HEAD

Applicant:	Kyocera
FCC ID:	OVF-K5301
Report #:	CT- K5301-C2PC 9A-0811-R0

Test Laboratory: Comptest/Kyocera

Date: 08/12/2011

1900MHz Validation @ 20dBm Probe 3035, DAE 675 and Dipole 5d016

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: HSL1900, Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ES3DV3 - SN3035, ConvF(5, 5, 5), Calibrated: 9/9/2010

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn675, Calibrated: 5/5/2011

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature: Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900MHz Validation @20dBm/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.92 mW/g


1900MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.3 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 7.51 W/kg

SAR(1 g) = 4.12 mW/g; SAR(10 g) = 2.15 mW/g


Maximum value of SAR (measured) = 4.66 mW/g

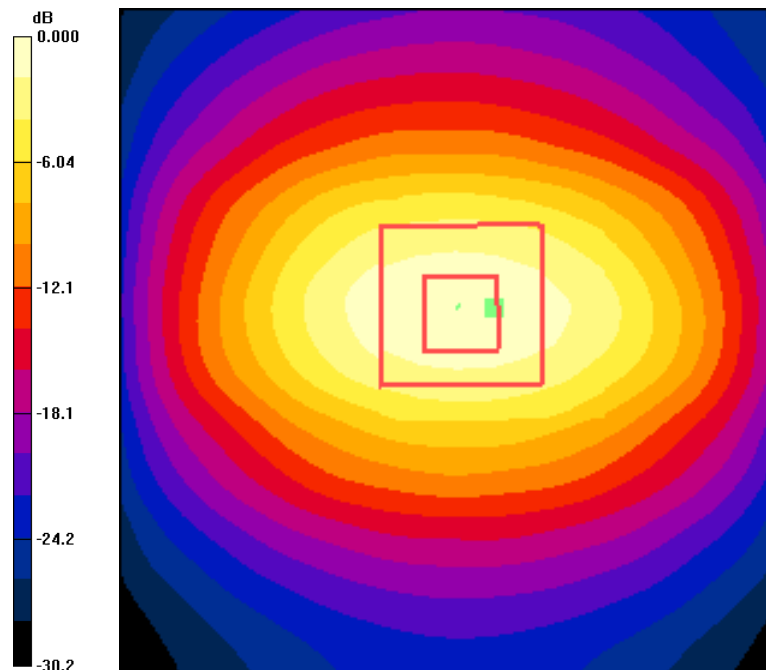

0 dB = 4.92mW/g



Applicant:	Kyocera
FCC ID:	OVF-K5301
Report #:	CT- K5301-C2PC 9A-0811-R0

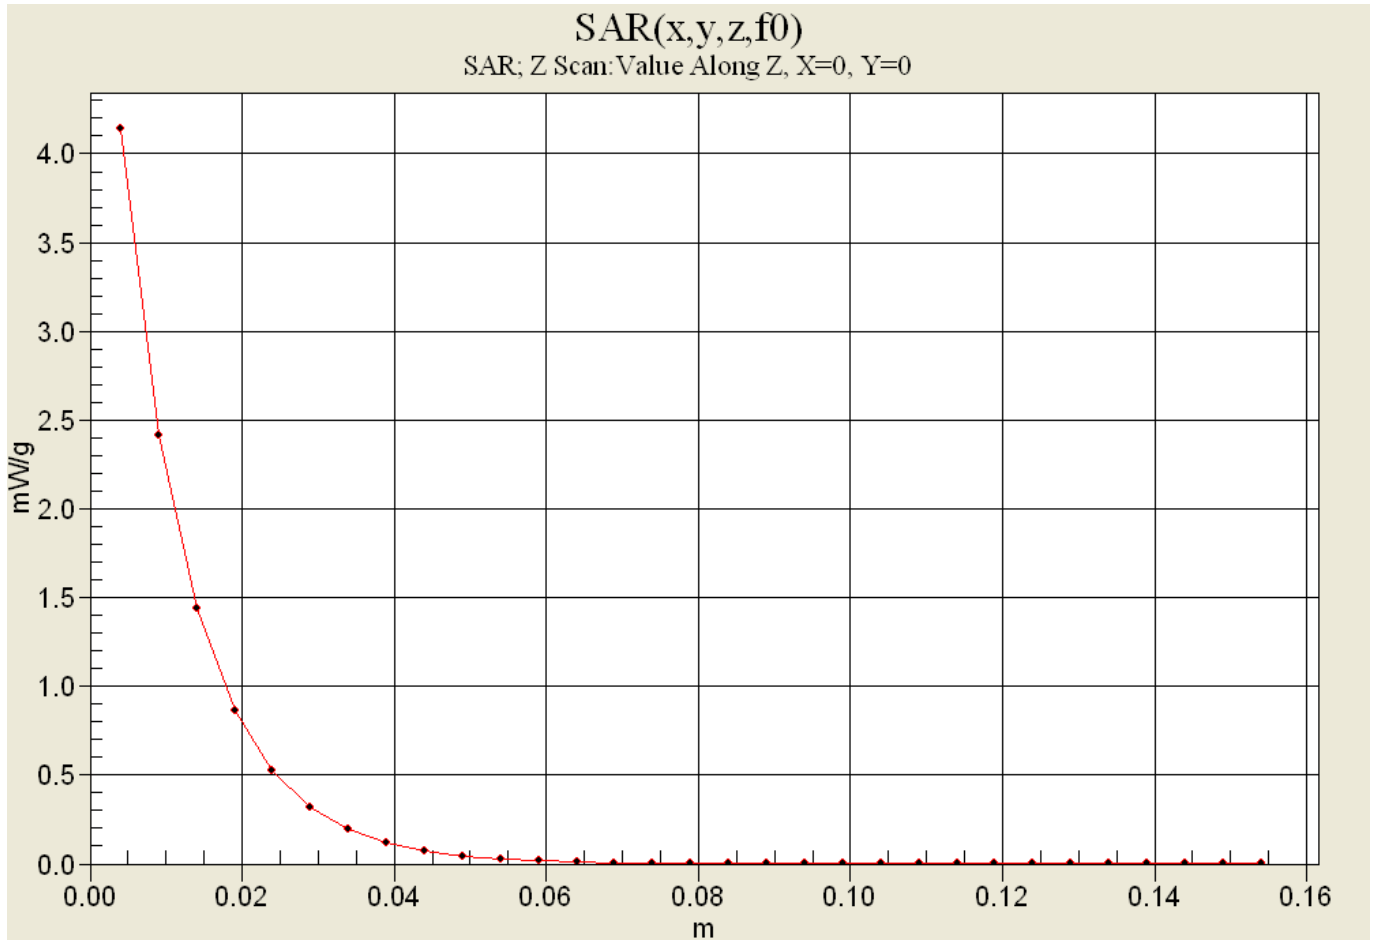



Applicant:	Kyocera
FCC ID:	OVF-K5301
Report #:	CT- K5301-C2PC 9A-0811-R0

Validation for BODY

Applicant:	Kyocera
FCC ID:	OVF-K5301
Report #:	CT- K5301-C2PC 9A-0811-R0

Test Laboratory: Comptest/Kyocera

Date: 08/15/2011

1900MHz Validation (Muscle) @ 20dBm Probe 3036, DAE 530 and Dipole 5d016

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: M1900, Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ES3DV3 - SN3036, ConvF(4.57, 4.57, 4.57), Calibrated: 5/11/2011

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn530, Calibrated: 5/5/2011

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

Temperature: Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900MHz Validation @20dBm/Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.31 mW/g


1900MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.3 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 7.95 W/kg

SAR(1 g) = 4.36 mW/g; SAR(10 g) = 2.27 mW/g

Maximum value of SAR (measured) = 4.94 mW/g

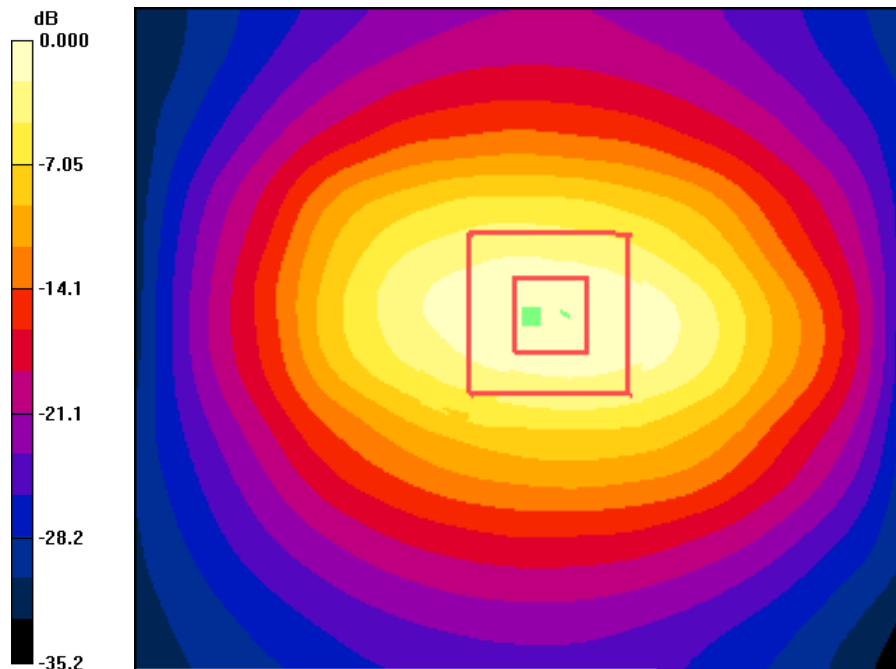

0 dB = 5.31mW/g



Applicant:	Kyocera
FCC ID:	OVF-K5301
Report #:	CT- K5301-C2PC 9A-0811-R0

