



**RADIATED SPURIOUS EMISSIONS PORTIONS OF**

**FCC CFR47 PART 22 SUBPART H  
FCC CFR47 PART 24 SUBPART E  
FCC CFR47 PART 27 SUBPART L  
INDUSTRY CANADA RSS-132 ISSUE 2  
INDUSTRY CANADA RSS-133 ISSUE 5  
INDUSTRY CANADA RSS-139 ISSUE 2**

**CERTIFICATION TEST REPORT  
FOR**

**TRI-BAND 1xRTT CDMA PHONE WITH BLUETOOTH**

**FCC MODEL NUMBER: K53-02  
IC MODEL NUMBER: S2300**

**FCC ID: OVF-K5302  
IC: 3572A- S2300**

**REPORT NUMBER: 10U13021-3**

**ISSUE DATE: JANUARY 18, 2010**

*Prepared for*

**KYOCERA WIRELESS CORP  
10300 CAMPUS POINT DRIVE  
SAN DIEGO, CA 92121, U.S.A.**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	01/18/10	Initial Issue	T. Chan

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>SAMPLE CALCULATION</i> .....	5
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	6
5.3. <i>SOFTWARE AND FIRMWARE</i> .....	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	7
5.5. <i>DESCRIPTION OF TEST SETUP</i> .....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>10</b>
<b>7. LIMITS AND RESULTS</b> .....	<b>11</b>
7.1. <i>RADIATED OUTPUT POWER</i> .....	11
7.2. <i>FIELD STRENGTH OF SPURIOUS RADIATION</i> .....	15
7.3. <i>RECEIVER SPURIOUS EMISSIONS</i> .....	19
7.4. <i>POWER LINE CONDUCTED EMISSION</i> .....	24
<b>8. SETUP PHOTOS</b> .....	<b>28</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** KYOCERA WIRELESS  
10300 CAMPUS POINT DRIVE  
SAN DIEGO, CA 92121, USA

**EUT DESCRIPTION:** TRI-BAND 1XRTT CDMA PHONE WITH BLUETOOTH

**MODEL:** K53-02 for FCC & S2300 for IC

**SERIAL NUMBER:** FFS23000001869

**DATE TESTED:** JANUARY 13 -15, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, AND 27L	PASS (Radiated Portion)
IC RSS-132 ISSUE 2, RSS-133 ISSUE 5, AND RSS-139 ISSUE 2	PASS (Radiated Portion)

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



THU CHAN  
EMC MANAGER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



MENGISTU MEKURIA  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47 Part 22, FCC CFR Part 24, FCC Part 27, RSS-132 Issue 2, RSS-133 Issue 5 and RSS-139 Issue 2.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth featured Tri-band CDMA Phone that manufactured by Kyocera Wireless Corporations.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum ERP & EIRP output powers as follows:

824 to 849 MHz Authorized Band

Frequency Range (MHz)	Modulation	ERP Peak Power (dBm)	ERP Peak Power (mW)
Low CH - 824.70	CDMA2000	24.7	295.1
Mid CH - 836.52		25.8	380.2
High CH - 848.31		26.5	446.7

1850 to 1910 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low CH - 1851.25	CDMA2000	24.0	251.2
Mid CH - 1880.00		24.1	257.0
High CH - 1908.75		23.8	239.9

1710 to 1755 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low CH - 1711.25	AWS	24.9	309.0
MID-Ch- 1733.00		26.0	398.1
High CH - 1753.75		25.4	346.7

### 5.3. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

### 5.4. WORST-CASE CONFIGURATION AND MODE

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT was investigated for X, Y, and Z-Positions, and the worst position among X, Y, and Z with AC/DC adapter, after the investigations, the worst-position was turned out to be an Z-position without AC/DC adapter for Cell band and X-position without AC/DC for AWS, and PCS bands.

#### PROCEDURE USED TO ESTABLISH TEST SIGNAL

##### **3G-CDMA2000 1xRTT**

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobil Test	B.10.11, L

##### 1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps  
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 4395  
> Network ID (NID) > 0

Once "Active Cell" show "Connected " then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Kyocera	TXTVL10148	936S-001Y	DoC

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC Input	1	Mini-USB	Un-Shielded	2.0 m	N/A

### TEST SETUP

The EUT is a CDMA phone and-is tested as a standalone configuration. Communications Test Set is used to link the device under test.



**SETUP DIAGRAM FOR TESTS**

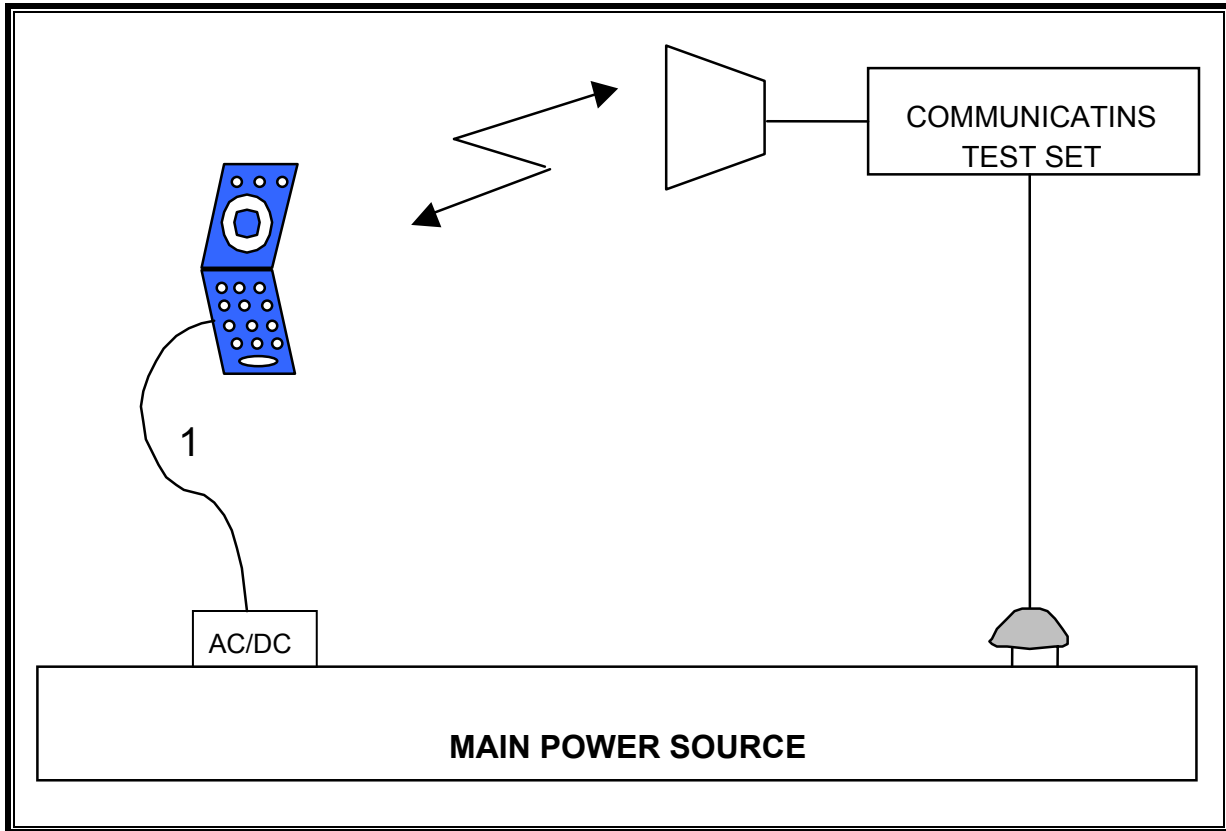

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	02/04/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00778	01/06/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/14/10
Antenna, Horn, 18 GHz	EMCO	3115	C00783	01/29/10
Antenna, Horn, 18 GHz	EMCO	3115	C00943	01/29/10
Dipole	Speag	D900V2	NA	11/16/11
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Signal Generator	R & S	SMP04	C00953	02/16/11
Communications Test Set	R & S	CMU200	C001131	04/16/10
Communications Test Set	Agilent / HP	E5515C	C01086	06/16/10
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	10/08/10
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/06/10

## **7. LIMITS AND RESULTS**

### **7.1. RADIATED OUTPUT POWER**

#### **LIMITS**

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(b) & RSS133 § 6.4 Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50 (d) (2) & RSS-139 § 6.4 Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to a peak EIRP of 1 watt.

RSS-132 § 4.4 The maximum ERP shall be 6.3 Watts for mobile stations.

#### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 2.2.17, RSS-132, RSS-133, & RSS-139

#### **RESULTS**

**CELL OUTPUT POWER (ERP)**

High Frequency Substitution Measurement Compliance Certification Services Chamber B							
<b>Company:</b>		KYOCERA WIRELESS CORP.					
<b>Project #:</b>		10U13021					
<b>Date:</b>		1/14/2010					
<b>Test Engineer:</b>		MENGISTU MEKURIA					
<b>Configuration:</b>		EUT ALONE					
<b>Mode:</b>		TX, CDMA CELL BAND					
<b>Test Equipment:</b>							
Receiving: Sunol T130, and 3m Chamber N-type Cable (Setup this one for testing EUT)							
Substitution: Dipole S/N: 00022117, 6ft SMA Cable (SN # 208947003) Warehouse.							
f MHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
824.70	-7.9	V	32.6	24.7	38.5	-13.8	
824.70	-20.9	H	30.4	9.5	38.5	-29.0	
836.52	-6.9	V	32.7	25.8	38.5	-12.7	
836.52	-19.9	H	30.7	10.9	38.5	-27.6	
848.31	-5.4	V	32.0	26.5	38.5	-11.9	
848.31	-18.6	H	30.8	12.2	38.5	-26.3	
Rev. 1.24.7							

**PCS OUTPUT POWER (EIRP)**

High Frequency Fundamental Measurement Compliance Certification Services Chamber B							
<b>Company:</b>	KYOCERA WIRELESS CORP.						
<b>Project #:</b>	10U13021						
<b>Date:</b>	1/14/2010						
<b>Test Engineer:</b>	MENGISTU MEKURIA						
<b>Configuration:</b>	EUT ALONE						
<b>Mode:</b>	TX, CDMA PCS BAND						
<b>Test Equipment:</b>							
Receiving: Horn T59, and Camber B SMA Cables							
Substitution: Horn T72 Substitution, 6ft SMA Cable (208947003) Warehouse							
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.851	-26.5	V	40.2	13.6	33.0	-19.4	
1.851	-15.5	H	39.5	24.0	33.0	-9.0	
1.880	-24.9	V	40.3	15.4	33.0	-17.6	
1.880	-16.0	H	40.1	24.1	33.0	-8.9	
1.909	-26.1	V	40.2	14.1	33.0	-18.9	
1.909	-16.3	H	40.1	23.8	33.0	-9.2	
Rev. 1.24.7							

**AWS OUTPUT POWER (EIRP)**

High Frequency Fundamental Measurement Compliance Certification Services Chamber A							
<b>Company:</b>		KYOCERA WIRELESS CORP.					
<b>Project #:</b>		10U13021					
<b>Date:</b>		1/15/2010					
<b>Test Engineer:</b>		MENGISTU MEKURIA					
<b>Configuration:</b>		EUT ALONE					
<b>Mode:</b>		TX, CDMA AWS BAND					
<b>Test Equipment:</b>							
Receiving: Horn T59, and Camber B SMA Cables							
Substitution: Horn T72 Substitution, 6ft SMA Cable (208947003) Warehouse							
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.711	-24.0	V	39.9	15.9	30.0	-14.1	
1.711	-13.7	H	38.6	24.9	30.0	-5.1	
1.733	-23.9	V	40.4	16.5	30.0	-13.5	
1.733	-13.2	H	39.2	26.0	30.0	-4.0	
1.754	-24.9	V	40.2	15.3	30.0	-14.7	
1.754	-14.2	H	39.6	25.4	30.0	-4.6	
Rev. 1.24.7							

## **7.2. FIELD STRENGTH OF SPURIOUS RADIATION**

### **LIMIT**

§22.917 (e) and §24.238 (a), RSS-132 § 4.5.1, & RSS-133 § 6.5.1 (a) (i) & (b): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

§27.53 (g) and RSS-139 § 6.5 For operations in the 1710–1755MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.

### **TEST PROCEDURE**

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 22.917 (b), FCC 24.238 (b), & FCC 27.53 (g)(1)(2)(3), RSS-132, RSS-133, & RSS-139

### **RESULTS**

**CELL SPURIOUS & HARMONIC (ERP)**

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement											
<b>Company:</b>		KYOCERA WIRELESS CORP.									
<b>Project #:</b>		10U13021									
<b>Date:</b>		1/15/2010									
<b>Test Engineer:</b>		MENGISTU MEKURIA									
<b>Configuration:</b>		EUT ALONE									
<b>Mode:</b>		TX, CDMA CELL BAND									
<b>Chamber</b>		<b>Pre-amplifier</b>			<b>Filter</b>			<b>Limit</b>			
5m Chamber B		T145 8449B			Filter 1			FCC PART 22			
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
<b>Low Channel (824.70 MHz)</b>											
1.649	-25.6	V	3.0	36.8	35.5	1.0	-25.5	-13.0	-12.5		
2.474	-43.0	V	3.0	41.7	35.4	1.0	-37.8	-13.0	-24.8		
1.649	-29.9	H	3.0	37.2	35.5	1.0	-29.4	-13.0	-16.4		
2.474	-39.0	H	3.0	39.8	35.4	1.0	-35.7	-13.0	-22.7		
<b>Mid Channel (836.52 MHz)</b>											
1.673	-28.7	V	3.0	37.1	35.5	1.0	-28.3	-13.0	-15.3		
2.510	-44.2	V	3.0	41.8	35.4	1.0	-38.9	-13.0	-25.9		
1.673	-32.2	H	3.0	37.5	35.5	1.0	-31.4	-13.0	-18.4		
2.510	-41.4	H	3.0	39.9	35.4	1.0	-38.1	-13.0	-25.1		
<b>Hi Channel (848.31 MHz)</b>											
1.697	-33.6	V	3.0	37.4	35.5	1.0	-32.8	-13.0	-19.8		
2.545	-47.3	V	3.0	42.0	35.4	1.0	-42.0	-13.0	-29.0		
1.697	-32.7	H	3.0	37.7	35.5	1.0	-31.7	-13.0	-18.7		
2.545	-42.8	H	3.0	40.1	35.4	1.0	-39.2	-13.0	-26.2		
<p><b>Note:</b> No other emission were detected within 30dB margin to the limit.</p> <p>Rev. 03.03.09</p>											



**PCS Spurious & Harmonic (EIRP)**

Compliance Certification Services  
 Above 1GHz High Frequency Substitution Measurement

**Company:** KYOCERA WIRELESS CORP.  
**Project #:** 10U13021  
**Date:** 1/15/2010  
**Test Engineer:** MENGISTU MEKURIA  
**Configuration:** EUT ALONE  
**Mode:** TX, CDMA PCS BAND

**Chamber**

5m Chamber B

**Pre-amplifier**

T145 8449B

**Filter**

Filter 1

**Limit**

FCC PART 24

f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Channel (1851.25 MHz)</b>										
3.703	-60.4	V	3.0	45.1	35.4	1.0	-49.6	-13.0	-36.6	
9.256	-64.0	V	3.0	53.6	35.6	1.0	-45.0	-13.0	-32.0	
3.703	-62.1	H	3.0	45.3	35.4	1.0	-51.1	-13.0	-38.1	
9.256	-66.1	H	3.0	55.1	35.6	1.0	-45.7	-13.0	-32.7	
1.414	-41.4	H	3.0	35.1	35.8	1.0	-41.0	-13.0	-28.0	
<b>Mid Channel (1880.00 MHz)</b>										
3.760	-62.8	V	3.0	45.3	35.3	1.0	-51.9	-13.0	-38.9	
9.400	-65.4	V	3.0	53.7	35.6	1.0	-46.2	-13.0	-33.2	
3.760	-62.7	H	3.0	45.5	35.3	1.0	-51.5	-13.0	-38.5	
9.400	-66.7	H	3.0	55.2	35.6	1.0	-46.0	-13.0	-33.0	
1.146	-48.6	H	3.0	33.1	36.1	1.0	-50.7	-13.0	-37.7	
1.558	-41.8	H	3.0	36.4	35.6	1.0	-40.0	-13.0	-27.0	
<b>Hi Channel (1908.75 MHz)</b>										
3.818	-59.1	V	3.0	45.4	35.3	1.0	-48.0	-13.0	-35.0	
9.544	-66.5	V	3.0	53.9	35.6	1.0	-47.1	-13.0	-34.1	
3.818	-57.2	H	3.0	45.7	35.3	1.0	-45.8	-13.0	-32.8	
9.544	-67.3	H	3.0	55.4	35.6	1.0	-46.5	-13.0	-33.5	
1.700	-47.2	H	3.0	37.7	35.5	1.0	-44.0	-13.0	-31.0	

Note: No other emission were detected within 40dB margin to the limit.

Rev. 03.03.09

**AWS Spurious & Harmonic (EIRP)**

**Compliance Certification Services**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** KYOCERA WIRELESS CORP.  
**Project #:** 10U13021  
**Date:** 1/15/2010  
**Test Engineer:** MENGISTU MEKURIA  
**Configuration:** EUT ALONE  
**Mode:** TX, CDMA AWS BAND

**Chamber**

5m Chamber B

**Pre-amplifier**

T145 8449B

**Filter**

Filter 1

**Limit**

FCC PART 27

f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Channel (1711.25 MHz)</b>										
3.423	-50.3	V	3.0	44.4	35.5	1.0	-40.4	-13.0	-27.4	
5.134	-63.7	V	3.0	48.6	35.3	1.0	-49.4	-13.0	-36.4	
10.268	-58.3	V	3.0	54.8	35.3	1.0	-37.8	-13.0	-24.8	
3.423	-56.1	H	3.0	44.4	35.5	1.0	-46.2	-13.0	-33.2	
5.134	-64.0	H	3.0	49.2	35.3	1.0	-49.1	-13.0	-36.1	
10.268	-63.5	H	3.0	55.9	35.3	1.0	-41.9	-13.0	-28.9	
<b>Mid Channel (1733.00 MHz)</b>										
3.466	-56.8	V	3.0	44.6	35.5	1.0	-46.8	-13.0	-33.8	
5.199	-60.7	V	3.0	48.8	35.3	1.0	-46.2	-13.0	-33.2	
10.398	-57.3	V	3.0	55.0	35.3	1.0	-36.6	-13.0	-23.6	
3.466	-58.1	H	3.0	44.5	35.5	1.0	-48.1	-13.0	-35.1	
5.199	-58.2	H	3.0	49.4	35.3	1.0	-43.2	-13.0	-30.2	
10.398	-61.2	H	3.0	56.0	35.3	1.0	-39.5	-13.0	-26.5	
<b>Hi Channel (1753.75 MHz)</b>										
3.508	-53.5	V	3.0	44.7	35.4	1.0	-43.2	-13.0	-30.2	
5.261	-61.5	V	3.0	48.9	35.3	1.0	-47.0	-13.0	-34.0	
10.523	-65.8	V	3.0	55.1	35.2	1.0	-44.8	-13.0	-31.8	
3.508	-58.3	H	3.0	44.7	35.4	1.0	-48.0	-13.0	-35.0	
5.261	-65.1	H	3.0	49.5	35.3	1.0	-49.9	-13.0	-36.9	
10.523	-66.6	H	3.0	56.0	35.2	1.0	-44.8	-13.0	-31.8	
<p><b>Note: No other emission were detected within 40dB margin to the limit.</b></p> <p>Rev. 03.03.09</p>										

### 7.3. RECEIVER SPURIOUS EMISSIONS

#### LIMIT

RSS-Gen 7.2.2

Spurious Emission Limits for Receivers:


Spurious Frequency (MHz)	Field Strength (microvolts/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960	500

#### TEST PROCEDURE


The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (local oscillator frequency, intermediate frequency or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable and local oscillator frequencies.

#### RESULTS

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)**

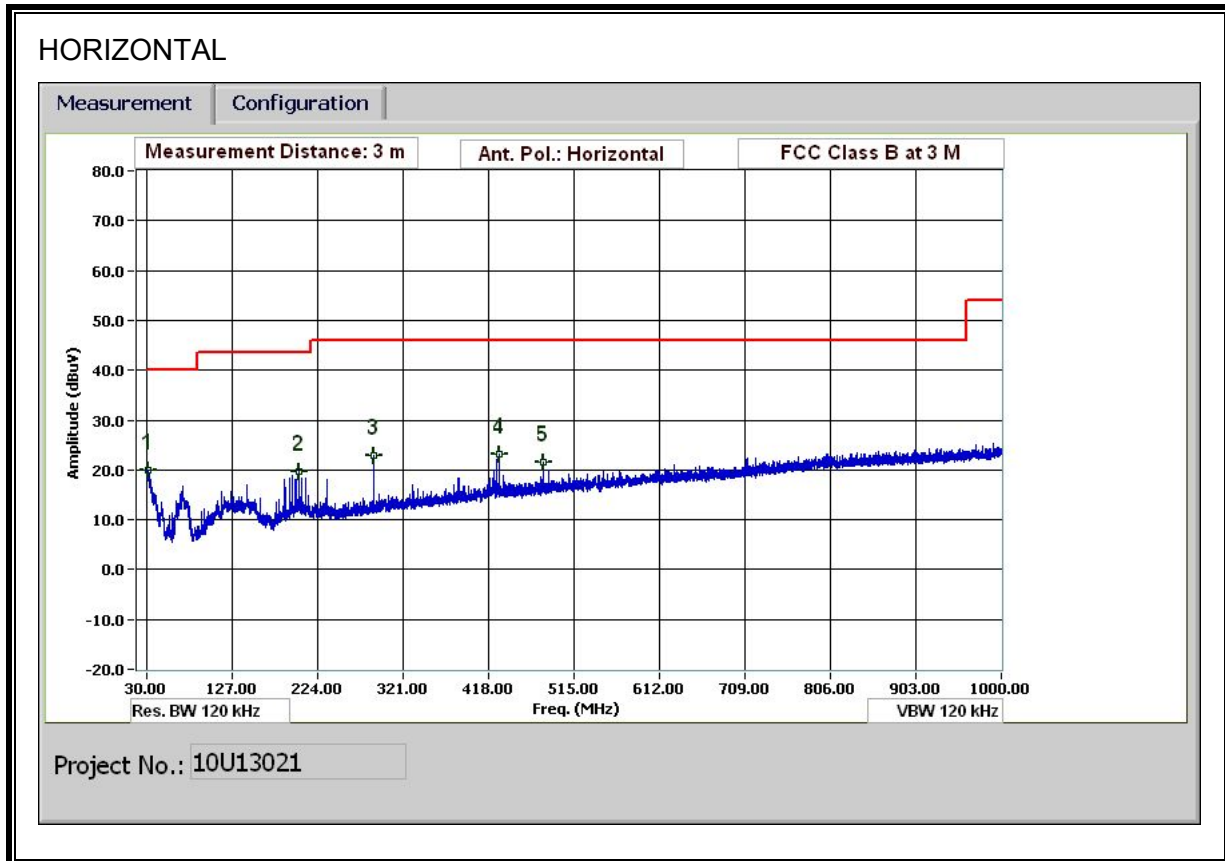

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

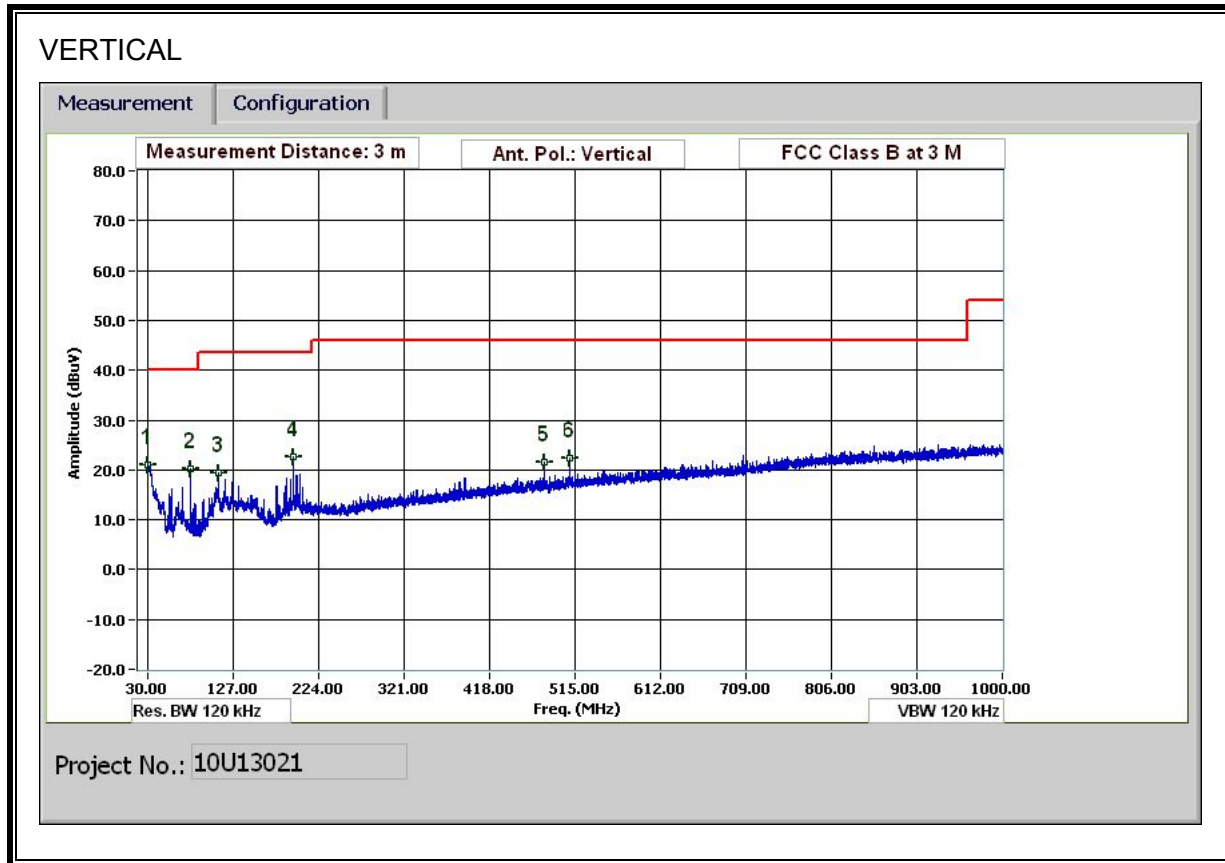

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)**

30-1000MHz Frequency Measurement													
Compliance Certification Services, Fremont 5m Chamber													
Test Engr:		Mengistu Mekuria											
Date:		01/15/09											
Project #:		10U13021											
Company:		Kyocera Wireless Corp.											
EUT Description:		CDMA Cell Phone with Bluetooth Capability											
EUT M/N:		K53-02 for FCC & S2300 for IC											
Test Target:		FCC Class B											
Mode Oper:		Tx Worst-Case											
f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit								
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters										
Read	Analyzer Reading	Filter	Filter Insert Loss										
AF	Antenna Factor	Corr.	Calculated Field Strength										
CL	Cable Loss	Limit	Field Strength Limit										
f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
30.600	3.0	30.0	20.1	0.5	29.7	0.0	0.0	20.9	40.0	-19.1	V	P	
78.602	3.0	41.3	7.7	0.8	29.6	0.0	0.0	20.2	40.0	-19.8	V	P	
110.643	3.0	36.0	12.0	0.9	29.5	0.0	0.0	19.5	43.5	-24.0	V	P	
195.367	3.0	38.7	11.6	1.3	28.9	0.0	0.0	22.7	43.5	-20.8	V	P	
480.019	3.0	32.6	16.4	2.1	29.6	0.0	0.0	21.5	46.0	-24.5	V	P	
508.700	3.0	32.9	16.9	2.2	29.7	0.0	0.0	22.3	46.0	-23.7	V	P	
31.680	3.0	29.4	19.6	0.5	29.7	0.0	0.0	19.9	40.0	-20.1	H	P	
202.687	3.0	35.2	12.0	1.3	28.9	0.0	0.0	19.6	43.5	-23.9	H	P	
288.011	3.0	37.1	12.9	1.6	28.8	0.0	0.0	22.8	46.0	-23.2	H	P	
429.616	3.0	35.1	15.6	2.0	29.4	0.0	0.0	23.2	46.0	-22.8	H	P	
480.019	3.0	32.6	16.4	2.1	29.6	0.0	0.0	21.5	46.0	-24.5	H	P	
Rev. 1.27.09													
Note: No other emissions were detected above the system noise floor.													

**SPURIOUS EMISSIONS ABOVE 1000 MHz (WORST-CASE CONFIGURATION)**

Note: No emissions were detected above the system noise floor.

## 7.4. POWER LINE CONDUCTED EMISSION

### LIMIT

RSS-Gen 7.2.2

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radio communication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

Table 2 – AC Power Lines Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.


### RESULTS



**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Class (dB)	Limit QP	EN B		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)			AV	QP (dB)	AV (dB)		
0.68	42.96	--	24.94	0.00	56.00	46.00	-13.04	-21.06	L1	
0.79	46.56	--	27.88	0.00	56.00	46.00	-9.44	-18.12	L1	
0.87	47.28	--	28.64	0.00	56.00	46.00	-8.72	-17.36	L1	
0.71	42.55	--	27.76	0.00	56.00	46.00	-13.45	-18.24	L2	
0.78	44.93	--	29.68	0.00	56.00	46.00	-11.07	-16.32	L2	
0.83	46.32	--	30.67	0.00	56.00	46.00	-9.68	-15.33	L2	
6 Worst Data										

**LINE 1 RESULTS**

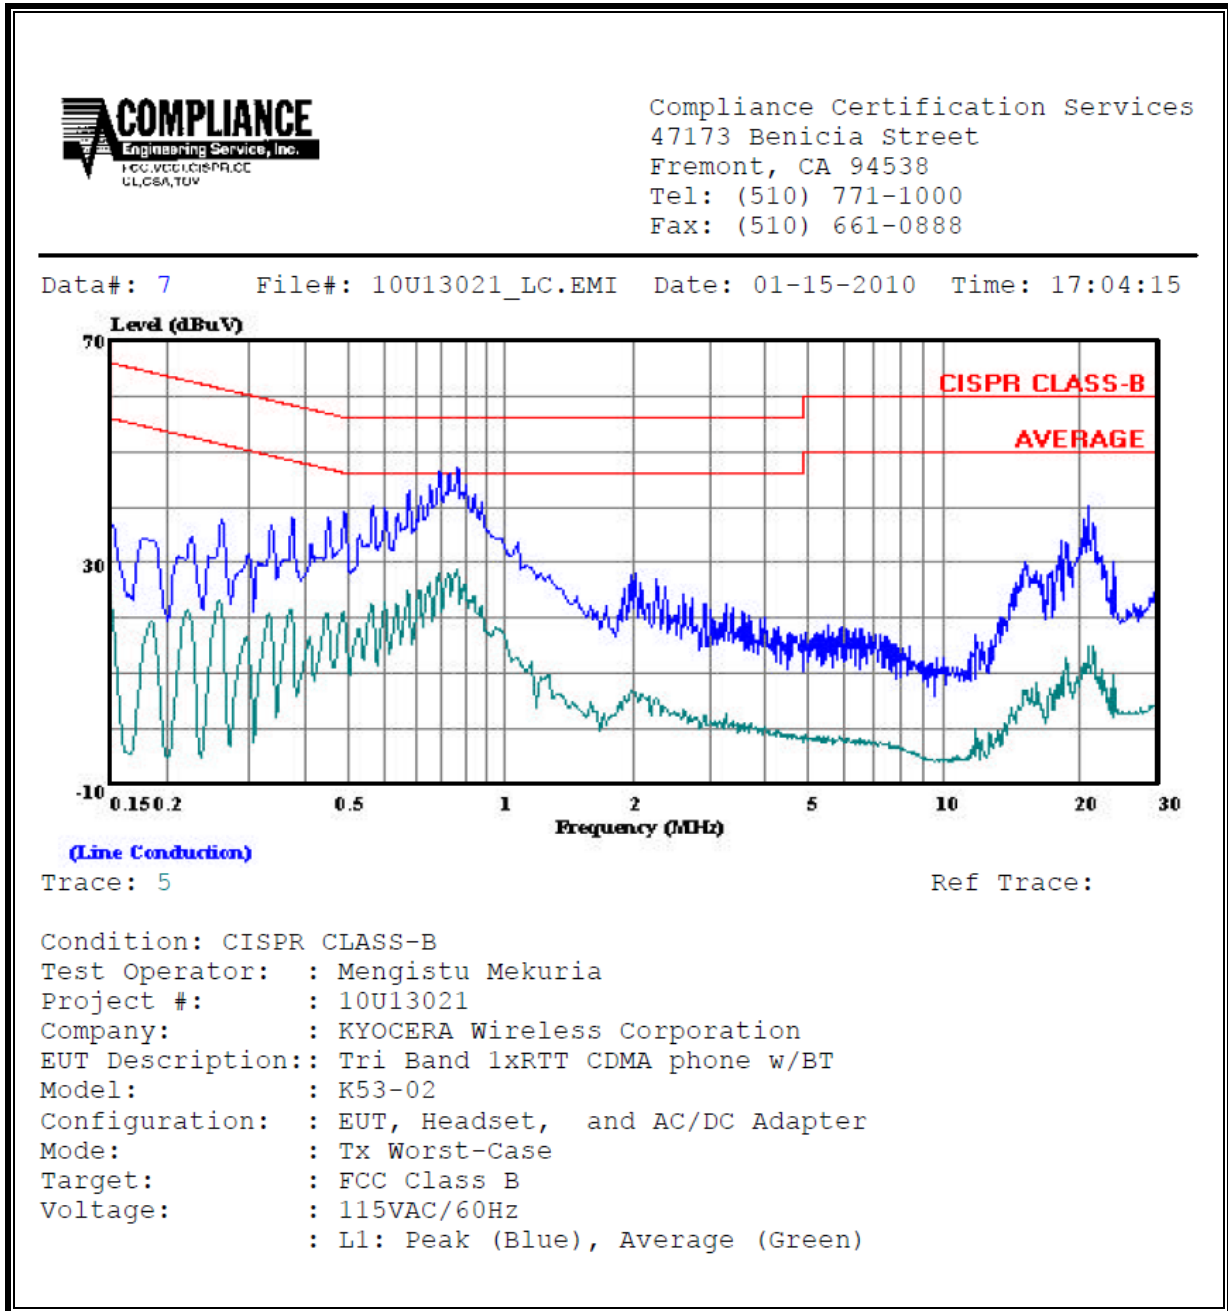

**LINE 2 RESULTS**

