

**CDMA 800 Channel 1013**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 824.7 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**CELL\_1013/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 74.0 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 70.9 V/m; Power Drift = 0.150 dB

Peak E-field in V/m

Grid 1 <b>76.1 M4</b>	Grid 2 <b>74.4 M4</b>	Grid 3 <b>56.9 M4</b>
Grid 4 <b>76.6 M4</b>	Grid 5 <b>74.0 M4</b>	Grid 6 <b>54.5 M4</b>
Grid 7 <b>73.7 M4</b>	Grid 8 <b>71.3 M4</b>	Grid 9 <b>45.7 M4</b>

**CELL\_1013/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.096 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.066 A/m; Power Drift = 0.097 dB

Peak H-field in A/m

Grid 1 <b>0.145 M4</b>	Grid 2 <b>0.095 M4</b>	Grid 3 <b>0.062 M4</b>
Grid 4 <b>0.144 M4</b>	Grid 5 <b>0.091 M4</b>	Grid 6 <b>0.062 M4</b>
Grid 7 <b>0.146 M4</b>	Grid 8 <b>0.096 M4</b>	Grid 9 <b>0.064 M4</b>



Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

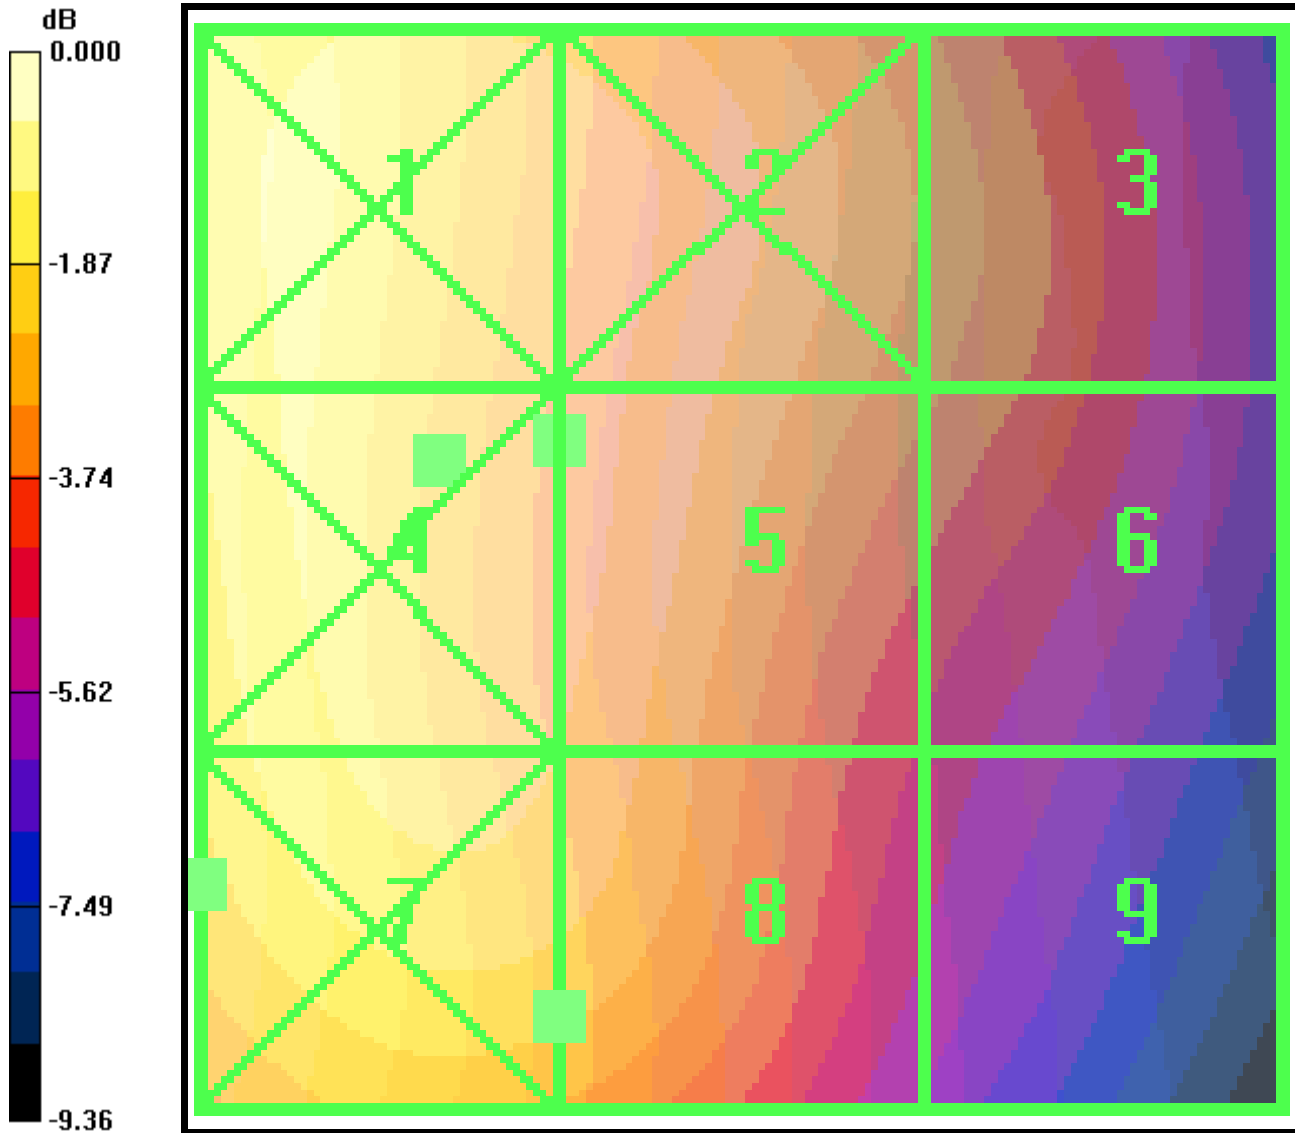

0 dB = 76.6V/m

**CDMA 800 Channel 383**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 836.49 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**CELL\_383/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 62.1 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 63.0 V/m; Power Drift = 0.009 dB

Peak E-field in V/m

Grid 1 <b>63.6 M4</b>	Grid 2 <b>63.0 M4</b>	Grid 3 <b>50.2 M4</b>
Grid 4 <b>63.1 M4</b>	Grid 5 <b>62.1 M4</b>	Grid 6 <b>48.2 M4</b>
Grid 7 <b>60.8 M4</b>	Grid 8 <b>59.9 M4</b>	Grid 9 <b>41.7 M4</b>

**CELL\_383/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.089 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.055 A/m; Power Drift = -0.064 dB

Peak H-field in A/m

Grid 1 <b>0.134 M4</b>	Grid 2 <b>0.089 M4</b>	Grid 3 <b>0.059 M4</b>
Grid 4 <b>0.126 M4</b>	Grid 5 <b>0.078 M4</b>	Grid 6 <b>0.051 M4</b>
Grid 7 <b>0.120 M4</b>	Grid 8 <b>0.074 M4</b>	Grid 9 <b>0.048 M4</b>



Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

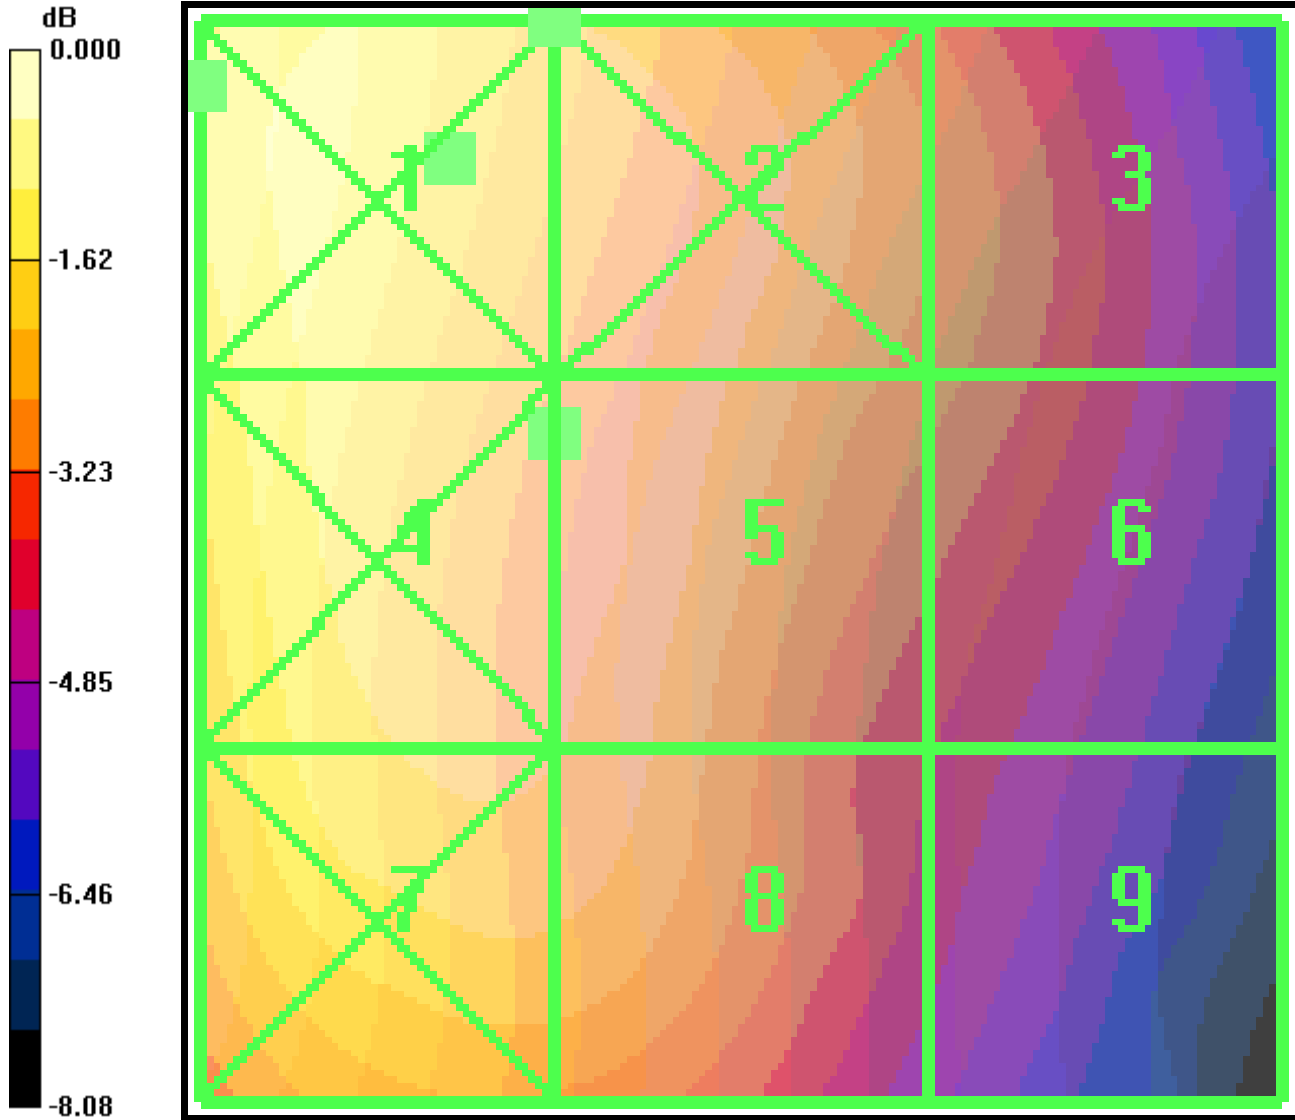

0 dB = 63.6V/m

**CDMA 800 Channel 777**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 848.31 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**CELL\_777/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 67.6 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 69.7 V/m; Power Drift = -0.017 dB

Peak E-field in V/m

Grid 1 <b>68.2 M4</b>	Grid 2 <b>67.3 M4</b>	Grid 3 <b>56.2 M4</b>
Grid 4 <b>68.8 M4</b>	Grid 5 <b>67.6 M4</b>	Grid 6 <b>54.9 M4</b>
Grid 7 <b>67.1 M4</b>	Grid 8 <b>66.4 M4</b>	Grid 9 <b>48.9 M4</b>

**CELL\_777/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.083 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.056 A/m; Power Drift = -0.054 dB

Peak H-field in A/m

Grid 1 <b>0.127 M4</b>	Grid 2 <b>0.079 M4</b>	Grid 3 <b>0.052 M4</b>
Grid 4 <b>0.123 M4</b>	Grid 5 <b>0.075 M4</b>	Grid 6 <b>0.050 M4</b>
Grid 7 <b>0.124 M4</b>	Grid 8 <b>0.083 M4</b>	Grid 9 <b>0.055 M4</b>




Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

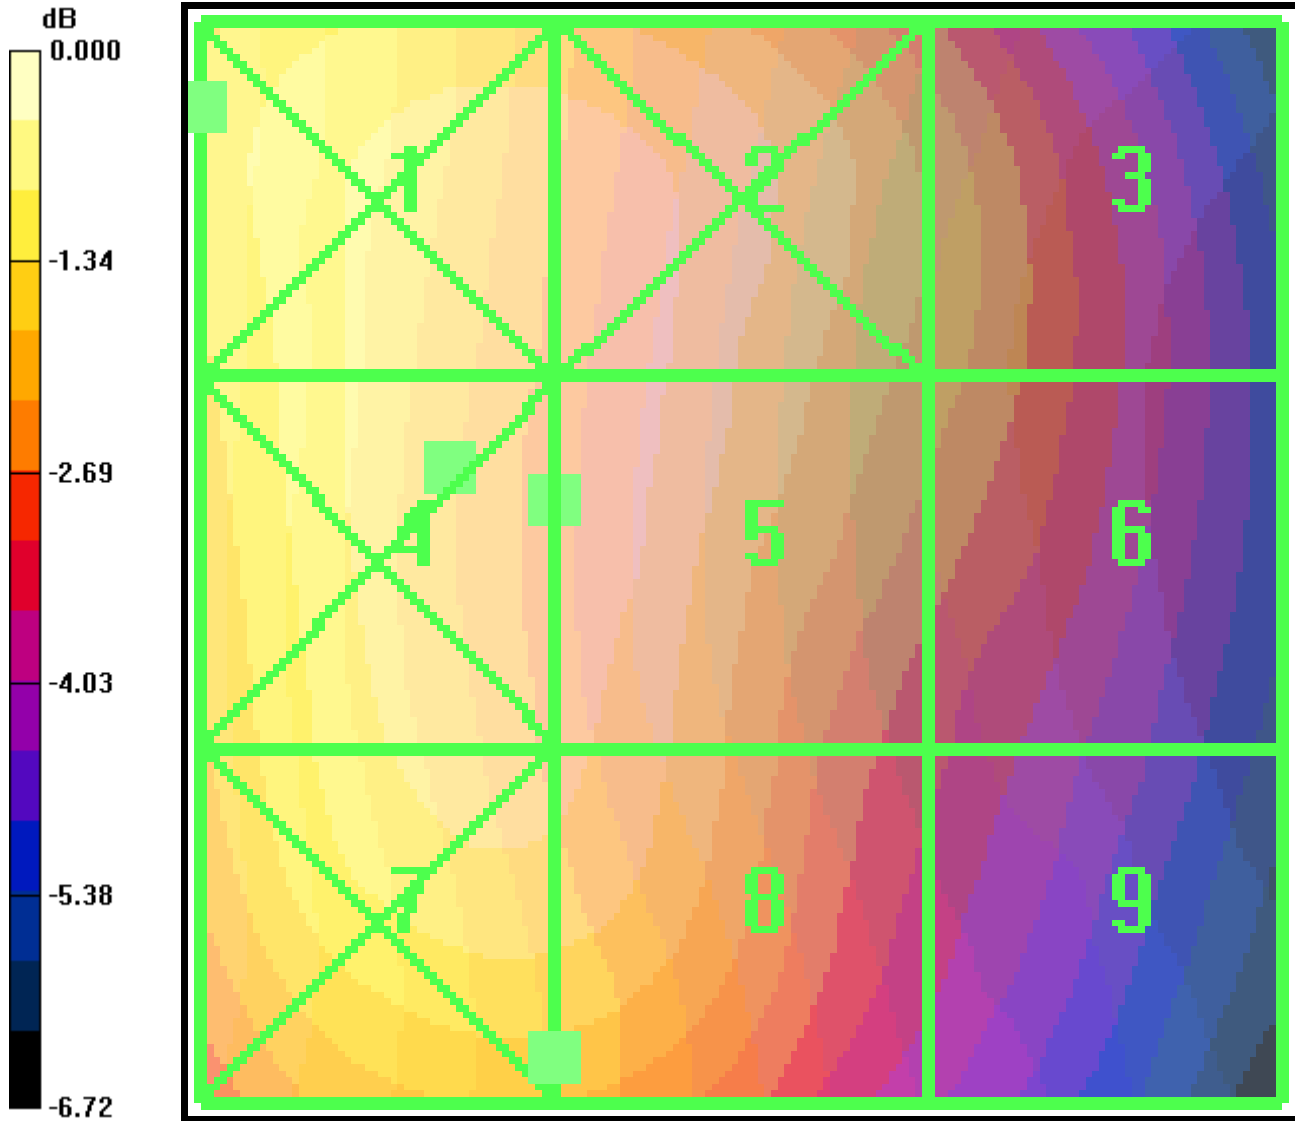

0 dB = 68.8V/m

**CDMA 800 Channel 1013 (360) E roll**

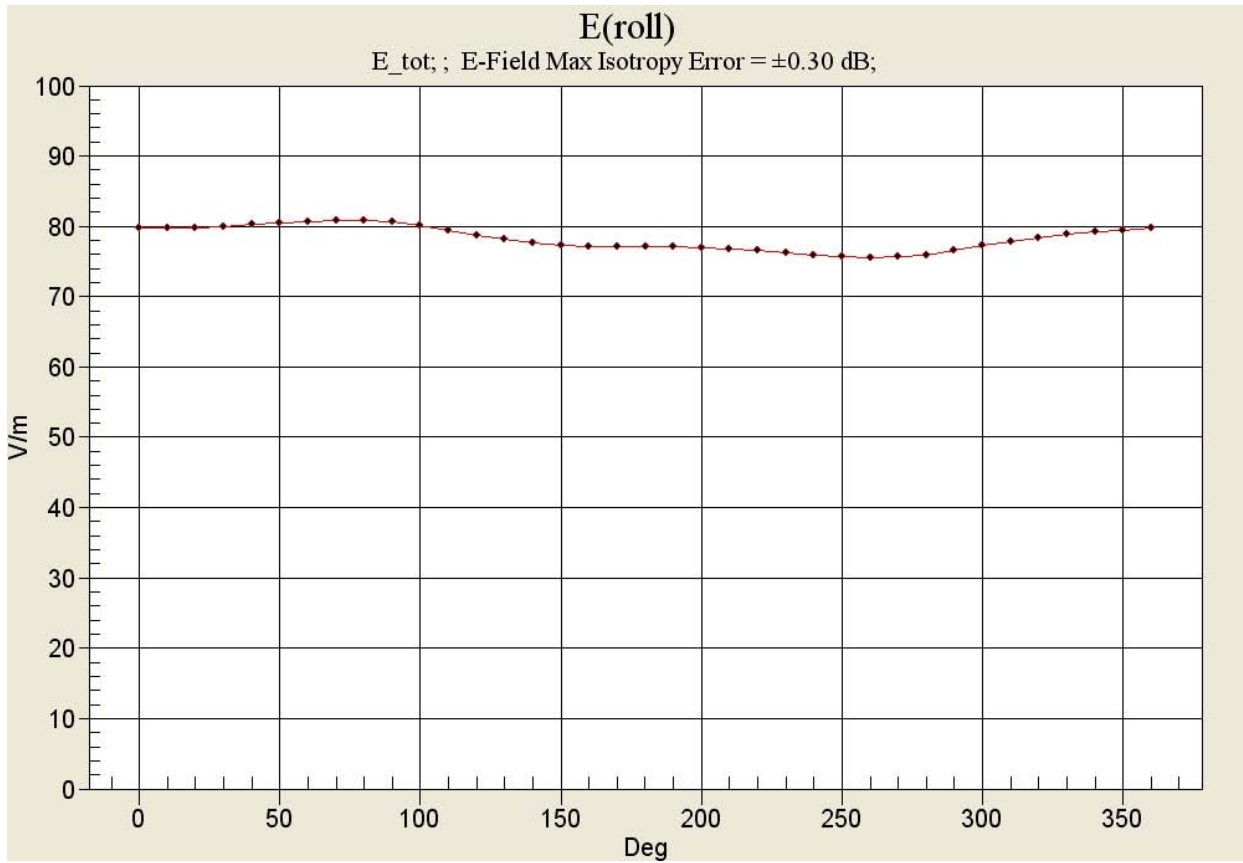

**CDMA 1700 Channel 25**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 1711.25 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**AWS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 28.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 28.1 V/m; Power Drift = 0.018 dB

Peak E-field in V/m

Grid 1 <b>29.7 M4</b>	Grid 2 <b>30.8 M4</b>	Grid 3 <b>30.1 M4</b>
Grid 4 <b>21.0 M4</b>	Grid 5 <b>28.3 M4</b>	Grid 6 <b>28.3 M4</b>
Grid 7 <b>12.6 M4</b>	Grid 8 <b>20.1 M4</b>	Grid 9 <b>21.1 M4</b>

**AWS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.089 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.074 A/m; Power Drift = -0.044 dB


Peak H-field in A/m

Grid 1 <b>0.118 M4</b>	Grid 2 <b>0.098 M4</b>	Grid 3 <b>0.069 M4</b>
Grid 4 <b>0.101 M4</b>	Grid 5 <b>0.089 M4</b>	Grid 6 <b>0.061 M4</b>
Grid 7 <b>0.071 M4</b>	Grid 8 <b>0.064 M4</b>	Grid 9 <b>0.047 M4</b>





Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

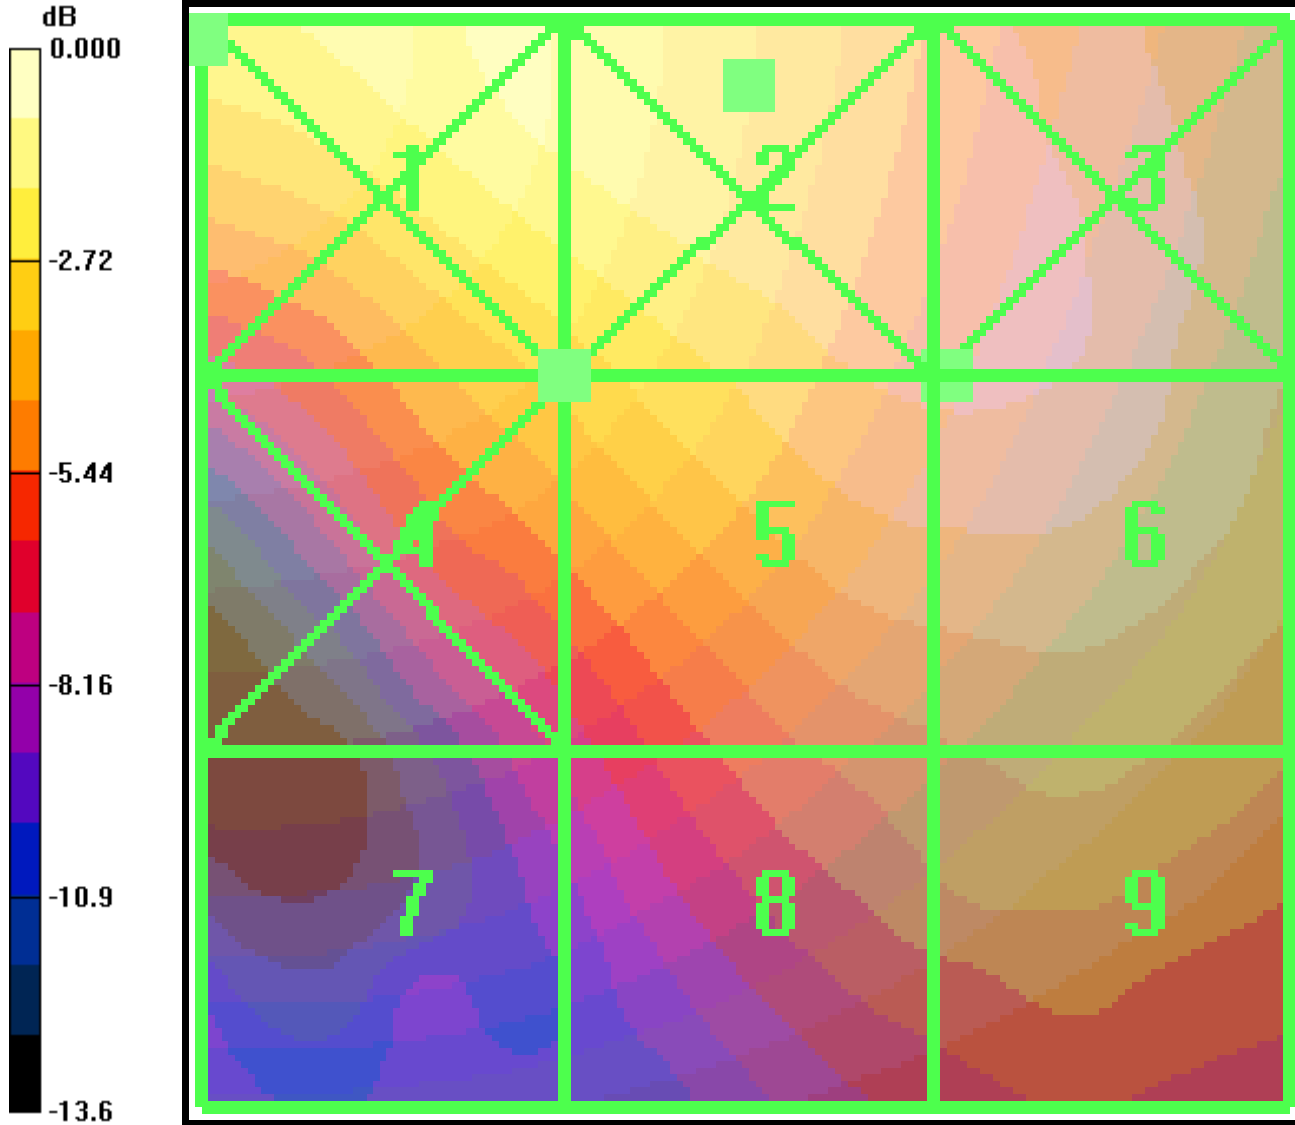

0 dB = 30.8V/m

**CDMA 1700 Channel 450**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 1732.5 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**AWS\_450/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 29.1 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 25.0 V/m; Power Drift = 0.165 dB

Peak E-field in V/m

Grid 1 <b>32.4 M4</b>	Grid 2 <b>33.4 M4</b>	Grid 3 <b>31.7 M4</b>
Grid 4 <b>18.8 M4</b>	Grid 5 <b>28.8 M4</b>	Grid 6 <b>29.1 M4</b>
Grid 7 <b>15.0 M4</b>	Grid 8 <b>21.6 M4</b>	Grid 9 <b>22.9 M4</b>

**AWS\_450/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.100 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.093 A/m; Power Drift = 0.003 dB

Peak H-field in A/m

Grid 1 <b>0.126 M4</b>	Grid 2 <b>0.111 M4</b>	Grid 3 <b>0.083 M4</b>
Grid 4 <b>0.106 M4</b>	Grid 5 <b>0.100 M4</b>	Grid 6 <b>0.078 M4</b>
Grid 7 <b>0.076 M4</b>	Grid 8 <b>0.074 M4</b>	Grid 9 <b>0.063 M4</b>



Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

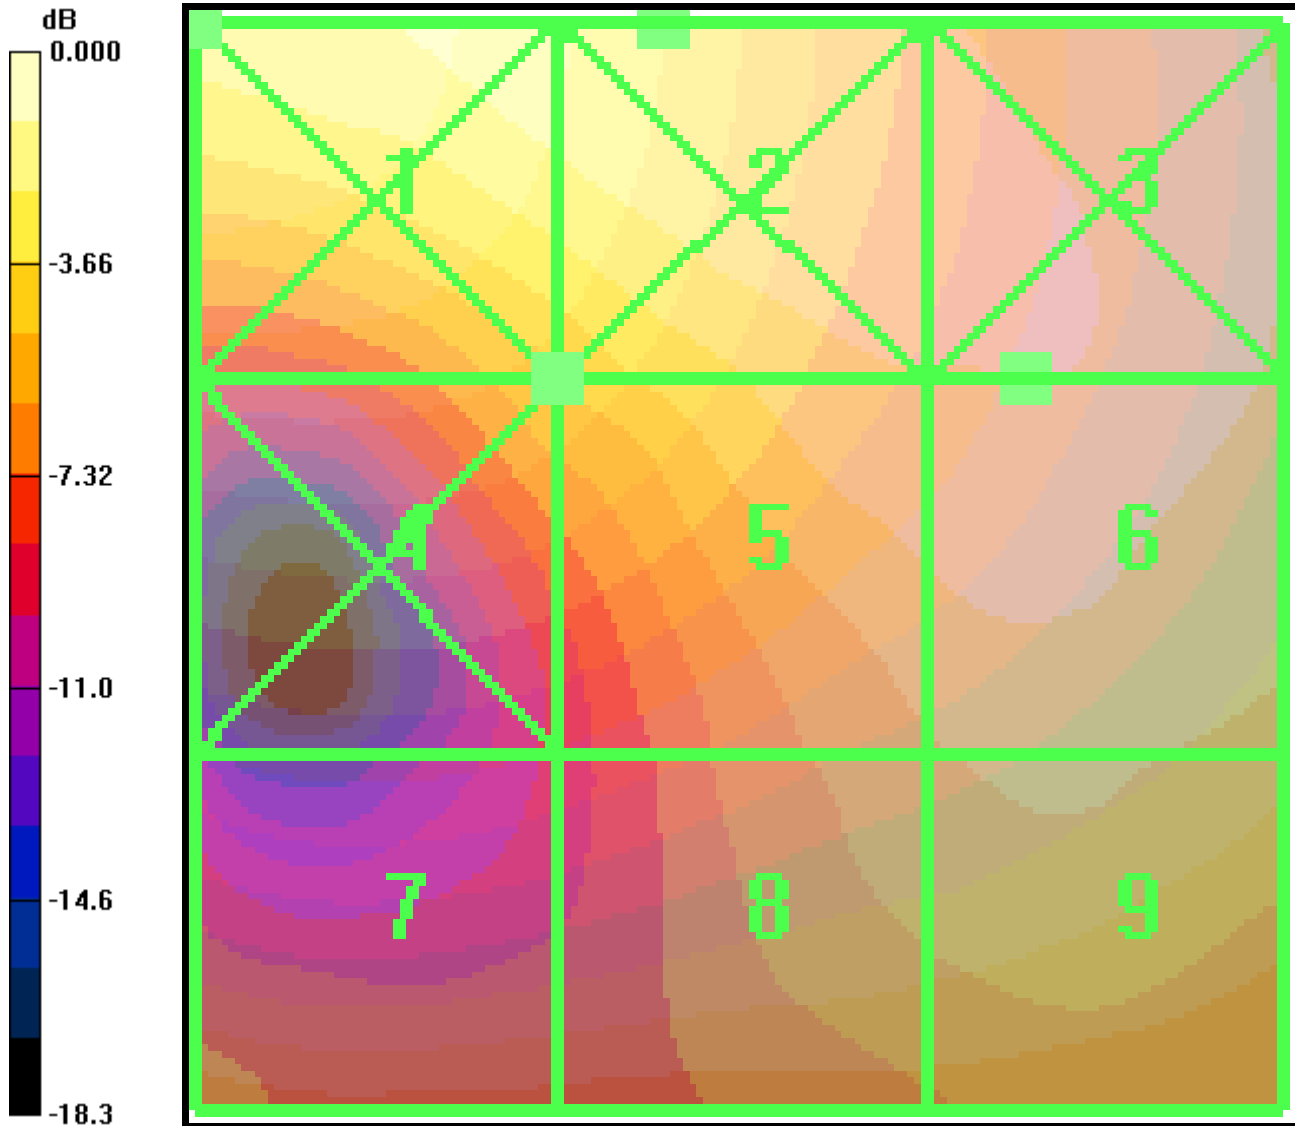

0 dB = 33.4V/m

**CDMA 1700 Channel 875**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 1753.75 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 ± 1 deg C, Liquid T = 22.0 ± 1 deg C

**AWS\_875/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 27.0 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 23.3 V/m; Power Drift = -0.188 dB

Peak E-field in V/m

Grid 1 <b>24.1 M4</b>	Grid 2 <b>29.1 M4</b>	Grid 3 <b>29.1 M4</b>
Grid 4 <b>16.0 M4</b>	Grid 5 <b>27.0 M4</b>	Grid 6 <b>27.6 M4</b>
Grid 7 <b>15.6 M4</b>	Grid 8 <b>21.1 M4</b>	Grid 9 <b>22.0 M4</b>

**AWS\_875/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.082 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.078 A/m; Power Drift = -0.117 dB

Peak H-field in A/m

Grid 1 <b>0.105 M4</b>	Grid 2 <b>0.087 M4</b>	Grid 3 <b>0.066 M4</b>
Grid 4 <b>0.089 M4</b>	Grid 5 <b>0.082 M4</b>	Grid 6 <b>0.064 M4</b>
Grid 7 <b>0.064 M4</b>	Grid 8 <b>0.063 M4</b>	Grid 9 <b>0.056 M4</b>




Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

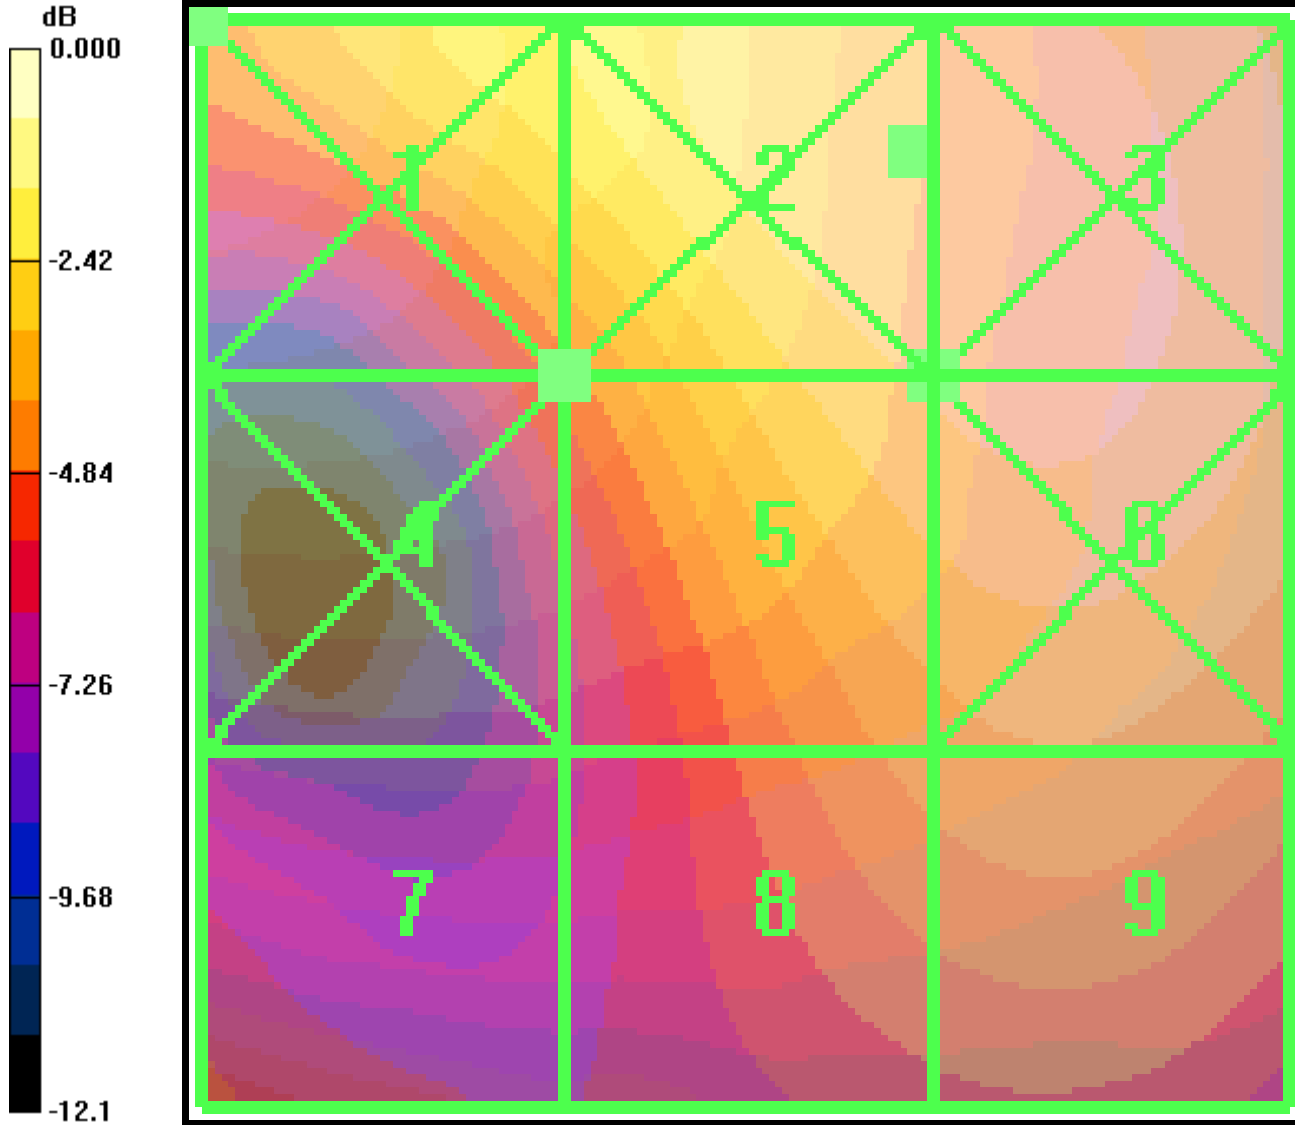

0 dB = 29.1V/m

**CDMA 1700 Channel 450 (360) E roll**

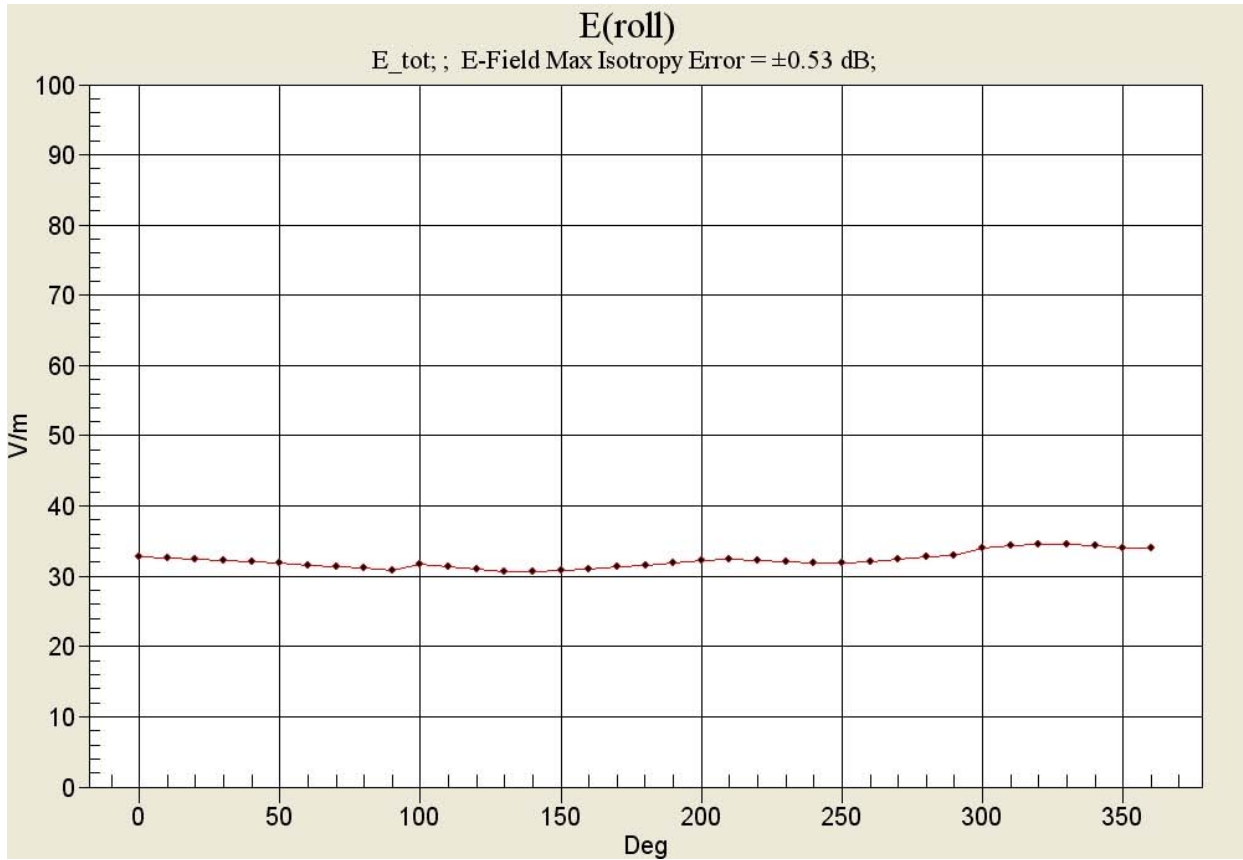

**CDMA 1900 Channel 25**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 1850 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**PCS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 30.0 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 27.3 V/m; Power Drift = 0.083 dB

Peak E-field in V/m

Grid 1 <b>24.4 M4</b>	Grid 2 <b>31.6 M4</b>	Grid 3 <b>31.7 M4</b>
Grid 4 <b>15.9 M4</b>	Grid 5 <b>30.0 M4</b>	Grid 6 <b>30.6 M4</b>
Grid 7 <b>19.4 M4</b>	Grid 8 <b>22.4 M4</b>	Grid 9 <b>23.5 M4</b>

**PCS\_25/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.113 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.102 A/m; Power Drift = 0.005 dB

Peak H-field in A/m

Grid 1 <b>0.122 M4</b>	Grid 2 <b>0.117 M4</b>	Grid 3 <b>0.088 M4</b>
Grid 4 <b>0.114 M4</b>	Grid 5 <b>0.113 M4</b>	Grid 6 <b>0.086 M4</b>
Grid 7 <b>0.088 M4</b>	Grid 8 <b>0.087 M4</b>	Grid 9 <b>0.073 M4</b>



Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

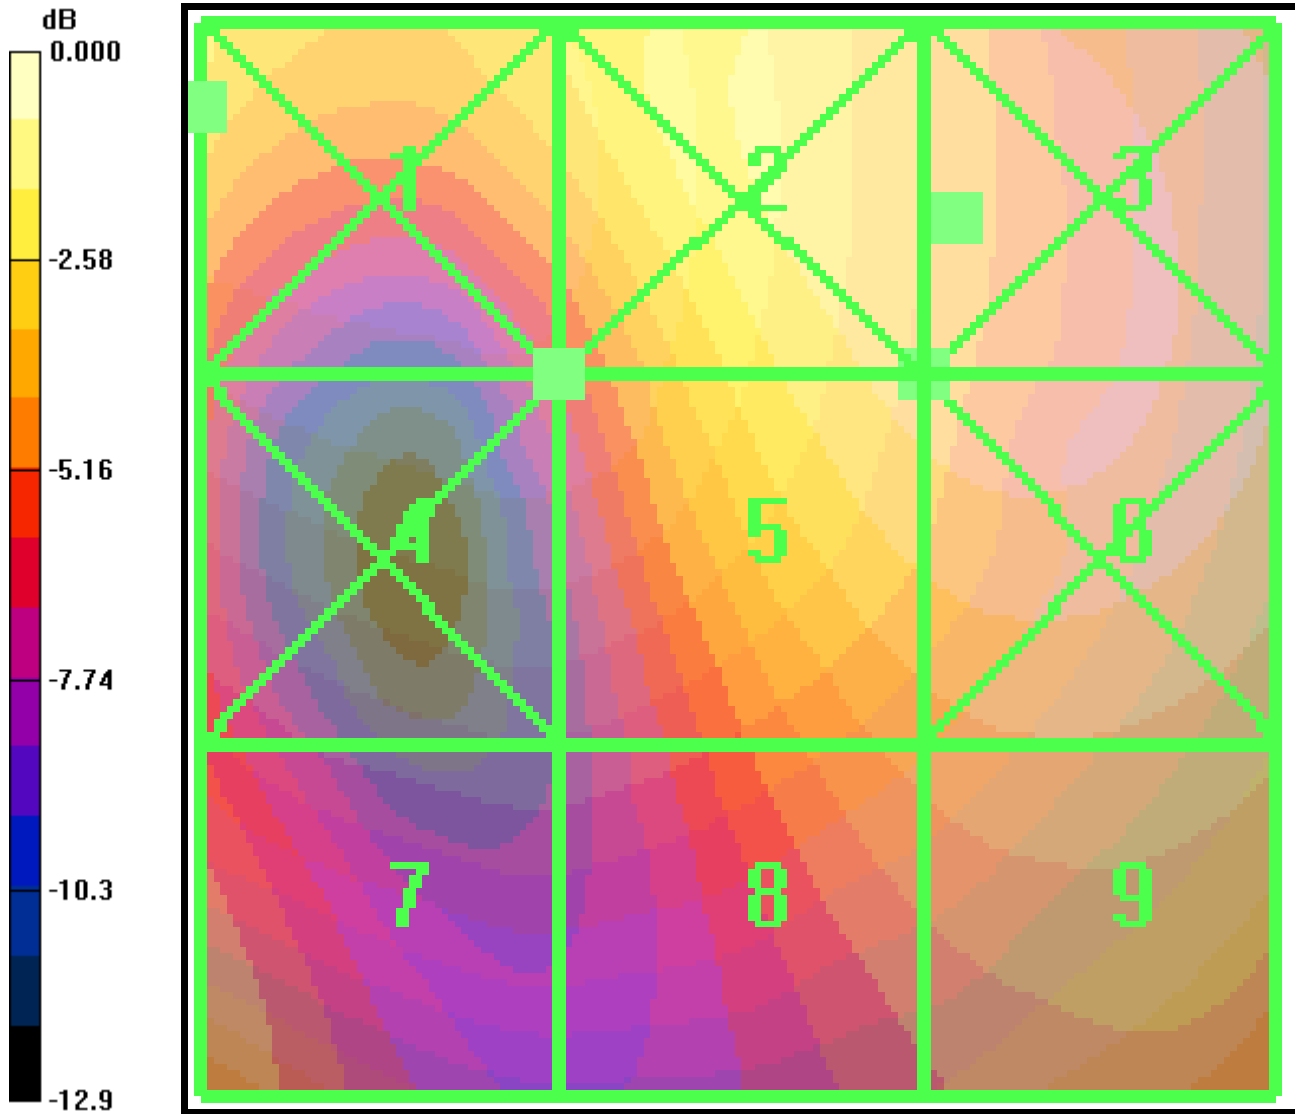

0 dB = 31.7V/m



CDMA 1900 Channel 600

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 1880 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

**PCS\_600/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 32.4 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 29.4 V/m; Power Drift = -0.081 dB

Peak E-field in V/m

Grid 1 <b>28.6 M4</b>	Grid 2 <b>34.6 M4</b>	Grid 3 <b>34.6 M4</b>
Grid 4 <b>20.5 M4</b>	Grid 5 <b>32.4 M4</b>	Grid 6 <b>33.0 M4</b>
Grid 7 <b>19.1 M4</b>	Grid 8 <b>22.3 M4</b>	Grid 9 <b>23.7 M4</b>

**PCS\_600/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.110 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.106 A/m; Power Drift = -0.023 dB

Peak H-field in A/m

Grid 1 <b>0.121 M4</b>	Grid 2 <b>0.111 M4</b>	Grid 3 <b>0.086 M4</b>
Grid 4 <b>0.114 M4</b>	Grid 5 <b>0.110 M4</b>	Grid 6 <b>0.085 M4</b>
Grid 7 <b>0.096 M4</b>	Grid 8 <b>0.094 M4</b>	Grid 9 <b>0.076 M4</b>



Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

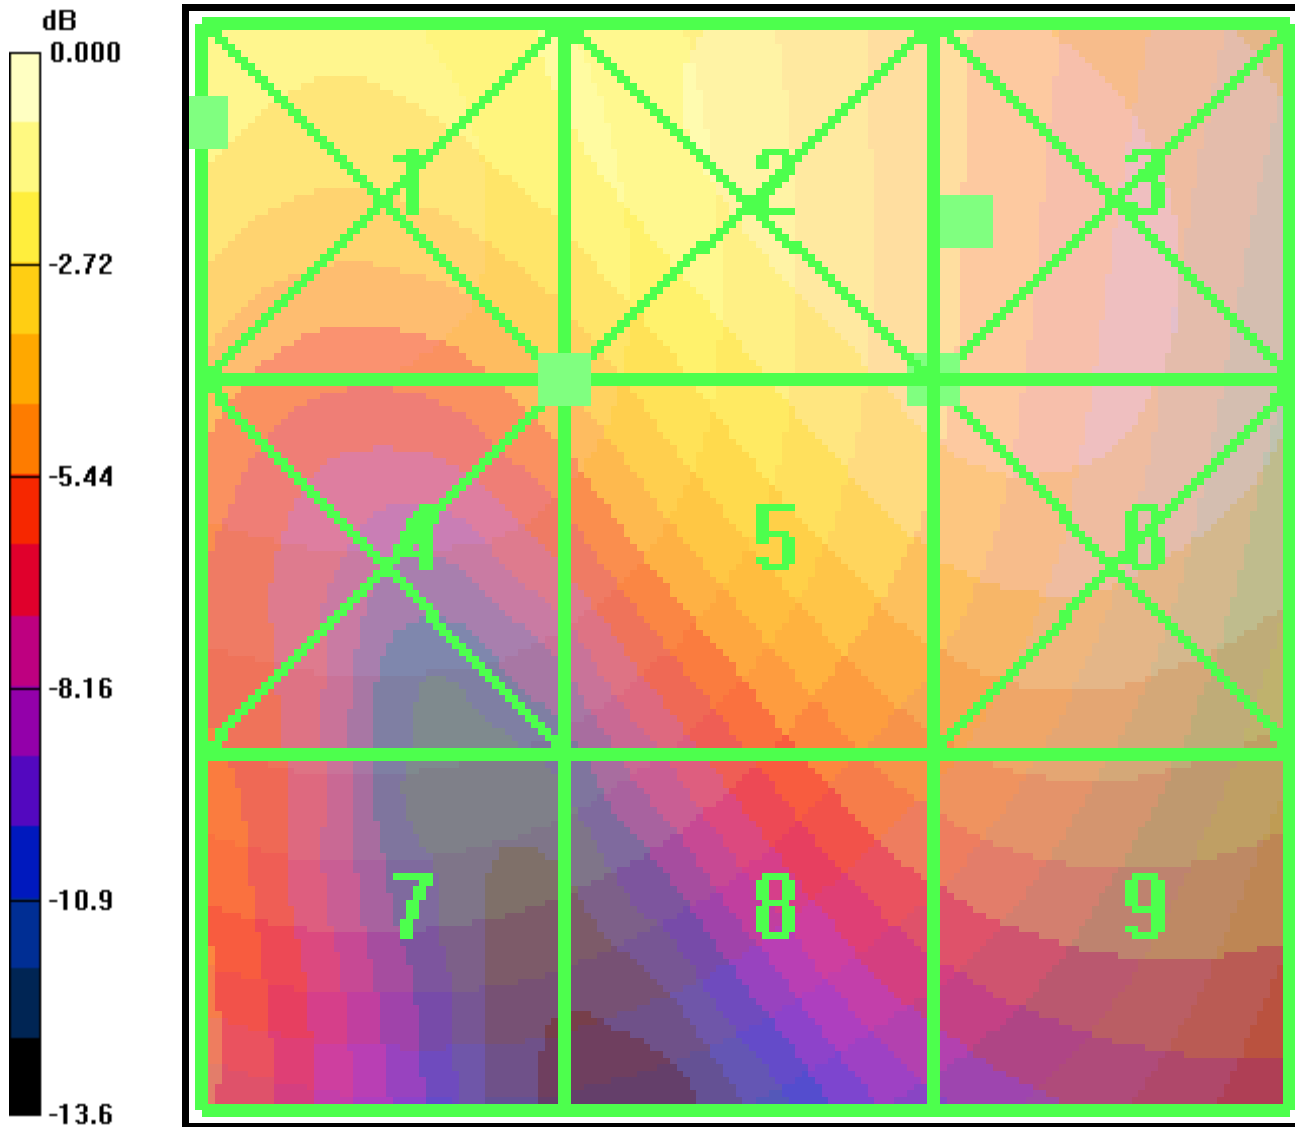

0 dB = 34.6V/m

**CDMA 1900 Channel 1175**

Date: 12/16/2010

Communication System: CDMA\_Triband, Frequency: 1910 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341 Probe: H3DV5 - SN6029, ConvF(1, 1, 1), Calibrated: 7/12/2010 Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

**PCS\_1175/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 33.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 32.0 V/m; Power Drift = 0.047 dB

Peak E-field in V/m

Grid 1 <b>33.1 M4</b>	Grid 2 <b>35.5 M4</b>	Grid 3 <b>35.4 M4</b>
Grid 4 <b>22.8 M4</b>	Grid 5 <b>33.9 M4</b>	Grid 6 <b>34.1 M4</b>
Grid 7 <b>24.9 M4</b>	Grid 8 <b>25.0 M4</b>	Grid 9 <b>26.2 M4</b>

**PCS\_1175/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.131 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm


Reference Value = 0.128 A/m; Power Drift = -0.048 dB

Peak H-field in A/m

Grid 1 <b>0.135 M4</b>	Grid 2 <b>0.131 M4</b>	Grid 3 <b>0.097 M4</b>
Grid 4 <b>0.133 M4</b>	Grid 5 <b>0.131 M4</b>	Grid 6 <b>0.097 M4</b>
Grid 7 <b>0.112 M4</b>	Grid 8 <b>0.111 M4</b>	Grid 9 <b>0.088 M4</b>



Applicant:	Kyocera
FCC ID:	OVF-K5502
Report #:	CT-K5502-20RFC-1210-R0

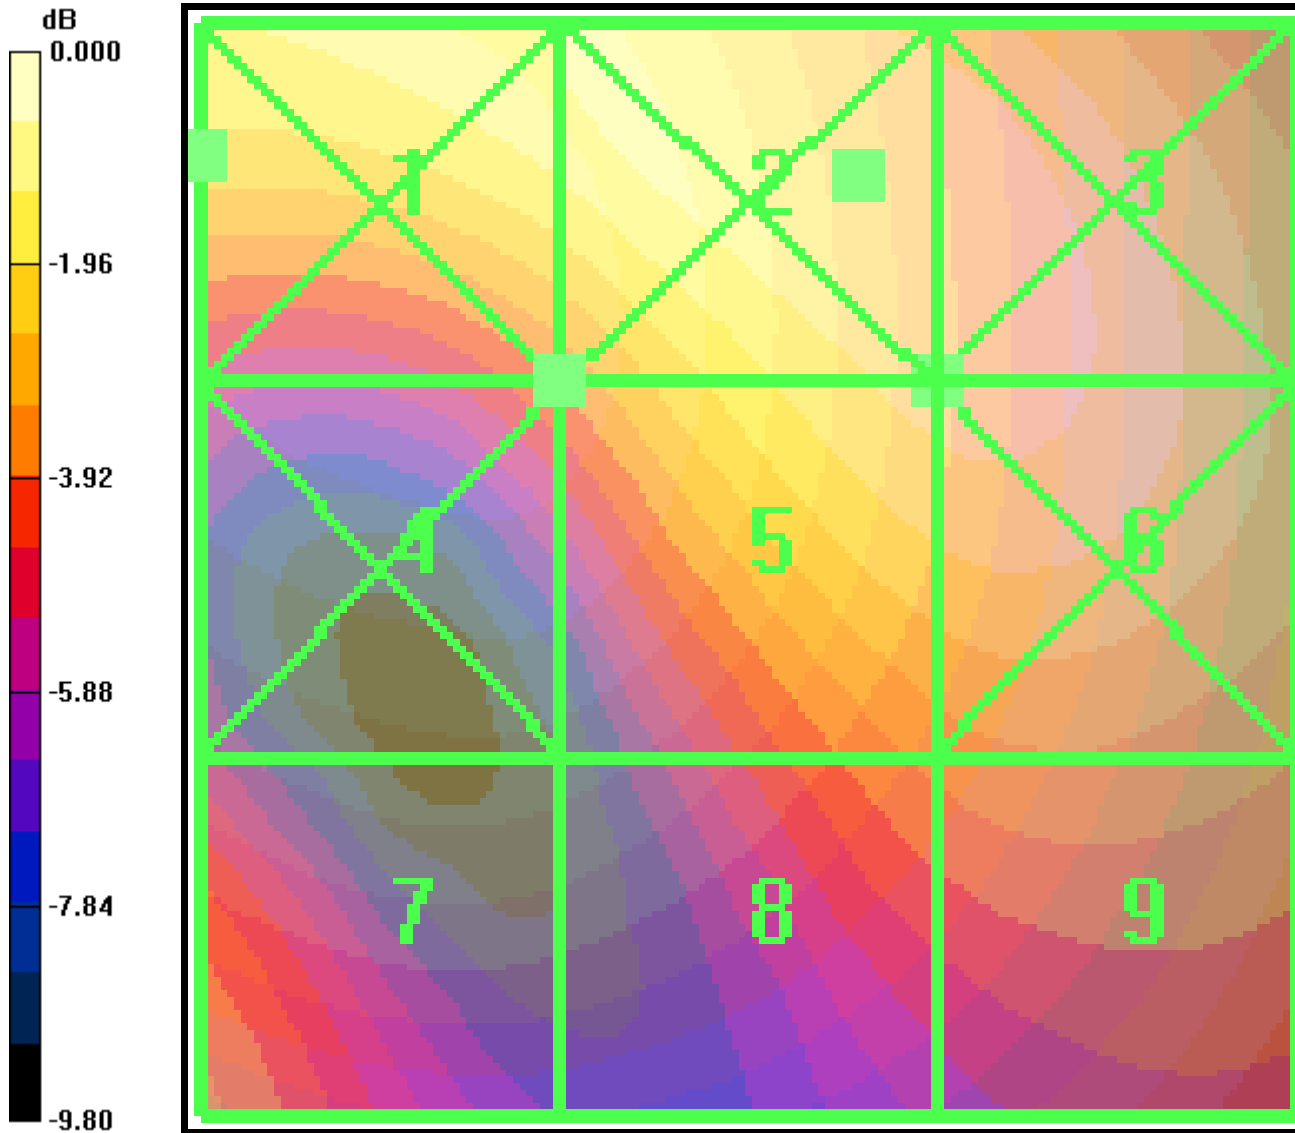

0 dB = 35.5V/m

**CDMA 1900 Channel 1175 (360) E roll**

