

**Test Report On**  
**Tri-Band CDMA Cellular Phone with Bluetooth**

<b>Certification</b>	
FCC Part 22, 24 & 27 RSS 132, 133, 139	
FCC ID:	<b>OVFK50-03</b>
IC #:	<b>3572A-M1400</b>
Models:	<b>K50-03, M1400</b>
Date:	<b>June 18, 2009</b>

<b>STATEMENT OF CERTIFICATION</b>	
<i>The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the measurements of the sample's radio frequency interference emissions characteristics as of the dates and at the times of the test under the conditions herein specified.</i>	
<b>STATEMENT OF COMPLIANCE</b>	
<i>This product has been shown to be capable of compliance with the applicable technical standards as indicted in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.</i>	
<b>Date of Test:</b>	June 18, 2009 – June 19, 2009
<b>Test performed by:</b>	Kyocera Wireless Corp. 10300 Campus Point Drive San Diego, CA 92121
<b>Report Prepared by:</b>	Thuy To, Regulatory Engineer
<b>Report Approved by:</b>	C.K. Li, Director of Regulatory Engineering
Compliance Certification Services performed the tests that required an OATS site.	

## Table of Contents

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>3</b>
<b>2</b>	<b>PRODUCT DESCRIPTION .....</b>	<b>3</b>
<b>3</b>	<b>TEST CONFIGURATION.....</b>	<b>4</b>
<b>4</b>	<b>FCC COMPLIANCE EMERGENCY 911 .....</b>	<b>ERROR! BOOKMARK NOT DEFINED.</b>
<b>5</b>	<b>TTY COMPLIANCE.....</b>	<b>5</b>
<b>6</b>	<b>TRANSMITTER RF POWER OUTPUT .....</b>	<b>5</b>
6.1	CONDUCTED POWER .....	5
6.2	RADIATED POWER.....	6
<b>7</b>	<b>OCCUPIED BANDWIDTH.....</b>	<b>7</b>
<b>8</b>	<b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>	<b>11</b>
<b>9</b>	<b>TRANSMITTER RADIATED SPURIOUS EMISSIONS MEASURED DATA .....</b>	<b>22</b>
<b>10</b>	<b>RECEIVER SPURIOUS EMISSIONS .....</b>	<b>22</b>
<b>11</b>	<b>TRANSMITTER RF CARRIER FREQUENCY STABILITY .....</b>	<b>22</b>
11.1	CDMA 800 MODE.....	23
11.2	CDMA 1700 MODE.....	24
11.3	CDMA 1900 MODE.....	25
<b>12</b>	<b>EXPOSURE OF HUMANS TO RF FIELDS (SAR).....</b>	<b>26</b>
<b>13</b>	<b>TEST EQUIPMENT .....</b>	<b>26</b>

## 1 General Information

<b>Applicant:</b>	Kyocera Wireless Corp 10300 Campus Point Drive San Diego CA 92121		
<b>FCC ID:</b>	OVFK50-03		
<b>IC #:</b>	3572A-M1400		
<b>Product:</b>	Tri-Band CDMA Cellular Phone with Bluetooth		
<b>Model Numbers:</b>	K50-03, M1400		
<b>EUT Serial Number:</b>	FFGL0000002902		
<b>Type:</b>	<input type="checkbox"/> Identical Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production		
<b>Device Category:</b>	Portable		
<b>RF Exposure Environment:</b>	General Population / Uncontrolled		
<b>Antenna:</b>	Internal Antenna		
<b>Detachable Antenna:</b>	No		
<b>External Input:</b>	Audio/Digital Data		
<b>Quantity:</b>	Quantity production is planned		
<b>FCC Rule Parts:</b>	§22H	§27L	§24E
<b>IC Rule Parts :</b>	RSS132	RSS139	RSS133
<b>Modes:</b>	800 CDMA	1700 CDMA	1900 CDMA
<b>Multiple Access Scheme:</b>	CDMA	CDMA	CDMA
<b>TX Frequency (MHz):</b>	824 – 849	1710 - 1755	1850 - 1910
<b>Emission Designators:</b>	1M25F9W	1M25F9W	1M25F9W
<b>Max. Output Power (W):</b>	0.40 ERP	0.47 EIRP	0.47 EIRP

## 2 Product Description

The EUT K50-03 is a Tri-Band 1XRTT CDMA Cellular phone with Bluetooth. The tri-band architecture is defined as 800MHz (cellular CDMA), 1700MHz (AWS CDMA) and 1900MHz (PCS CDMA). K50-03 and M1400 are identical, different model numbers are for marketing reasons only.

The phone is designed in compliance with the technical specifications for compatibility of mobile and base stations in the Cellular Radio telephone service contained in "Cellular System Mobile Station -Land Station Compatibility Specification" as specified in OET Bulletin 53 and TIA Standards.

As described in Exhibit 1 (operation description), The EUT can operate in the CDMA mode specified in IS-2000.2 standard, release 0. It can only invoke a Spreading Rate 1 (SR1) operational mode. SR1 is defined as a 1.2288 Mcps chip rate-based system using a direct-spread single carrier, which limits the bandwidth to

the same 1.25 MHz bandwidth occupied by the legacy IS-95/8-A/B system. Thus, for SR1 in IS-2000, the frequency response is identical to the legacy IS-95 B system standard.

### 3 Test Configuration

For Part 22, 24, and 27 all of CDMA measurements were conducted with Agilent 8960 as a base station simulator. The base station simulator establishes a CDMA link with the test device. To justify on the selection of applicable configurations, the EUT was pre-tested under all R.C. and S.O. operation modes to determine the worst-case scenario:

CONFIGURATION	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak
SO2, RC1 Full Rate	29.62	29.80	28.88	29.18	27.94	28.92	28.41	28.93	28.36
SO2, RC3 Full Rate	28.86	29.54	28.70	28.44	27.65	28.34	27.89	28.99	28.03
SO55, RC1 Full Rate	<b>29.31</b>	<b>29.88</b>	<b>28.67</b>	<b>29.19</b>	<b>27.71</b>	<b>28.93</b>	<b>28.21</b>	<b>29.08</b>	<b>28.29</b>
SO55, RC3 Full Rate	28.93	29.43	28.82	28.12	27.47	28.31	27.94	28.61	27.89
TDSO SO32, RC3 (+F-SCH) Full Rate	28.87	29.50	28.30	28.27	27.43	28.37	27.75	28.76	27.68
TDSO SO32, RC3 (+SCH) Full Rate	28.74	29.36	28.22	28.14	27.37	28.39	27.68	28.43	27.90

CONFIGURATION	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg
SO2, RC1 Full Rate	23.93	24.93	23.46	23.39	23.64	23.83	23	23.42	22.91
SO2, RC3 Full Rate	23.95	24.99	23.54	23.44	23.62	23.55	22.96	23.36	22.77
SO55, RC1 Full Rate	23.99	24.99	23.54	23.5	23.69	23.79	22.95	23.52	22.95
SO55, RC3 Full Rate	24	25.08	23.55	23.51	23.97	23.9	23.03	23.56	22.96
TDSO SO32, RC3 (+F-SCH) Full Rate	23.93	24.89	23.3	23.39	23.66	23.83	22.87	23.5	22.82
TDSO SO32, RC3 (+SCH) Full Rate	23.96	24.95	23.4	23.49	23.83	23.82	22.92	23.54	22.87

The following configuration was determined and reported as worst case for all measurements:

Radio Configuration: RC1

Service Options: SO55

Data Rate: full rate

#### 4 TTY compliance

**FCC § 255 of the Telecom Act**

The EUT has been designed for TTY Compliance with Cellular Compatibility Standard.

#### 5 Transmitter RF Power Output

##### 5.1 Conducted Power

**FCC: § 2.1046**

**IC: RSS-GEN 4.9**

**Measurement Procedures:**

The RF output power was measured using a Giga-tronics 8541C Universal Power Meter. Terminated to a resistive coaxial load of 50 ohms.

Mode	Frequency (MHz)	Channel	Power (dBm)
CDMA 800	824.70	1013	23.99
	836.52	383	24.99
	848.31	777	23.54
CDMA 1700	1711.25	25	23.50
	1732.5	450	23.69
	1753.75	875	23.79
CDMA 1900	1851.25	25	22.95
	1880	600	23.52
	1908.75	1175	22.95

## 5.2 Radiated Power

<b>FCC:</b> § 22.913, § 24.232	<b>IC:</b> RSS-132, RSS-133 (6.4), RSS-139 (6.4)
<p><b>Measurement Procedures:</b></p> <p>Tests were performed in Compliance Certification Service using substitution method. See separated radiated emission report for details.</p>	

Mode	Frequency (MHz)	Channel	Max. Power (dBm)	Ref.
CDMA 800	824.70	1013	26.0	ERP
	836.52	383	25.7	
	848.31	777	23.6	
CDMA 1700	1711.25	25	24.6	EIRP
	1732.5	450	25.9	
	1753.75	875	26.7	
CDMA 1900	1851.25	25	25.1	EIRP
	1880.00	600	26.7	
	1908.75	1175	25.7	


## 6 Occupied Bandwidth

<b>FCC:</b>	§ 2.1049, § 22.917(b)(d), § 24.238, § 27.53(g)(1)	<b>IC:</b>	RSS-GEN 4.6
<b>Measurement Procedures:</b>			
The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.			
For Digital: Modulate with full rate all up power control bit.			
S.A. Setting	RBW	VBW	
Bandwidth Measurement	30KHz	300kHz	
Band Edge Measurement	100KHz	100KHz	

### List of Figures


Figure	Mode	Description
6-1	CDMA 800	CDMA @ Ch383
6-2		Lower Band Edge @ Ch 1013
6-3		Upper Band Edge @ Ch 777
6-4	CDMA 1700	AWS @ CH450
6-5		Lower Band Edge @ CH25
6-6		Upper Band Edge @ CH875
6-7	CDMA 1900	CDMA @ CH600
6-8		Lower Band Edge @ CH 25
6-9		Upper Band Edge @ CH 1175

CDMA

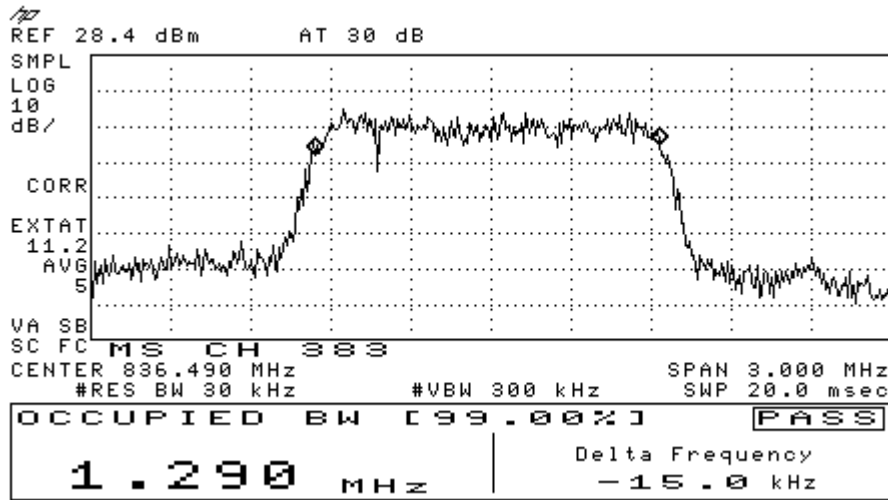


RL

Figure 6-1 CDMA 800 @ CH 383

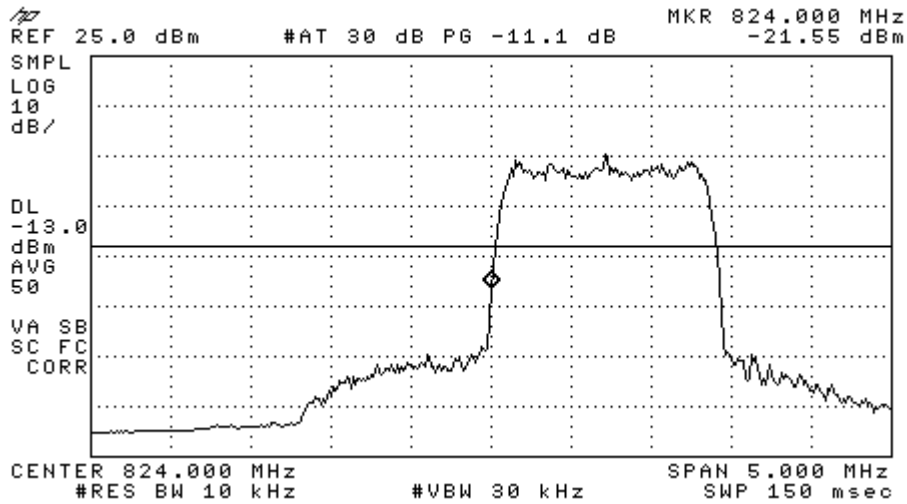

RL

Figure 6-2 CDMA 800 Lower Band Edge @ CH 1013

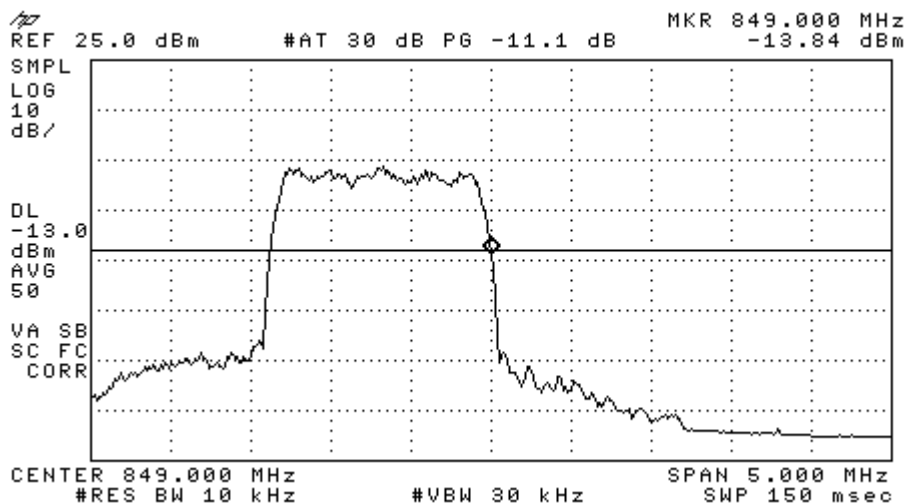


RL

Figure 6-3 CDMA 800 Lower Band Edge @ CH 777




CDMA

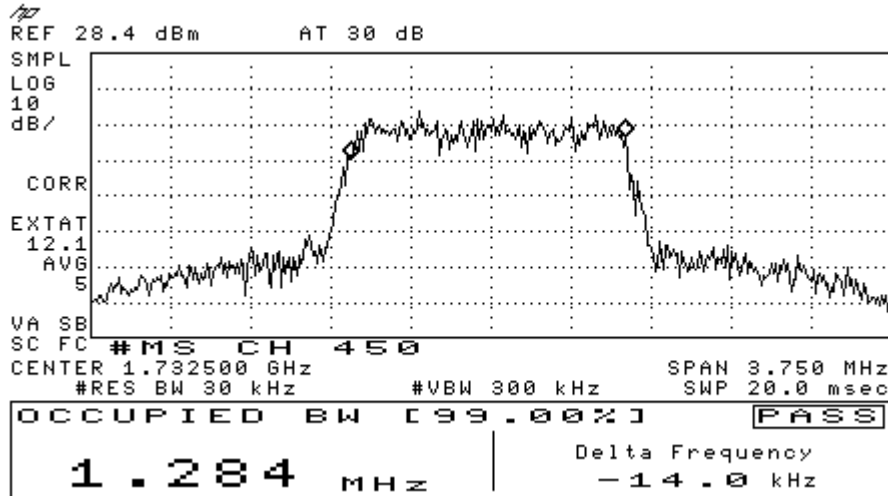


RL

Figure 6-4 AWS 1700 @ CH 450

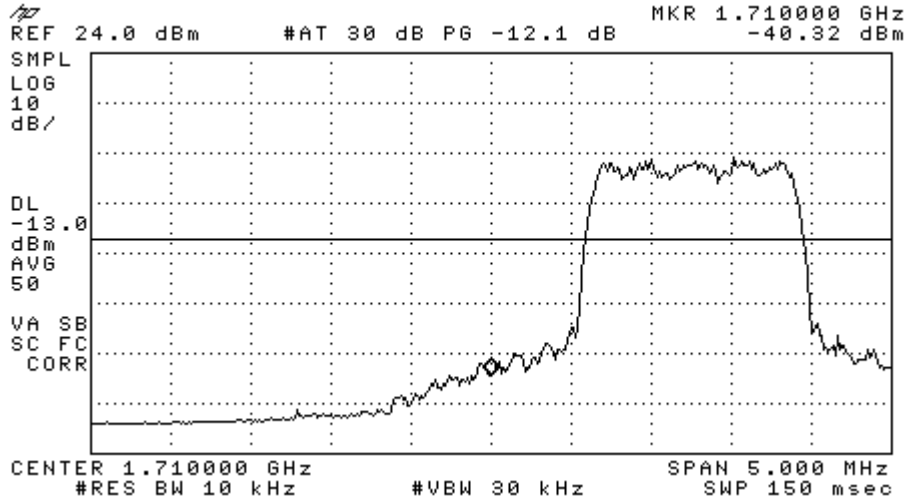

RL


Figure 6-5 AWS 1700 Lower Band Edge @ CH 25

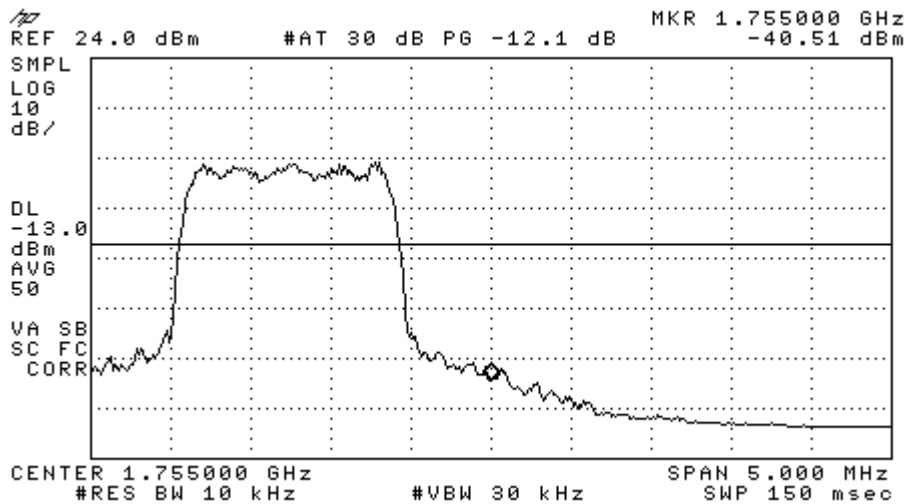

RL


Figure 6-6 AWS 1700 Upper Band Edge @ CH 875

CDMA

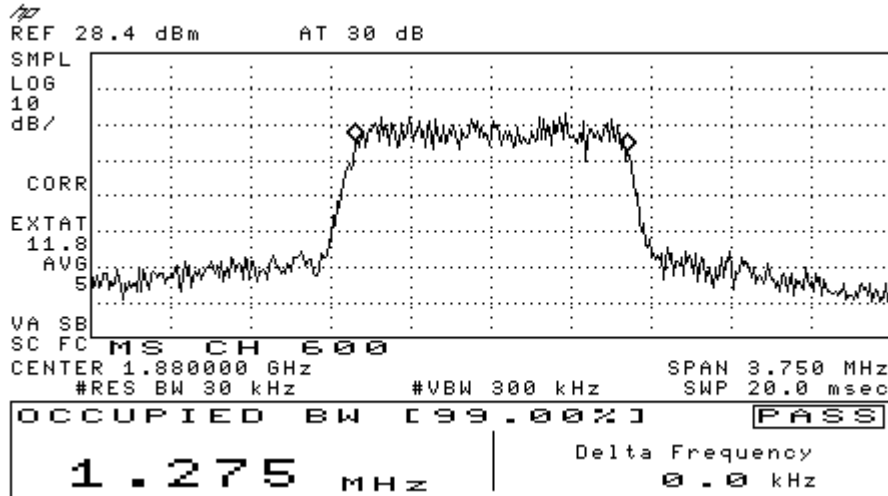


RL

Figure 6-7 CDMA 1900 @ CH 600

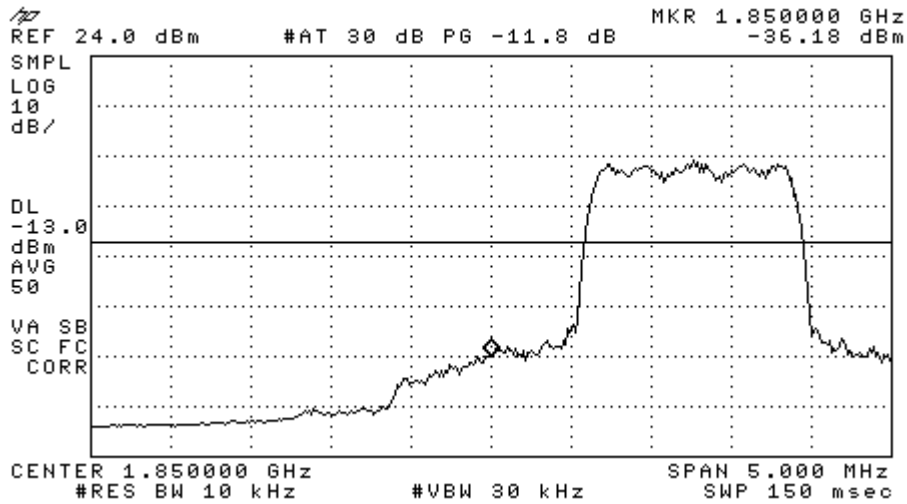

RL

Figure 6-8 CDMA 1900 Lower Band Edge @ CH 25

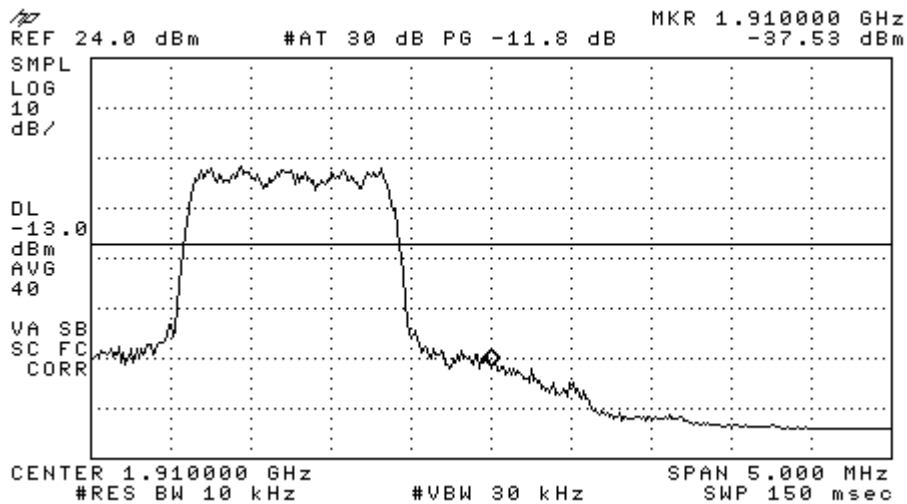

RL

Figure 6-9 CDMA 1900 Upper Band Edge @ CH 1175

## 7 Spurious Emissions At Antenna Terminals

<b>FCC:</b>	§ 2.1051, § 22.917(e)(f), § 24.238	<b>IC:</b>	RSS-132 (4.5), RSS-133 (6.5), RSS-139 (6.5),
<b>Measurement Procedures:</b>			
<p><u>Out of Band:</u> The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.</p>			
S.A. Setting		RBW	VBW
Spurious Emissions Measurement		1MHz	1MHz

### List of Figures:

Figure	Mode	Channel	Plot Description
7-1	CDMA 800	1013	Conducted spurious emissions, 9kHz to 10GHz
7-2		383	Conducted spurious emissions, 9kHz to 10GHz
7-3		777	Conducted spurious emissions, 9kHz to 10GHz
7-4	CDMA 1700	25	Conducted spurious emissions, 9kHz to 20GHz
7-5		450	Conducted spurious emissions, 9kHz to 20GHz
7-6		875	Conducted spurious emissions, 9kHz to 20GHz
7-7	CDMA 1900	25	Conducted spurious emissions, 9kHz to 20GHz
7-8		600	Conducted spurious emissions, 9kHz to 20GHz
7-9		1175	Conducted spurious emissions, 9kHz to 20GHz

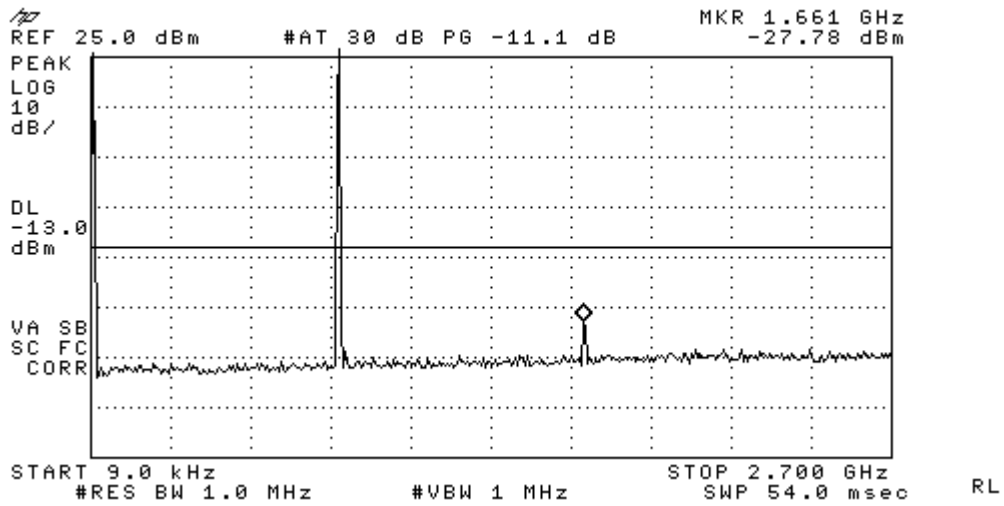


Figure 7-1a CDMA 800 – Conducted Spurious Emission (CH 1013)

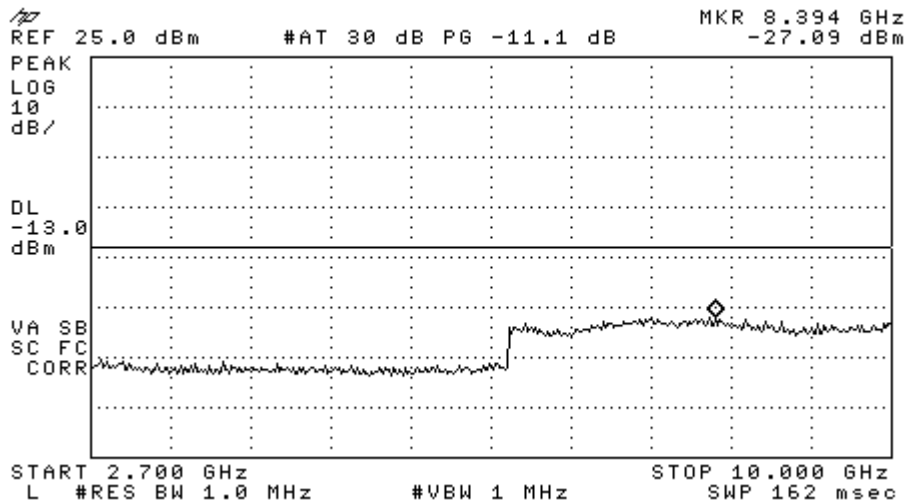


Figure 7-1b CDMA 800 – Conducted Spurious Emission (CH 1013)

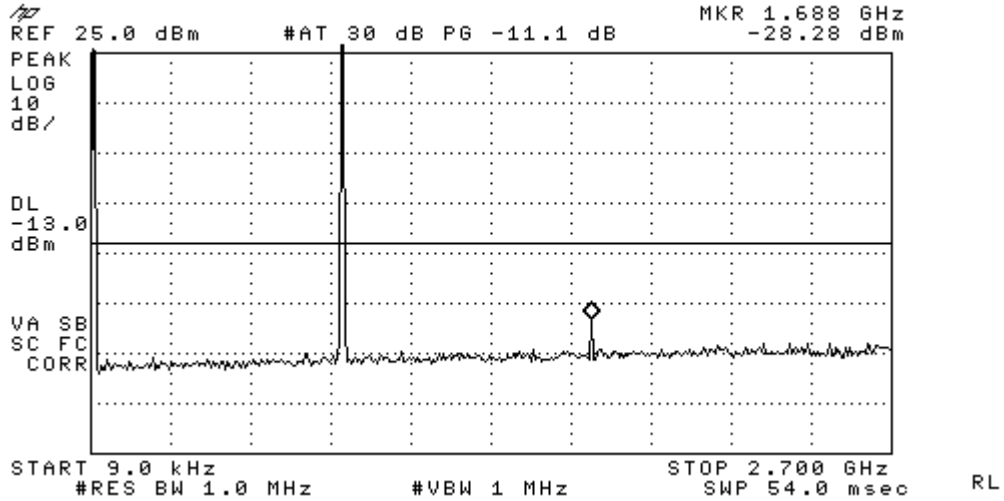


Figure 7-2a CDMA 800 – Conducted Spurious Emission (CH 383)



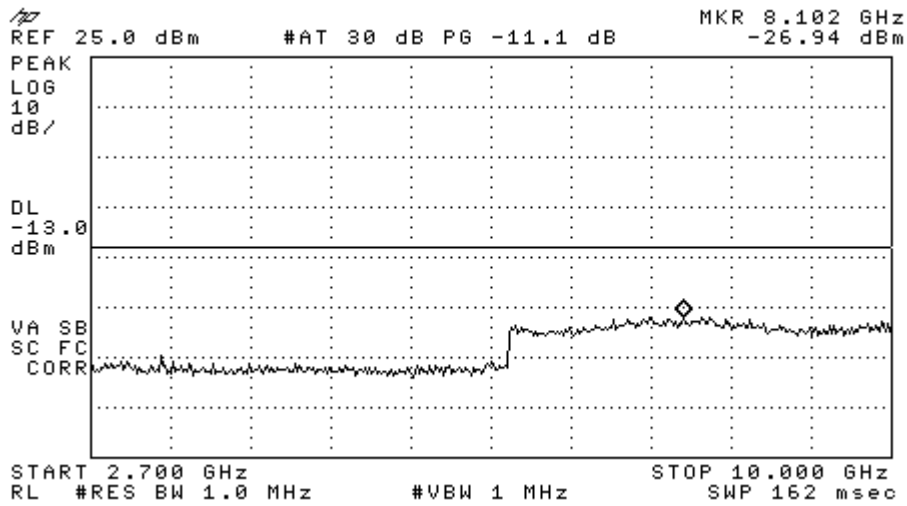



Figure 7-2b CDMA 800 – Conducted Spurious Emission (CH 383)

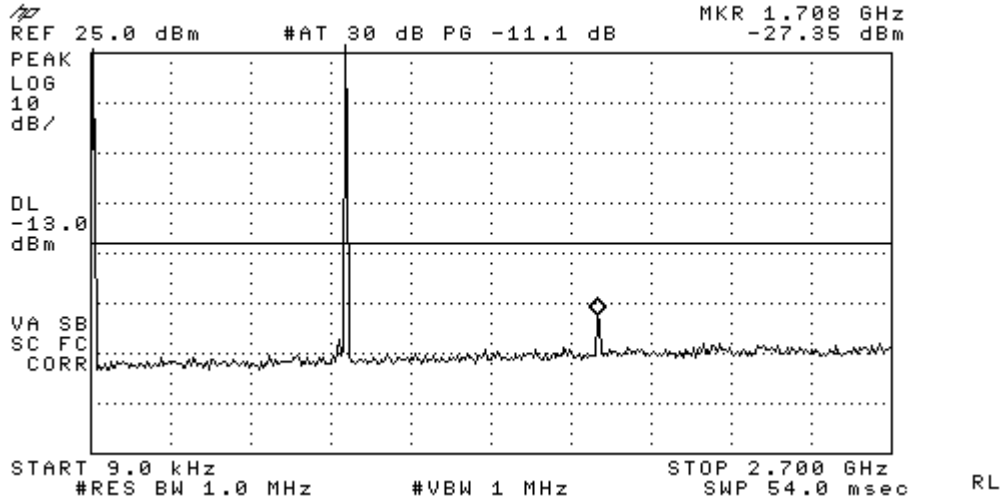

**Figure 7-3a CDMA 800 – Conducted Spurious Emission (CH 777)**

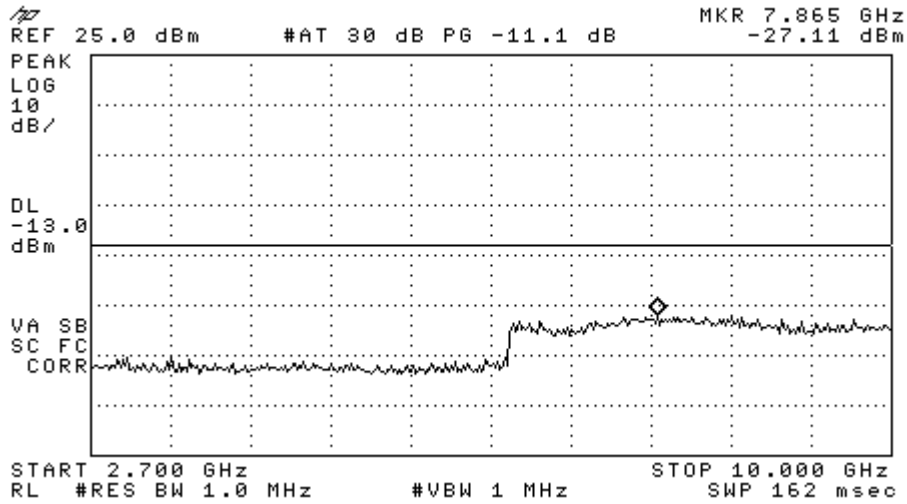


**Figure 7-3b CDMA 800 – Conducted Spurious Emission (CH 777)**

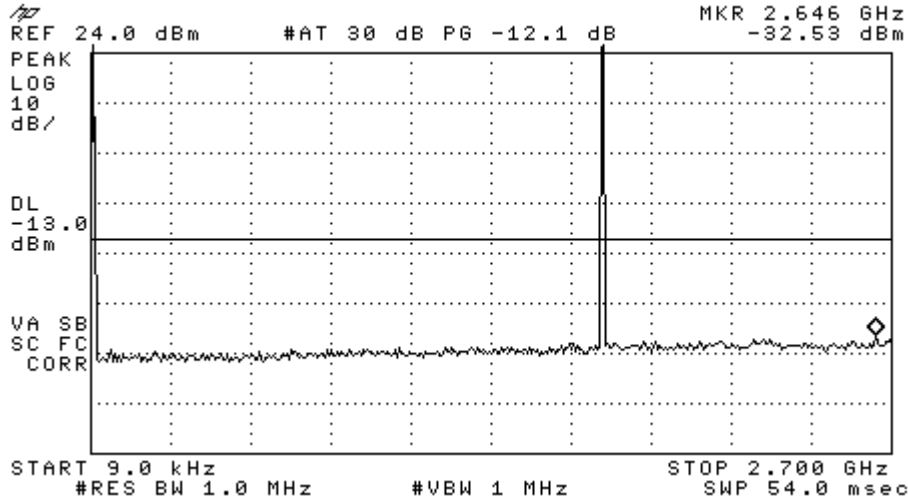

RL

**Figure 7-4a AWS 1700 - Conducted Spurious Emission (CH 25)**

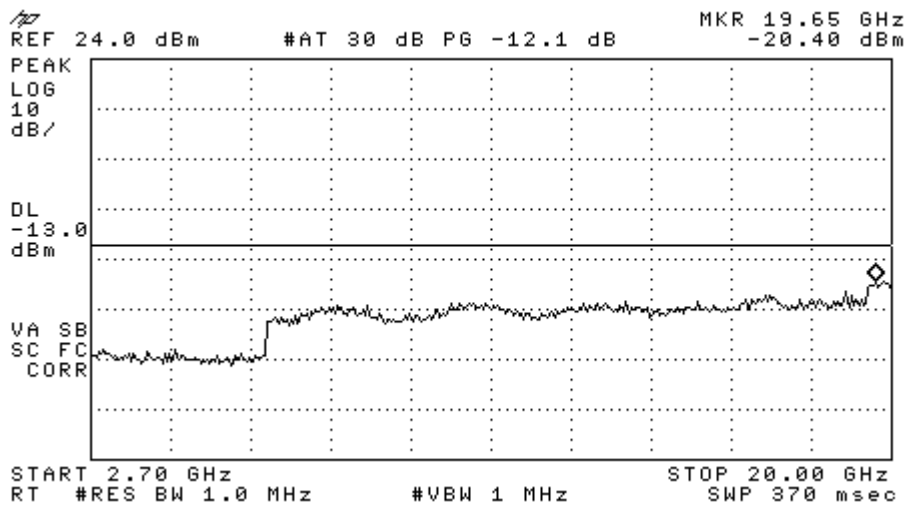

**Figure 7-4b AWS 1700 - Conducted Spurious Emission (CH 25)**

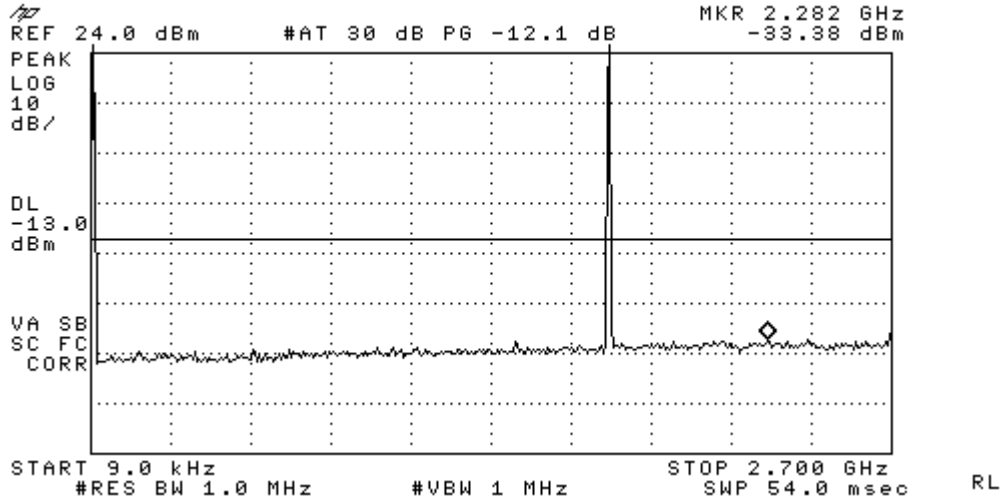


Figure 7-5a AWS 1700 - Conducted Spurious Emission (CH 450)

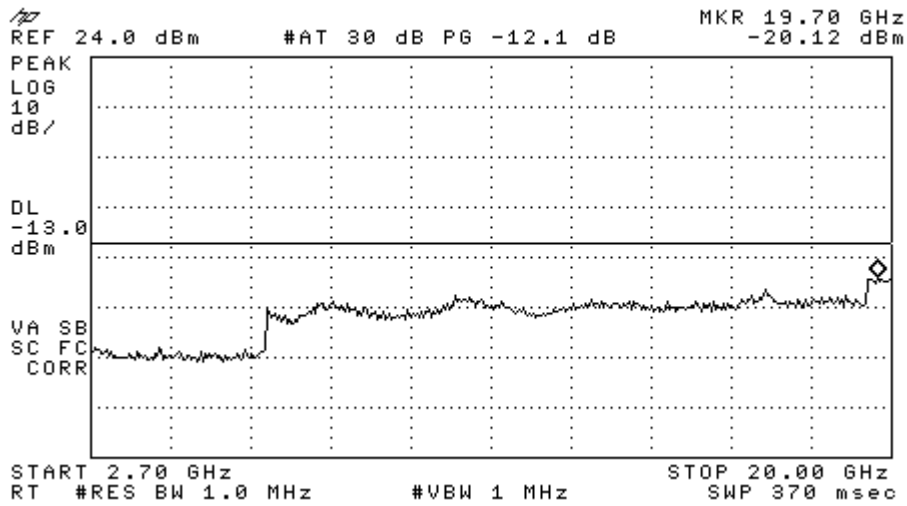


Figure 7-5b AWS 1700 - Conducted Spurious Emission (CH 450)



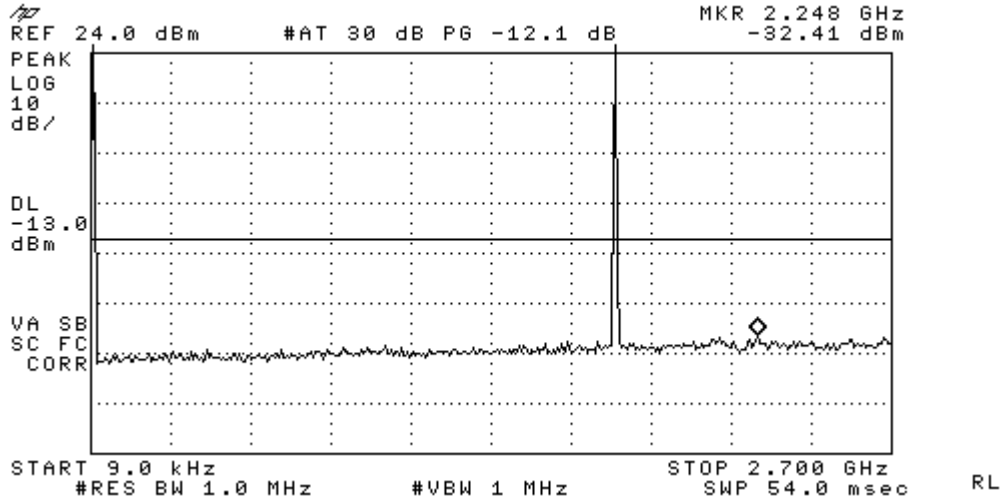


Figure 7-6a AWS 1700 - Conducted Spurious Emission (CH 875)

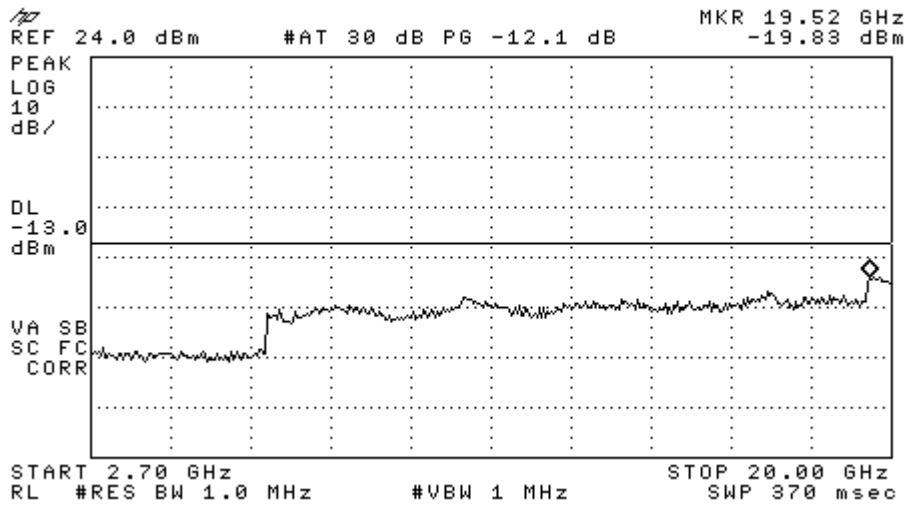


Figure 7-6b AWS 1700 - Conducted Spurious Emission (CH 875)

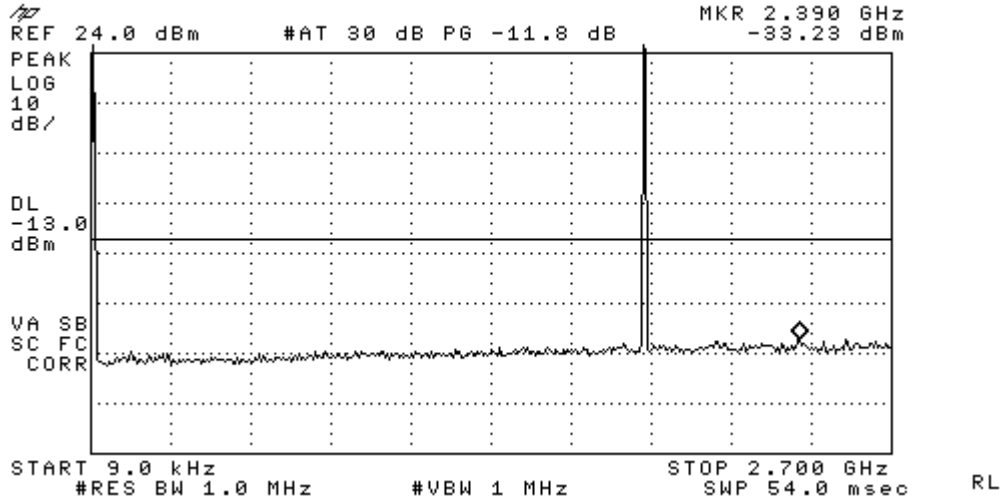


Figure 7-7a CDMA 1900 - Conducted Spurious Emission (CH 25)

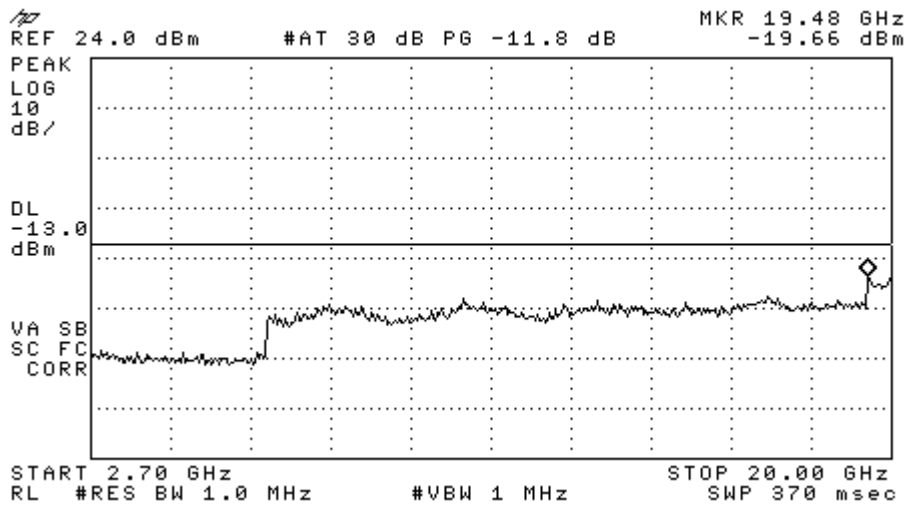


Figure 7-7b CDMA 1900 - Conducted Spurious Emission (CH 25)

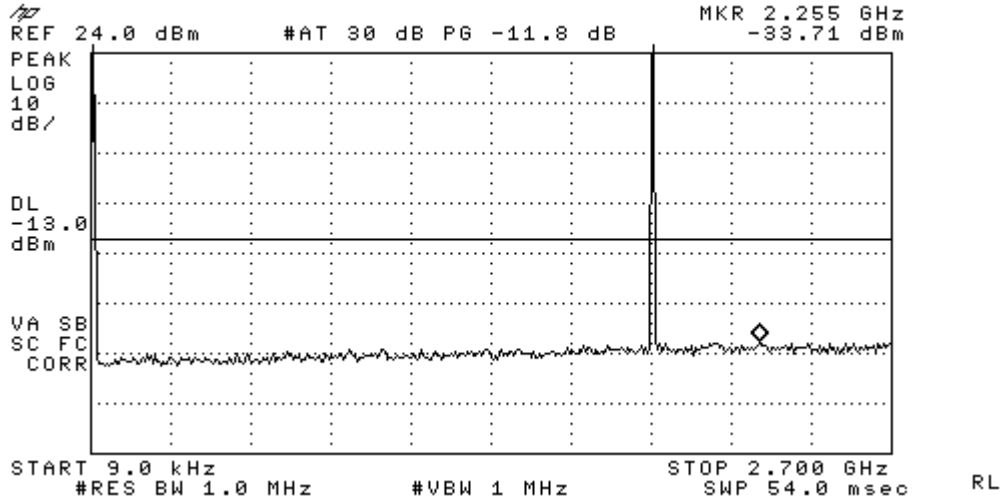


Figure 7-8a CDMA 1900 - Conducted Spurious Emission (CH 600)

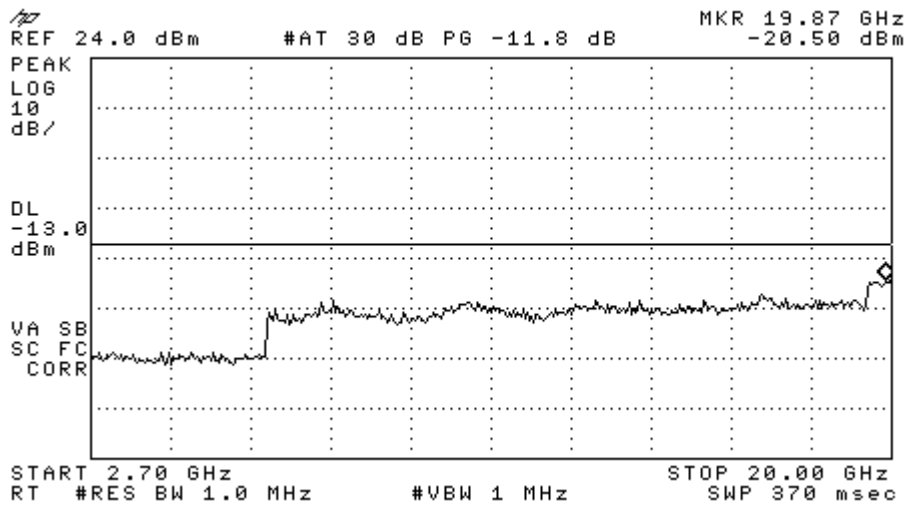


Figure 7-8b CDMA 1900 - Conducted Spurious Emission (CH 600)

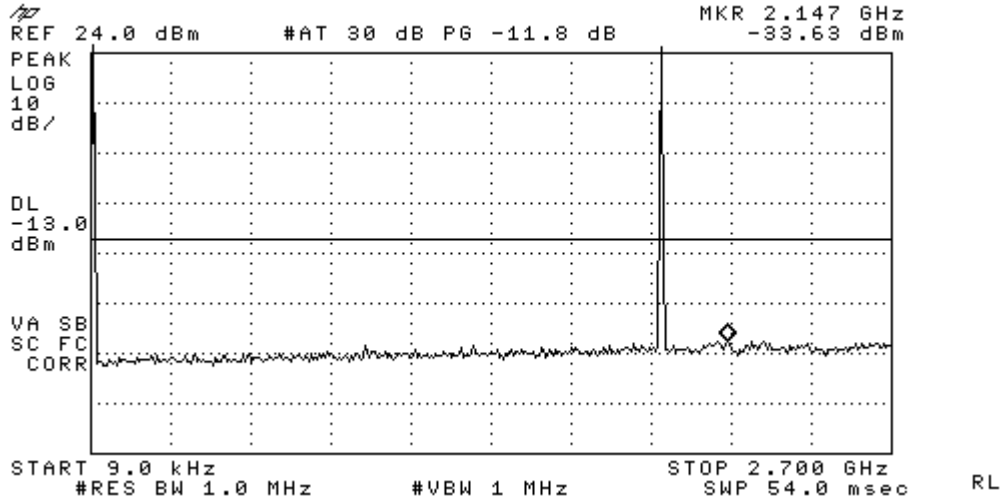


Figure 7-9a CDMA 1900 - Conducted Spurious Emission (CH 1175)

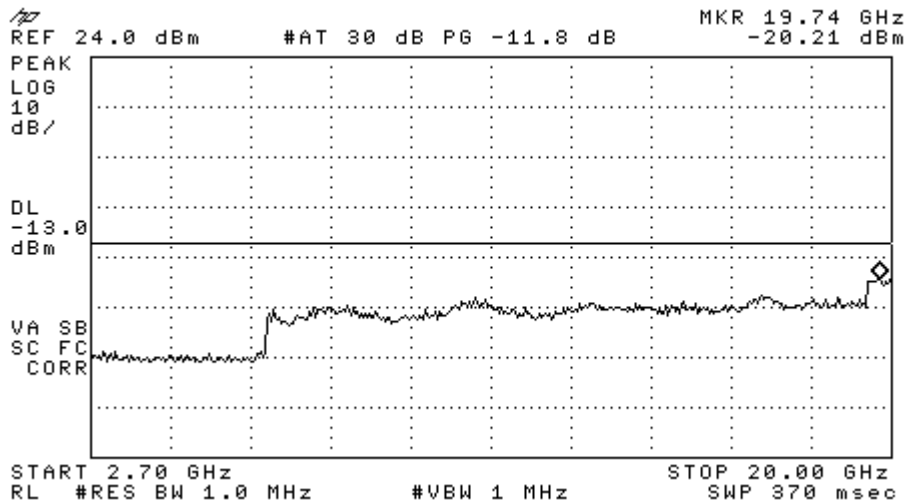


Figure 7-9b CDMA 1900 - Conducted Spurious Emission (CH 1175)

Figure	Mode	Channel	Plot Description
7-10	CDMA 800	1013	Emissions in base station frequency range, 869 - 894 MHz
7-11		383	Emissions in base station frequency range, 869 - 894 MHz
7-12		777	Emissions in base station frequency range, 869 - 894 MHz

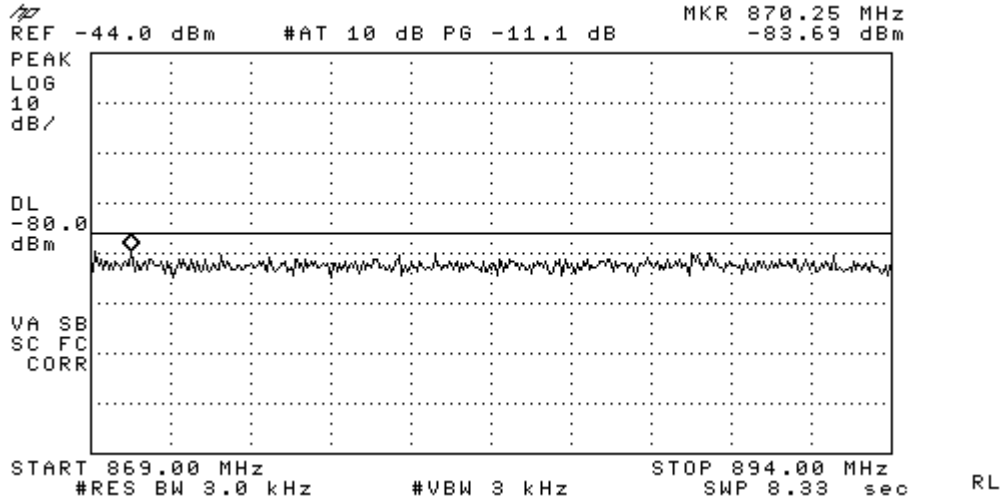


Figure 7-10 CDMA 800 - Emissions in base station frequency range (CH 1013)

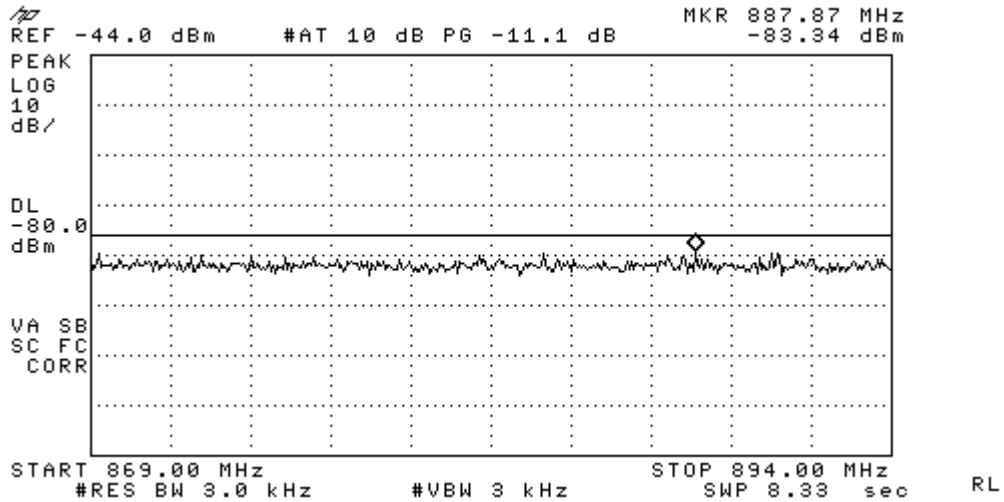


Figure 7-11 CDMA 800 - Emissions in base station frequency range (CH 383)

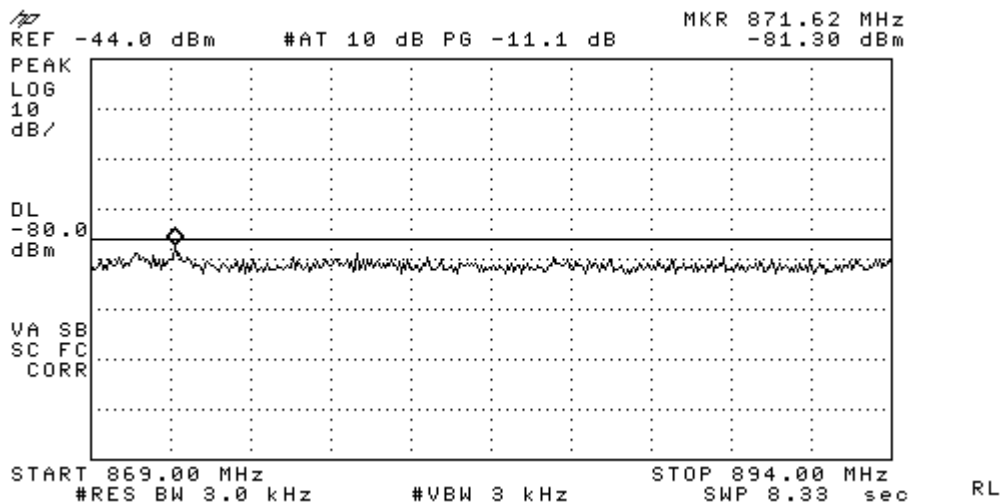


Figure 7-12 CDMA 800 - Emissions in base station frequency range (CH 777)

**8 Transmitter Radiated Spurious Emissions Measured Data**

<b>FCC:</b>	§ 2.1053, § 22.91, § 24.238, §27.53(g)	<b>IC:</b>	RSS-132, RSS-133 (6.3), RSS-139 (6.3)
<p><b>Measurement Procedures:</b></p> <p>The radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.</p>			

**9 Receiver Spurious Emissions**

<b>FCC:</b>	§ 15.109	<b>IC:</b>	RSS-132 (4.6), RSS-133 (6.6), RSS-139 (6.6), RSS-GEN
<p><b>Measurement Procedures:</b></p> <p>The receiver radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.</p>			


**10 Transmitter RF Carrier Frequency Stability**

<b>FCC:</b>	§ 2.1055, § 22.355, § 24.235, § 27.54	<b>IC:</b>	RSS-132 (4.3), RSS-133 (6.3), RSS-139 (6.3)
<p><b>Measurement Procedures:</b></p> <p>The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply.</p>			

10.1 CDMA 800 Mode

<b>Tx Frequency :</b> 836.49 MHz	<b>Voltage :</b> 3.7V
<b>Tolerance :</b> +/- 2.5 Ppm (+/- 2091 Hz)	<b>Ch :</b> 383


Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.5V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-5.8		-2091	2091
-20		6.79		-2091	2091
-10		-7.33		-2091	2091
0		-6.6		-2091	2091
10		10.6		-2091	2091
20	<b>-6.97</b>	<b>-6.37</b>	<b>-8.09</b>	-2091	2091
30		-2.14		-2091	2091
40		9.09		-2091	2091
50		-8.64		-2091	2091
60		6.58		-2091	2091

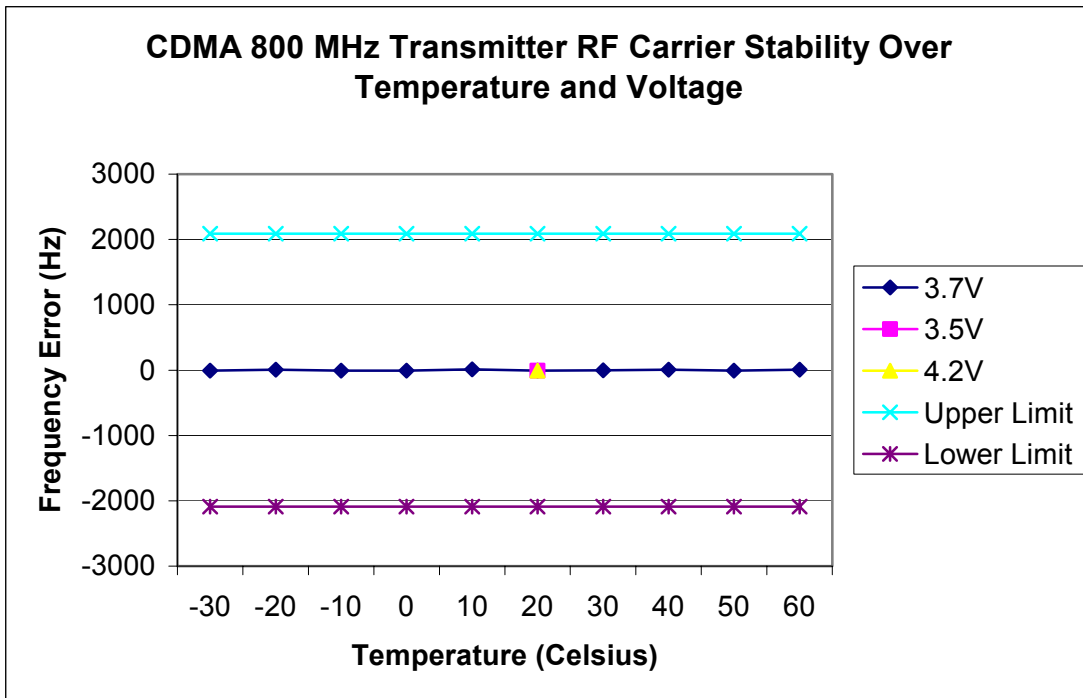

10.2 CDMA 1700 Mode

<b>Tx Frequency :</b> 1732.50 MHz	<b>Voltage :</b> 3.7V
<b>Tolerance :</b> +/- 2.5 ppm (+/-4331 Hz)	<b>Ch :</b> 450

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.5V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-10.38		-4331	4331
-20		-9.36		-4331	4331
-10		-8.33		-4331	4331
0		10.49		-4331	4331
10		10.47		-4331	4331
20	<b>-11.06</b>	<b>-11.94</b>	<b>-10.76</b>	-4331	4331
30		4.78		-4331	4331
40		8.76		-4331	4331
50		-11.16		-4331	4331
60		12.65		-4331	4331

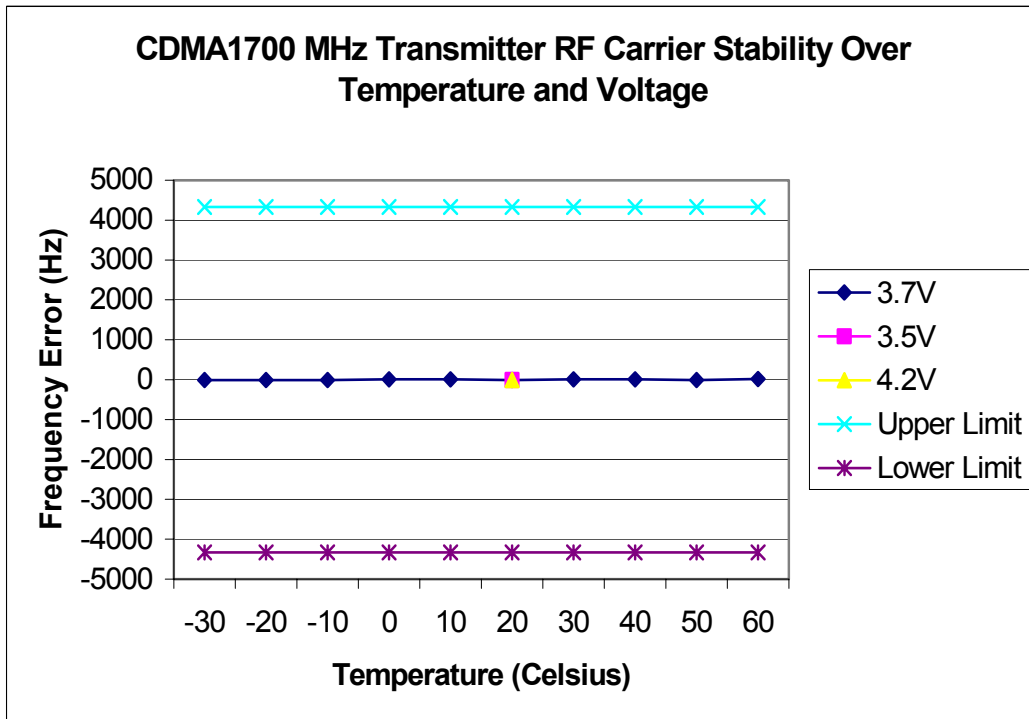




10.3 CDMA 1900 Mode

<b>Tx Frequency :</b> 1880 MHz	<b>Voltage :</b> 3.7V
<b>Tolerance :</b> +/- 2.5 ppm (+/-4700 Hz)	<b>Ch :</b> 600

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.5V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-12.25		-4700	4700
-20		-12.89		-4700	4700
-10		-10.49		-4700	4700
0		-6.6		-4700	4700
10		10.6		-4700	4700
20	<b>-9.00</b>	<b>-9.62</b>	<b>-7.77</b>	-4700	4700
30		-3.65		-4700	4700
40		-8.29		-4700	4700
50		-13.55		-4700	4700
60		6.58		-4700	4700

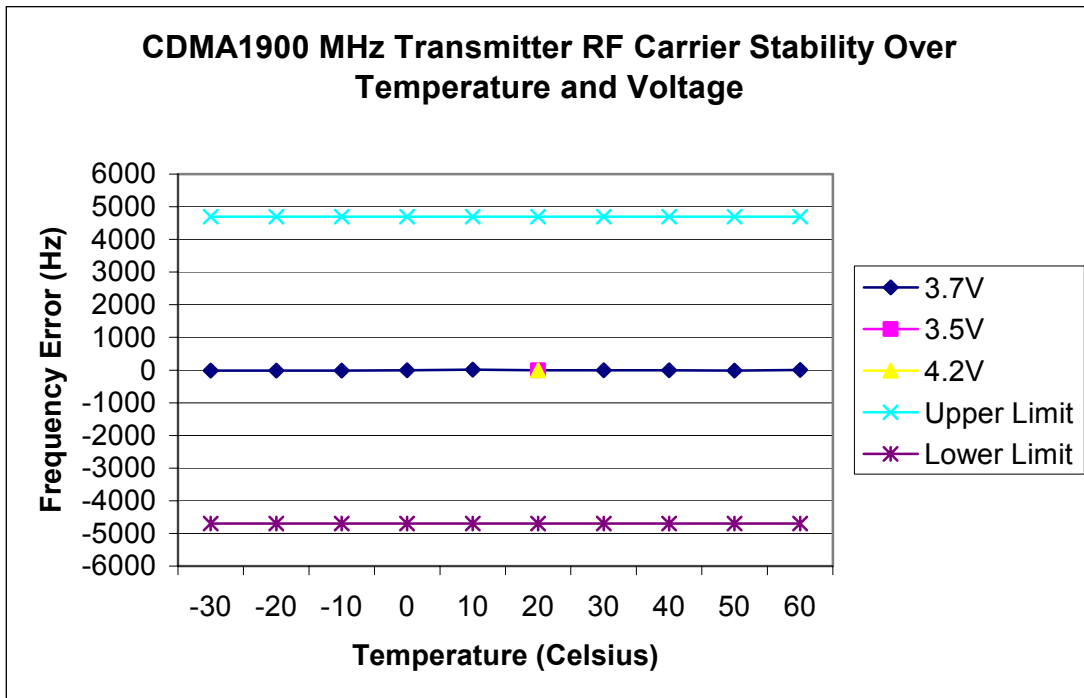

**11 Exposure of Humans to RF Fields (SAR)**

The SAR Test Report is showed in a separate attachment as Exhibit 9.

**12 Test Equipment**

Description	Manufacturer	Model Number	Serial Number	Cal Due Date
Power Meter	Giga-tronics	8541C	1832048	08/15/09
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	03/04/10
Spectrum Analyzer	Hewlett Packard	8595E	3911A03899	07/19/09
Wireless Communications Test Set	Agilent	8960	GB44052789	08/13/09
Temperature Chamber	Test Equity	ZH2-033-033-H/AC	ZZ9622421	2/20/09