



RADIATED SPURIOUS EMISSIONS PORTIONS OF

**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART L
INDUSTRY CANADA RSS-132 ISSUE 2
INDUSTRY CANADA RSS-133 ISSUE 4
INDUSTRY CANADA RSS-139 ISSUE 2**

**CERTIFICATION TEST REPORT
FOR**

TRI-BAND 1xRTT CDMA PHONE WITH BLUETOOTH

**FCC MODEL NUMBER: K50-03
IC MODEL NUMBER: M1400**

**FCC ID: OVFK50- 03
IC: 3572A- M1400**

REPORT NUMBER: 09U12645-3

ISSUE DATE: JUNE 16, 2009

Prepared for

**KYOCERA WIRELESS CORP
10300 CAMPUS POINT DRIVE
SAN DIEGO, CA 92121, U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	06/16/09	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>SOFTWARE AND FIRMWARE</i>	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.5. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. <i>RADIATED OUTPUT POWER</i>	11
7.2. <i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	15
7.3. <i>RECEIVER SPURIOUS EMISSIONS</i>	19
7.4. <i>POWER LINE CONDUCTED EMISSION</i>	24
8. SETUP PHOTOS	28

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: KYOCERA WIRELESS
10300 CAMPUS POINT DRIVE
SAN DIEGO, CA 92121, USA

EUT DESCRIPTION: TRI-BAND 1XRTT CDMA PHONE WITH BLUETOOTH

FCC MODEL NUMBER: K50-03

IC MODEL NUMBER: M1400

SERIAL NUMBER: FFGL0000003074

DATE TESTED: JUNE 12-16, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, AND 27L	PASS (Radiated Portion)
IC RSS-132 ISSUE 2, RSS-133 ISSUE 4, AND RSS-139 ISSUE 2	PASS (Radiated Portion)

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



THU CHAN
EMC MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



MENGISTU MEKURIA
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47 Part 22, FCC CFR Part 24, FCC Part 27, RSS-132 Issue 2, RSS-133 Issue 4 and RSS-139 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth featured Tri-band CDMA Phone that manufactured by Kyocera Wireless Corporations

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum ERP & EIRP Average output powers as follows:

824 to 849 MHz Authorized Band

Frequency Range (MHz)	Modulation	ERP Peak Power (dBm)	ERP Peak Power (mW)
Low CH - 824.70	CDMA2000	26.0	398.1
Mid CH - 836.52		25.7	371.5
High CH - 848.31		23.6	229.1

1850 to 1910 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low CH - 1851.25	CDMA2000	25.1	323.6
Mid CH - 1880.00		26.7	467.7
High CH - 1908.75		25.7	371.5

1710 to 1755 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low CH - 1711.25	AWS	24.6	288.4
MID-Ch- 1733.00		25.9	389.0
High CH - 1753.75		26.7	467.7

5.3. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

5.4. WORST-CASE CONFIGURATION AND MODE

The worst-case is, EUT with highest emissions. To determine the worst-case, the EUT was investigated for X, Y, and Z-Positions in both slide in and out condition, and the worst case among the above positions with AC/DC adapter. After the investigations, the worst-position was turned out to be a slide out Z-position with AC adapter, a slide out X-position adapter with out AC adapter and a slide out X-position with AC adapter for Cell, AWS, and PCS bands respectively.

PROCEDURE USED TO ESTABLISH TEST SIGNAL

3G-CDMA2000 1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobil Test	B.10.11, L

1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 4395
> Network ID (NID) > 0

Once "Active Cell" show "Connected " then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC Adapter	Kyocera	TXTVL10119	915S-002Y	DoC
HEADSET	N/A	N/A	2252	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC Input	1	Mini-USB	Un-Shielded	2.0 m	N/A
2	AUDIO	1	Mini-Jack	Un-Shielded	1.8 m	Volume Control on the Cable

TEST SETUP

The EUT is a CDMA phone and-is tested as a standalone configuration. Communications Test Set is used to link the device under test.

SETUP DIAGRAM FOR TESTS

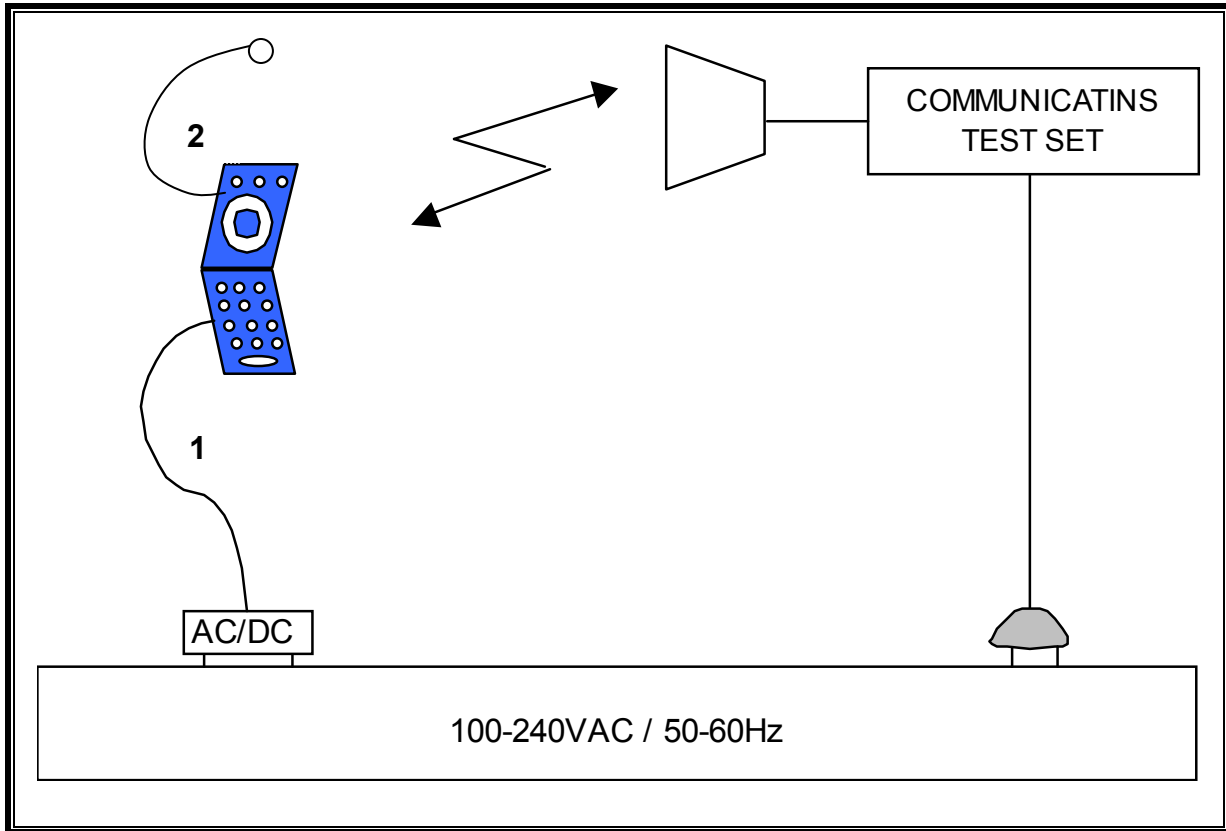

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	02/04/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	12/16/09
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	01/14/10
Antenna, Horn, 18 GHz	EMCO	3115	C00945	01/29/10
Antenna, Horn, 18 GHz	EMCO	3115	C00943	01/29/10
Dipole	Speag	D900V2	NA	11/16/11
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	10/29/09
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/06/09
Signal Generator	R & S	SMP04	C00953	02/16/11
Communications Test Set	R & S	CMU200	C001131	04/16/10
Communications Test Set	Agilent / HP	E5515C	C01086	06/16/10
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	01/05/10

7. LIMITS AND RESULTS

7.1. RADIATED OUTPUT POWER

LIMITS

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(b) & RSS133 § 6.4 Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50 (d) (2) & RSS-139 § 6.4 Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to a peak EIRP of 1 watt.

RSS-132 § 4.4 The maximum ERP shall be 6.3 Watts for mobile stations.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17, RSS-132, RSS-133, & RSS-139

RESULTS

CELL OUTPUT POWER (ERP)

High Frequency Substitution Measurement Compliance Certification Services Chamber A							
Company:		KYOCERA WIRELESS					
Project #:		09U12645					
Date:		6/12/2009					
Test Engineer:		MENGISTU MEKURIA					
Configuration:		EUT WITH AC ADAPTER					
Mode:		TX, CELL 850 MHz BAND					
Test Equipment:							
Receiving: Sunol T122, and 3m Chamber N-type Cable (Setup this one for testing EUT)							
Substitution: Dipole S/N: 00022117, 6ft SMA Cable (SN # 208947003) Warehouse.							
f MHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
824.70	-8.8	V	34.8	26.0	38.5	-12.5	
824.70	-16.0	H	30.5	14.6	38.5	-23.9	
836.52	-7.4	V	33.1	25.7	38.5	-12.7	
836.52	-15.2	H	31.2	15.9	38.5	-22.5	
848.31	-8.5	V	32.1	23.6	38.5	-14.8	
848.31	-16.3	H	31.2	14.9	38.5	-23.5	
Rev. 1.24.7							

PCS OUTPUT POWER (EIRP)

High Frequency Fundamental Measurement Compliance Certification Services Chamber A							
Company:		KYOCERA WIRELESS					
Project #:		09U12645					
Date:		6/12/2009					
Test Engineer:		MENGISTU MEKURIA					
Configuration:		EUT WITH AC ADAPTER					
Mode:		TX, PCS 1900 MHz BAND					
Test Equipment:							
Receiving: Horn T73, and Camber B SMA Cables							
Substitution: Horn T72 Substitution, 6ft SMA Cable (208947003) Warehouse							
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.851	-21.6	V	40.4	18.8	33.0	-14.2	
1.851	-14.7	H	39.7	25.1	33.0	-8.0	
1.880	-21.1	V	39.9	18.8	33.0	-14.2	
1.880	-13.4	H	40.1	26.7	33.0	-6.3	
1.909	-22.7	V	39.8	17.2	33.0	-15.9	
1.909	-14.4	H	40.2	25.7	33.0	-7.3	
Rev. 1.24.7							

AWS OUTPUT POWER (EIRP)

High Frequency Fundamental Measurement Compliance Certification Services Chamber A							
Company:		KYOCERA WIRELESS					
Project #:		09U12645					
Date:		6/12/2009					
Test Engineer:		MENGISTU MEKURIA					
Configuration:		EUT WITH AC ADAPTER					
Mode:		TX, AWS 1700 MHz BAND					
<u>Test Equipment:</u>							
Receiving: Horn T73, and Camber B SMA Cables							
Substitution: Horn T72 Substitution, 6ft SMA Cable (208947003) Warehouse							
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Path Loss (dBm)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.711	-17.8	V	39.8	22.1	30.0	-8.0	
1.711	-14.5	H	39.1	24.6	30.0	-5.4	
1.733	-18.3	V	40.0	21.6	30.0	-8.4	
1.733	-13.9	H	39.8	25.9	30.0	-4.1	
1.754	-19.2	V	40.1	21.0	30.0	-9.0	
1.754	-13.3	H	40.0	26.7	30.0	-3.3	
Rev. 1.24.7							

7.2. FIELD STRENGTH OF SPURIOUS RADIATION

LIMIT

§22.917 (e) and §24.238 (a), RSS-132 § 4.5.1, & RSS-133 § 6.5.1 (a) (i) & (b): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (g) and RSS-139 § 6.5 For operations in the 1710–1755MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 22.917 (b), FCC 24.238 (b), & FCC 27.53 (g)(1)(2)(3), RSS-132, RSS-133, & RSS-139

RESULTS

CELL SPURIOUS & HARMONIC (ERP)

Compliance Certification Services										
Above 1GHz High Frequency Substitution Measurement										
Company:		KYOCERA WIRELESS								
Project #:		09U12645								
Date:		6/15/2009								
Test Engineer:		MENGISTU MEKURIA								
Configuration:		EUT WITH AC ADAPTER								
Mode:		TX, CELL 850 MHz BAND								
Chamber		Pre-amplifier			Filter		Limit			
5m Chamber A		T144 8449B			Filter 1		FCC PART 22			
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low (824.7 MHz)										
1.649	-33.2	H	3.0	36.6	38.2	1.0	-33.8	-13.0	-20.8	
2.474	-44.4	H	3.0	40.0	37.5	1.0	-40.9	-13.0	-27.9	
3.299	-46.4	H	3.0	43.9	37.1	1.0	-38.6	-13.0	-25.6	
4.948	-66.5	H	3.0	48.6	36.3	1.0	-53.2	-13.0	-40.2	
5.773	-66.0	H	3.0	50.3	36.3	1.0	-51.0	-13.0	-38.0	
9.072	-69.3	H	3.0	55.0	37.0	1.0	-50.3	-13.0	-37.3	
9.896	-69.6	H	3.0	56.1	37.2	1.0	-49.7	-13.0	-36.7	
1.649	-24.5	V	3.0	36.8	38.2	1.0	-24.8	-13.0	-11.8	
2.474	-41.7	V	3.0	41.7	37.5	1.0	-36.4	-13.0	-23.4	
3.299	-50.7	V	3.0	44.0	37.1	1.0	-42.9	-13.0	-29.9	
4.948	-65.1	V	3.0	48.1	36.3	1.0	-52.3	-13.0	-39.3	
5.773	-64.2	V	3.0	49.6	36.3	1.0	-49.9	-13.0	-36.9	
9.072	-64.5	V	3.0	54.0	37.0	1.0	-46.4	-13.0	-33.4	
9.896	-67.5	V	3.0	55.1	37.2	1.0	-48.6	-13.0	-35.6	
Mid Ch. (836.52 MHz)										
1.673	-32.3	H	3.0	36.8	38.1	1.0	-32.6	-13.0	-19.6	
2.510	-47.4	H	3.0	40.1	37.5	1.0	-43.8	-13.0	-30.8	
3.346	-44.2	H	3.0	44.0	37.1	1.0	-36.3	-13.0	-23.3	
5.019	-61.6	H	3.0	48.8	36.3	1.0	-48.1	-13.0	-35.1	
5.856	-62.7	H	3.0	50.5	36.3	1.0	-47.6	-13.0	-34.6	
10.038	-68.1	H	3.0	56.2	37.2	1.0	-48.1	-13.0	-35.1	
9.202	-66.9	H	3.0	55.2	37.0	1.0	-47.7	-13.0	-34.7	
1.673	-29.0	V	3.0	37.1	38.1	1.0	-29.1	-13.0	-16.1	
2.510	-47.1	V	3.0	41.8	37.5	1.0	-41.7	-13.0	-28.7	
3.346	-49.2	V	3.0	44.1	37.1	1.0	-41.1	-13.0	-28.1	
5.019	-64.3	V	3.0	48.3	36.3	1.0	-51.3	-13.0	-38.3	
5.856	-61.7	V	3.0	49.7	36.3	1.0	-47.4	-13.0	-34.4	
9.202	-64.4	V	3.0	54.2	37.0	1.0	-46.2	-13.0	-33.2	
10.038	-66.1	V	3.0	55.2	37.2	1.0	-47.0	-13.0	-34.0	
Hi Ch. (848.31 MHz)										
1.697	-32.9	H	3.0	37.0	38.1	1.0	-33.0	-13.0	-20.0	
2.545	-55.6	H	3.0	40.3	37.5	1.0	-51.7	-13.0	-38.7	
3.393	-46.0	H	3.0	44.1	37.1	1.0	-37.9	-13.0	-24.9	
5.090	-66.2	H	3.0	49.0	36.3	1.0	-52.4	-13.0	-39.4	
5.938	-66.3	H	3.0	50.6	36.3	1.0	-51.1	-13.0	-38.1	
9.331	-67.3	H	3.0	55.3	37.0	1.0	-47.9	-13.0	-34.9	
10.180	-67.2	H	3.0	56.1	37.1	1.0	-47.2	-13.0	-34.2	
1.697	-26.7	V	3.0	37.4	38.1	1.0	-26.4	-13.0	-13.4	
2.545	-53.1	V	3.0	42.0	37.5	1.0	-47.6	-13.0	-34.6	
3.393	-50.2	V	3.0	44.2	37.1	1.0	-42.1	-13.0	-29.1	
5.090	-64.4	V	3.0	48.5	36.3	1.0	-51.1	-13.0	-38.1	
5.938	-63.1	V	3.0	49.8	36.3	1.0	-48.6	-13.0	-35.6	
9.331	-64.3	V	3.0	54.3	37.0	1.0	-46.0	-13.0	-33.0	
10.180	-66.4	V	3.0	55.4	37.1	1.0	-47.2	-13.0	-34.2	

Rev. 03.03.09

PCS Spurious & Harmonic (EIRP)

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: KYOCERA WIRELESS
Project #: 09U12645
Date: 6/15/2009
Test Engineer: MENGISTU MEKURIA
Configuration: EUT WITH AC ADAPTER
Mode: TX, PCS 1900 MHz BAND

Chamber

Pre-amplifier

Filter

Limit

5m Chamber A

T144 8449B

Filter 1

FCC PART 24

f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low (1851.25 MHz)										
3.703	-54.6	H	3.0	45.0	36.8	1.0	-45.4	-13.0	-32.4	
5.554	-64.7	H	3.0	49.9	36.3	1.0	-50.1	-13.0	-37.1	
9.256	-64.8	H	3.0	55.3	37.0	1.0	-45.5	-13.0	-32.5	
12.959	-67.2	H	3.0	57.2	36.0	1.0	-45.0	-13.0	-32.0	
3.703	-51.6	V	3.0	44.9	36.8	1.0	-42.5	-13.0	-29.5	
5.554	-65.2	V	3.0	49.3	36.3	1.0	-51.2	-13.0	-38.2	
9.256	-63.9	V	3.0	54.2	37.0	1.0	-45.7	-13.0	-32.7	
12.959	-68.0	V	3.0	58.2	36.0	1.0	-44.8	-13.0	-31.8	
Mid Ch. (1800.00 MHz)										
3.760	-60.8	H	3.0	45.2	36.8	1.0	-51.4	-13.0	-38.4	
5.640	-65.3	H	3.0	50.1	36.3	1.0	-50.5	-13.0	-37.5	
9.400	-64.4	H	3.0	55.4	37.0	1.0	-45.0	-13.0	-32.0	
13.160	-62.4	H	3.0	57.6	35.9	1.0	-39.7	-13.0	-26.7	
3.760	-57.8	V	3.0	45.1	36.8	1.0	-48.5	-13.0	-35.5	
5.640	-68.6	V	3.0	49.4	36.3	1.0	-54.5	-13.0	-41.5	
9.400	-65.7	V	3.0	54.4	37.0	1.0	-47.3	-13.0	-34.3	
13.160	-66.6	V	3.0	58.4	35.9	1.0	-43.1	-13.0	-30.1	
Hi Ch. (1908.75 MHz)										
3.818	-63.4	H	3.0	45.3	36.7	1.0	-53.8	-13.0	-40.8	
5.726	-64.2	H	3.0	50.2	36.3	1.0	-49.3	-13.0	-36.3	
9.544	-64.2	H	3.0	55.6	37.1	1.0	-44.7	-13.0	-31.7	
13.361	-63.9	H	3.0	57.9	35.8	1.0	-40.7	-13.0	-27.7	
3.818	-61.7	V	3.0	45.2	36.7	1.0	-52.3	-13.0	-39.3	
5.726	-63.6	V	3.0	49.5	36.3	1.0	-49.4	-13.0	-36.4	
9.544	-64.4	V	3.0	54.6	37.1	1.0	-45.8	-13.0	-32.8	
13.361	-63.6	V	3.0	58.6	35.8	1.0	-39.8	-13.0	-26.8	

Rev. 03.03.09

AWS Spurious & Harmonic (EIRP)

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: KYOCERA WIRELESS
Project #: 09U12645
Date: 6/15/2009
Test Engineer: MENGISTU MEKURIA
Configuration: EUT WITH AC ADAPTER
Mode: TX, AWS 1700 MHz BAND

Chamber

5m Chamber A

Pre-amplifier

T144 8449B

Filter

Filter 1

Limit

FCC PART 27

f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low (1711.25 MHz)										
3.422	-59.7	H	3.0	44.2	37.0	1.0	-51.5	-13.0	-38.5	
10.266	-65.9	H	3.0	56.1	37.1	1.0	-45.9	-13.0	-32.9	
3.422	-53.4	V	3.0	44.3	37.0	1.0	-45.1	-13.0	-32.1	
10.266	-66.0	V	3.0	55.5	37.1	1.0	-46.6	-13.0	-33.6	
Mid Ch. (1733.00 MHz)										
3.466	-63.7	H	3.0	44.3	37.0	1.0	-55.4	-13.0	-42.4	
10.398	-68.3	H	3.0	56.1	37.1	1.0	-48.3	-13.0	-35.3	
3.466	-53.9	V	3.0	44.4	37.0	1.0	-45.5	-13.0	-32.5	
10.398	-67.1	V	3.0	55.6	37.1	1.0	-47.6	-13.0	-34.6	
HI Ch. (1753.75 MHz)										
3.508	-62.7	H	3.0	44.5	37.0	1.0	-54.3	-13.0	-41.3	
10.524	-63.9	H	3.0	56.0	37.0	1.0	-43.9	-13.0	-30.9	
3.508	-62.9	V	3.0	44.5	37.0	1.0	-54.3	-13.0	-41.3	
10.524	-61.9	V	3.0	55.7	37.0	1.0	-42.2	-13.0	-29.2	

Rev. 03.03.09

7.3. RECEIVER SPURIOUS EMISSIONS

LIMIT

RSS-Gen 7.2.2

Spurious Emission Limits for Receivers:


Spurious Frequency (MHz)	Field Strength (microvolts/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960	500

TEST PROCEDURE


The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (local oscillator frequency, intermediate frequency or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable and local oscillator frequencies.

RESULTS

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

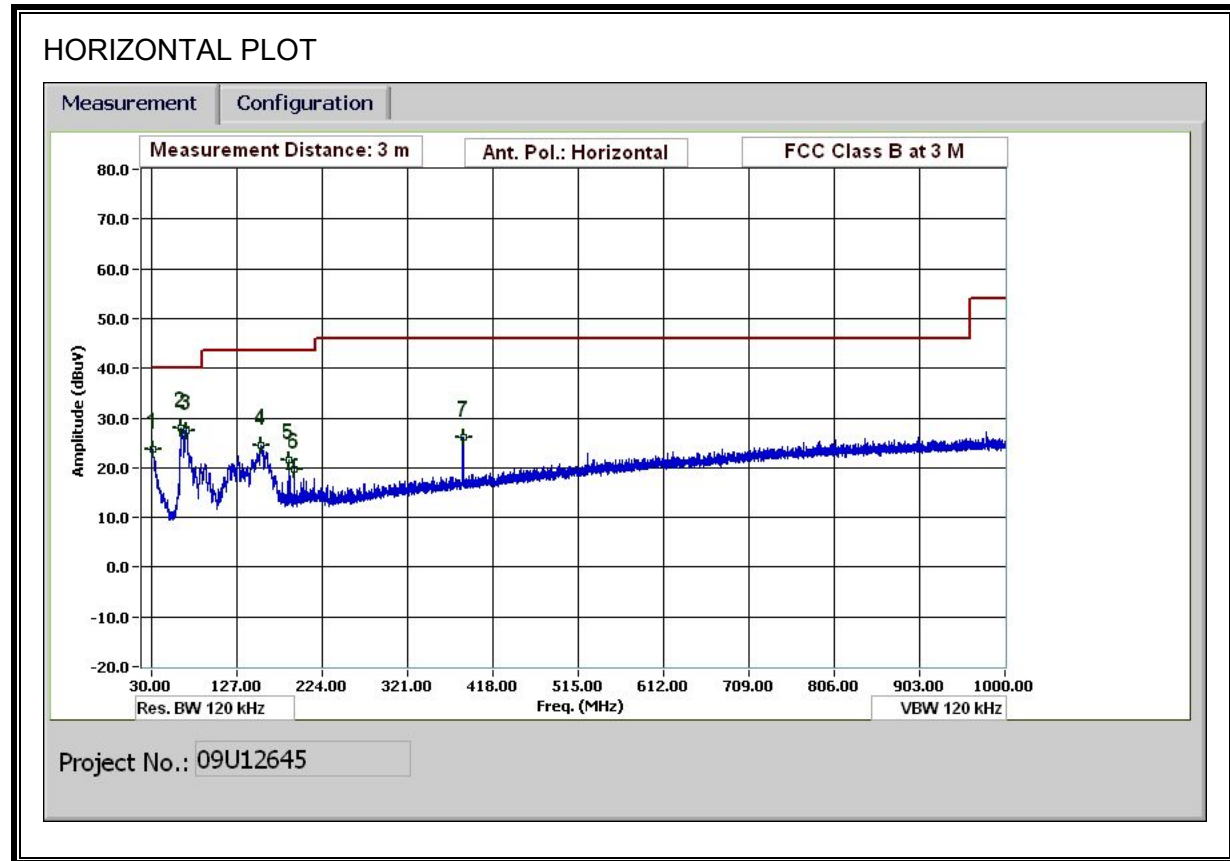

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

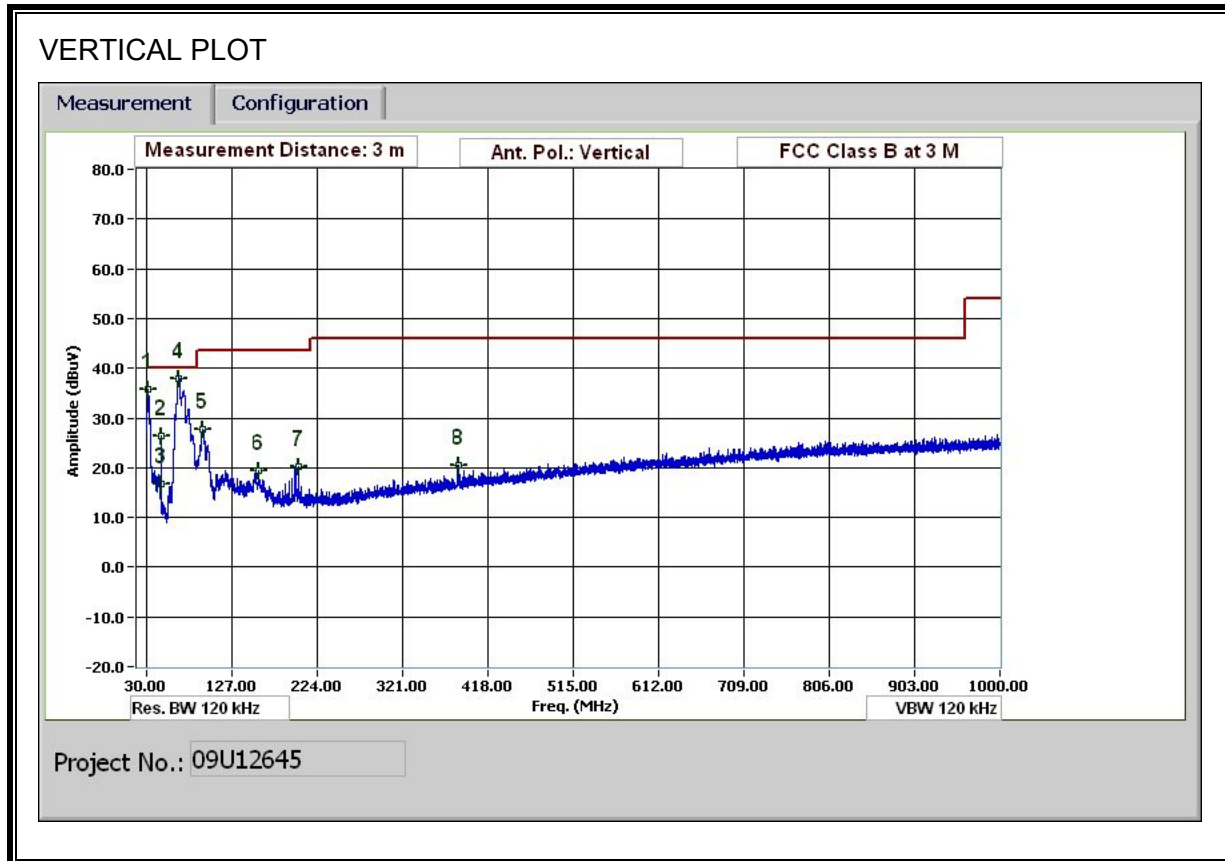

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL AND VERTICAL DATA

30-1000MHz Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Mengistu Mekuria
 Date: 02/12/09
 Project #: 09U12645
 Company: Kyocera Wireless
 EUT Description: Tri-Band Cell Phone with Bluetooth
 EUT M/N: kK50-03
 Test Target: FCC Class B
 Mode Oper: Normal Mode

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters
 Read Analyzer Reading Filter Filter Insert Loss
 AF Antenna Factor Corr Calculated Field Strength
 CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Notes
31.560	3.0	44.2	19.4	0.5	28.4	0.0	0.0	35.7	40.0	-4.3	V	
46.201	3.0	44.0	10.2	0.6	28.4	0.0	0.0	26.4	40.0	-13.6	V	
47.281	3.0	34.9	9.7	0.6	28.4	0.0	0.0	16.8	40.0	-23.2	V	
66.722	3.0	57.6	8.0	0.7	28.4	0.0	0.0	38.0	40.0	-2.0	V	
93.963	3.0	46.7	8.5	0.9	28.3	0.0	0.0	27.8	43.5	-15.7	V	
157.445	3.0	34.6	11.9	1.1	28.3	0.0	0.0	19.4	43.5	-24.1	V	
202.687	3.0	35.2	12.0	1.3	28.2	0.0	0.0	20.3	43.5	-23.2	V	
384.015	3.0	32.2	14.7	1.8	28.1	0.0	0.0	20.6	46.0	-25.4	V	
31.320	3.0	32.0	19.5	0.5	28.4	0.0	0.0	23.6	40.0	-16.4	H	
63.841	3.0	47.8	8.0	0.7	28.4	0.0	0.0	28.1	40.0	-11.9	H	
69.122	3.0	47.0	8.0	0.7	28.4	0.0	0.0	27.5	40.0	-12.5	H	
154.805	3.0	39.5	12.2	1.1	28.3	0.0	0.0	24.5	43.5	-19.0	H	
186.126	3.0	37.2	11.3	1.2	28.2	0.0	0.0	21.4	43.5	-22.1	H	
192.007	3.0	35.1	11.5	1.2	28.2	0.0	0.0	19.6	43.5	-23.9	H	
384.015	3.0	37.8	14.7	1.8	28.1	0.0	0.0	26.2	46.0	-19.9	H	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

SPURIOUS EMISSIONS ABOVE 1000 MHz (WORST-CASE CONFIGURATION)

No emissions were detected for receiver above 1 GHz.

7.4. POWER LINE CONDUCTED EMISSION

LIMIT

RSS-Gen 7.2.2

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radio communication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

Table 2 – AC Power Lines Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

RESULTS

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Class	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.17	48.88	--	26.74	0.00	65.06	55.06	-16.18	-28.32	L1
0.74	41.65	--	25.59	0.00	56.00	46.00	-14.35	-20.41	L1
3.64	44.37	--	24.47	0.00	56.00	46.00	-11.63	-21.53	L1
0.29	38.76	--	21.78	0.00	60.67	50.67	-21.91	-28.89	L2
0.80	42.23	--	20.26	0.00	56.00	46.00	-13.77	-25.74	L2
3.80	43.33	--	20.01	0.00	56.00	46.00	-12.67	-25.99	L2
6 Worst Data									

LINE 1 RESULTS

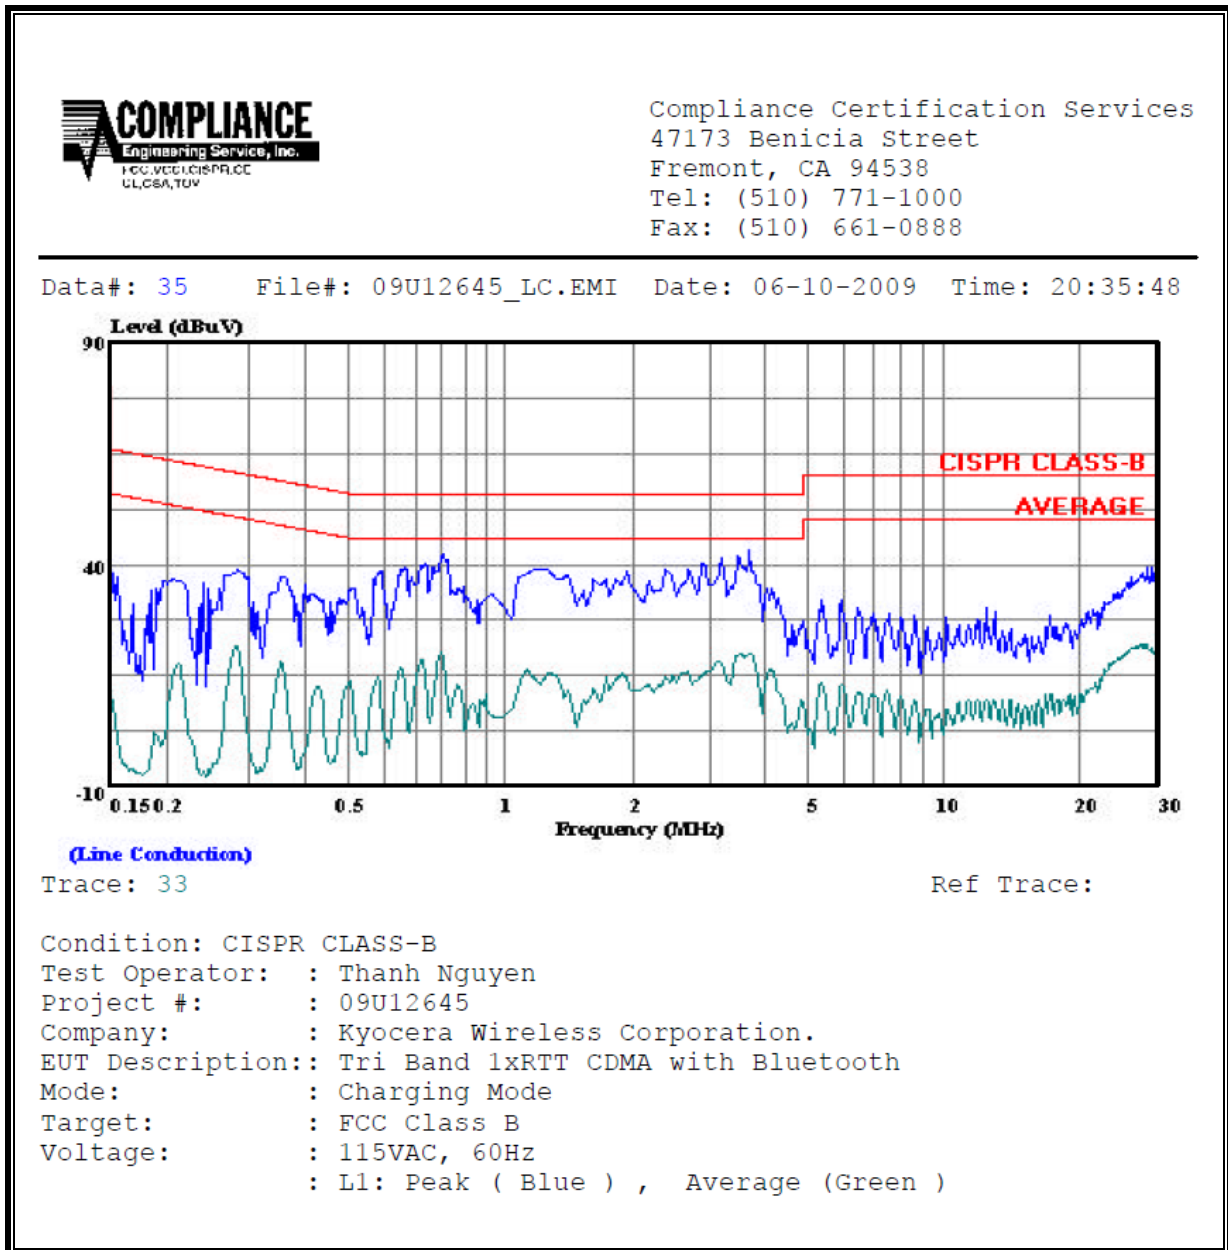


LINE 2 RESULTS



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 28 File#: 09U12645_LC.EMI Date: 06-10-2009 Time: 20:11:49

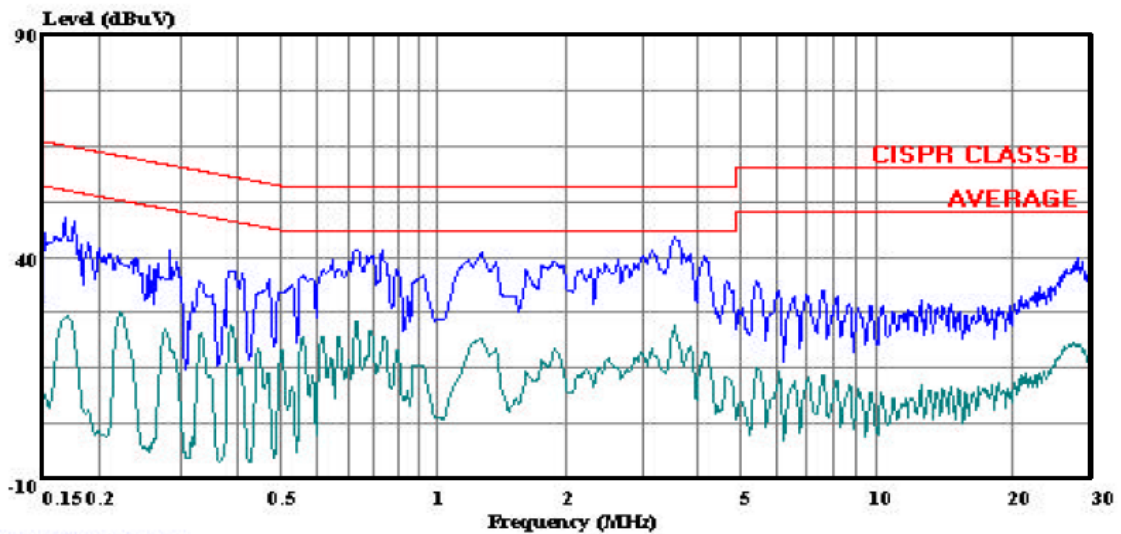

(Line Conduction)

Trace: 26

Ref Trace:

Condition: CISPR CLASS-B
Test Operator: : Thanh Nguyen
Project #: : 09U12645
Company: : Kyocera Wireless Corporation.
EUT Description: : Tri Band 1xRTT CDMA with Bluetooth
Mode: : Charging Mode
Target: : FCC Class B
Voltage: : 115VAC, 60Hz
: L2: Peak (Blue) , Average (Green)