

Test Report

From

Kyocera Wireless Corp

Dual-Band Tri-mode AMPS/CDMA Cellular Phone

FCC Part 22 & 24 Certification IC RSS-129 & 133	
FCC ID:	OVFKWC-3250
Model:	3250

STATEMENT OF CERTIFICATION

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the measurements of the sample's radio frequency interference emissions characteristics as of the dates and at the times of the test under the conditions herein specified.

Test performed by:	Kyocera Wireless Corp 10300 Campus Point Drive CA 92121
--------------------	---

Report Prepared by:	Vijay Parpia Engineer, Senior
---------------------	----------------------------------

Tests that required an OATS site were performed by TUV Product Services.

TABLE OF CONTENTS

1	General Information	3
2	Product Description	3
3	Electronic Serial Numbers (ESN) Protection	3
4	FCC Compliance Emergency 911	4
5	TTY compliance	4
6	Transmitter RF Power Output.....	4
6.1	Conducted Power.....	4
6.2	Radiated Power.....	5
7	Transmitter Modulation Requirement	6
7.1	Transmitter Audio Frequency Response	6
7.2	Transmitter Modulation Deviation Limiting.....	8
8	Occupied Bandwidth.....	9
9	Block Edge Compliance.....	23
9.1	CDMA 1900 Mode	24
9.2	CDMA 800 Mode	31
9.3	AMPS Mode	36
10	Spurious Emissions At Antenna Terminals.....	41
11	Transmitter Radiated Spurious Emissions Measured Data.....	57
12	Receiver Spurious Emissions	57
13	Transmitter RF Carrier Frequency Stability	58
13.1	AMPS Mode	58
13.2	CDMA 800 Mode	59
13.3	CDMA 1900 Mode	60
14	Exposure of Humans to RF Fields (SAR).....	61
15	Test Equipment	61

1 General Information

Applicant:	Kyocera Wireless Corp 10300 Campus Point Drive San Diego CA 92121			
FCC ID:	OVFKWC-3250			
Product:	Dual-Band Tri-mode Cellular Phone			
Model Number:	3250			
EUT Serial Number:	YJDY			
Type:	<input type="checkbox"/> Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production			
Device Category:	Portable			
RF Exposure Environment:	General Population / Uncontrolled			
Antenna:	Fixed Stubby			
Detachable Antenna:	Yes			
External Input:	Audio/Digital Data			
Quantity:	Quantity production is planned			
FCC Rule Parts:	§22H	§22H	§22.901(d)	§24E
Modes:	800 AMPS	800 CDMA	800 CDMA1X	1900 CDMA
Multiple Access Scheme:	FDMA	CDMA	CDMA	CDMA
TX Frequency (MHz):	824 - 849	824 – 849	824 – 849	1850 - 1910
Emission Designators:	40K0F8W, 40K0F1D, 1M25F9W			
Max. Output Power (W)	0.373 ERP	0.337 ERP		0.327 EIRP

2 Product Description

The phone model 3250 is a Tri-mode Dual-Band 1XRTT product that integrates Assisted GPS capability to meet the emergency location requirements of the FCC’s E911 Phase II mandate. The Tri-mode architecture is defined as 1900MHz (PCS CDMA), 800MHz (cellular CDMA and AMPS).

The phone is designed in compliance with the technical specifications for compatibility of mobile and base stations in the Cellular Radio telephone service contained in “Cellular System Mobile Station - Land Station Compatibility Specification” as specified in OET Bulletin 53 and TIA Standards

The phone integrates a third party proprietary software solution that uses existing CDMA and analog voice service options to allow group, 2-way voice “Push-To-Talk” interaction, and supports certain CDMA2000 radio-configurations (RC) as describes in Exhibit 1 (operation description).

3 Electronic Serial Numbers (ESN) Protection

The Tri-mode Phone (FCC ID: OVFKWC-3250) uses ESN. The ESN is a unique identification number to each phone which is contained in the Numeric Assignment Module and is automatically transmitted to the base station whenever a call is placed. The ESN is stored in an EPROM and is isolated from fraudulent contact and tampering. Any attempt to change the ESN will render the portable phone inoperative.

The phone complies with all requirements for ESN under Part 22.919.

4 FCC Compliance Emergency 911

FCC § 22.921

When an emergency 911 call is originated by the user, the mobile will attempt to acquire any available system and originate the emergency call on that system, disregarding restrictions set by the roaming list. The FCC NPRM WT99-13, CC94-102 automatic analog A/B roaming option has been implemented for 911 emergency calls. Note that the 3250 has Global Positioning System (GPS) support.

5 TTY compliance

FCC § 255 of the Telecom Act

3250 has been designed for TTY Compliance with Cellular Compatibility Standard.

6 Transmitter RF Power Output

6.1 Conducted Power

FCC: § 2.1046

IC: RSS-129 §7.1, RSS-133 §6.2

Measurement Procedures:

The RF output power was measured using a Giga-tronics 8541C Universal Power Meter and HP 8594E Spectrum Analyzer that has the CDMA personality option. Terminated to a resistive coaxial load of 50 ohms.

Mode	Frequency (MHz)	Channel	Power (dBm)
AMPS	824.04	991	25.08
	836.49	383	25.03
	848.97	799	25.02
CDMA 800	824.70	1013	24.53
	836.52	384	24.54
	848.31	777	24.57
CDMA 1900	1851.25	25	22.02
	1880.00	600	22.09
	1908.75	1175	22.10

6.2 Radiated Power


FCC: § 22.913, § 24.232	IC: RSS-129 §7.1 and §9.1, RSS-133 §6.2
--------------------------------	--

Measurement Procedures:

The EUT was positioned on a 2-axis non-conductive positioner inside a 10-meter anechoic chamber.

The EUT conducted power was set by the phone control software. During tests, the phone was rotated 360 degree in azimuth and elevation by an automated antenna measurement workstation. Maximum radiated power was recorded using a Giga-tronics 8541C Universal Power Meter. All measurement results are EIRP in dBm. For ERP, subtract 2.1 dB from the EIRP data.

Anechonic Chamber

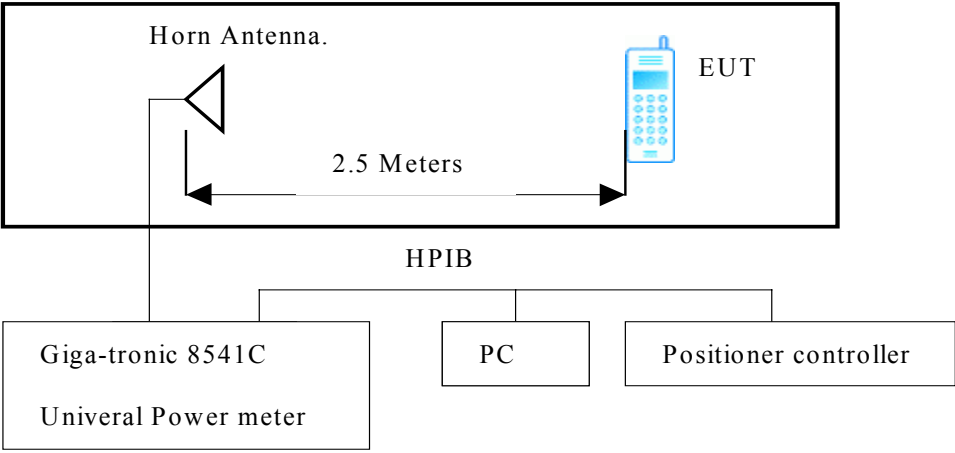

Mode	Frequency (MHz)	Channel	Max. Power (dBm)	Ref.
AMPS	824.04	991	25.34	ERP
	836.49	383	25.72	
	848.97	799	25.00	
CDMA 800	824.70	1013	24.71	ERP
	836.52	384	25.27	
	848.31	777	24.52	
CDMA 1900	1851.25	25	23.85	EIRP
	1880.00	600	24.39	
	1908.75	1175	25.15	

7 Transmitter Modulation Requirement

7.1 Transmitter Audio Frequency Response

FCC: § 2.1047, § 22.915	IC: RSS-129 §6.2
Measurement Procedures:	
Measured with HP8920 RF communication test set & HP 3588A spectrum analyzer.	
<ul style="list-style-type: none"> Operate the transmitter with the compressor disabled, and monitor the output with HP8920 test receiver without de-emphasis. Apply a sine wave audio input to the transmitter external audio input port, vary the modulating frequency from 100 to 3000 Hz, and observe the input levels necessary to maintain a constant ± 2.9 kHz system deviation. Adjust the audio input level to 20 dB greater than that required to produce ± 8 kHz deviation with 1 kHz tone. Vary the modulation frequency from 3 kHz to 30 kHz and observe the deviation while maintaining a constant audio input level. Use the audio spectrum analyzer to measure the output deviation at the same frequency as the input signal. 	


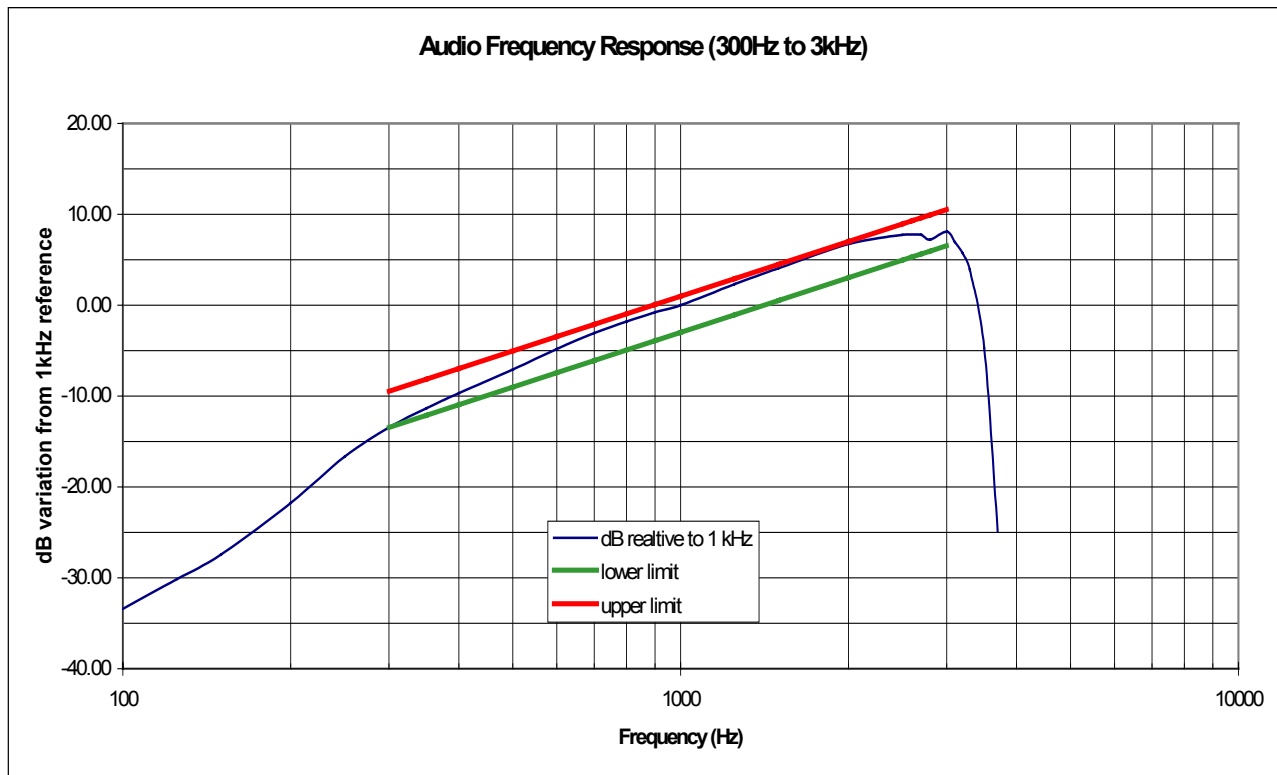


Figure 7.1 Audio Filter Characteristics (300-3000Hz)

Figure 7.2 Post Limiter Filter Attenuation

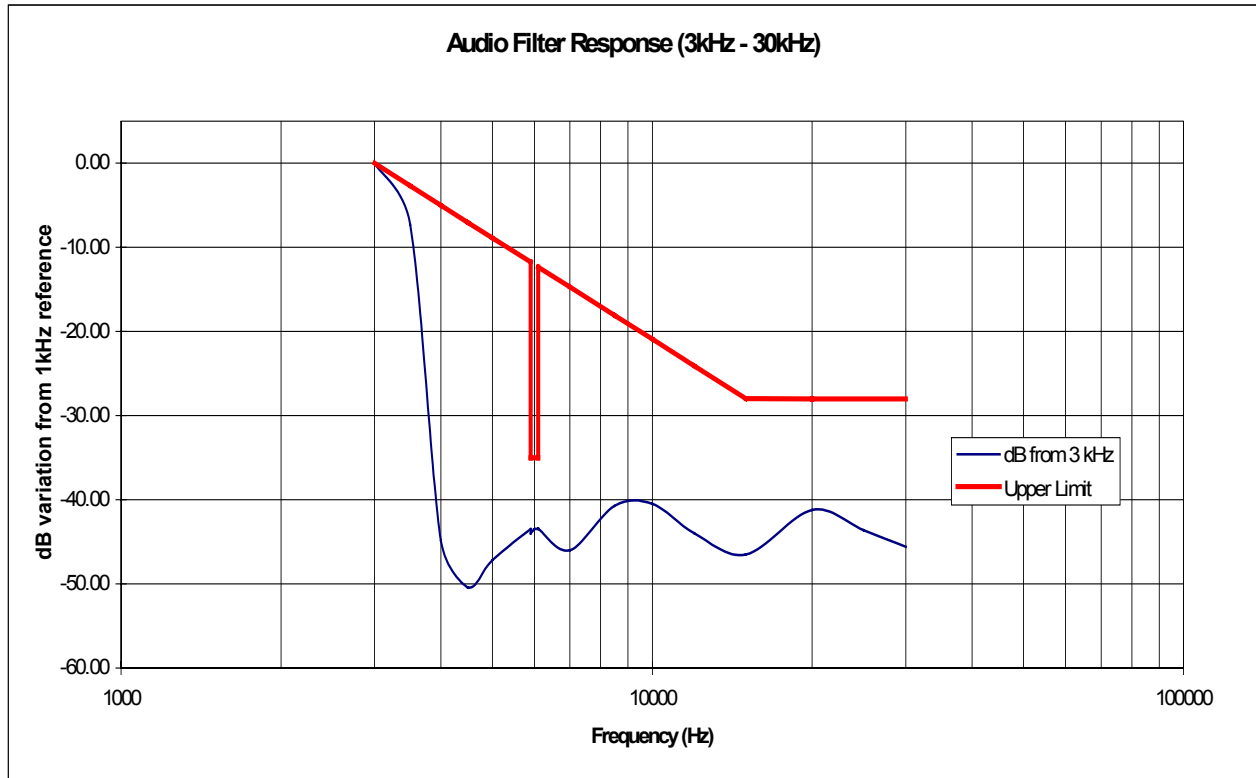

7.2 Transmitter Modulation Deviation Limiting

FCC: § 2.1047(b), § 22.915(b)(c)	IC: RSS-129 §6.1
Measurement Procedures:	
Measured with HP8920 RF communication test set as an audio signal generator.	
With the compressor enabled and the SAT disabled, and at three different modulating frequencies (300Hz, 1kHz and 3kHz), adjust the audio input level from -20 dB to +20 dB in reference to the level required to generate 8kHz deviation at 1KHz.	

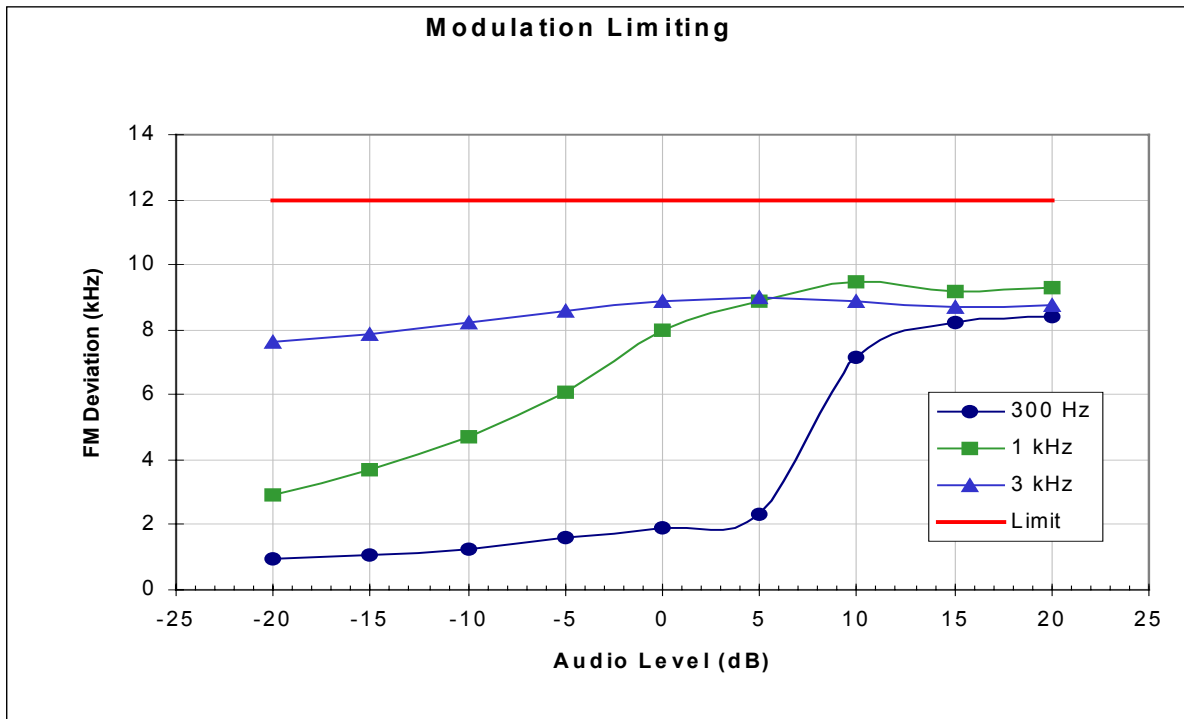


Figure 7.3 Modulation Deviation Limiting

8 Occupied Bandwidth

FCC: § 2.1049, § 22.917(b)(d), § 24.238	IC: RSS-129 §6.3, §8.1
<p>Measurement Procedures: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The spectrum with no modulation was recorded.</p> <p><u>For Analog:</u> The audio input signal was adjusted to as followings: (1) For combined voice and SAT, disable the compressor, modulate with a 2500 Hz sine wave 13.5 dB greater than that required to produce ± 8 kHz peak deviation at 1000 Hz and a 6000 Hz SAT with ± 2.0 kHz peak deviation. (2) For combined Signaling Tone and SAT, modulate with a 10 kHz ST with ± 8 kHz peak deviation and a 6000 Hz SAT with ± 2.0 kHz peak deviation. (3) For wideband data, modulate with a quasi-random 10 kbps data pattern with ± 8 kHz peak deviation. (4) For voice only, disable the compressor, modulate with a 2500 Hz sine wave 13.5 dB greater than that required to produce ± 8 kHz peak deviation at 1000 Hz. (5) For SAT only, modulate with a 6000 Hz SAT with ± 2.0 kHz peak deviation. (6) For ST only, modulate with a 10 kHz ST with ± 8 kHz peak deviation. (7) For combined SAT and DTMF, modulate with a 6000 Hz SAT with ± 2.0 kHz peak deviation and one of the DTMF tones. All measurements were performed on middle channel.</p> <p><u>For Digital:</u> Modulate with full rate.</p>	

List of Figures

Figure	Mode	Description
8-1	AMPS	Voice
8-2		SAT
8-3		Voice + SAT
8-4		ST
8-5		SAT+ST
8-6		SAT + DTMF_9
8-7		10kb Wideband Data
8-8	CDMA 800	CDMA at RC1
8-9		CDMA 1X, F/R-FCH at RC3
8-10		CDMA 1X, F/R-FCH + F/R-SCH at RC3
8-11	CDMA 1900	CDMA at RC1
8-12		CDMA 1X, F/R-FCH at RC3
8-13		CDMA 1X, F/R-FCH + F/R-SCH at RC3

Figure 8-1 AMPS Voice

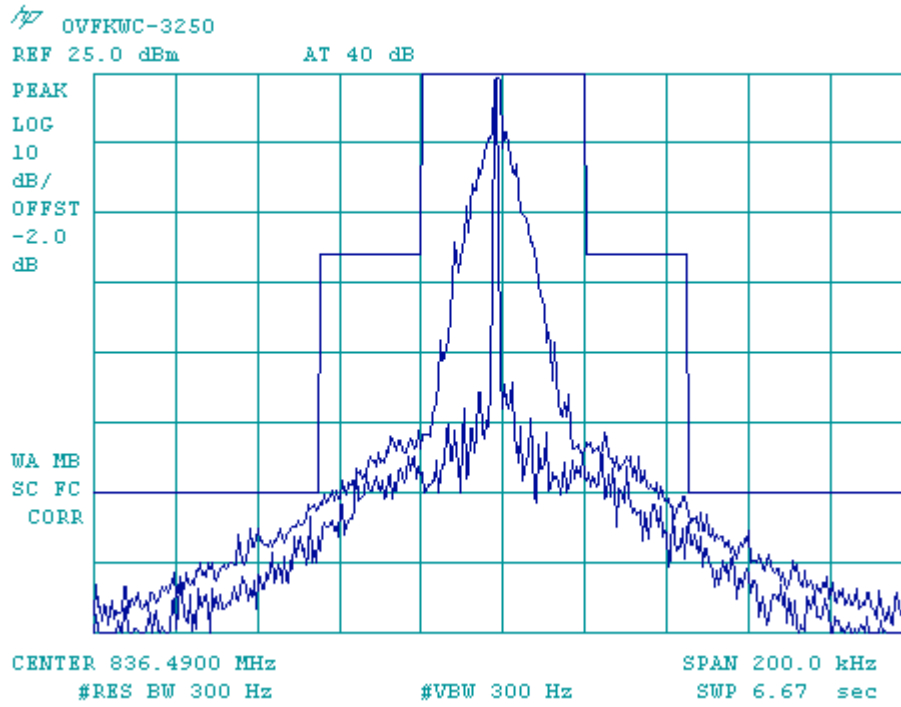


Figure 8-2 AMPS SAT

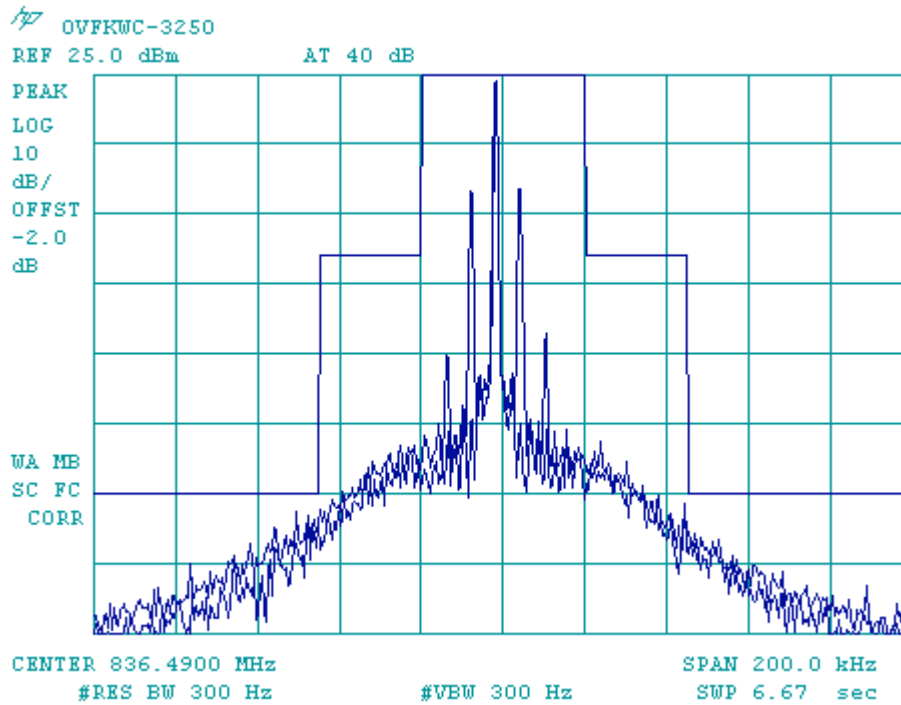


Figure 8-3 AMPS Voice + SAT

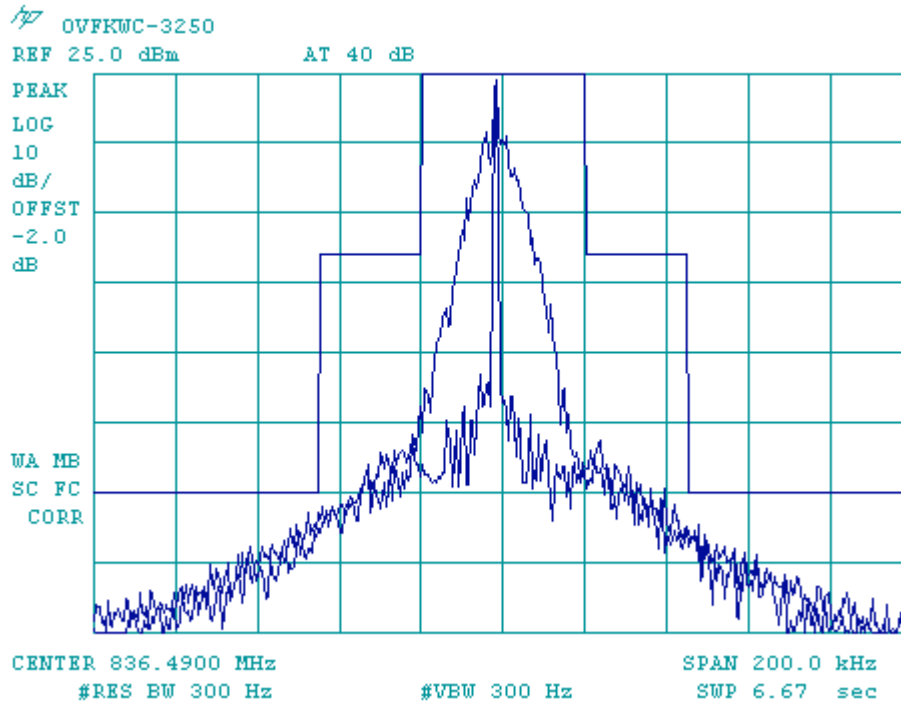


Figure 8-4 AMPS ST

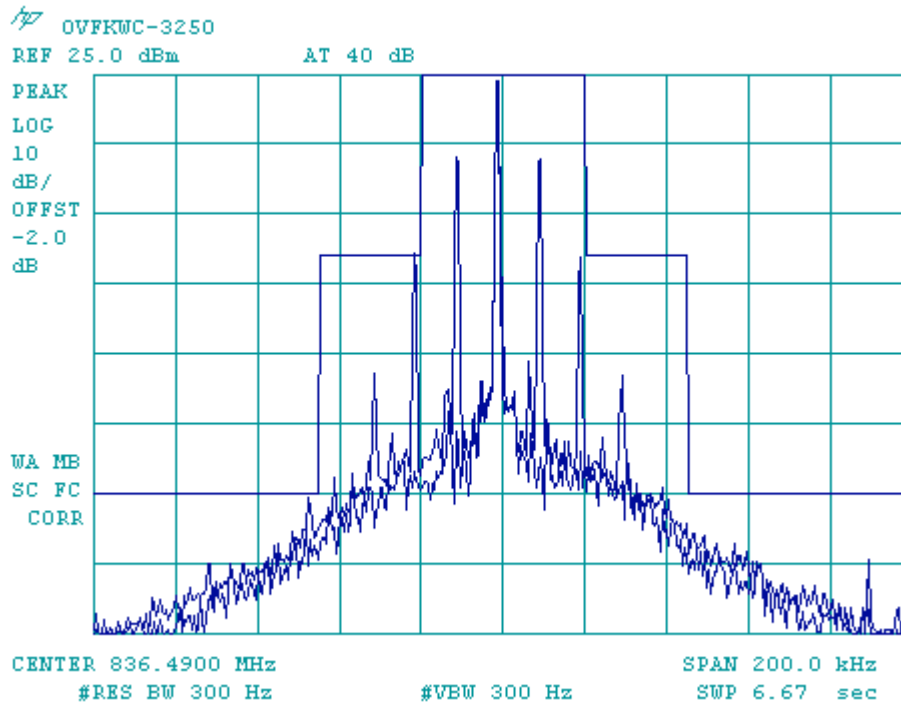


Figure 8-5 AMPS ST + SAT

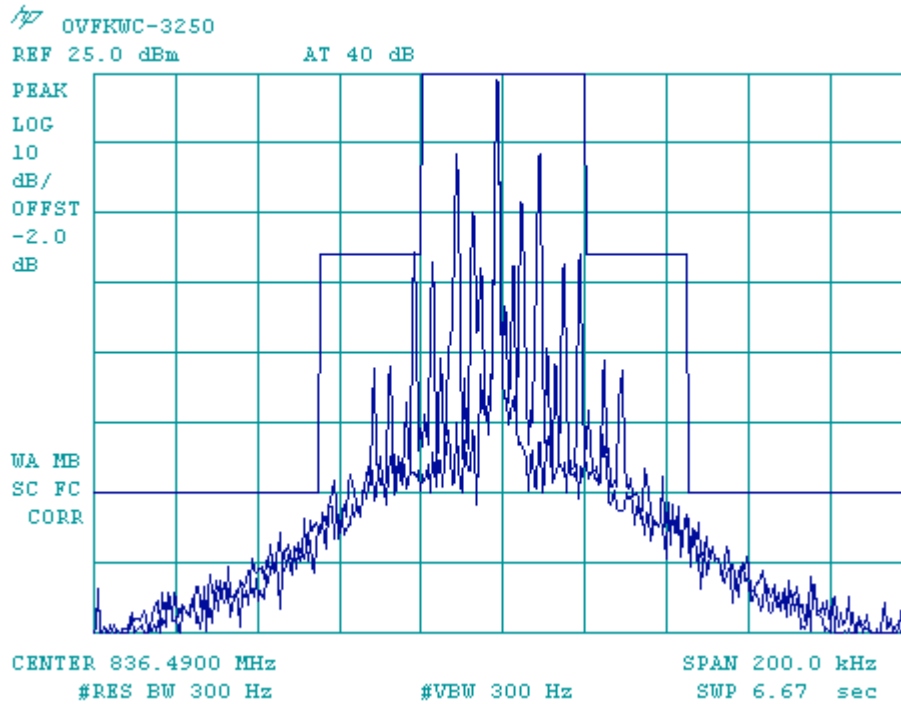


Figure 8-6 SAT + DTMF_9

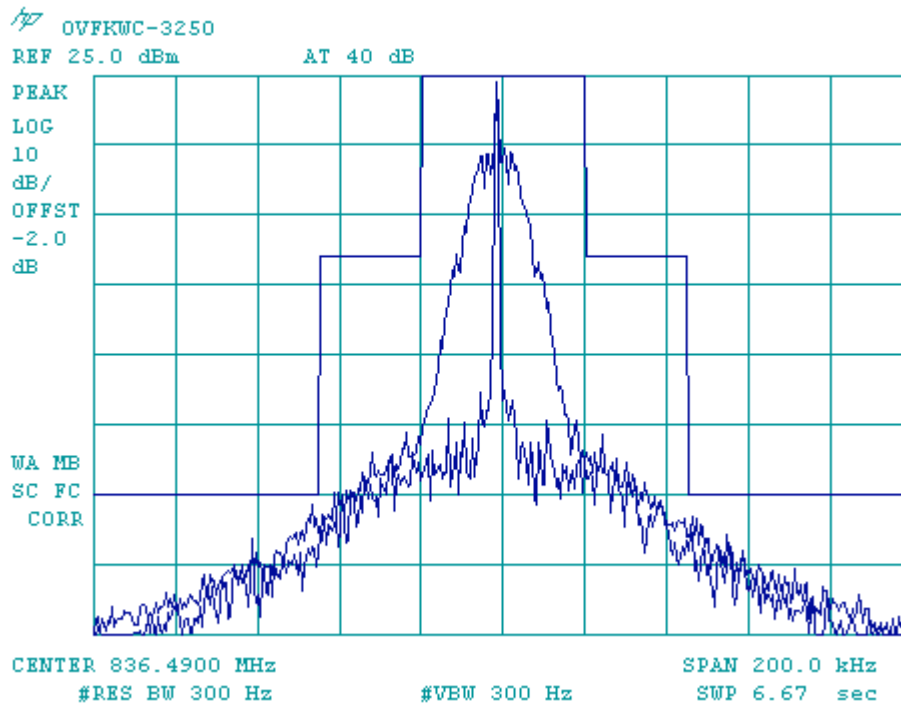


Figure 8-7 AMPS WIDEBAND

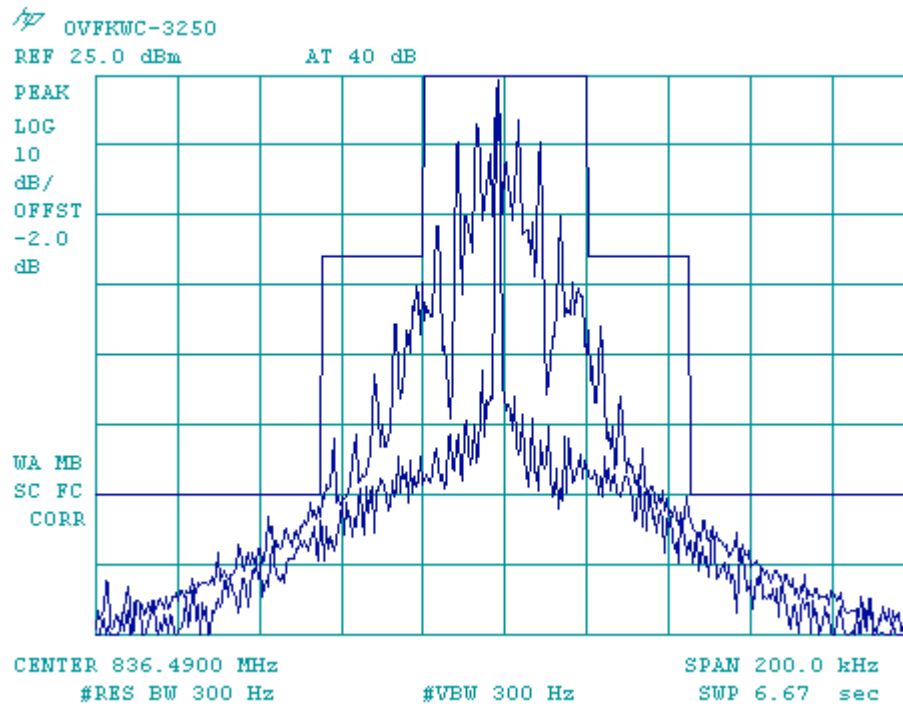


Figure 8-8 CDMA 800 at RC1

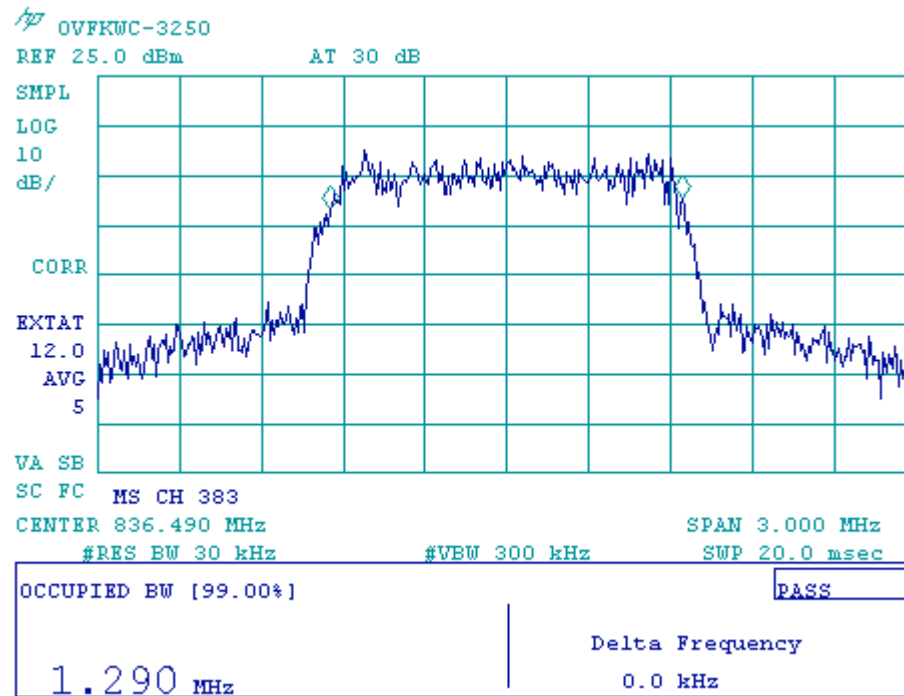


Figure 8-9a CDMA 800 1X at RC3 (F/R-FCH)

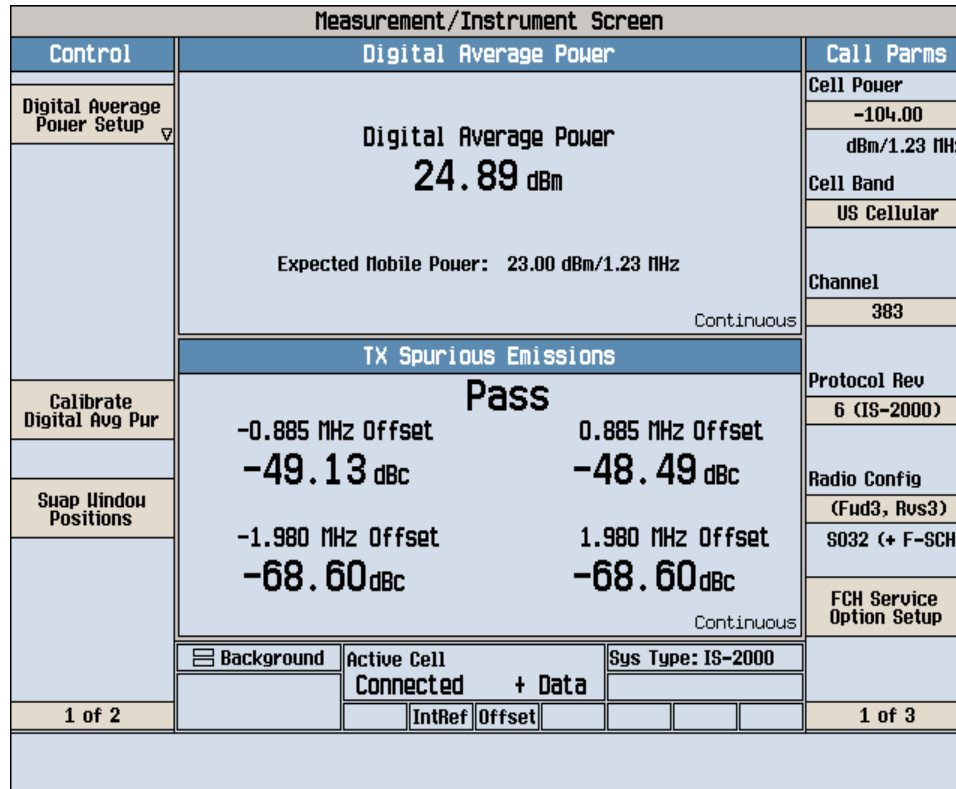


Figure 8-9b CDMA 800 1X at RC3 (F/R-FCH)

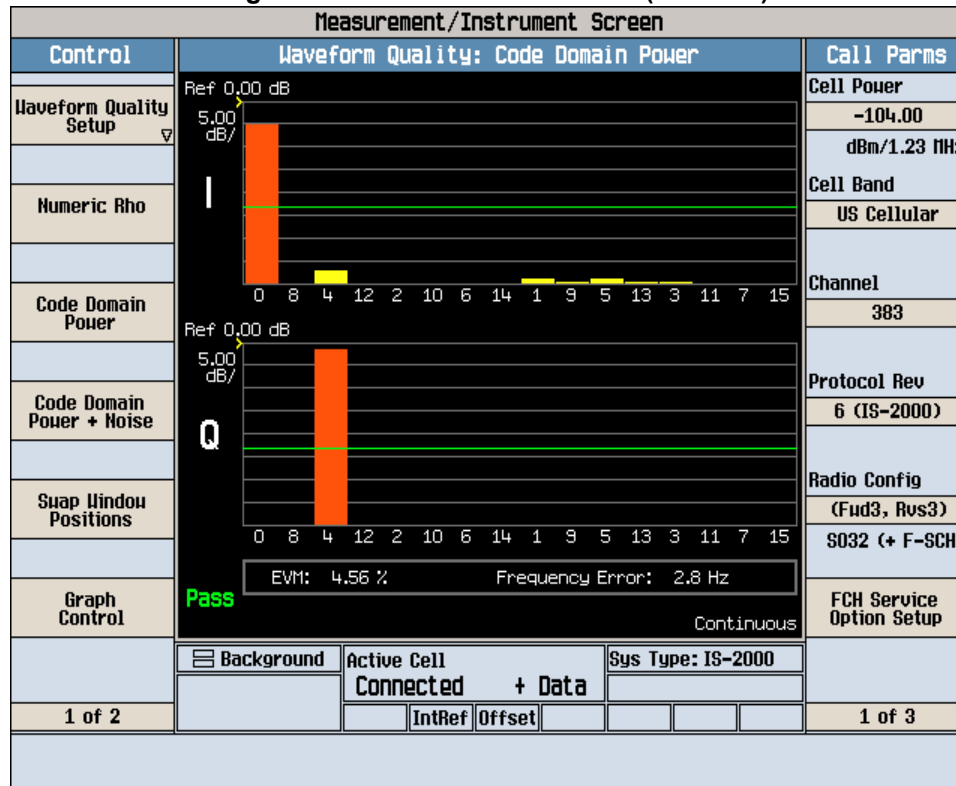


Figure 8-9c CDMA 800 1X at RC3 (F/R-FCH)

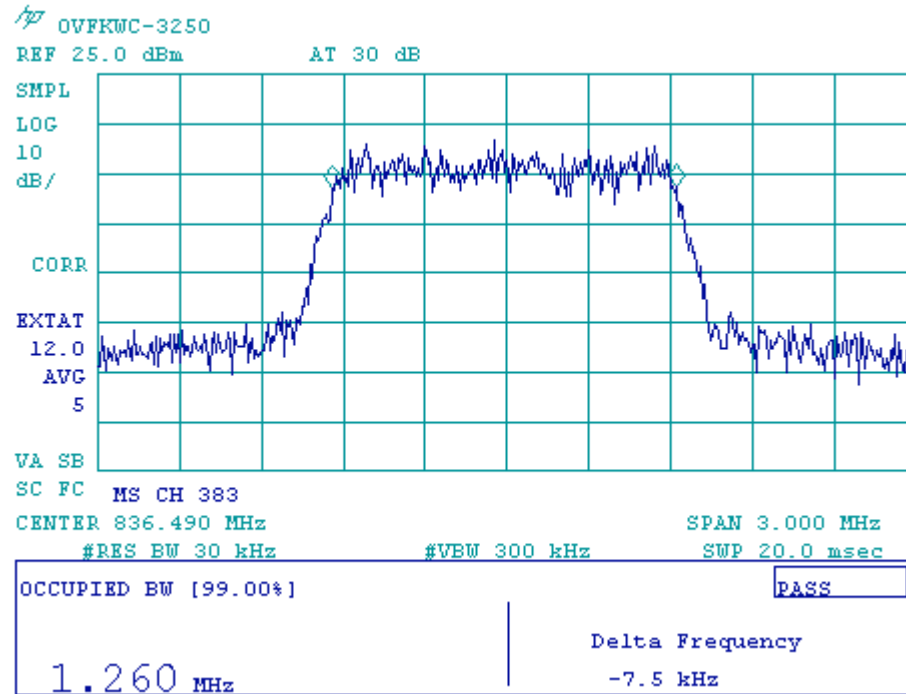


Figure 8-10a CDMA 800 1X at RC3 (F/R-FCH + F/R-SCH)

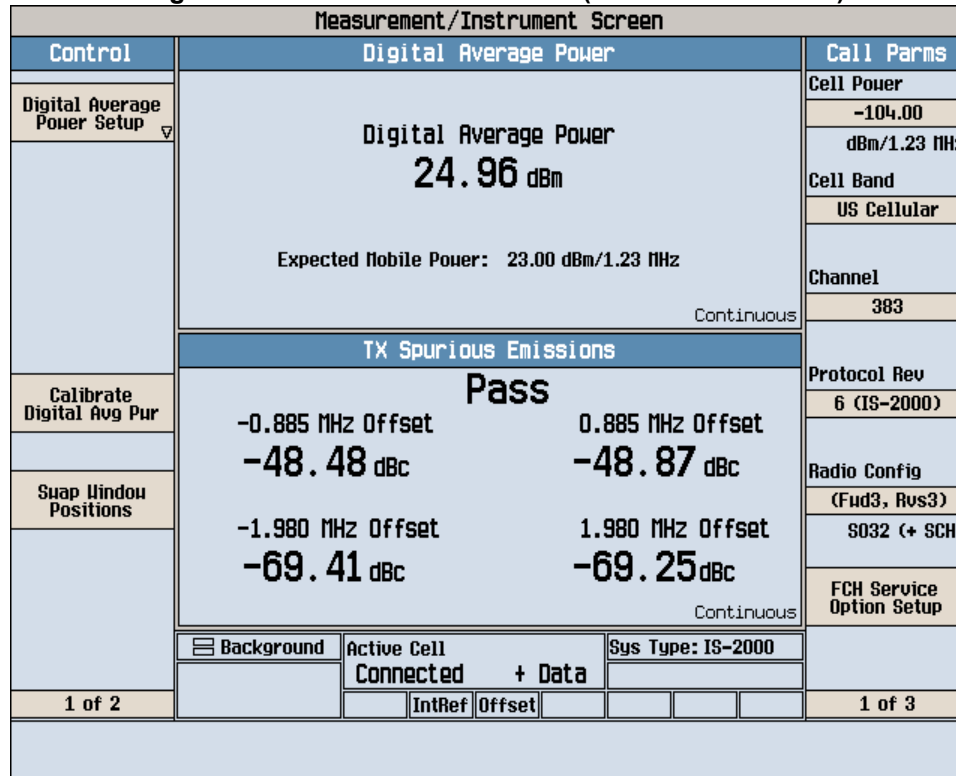


Figure 8-10b CDMA 800 1X at RC3 (F/R-FCH + F/R-SCH)

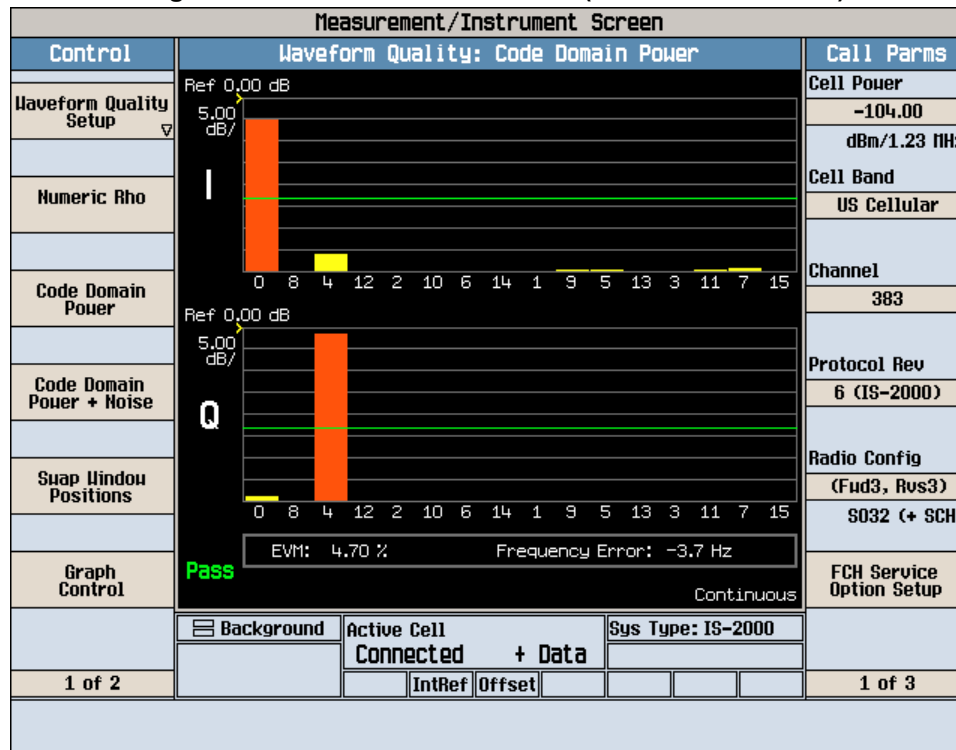


Figure 8-10c CDMA 800 1X at RC3 (F/R-FCH + F/R-SCH)

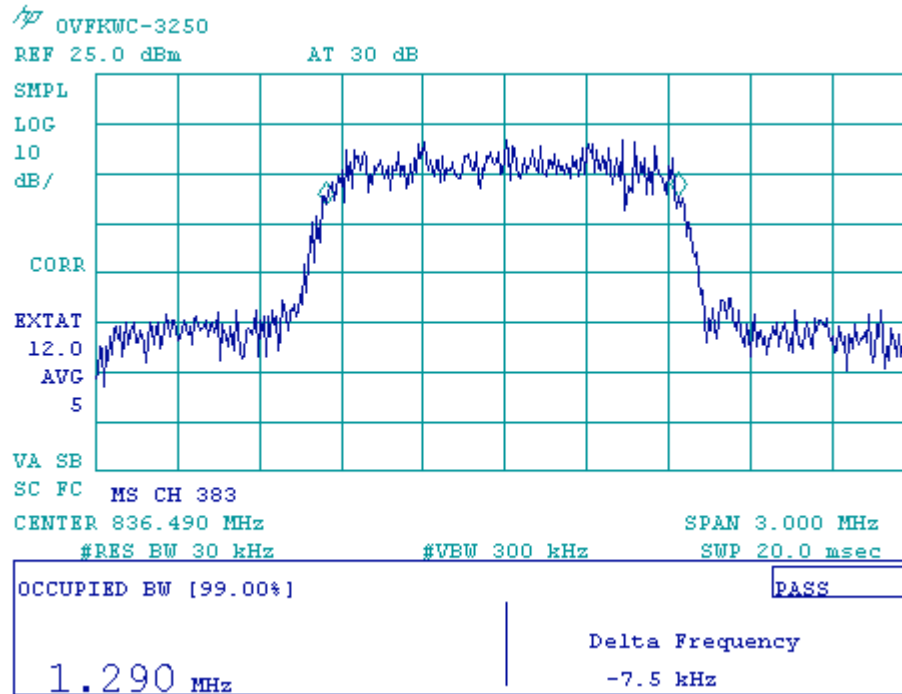


Figure 8-11 CDMA 1900 at RC1

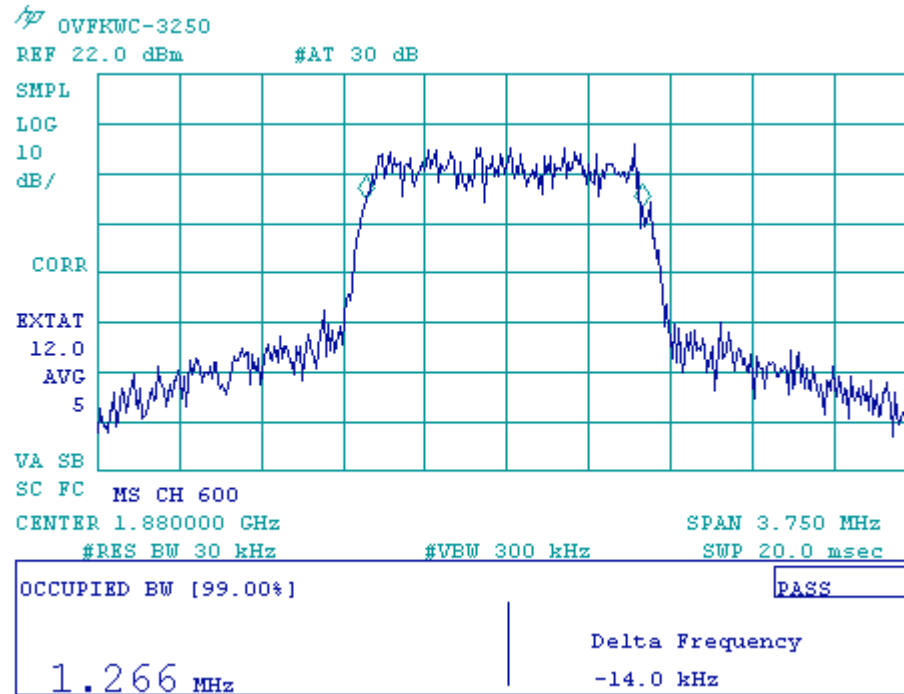


Figure 8-12a CDMA 1900 1X at RC3 (F/R-FCH)

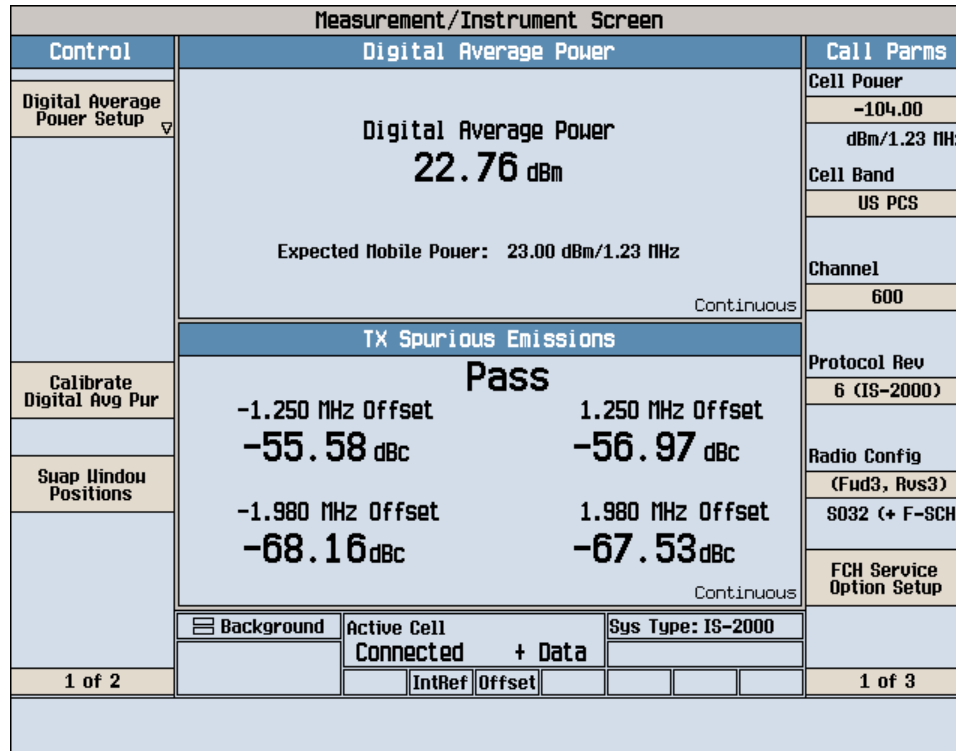


Figure 8-12b CDMA 1900 1X at RC3 (F/R-FCH)

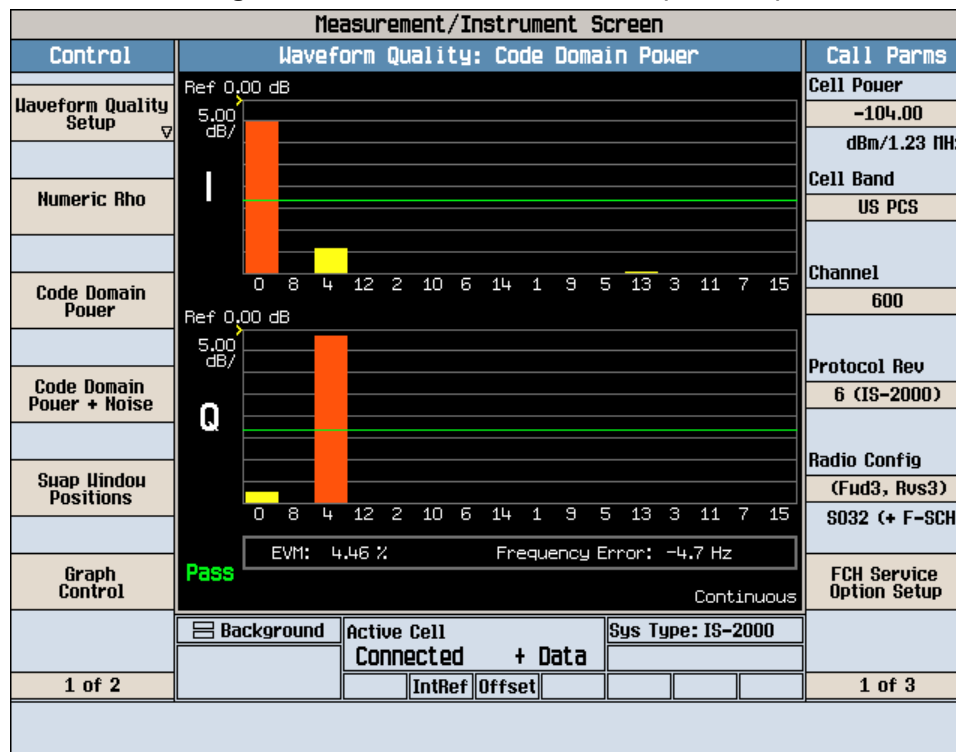


Figure 8-12c CDMA 1900 1X at RC3 (F/R-FCH)

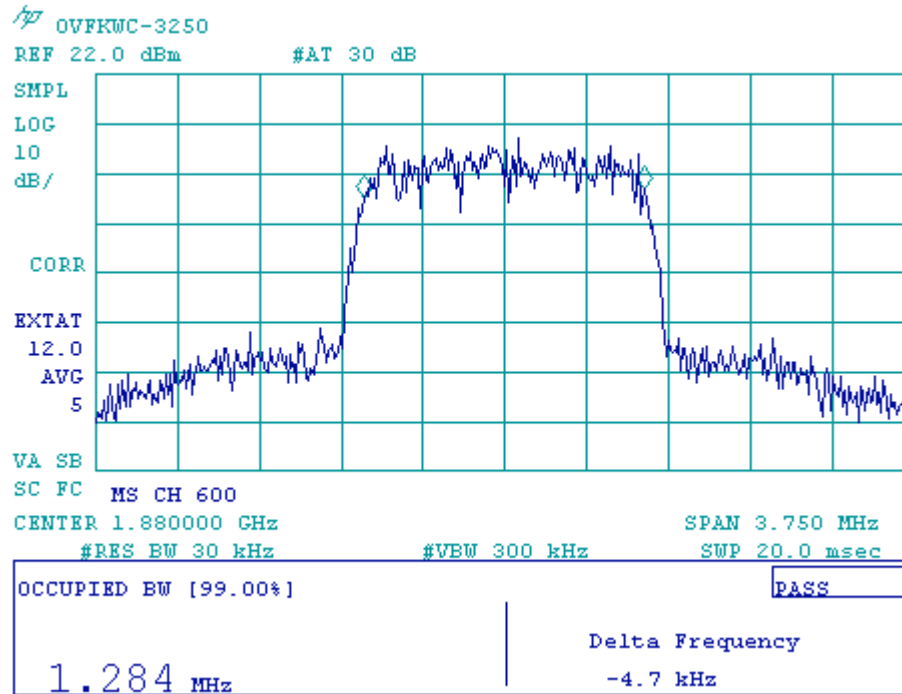


Figure 8-13a CDMA 1900 1X at RC3 (F/R-FCH + F/R-SCH)

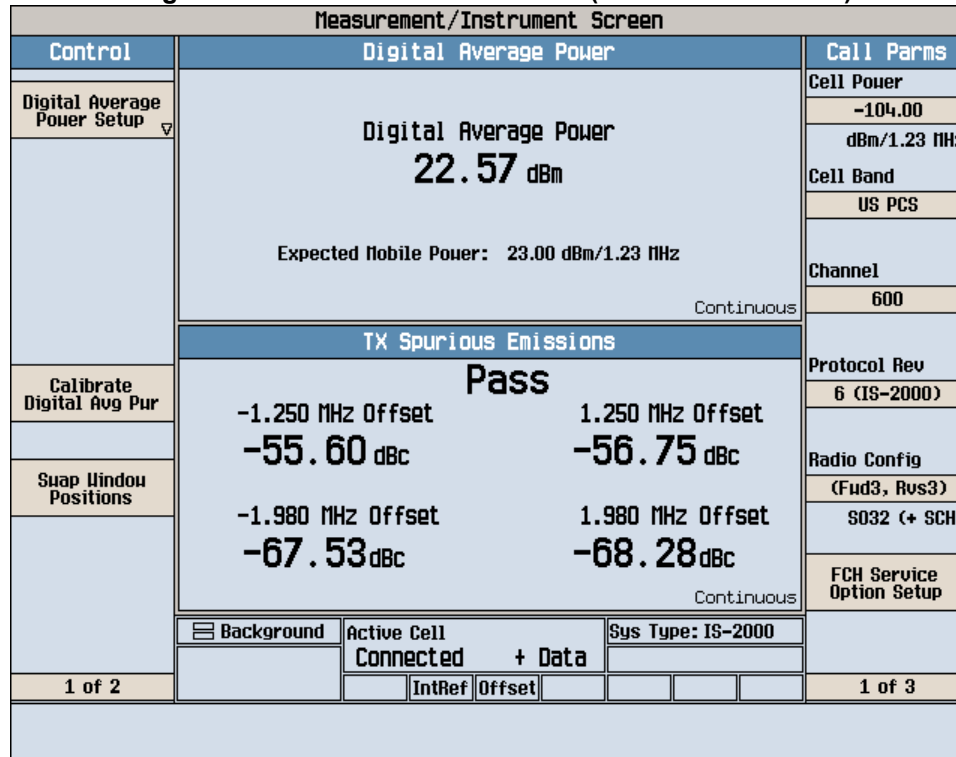


Figure 8-13b CDMA 1900 1X at RC3 (F/R-FCH + F/R-SCH)


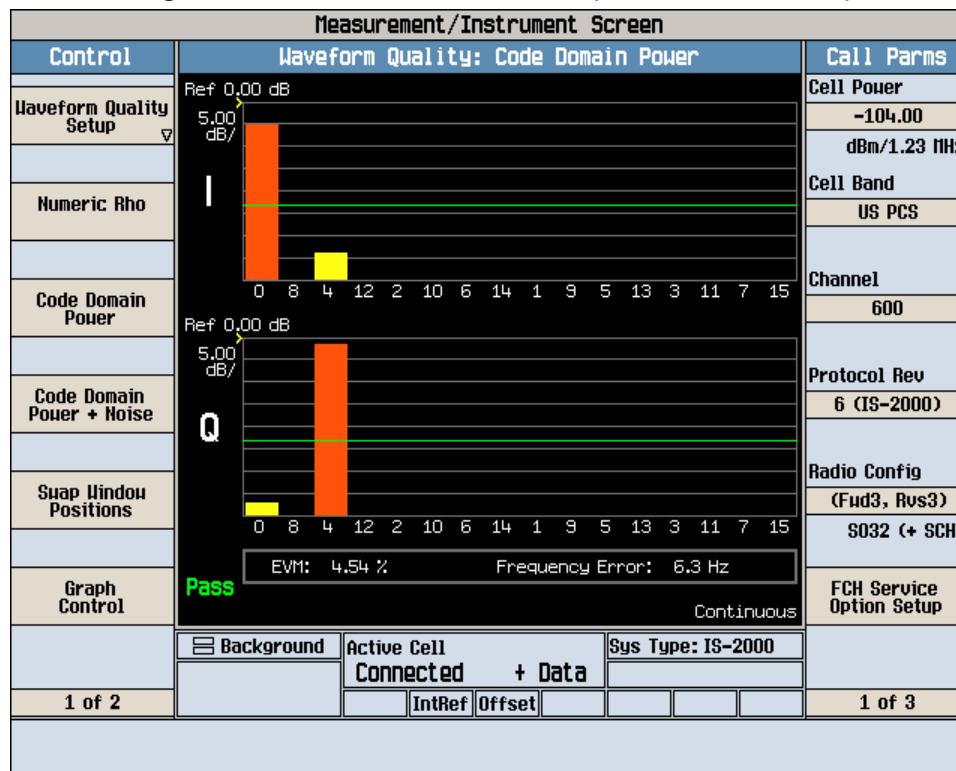


Figure 8-13c CDMA 1900 1X at RC3 (F/R-FCH + F/R-SCH)

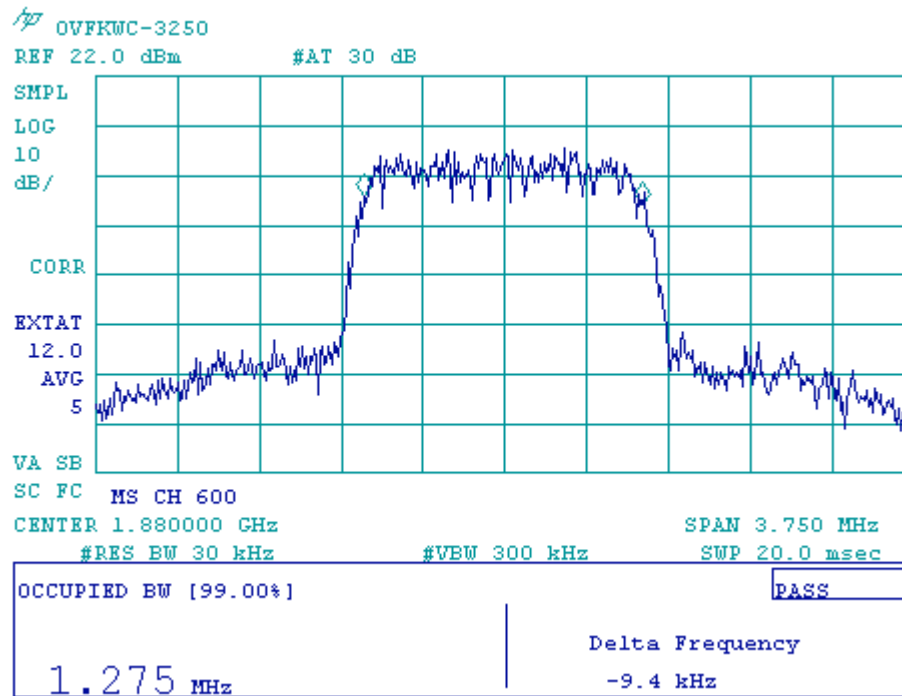

9 Block Edge Compliance

9.1 CDMA 1900 Mode

FCC: § 24.238a	IC: RSS-133 §6.3
Measurement Procedures: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. During tests, the EUT was modulated with full rate.	

List of Figures

Figure	Mode	Description
9.1-1	CDMA 1900	Block A Lower edge, Channel 25
9.1-2		Block A Upper edge, Channel 275
9.1-3		Block D Lower edge, Channel 325
9.1-4		Block D Upper edge, Channel 375
9.1-5		Block B Lower edge, Channel 425
9.1-6		Block B Upper edge, Channel 675
9.1-7		Block E Lower edge, Channel 725
9.1-8		Block E Upper edge, Channel 775
9.1-9		Block F Lower edge, Channel 825
9.1-10		Block F Upper edge, Channel 875
9.1-11		Block C Lower edge, Channel 925
9.1-12		Block C Upper edge, Channel 1175

Figure 9.1-1 Block A Lower edge, Channel 25

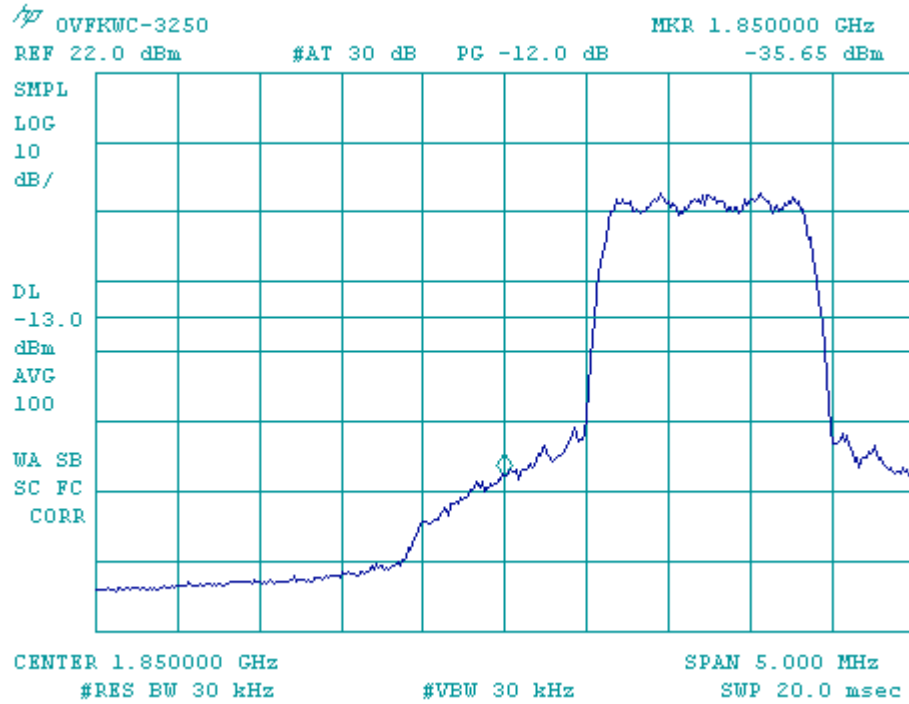


Figure 9.1-2 Block A Upper edge, Channel 275

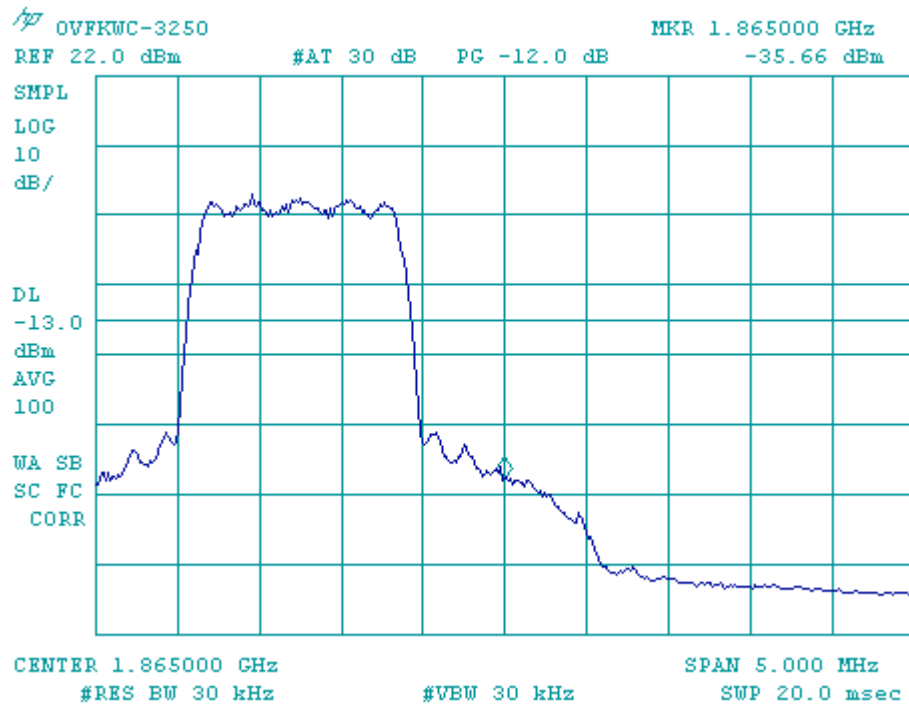


Figure 9.1-3 Block D Lower edge, Channel 325

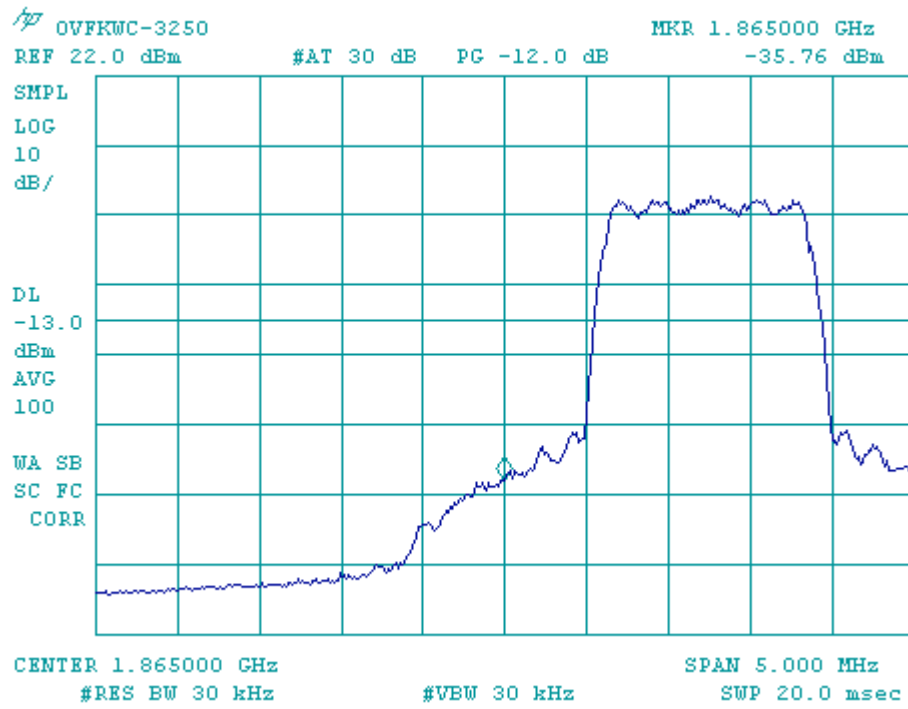


Figure 9.1-4 Block D Upper edge, Channel 375

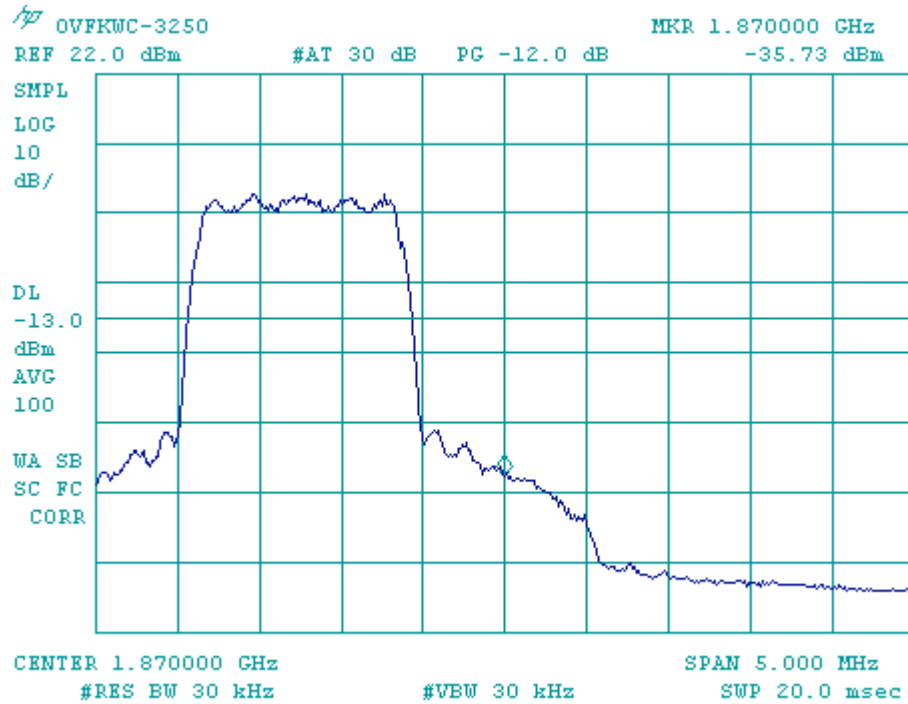


Figure 9.1-5 Block B Lower edge, Channel 425

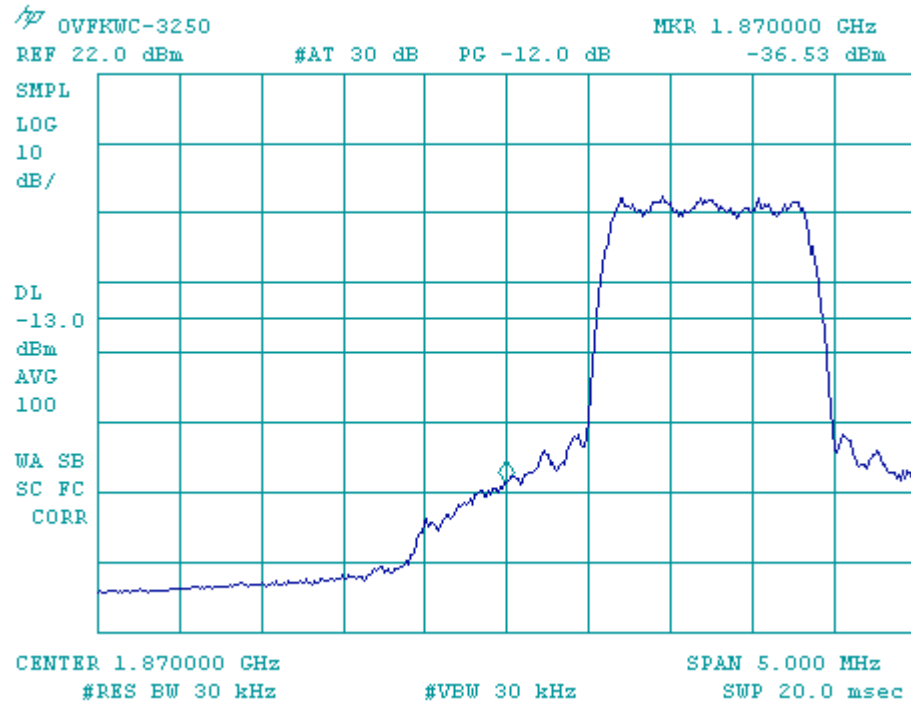


Figure 9.1-6 Block B Upper edge, Channel 675

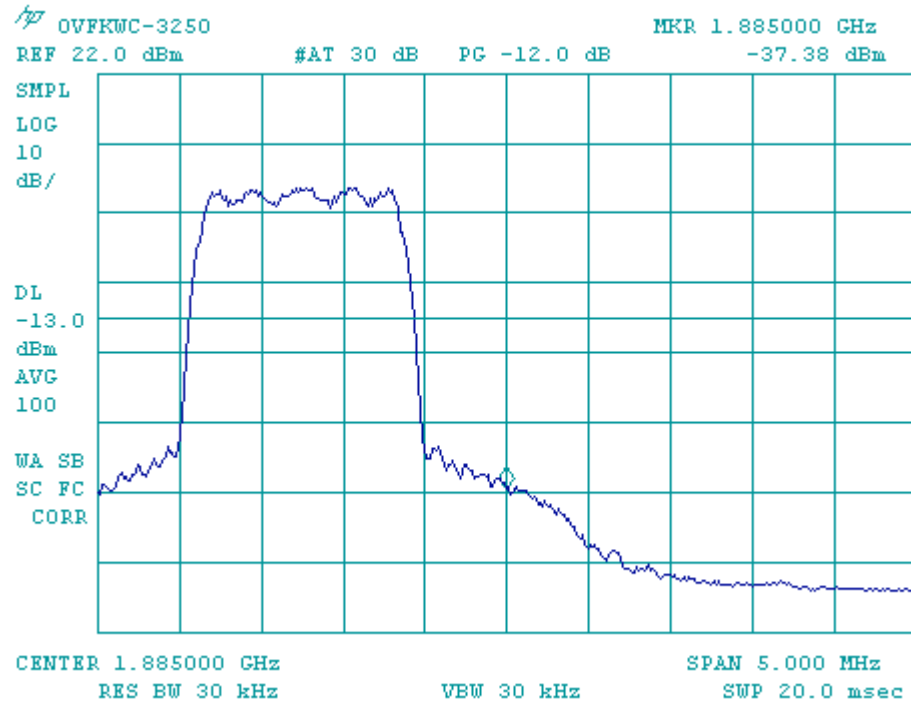


Figure 9.1-7 Block E Lower edge, Channel 725

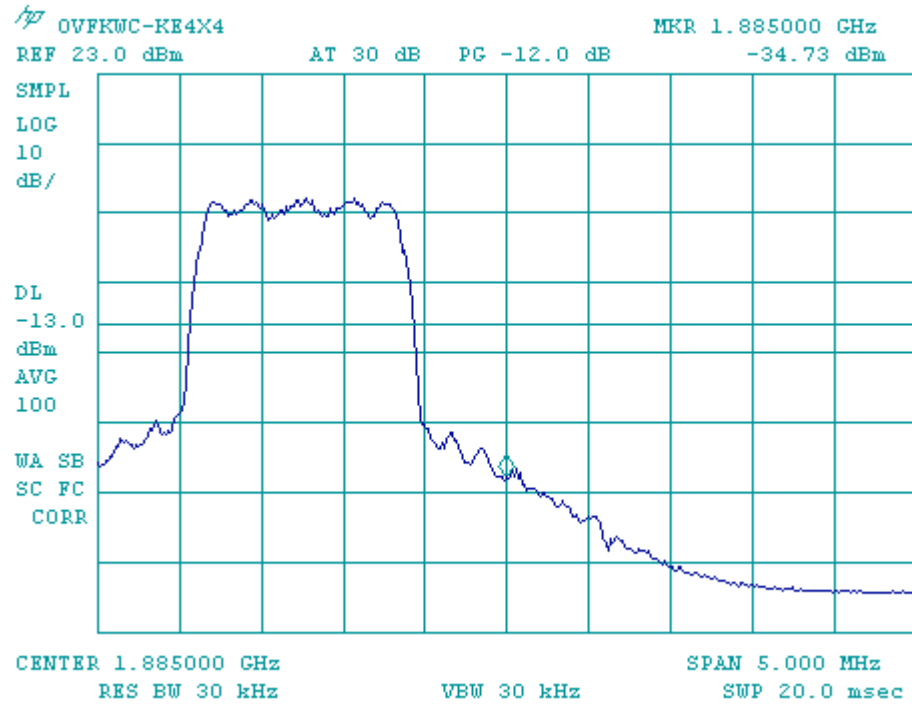


Figure 9.1-8 Block E Upper edge, Channel 775

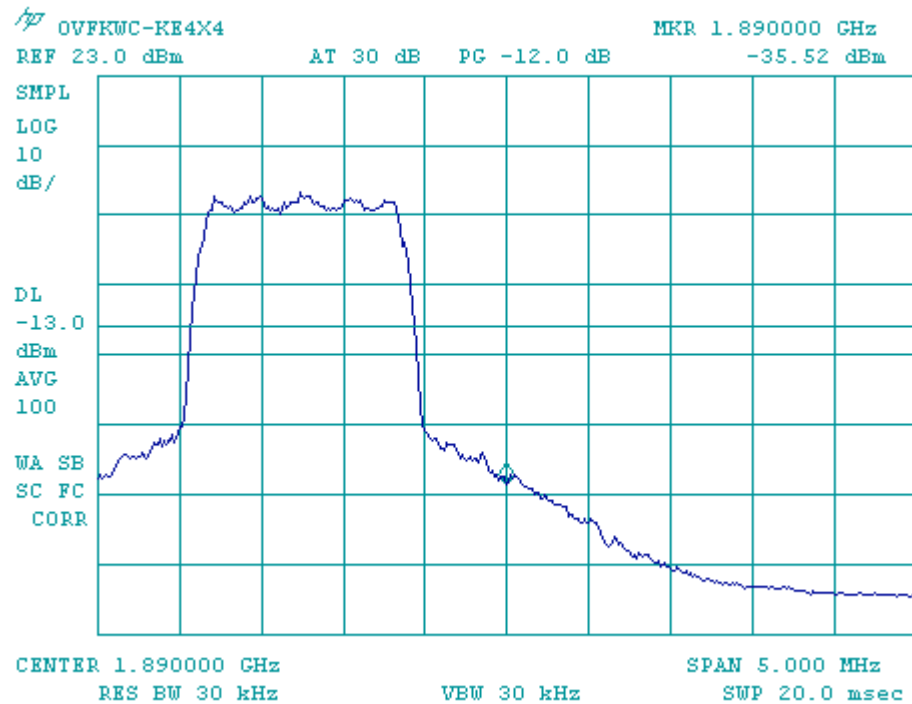


Figure 9.1-9 Block F Lower edge, Channel 825

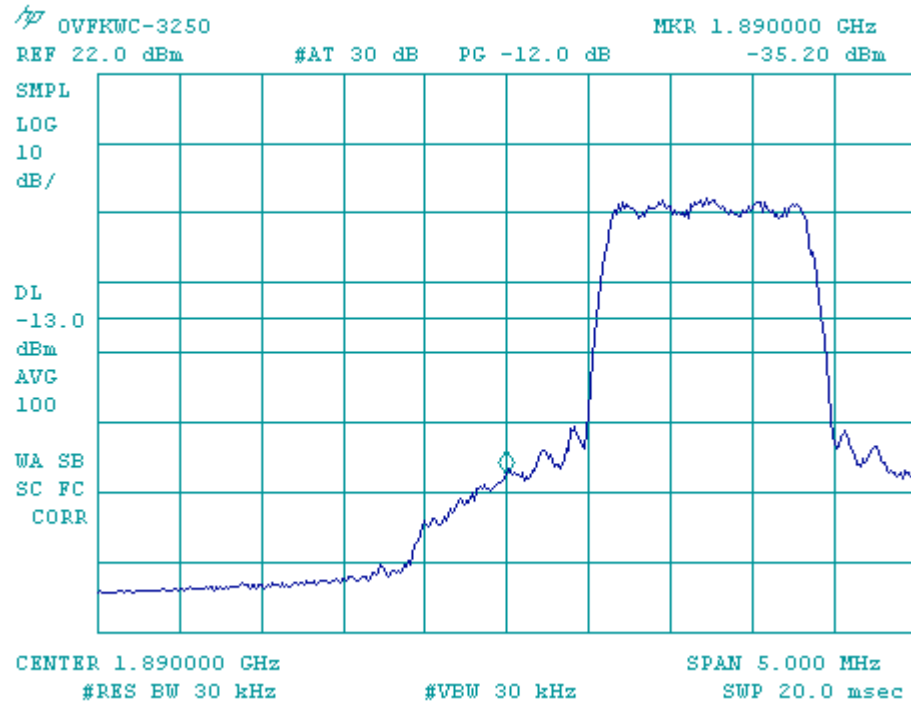


Figure 9.1-10 Block F Upper edge, Channel 875

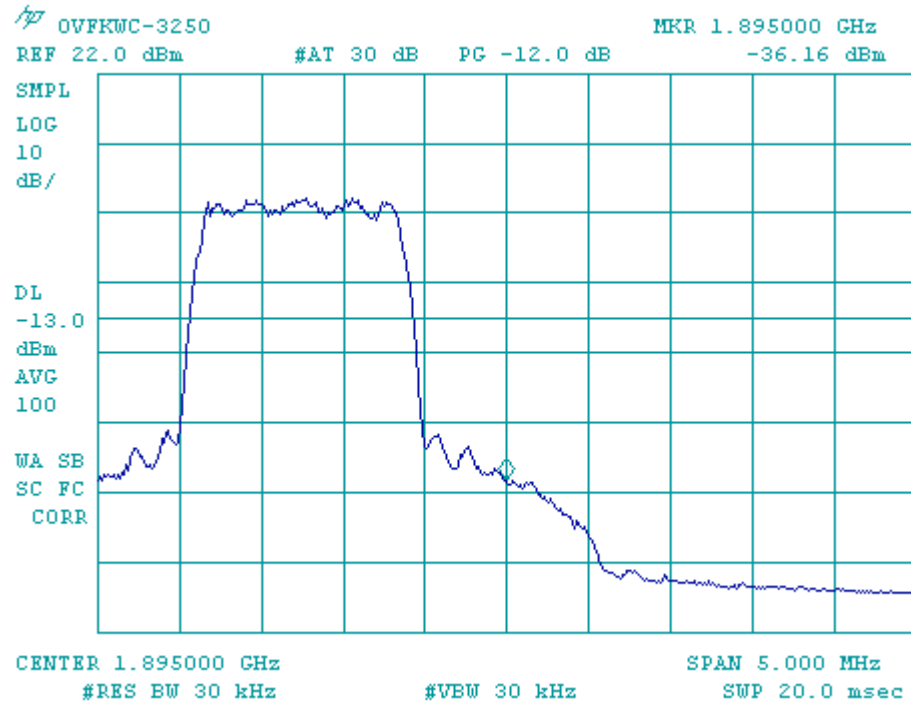


Figure 9.1-11 Block C Lower edge, Channel 925


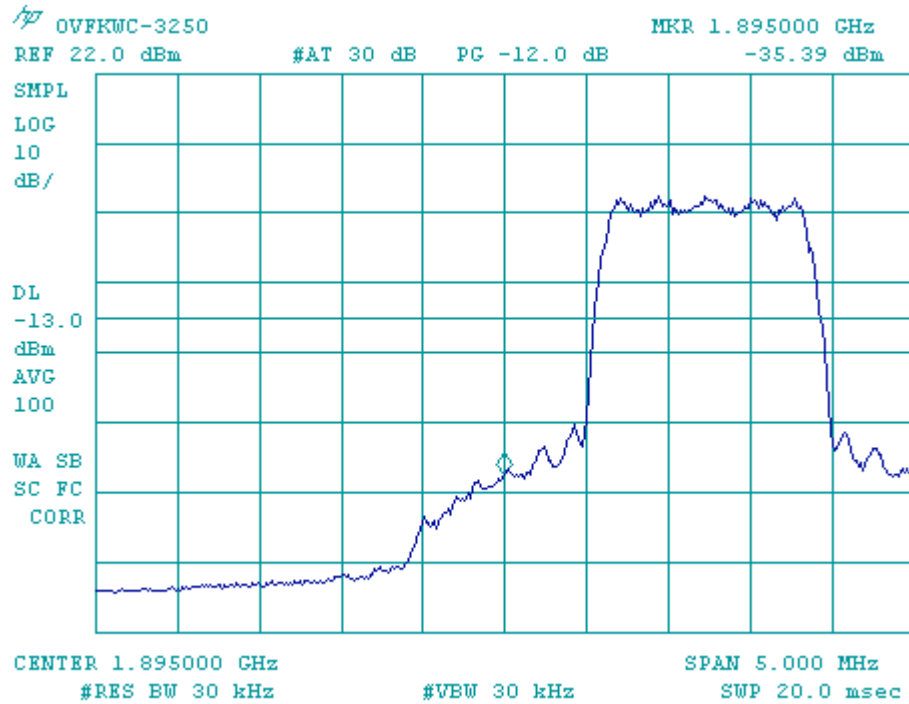


Figure 9.1-12 Block C Upper edge, Channel 1175

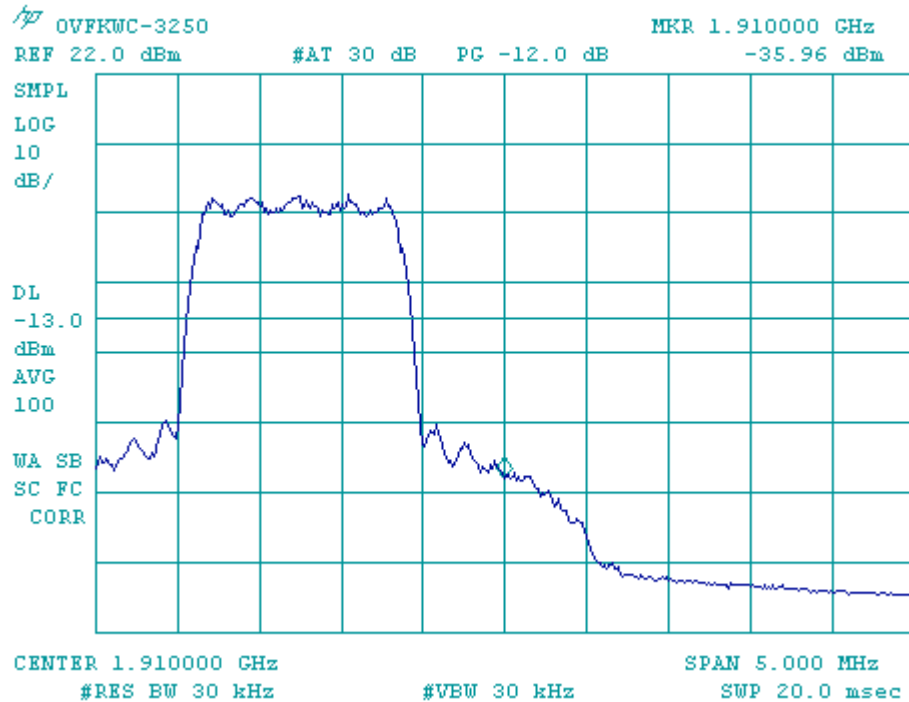

9.2 CDMA 800 Mode

FCC: § 22.917	IC: RSS-129
Measurement Procedures: The RF output of the EUT was connected to the input of the HP8594E spectrum analyzer with sufficient attenuation. During tests, the EUT was modulated with full rate.	

List of Figures

Figure	Mode	Description
9.2-1	CDMA 800	Block A Lower edge, Channel 1013
9.2-2		Block A Upper edge, Channel 310
9.2-3		Block B Lower edge, Channel 357
9.2-4		Block B Upper edge, Channel 643
9.2-5		Block A Lower edge, Channel 690
9.2-6		Block B Lower edge, Channel 740
9.2-7		Block A Upper edge, Channel 693
9.2-8		Block B Upper edge, Channel 777

Figure 9.2-1 Block A Lower edge, Channel 1013

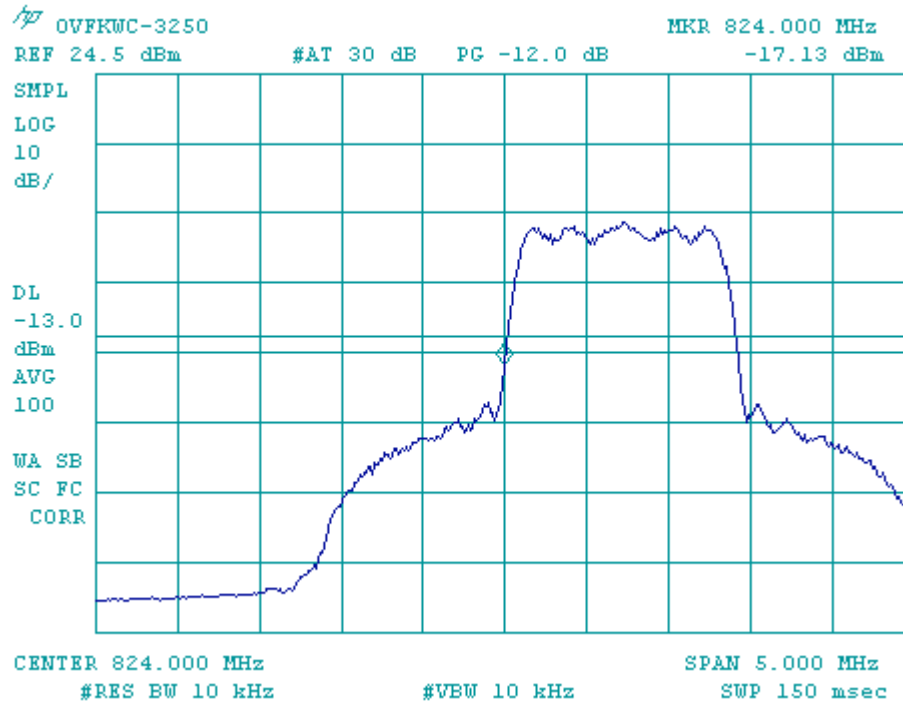


Figure 9.2-2 Block A Upper edge, Channel 310

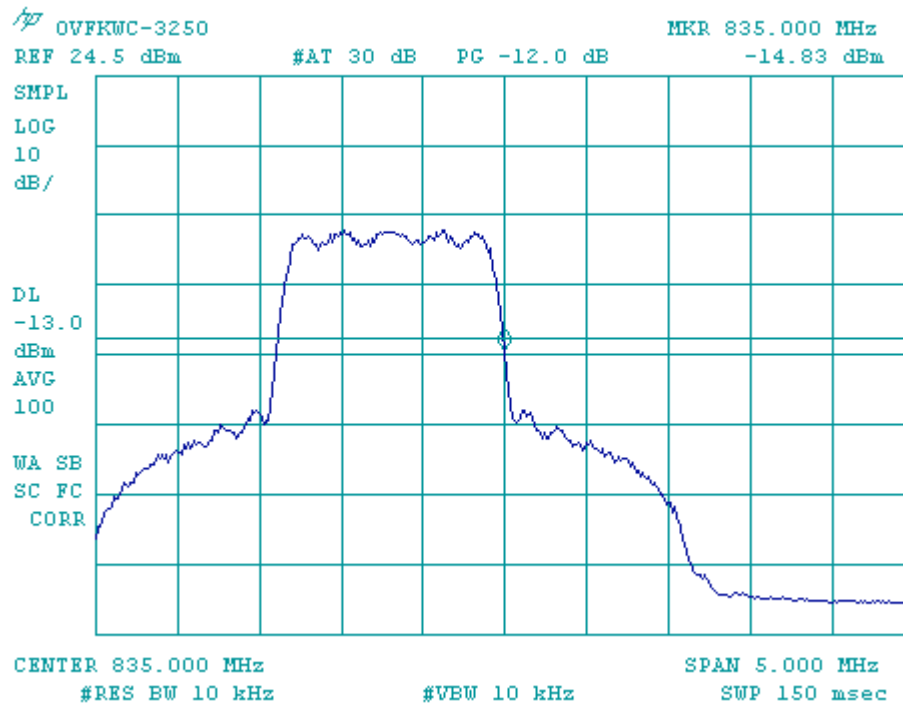


Figure 9.2-3 Block B Lower edge, Channel 357

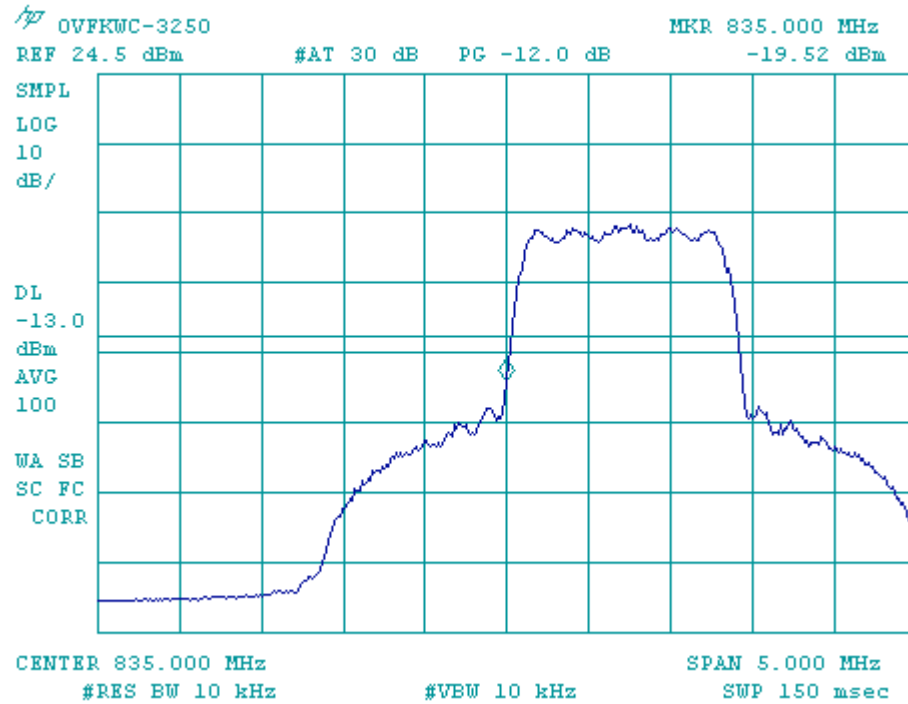


Figure 9.2-4 Block B Upper edge, Channel 643

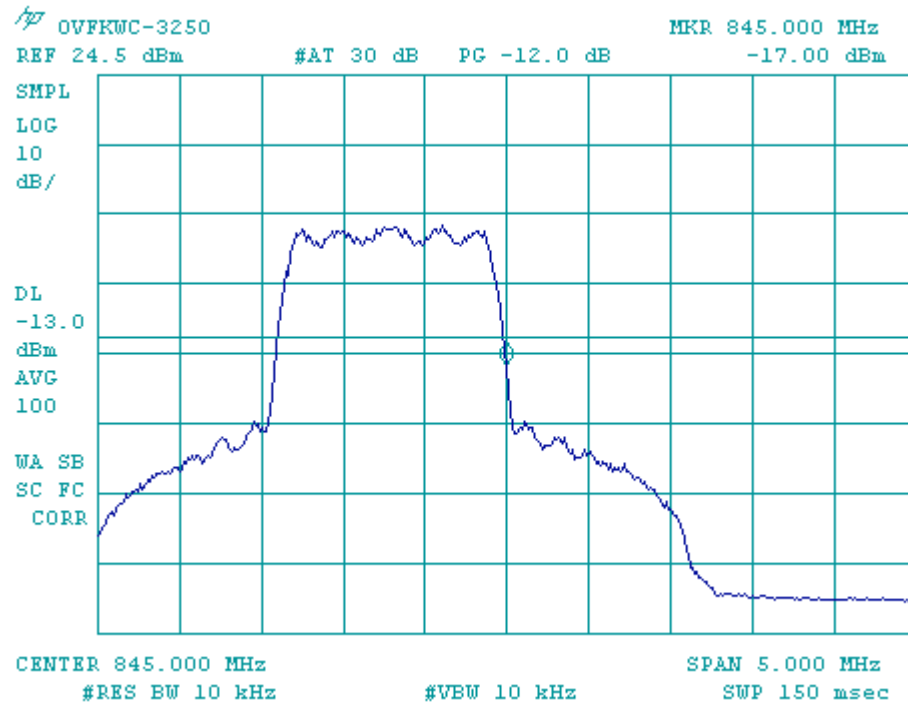


Figure 9.2-5 Block A Lower edge, Channel 690

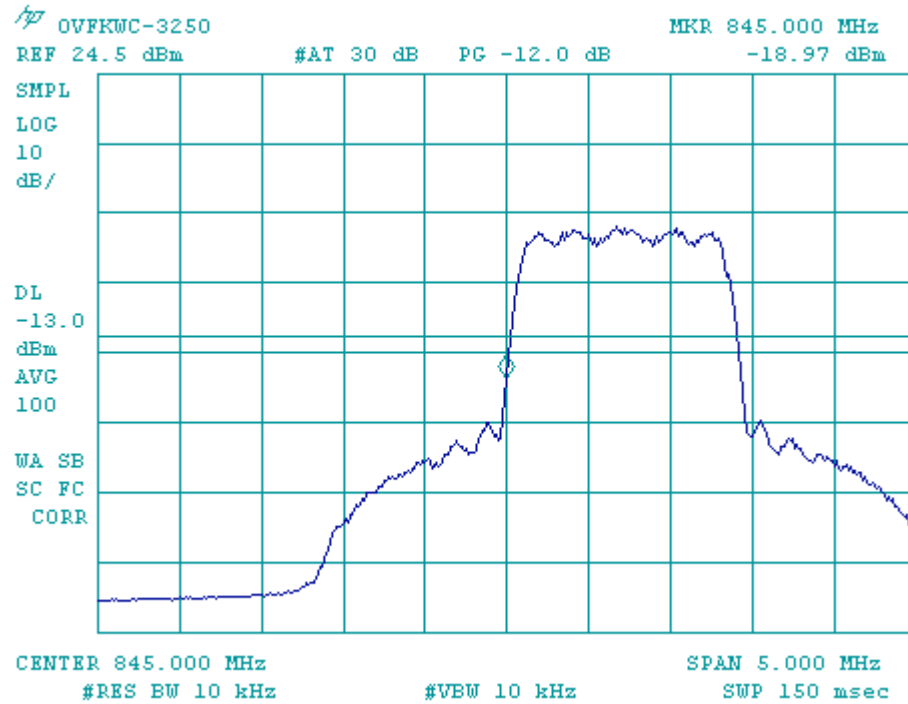


Figure 9.2-6 Block B Lower edge, Channel 740

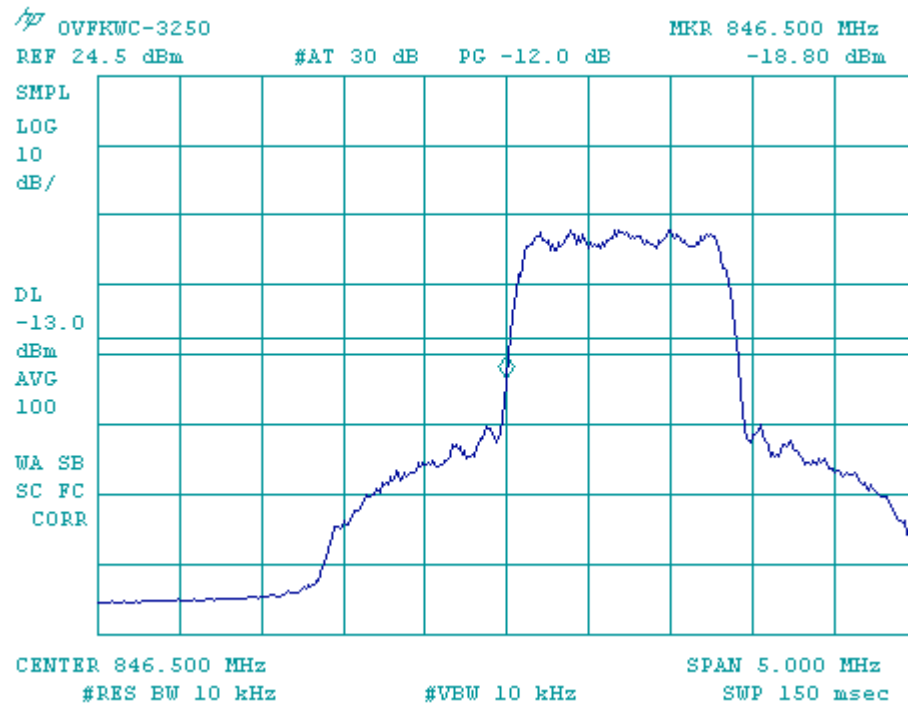


Figure 9.2-7 Block A Upper edge, Channel 693


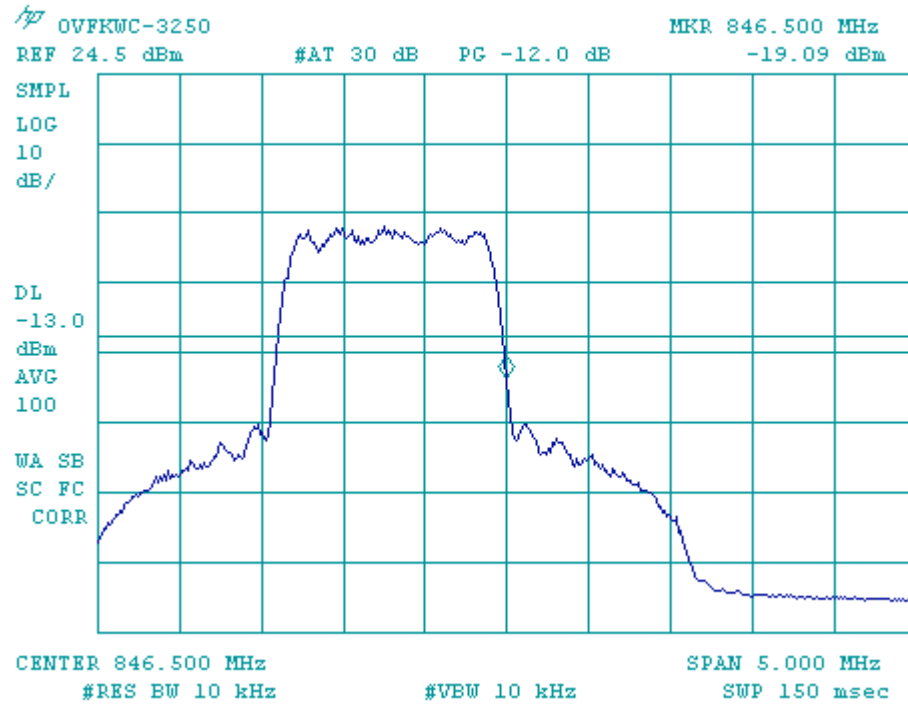


Figure 9.2-8 Block B Upper edge, Channel 777

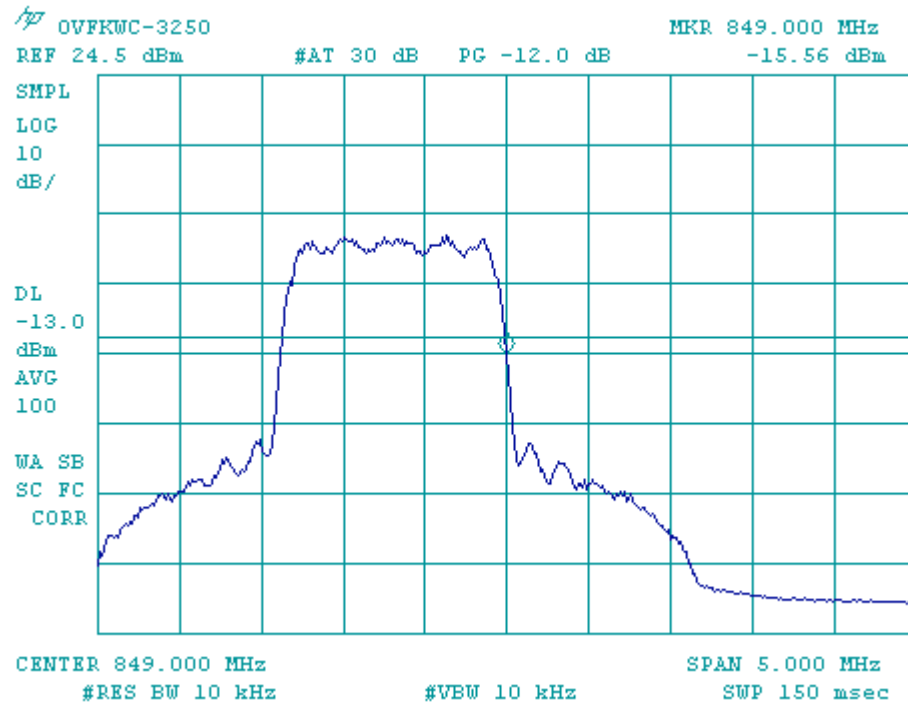

9.3 AMPS Mode

FCC: § 22.917	IC: RSS-129
Measurement Procedures: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The spectrum with no modulation was recorded. <u>For Amps:</u> Modulate with ST + SAT	

List of Figures

Figure	Mode	Description
9.3-1	AMPS	Block A Lower edge, Channel 991
9.3-2		Block A Upper edge, Channel 332
9.3-3		Block B Lower edge, Channel 335
9.3-4		Block B Upper edge, Channel 665
9.3-5		Block A Lower edge, Channel 668
9.3-6		Block B Lower edge, Channel 718
9.3-7		Block A Upper edge, Channel 715
9.3-8		Block B Upper edge, Channel 799

Figure 9.3-1 Block A Lower edge, Channel 991

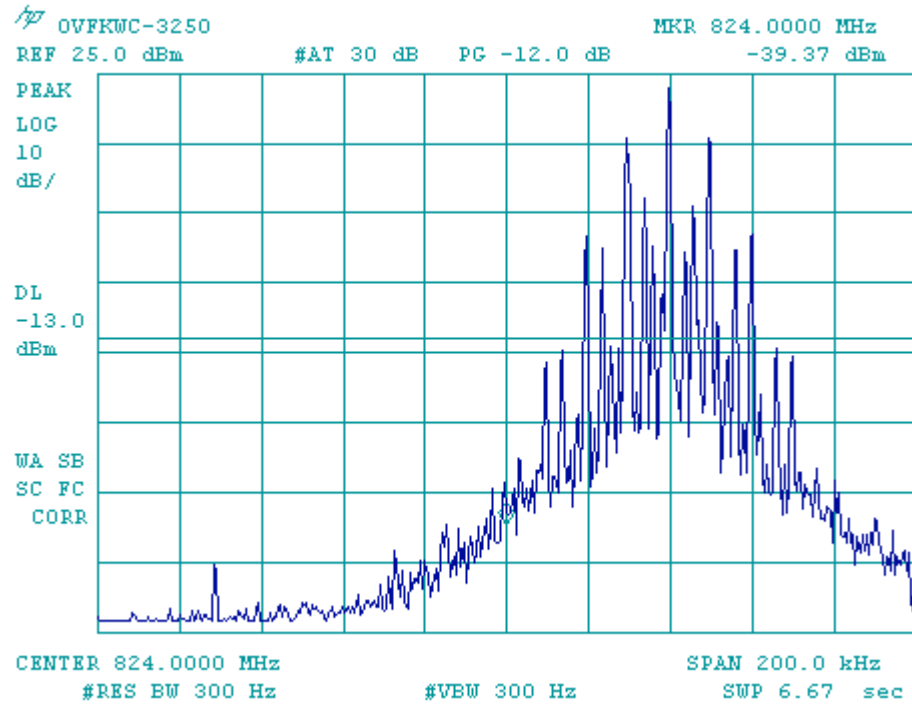


Figure 9.3-2 Block A Upper edge, Channel 332

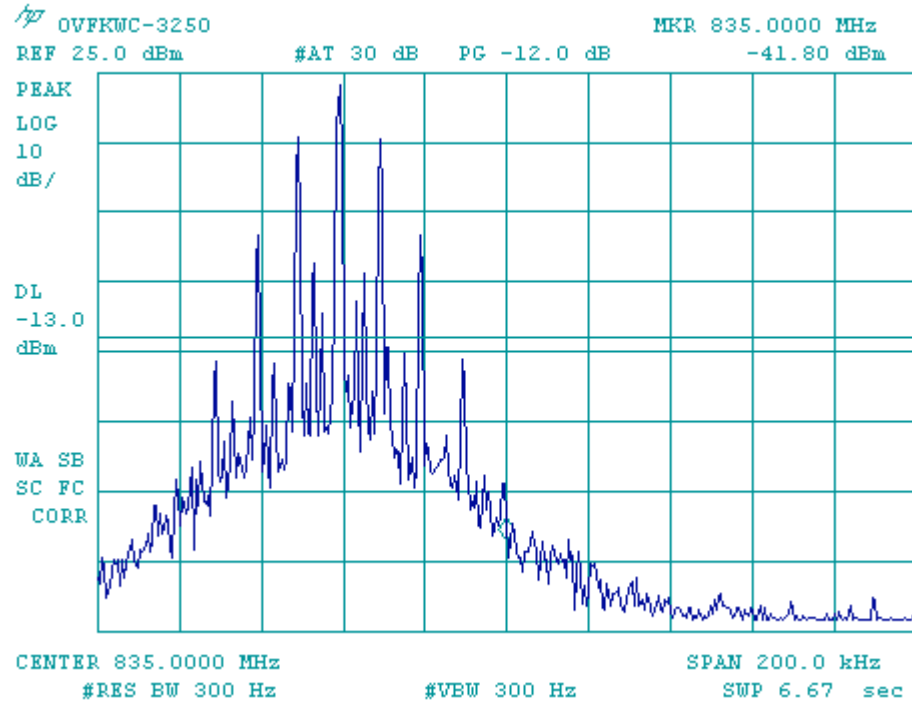


Figure 9.3-3 Block B Lower edge, Channel 335

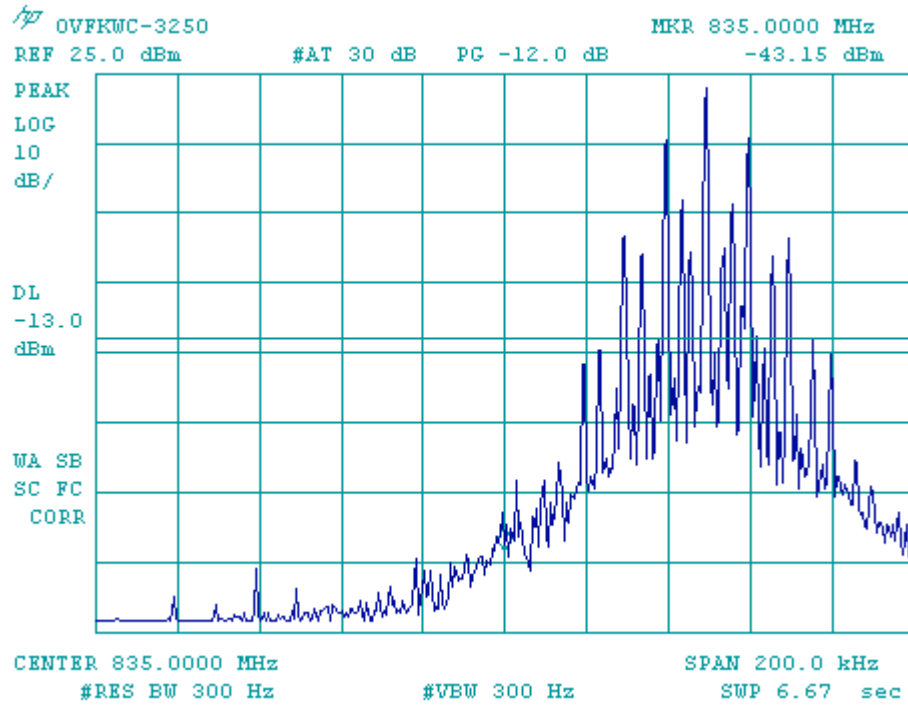


Figure 9.3-4 Block B Upper edge, Channel 665

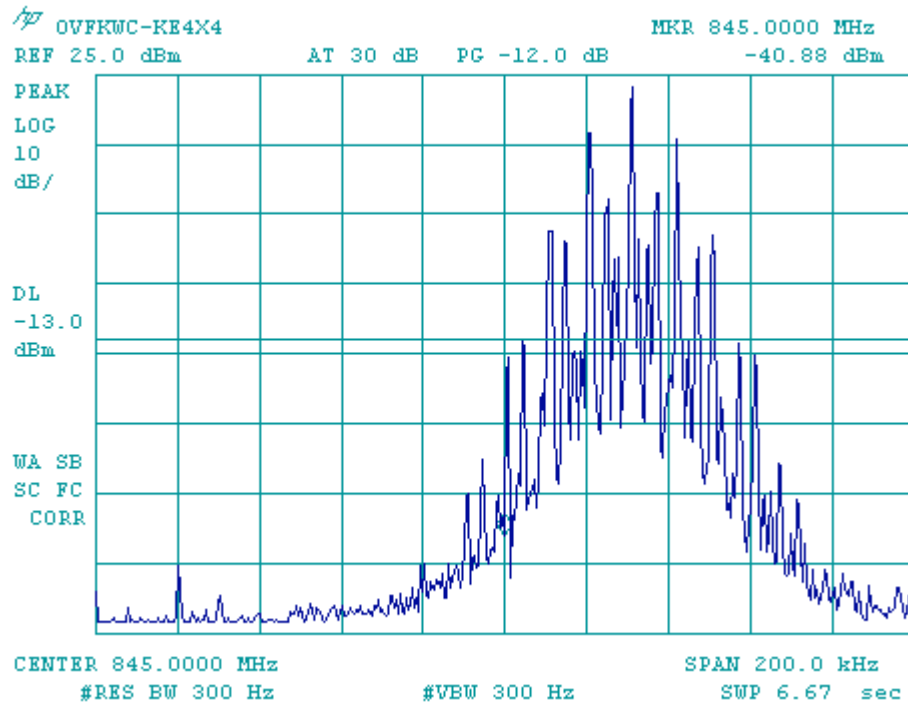


Figure 9.3-5 Block A Lower edge, Channel 668

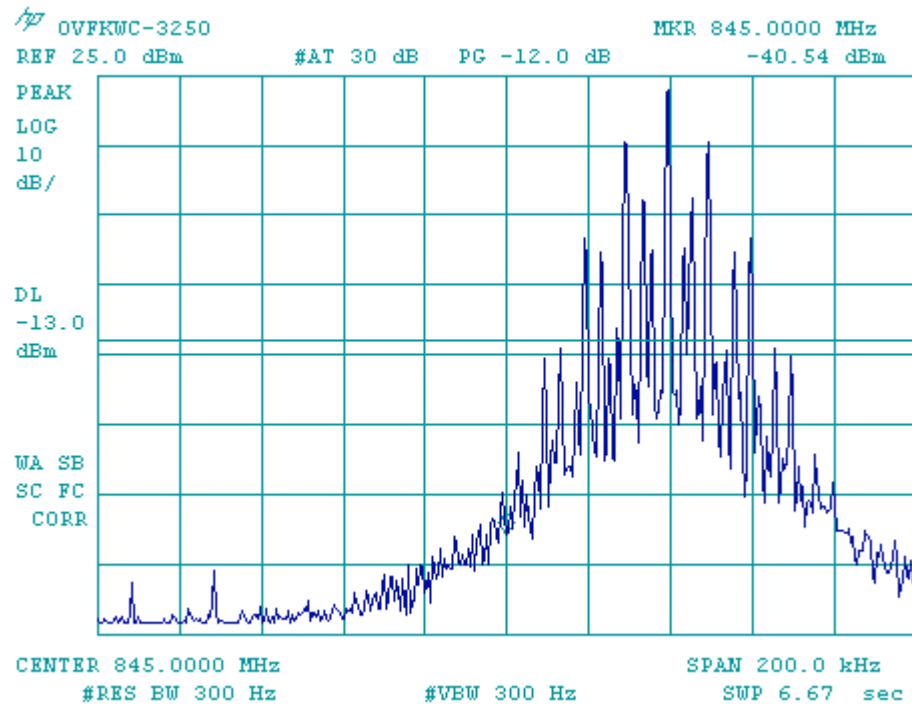


Figure 9.3-6 Block B Lower edge, Channel 718

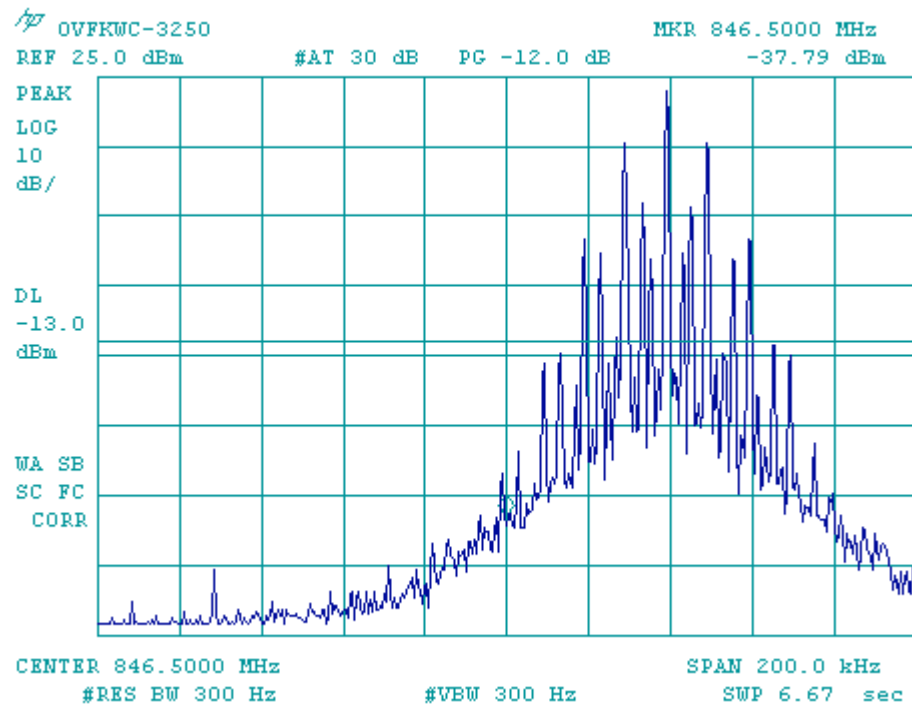


Figure 9.3-7 Block A Upper edge, Channel 715


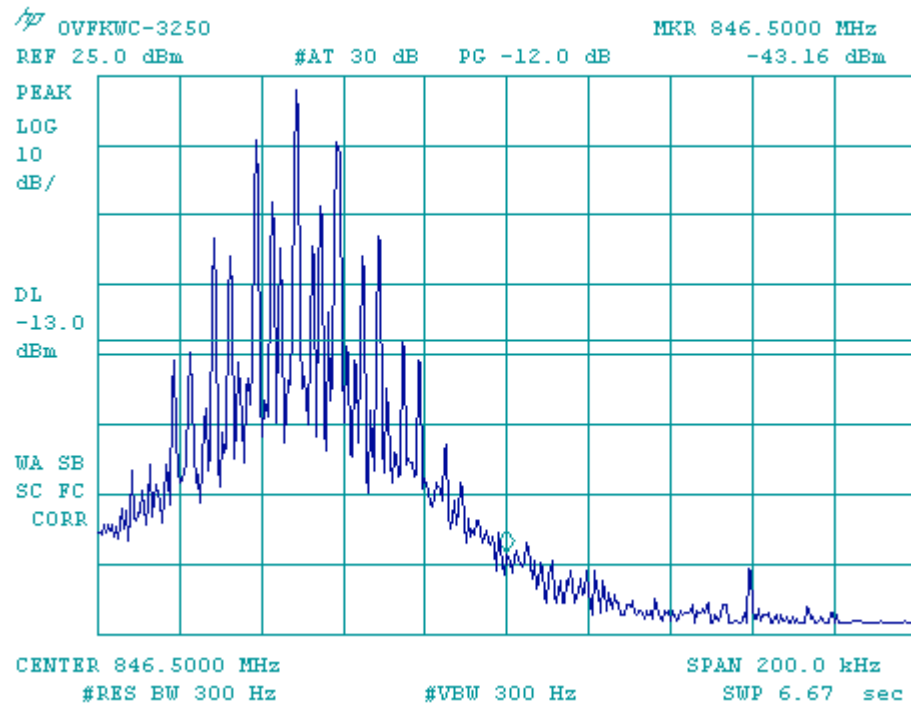


Figure 9.3-8 Block B Upper edge, Channel 799

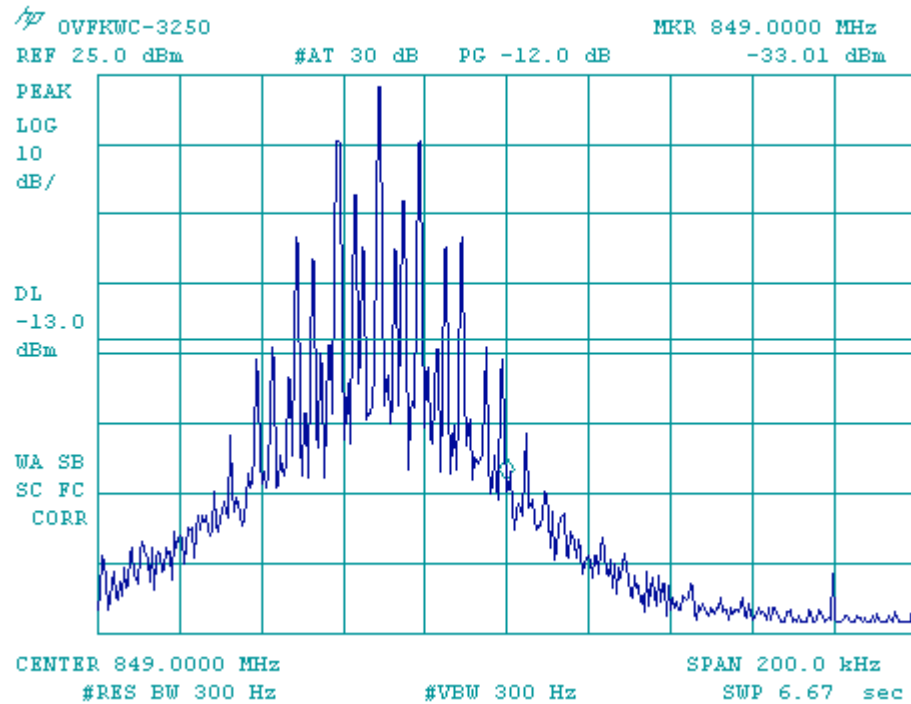

10 Spurious Emissions At Antenna Terminals

FCC: § 2.1051, § 22.917(e)(f), § 24.238	IC: RSS-129 §6.3, §8.1, RSS-133 §6.3
Measurement Procedures:	
<p><u>Out of Band:</u> The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The audio modulating signal was applied as in Section 5.0. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.</p>	
<p><u>Base Band:</u> Spectrum was investigated from 869-894 MHz for Cellular.</p>	

List of Figures:

Figure	Mode	Channel	Plot Description
10-1	AMPS	991	Emissions in base station frequency range, 869 - 894 MHz
10-2			Conducted spurious emissions, 9kHz to 10GHz
10-3		383	Emissions in base station frequency range, 869 - 894 MHz
10-4			Conducted spurious emissions, 9kHz to 10GHz
10-5		799	Emissions in base station frequency range, 869 - 894 MHz
10-6			Conducted spurious emissions, 9kHz to 10GHz
10-7	CDMA 800	1013	Emissions in base station frequency range, 869 - 894 MHz
10-8			Conducted spurious emissions, 9kHz to 10GHz
10-9		383	Emissions in base station frequency range, 869 - 894 MHz
10-10			Conducted spurious emissions, 9kHz to 10GHz
10-11		777	Emissions in base station frequency range, 869 - 894 MHz
10-12			Conducted spurious emissions, 9kHz to 10GHz
10-13	CDMA 1900	25	Conducted spurious emissions, 9kHz to 20GHz
10-14		600	Conducted spurious emissions, 9kHz to 20GHz
10-15		1175	Conducted spurious emissions, 9kHz to 20GHz

Figure 10-1 AMPS - Emissions in base station frequency range (CH 991)

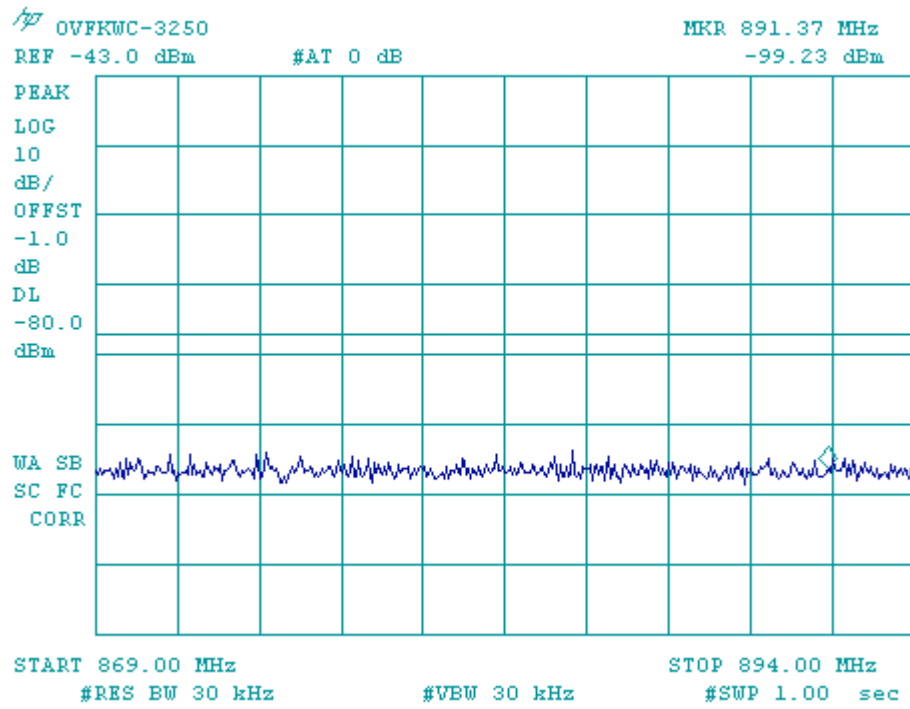


Figure 10-2a AMPS – Conducted Spurious Emission (CH 991)

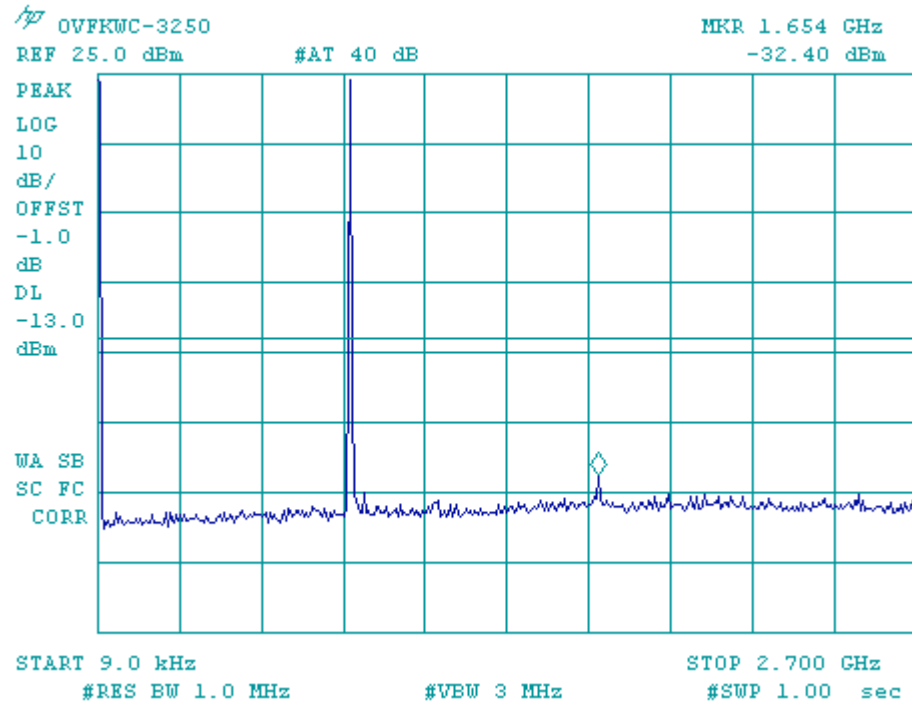


Figure 10-2b AMPS – Conducted Spurious Emission (CH 991)

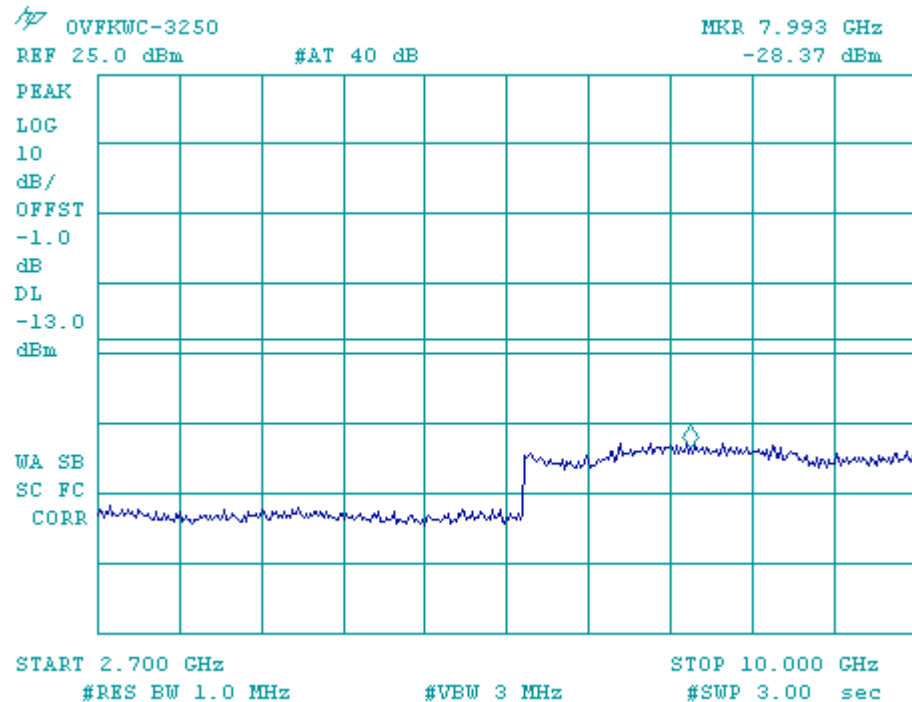


Figure 10-3 AMPS - Emissions in base station frequency range (CH 383)

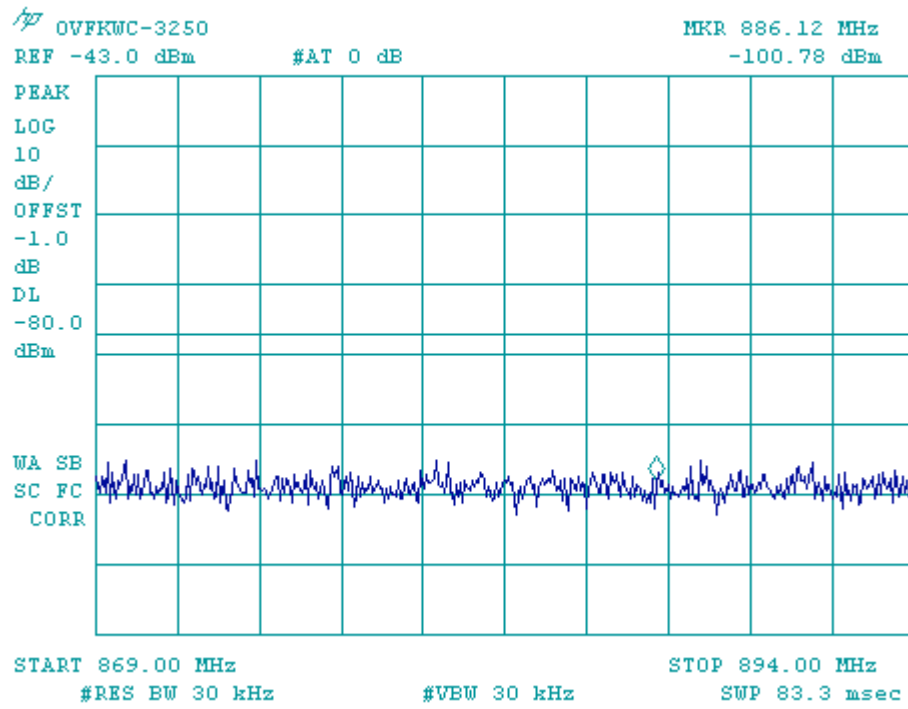


Figure 10-4a AMPS – Conducted Spurious Emission (CH 383)

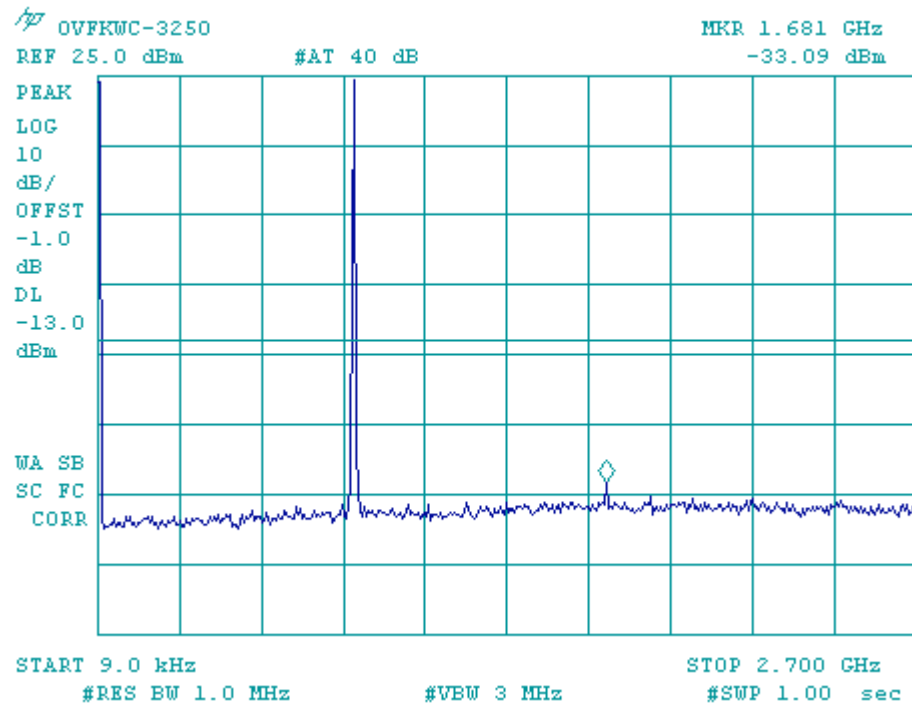


Figure 10-4b AMPS – Conducted Spurious Emission (CH 383)

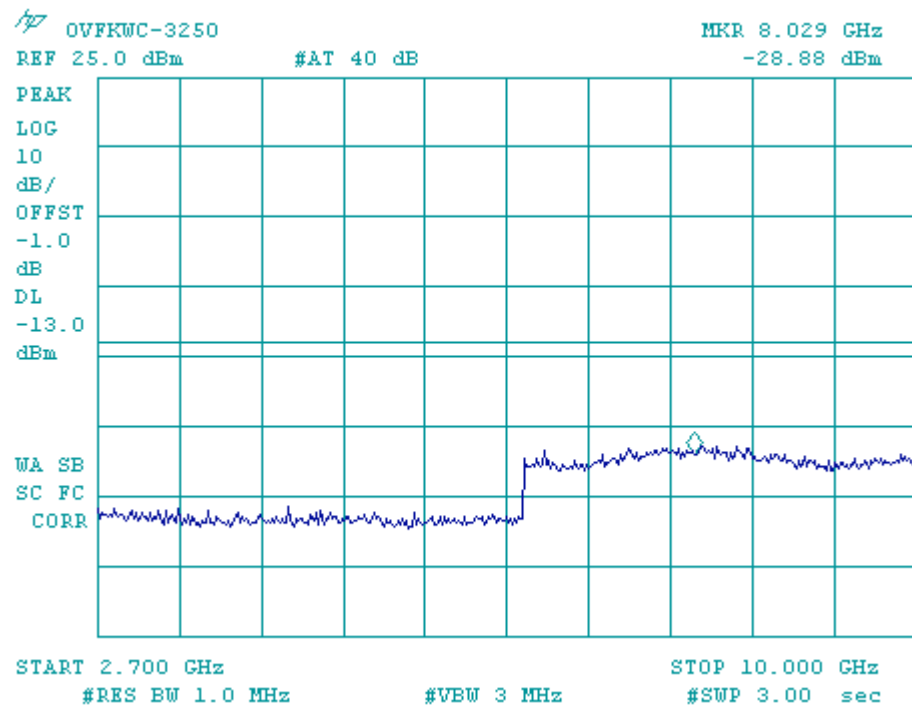


Figure 10-5 AMPS - Emissions in base station frequency range (CH 799)

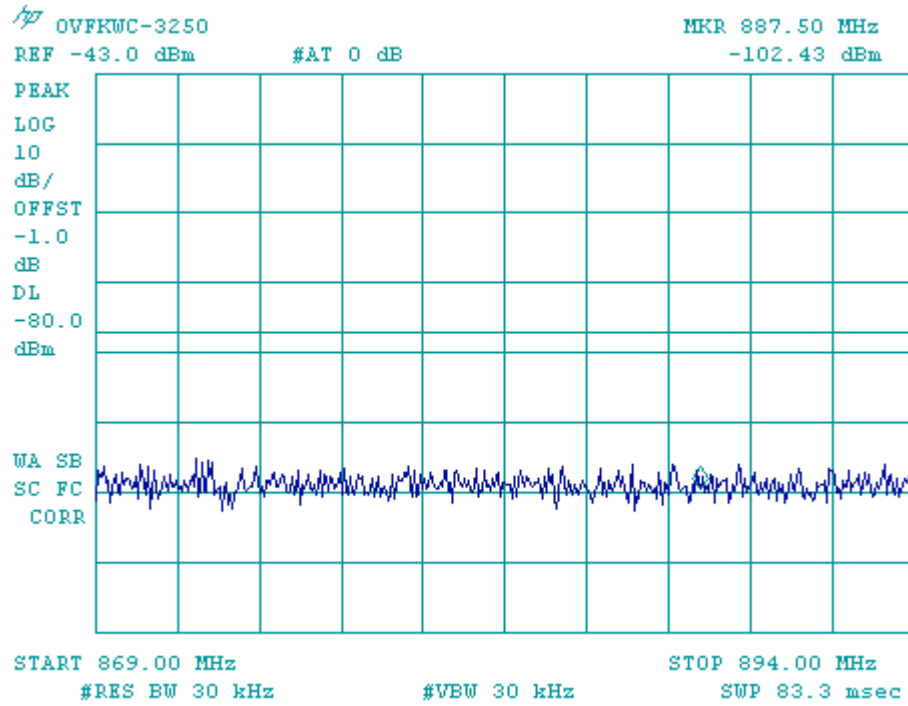


Figure 10-6a AMPS – Conducted Spurious Emission (CH 799)

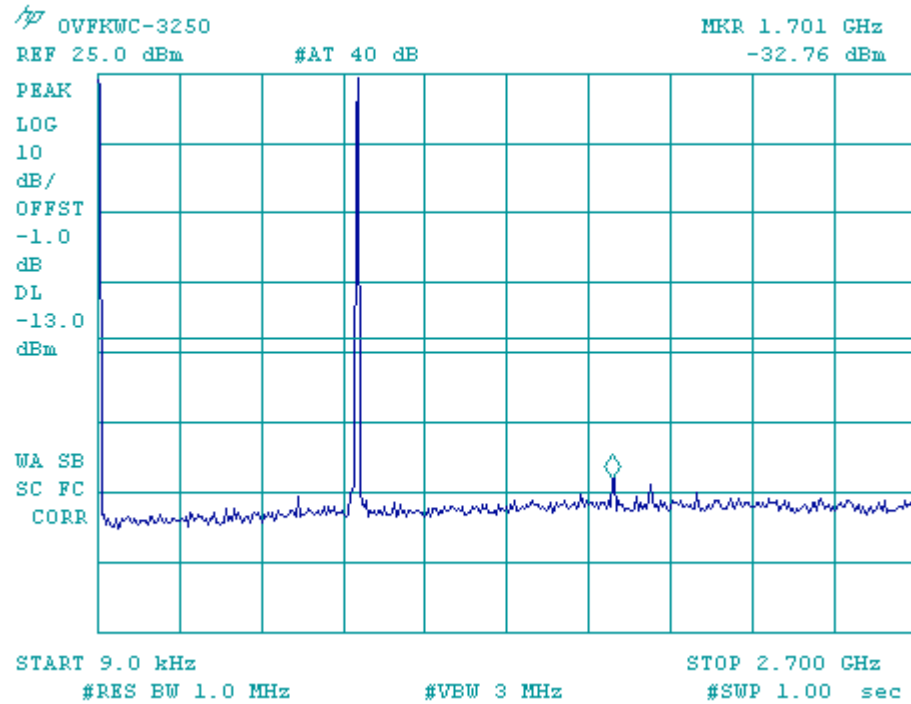


Figure 10-6b AMPS – Conducted Spurious Emission (CH 799)

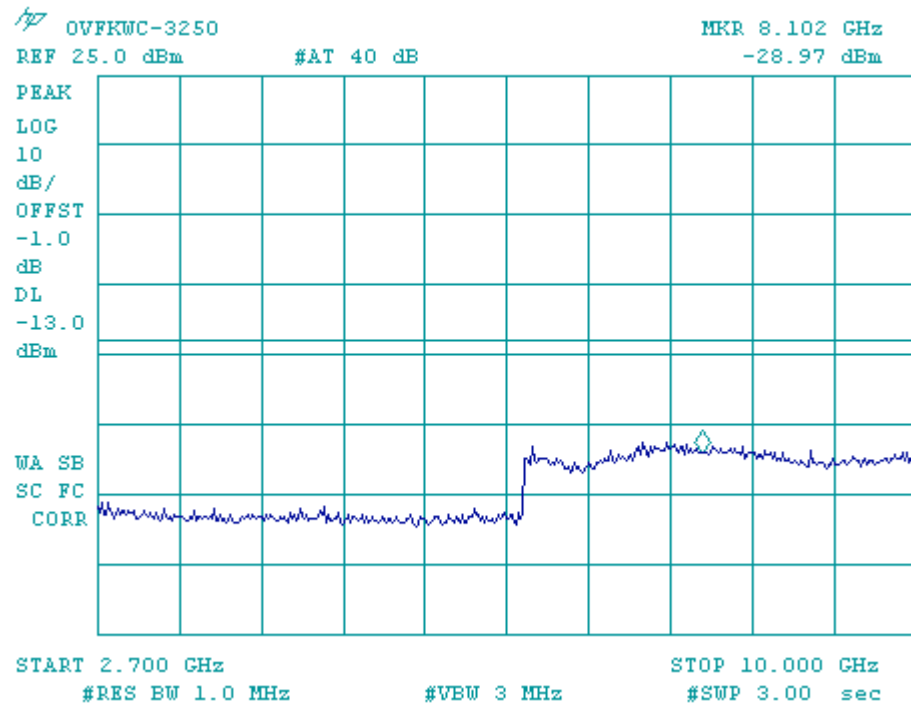


Figure 10-7 CDMA 800 - Emissions in base station frequency range (CH 1013)

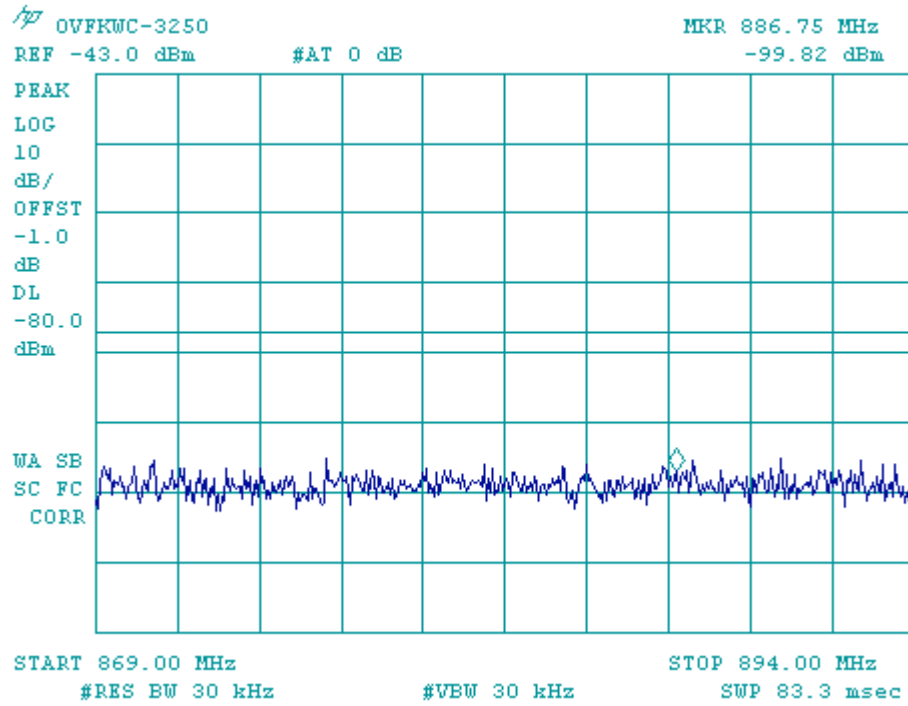


Figure 10-8a CDMA 800 – Conducted Spurious Emission (CH 1013)

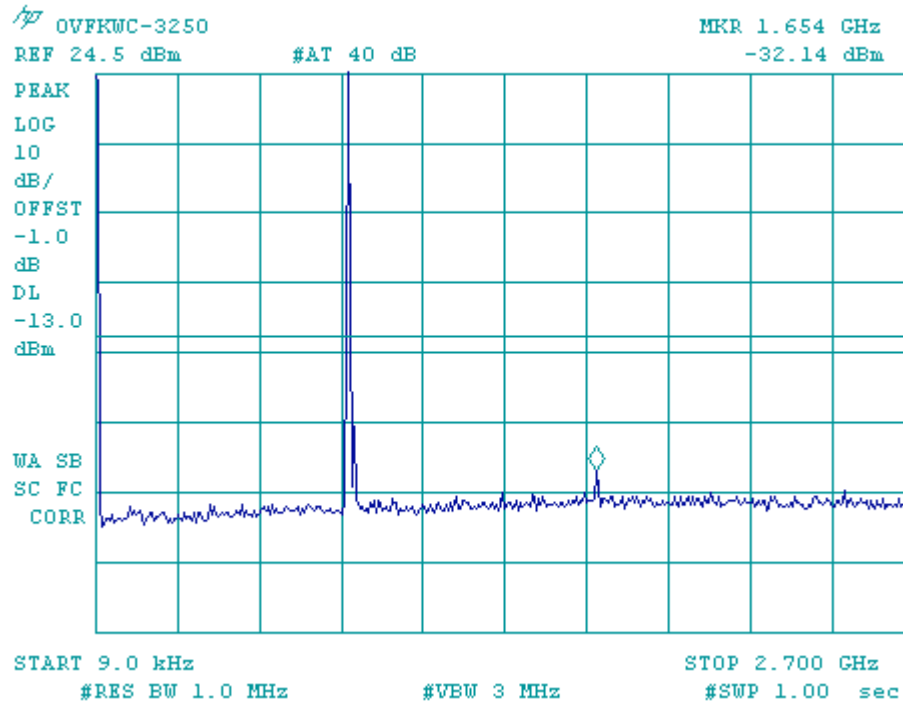


Figure 10-8b CDMA 800 – Conducted Spurious Emission (CH 1013)

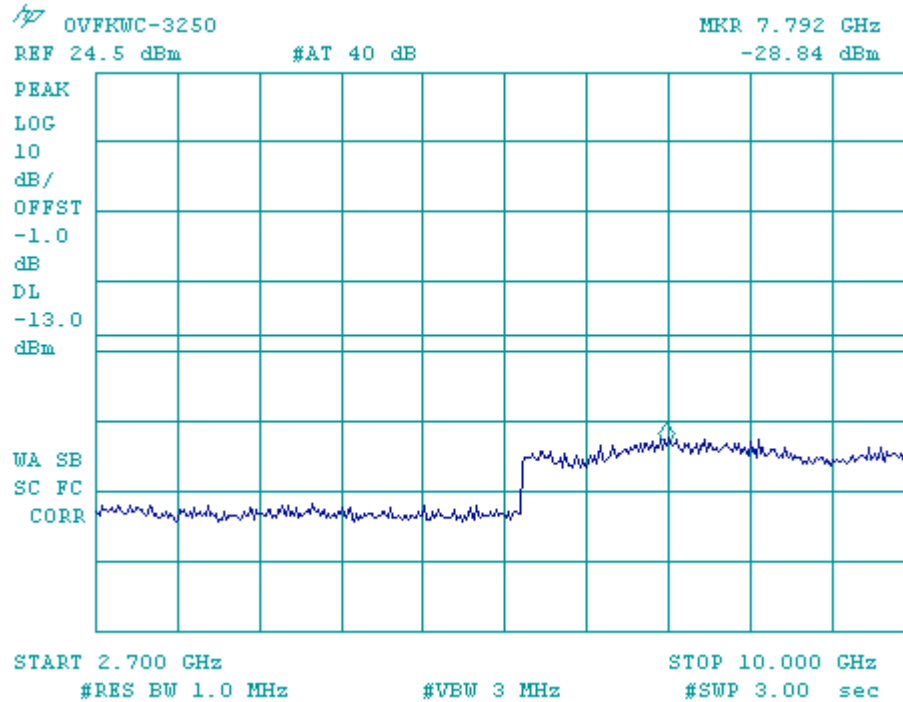


Figure 10-9 CDMA 800 - Emissions in base station frequency range (CH 383)

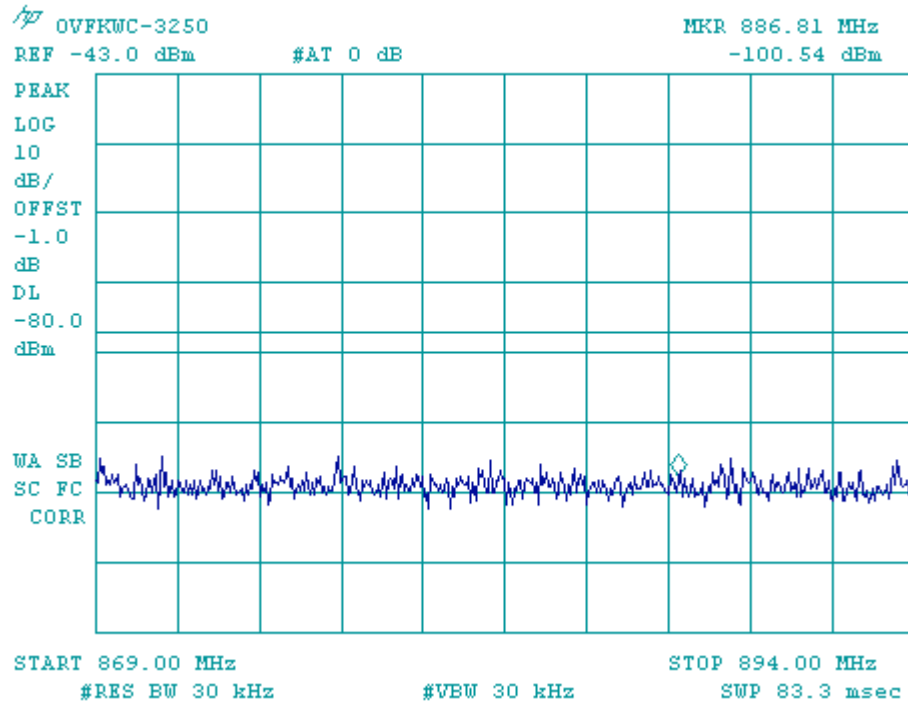


Figure 10-10a CDMA 800 – Conducted Spurious Emission (CH 383)

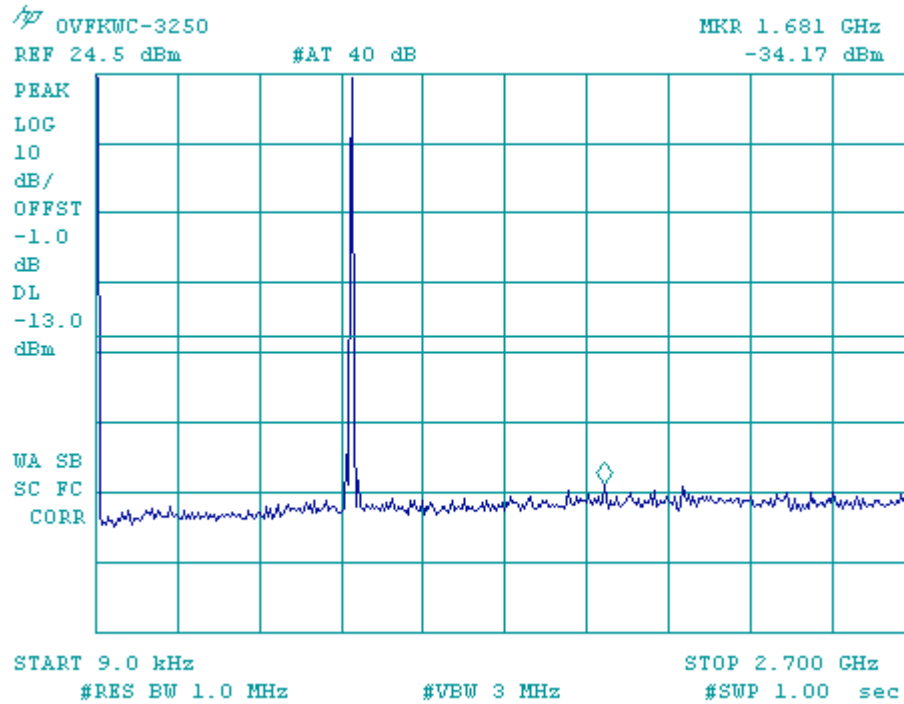


Figure 10-10b CDMA 800 – Conducted Spurious Emission (CH 383)

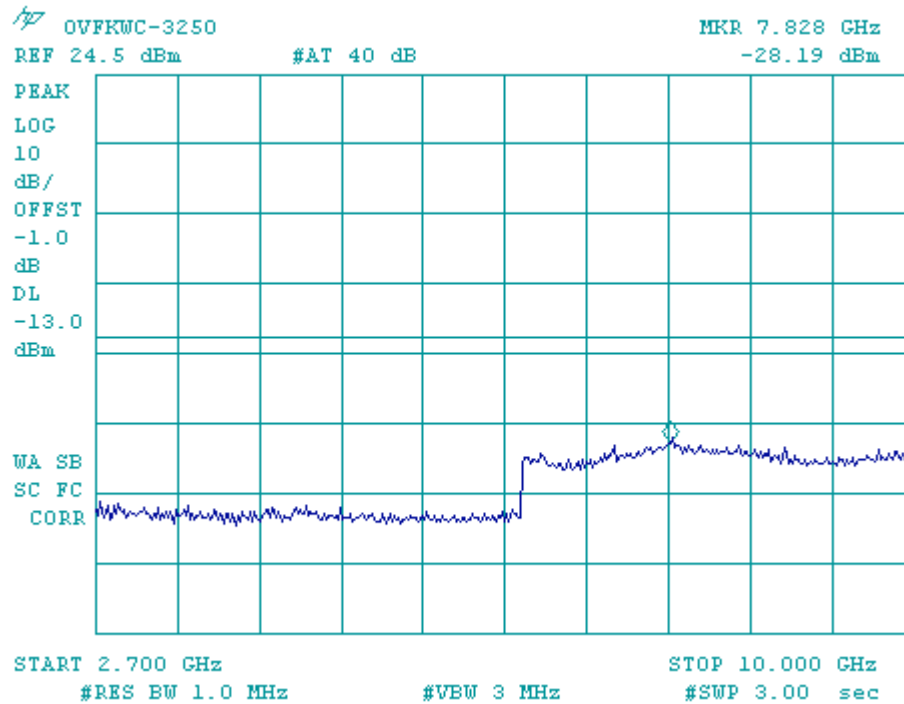


Figure 10-11 CDMA 800 - Emissions in base station frequency range (CH 777)

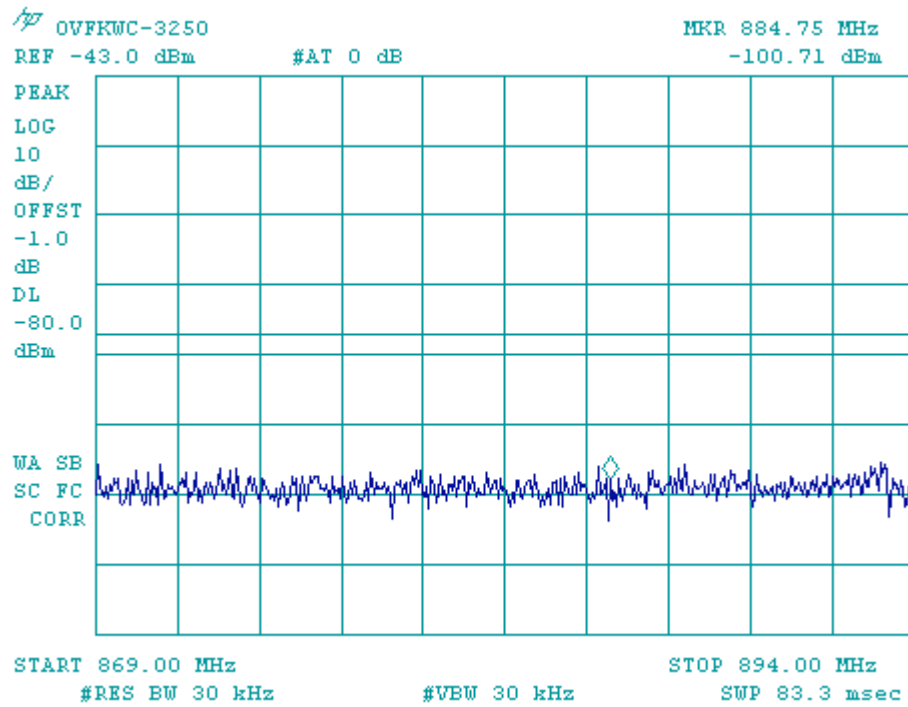


Figure 10-12a CDMA 800 – Conducted Spurious Emission (CH 777)

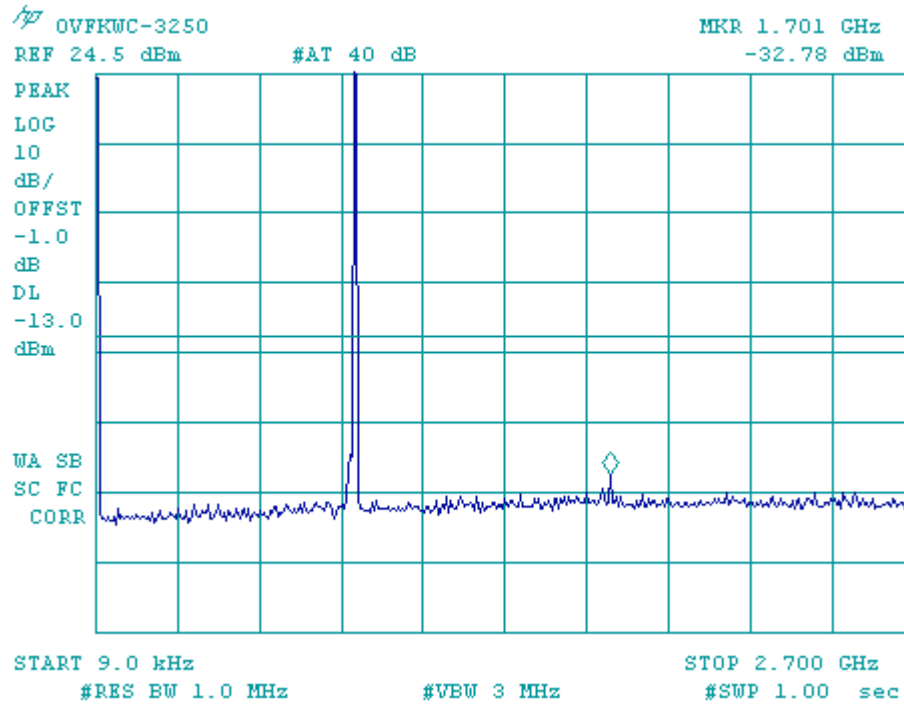


Figure 10-12b CDMA 800 – Conducted Spurious Emission (CH 777)

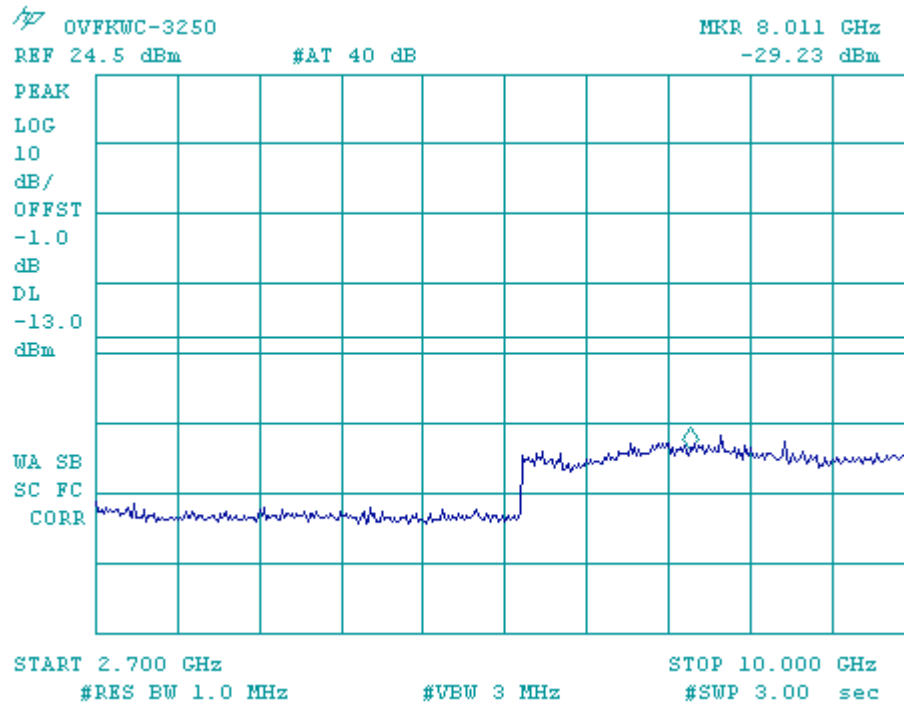


Figure 10-13a CDMA 1900 - Conducted Spurious Emission (CH 25)

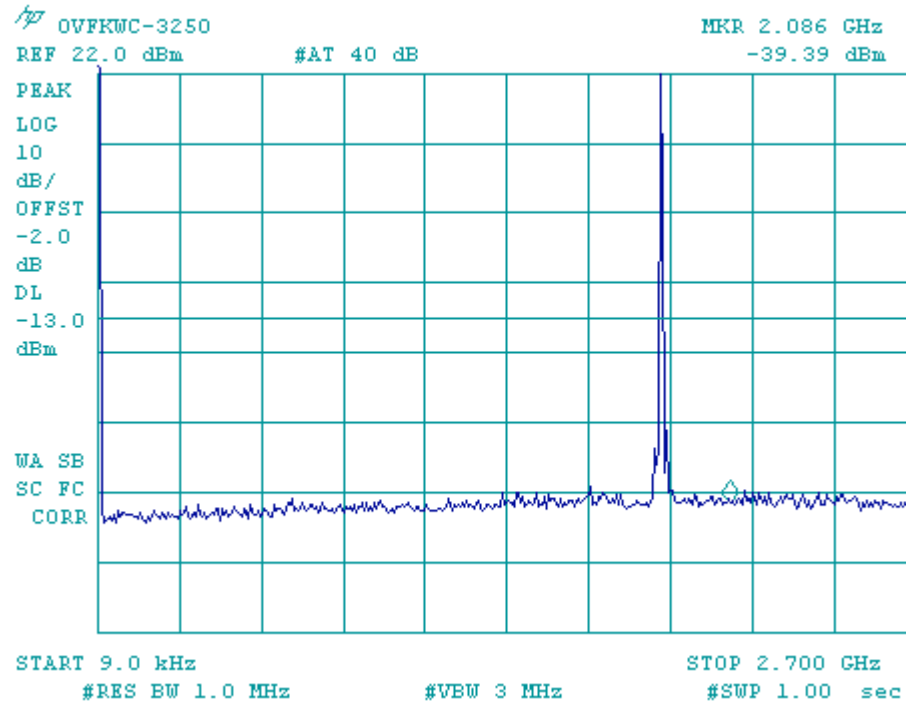


Figure 10-13b CDMA 1900 - Conducted Spurious Emission (CH 25)

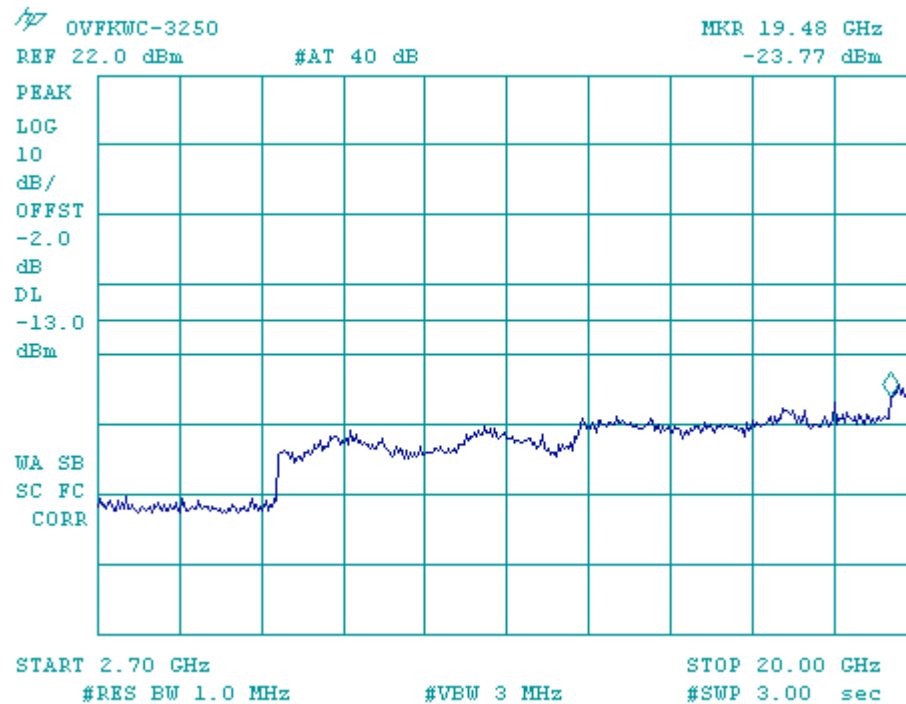


Figure 10-14a CDMA 1900 - Conducted Spurious Emission (CH 600)

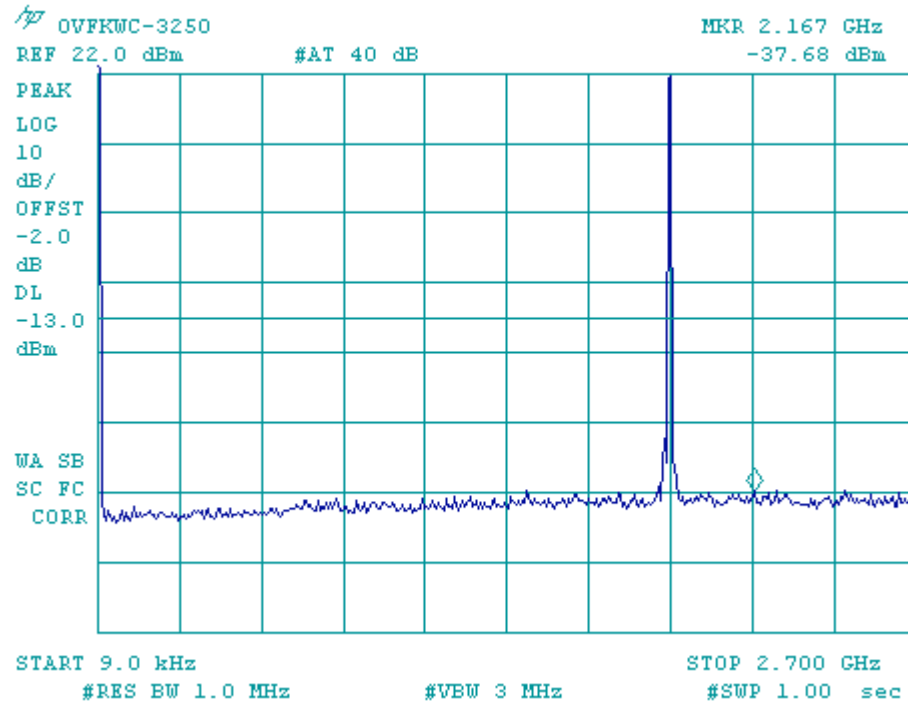


Figure 10-14b CDMA 1900 - Conducted Spurious Emission (CH 600)

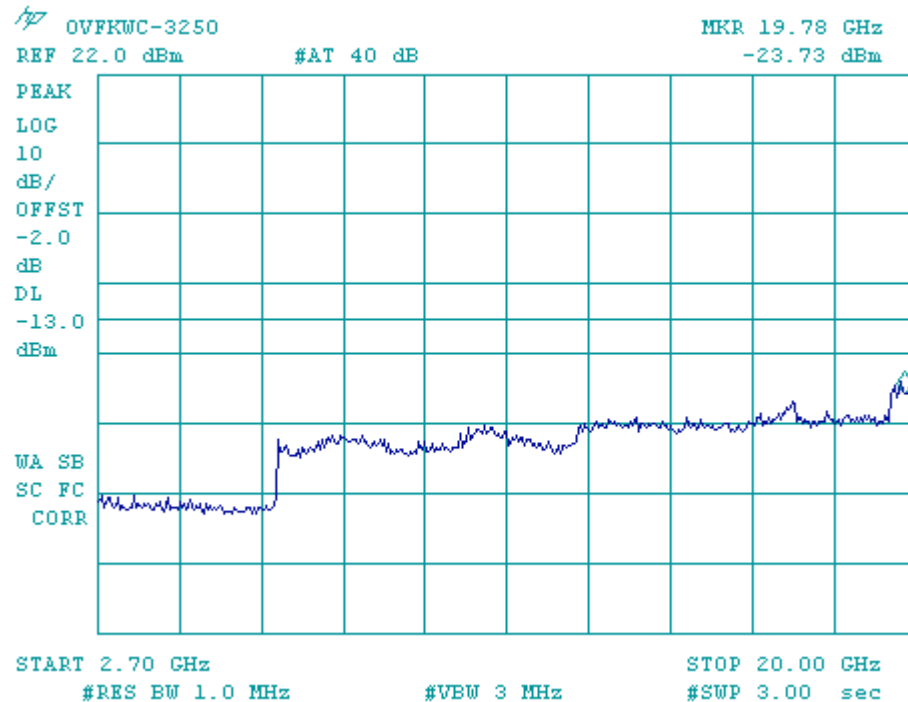


Figure 10-15a CDMA 1900 - Conducted Spurious Emission (CH 1175)


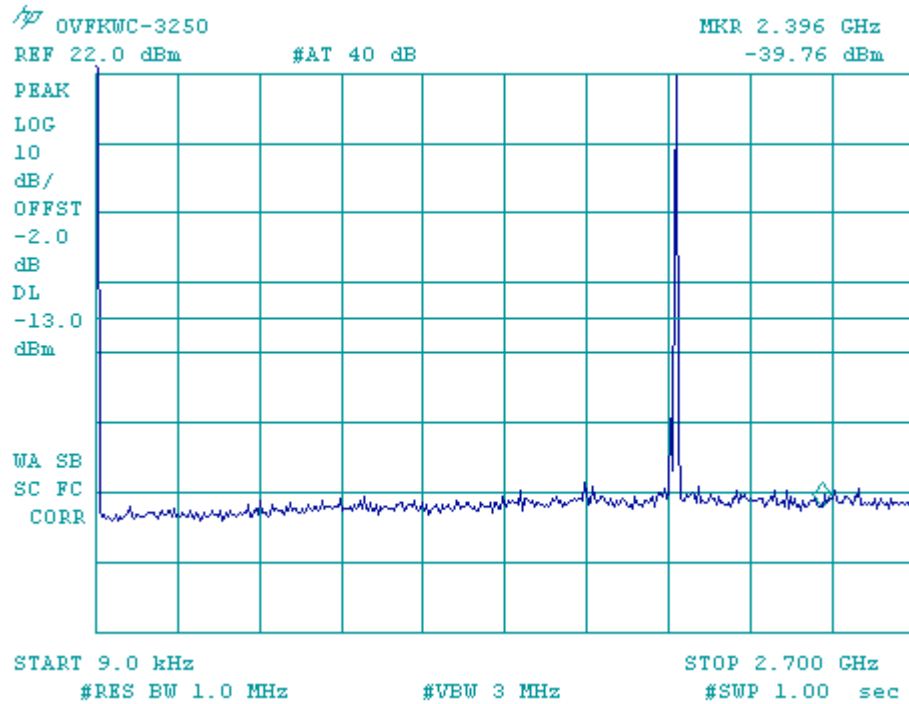


Figure 10-15b CDMA 1900 - Conducted Spurious Emission (CH 1175)

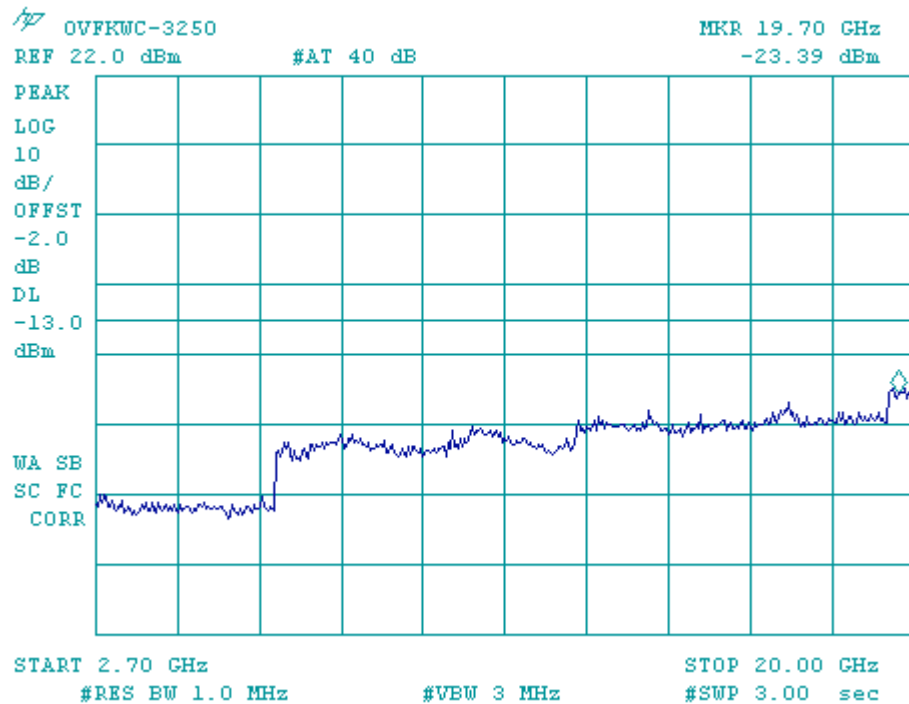

11 Transmitter Radiated Spurious Emissions Measured Data

FCC: § 2.1053, § 22.91, § 24.238	IC: RSS-129 §8.1, RSS-133 §6.3
Measurement Procedures: The radiated spurious emission test was performed at TUV in San Diego, California. The test report is attached in a separate attachment.	

12 Receiver Spurious Emissions

FCC: § 15.109	IC: RSS-129 §10, RSS-133 §9
Measurement Procedures: The receiver radiated spurious emission test was performed at TUV in San Diego, California. The test report is attached in a separate attachment.	


13 Transmitter RF Carrier Frequency Stability

FCC: § 2.1055, § 22.355, § 24.235	IC: RSS-129 §7.2 and §9.2, RSS-133 §7
Measurement Procedures:	
The EUT was placed in an environmental chamber. The RF output of the EUT was connected to a frequency counter via attenuator. A power supplier was connected as primary voltage supply.	

13.1 AMPS Mode

Tx Frequency: 836.49 MHz	Voltage : 3.7V
Tolerance: +/- 2.5 Ppm (+/- 2091 Hz)	Ch: 383


Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.2V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-950		-2091	2091
-20		-1092		-2091	2091
-10		-1950		-2091	2091
0		-1767		-2091	2091
10		258		-2091	2091
20	1033	258	1367	-2091	2091
30		-1325		-2091	2091
40		-1800		-2091	2091
50		-1808		-2091	2091
60		842		-2091	2091

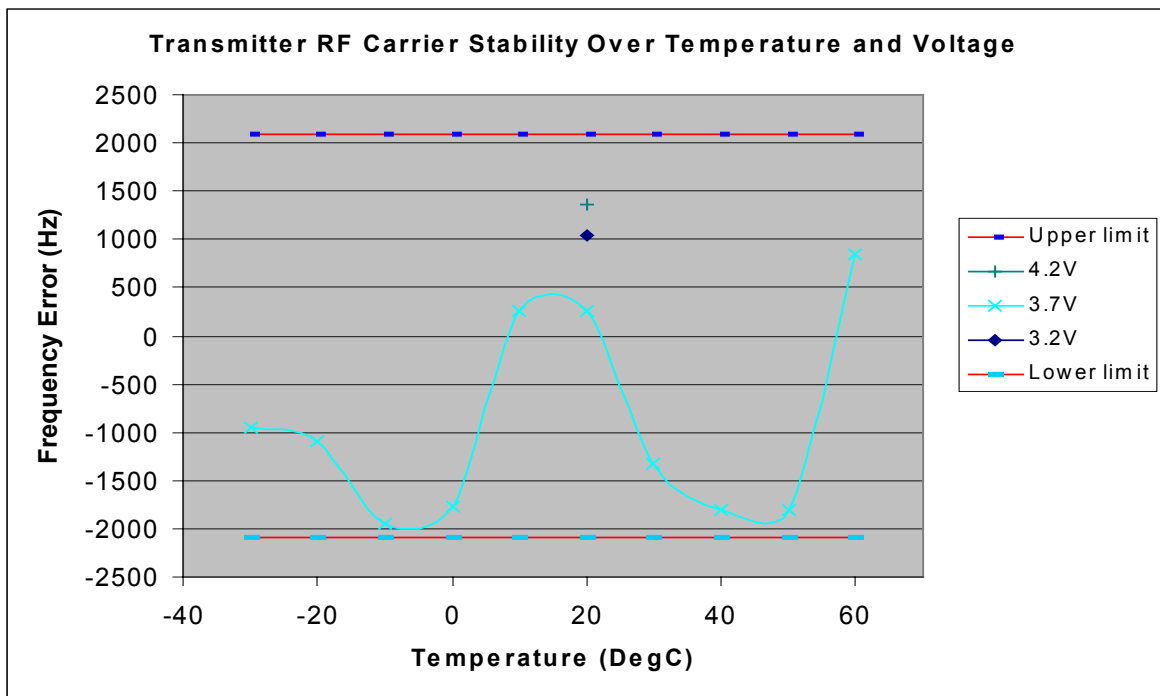

13.2 CDMA 800 Mode

Tx Frequency: 836.49 MHz	Voltage : 3.7V
Tolerance: +/- 2.5 Ppm (+/- 2091 Hz)	Ch: 383


Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.2V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-608		-2091	2091
-20		-317		-2091	2091
-10		-342		-2091	2091
0		-533		-2091	2091
10		-792		-2091	2091
20	-1692	-1125	-1083	-2091	2091
30		-1392		-2091	2091
40		-1717		-2091	2091
50		-975		-2091	2091
60		-92		-2091	2091

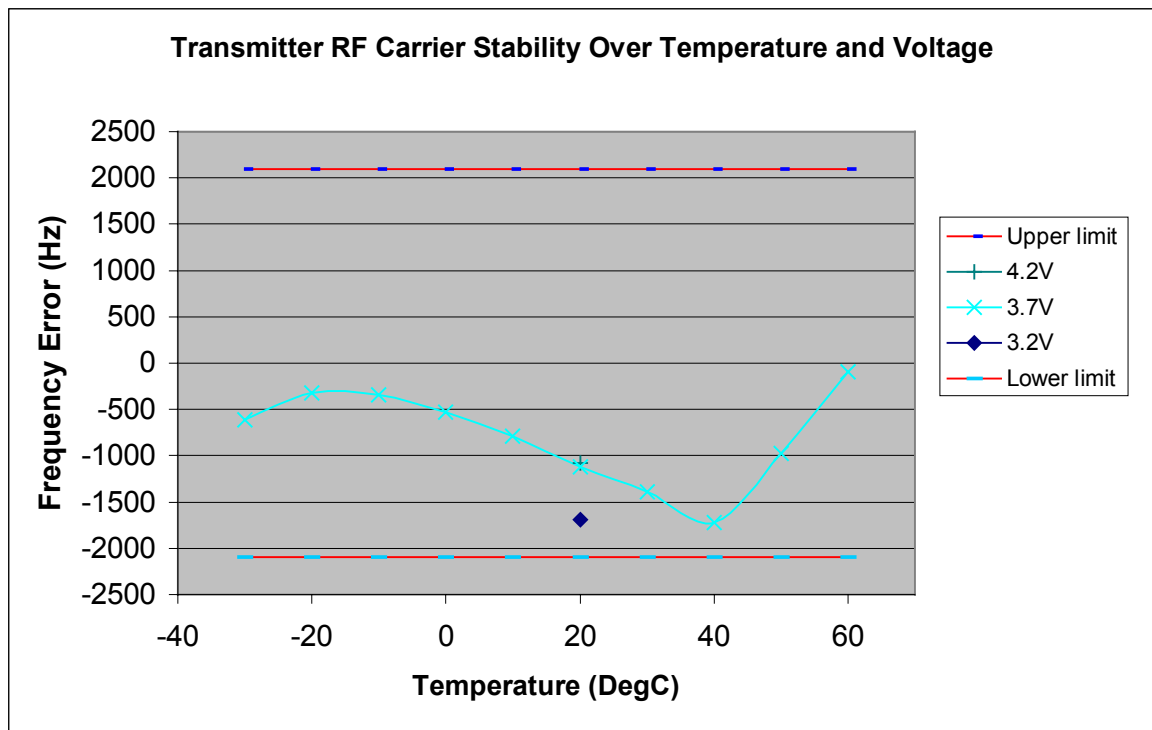

13.3 CDMA 1900 Mode

Tx Frequency:	1880.00 MHz	Voltage :	3.7V
Tolerance:	+/- 2.5 Ppm (+/-4700 Hz)	Ch:	600

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.2V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-1467		-4700	4700
-20		-1067		-4700	4700
-10		-767		-4700	4700
0		-975		-4700	4700
10		-1808		-4700	4700
20	-2752	-2342	-2147	-4700	4700
30		-3141		-4700	4700
40		-3517		-4700	4700
50		-3449		-4700	4700
60		-2398		-4700	4700

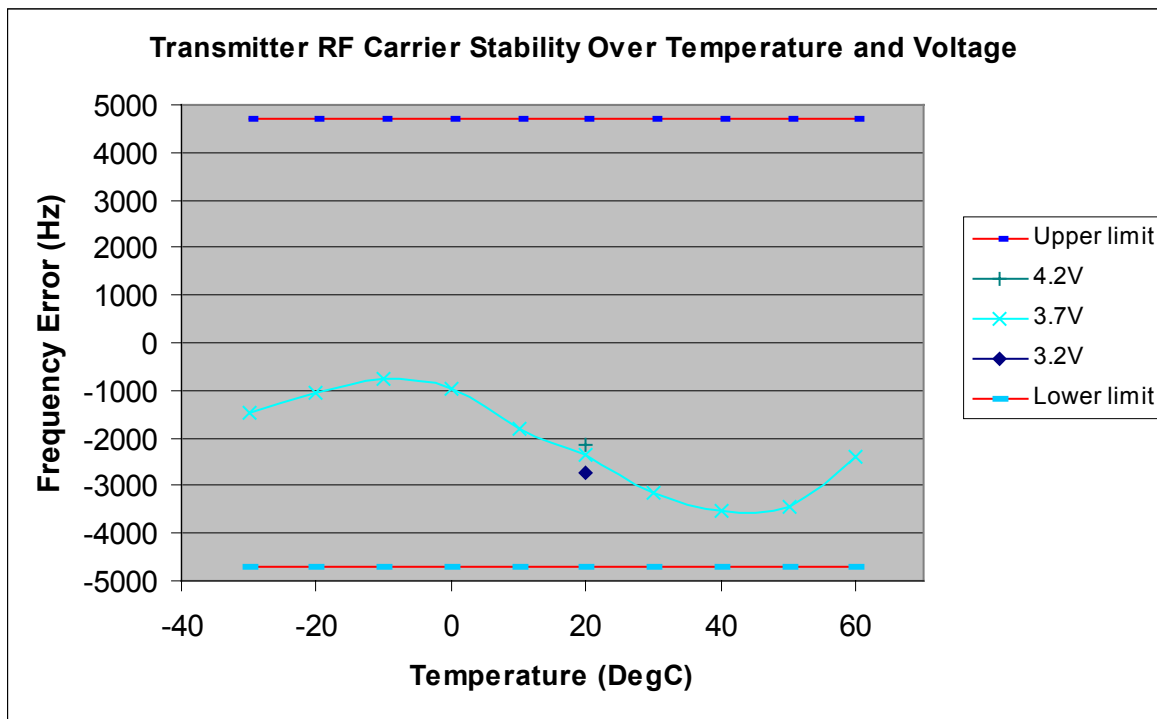

14 Exposure of Humans to RF Fields (SAR)

The SAR Test Report is showed in a separate attachment as Exhibit 9.

15 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Cal Due Date
Power Meter	Giga-tronics	8541C	1835203	01/04/04
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	04/15/04
Spectrum Analyzer	Hewlett Packard	8594E	3810A06429	11/19/03
Wireless Communications Test Set	Agilent	8960	GB41251014	11/15/04
RF communication test set	Hewlett Packard	8920B	US35320824	12/21/03
Temperature Chamber	CSZ	Z2033	Z9343034	02/14/04