

Test Report On
Single Band Single mode CDMA Cellular Phone

FCC Part 24 Certification	
FCC ID:	OVFKWC-K27-120
Models:	K27-120
Date:	January 4, 2007

STATEMENT OF CERTIFICATION	
<i>The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the measurements of the sample's radio frequency interference emissions characteristics as of the dates and at the times of the test under the conditions herein specified.</i>	
STATEMENT OF COMPLIANCE	
<i>This product has been shown to be capable of compliance with the applicable technical standards as indicted in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.</i>	
Date of Test:	January 4, 2007
Test performed by:	Kyocera Wireless Corp. 10300 Campus Point Drive San Diego, CA 92121
Report Prepared by:	Thuy To, Regulatory Engineer
Report Reviewed by:	C.K. Li, Principal Hardware Engineer
Nemko USA, Inc. performed the tests that required an OATS site.	

Table of Contents

1	GENERAL INFORMATION	3
2	PRODUCT DESCRIPTION	4
3	TEST CONFIGURATION.....	4
4	ELECTRONIC SERIAL NUMBERS (ESN) PROTECTION.....	5
5	TTY COMPLIANCE.....	5
6	TRANSMITTER RF POWER OUTPUT	6
6.1	CONDUCTED POWER	6
6.2	RADIATED POWER.....	7
7	OCCUPIED BANDWIDTH.....	8
8	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	12
9	TRANSMITTER RADIATED SPURIOUS EMISSIONS MEASURED DATA	16
10	RECEIVER SPURIOUS EMISSIONS	16
11	TRANSMITTER RF CARRIER FREQUENCY STABILITY	16
11.1	CDMA 1900 MODE.....	17
12	EXPOSURE OF HUMANS TO RF FIELDS (SAR).....	18
13	TEST EQUIPMENT	18

1 General Information

Applicant:	Kyocera Wireless Corp. 10300 Campus Point Drive San Diego CA 92121
FCC ID:	OVFKWC-K27-120
Product:	Single-Band Single-Mode Digital Phone
Model Numbers:	K27-120
EUT Serial Number:	FFSM0000000126
Type:	<input type="checkbox"/> Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production
Device Category:	Portable
RF Exposure Environment:	General Population / Uncontrolled
Antenna:	Internal
Detachable Antenna:	No
External Input:	Audio/Digital Data
Quantity:	Quantity production is planned
FCC Rule Parts:	§24E
Modes:	1900 CDMA
Multiple Access Scheme:	CDMA
TX Frequency (MHz):	1850 - 1910
Emission Designators:	1M25F9W
Max. Output Power (W):	0.19 EIRP

2 Product Description

The OVFKWC-K27-120 phones are Single Band Single mode products. The phones have assisted GPS software feature enabled to meet the emergency location requirements of the FCC’s E911 Phase II mandate. The Single mode architecture is defined as 1900MHz (PCS CDMA).

The phone is designed in compliance with the technical specifications for compatibility of mobile and base stations in the Cellular Radio telephone service contained in “Cellular System Mobile Station -Land Station Compatibility Specification” as specified in OET Bulletin 53 and TIA Standards

As described in Exhibit 1 (operation description), OVFKWC-K27-120 can operate in the CDMA mode specified in IS-2000.2 standard, release 0. It can only invoke a Spreading Rate 1 (SR1) operational mode. SR1 is defined as a 1.2288 Mcps chip rate-based system using a direct-spread single carrier, which limits the bandwidth to the same 1.25MHz bandwidth occupied by the legacy IS-95/8-A/B system. Thus, for SR1 in IS-2000, the frequency response is identical to the legacy IS-95 B system standard.

3 Test Configuration

For Part 24, all of CDMA measurements were conducted with Agilent 8960 as a base station simulator. The base station simulator establishes a CDMA link with the test device. To justify on the selection of applicable configurations, the EUT were put in varies R.C. and S.O. operation modes and the worst case is determined for final tests.

Mode	Ch/f (MHz)	EUT Configuration
CDMA-1900	600 (1880)	RC1 SO2
CDMA-1900	600 (1880)	RC3, SO2
CDMA-1900	600 (1880)	RC3, SO32 (+SCH)
CDMA-1900	600 (1880)	RC3, SO32 (+F-SCH)
CDMA-1900	600 (1880)	RC3, SO55
CDMA-1900	600 (1880)	RC4, SO55

The CDMA link was configured via 8960 for all of measurements as follows:

Radio Configuration: RC3
 Service Options: SO55
 Code domain channels: R-FCH + R-PICH
 Cell Power: -100 dBm/1.23MHz to -103 dBm/1.23MHz
 Data Rate: full rate

4 Electronic Serial Numbers (ESN) Protection

The Single mode Phone, FCC ID: OVFKWC-K27-120 uses ESN. The ESN is a unique identification number to each phone, which is contained in the Numeric Assignment Module and is automatically transmitted to the base station whenever a call is placed. The ESN is stored in an EPROM and is isolated from fraudulent contact and tampering. Any attempt to change the ESN will render the portable phone inoperative.

The phone complies with all requirements for ESN under Part 22.919.

5 TTY compliance

FCC § 255 of the Telecom Act
The OVFKWC-K27-120 phone models have been designed for TTY Compliance with Cellular Compatibility Standard.

6 Transmitter RF Power Output

6.1 Conducted Power

FCC: § 2.1046

Measurement Procedures:

The RF output power was measured using a Giga-tronics 8541C Universal Power Meter. Terminated to a resistive coaxial load of 50 ohms.

Mode	Frequency (MHz)	Channel	Power (dBm)
CDMA 1900	1851.25	25	22.75
	1880.00	600	22.80
	1908.75	1175	22.62

6.2 Radiated Power

FCC: § 24.232
Measurement Procedures:
The test was performed at an open area test site at Nemko USA, Inc. using substitution method.

Mode	Frequency (MHz)	Channel	Max. Power (dBm)	Ref.
CDMA 1900	1851.25	25	21.80	EIRP
	1880.00	600	22.90	
	1908.75	1175	22.40	

7 Occupied Bandwidth

FCC: § 2.1049, § 24.238
<p>Measurement Procedures: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The spectrum with no modulation was recorded.</p> <p><u>For Digital:</u> Modulate with full rate all up power control bit.</p>

Equipment Setting:

	Span	RBW	VBW
PCS Block-Edge Compliance	5 MHz	30kHz	30kHz

List of Figures

Figure	Mode	Description
7-1	CDMA 1900	CDMA @ CH600
7-2		ACPR Lower Band Edge @ CH 25
7-3		ACPR Upper Band Edge @ CH 1175
7-4		Lower Edge @ CH 25
7-5		Upper Edge @ CH 1175

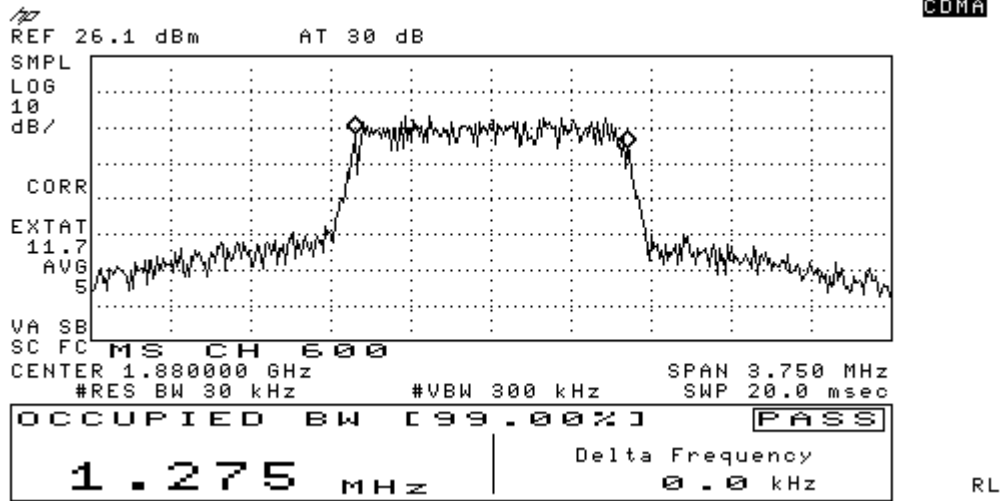


Figure 7-1 CDMA 1900 @ CH 600

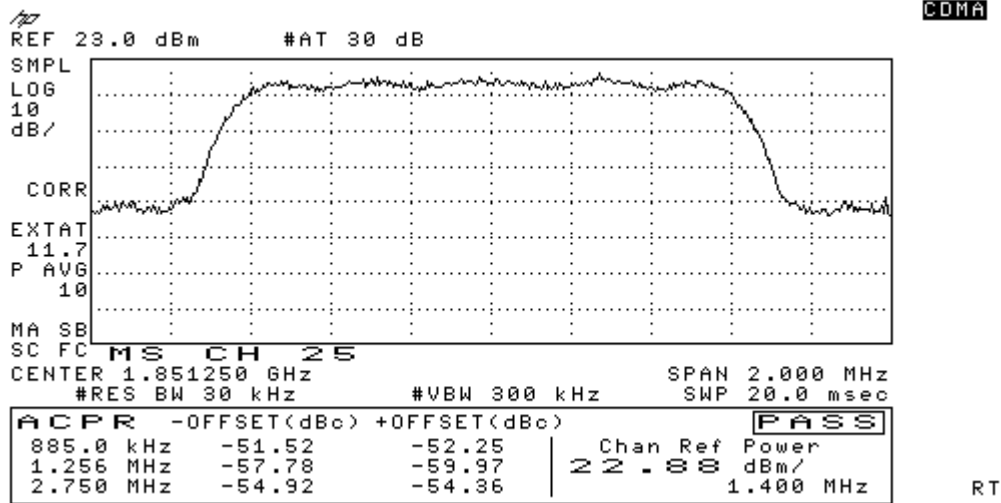


Figure 7-2 CDMA 1900 Lower Band Edge

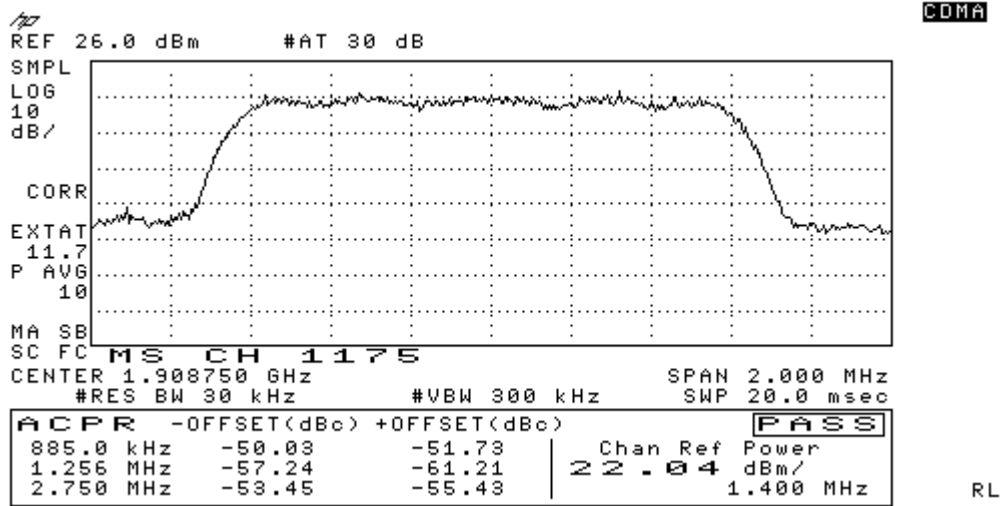


Figure 7-3 CDMA 1900 Upper Band Edge

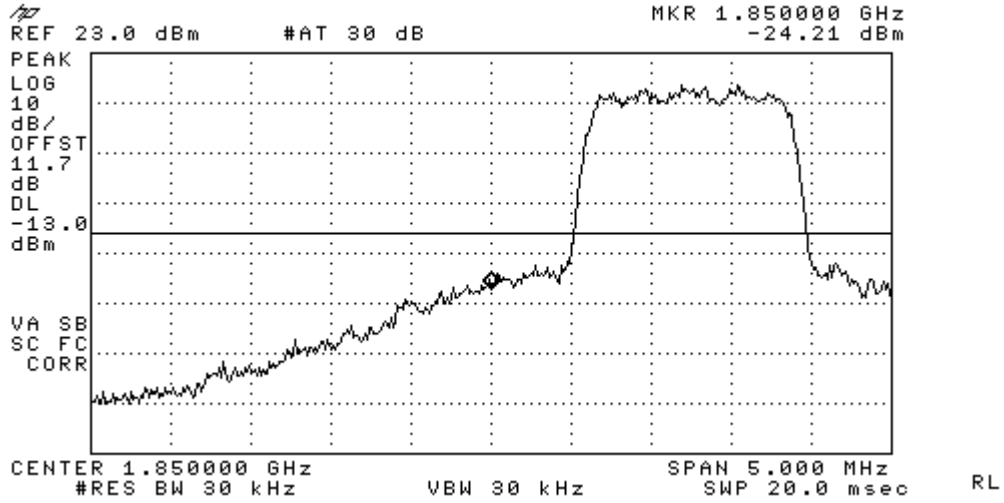


Figure 7-4 Lower edge, Channel 25

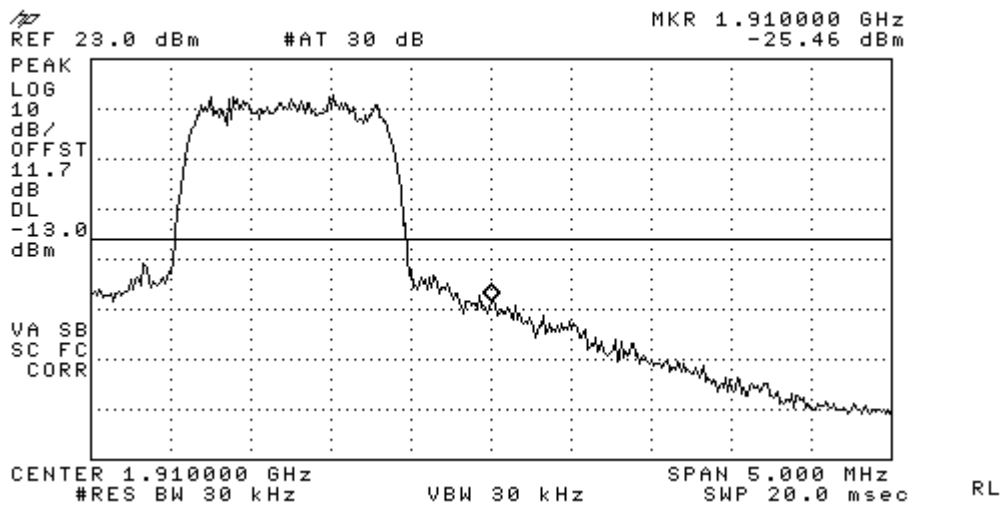


Figure 7-5 Upper edge, Channel 1175

8 Spurious Emissions At Antenna Terminals

FCC:	§ 2.1051, § 24.238
Measurement Procedures:	
<p><u>Out of Band:</u> The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.</p>	
<p><u>Base Band:</u> Spectrum was investigated from 1851-1908 MHz for PCS.</p>	

List of Figures:

Figure	Mode	Channel	Plot Description
8-1	CDMA 1900	25	Conducted spurious emissions, 9kHz to 20GHz
8-2		600	Conducted spurious emissions, 9kHz to 20GHz
8-3		1175	Conducted spurious emissions, 9kHz to 20GHz

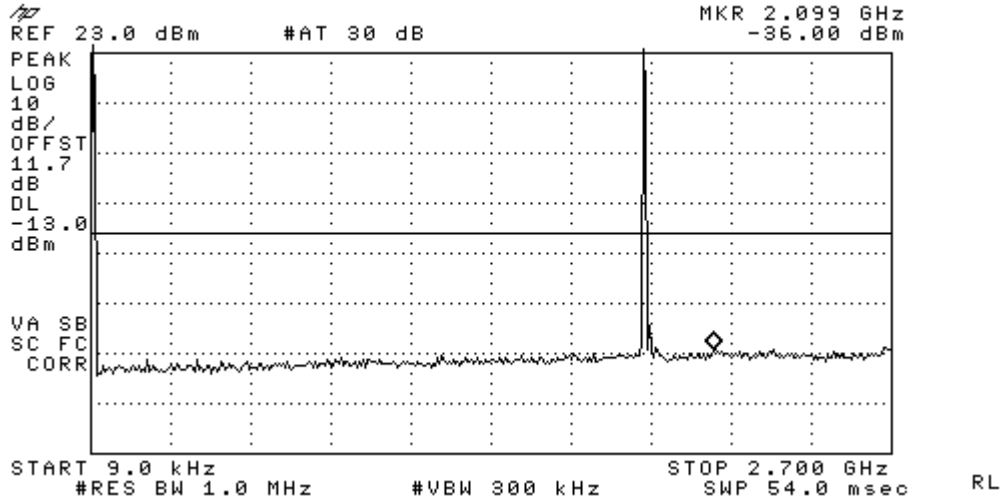


Figure 8-1a CDMA 1900 - Conducted Spurious Emission (CH 25)

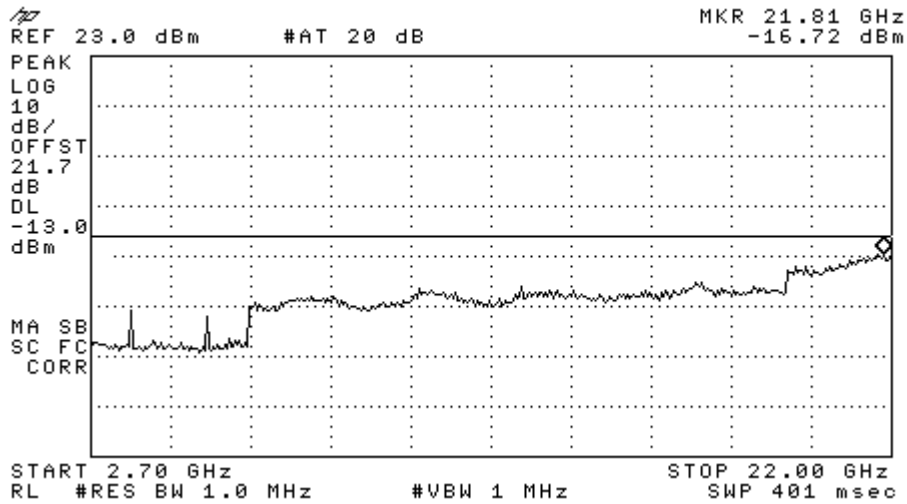


Figure 8-1b CDMA 1900 - Conducted Spurious Emission (CH 25)

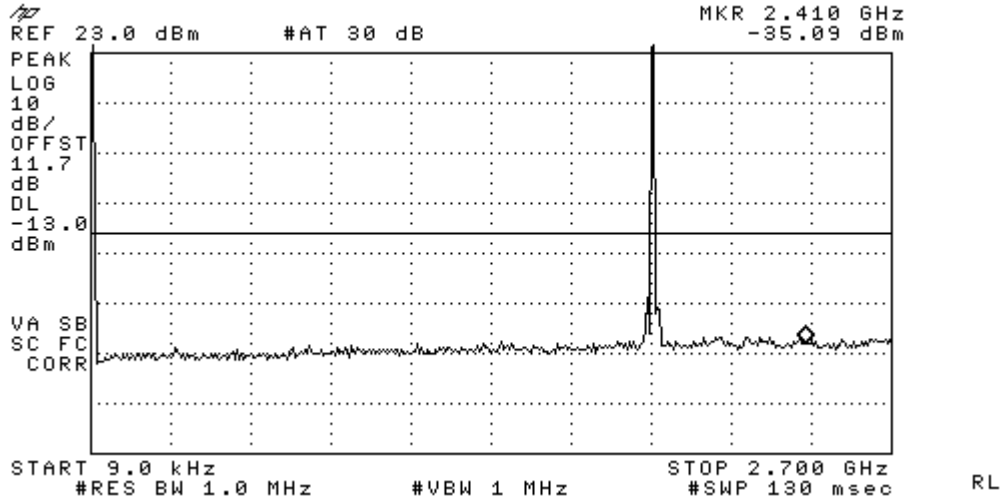


Figure 8-2a CDMA 1900 - Conducted Spurious Emission (CH 600)

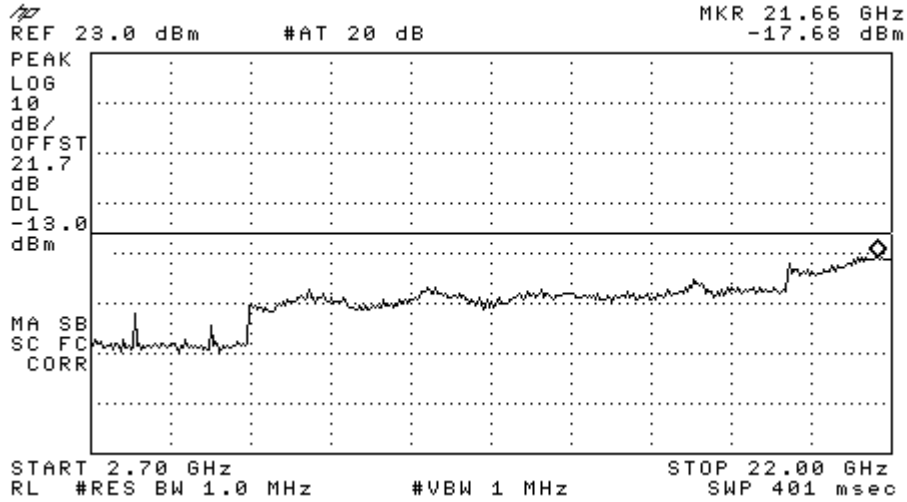


Figure 8-2b CDMA 1900 - Conducted Spurious Emission (CH 600)

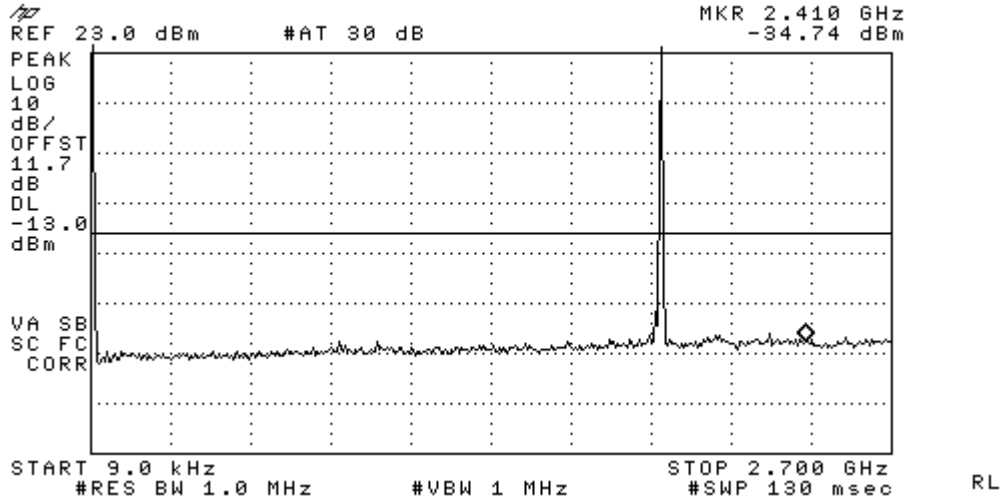


Figure 8-3a CDMA 1900 - Conducted Spurious Emission (CH 1175)

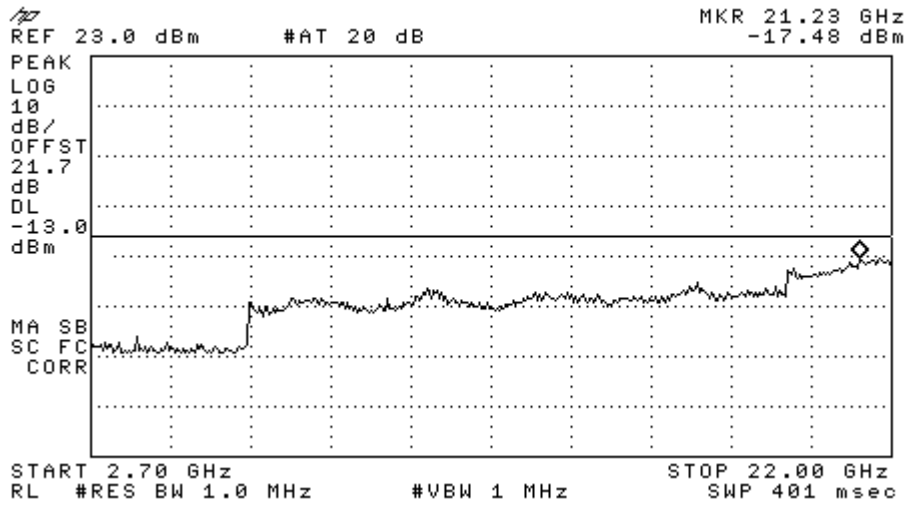


Figure 8-3b CDMA 1900 - Conducted Spurious Emission (CH 1175)

9 Transmitter Radiated Spurious Emissions Measured Data

FCC: § 2.1053, § 24.238

Measurement Procedures:

The radiated spurious emission test was performed at Nemko in San Diego, California. The test report is attached in a separate attachment.

10 Receiver Spurious Emissions

FCC: § 15.109

Measurement Procedures:

The receiver radiated spurious emission test was performed at Nemko in San Diego, California. The test report is attached in a separate attachment.

11 Transmitter RF Carrier Frequency Stability

FCC: § 2.1055, § 24.235


Measurement Procedures:

The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply.

11.1 CDMA 1900 Mode

Tx Frequency:	1880.00 MHz	Voltage :	3.7V
Tolerance:	+/- 2.5 ppm (+/-4700 Hz)	Ch:	600

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.2V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-0.48		-4700	4700
-20		1.43		-4700	4700
-10		-0.21		-4700	4700
0		0.12		-4700	4700
10		0.53		-4700	4700
20	0.44	-0.74	1.46	-4700	4700
30		0.89		-4700	4700
40		1.35		-4700	4700
50		-0.76		-4700	4700
60		1.33		-4700	4700

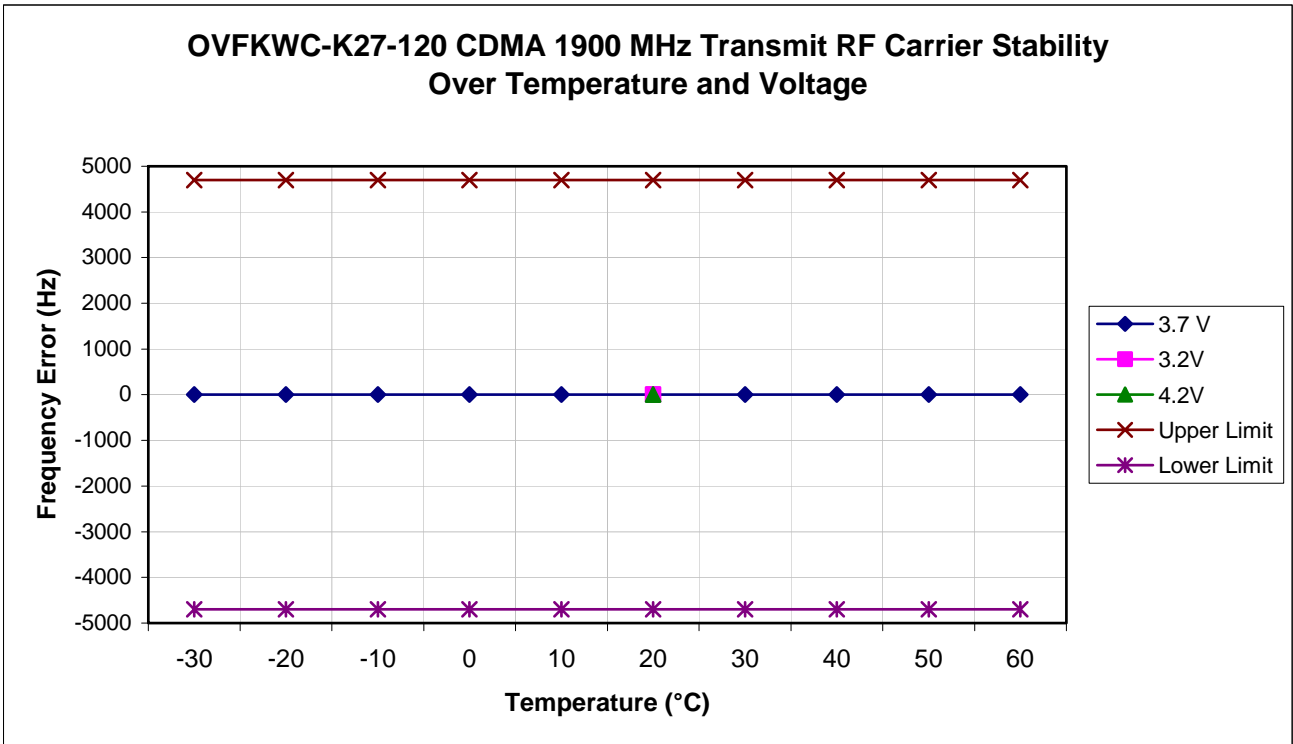

12 Exposure of Humans to RF Fields (SAR)

The SAR Test Report is shown in Exhibit 9 on a separate attachment.

13 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Cal Due Date
Power Meter	Giga-tronics	8541C	1834884	03/03/07
Power Meter Sensor	Giga-tronics	80601A	1831770	05/12/07
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	03/23/07
Spectrum Analyzer	Hewlett Packard	8595E	3911A03899	07/11/07
Wireless Communications Test Set	Agilent	8960	US41140252	06/02/07
Temperature Chamber	CSZ Dimension II	945	N/A	08/23/07