

**Appendix B1:**  
**SAR Distribution Plots (Head)**

Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 CDMA-800 ch777 Left Cheek

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated):  $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.928 \text{ mho/m}$ ;  $\epsilon_r = 42$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Left Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(6.58, 6.58, 6.58), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

## CDMA-800 Ch777 LC/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 10.2 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.988 mW/g; SAR(10 g) = 0.674 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.06 mW/g

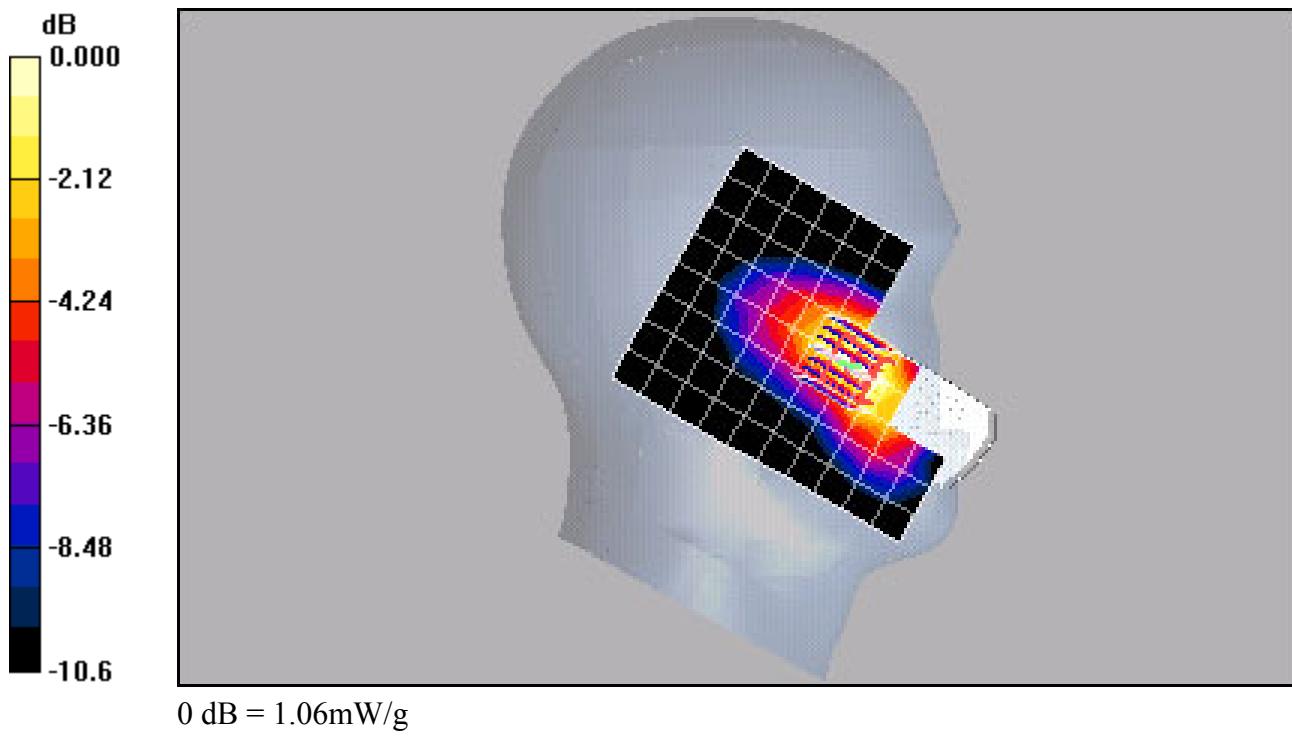

Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 CDMA-800 ch383 Left Tilt

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated):  $f = 836.49$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom: SAM 12, Phantom section: Left Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(6.58, 6.58, 6.58), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

## CDMA-800 Ch383 LT/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.01 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.209 W/kg

**SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.139 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.188 mW/g

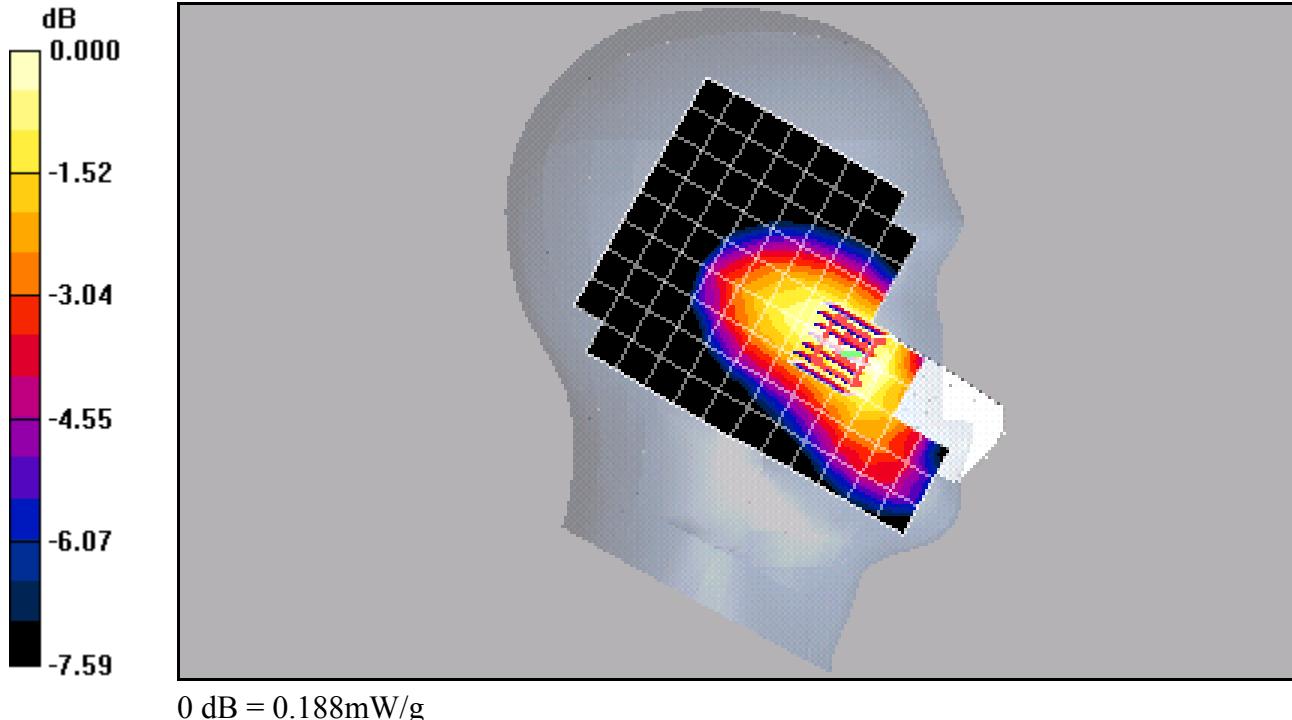

Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 CDMA-800 ch777 Right Cheek

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated):  $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.928 \text{ mho/m}$ ;  $\epsilon_r = 42$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Right Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(6.58, 6.58, 6.58), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

## PCS Ch777 RC/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.4 V/m; Power Drift = -0.083 dB


Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.763 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 mW/g

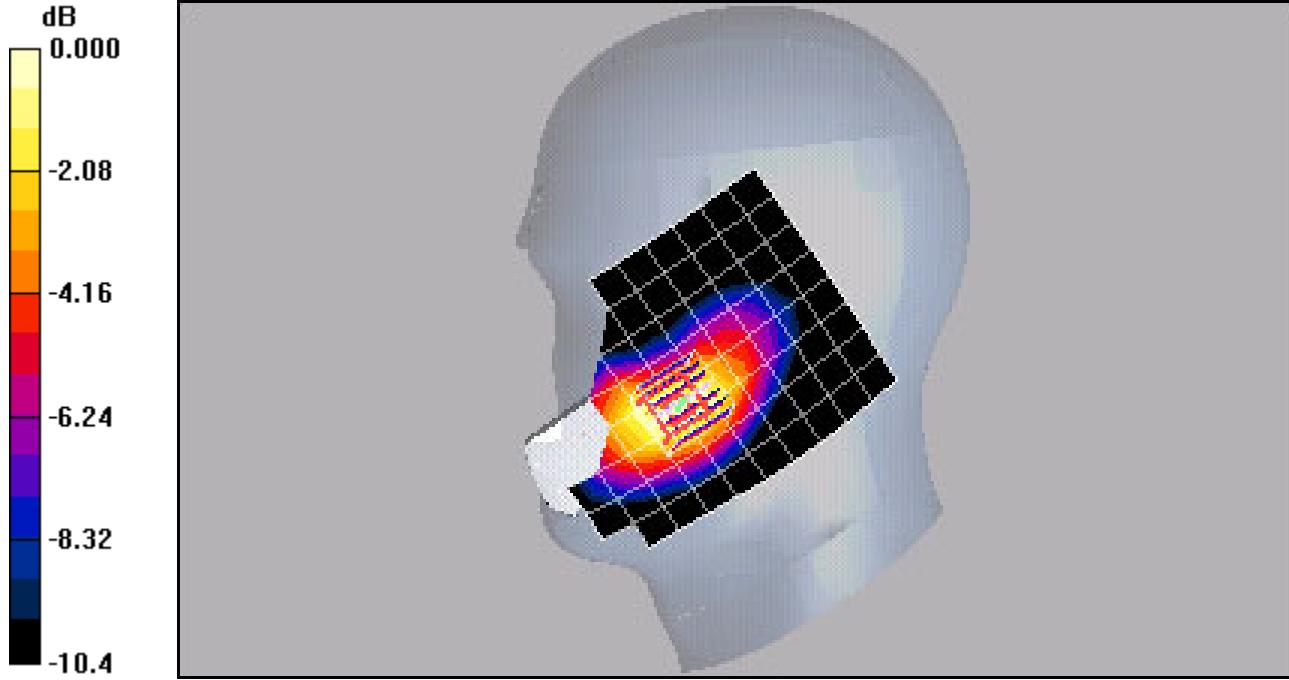

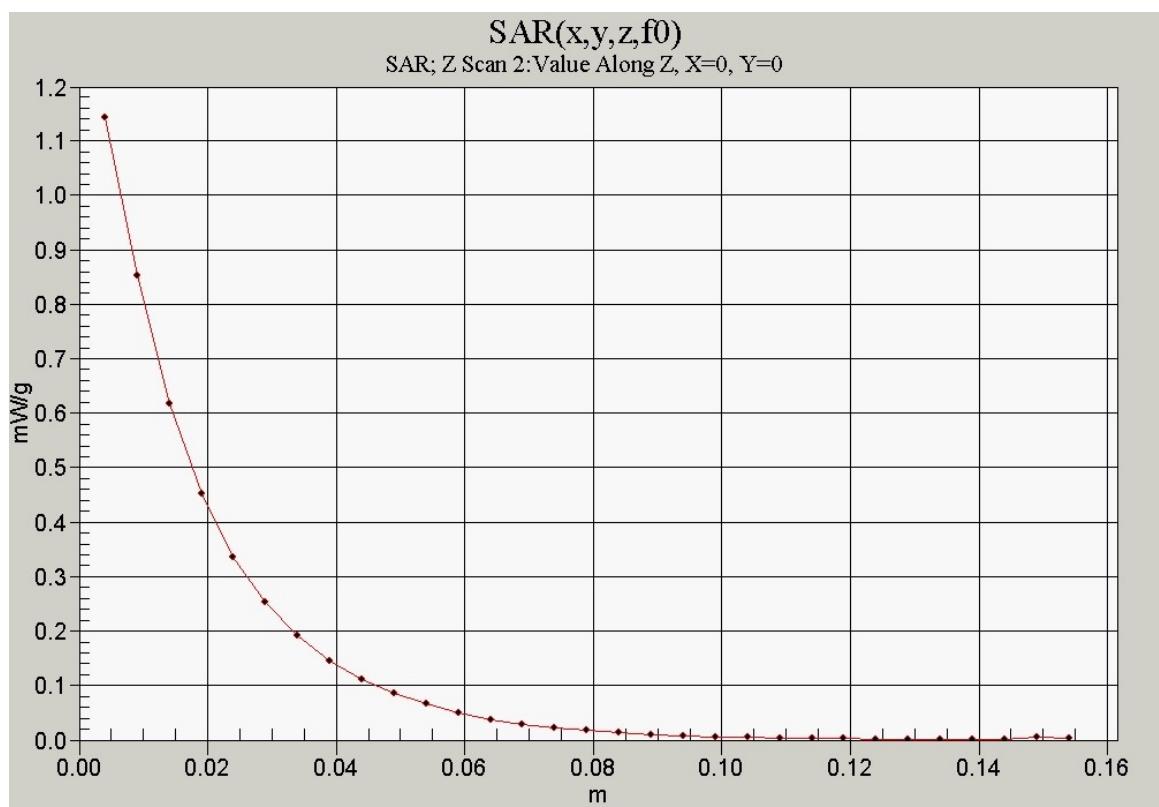

Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 CDMA-800 ch383 Right Tilt

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated):  $f = 836.49$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom: SAM 12, Phantom section: Right Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(6.58, 6.58, 6.58), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

## PCS Ch383 RT/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.2 V/m; Power Drift = 0.093 dB

Peak SAR (extrapolated) = 0.288 W/kg

**SAR(1 g) = 0.231 mW/g; SAR(10 g) = 0.176 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.246 mW/g

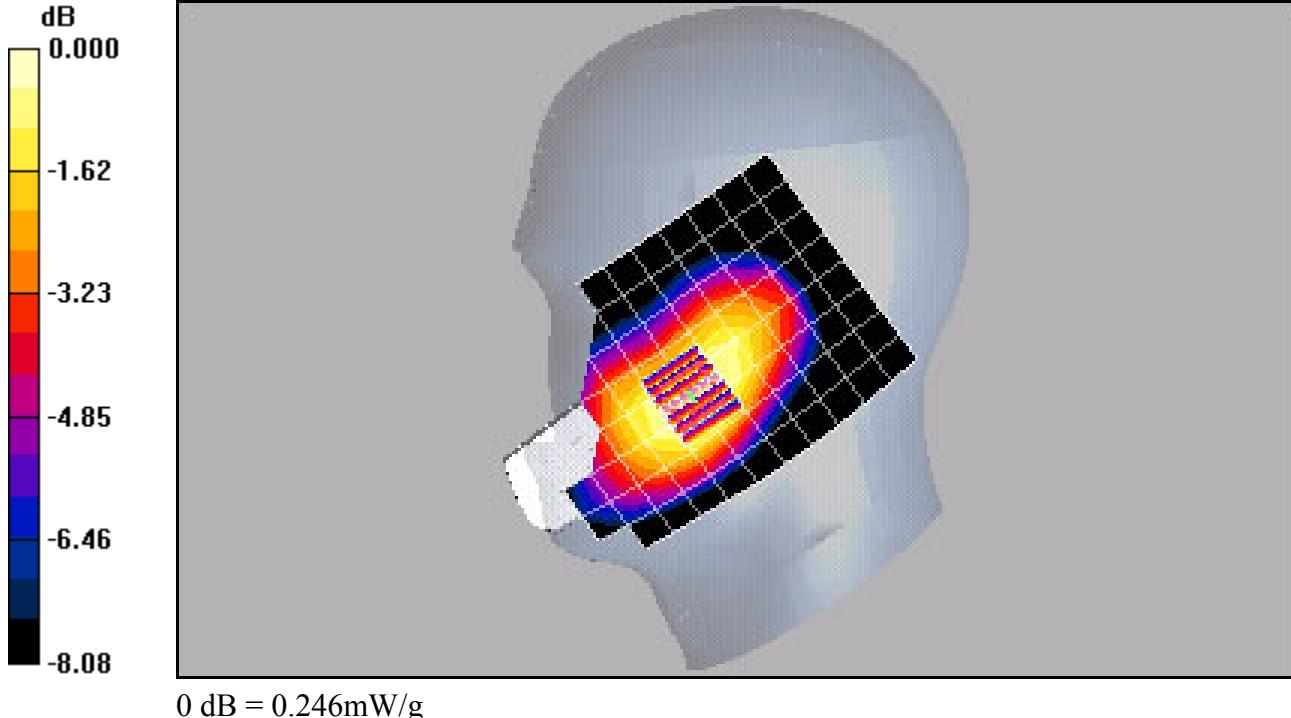

Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 PCS ch25 Left Cheek

Communication System: CDMA-1900, Frequency: 1851.25 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used (extrapolated):  $f = 1851.25$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom: SAM 12, Phantom section: Left Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(5.05, 5.05, 5.05), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

## PCS Ch25 LC/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 10.4 V/m; Power Drift = -0.224 dB

Peak SAR (extrapolated) = 1.69 W/kg

**SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.657 mW/g**

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

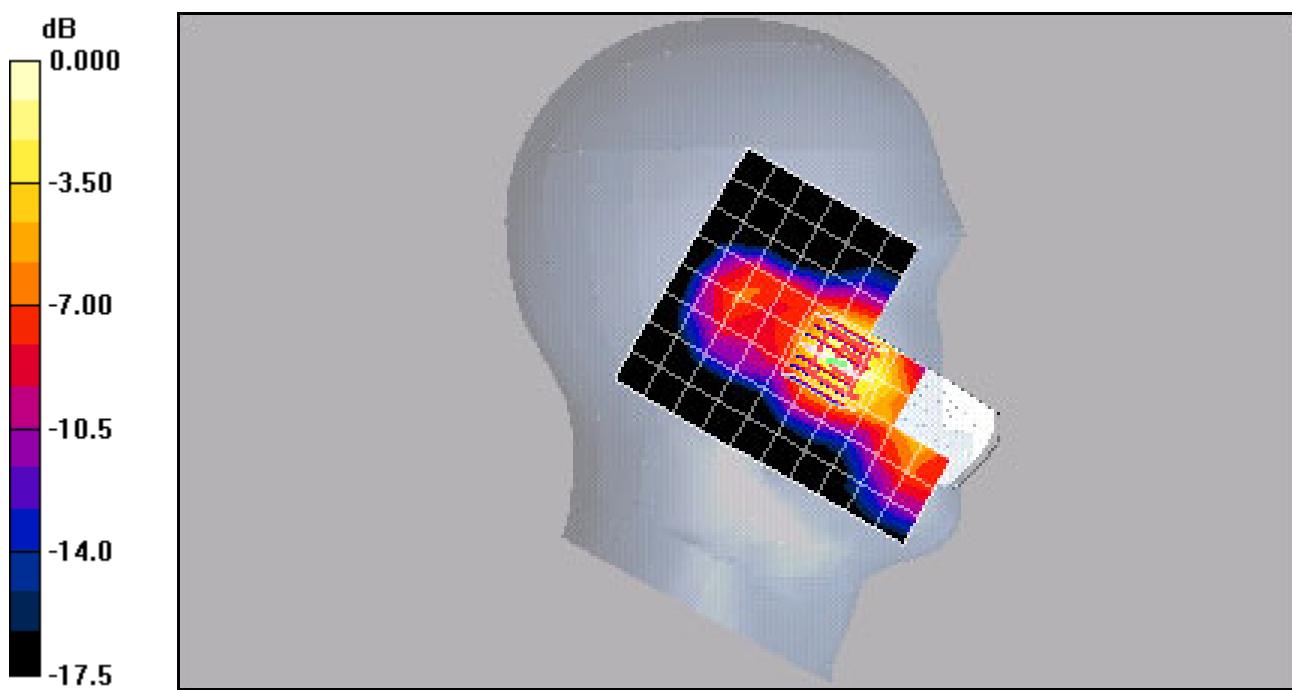

Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 PCS ch600 Left Tilt

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom: SAM 12, Phantom section: Left Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(5.05, 5.05, 5.05), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


## PCS Ch600 LT/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.180 mW/g

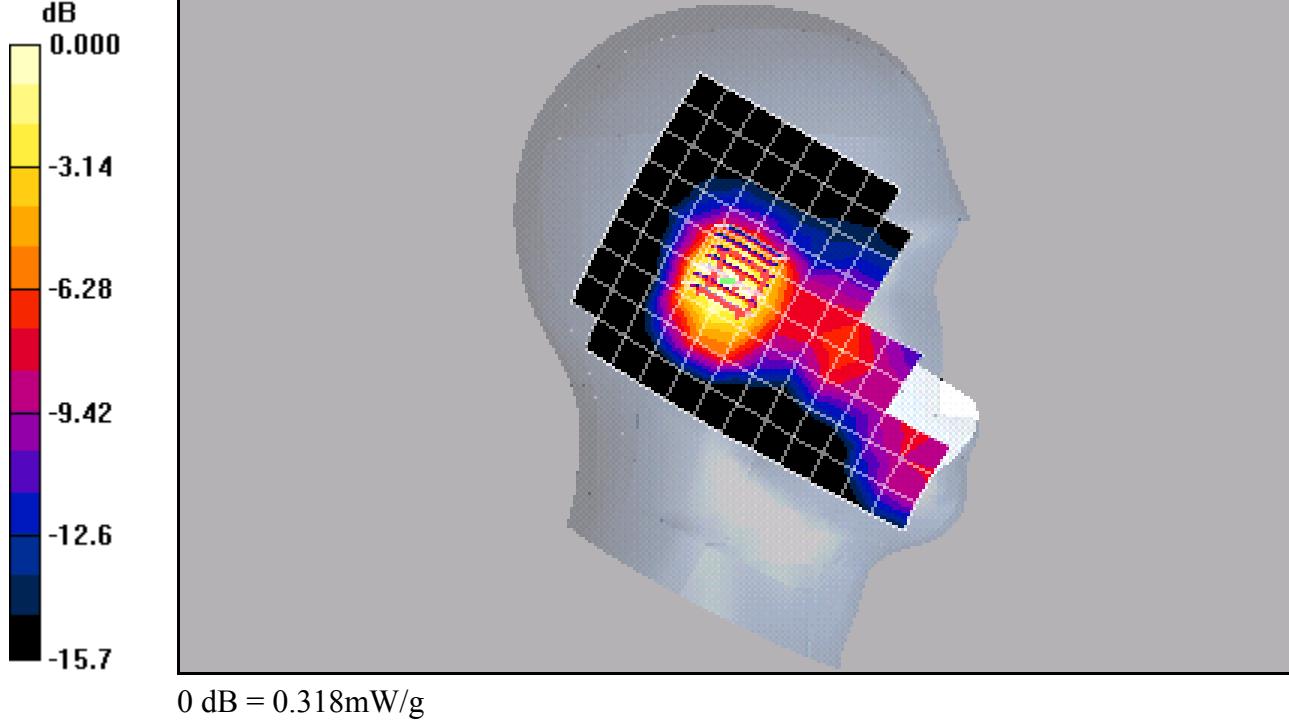

Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 PCS ch600 Right Cheek

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom: SAM 12, Phantom section: Right Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(5.05, 5.05, 5.05), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

## PCS Ch600 RC/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.721 mW/g**

Maximum value of SAR (measured) = 1.39 mW/g

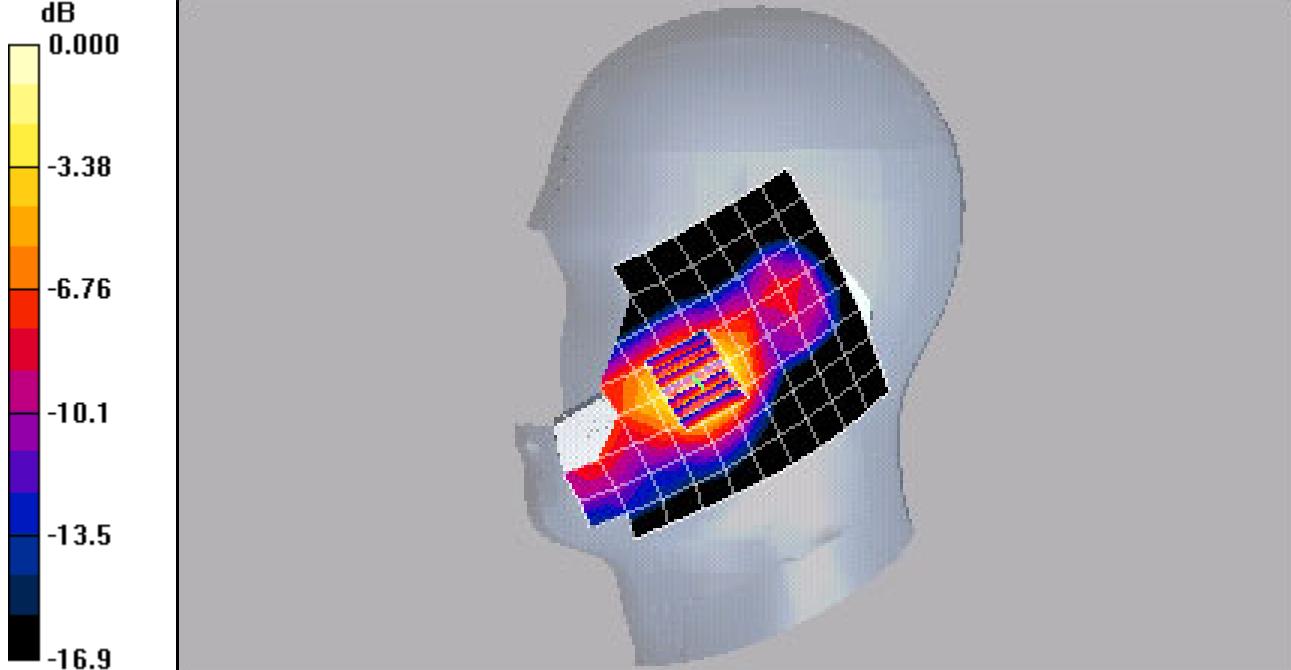

0 dB = 1.39mW/g

SAR(x,y,z,f0)  
SAR; Z Scan 2:Value Along Z, X=0, Y=0



Test Laboratory: Kyocera-Wireless Corp.

## K27 #YMD8 PCS ch600 Right Tilt

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.39 \text{ mho/m}$ ;  $\epsilon_r = 39.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Right Section

### DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(5.05, 5.05, 5.05), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

## PCS Ch600 RT/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.418 W/kg

**SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.187 mW/g**

Maximum value of SAR (measured) = 0.314 mW/g

