

Appendix A: Validation Test Plots

Test Laboratory: Kyocera-Wireless Corp.

835Mhz Validation @ 20dBm Probe 1664, DAE 527 and Dipole 453

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used: $f = 835$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(6.77, 6.77, 6.77), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527,Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


835Mhz Validation @ 20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.6 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.602 mW/g

Maximum value of SAR (measured) = 0.995 mW/g

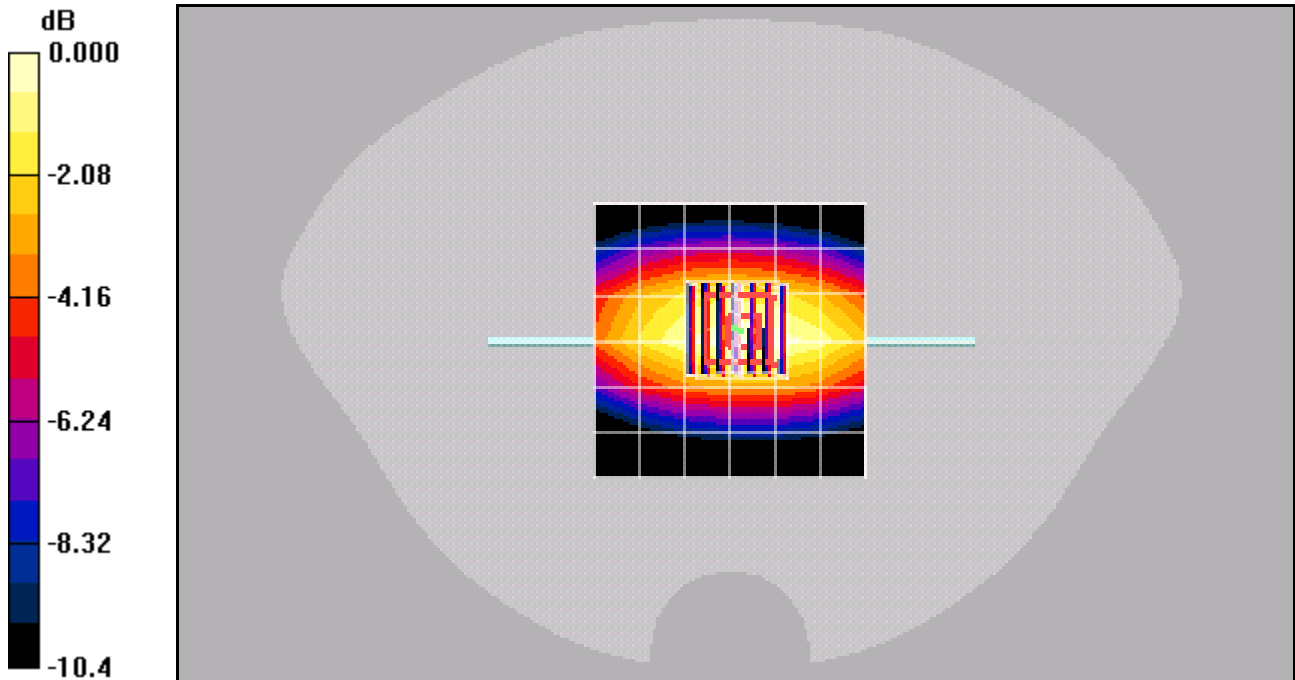

0 dB = 0.995mW/g

Test Laboratory: Kyocera-Wireless Corp.

1900Mhz Validation @ 20dBm Probe 1664, DAE 527 and Dipole 5d003

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(5.05, 5.05, 5.05), Calibrated: 6/22/2006

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn527,Calibrated: 9/22/2005

Measurement SW: DASY4, V4.6 Build 23

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900MHz Validation @ 20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 58.6 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 6.58 W/kg

SAR(1 g) = 3.82 mW/g; SAR(10 g) = 2.03 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.30 mW/g

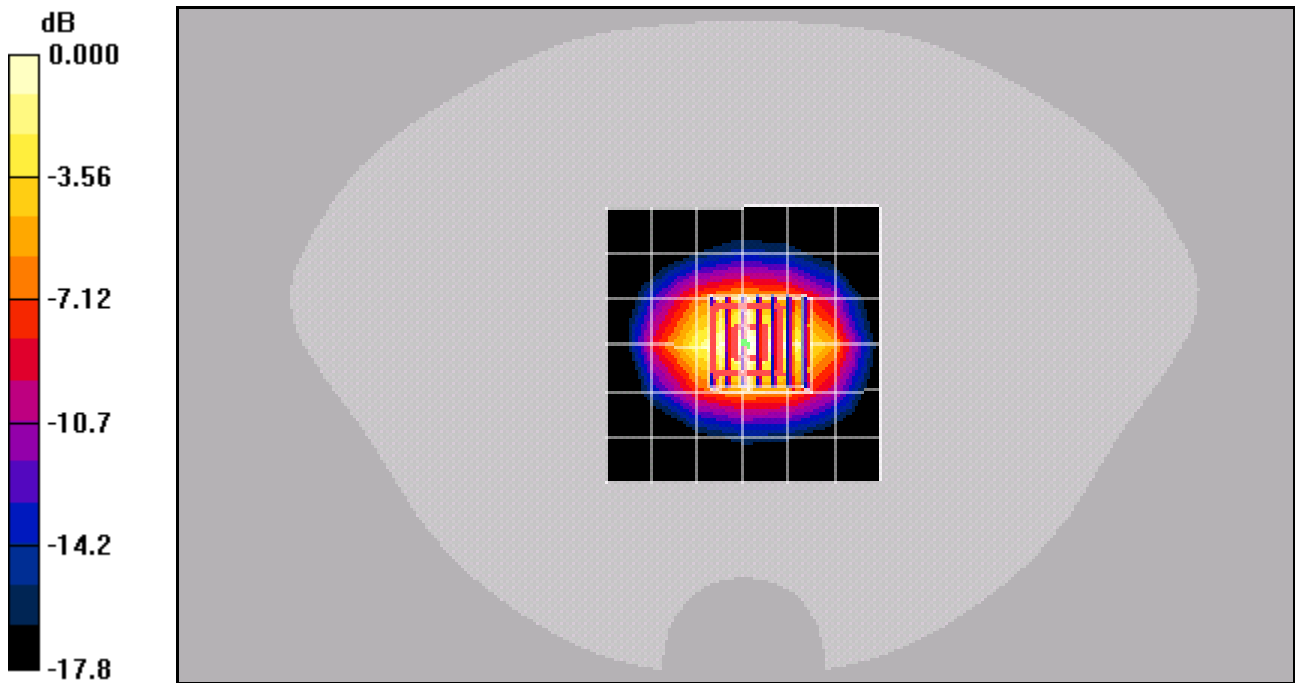

0 dB = 4.30mW/g