

Test Laboratory: Compliance Certification Services
 File Name: [Ch 1013 - RC1 SO3 8k Enhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.33561 dB

BWC Factor = 10.8 dB

Location: 1.5, -5.5, 366.2 mm

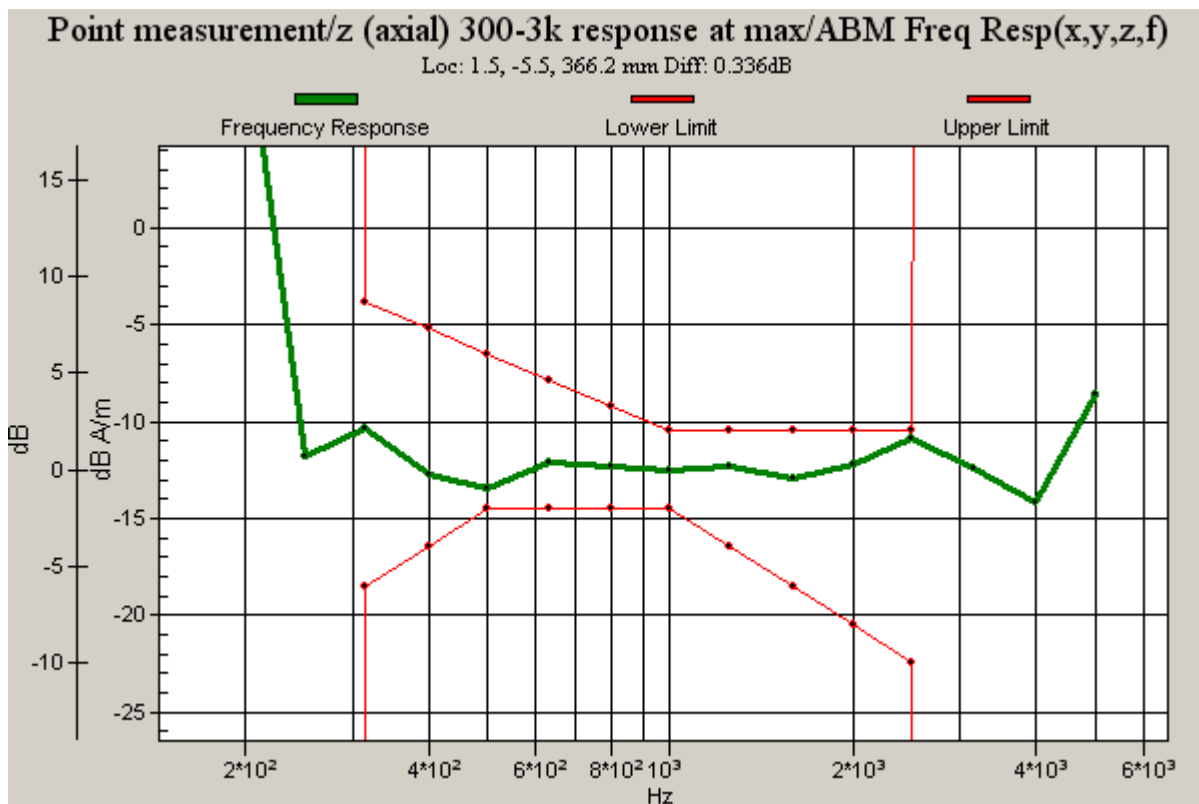

Test Laboratory: Compliance Certification Services
 File Name: [Ch 383 - RC1 SO3 8K Enhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.704706 dB

BWC Factor = 10.8 dB

Location: -0.3, 0.3, 365 mm

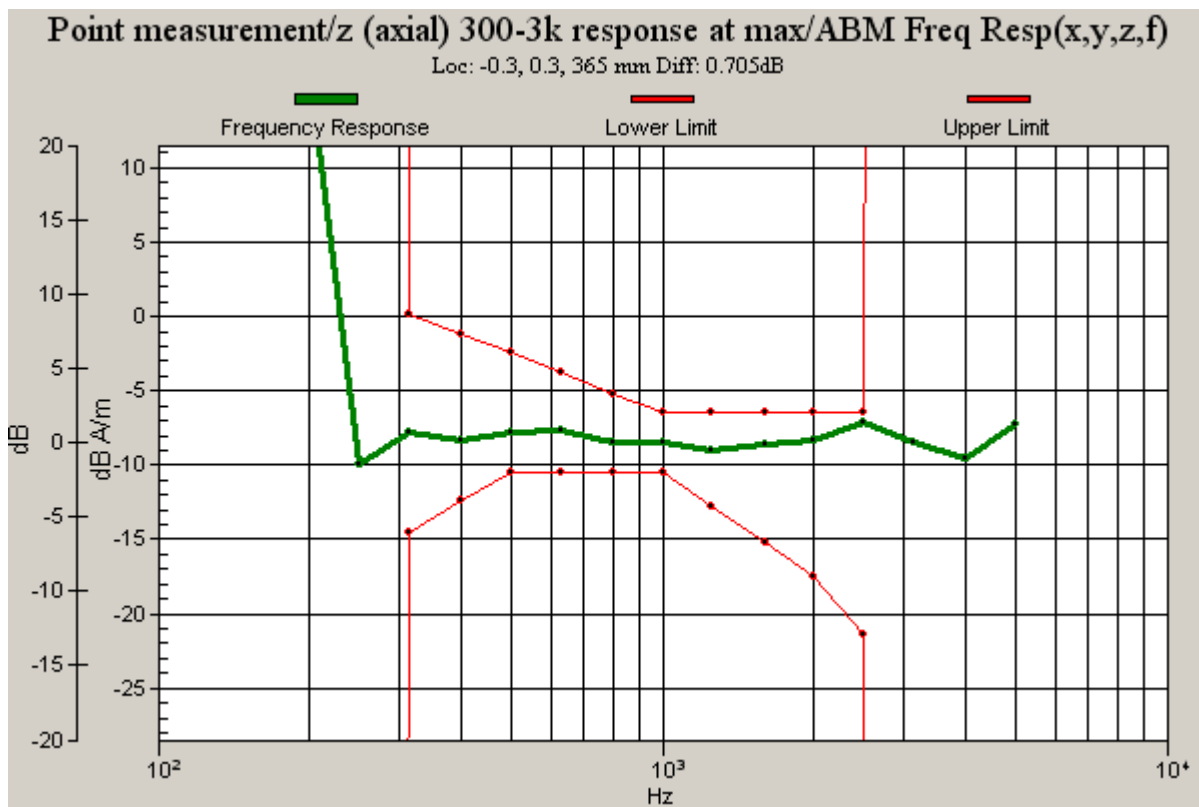

Test Laboratory: Compliance Certification Services
 File Name: [Ch 777- RC1 SO3 8k Enhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.365249 dB

BWC Factor = 10.8 dB

Location: 1.5, -3.5, 366.2 mm

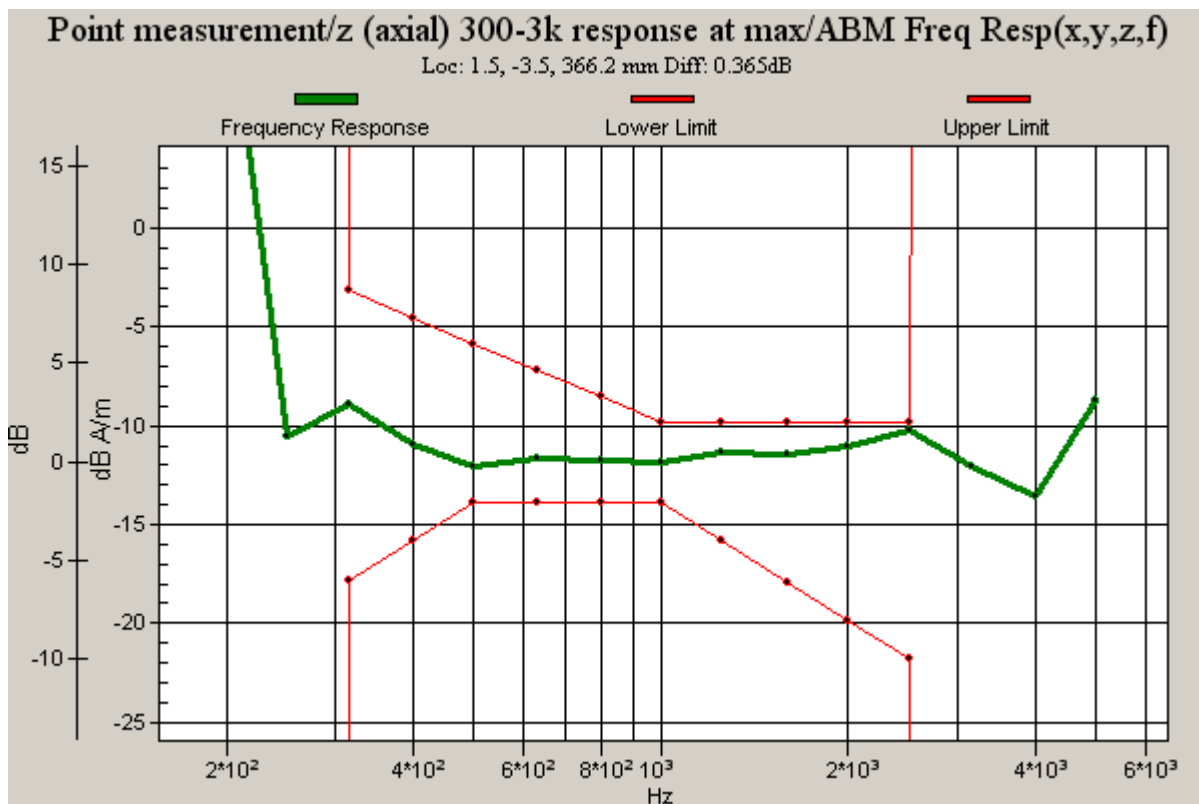

Test Laboratory: Compliance Certification Services
 File Name: [Ch 383 - RC3 SO3 8K Enhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.511534 dB

BWC Factor = 10.8 dB

Location: -4, 2, 363.7 mm

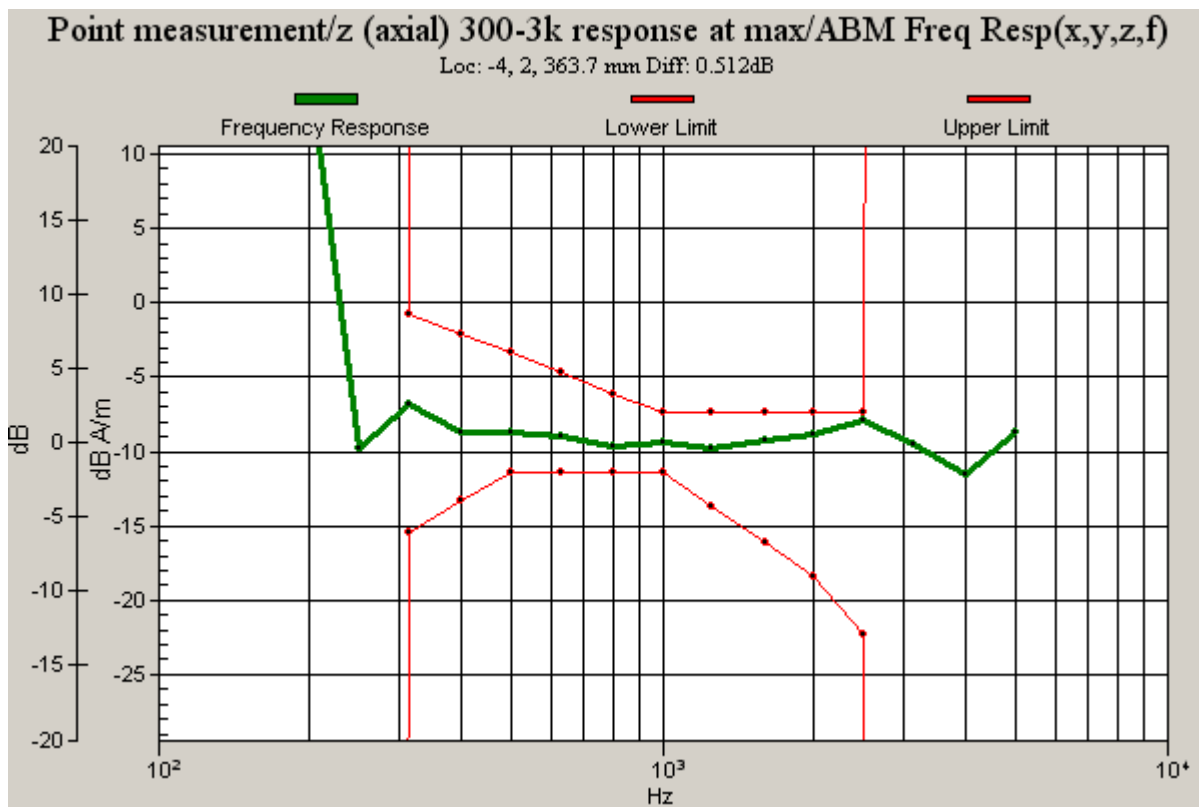

Test Laboratory: Compliance Certification Services
 File Name: [Ch 383 - RC43 SO3 8K Enhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.909822 dB

BWC Factor = 10.8 dB

Location: -2, -2, 363.7 mm

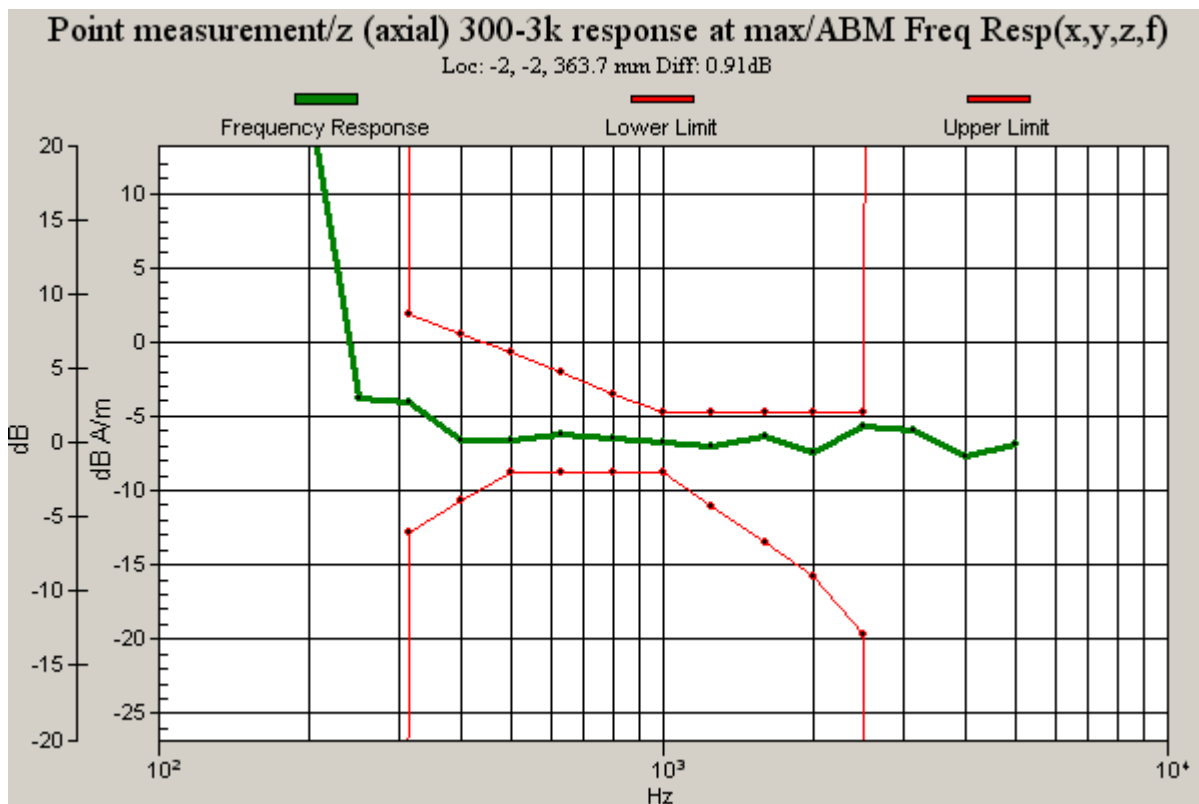

Test Laboratory: Compliance Certification Services
 File Name: [Ch 600 - RC1 SO3 8k Enhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.339421 dB

BWC Factor = 10.8 dB

Location: -4, 0, 363.7 mm

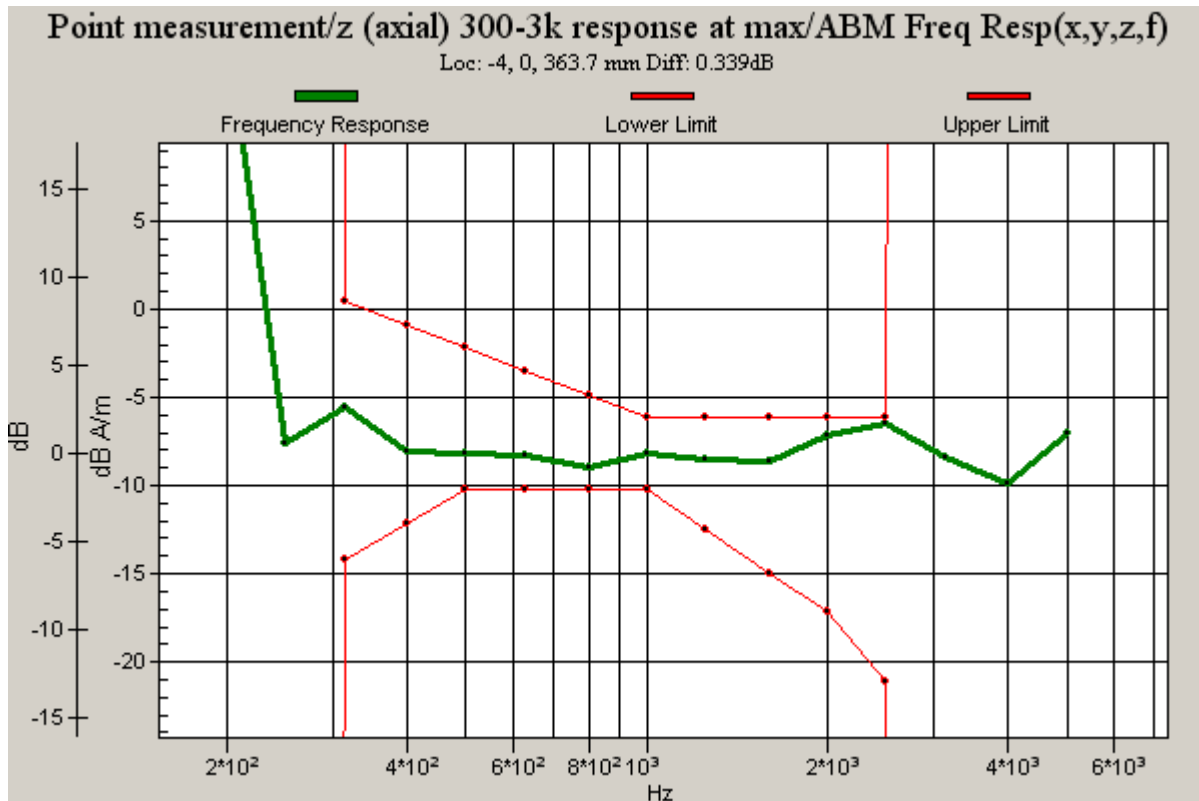

Test Laboratory: Compliance Certification Services
 File Name: [ch 25 RC3 SO3 8kEnhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.282663 dB

BWC Factor = 10.8 dB

Location: -0.3, -5.7, 365 mm

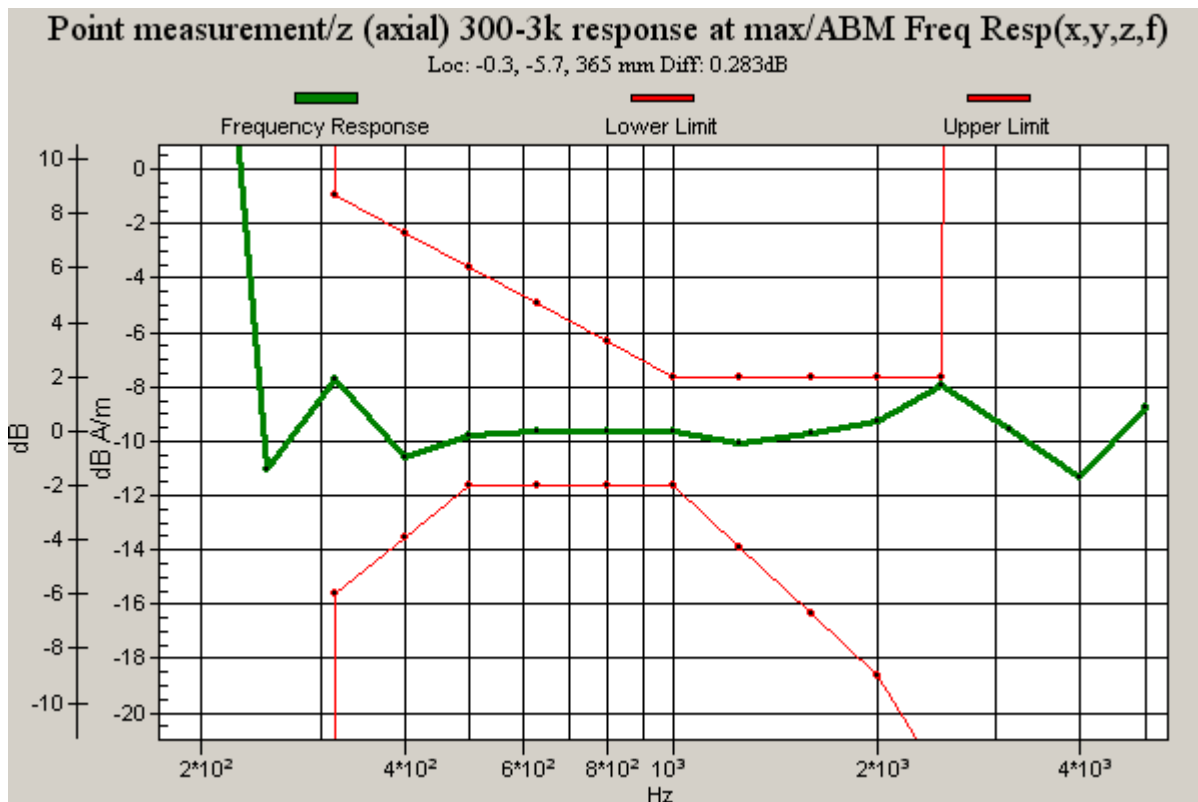

Test Laboratory: Compliance Certification Services
 File Name: [ch 600 RC3 SO3 8kEnhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.221011 dB

BWC Factor = 10.8 dB

Location: -0.3, -1.7, 365 mm

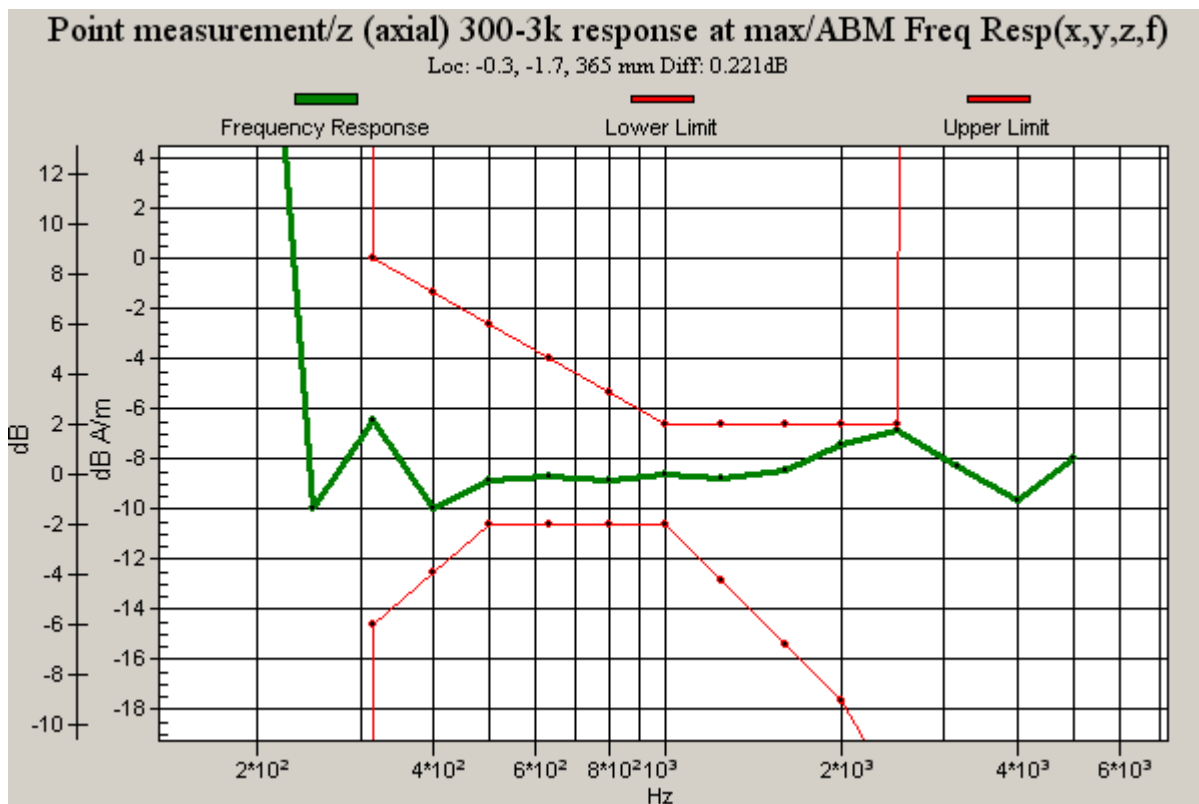

Test Laboratory: Compliance Certification Services
 File Name: [ch 1175 RC3 SO3 8kEnhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.415101 dB

BWC Factor = 10.8 dB

Location: -2.3, -1.7, 365 mm

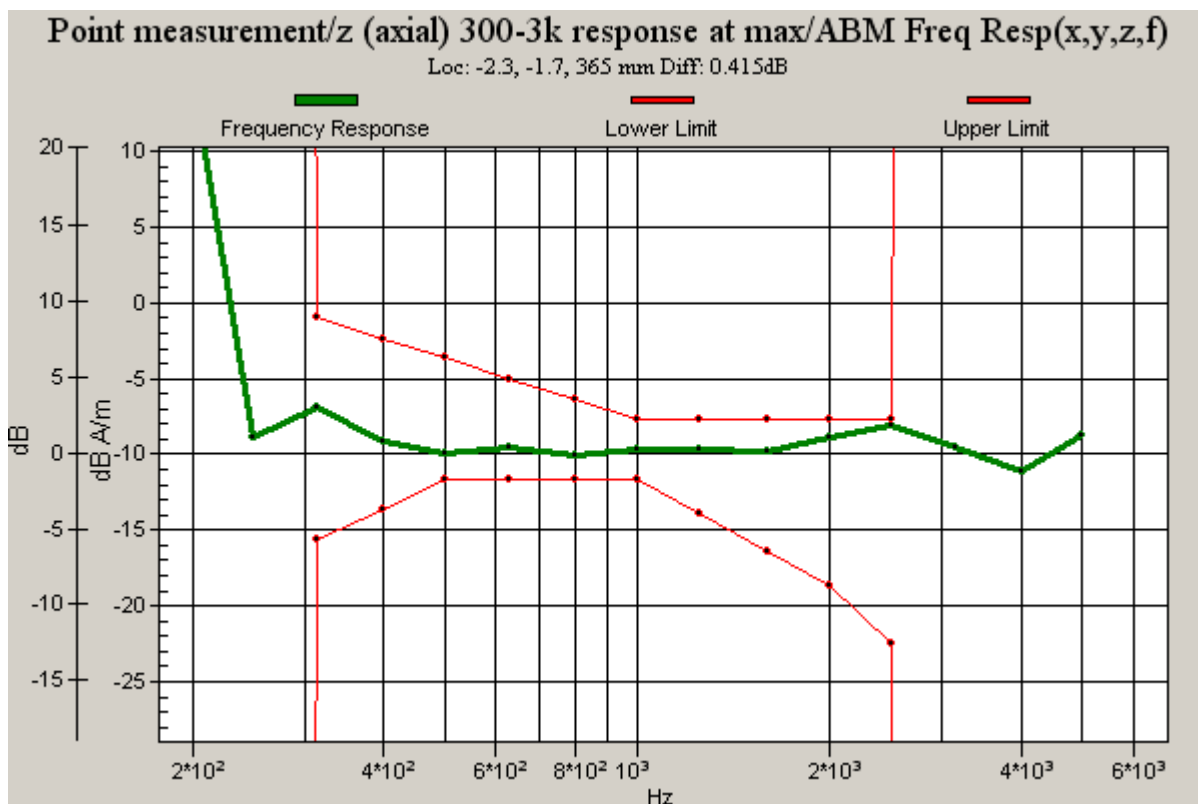

Test Laboratory: Compliance Certification Services
 File Name: [ch 600 RC43 SO3 8kEnhanced Low.da4](#)

DUT: Kyocera; Type: K132; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.225268 dB

BWC Factor = 10.8 dB

Location: -2.3, -3.7, 365 mm

