

Kyocera Wireless Corp.

File Name: [Validation E-Field Probe SN2341, Dipole SN1015, 1880Mhz, Feb 06,08.da4](#)

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:


- Probe: ER3DV6 - SN2341; ConvF(1, 1, 1); Calibrated: 4/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn494; Calibrated: 3/14/2007
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

E-Field Scan/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 146.5 V/m

Probe Modulation Factor = 1.00

Reference Value = 74.7 V/m; Power Drift = 0.038 dB

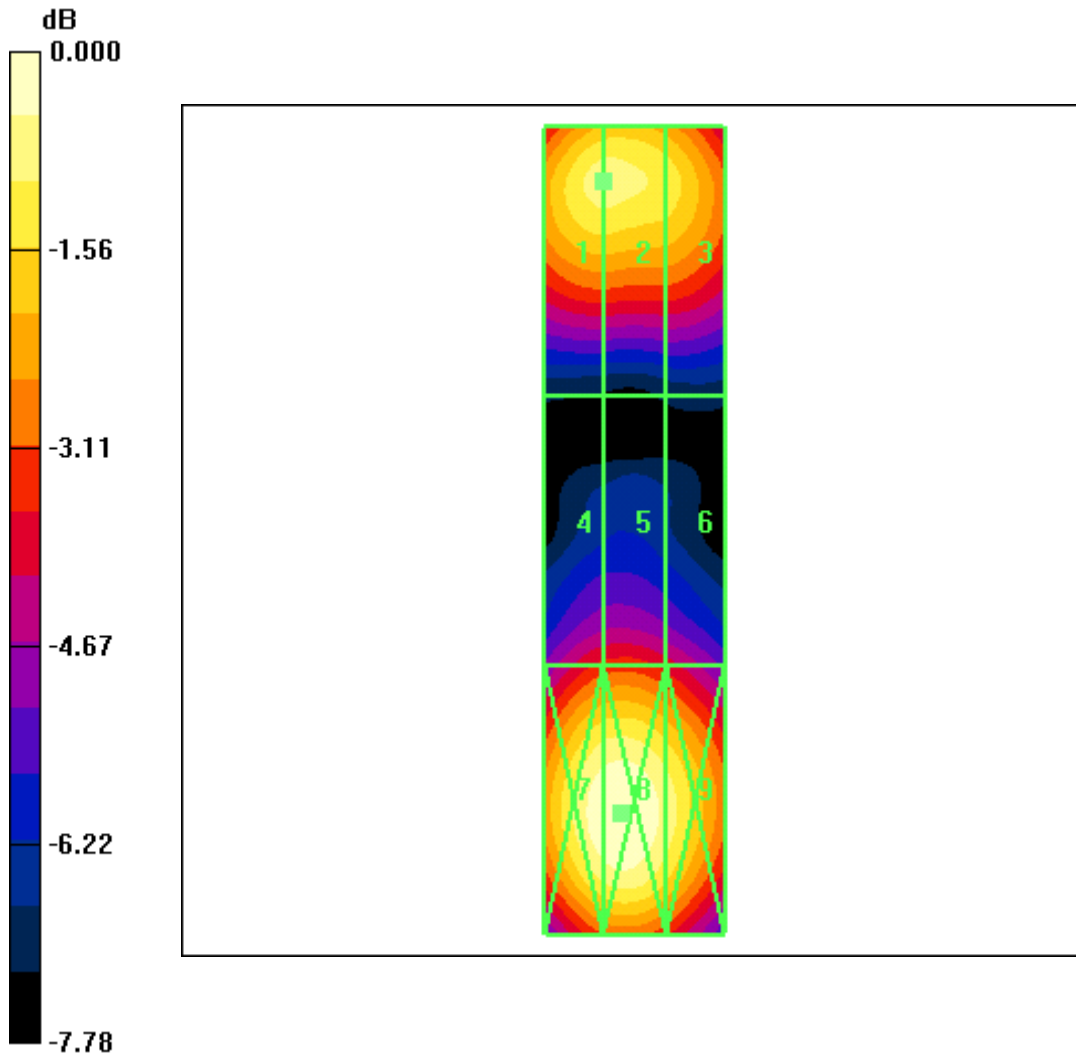

0 dB = 146.5V/m

Kyocera Wireless Corp.

File Name: [Validation H-Field Probe SN6029, Dipole SN1015, 1880Mhz, Feb 06, 08.da4](#)


Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:

- Probe: H3DV5 - SN6029; ; Calibrated: 7/17/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn494; Calibrated: 3/14/2007
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

H-Field Scan/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.491 A/m
Probe Modulation Factor = 1.00
Reference Value = 0.535 A/m; Power Drift = -0.021 dB

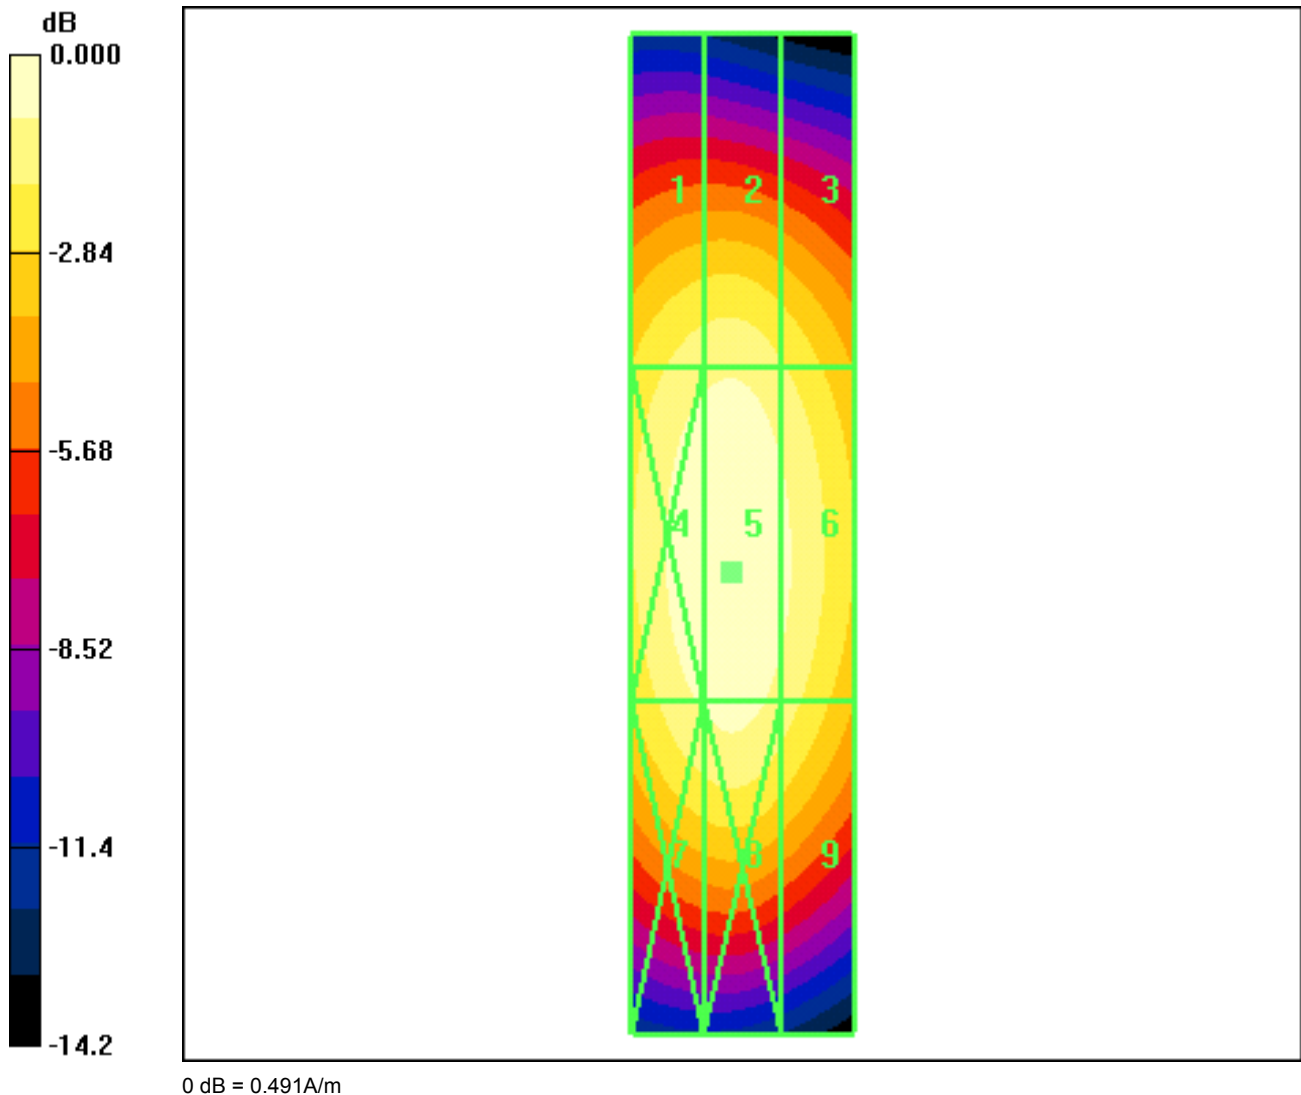

Kyocera Wireless Corp.

File Name: [Validation E-Field Probe SN2341, Dipole SN1020, 835Mhz, Feb 06.08.da4](#)

Communication System: CDMA; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: E Device Section

DASY4 Configuration:


- Probe: ER3DV6 - SN2341; ConvF(1, 1, 1); Calibrated: 4/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn494; Calibrated: 3/14/2007
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

E-Field Scan/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 168.4 V/m

Probe Modulation Factor = 1.00

Reference Value = 55.9 V/m; Power Drift = -0.064 dB

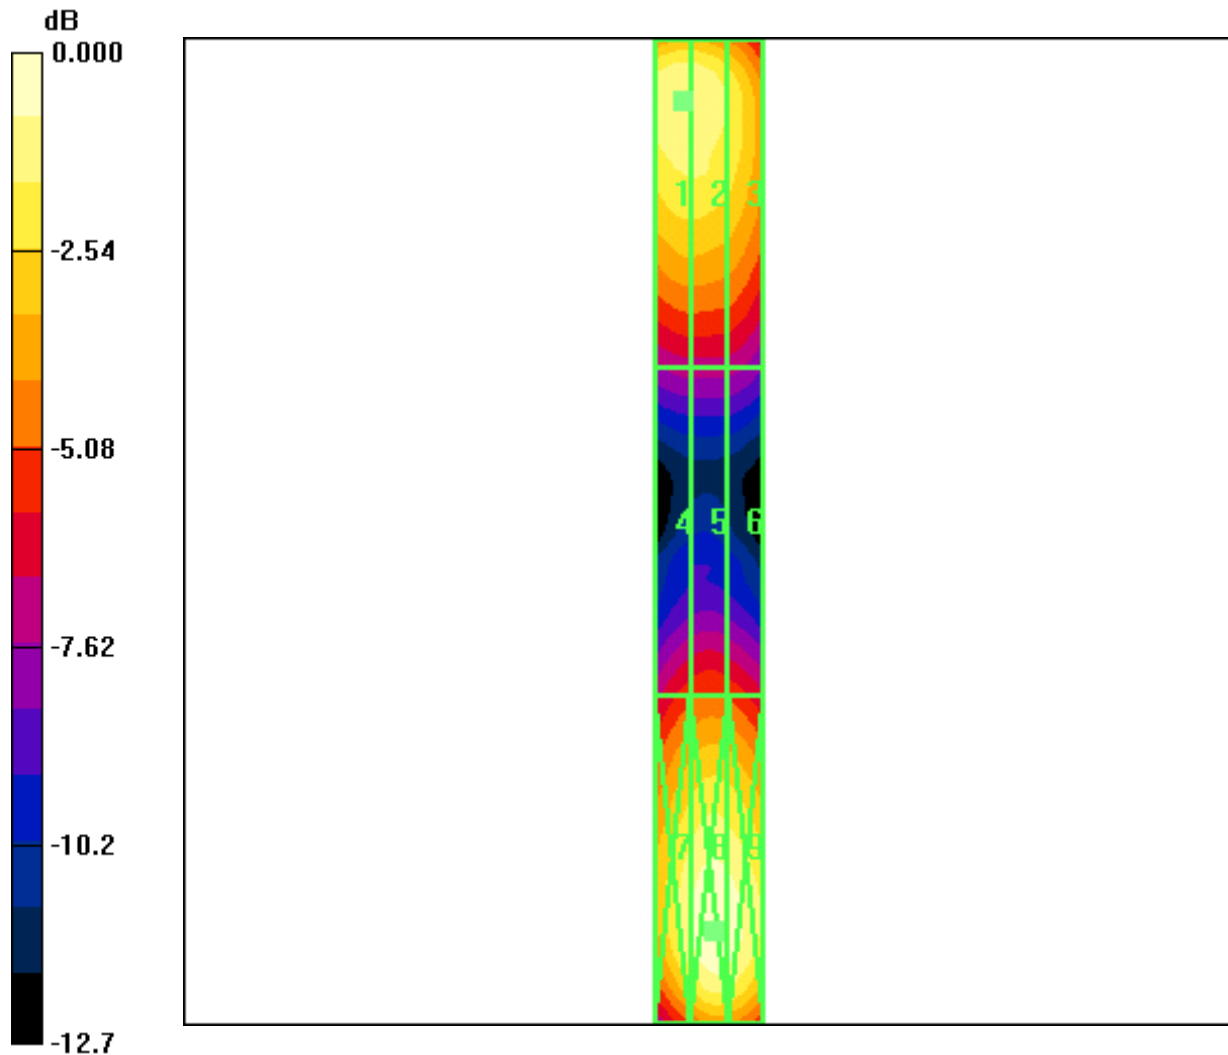

Kyocera Wireless Corp.

 File Name: [Validation H-Field Probe SN6029, Dipole SN1020, 835Mhz, Feb 06,08.da4](#)

Communication System: CDMA; Frequency: 836.49 MHz; Duty Cycle: 1:1

 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:


- Probe: H3DV5 - SN6029; ; Calibrated: 7/17/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn494; Calibrated: 3/14/2007
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

H-Field Scan/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.462 A/m

Probe Modulation Factor = 1.00

Reference Value = 0.502 A/m; Power Drift = 0.048 dB

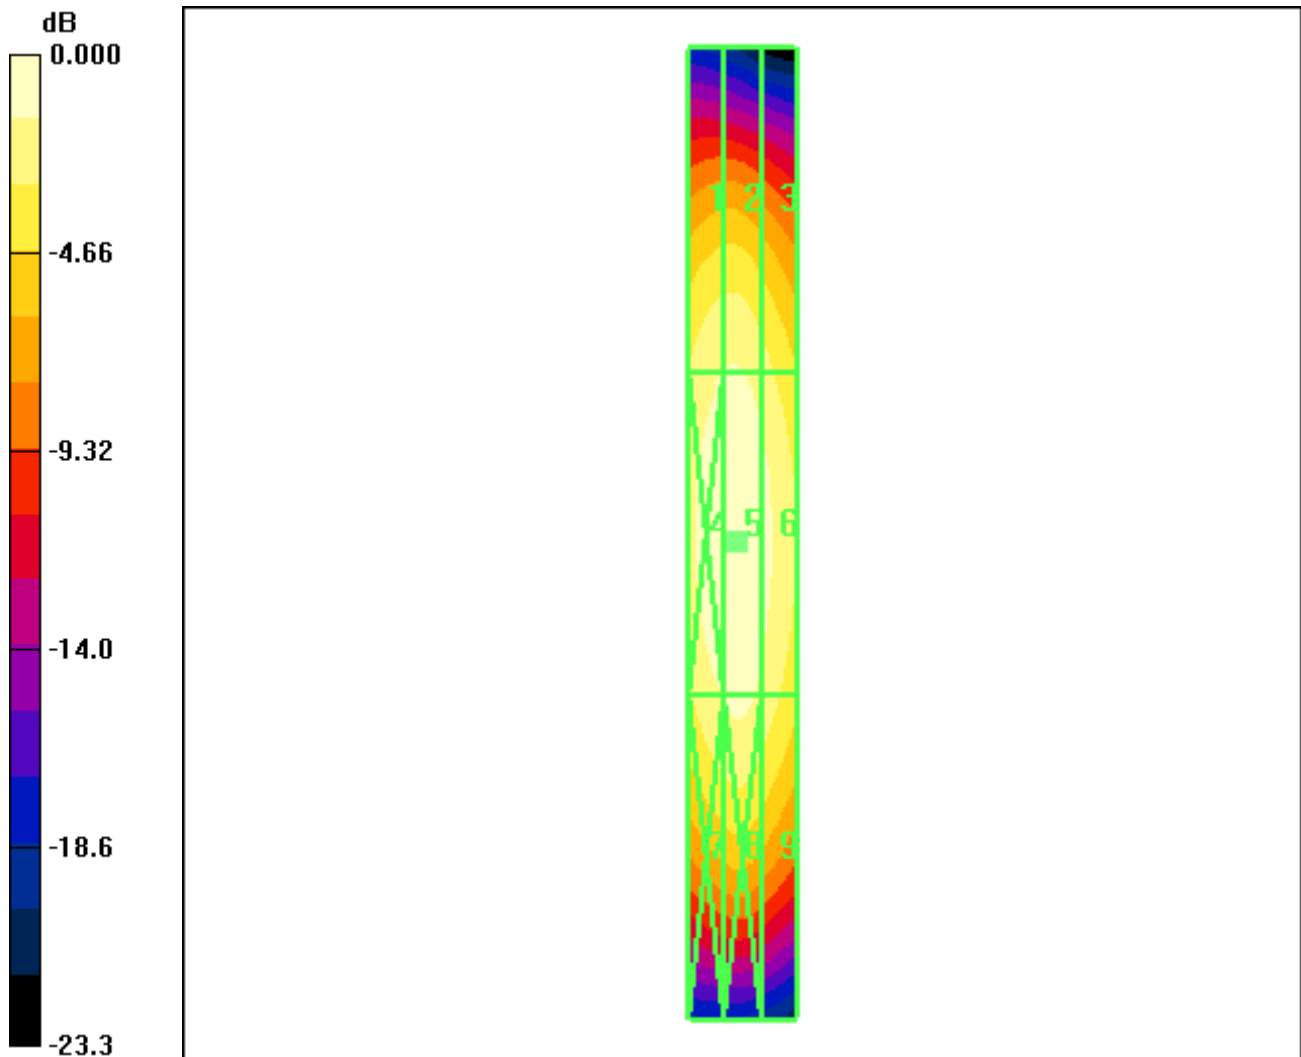

0 dB = 0.462A/m

Kyocera Wireless Corp.

File Name: [Validation_H-Field_Probe SN6029, Dipole SN1015, 1880Mhz, Feb 15, 08.da4](#)

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:


- Probe: H3DV5 - SN6029; ; Calibrated: 7/17/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn494; Calibrated: 3/14/2007
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

H-Field Scan/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.475 A/m

Probe Modulation Factor = 1.00

Reference Value = 0.518 A/m; Power Drift = -0.055 dB

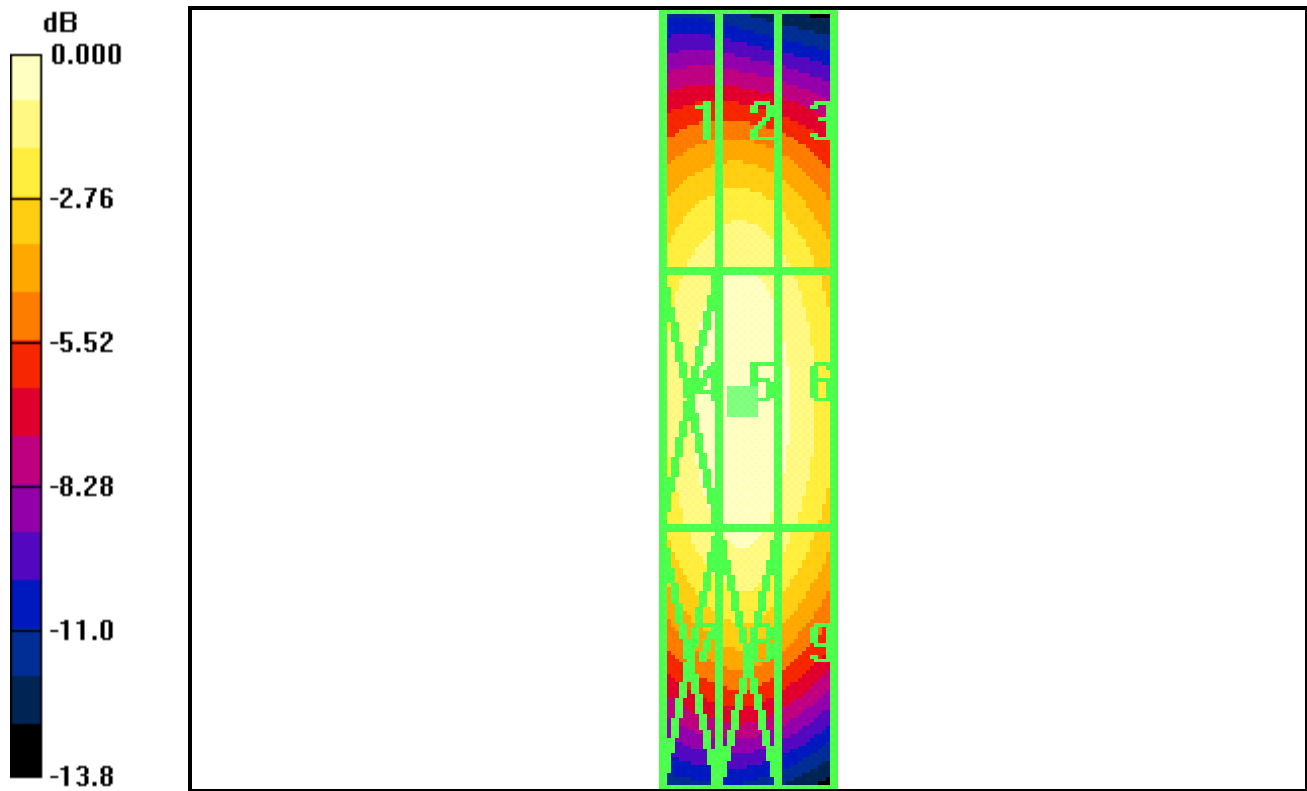

0 dB = 0.475A/m

Kyocera Wireless Corp.

File Name: [Validation E-Field Probe SN2341, Dipole SN1015, 1880Mhz, Feb 15,08.da4](#)

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:


- Probe: ER3DV6 - SN2341; ConvF(1, 1, 1); Calibrated: 4/20/2007
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn494; Calibrated: 3/14/2007
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

E-Field Scan/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 139.4 V/m

Probe Modulation Factor = 1.00

Reference Value = 75.5 V/m; Power Drift = -0.089 dB

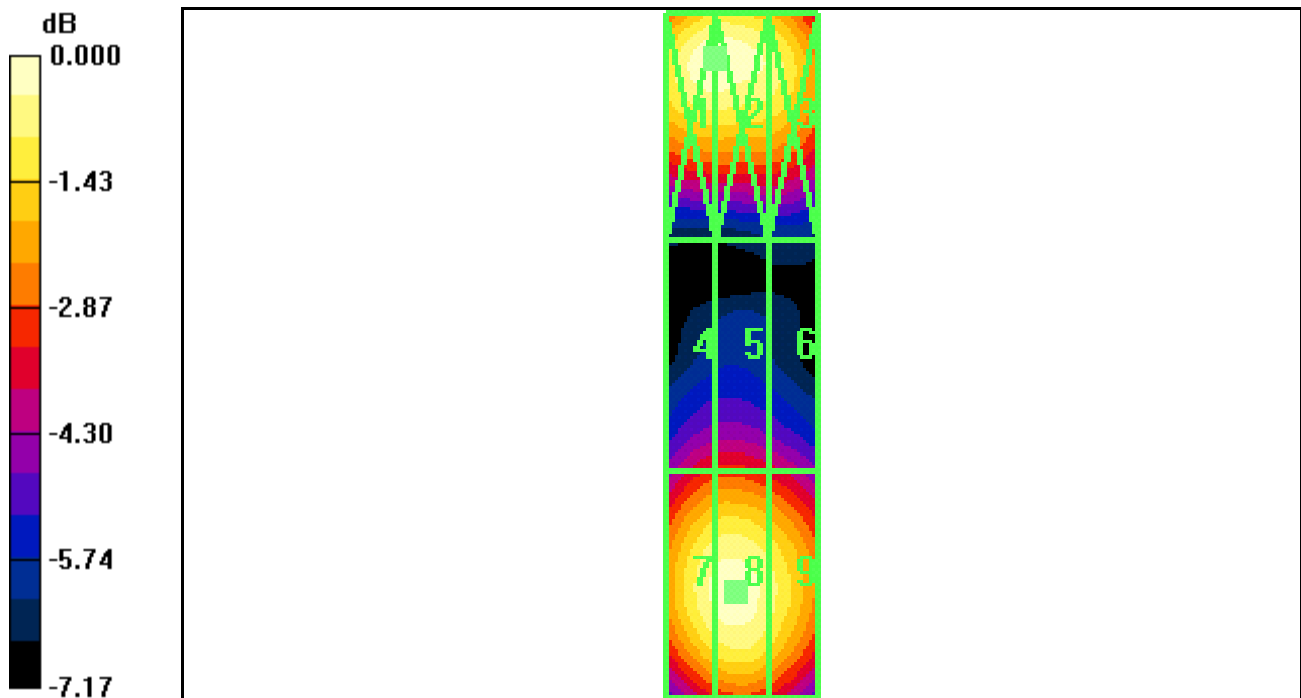

0 dB = 139.4V/m