



**FCC CFR47 PART 22 SUBPART H
PART 24 SUBPART E AND PART 27 SUBPART K
CERTIFICATION TEST REPORT
FOR**

CDMA2000 PHONE WITH BLUETOOTH

MODEL NUMBER: K33B-04

FCC ID: OVFK33B-04

REPORT NUMBER: 08U11698-1

ISSUE DATE: MARCH 24, 2008

Prepared for

**KYOCERA WIRELESS CORP
10300 CAMPUS POINT DRIVE
SAN DIEGO, CA 92121, U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	3/27/2008	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>SOFTWARE AND FIRMWARE</i>	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.5. <i>DESCRIPTION OF TEST SETUP</i>	8
5.6. <i>TEST AND MEASUREMENT EQUIPMENT</i>	10
5.6.1. <i>OUTPUT POWER</i>	11
5.6.2. <i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	15
6. SETUP PHOTOS	19

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: KYOCERA WIRELESS
10300 CAMPUS POINT DRIVE
SAN DIEGO, CA 92121, USA

EUT DESCRIPTION: CDMA2000 PHONE WITH BLUETOOTH

MODEL: K33B-04

SERIAL NUMBER: 806D1178

DATE TESTED: MARCH 23-25, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22 SUBPART H	No Non-Compliance Noted (Radiated Only)
FCC PART 24 SUBPART E	No Non-Compliance Noted (Radiated Only)
FCC PART 27 SUBPART K	No Non-Compliance Noted (Radiated Only)

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA/EIA 603C (2004), FCC CFR 47 Part 2, FCC CFR 47 Part 22H, 24E, and 27K.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Radiated Emission, Above 2000 MHz	+/- 4.3 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Tri band CDMA2000 Phone with Bluetooth.

The radio module is manufactured by Kyocera.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak ERP & EIRP output powers as follows:

824 to 849 MHz Authorized Band

Frequency Range (MHz)	Modulation	ERP Peak Power (dBm)	ERP Peak Power (mW)
Low CH - 824.7	CDMA2000	28.1	645.65
Mid CH - 836.5		28.9	776.25
High CH - 848.3		29.1	812.83

1850 to 1910 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low CH - 1851.25	CDMA2000	25.2	331.13
Mid CH - 1880		23.5	223.87
High CH - 1908.75		23.2	208.93

1710 to 1755 MHz Authorized Band

Frequency Range (MHz)	Modulation	EIRP Peak Power (dBm)	EIRP Peak Power (mW)
Low CH - 1711	AWS	24.6	288.40
MID-Ch- 1733		25.2	331.13
High CH - 1754		24.8	302.00

5.3. SOFTWARE AND FIRMWARE

The EUT is linked with Agilent Communication Test Set.

5.4. WORST-CASE CONFIGURATION AND MODE

The worst-case position for the EUT was investigated by examining the X, Y, and Z-Positions. As a result X-Position for cell band and Y-Position for PCS and AWS were considered as the worst-case positions.

PROCEDURE USED TO ESTABLISH TEST SIGNAL

3G-CDMA2000 1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobil Test	B.10.11, L

1xRTT

- Call Setup > Shift & Preset
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > RC3 (Fwd3, Rvs3)
- FCH Service Option (SO) Setup > 55
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
> R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Cell Info > Cell Parameters > System ID (SID) > 6503
> Network ID (NID) > 0

Once "Active Cell" show "Connected " then change "Rvs Power Ctrl" from "Active bits" to "**All Up bits**" to get the maximum power.

Worst-case Measurement Result @ Low, Middle and High Channel

Worst-case Measurement Result for Low, Middle and High Channel under Radio Configuration RC3 and Service Option 55.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Lithium Battery	Sanyo	TXBAT10159	NA	NA
Communications Test Set	Agilent/HP	E5515C	GB4616022	NA


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	RF IN/OUT	1	SMA	Un-shielded	2m	Antenna Cable

TEST SETUP

The EUT is a CDMA phone and is tested as a standalone configuration. Communications Test Set is used to link the device under test.

SETUP DIAGRAM FOR TESTS

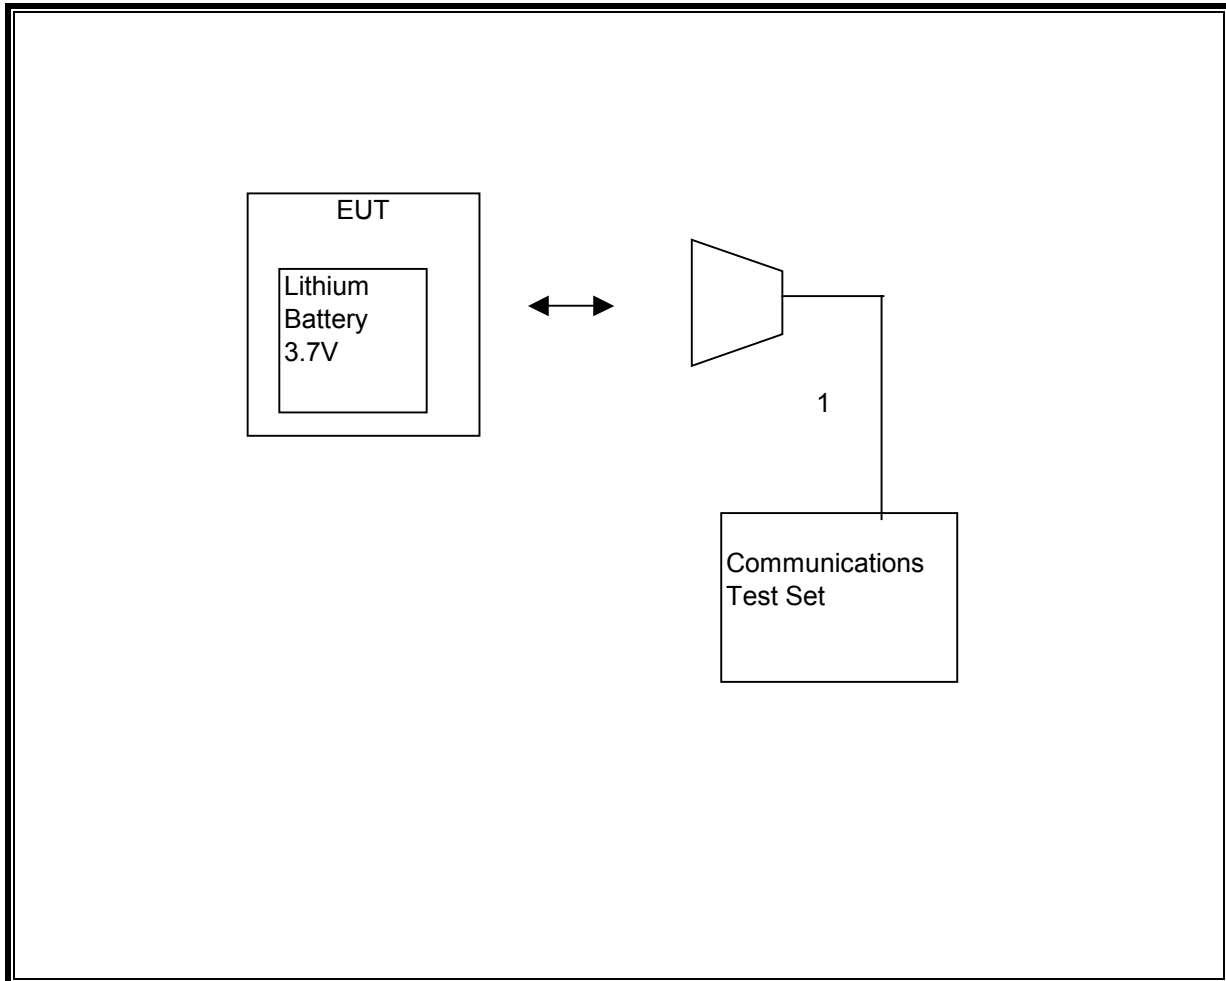

5.6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/14/07	08/07/08
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/03/07	09/27/08
Horn	EMCO	3115	C00945	04/15/07	04/15/08
Horn	EMCO	3115	C00872	04/15/07	04/15/08
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	09/15/07	09/30/08
Communications Test Set	Agilent / HP	E5515C	C01086	06/29/07	06/29/08
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR	CNR
Dipole	Speag	D900V2	NA	11/16/07	11/16/08
Signal Generator	R & S	SMP04	C00953	11/16/07	02/16/09

5.6.1. OUTPUT POWER

LIMITS

22.913(a) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50 (d) (2) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to a peak EIRP of 1 watt.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17

RESULTS

No non-compliance noted.

CELL OUTPUT POWER (ERP)

High Frequency Substitution Measurement									
Compliance Certification Services, Fremont 5m Chamber									
Company:		Kyocera Wireless Corporation							
Project #:		08U11698							
Date:		3/24/2008							
Test Engineer:		Chin Pang							
Configuration:		EUT ALONE							
Mode:		Tx, CDMA2000, Cell, X Position (Worst Case)							
Test Equipment:									
Receiving: Sunol T122, and 5m Chamber N-type Cable (Setup this one for testing EUT)									
Substitution: Dipole S/N: 00022117, and 4ft SMA Cable Warehouse S/N: 177081003									
f MHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch									
824.70	92.7	V	20.1	0.5	0.0	19.6	38.5	-18.8	
824.70	103.9	H	28.6	0.5	0.0	28.1	38.5	-10.4	
Mid Ch									
836.52	94.0	V	22.5	0.6	0.0	21.9	38.5	-16.6	
836.52	104.0	H	29.5	0.6	0.0	28.9	38.5	-9.6	
High Ch									
848.31	94.5	V	22.6	0.7	0.0	21.9	38.5	-16.6	
848.31	104.3	H	29.8	0.7	0.0	29.1	38.5	-9.4	
Rev. 1.24.7									

PCS OUTPUT POWER (EIRP)

High Frequency Fundamental Measurement									
Compliance Certification Services, Fremont 5m Chamber Site									
Company:		Kyocera							
Project #:		08U11698							
Date:		3/24/2008							
Test Engineer:		Chin Pang							
Configuration:		EUT ALONE							
Mode:		Tx, CDMA2000, PCS, Y Position (Worst Case)							
Test Equipment:									
Receiving: Horn T73, and 12ft S/N: 197209005 (Setup this one for testing EUT)									
Substitution: Horn T60 Substitution, 4ft SMA Cable Warehouse S/N: 177081002									
f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch									
1.851	90.0	V	17.8	0.9	8.3	25.2	33.0	-7.8	
1.851	79.8	H	6.6	0.9	8.3	14.0	33.0	-19.1	
Mid Ch									
1.880	88.2	V	16.0	0.9	8.3	23.5	33.0	-9.5	
1.880	77.0	H	4.4	0.9	8.3	11.9	33.0	-21.1	
High Ch									
1.909	88.0	V	15.7	0.9	8.4	23.2	33.0	-9.8	
1.909	80.0	H	7.8	0.9	8.4	15.3	33.0	-17.7	
Rev. 1.24.7									

AWS OUTPUT POWER (EIRP)

High Frequency Fundamental Measurement									
Compliance Certification Services, Fremont 5m Chamber Site									
Company:	Kyocera								
Project #:	08U1698								
Date:	3/24/2008								
Test Engineer:	Chin Pang								
Configuration:	EUT ALONE								
Mode:	Tx, AWS, Part 27 Y Position (Worst Case)								
Test Equipment:									
Receiving: Horn T73, and 12ft S/N: 197209005 (Setup this one for testing EUT)									
Substitution: Horn T60 Substitution, 4ft SMA Cable Warehouse S/N: 177081002									
f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch									
1.711	91.7	V	17.5	0.9	8.0	24.6	33.0	-8.4	
1.711	83.9	H	9.7	0.9	8.0	16.8	33.0	-16.2	
Mid Ch									
1.733	92.0	V	18.1	0.9	8.0	25.2	33.0	-7.8	
1.733	85.4	H	11.4	0.9	8.0	18.5	33.0	-14.5	
High Ch									
1.754	91.4	V	17.7	0.9	8.0	24.8	33.0	-8.2	
1.754	83.5	H	9.6	0.9	8.0	16.7	33.0	-16.3	
Rev. 1.24.7									

5.6.2. FIELD STRENGTH OF SPURIOUS RADIATION

LIMIT

§22.917 (e) and §24.238(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (g) For operations in the 1710–1755MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 3.2.12 & FCC 22.917 (b), FCC 24.238 (b), & FCC 27.53 (g)(1)(2)(3)

RESULTS

CELL SPURIOUS & HARMONIC (ERP)

High Frequency Substitution Measurement

Compliance Certification Services, Fremont 5m B-Chamber

Company: Kyocera Wireless Corporation
 Project #: 08U11698
 Date: 3/24/2008
 Test Engineer: Chin Pang
 Configuration: EUT ALONE
 Mode: Tx, CDMA2000, Cell, X Position (Worst Case)

Test Equipment:

EMCO Horn 1-18GHz
T73; S/N: 6717 @3m

Horn > 18GHz

Limit
FCC 22

High Pass Filter

Hi Frequency Cables

(2 ft)

(2~3 ft)

(4~6 ft)

(12 ft)

Pre-amplifier 1-26GHz
T145 Agilent 3008A

Pre-amplifier 26-40GHz

f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch										
1.649	45.9	V	-60.1	3.8	8.0	5.8	-58.1	-13.0	-45.1	
2.474	42.9	V	-59.5	4.9	9.5	7.4	-57.0	-13.0	-44.0	
1.649	44.9	H	-60.4	3.8	8.0	5.8	-58.4	-13.0	-45.4	
2.474	42.8	H	-59.4	4.9	9.5	7.4	-56.9	-13.0	-43.9	
Mid Ch										
1.673	45.6	V	-60.2	3.9	8.0	5.9	-58.2	-13.0	-45.2	
2.596	42.6	V	-59.3	5.0	9.6	7.5	-56.9	-13.0	-43.9	
1.673	47.7	H	-57.4	3.9	8.0	5.9	-55.4	-13.0	-42.4	
2.596	43.6	H	-58.1	5.0	9.6	7.5	-55.7	-13.0	-42.7	
High Ch										
1.697	45.1	V	-60.6	3.9	8.1	5.9	-58.6	-13.0	-45.6	
2.545	42.4	V	-59.8	4.9	9.6	7.4	-57.3	-13.0	-44.3	
1.697	46.5	H	-58.6	3.9	8.1	5.9	-56.5	-13.0	-43.5	
2.545	43.0	H	-59.0	4.9	9.6	7.4	-56.5	-13.0	-43.5	

Rev. 4.12.7
 Note: No other emissions were detected above the system noise floor.

PCS Spurious & Harmonic (EIRP)

High Frequency Substitution Measurement										
Compliance Certification Services, Fremont 5m B-Chamber										
Company:		Kyocera Wirelsss Corporation								
Project #:		08U11698								
Date:		3/24/2008								
Test Engineer:		Chin Pang								
Configuration:		EUT ALONE								
Mode:		Tx, CDMA2000, PCS, Y Position (Worst Case)								
Test Equipment:										
EMCO Horn 1-18GHz		Horn > 18GHz			Limit		High Pass Filter			
T73; S/N: 6717 @3m					FCC 24		<input checked="" type="checkbox"/>			
Hi Frequency Cables										
<input type="checkbox"/> (2 ft)		<input type="checkbox"/> (2~3 ft)		<input type="checkbox"/> (4~6 ft)		<input checked="" type="checkbox"/> (12 ft)		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz
						T145 Agilent 3008A				
f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch										
3.702	44.0	V	-53.1	5.9	9.7	7.6	-49.3	-13.0	-36.3	
5.554	42.5	V	-50.0	7.4	11.3	9.1	-46.1	-13.0	-33.1	
3.702	43.5	H	-53.5	5.9	9.7	7.6	-49.7	-13.0	-36.7	
5.554	42.0	H	-49.5	7.4	11.3	9.1	-45.6	-13.0	-32.6	
Mid Ch										
3.760	44.7	V	-52.1	6.0	9.7	7.6	-48.4	-13.0	-35.4	
5.640	43.0	V	-49.7	7.4	11.5	9.3	-45.6	-13.0	-32.6	
3.760	43.6	H	-53.1	6.0	9.7	7.6	-49.4	-13.0	-36.4	
5.640	42.0	H	-49.7	7.4	11.5	9.3	-45.6	-13.0	-32.6	
High Ch										
3.818	44.4	V	-52.1	6.0	9.7	7.5	-48.4	-13.0	-35.4	
5.726	42.0	V	-50.9	7.5	11.6	9.5	-46.7	-13.0	-33.7	
3.818	43.5	H	-52.9	6.0	9.7	7.5	-49.2	-13.0	-36.2	
5.726	42.5	H	-49.4	7.5	11.6	9.5	-45.2	-13.0	-32.2	
Rev. 4.12.7										
Note: No other emissions were detected above the system noise floor.										

AWS Spurious & Harmonic (EIRP)

High Frequency Substitution Measurement											
Compliance Certification Services, Fremont 5m B-Chamber											
Company:		Kyocera Wirelsss Corporation									
Project #:		08U11698									
Date:		3/23/2008									
Test Engineer:		Chin Pang									
Configuration:		EUT ALONE									
Mode:		Tx, AWS, Part 27 Y Position (Worst Case)									
Test Equipment:											
EMCO Horn 1-18GHz			Horn > 18GHz				Limit		<input checked="" type="checkbox"/> High Pass Filter		
T73; S/N: 6717 @3m							FCC 27				
Hi Frequency Cables											
<input type="checkbox"/> (2 ft)			<input type="checkbox"/> (2~3 ft)			<input type="checkbox"/> (4~6 ft)			<input checked="" type="checkbox"/> (12 ft)		
Pre-amplifier 1-26GHz						Pre-amplifier 26-40GHz					
T144 Miteq 3008A00											
f GHz	SA reading (dBuV/m)	Ant. Pol. (H/V)	SG reading (dBm)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch, 1711MHz											
3.422	48.0	V	-52.5	5.7	9.7	7.6	-48.4	-13.0	-35.4		
5.133	48.5	V	-45.6	7.2	10.9	8.7	-41.9	-13.0	-28.9		
6.844	42.0	V	-50.4	8.0	12.3	10.1	-46.1	-13.0	-33.1		
3.422	50.0	H	-50.4	5.7	9.7	7.6	-46.3	-13.0	-33.3		
5.133	45.3	H	-47.8	7.2	10.9	8.7	-44.1	-13.0	-31.1		
6.844	41.7	H	-50.1	8.0	12.3	10.1	-45.8	-13.0	-32.8		
Mid Ch, 1733MHz											
3.466	47.2	V	-53.0	5.7	9.7	7.6	-49.0	-13.0	-36.0		
5.199	50.0	V	-43.9	7.2	10.9	8.8	-40.2	-13.0	-27.2		
6.932	42.0	V	-50.2	8.0	12.3	10.1	-46.0	-13.0	-33.0		
3.466	48.0	H	-52.1	5.7	9.7	7.6	-48.1	-13.0	-35.1		
5.199	48.5	H	-44.4	7.2	10.9	8.8	-40.7	-13.0	-27.7		
6.932	41.7	H	-49.9	8.0	12.3	10.1	-45.6	-13.0	-32.6		
High Ch, 1754MHz											
3.508	46.0	V	-54.0	5.8	9.7	7.6	-50.0	-13.0	-37.0		
5.262	45.2	V	-48.7	7.3	11.0	8.8	-44.9	-13.0	-31.9		
7.016	41.5	V	-50.7	8.1	12.3	10.2	-46.5	-13.0	-33.5		
3.508	46.5	H	-53.4	5.8	9.7	7.6	-49.4	-13.0	-36.4		
5.262	43.0	H	-49.9	7.3	11.0	8.8	-46.1	-13.0	-33.1		
7.016	41.0	H	-50.4	8.1	12.3	10.2	-46.2	-13.0	-33.2		
Rev. 4.12.7											
Note: No other emissions were detected above the system noise floor.											