

Appendix A:

Validation Test Plots

Test Laboratory: Kyocera-Wireless Corp.

835Mhz Validation @ 20dBm with Probe 1618, DAE 527 and Dipole 467


Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1
Medium: HSL900,Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.872 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:
Probe: ET3DV6 - SN1618, ConvF(6.98, 6.98, 6.98), Calibrated: 9/19/2007
Sensor-Surface: 4mm (Mechanical Surface Detection),
Electronics: DAE4 Sn527,Calibrated: 9/14/2007
Measurement SW: DASY4, V4.7 Build 71
Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:
Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

835MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.1 V/m; Power Drift = -0.063 dB
Peak SAR (extrapolated) = 1.40 W/kg
SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.620 mW/g
Maximum value of SAR (measured) = 1.04 mW/g

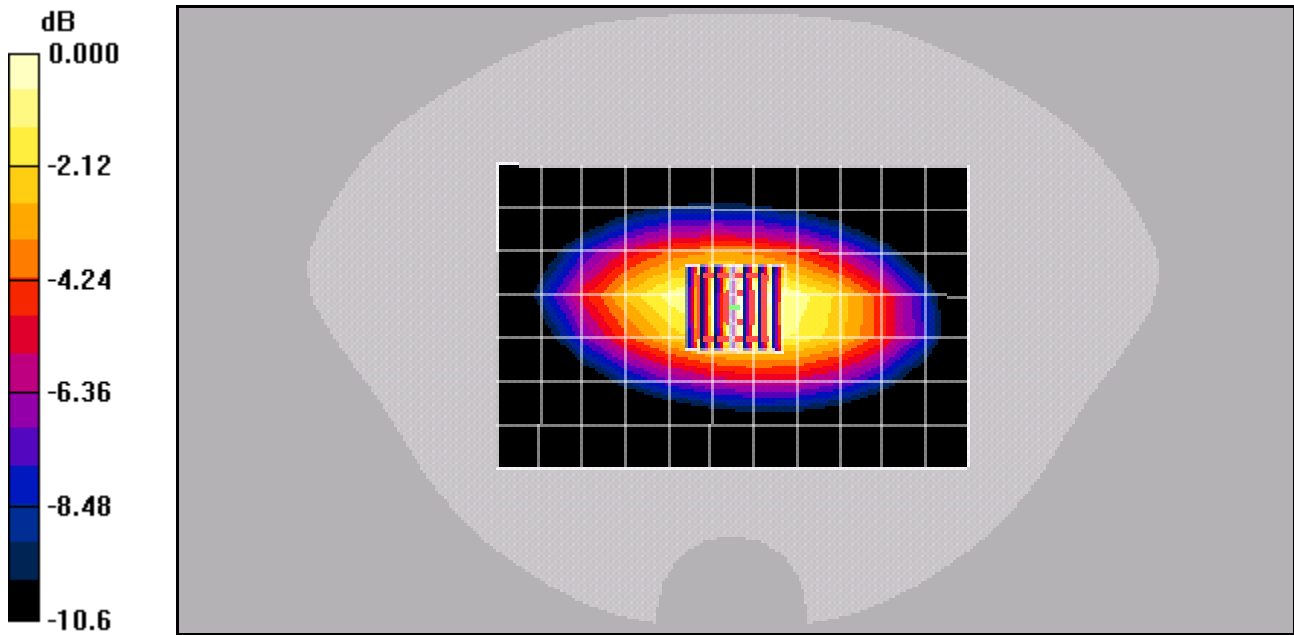

0 dB = 1.04mW/g

Test Laboratory: Kyocera-Wireless Corp.

835Mhz Validation @ 20dBm with Probe 1618, DAE 527 and Dipole 467

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1618, ConvF(6.98, 6.98, 6.98), Calibrated: 9/19/2007

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/14/2007

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


835MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.6 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.953 mW/g; SAR(10 g) = 0.619 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

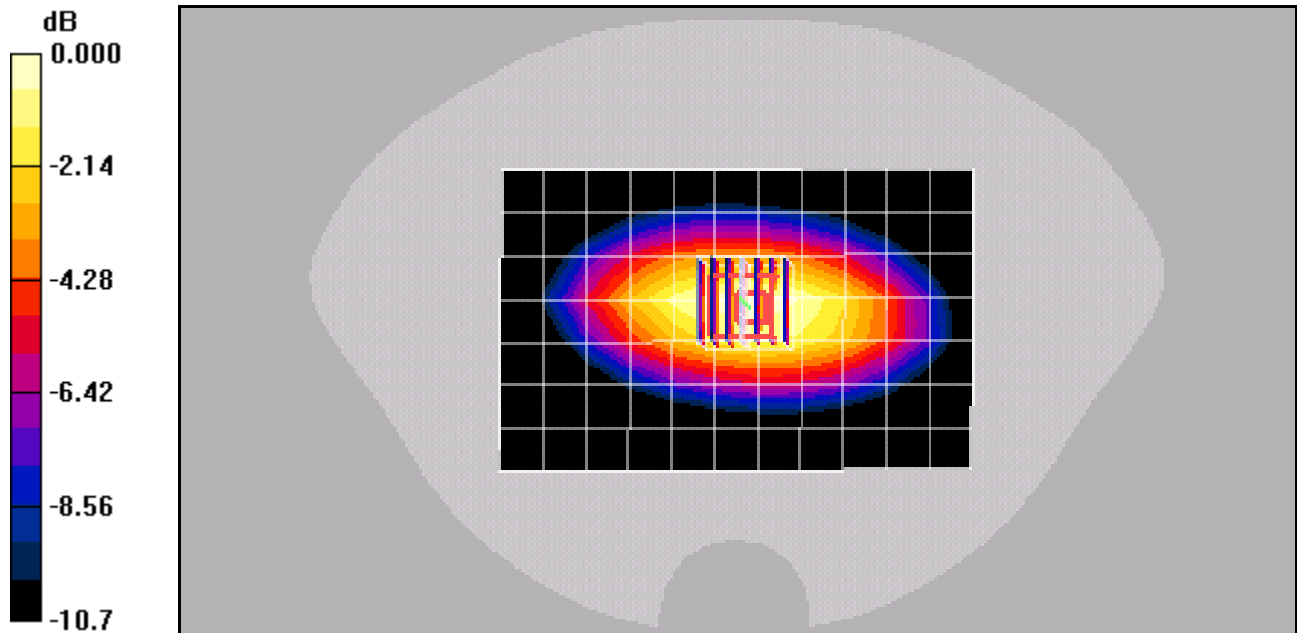

0 dB = 1.03mW/g

Test Laboratory: Kyocera-Wireless Corp.

835Mhz Validation @ 20dBm Probe 1713, DAE 602 and Dipole 467


Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1
Medium: HSL900, Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:
Probe: ET3DV6 - SN1713, ConvF(6.57, 6.57, 6.57), Calibrated: 4/22/2008
Sensor-Surface: 4mm (Mechanical Surface Detection),
Electronics: DAE4 Sn602, Calibrated: 6/25/2008
Measurement SW: DASY4, V4.7 Build 71
Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:
Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

835MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.8 V/m; Power Drift = 0.021 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.995 mW/g; SAR(10 g) = 0.645 mW/g
Maximum value of SAR (measured) = 1.08 mW/g

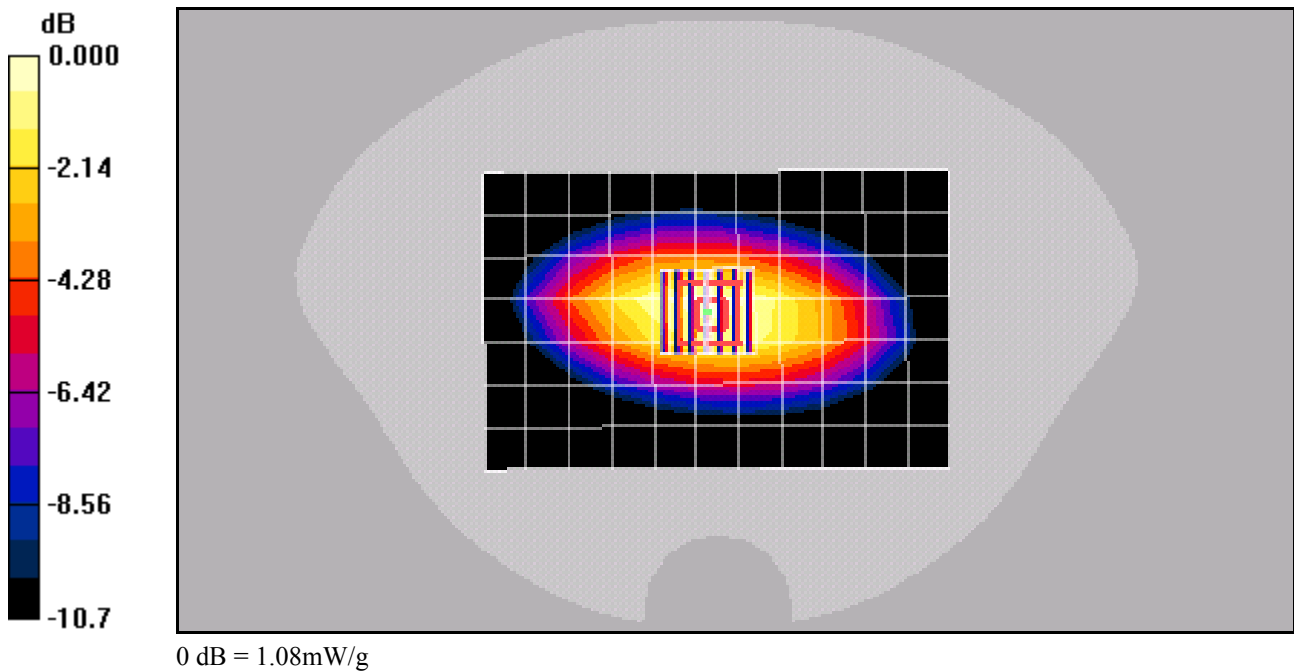

Test Laboratory: Kyocera-Wireless Corp.

835Mhz Validation (In Muscle) @ 20dBm with Probe 1618, DAE 527 and Dipole 467


Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1
Medium: M900,Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.951 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:
Probe: ET3DV6 - SN1618, ConvF(6.6, 6.6, 6.6), Calibrated: 9/19/2007
Sensor-Surface: 4mm (Mechanical Surface Detection),
Electronics: DAE4 Sn527, Calibrated: 9/14/2007
Measurement SW: DASY4, V4.7 Build 71
Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:
Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

835MHz Validation (In Muscle) @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.7 V/m; Power Drift = 0.016 dB
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.679 mW/g
Maximum value of SAR (measured) = 1.10 mW/g

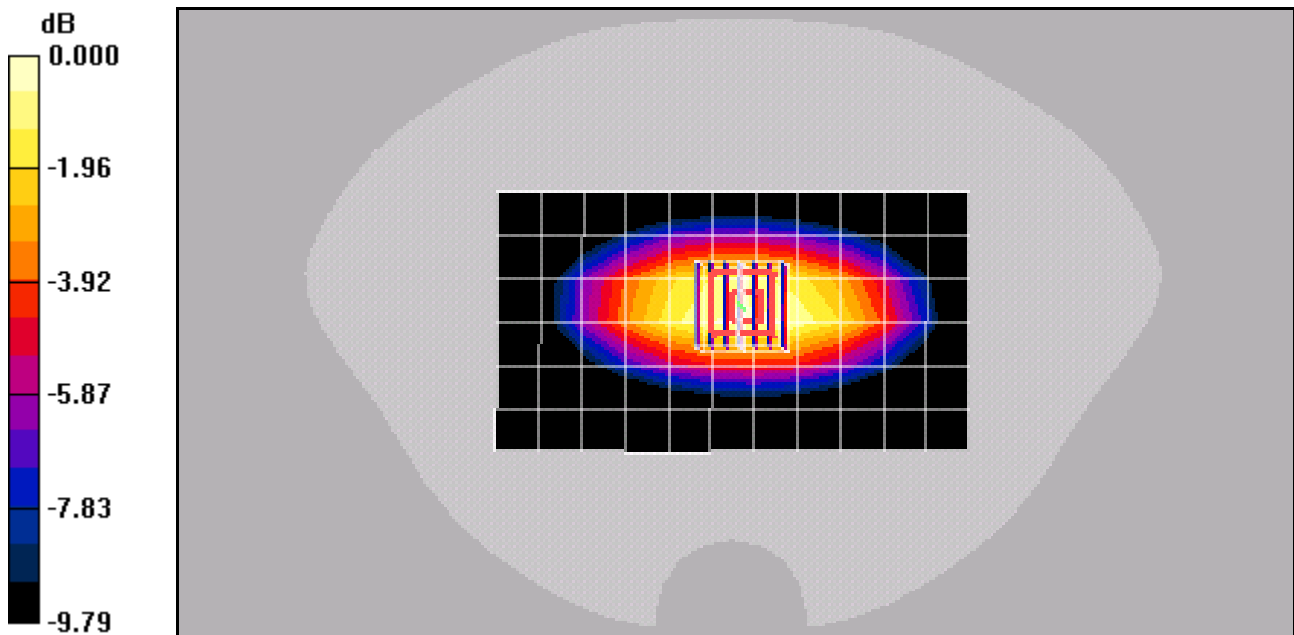

0 dB = 1.10mW/g

Test Laboratory: Kyocera-Wireless Corp.

835Mhz Validation (In Muscle) @ 20dBm with Probe 1618, DAE 527 and Dipole 467


Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1
Medium: M900,Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:
Probe: ET3DV6 - SN1618, ConvF(6.6, 6.6, 6.6), Calibrated: 9/19/2007
Sensor-Surface: 4mm (Mechanical Surface Detection),
Electronics: DAE4 Sn527, Calibrated: 9/14/2007
Measurement SW: DASY4, V4.7 Build 71
Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:
Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

835MHz Validation (In Muscle) @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.5 V/m; Power Drift = 0.017 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.625 mW/g
Maximum value of SAR (measured) = 1.02 mW/g

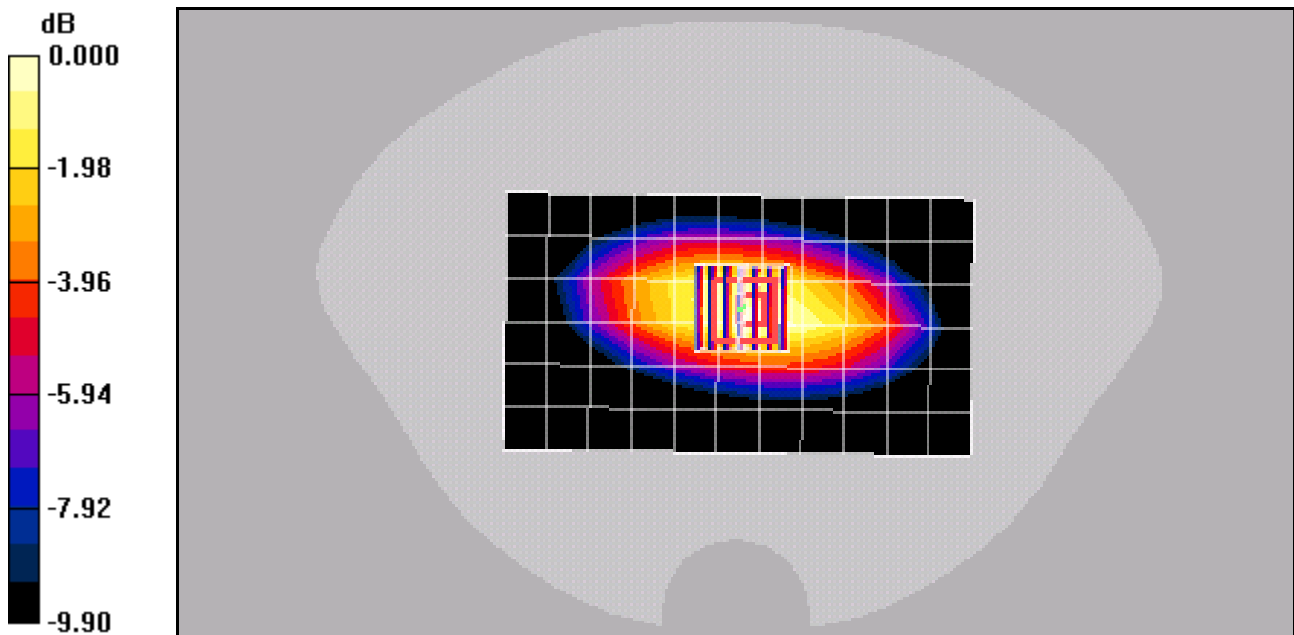

0 dB = 1.02mW/g

Test Laboratory: Kyocera-Wireless Corp.

1800Mhz Validation @ 20dBm with Probe 1618, DAE 527 and Dipole 220

Communication System: CW, Frequency: 1800 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used (extrapolated): $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1618, ConvF(5.57, 5.57, 5.57), Calibrated: 9/19/2007

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/14/2007

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1800MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 56.6 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 6.53 W/kg

SAR(1 g) = 3.85 mW/g; SAR(10 g) = 2.06 mW/g

Info: Extrapolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.30 mW/g

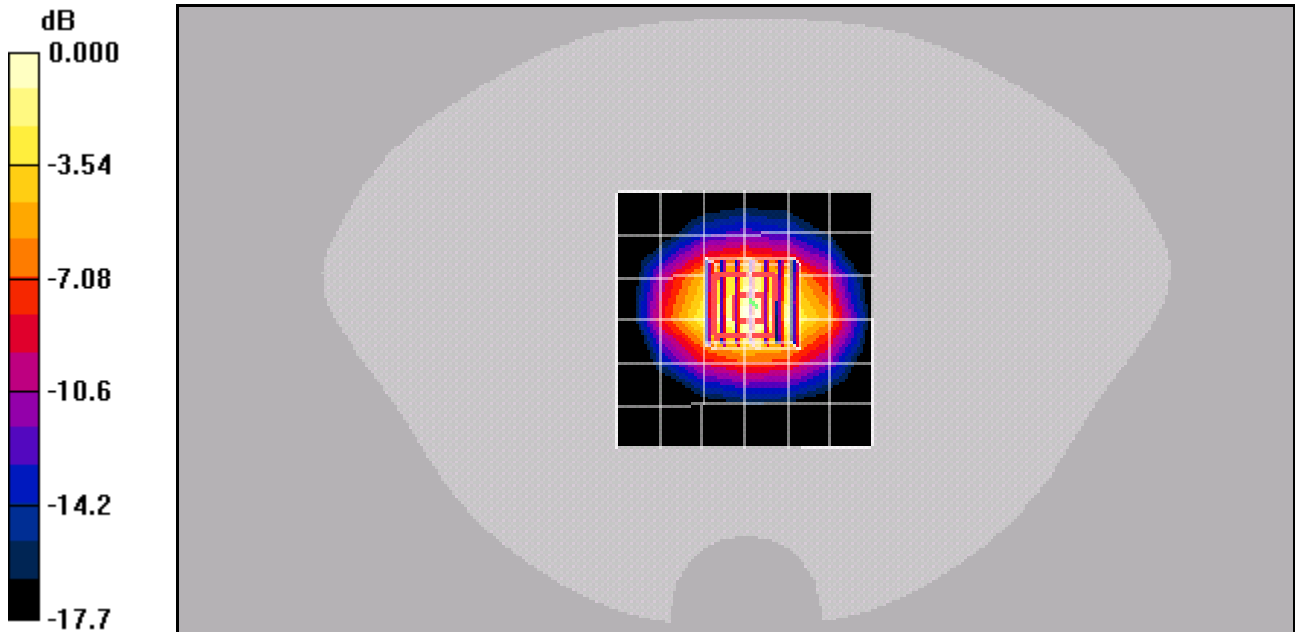

0 dB = 4.30mW/g

Test Laboratory: Kyocera-Wireless Corp.

1800Mhz Validation @ 20dBm Probe 1664, DAE 602 and Dipole 220

Communication System: CW, Frequency: 1800 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used (extrapolated): $f = 1800$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1664, ConvF(5.49, 5.49, 5.49), Calibrated: 6/23/2008

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 6/25/2008

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1800MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 57.3 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 3.88 mW/g; SAR(10 g) = 2.04 mW/g

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.36 mW/g

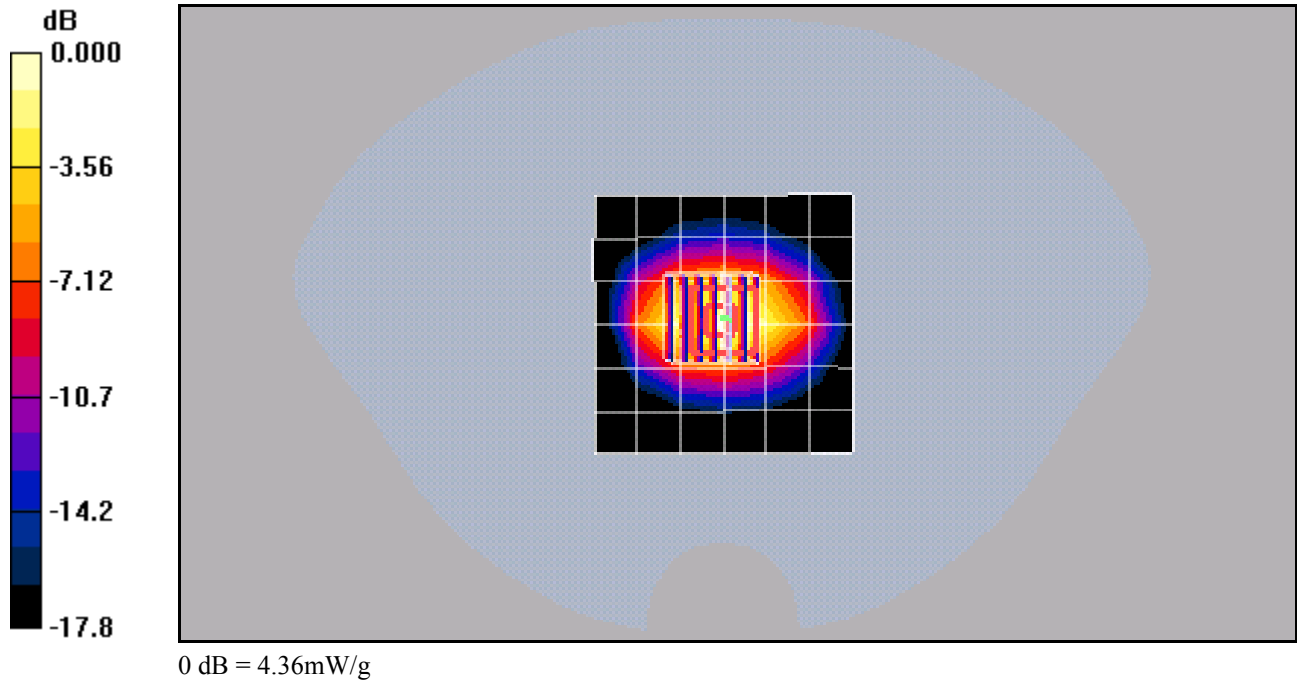

Test Laboratory: Kyocera-Wireless Corp.

1800Mhz Validation (In Muscle) @ 20dBm with Probe 1618, DAE 527 and Dipole 220

Communication System: CW, Frequency: 1800 MHz, Duty Cycle: 1:1

Medium: M1700,Medium parameters used (extrapolated): $f = 1800 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 55.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1618, ConvF(5.02, 5.02, 5.02), Calibrated: 9/19/2007

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn527,Calibrated: 9/14/2007

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1800MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 55.8 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 6.48 W/kg

SAR(1 g) = 3.94 mW/g; SAR(10 g) = 2.13 mW/g

Info: Extrapolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.45 mW/g

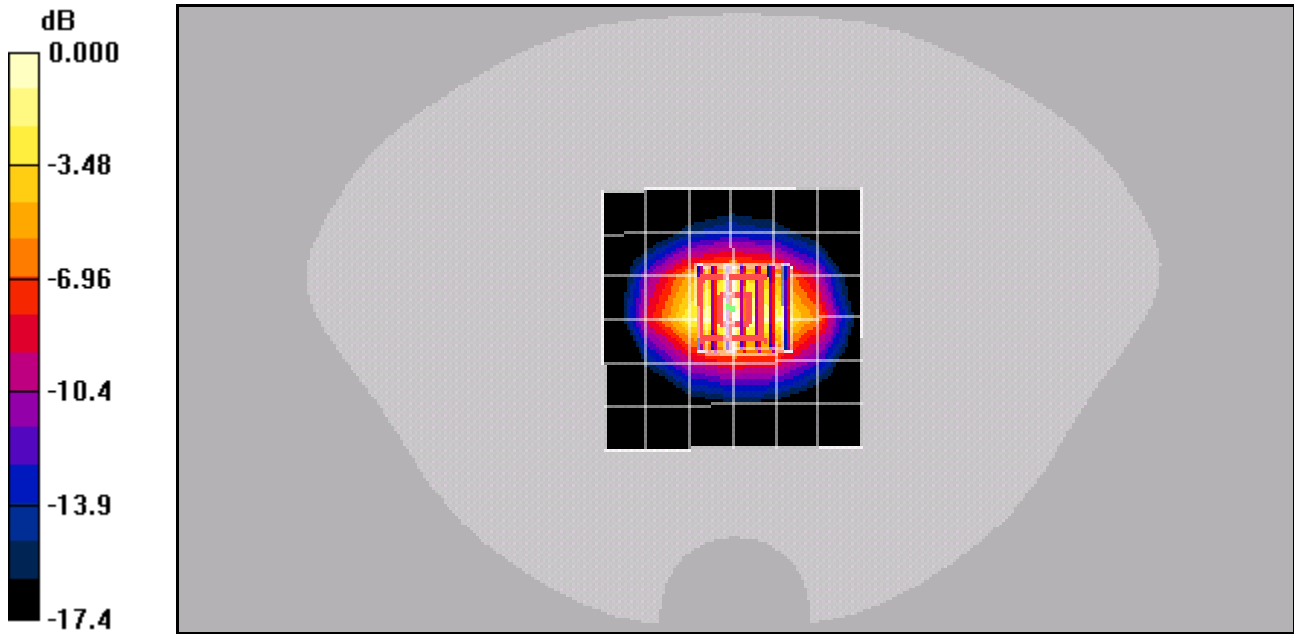

0 dB = 4.45mW/g

Test Laboratory: Kyocera-Wireless Corp.

1800Mhz Validation (In Muscle) @ 20dBm with Probe 1618, DAE 527 and Dipole 220

Communication System: CW, Frequency: 1800 MHz, Duty Cycle: 1:1

Medium: M1700,Medium parameters used (extrapolated): $f = 1800 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1618, ConvF(5.02, 5.02, 5.02), Calibrated: 9/19/2007

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn527,Calibrated: 9/14/2007

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1800MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 52.6 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 6.38 W/kg

SAR(1 g) = 3.86 mW/g; SAR(10 g) = 2.09 mW/g

Info: Extrapolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 4.37 mW/g

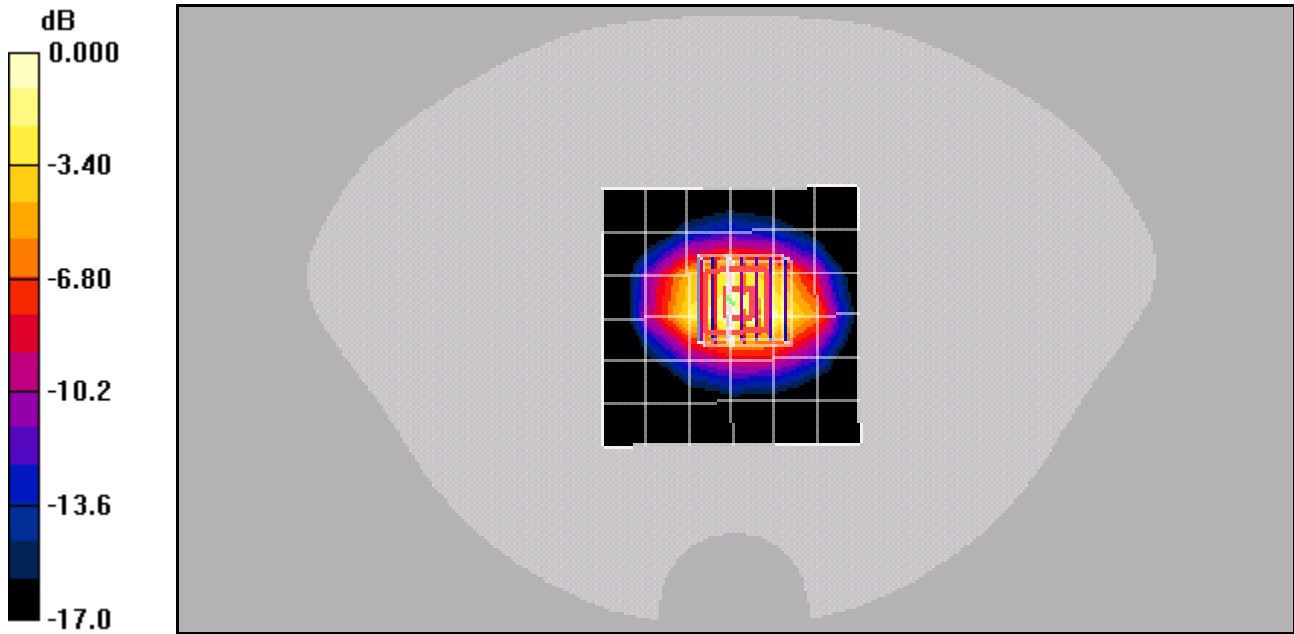

0 dB = 4.37mW/g

Test Laboratory: Kyocera-Wireless Corp.

1900Mhz Validation @ 20dBm with Probe 1618, DAE 527 and Dipole 5d016

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1618, ConvF(5.31, 5.31, 5.31), Calibrated: 9/19/2007

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn527, Calibrated: 9/14/2007

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 57.2 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 6.48 W/kg

SAR(1 g) = 3.88 mW/g; SAR(10 g) = 2.06 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.41 mW/g

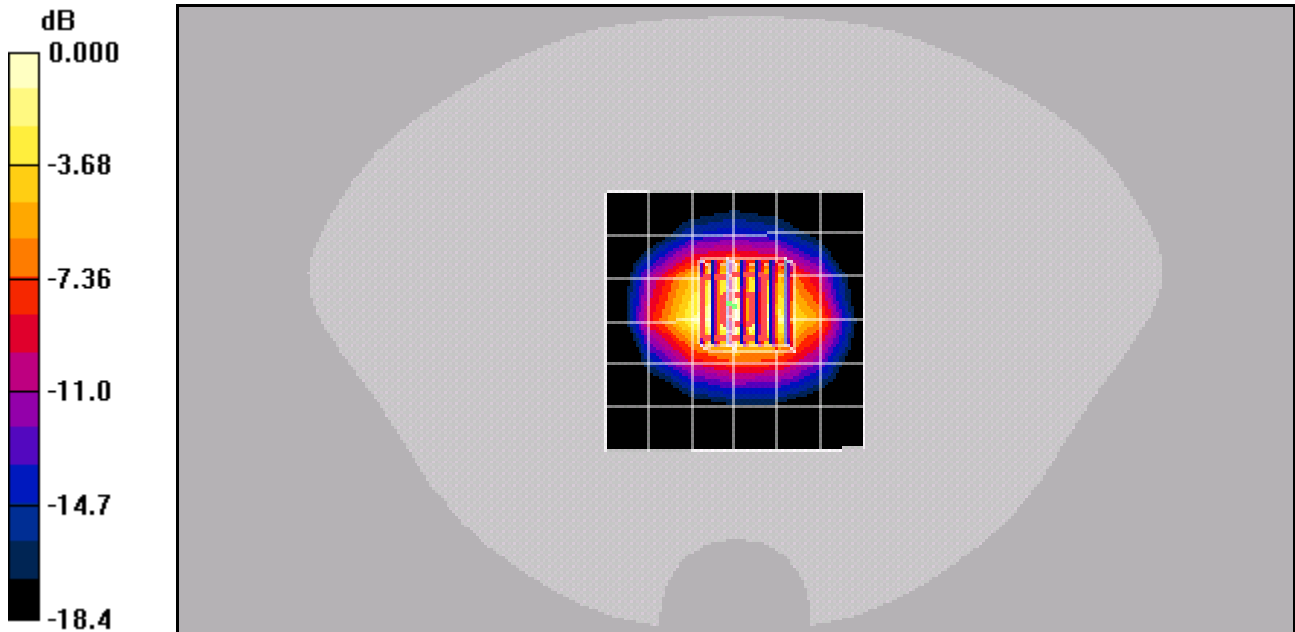

0 dB = 4.41mW/g

Test Laboratory: Kyocera-Wireless Corp.

1900Mhz Validation (In Muscle) @ 20dBm with Probe 1618, DAE 527 and Dipole 5d016

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: M1800,Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1618, ConvF(4.72, 4.72, 4.72), Calibrated: 9/19/2007

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn527,Calibrated: 9/14/2007

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 57.8 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 6.57 W/kg

SAR(1 g) = 4.02 mW/g; SAR(10 g) = 2.18 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.57 mW/g

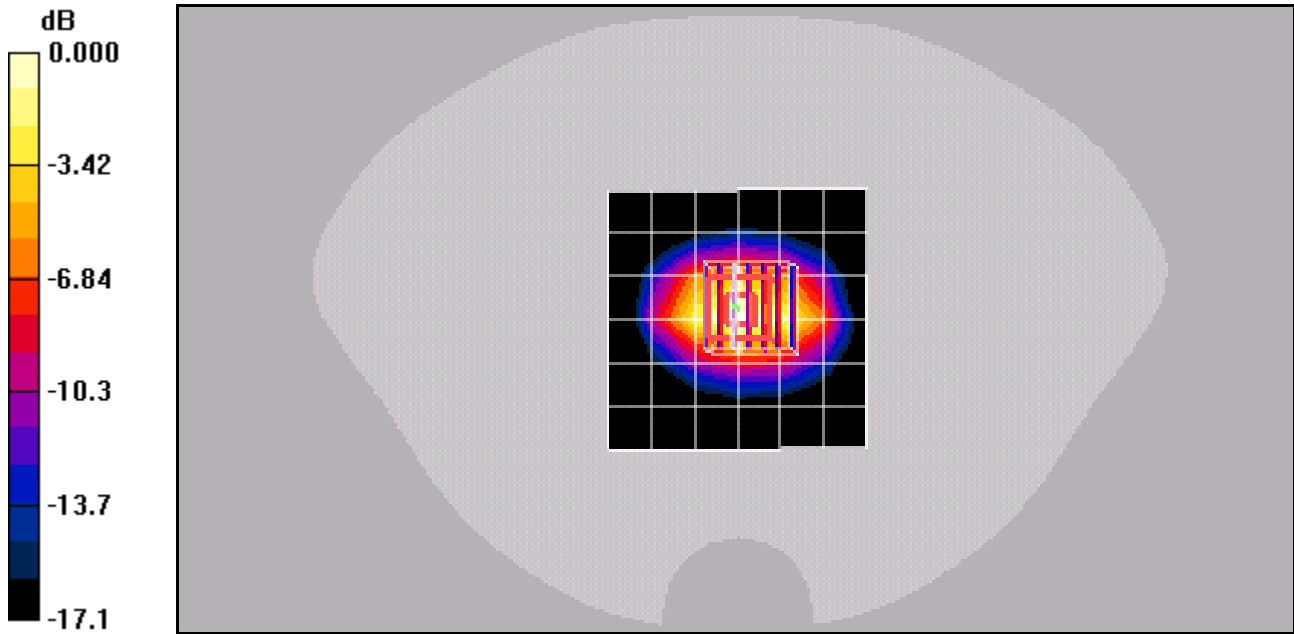

0 dB = 4.57mW/g

Test Laboratory: Kyocera-Wireless Corp.

1900Mhz Validation (In Muscle) @ 20dBm with Probe 1618, DAE 527 and Dipole 5d016

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: M1800,Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1618, ConvF(4.72, 4.72, 4.72), Calibrated: 9/19/2007

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn527,Calibrated: 9/14/2007

Measurement SW: DASY4, V4.7 Build 71

Postprocessing SW: SEMCAD, V1.8 Build 176

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

1900MHz Validation @20dBm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 55.4 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 6.38 W/kg

SAR(1 g) = 3.88 mW/g; SAR(10 g) = 2.11 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 4.42 mW/g

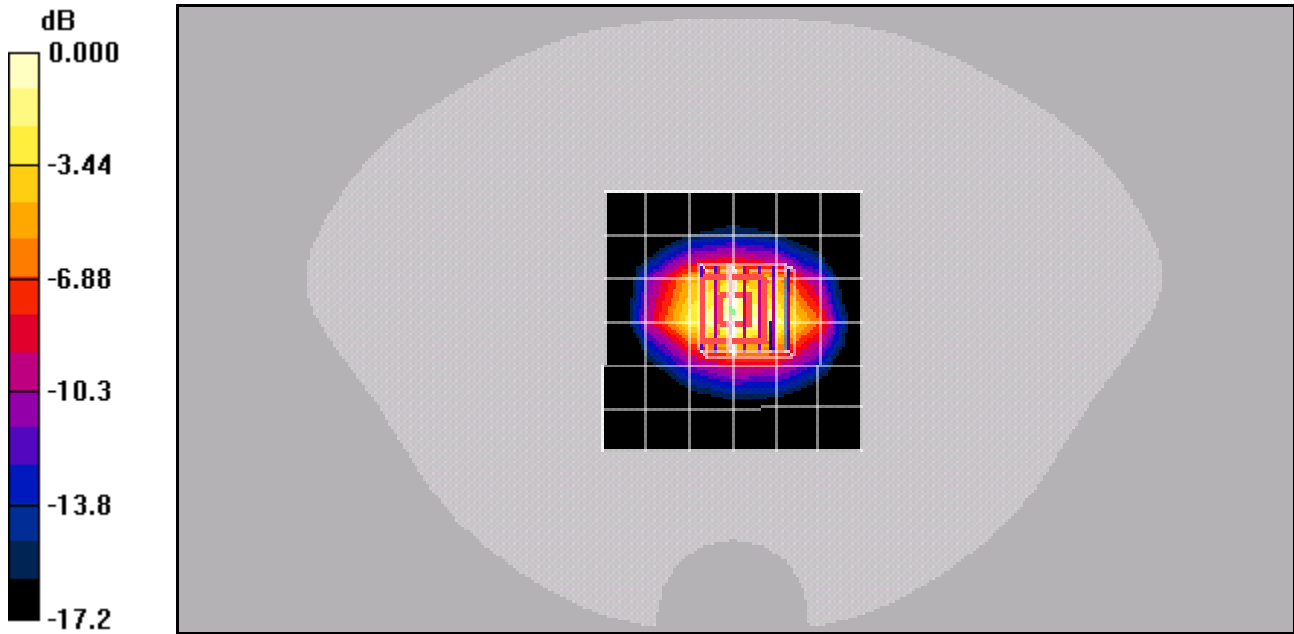

0 dB = 4.42mW/g