

Appendix B:

SAR Distribution Plots

Test Laboratory: Kyocera

KX13 #6SXC Left Cheek AMPS ch383, EXTENDED BATTERY

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 30.5 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 1.000 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.48 mW/g

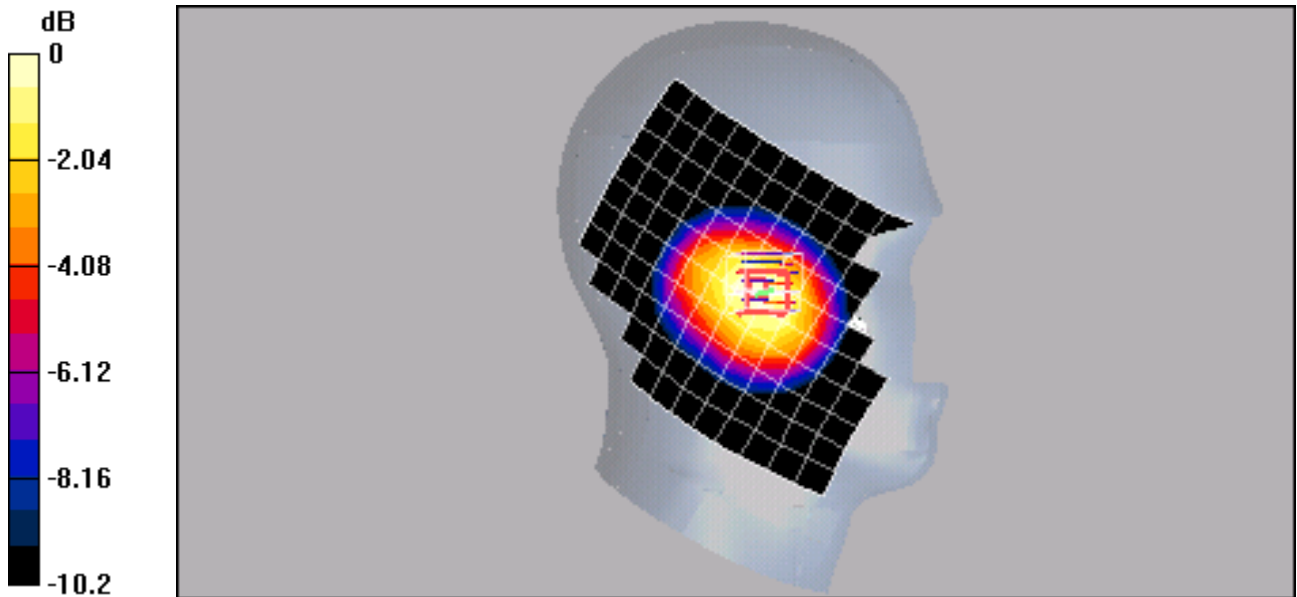

0 dB = 1.48mW/g

Test Laboratory: Kyocera

KX13 #6SXC Left Tilt AMPS ch383, EXTENDED BATTERY

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.8 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.2 W/kg

SAR(1 g) = 0.898 mW/g; SAR(10 g) = 0.646 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.948 mW/g

AMPS Ch383 LT/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 31.8 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.817 mW/g; SAR(10 g) = 0.548 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.910 mW/g

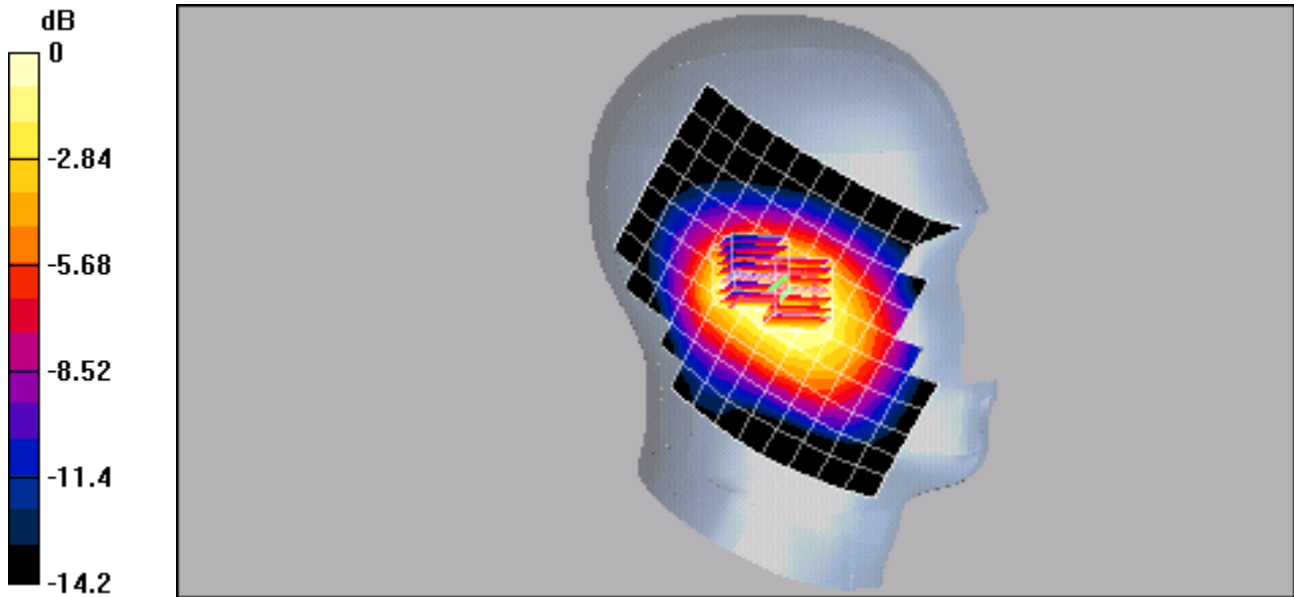

0 dB = 0.910mW/g

Test Laboratory: Kyocera

KX13 #6SXC Right Cheek AMPS ch383, EXTENDED BATTERY

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 30.4 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 1.43 mW/g; SAR(10 g) = 1.04 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.5 mW/g

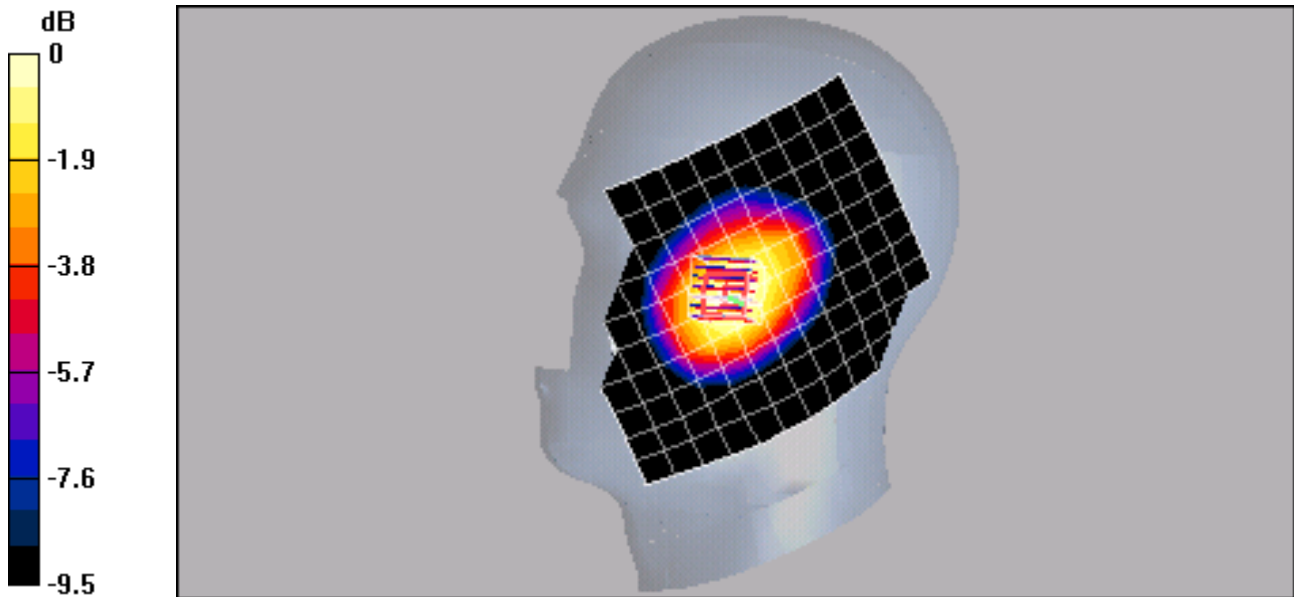

0 dB = 1.5mW/g

Test Laboratory: Kyocera

KX13 #6SXC Right Tilt AMPS ch383, EXTENDED BATTERY

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 30 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.09 W/kg


SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.593 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.876 mW/g

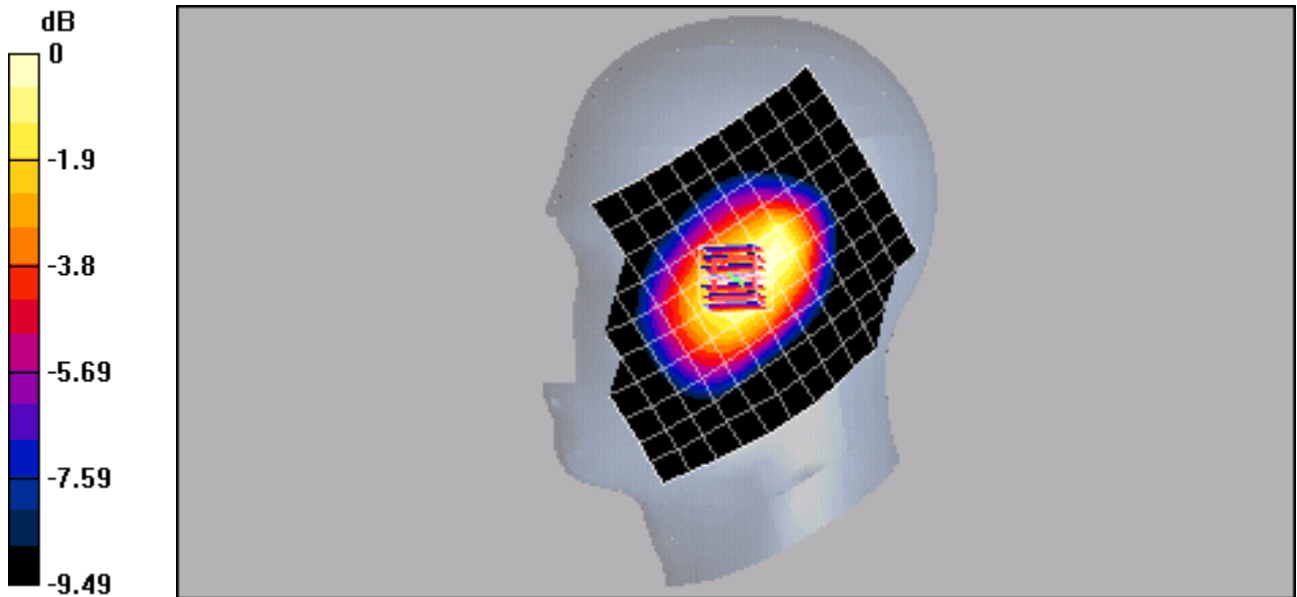

0 dB = 0.876mW/g

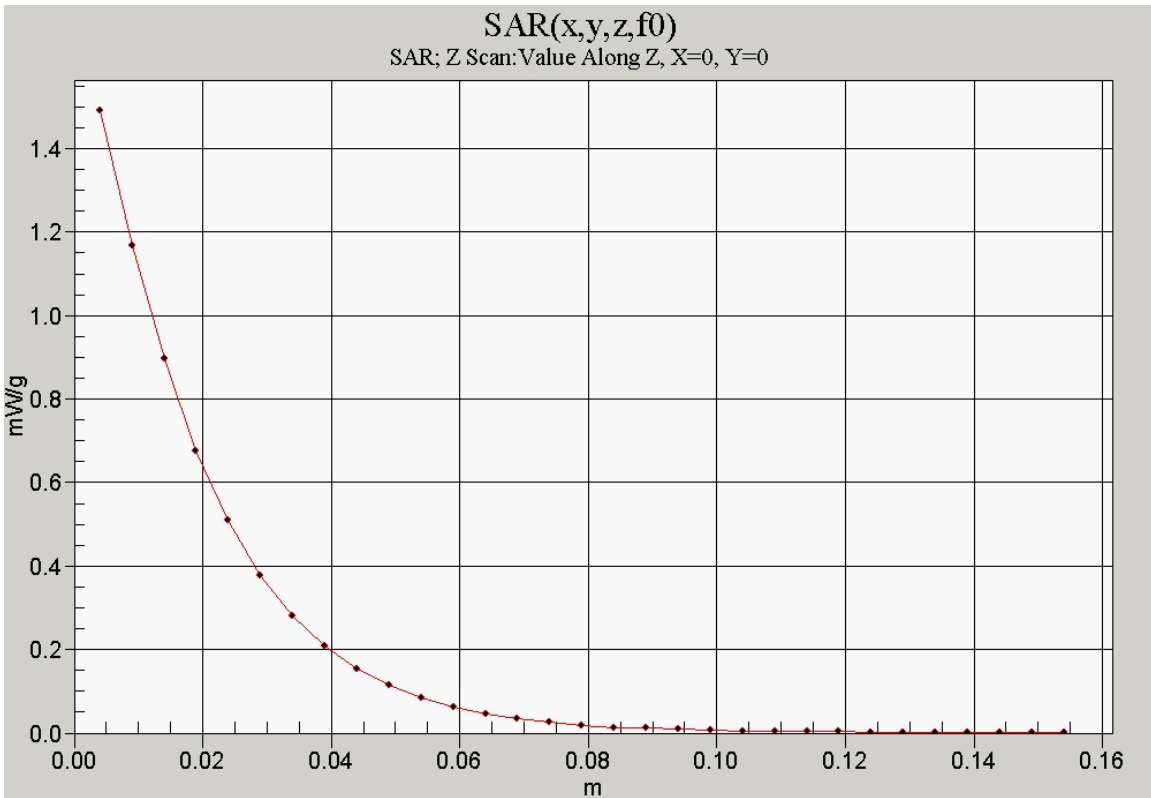

Test Laboratory: Kyocera

KX13 #6SXC CDMA-800 ch383 Left Cheek, EXTENDED BATTERY

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 30.3 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.993 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 1.48 mW/g

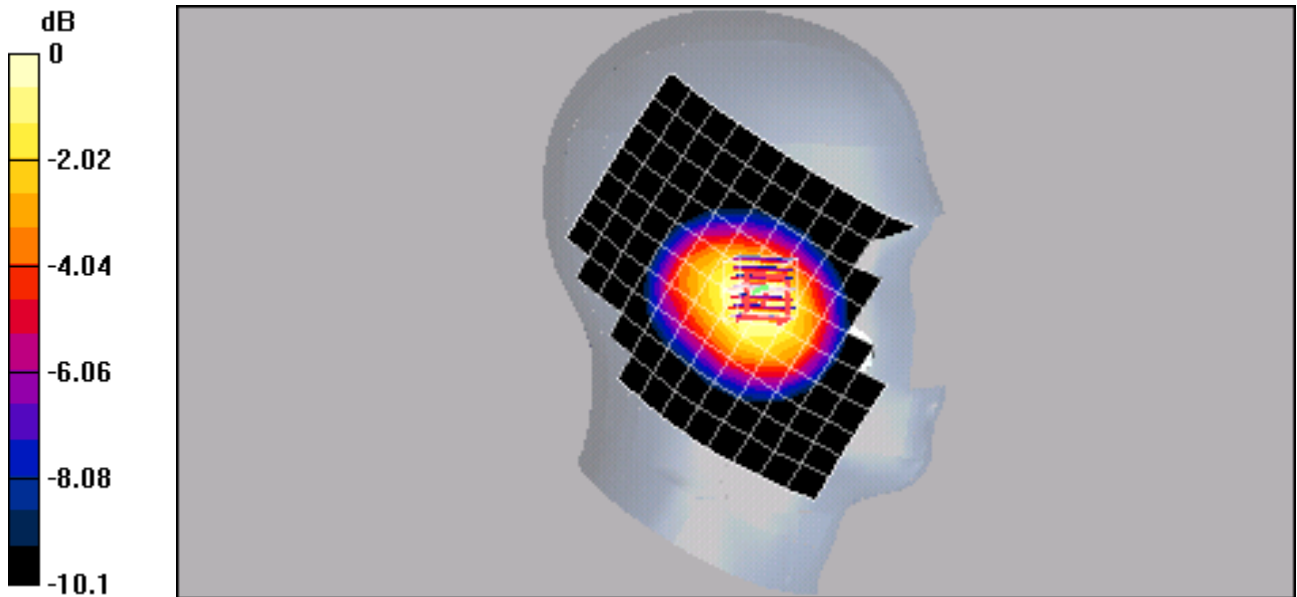

0 dB = 1.48mW/g

Test Laboratory: Kyocera

KX13 #6SXC CDMA-800 ch383 Left Tilt, EXTENDED BATTERY

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.6 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.641 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.954 mW/g

CDMA-800 Ch383 LT/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 30.6 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.810 mW/g; SAR(10 g) = 0.552 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.906 mW/g

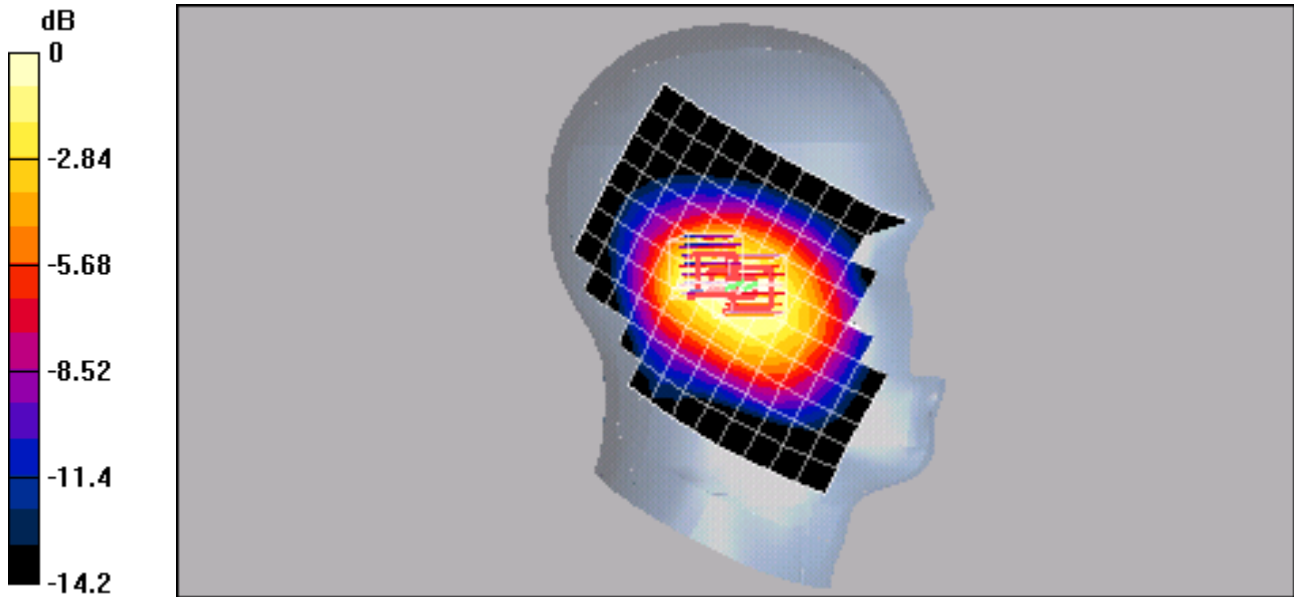

0 dB = 0.906mW/g

Test Laboratory: Kyocera

KX13 #6SXC CDMA-800 ch383 Right Cheek, EXTENDED BATTERY

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 31.2 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.45 mW/g; SAR(10 g) = 1.05 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 1.53 mW/g

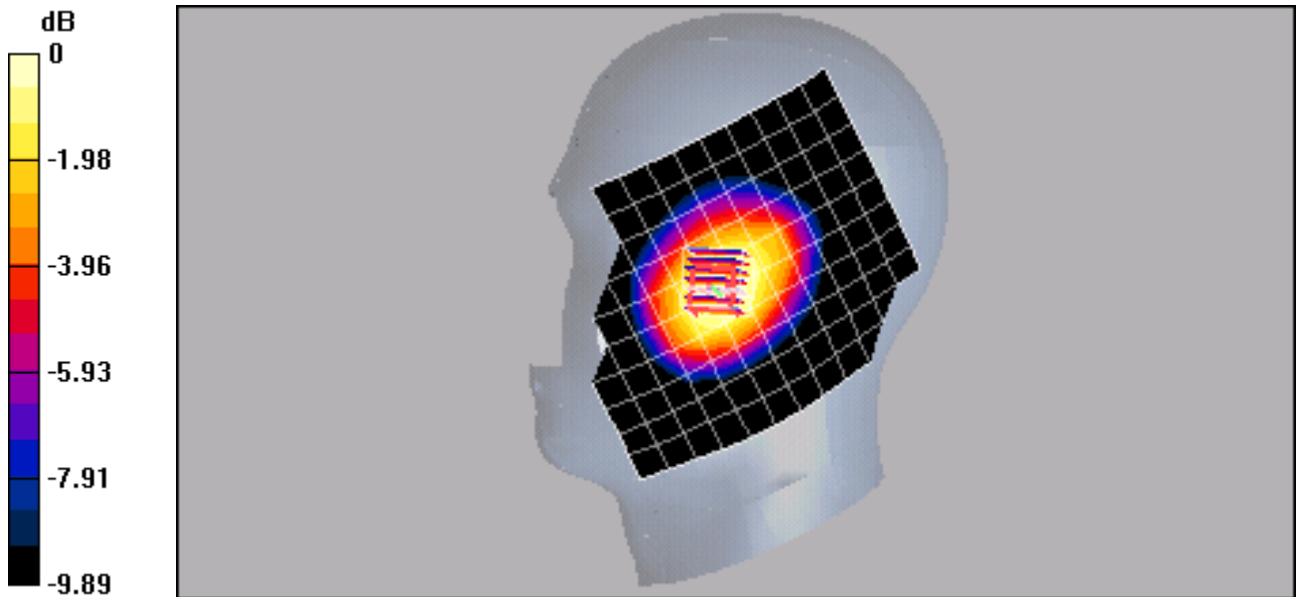

0 dB = 1.53mW/g

Test Laboratory: Kyocera

KX13 #6SXC CDMA-800 ch383 Right Tilt, EXTENDED BATTERY

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.1 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 0.844 mW/g; SAR(10 g) = 0.570 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.905 mW/g

CDMA-800 Ch383 RT/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 31.1 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.15 W/kg


SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.625 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.915 mW/g

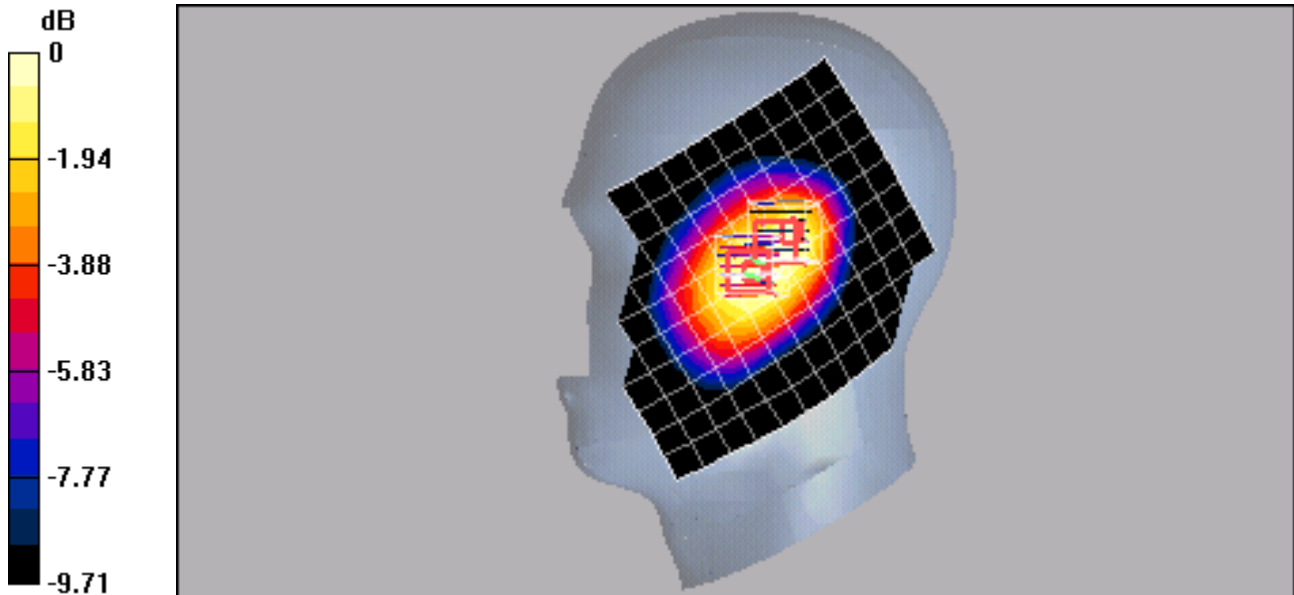

0 dB = 0.915mW/g

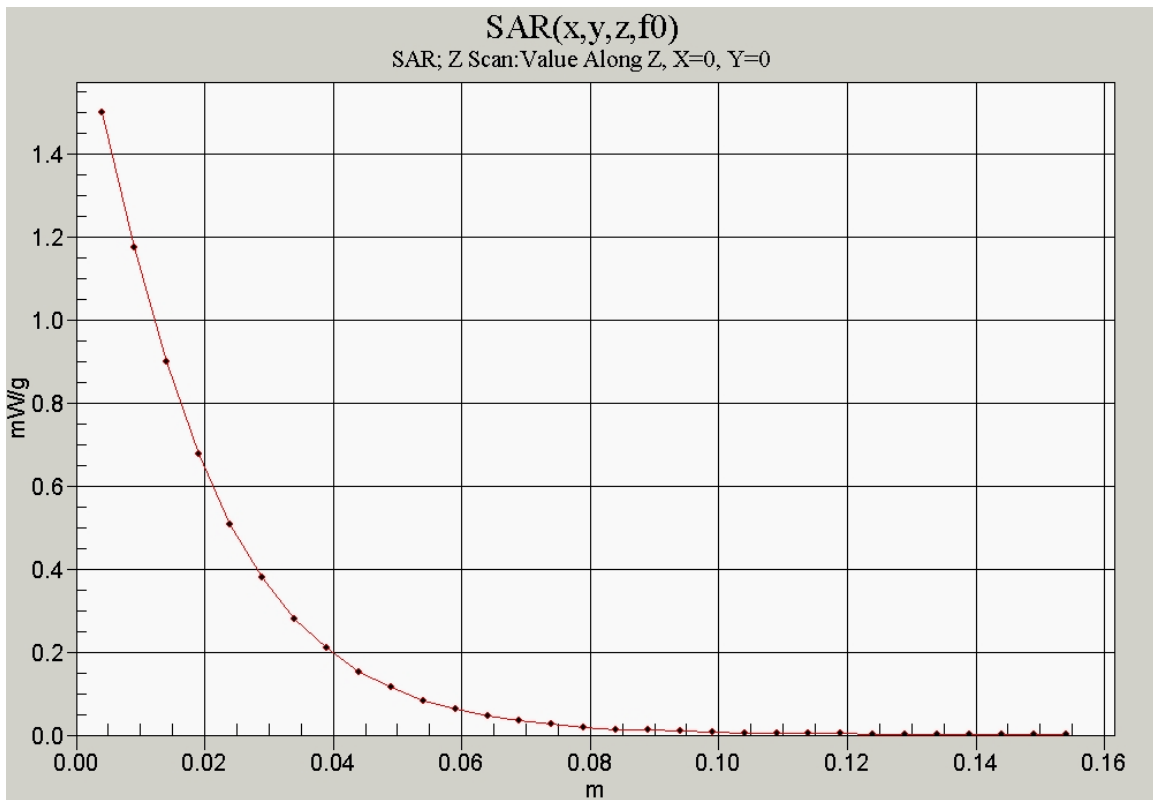

Test Laboratory: Kyocera

KX13 #6SXC PCS ch600 Left Cheek


Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1
Medium: HSL1800,Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:
Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005
Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),
Electronics: DAE4 Sn602,Calibrated: 8/27/2004
Measurement SW: DASY4, V4.4 Build 3
Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:
Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch600 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.3 V/m; Power Drift = -0.1 dB
Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.945 mW/g; SAR(10 g) = 0.607 mW/g
Maximum value of SAR (measured) = 1.03 mW/g

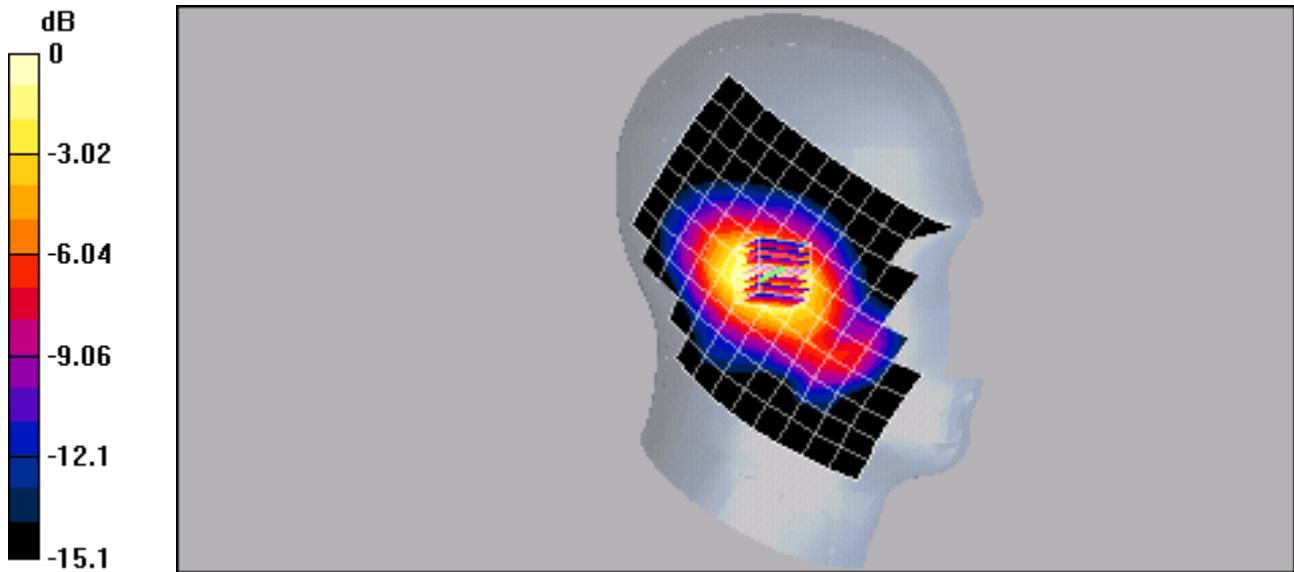

Test Laboratory: Kyocera

KX13 #6SXC PCS ch25 Left Tilt

Communication System: CDMA-1900, Frequency: 1851.25 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used (extrapolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch25 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.8 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.580 mW/g

Info: Extrapolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 1.06 mW/g

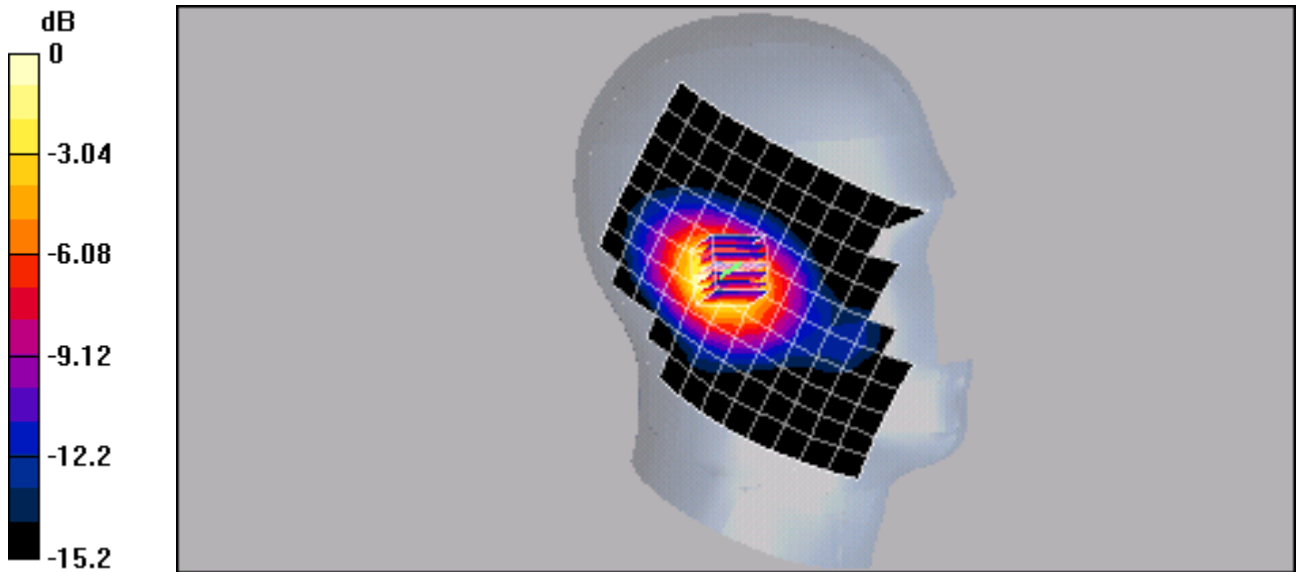

0 dB = 1.06mW/g

Test Laboratory: Kyocera

KX13 #6SXC PCS ch1175 Right Cheek

Communication System: CDMA-1900, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch1175 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 20.7 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.4 W/kg

SAR(1 g) = 0.942 mW/g; SAR(10 g) = 0.603 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.03 mW/g

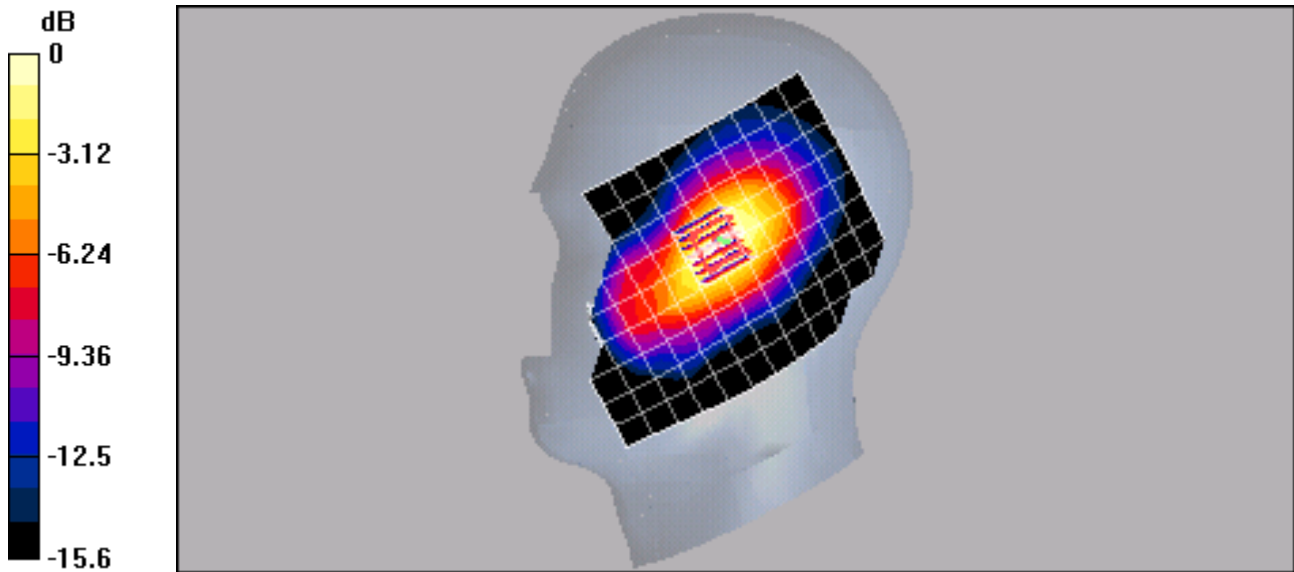

0 dB = 1.03mW/g

Test Laboratory: Kyocera

KX13 #6SXC PCS ch1175 Right Tilt

Communication System: CDMA-1900, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch1175 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.4 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.6 W/kg


SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.608 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.08 mW/g

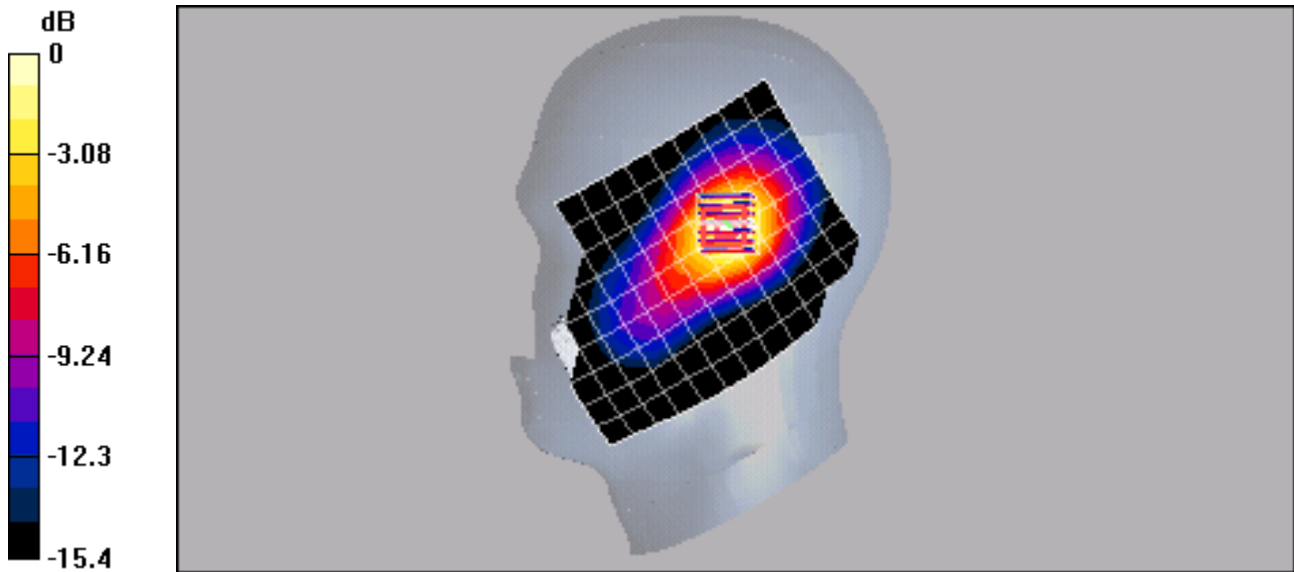

0 dB = 1.08mW/g

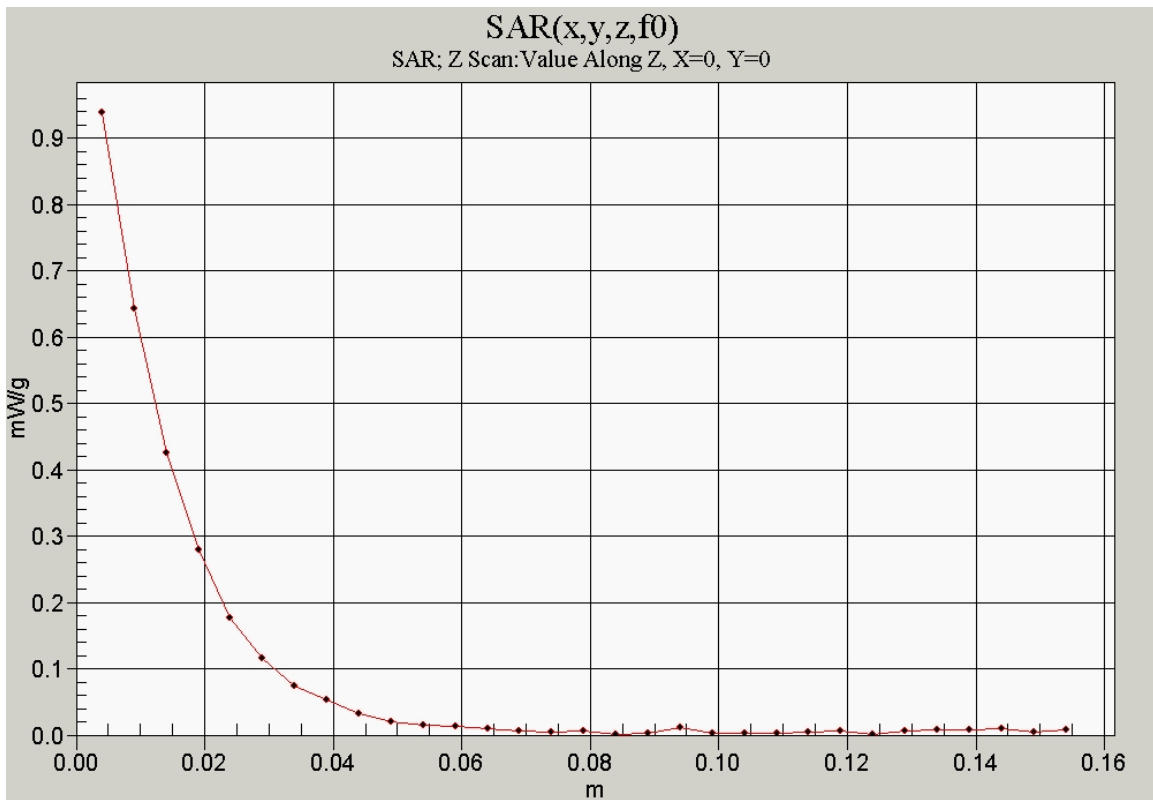

Test Laboratory: Kyocera

KX13 #6SXC AMPS ch383 Flat with 25mm Air Space

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.562 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.801 mW/g

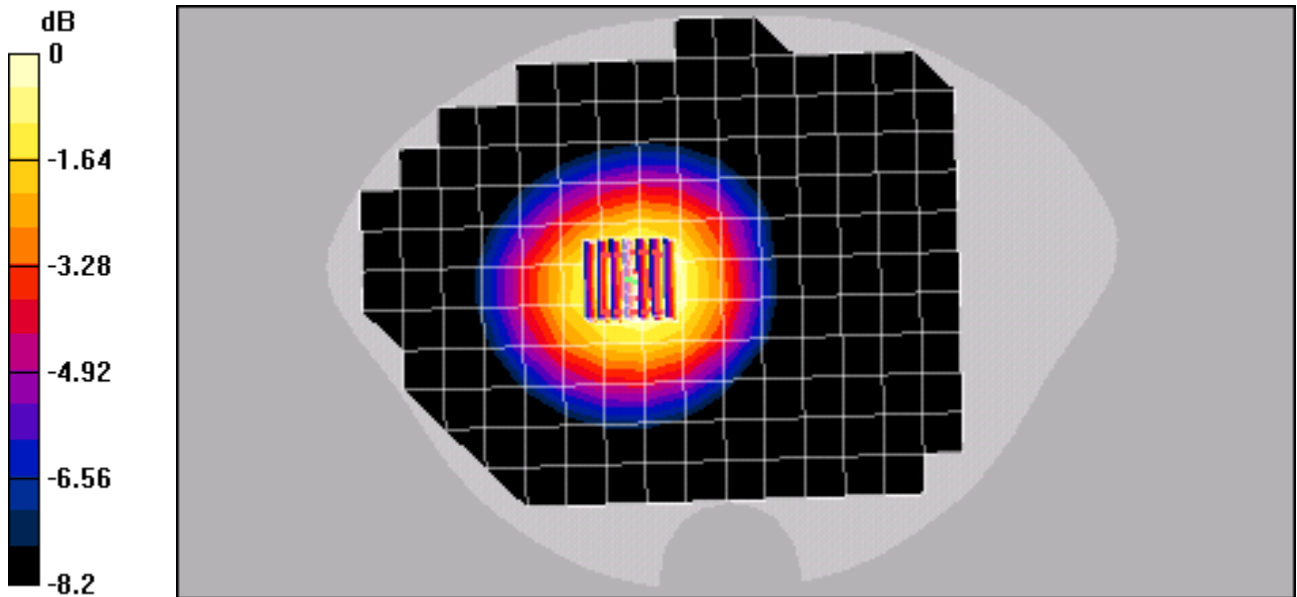

0 dB = 0.801mW/g

Test Laboratory: Kyocera

KX13 #6SXC AMPS ch383 Flat with Belt Clip

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22.4 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.732 mW/g; SAR(10 g) = 0.540 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.776 mW/g

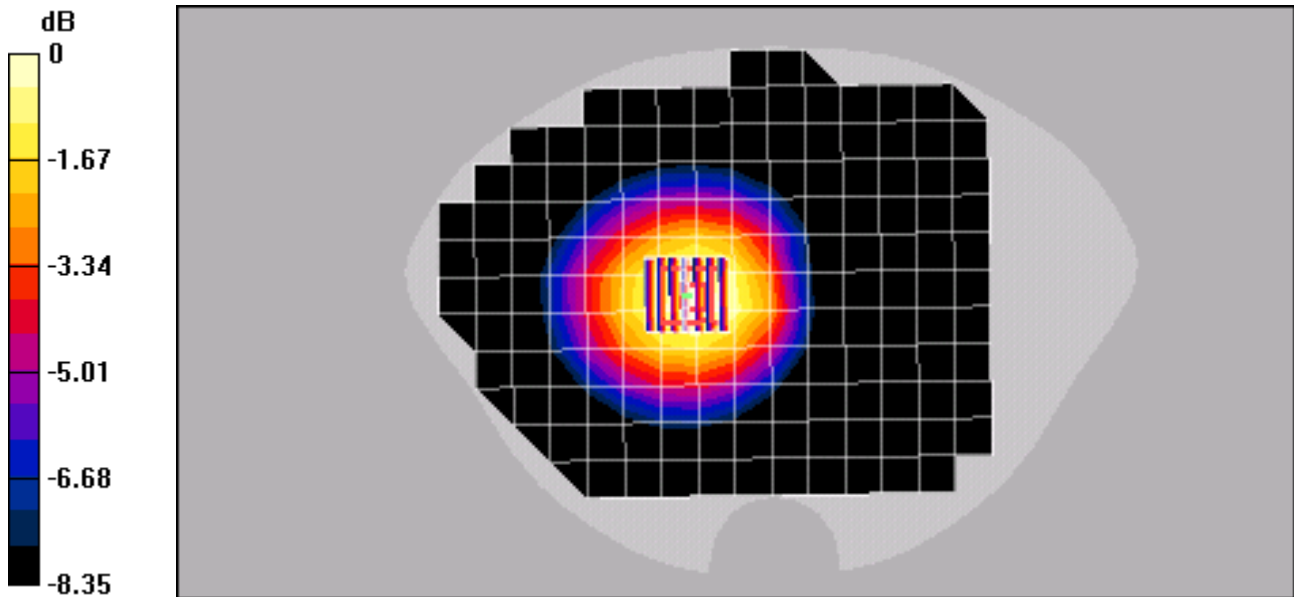

0 dB = 0.776mW/g

Test Laboratory: Kyocera

KX13 #6SXC AMPS ch383 Flat with Leather Case

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 24.5 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.847 W/kg


SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.496 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.715 mW/g

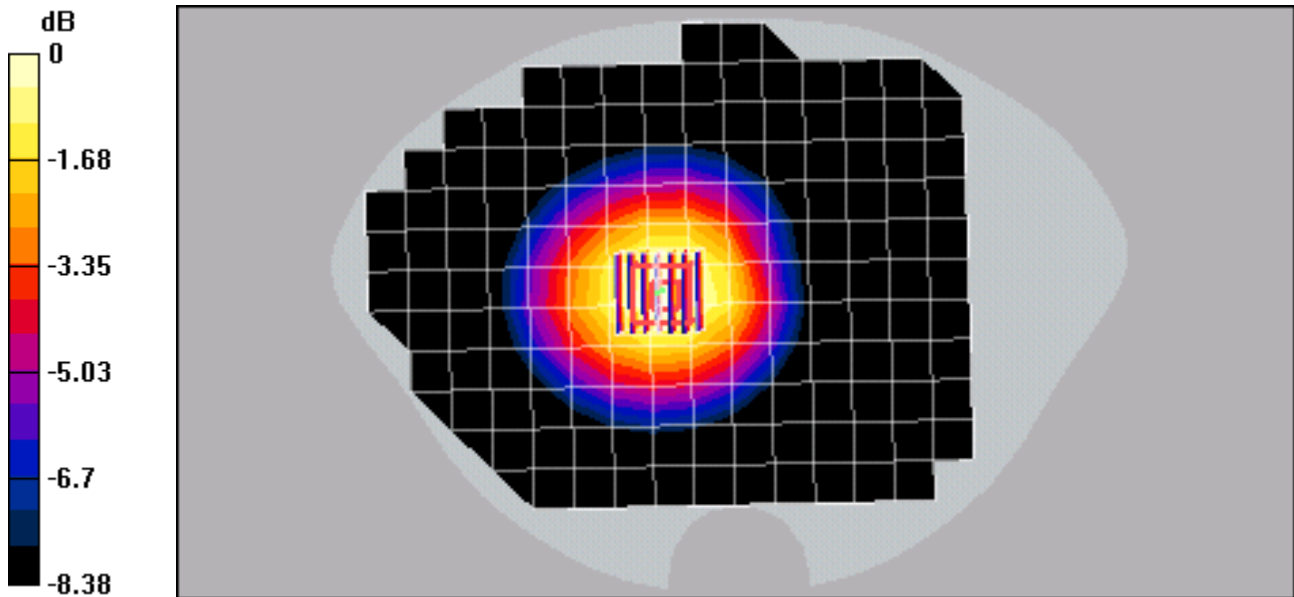

0 dB = 0.715mW/g

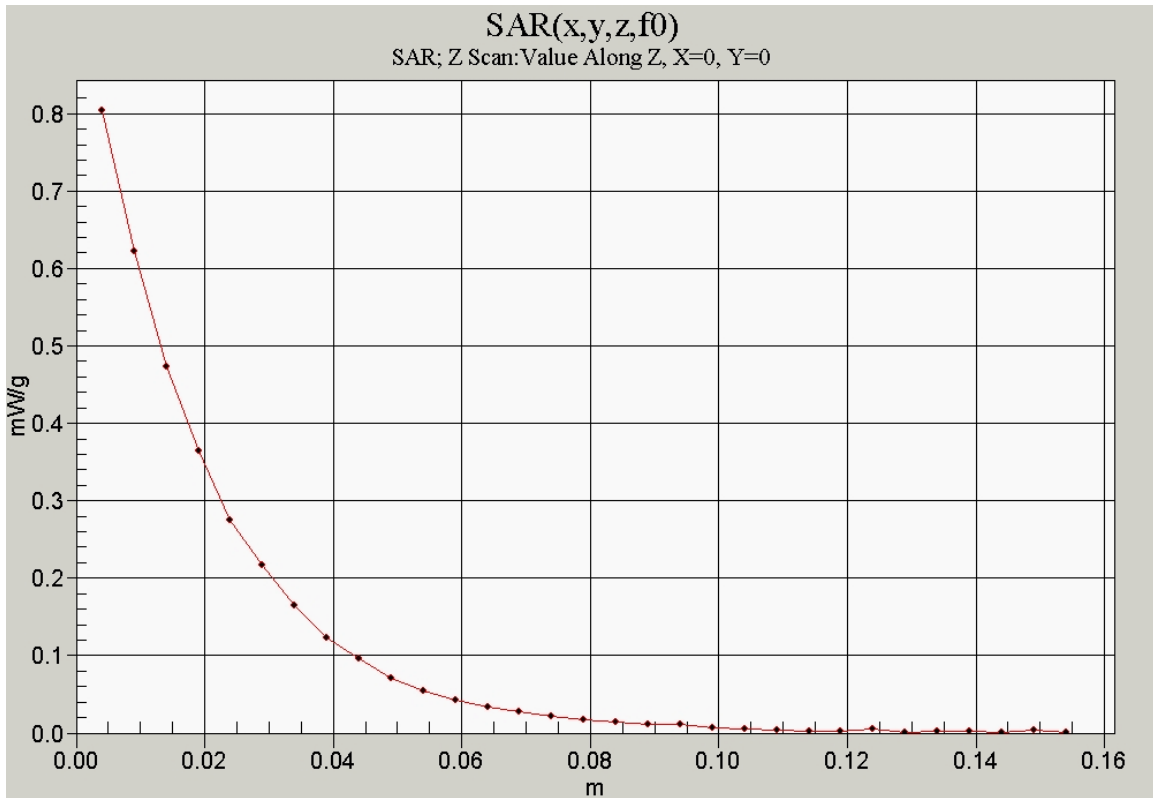

Test Laboratory: Kyocera

KX13 #6SXC CDMA-800 ch383 Flat with 25mm Air Space

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22.2 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.771 mW/g; SAR(10 g) = 0.571 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.812 mW/g

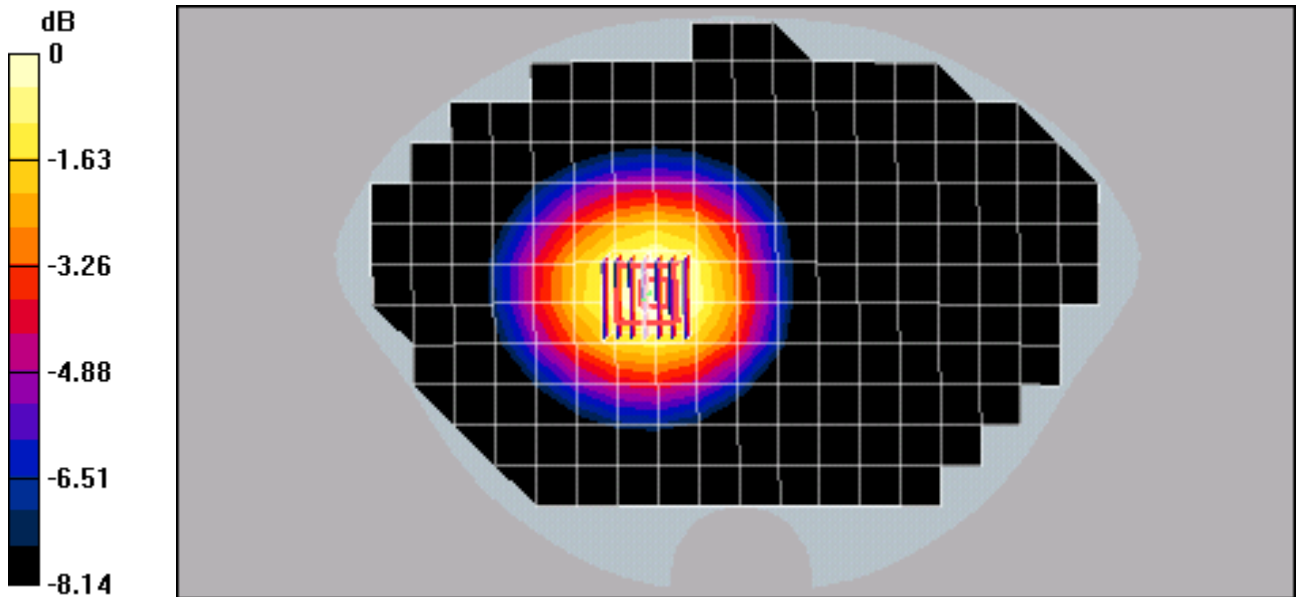

0 dB = 0.812mW/g

Test Laboratory: Kyocera

KX13 #6SXC CDMA-800 ch383 Flat with Belt Clip

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 23.1 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.779 mW/g; SAR(10 g) = 0.578 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.820 mW/g

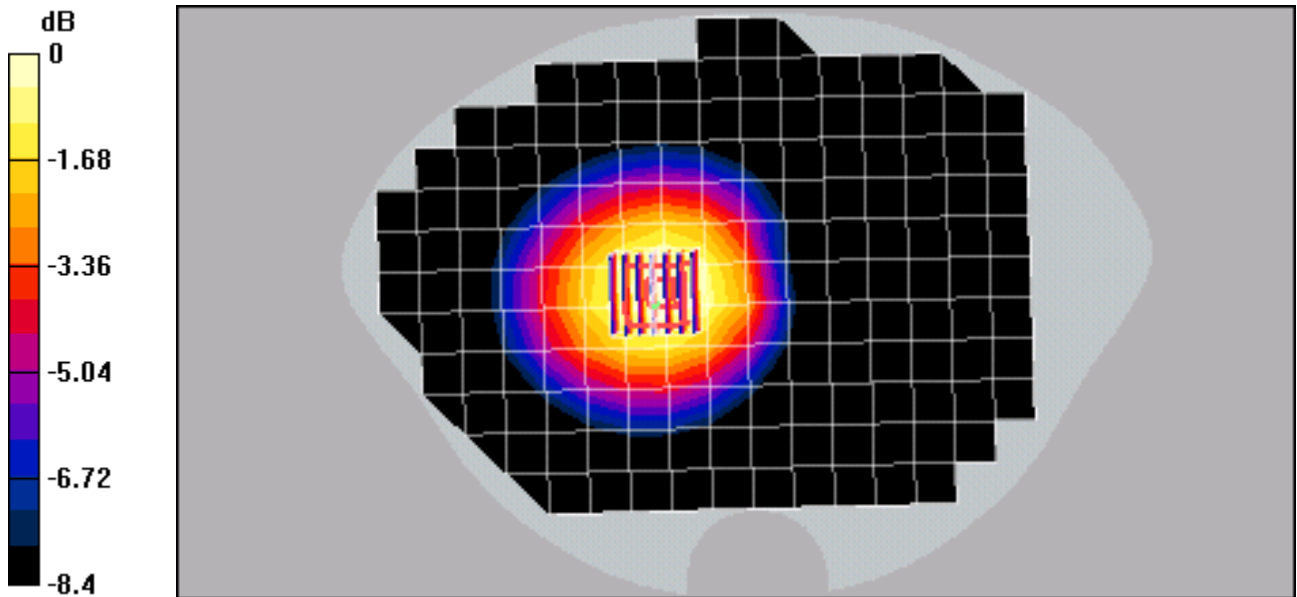

0 dB = 0.820mW/g

Test Laboratory: Kyocera

KX13 #6SXC CDMA-800 ch383 Flat with Leather Case

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 24.9 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.820 W/kg


SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.482 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.692 mW/g

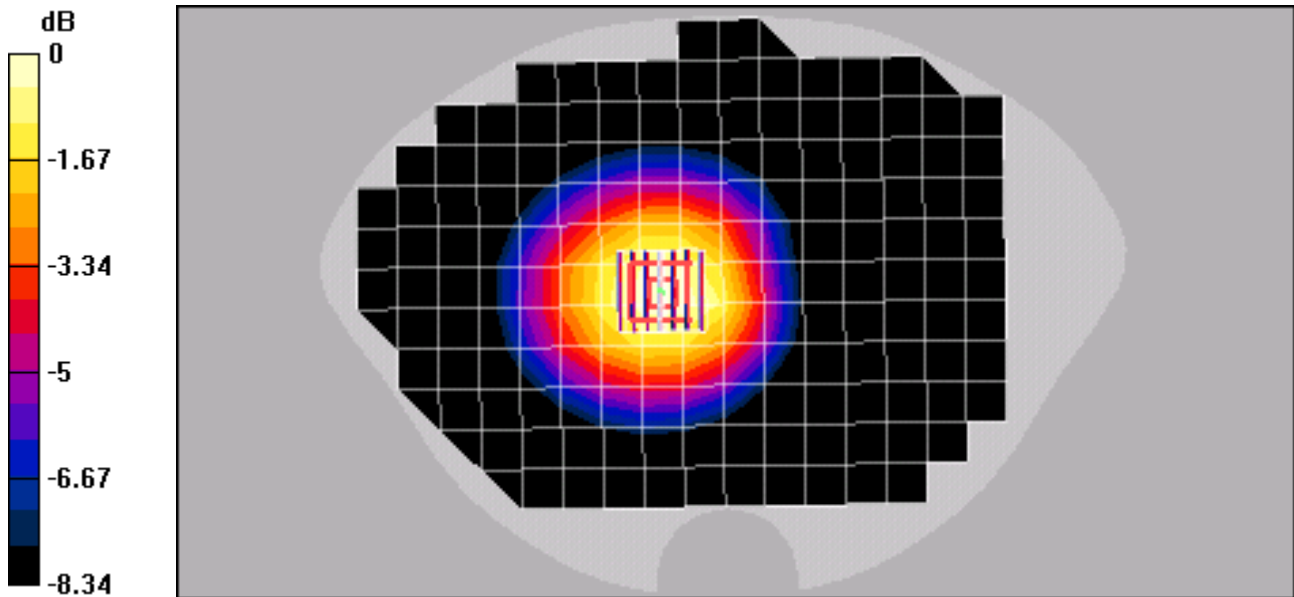

0 dB = 0.692mW/g

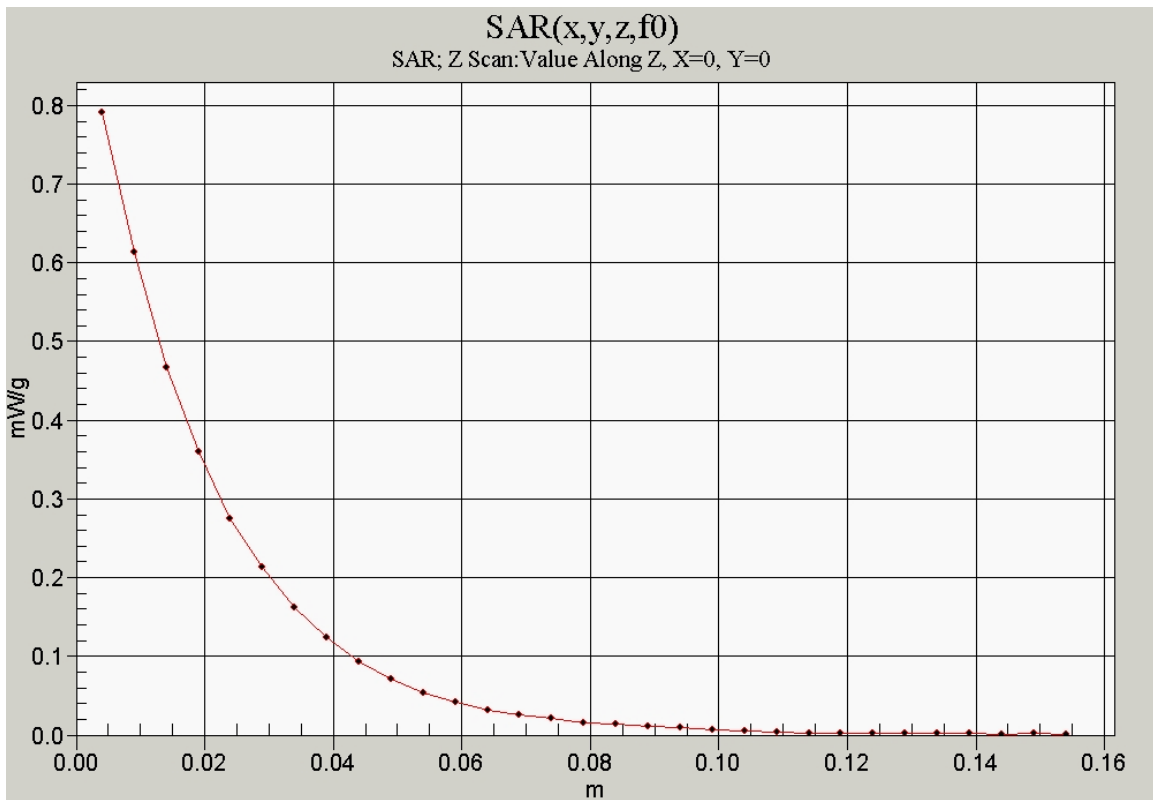

Test Laboratory: Kyocera

KX13 #6SXC PCS ch600 Flat with 25mm Air space


Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1
 Medium: M1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
 Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:
 Probe: ET3DV6 - SN1713, ConvF(4.62, 4.62, 4.62), Calibrated: 5/19/2005
 Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),
 Electronics: DAE4 Sn602, Calibrated: 8/27/2004
 Measurement SW: DASY4, V4.4 Build 3
 Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:
 Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch600 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.1 dB
 Peak SAR (extrapolated) = 0.550 W/kg
SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.234 mW/g
 Maximum value of SAR (measured) = 0.405 mW/g

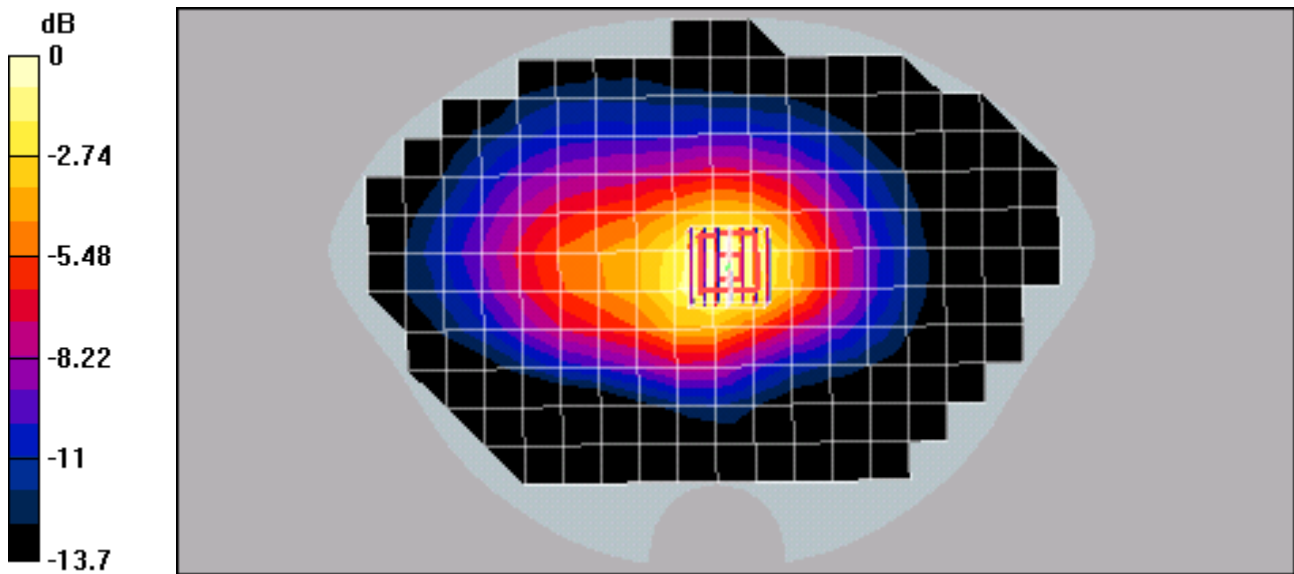

0 dB = 0.405mW/g

Test Laboratory: Kyocera

KX13 #6SXC PCS ch600 with Belt Clip


Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1
Medium: M1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:
Probe: ET3DV6 - SN1713, ConvF(4.62, 4.62, 4.62), Calibrated: 5/19/2005
Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),
Electronics: DAE4 Sn602, Calibrated: 8/27/2004
Measurement SW: DASY4, V4.4 Build 3
Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:
Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch600 Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = -0.2 dB
Peak SAR (extrapolated) = 0.602 W/kg
SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.253 mW/g
Maximum value of SAR (measured) = 0.437 mW/g

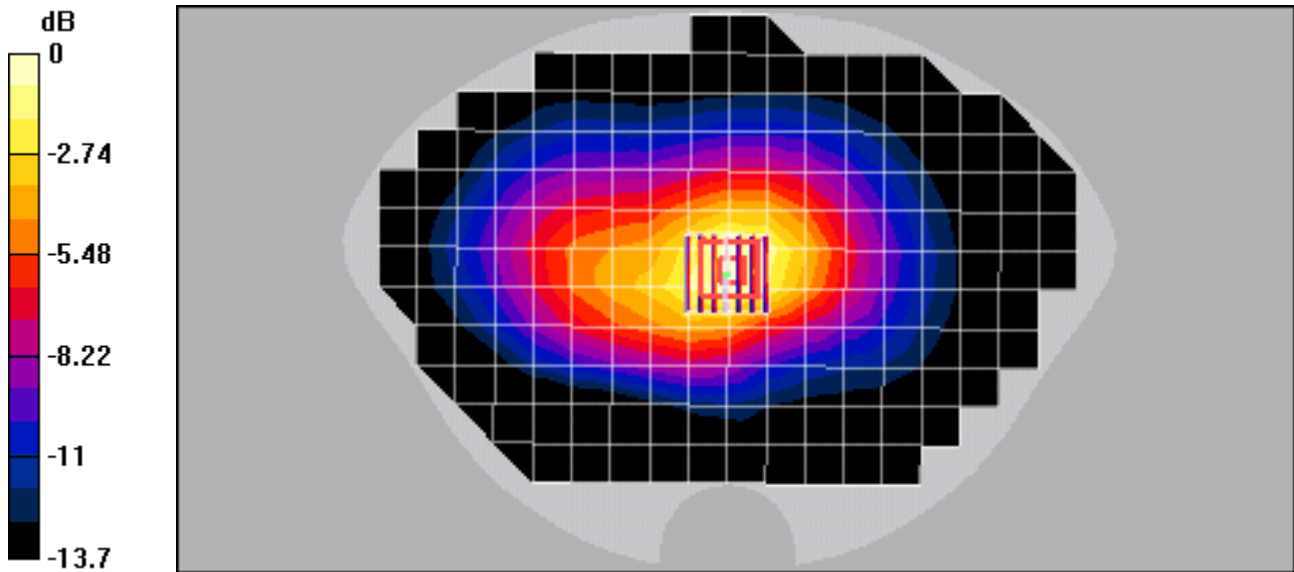

Test Laboratory: Kyocera

KX13 #6SXC PCS ch600 Flat with Leather Case

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1
Medium: M1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:
Probe: ET3DV6 - SN1713, ConvF(4.62, 4.62, 4.62), Calibrated: 5/19/2005
Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),
Electronics: DAE4 Sn602, Calibrated: 8/27/2004
Measurement SW: DASY4, V4.4 Build 3
Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:
Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch600 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.1 dB
Peak SAR (extrapolated) = 0.526 W/kg
SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.225 mW/g
Maximum value of SAR (measured) = 0.385 mW/g

