

Appendix B1:
SAR Distribution Plots (Head)

Test Laboratory: Kyocera

KX16 #5GPW AMPS Ch799 Left Cheek with Extended Battery

Communication System: AMPS, Frequency: 848.97 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 848.97$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


AMPS Ch799 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.7 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.864 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

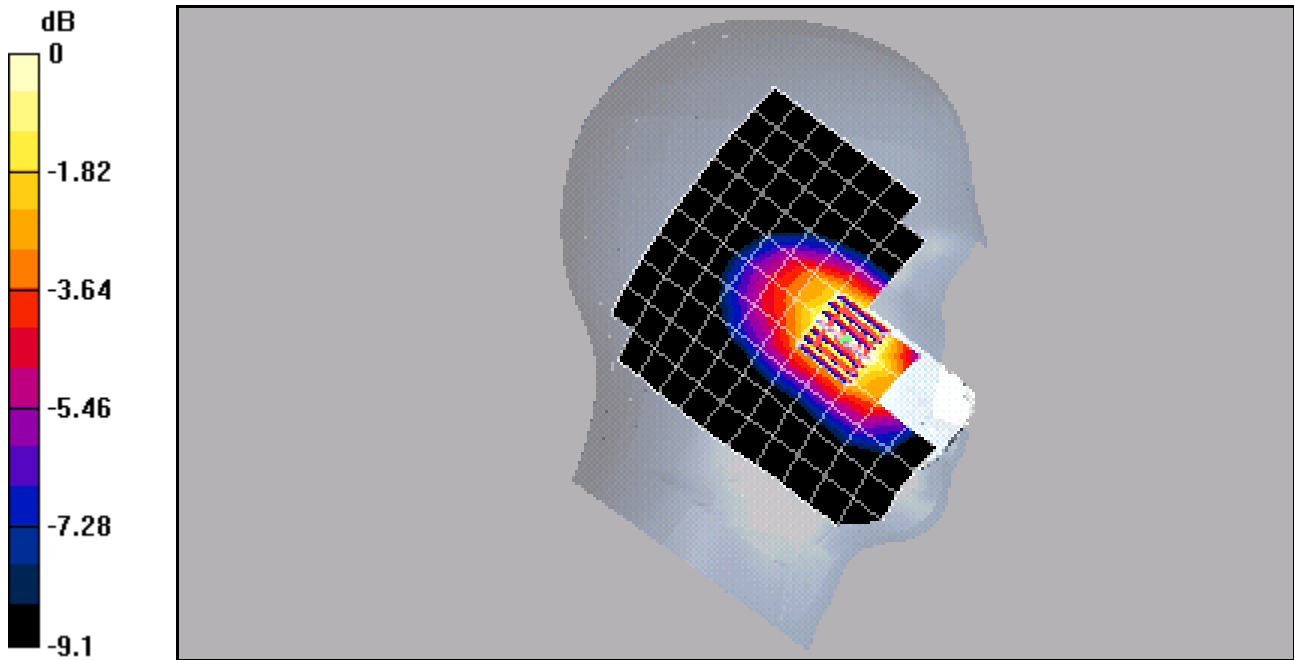

0 dB = 1.34mW/g

Test Laboratory: Kyocera

KX16 #5GPW AMPS ch383 Left Tilt with Extended Battery

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.2 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.324 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.459 mW/g

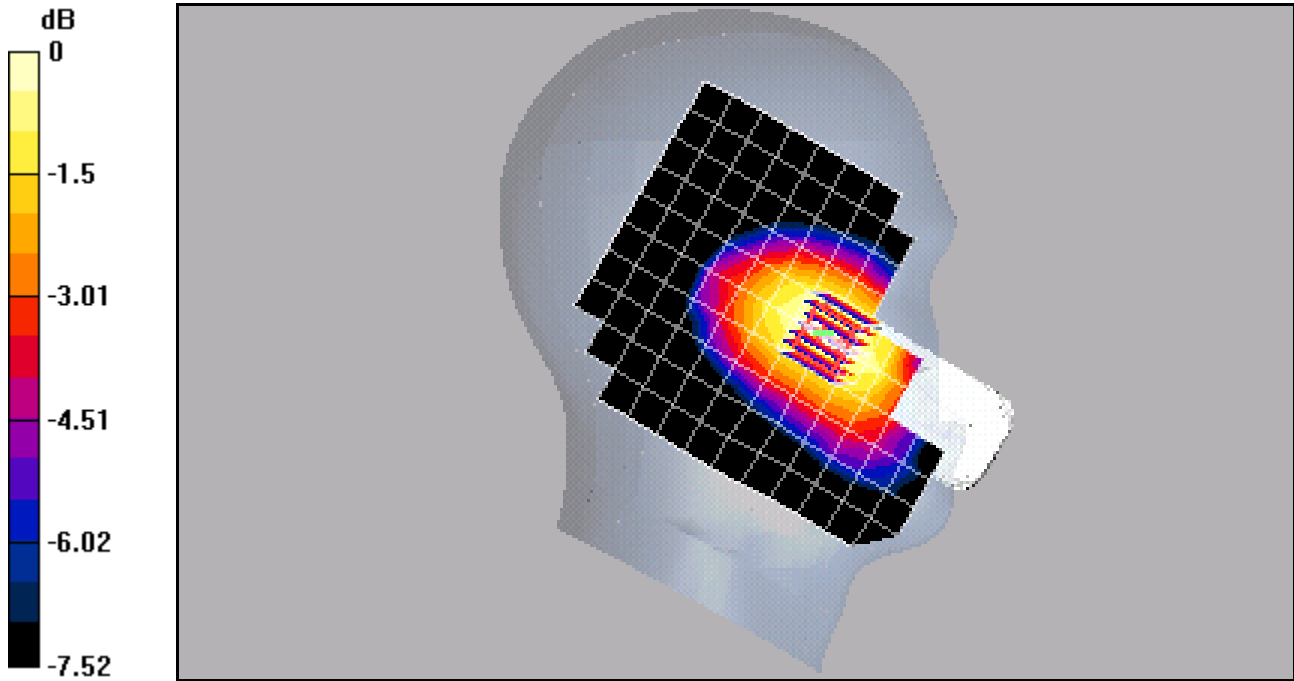

0 dB = 0.459mW/g

KX16 #5GPW AMPS Ch799 Right Cheek

Communication System: AMPS, Frequency: 848.97 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 848.97$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch799 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.2 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.43 mW/g; SAR(10 g) = 0.975 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.53 mW/g

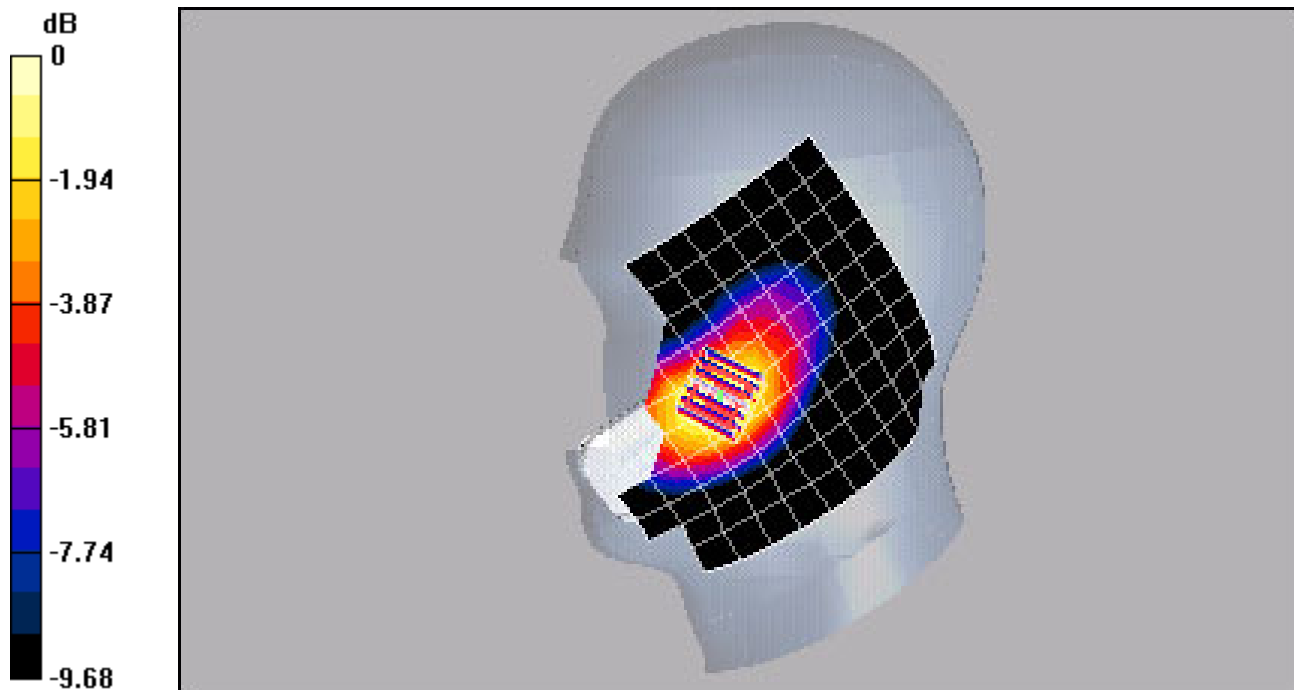

0 dB = 1.53mW/g

Test Laboratory: Kyocera

KX16 #5GPW AMPS Ch383 Right Tilt with Extended Battery

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 17.4 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.587 W/kg


SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.348 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.478 mW/g

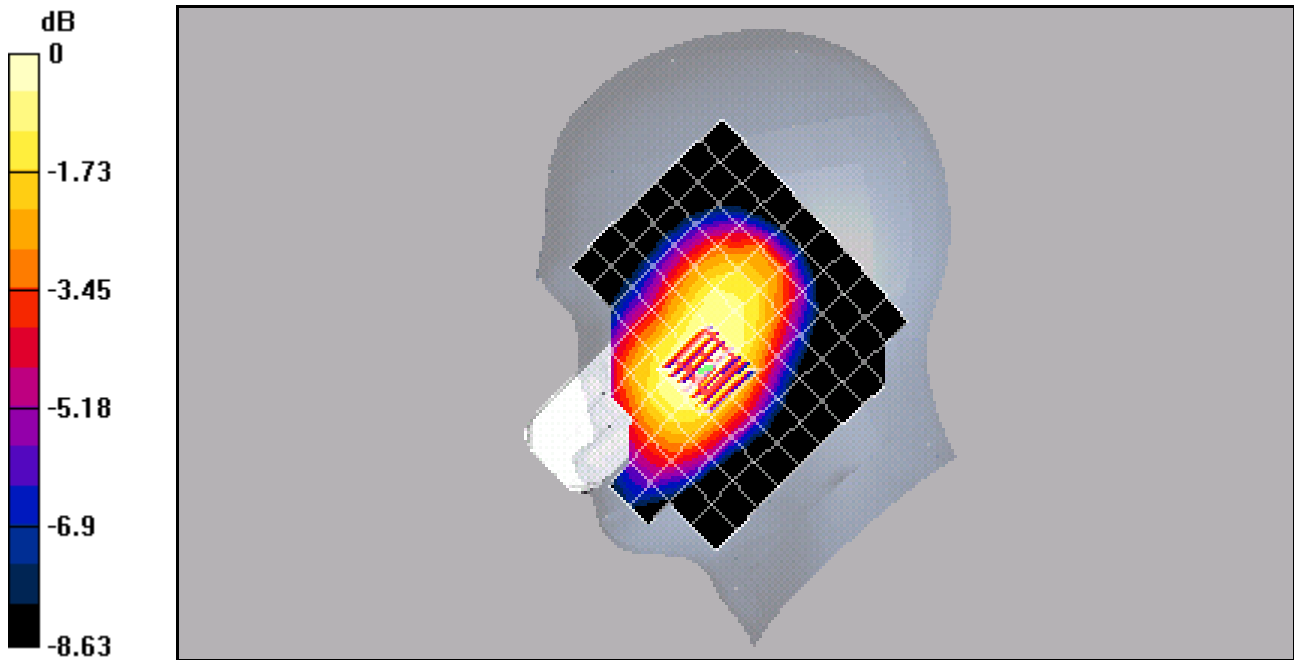

0 dB = 0.478mW/g

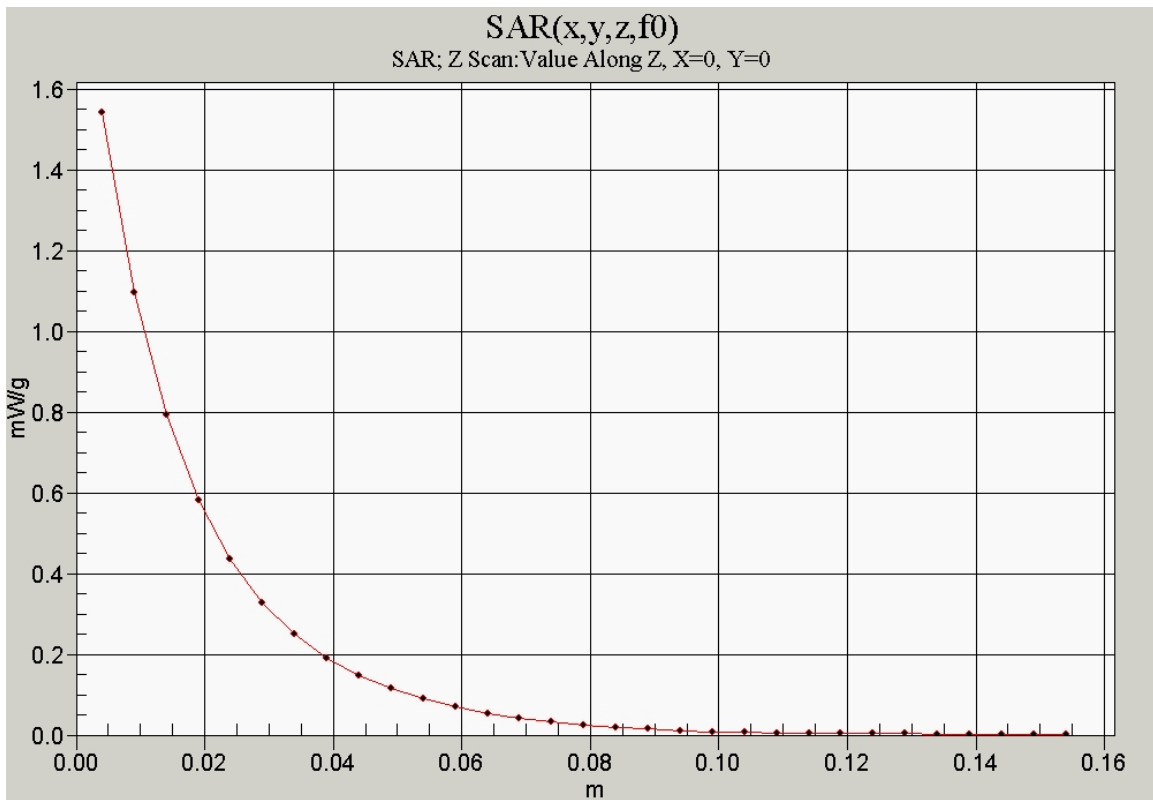

Test Laboratory: Kyocera

KX16 #5GPW CDMA-800 ch777, Left Cheek

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch777 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.99 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.829 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 1.25 mW/g

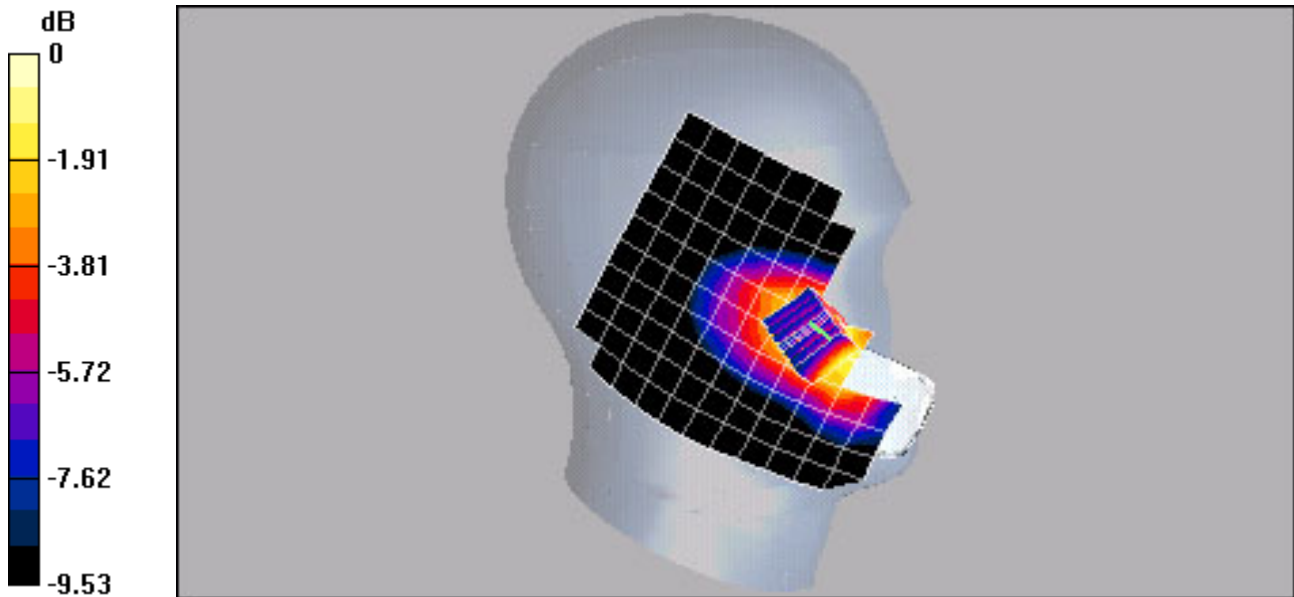

0 dB = 1.25mW/g

Test Laboratory: Kyocera

KX16 #5GPW CDMA-800 ch383 Left Tilt, Extended Battery

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA Ch383 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.1 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.308 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.422 mW/g

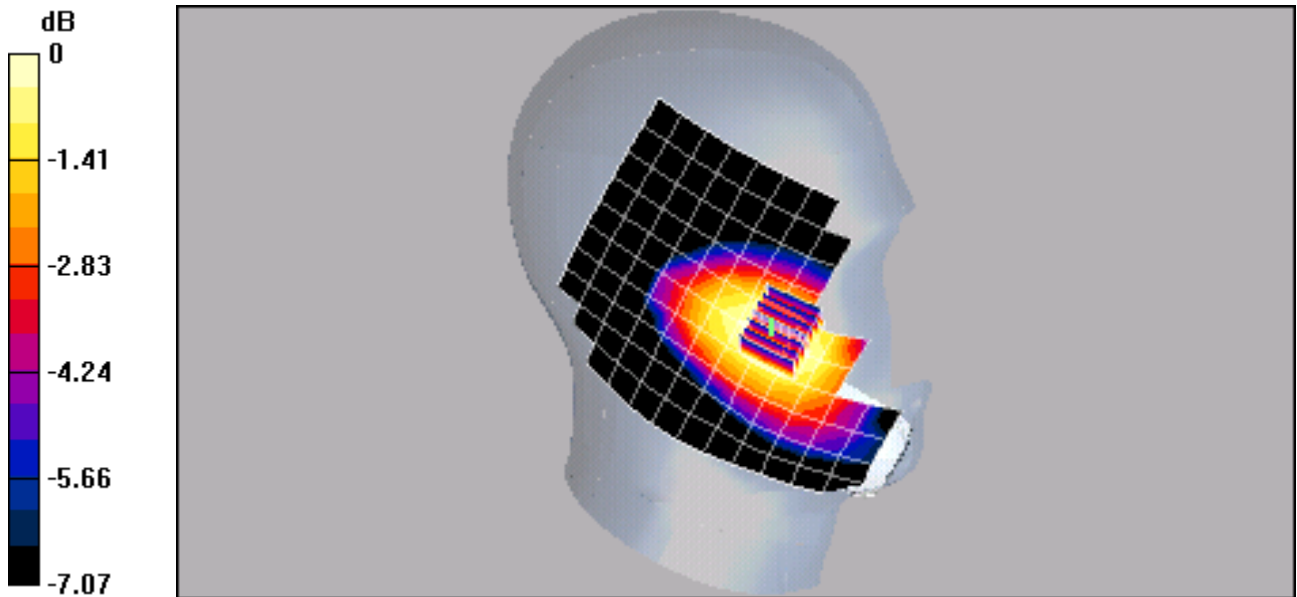

0 dB = 0.422mW/g

Test Laboratory: Kyocera

KX16 #5GPW CDMA-800 ch383 Right Cheek, Extended Battery

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA Ch383 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 13.1 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.896 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.4 mW/g

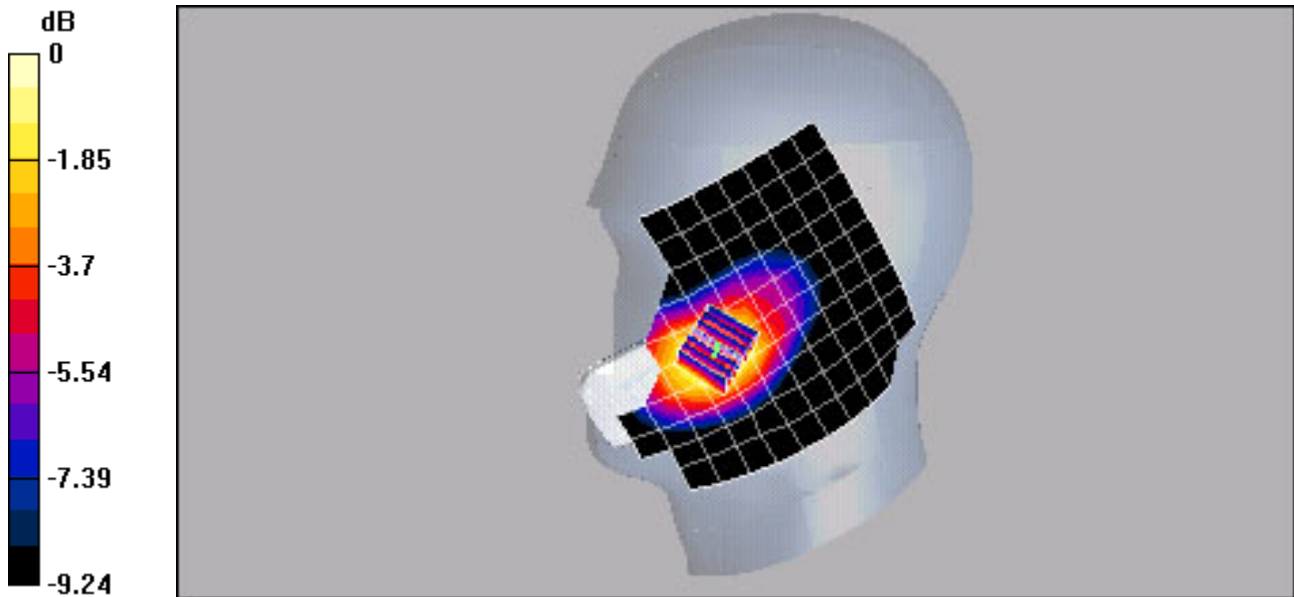

0 dB = 1.4mW/g

Test Laboratory: Kyocera

KX16 #5GPW CDMA-800 ch383 Right Tilt, Extended Battery

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(6.29, 6.29, 6.29), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA Ch383 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 16.1 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.556 W/kg


SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.334 mW/g

Info: Interpolated medium parameters used for SAR evaluation!

Maximum value of SAR (measured) = 0.458 mW/g

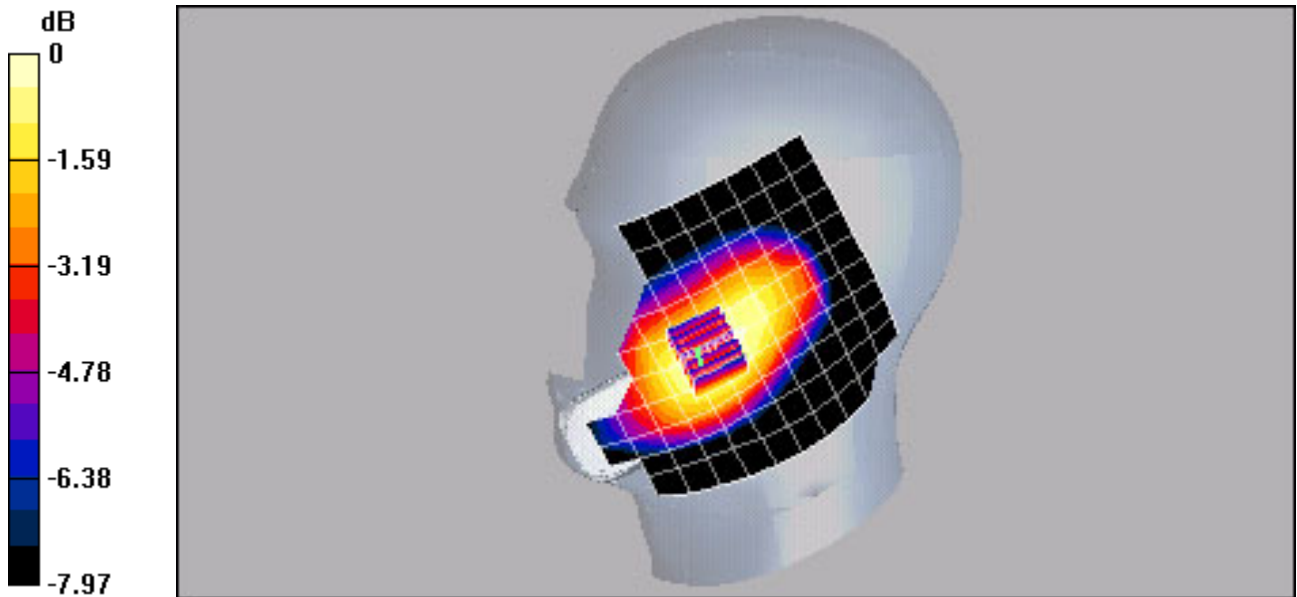

0 dB = 0.458mW/g

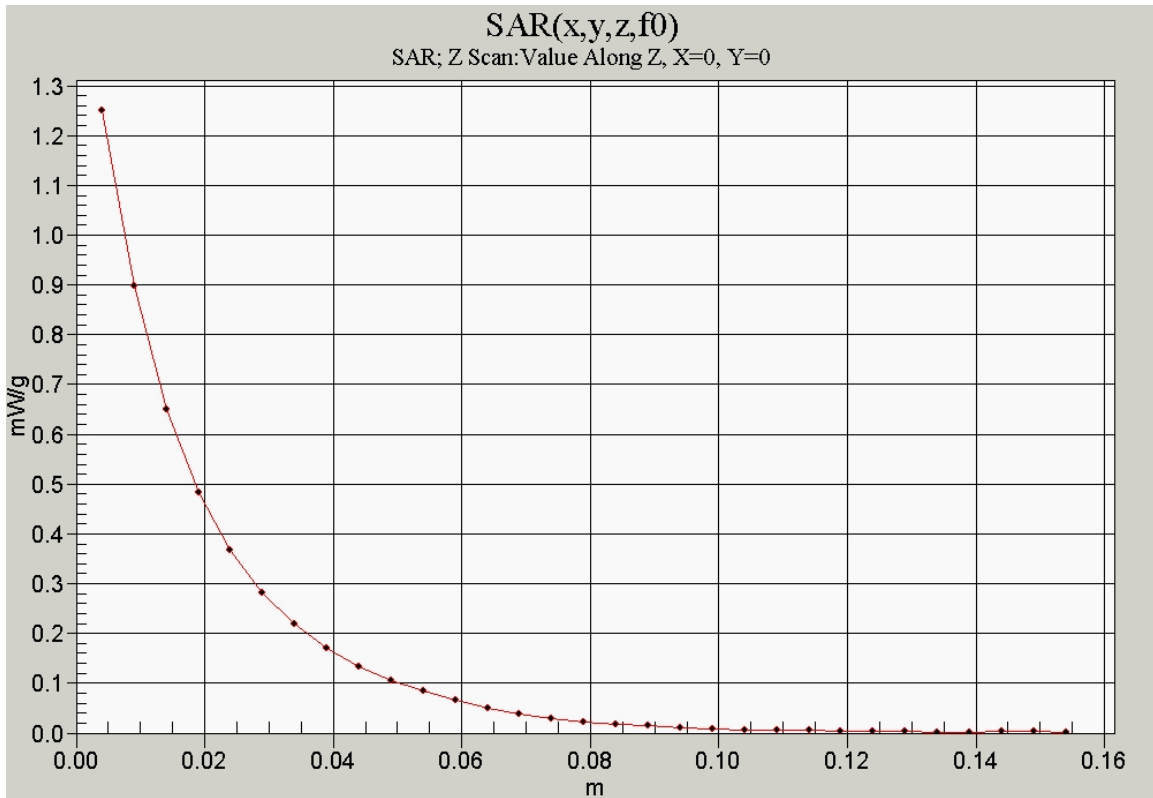

KX16 #5GPW PCS Ch383 Left Cheek

Communication System: PCS-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


PCS Ch600 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.52 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.685 mW/g

Maximum value of SAR (measured) = 1.23 mW/g

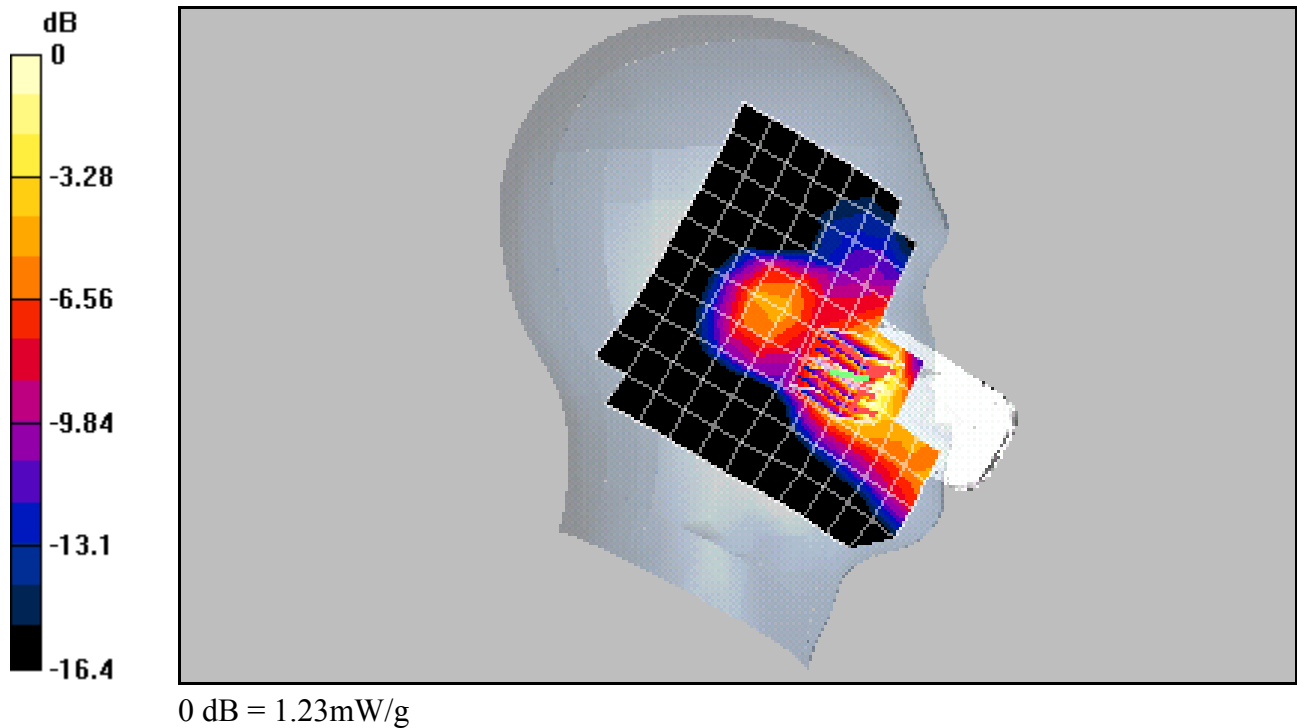

KX16 #5GPW CDMA-1900 Ch600 Left Tilt

Communication System: PCS-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


CDMA-1900 Ch600 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.546 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.603 mW/g

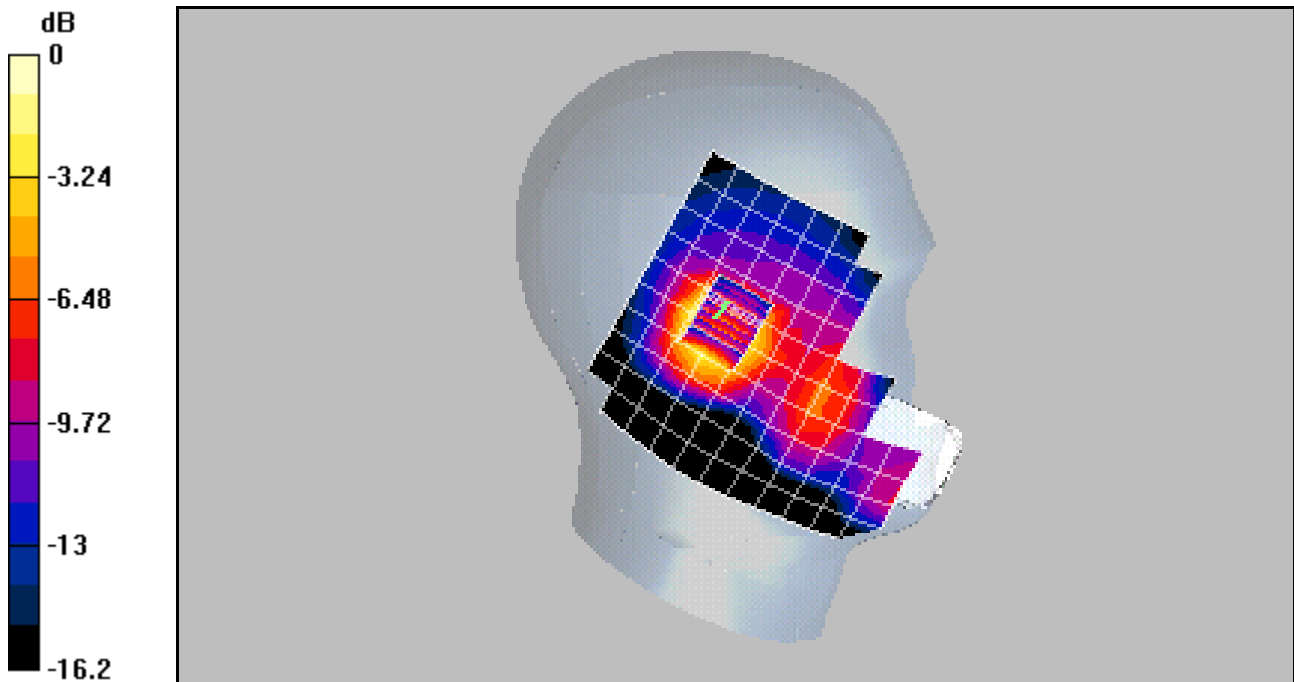

0 dB = 0.603mW/g

KX16 #5GPW CDMA-1900 Ch600 Right Cheek

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


CDMA-1900 Ch600 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.798 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

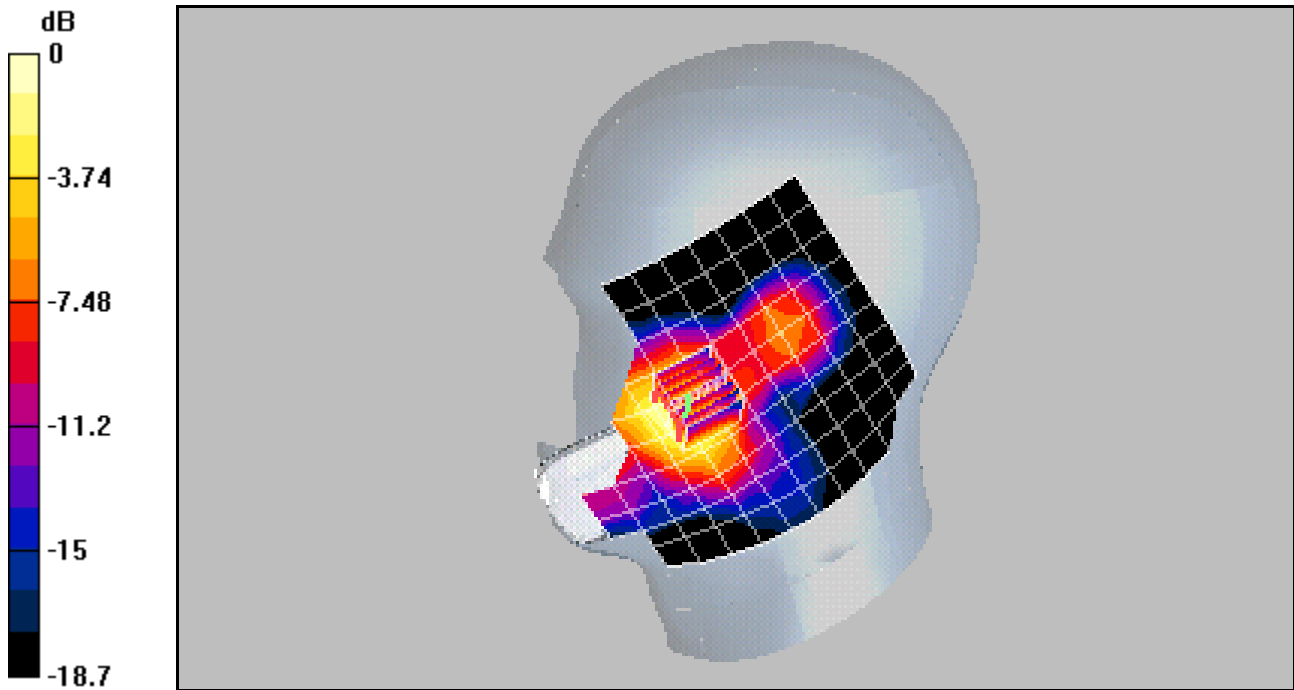

0 dB = 1.39mW/g

KX16 #5GPW CDMA-1900 Ch600 Right Tilt

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.18, 5.18, 5.18), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-1900 Ch600 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.1 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.444 mW/g

