

Appendix B2:
SAR Distribution Plots (Body)

KX16 #5GPW AMPS Ch383 Flat Phone Open with 25mm Air Space

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 25.9 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.554 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.794 mW/g

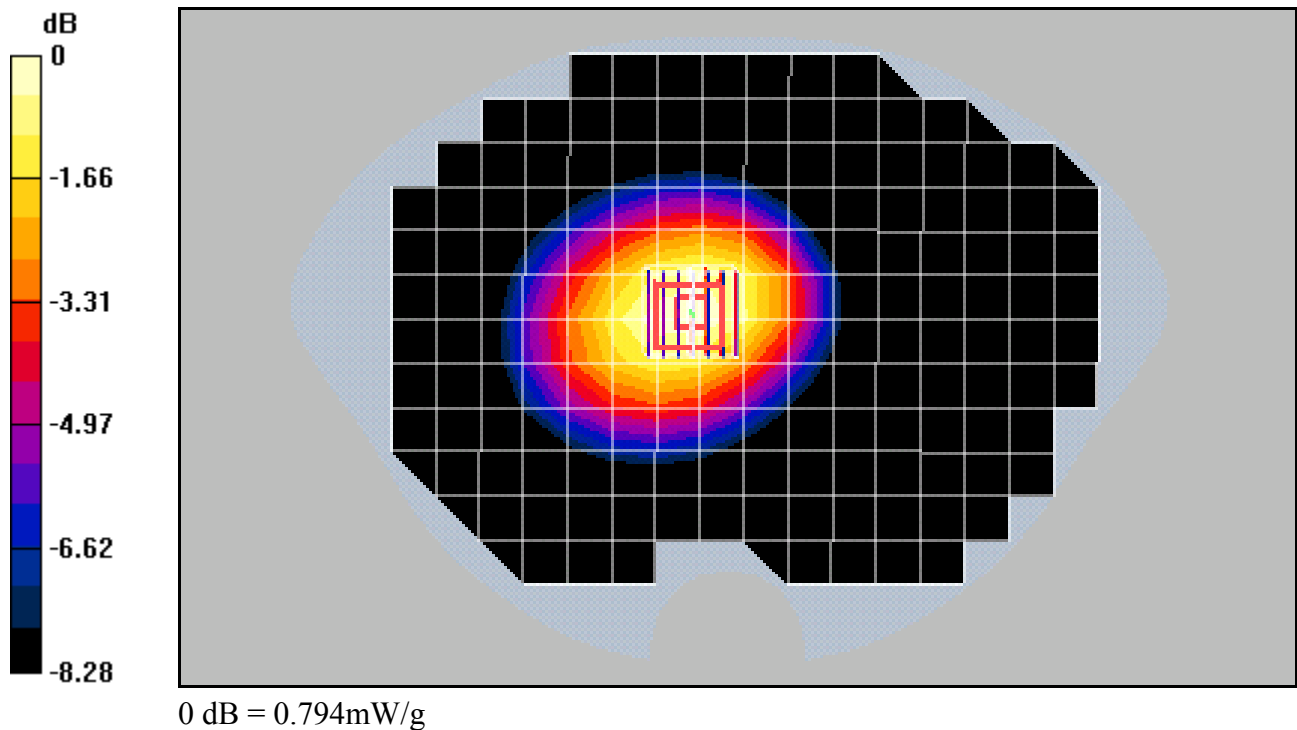

Test Laboratory: Kyocera

KX16 #5GPW AMPS ch799 FLAT phone open with Plastic Holster and Extended Battery

Communication System: AMPS, Frequency: 848.97 MHz, Duty Cycle: 1:1

Medium: M900, Medium parameters used (interpolated): $f = 848.97$ MHz; $\sigma = 0.924$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


AMPS Ch799/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.9 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.767 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

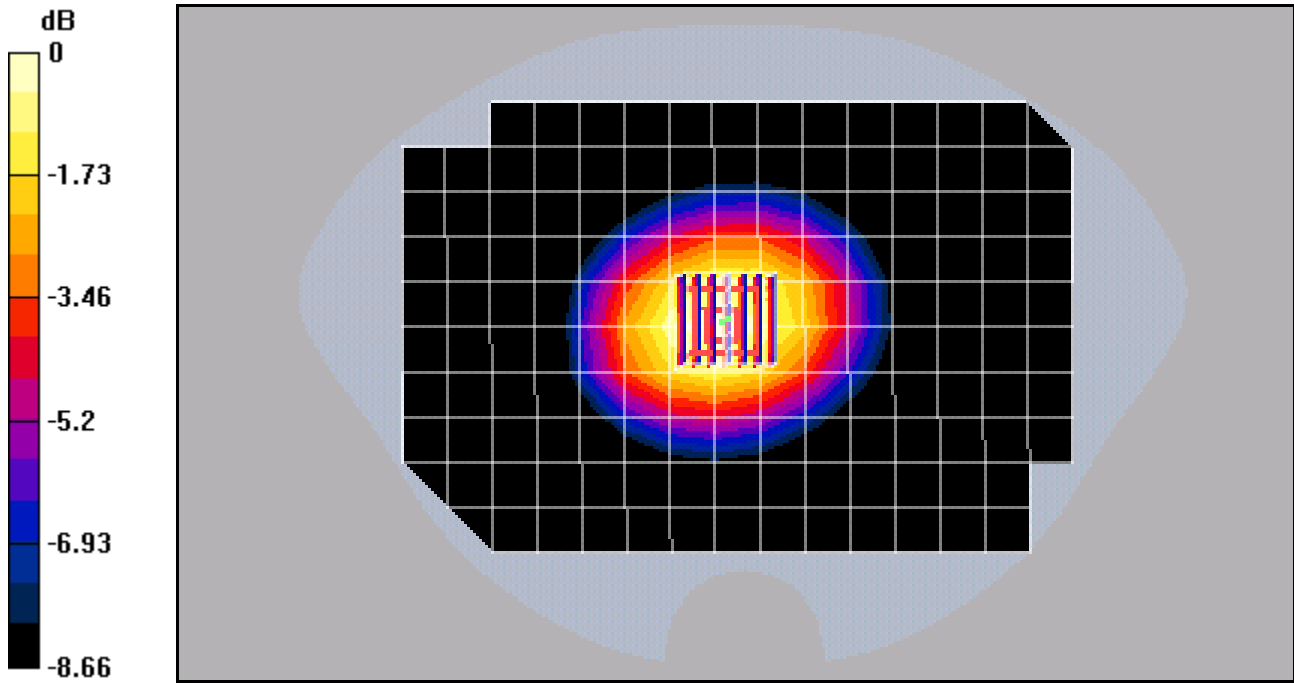

0 dB = 1.13mW/g

Test Laboratory: Kyocera

KX16 #5GPW AMPS Ch383 FLAT phone open with Leather Case

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602,Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 127

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 25.3 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.820 W/kg


SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.449 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.666 mW/g

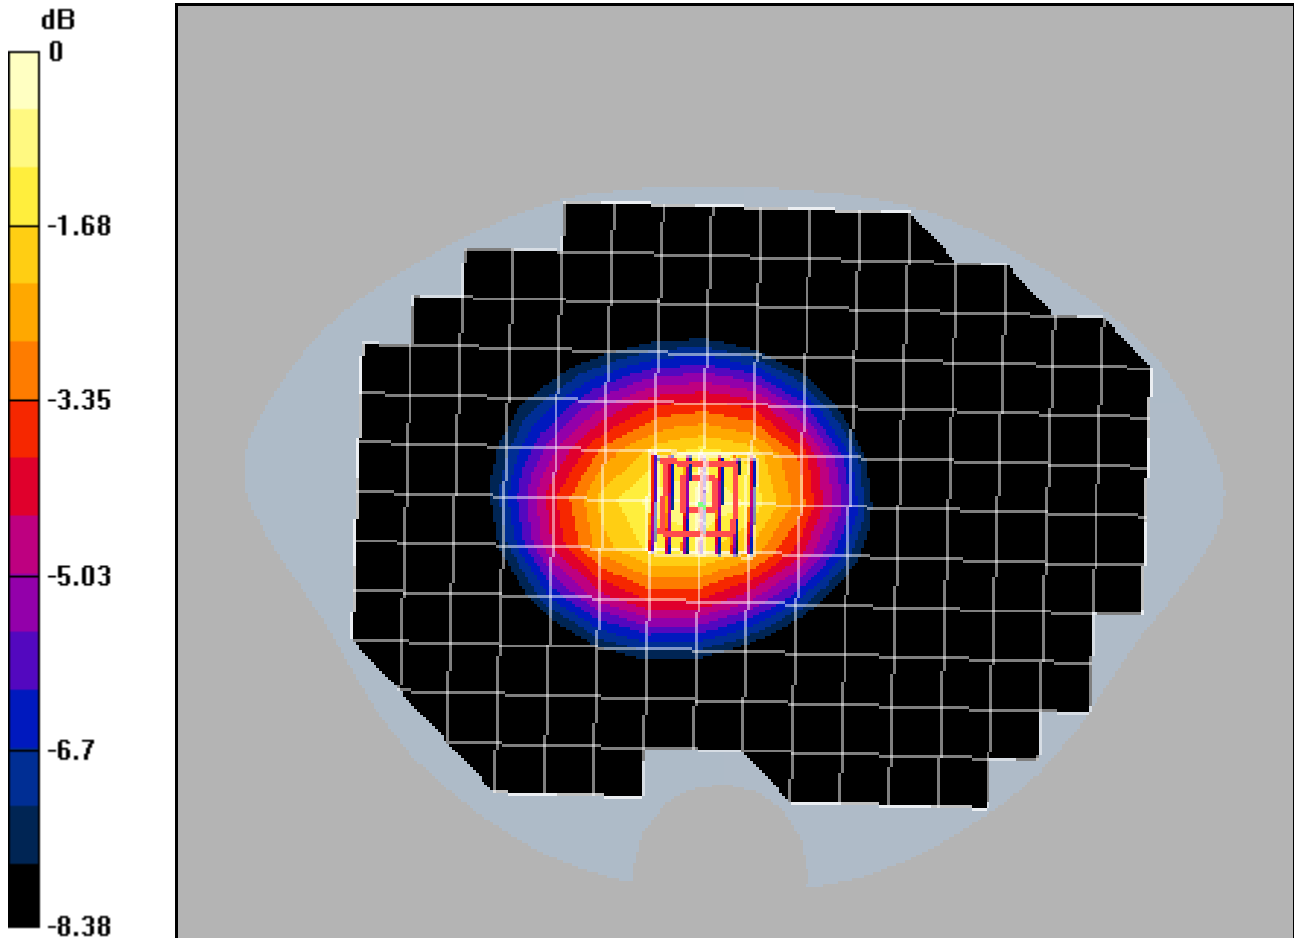

0 dB = 0.666mW/g

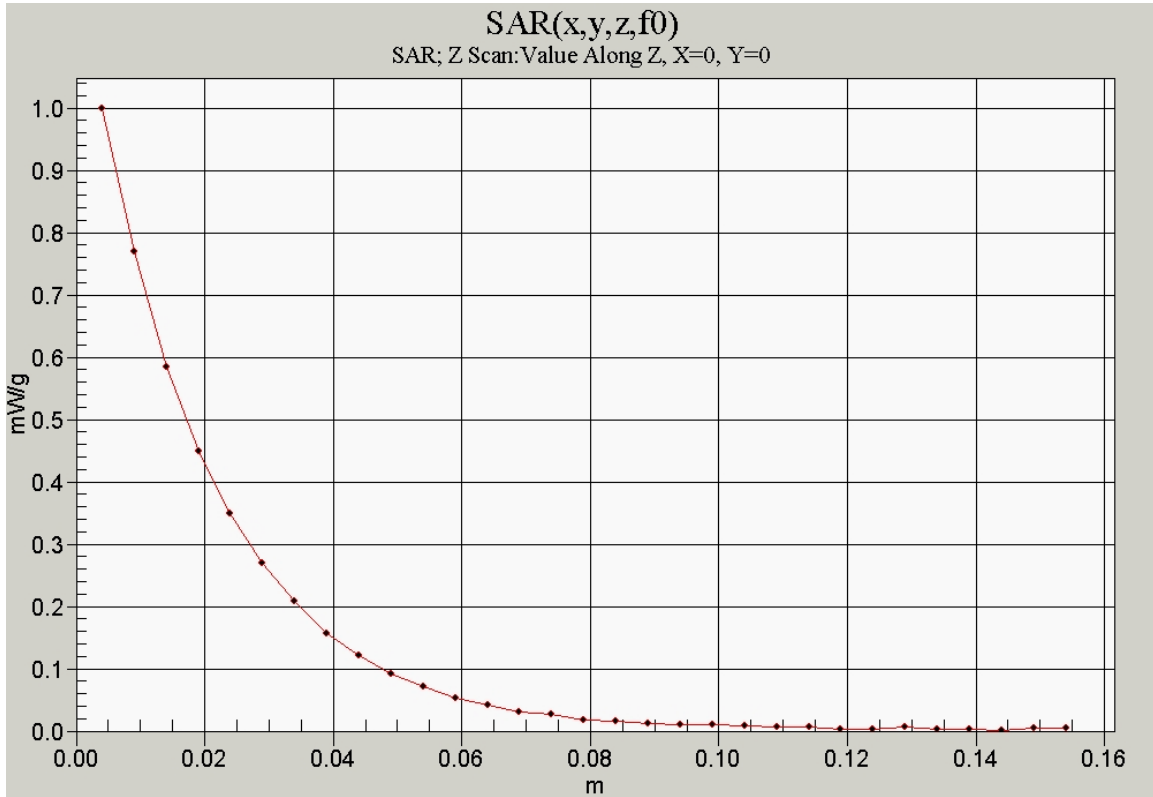

KX16 #5GPW CDMA-800 Ch 777 Flat Phone Open with 25mm Air Space

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: M900, Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch777/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 29.2 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.893 mW/g; SAR(10 g) = 0.654 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.945 mW/g

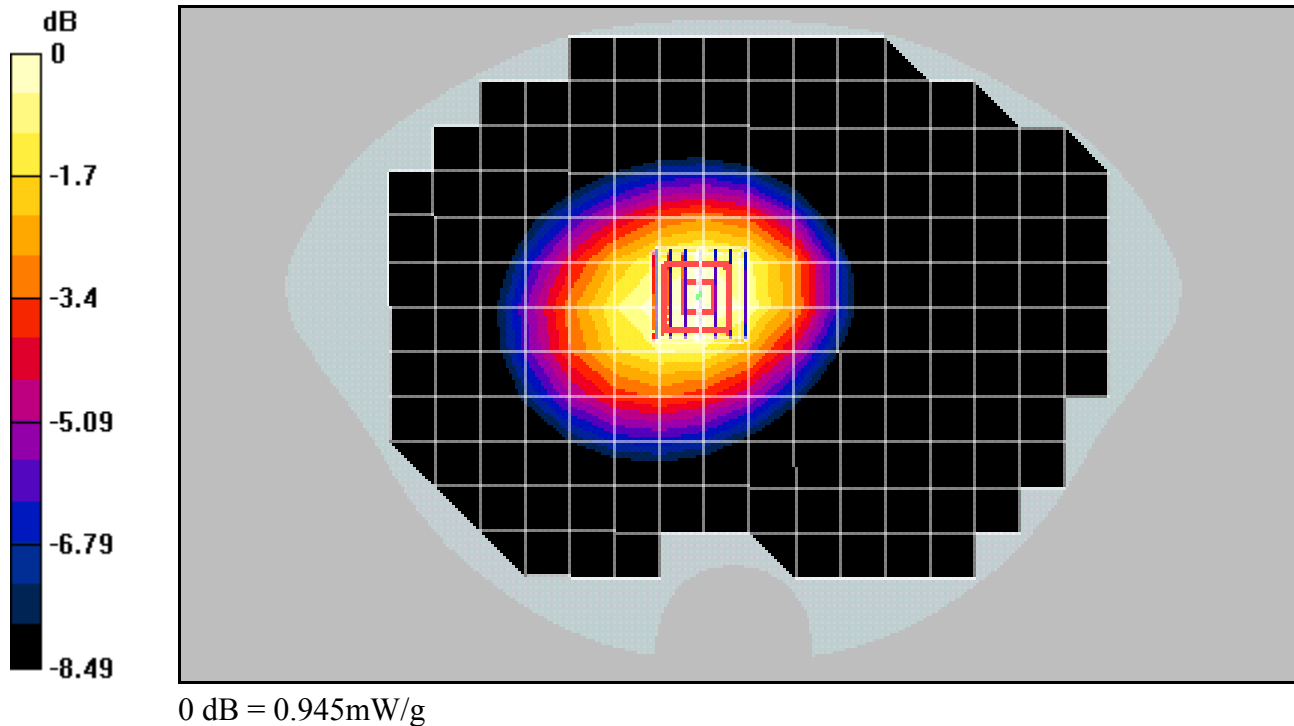

KX16 #5GPW CDMA-800 Ch777 Flat Phone Open with Belt Clip

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: M900, Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch777/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 33.1 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.831 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 1.2 mW/g

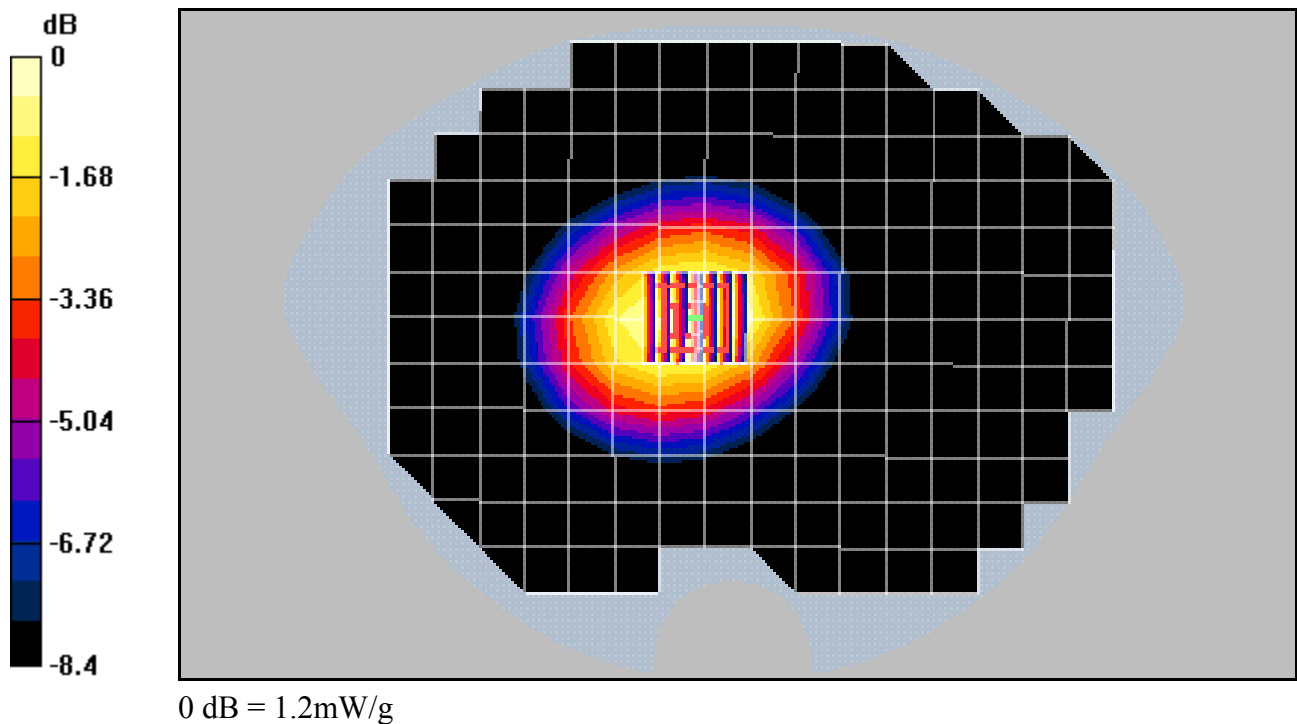

KX16 #5GPW CDMA-800 Ch383 Flat Phone Open with Leather Case

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.929$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(5.98, 5.98, 5.98), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 25.5 V/m; Power Drift = -0.2 dB


Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.459 mW/g

Info: [Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.669 mW/g

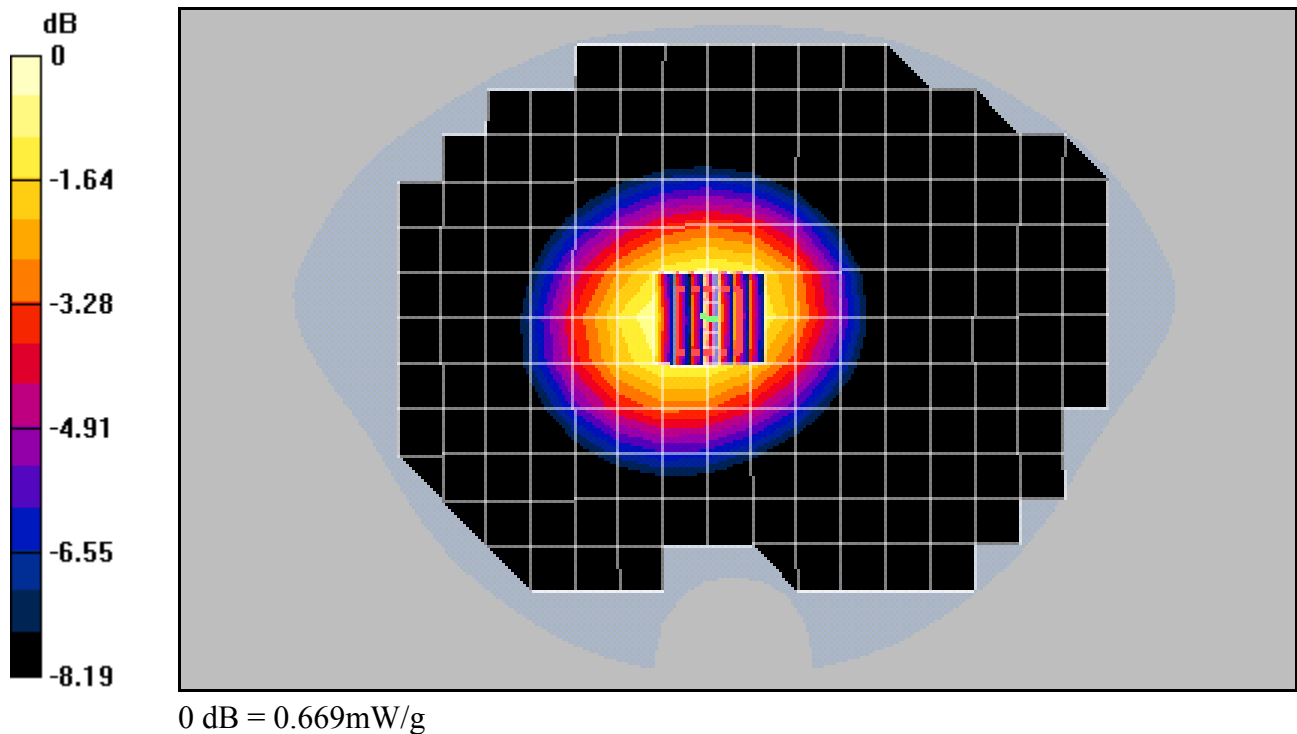

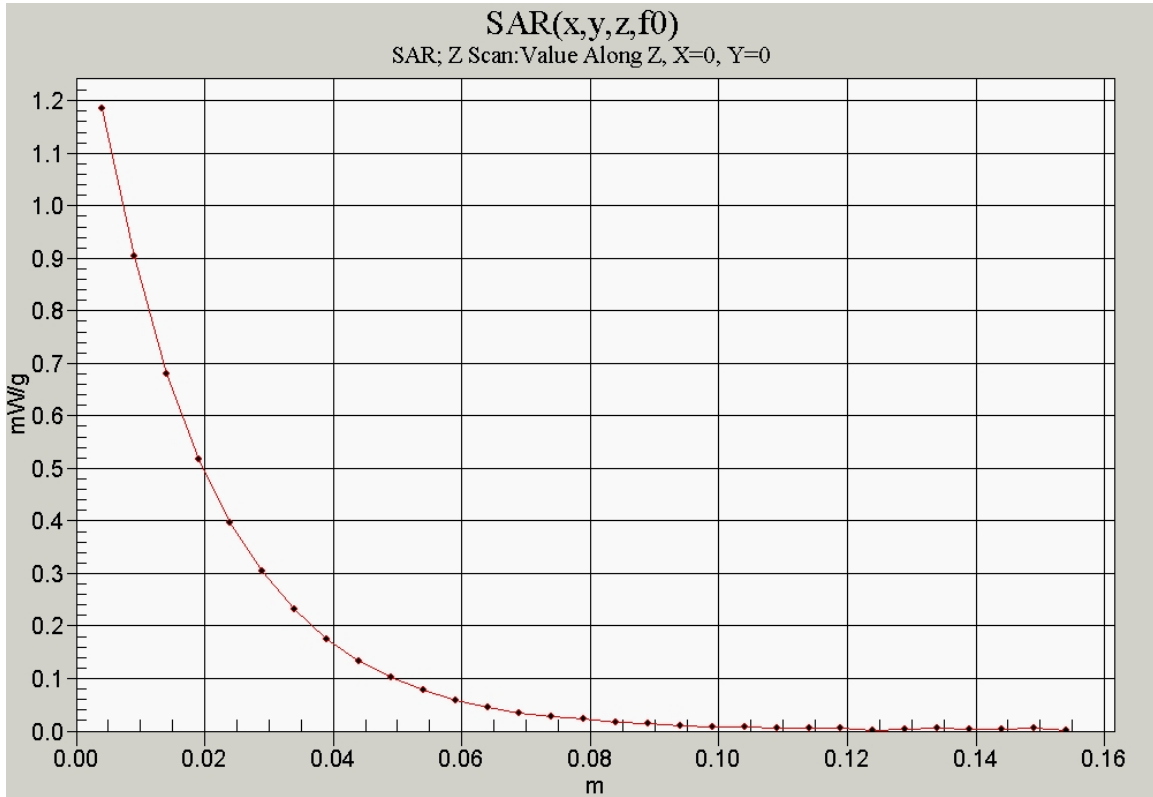

Test Laboratory: Kyocera

KX16 #5GPW CDMA-1900 Ch600 FLAT Phone Closed with 25mm Air Space and Ext. Battery


Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1
 Medium: M1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³
 Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:
 Probe: ET3DV6 - SN1713, ConvF(4.62, 4.62, 4.62), Calibrated: 5/19/2005
 Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),
 Electronics: DAE4 Sn602, Calibrated: 8/27/2004
 Measurement SW: DASY4, V4.4 Build 3
 Postprocessing SW: SEMCAD, V1.8 Build 127

Temperature:
 Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-1900 Ch600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 11.9 V/m; Power Drift = -0.0 dB
 Peak SAR (extrapolated) = 0.398 W/kg
SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.160 mW/g
 Maximum value of SAR (measured) = 0.270 mW/g

CDMA-1900 Ch600/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 11.9 V/m; Power Drift = -0.0 dB
 Peak SAR (extrapolated) = 0.377 W/kg
SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.159 mW/g
 Maximum value of SAR (measured) = 0.261 mW/g

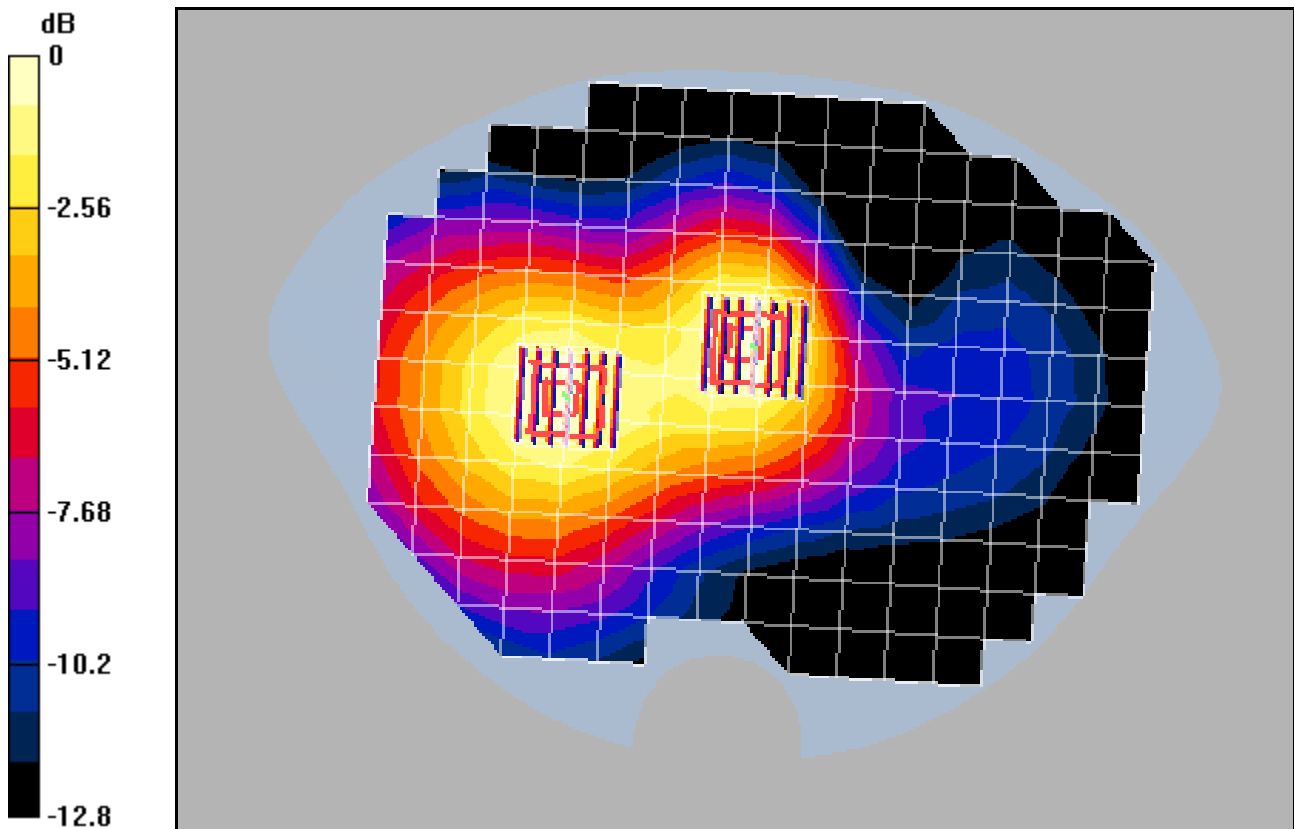

0 dB = 0.261mW/g

KX16 #5GPW CDMA-1900 Ch600 Flat Phone Closed with Belt Clip

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: M1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(4.62, 4.62, 4.62), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


CDMA-1900 Ch600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.622 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.684 mW/g

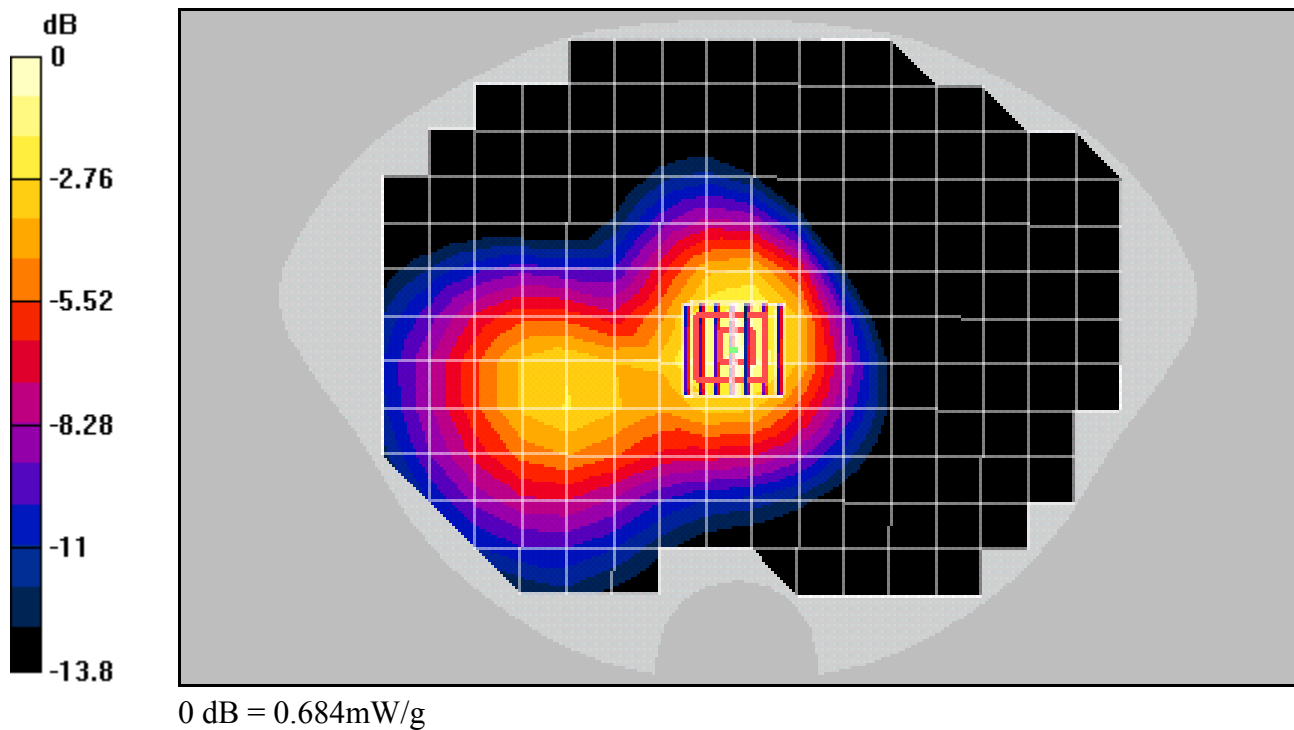

KX16 #5GPW CDMA-1900 Ch600 Flat Phone Closed with Leather Case

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: M1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1713, ConvF(4.62, 4.62, 4.62), Calibrated: 5/19/2005

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection),

Electronics: DAE4 Sn602, Calibrated: 8/27/2004

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 130

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-1900 Ch600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

