

Appendix B1:

SAR Distribution Plots (Head)

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW AMPS ch799 Left Cheek with Standard Battery

Communication System: AMPS, Frequency: 848.97 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 848.97$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch799 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 27.0 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.951 mW/g; SAR(10 g) = 0.648 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 mW/g

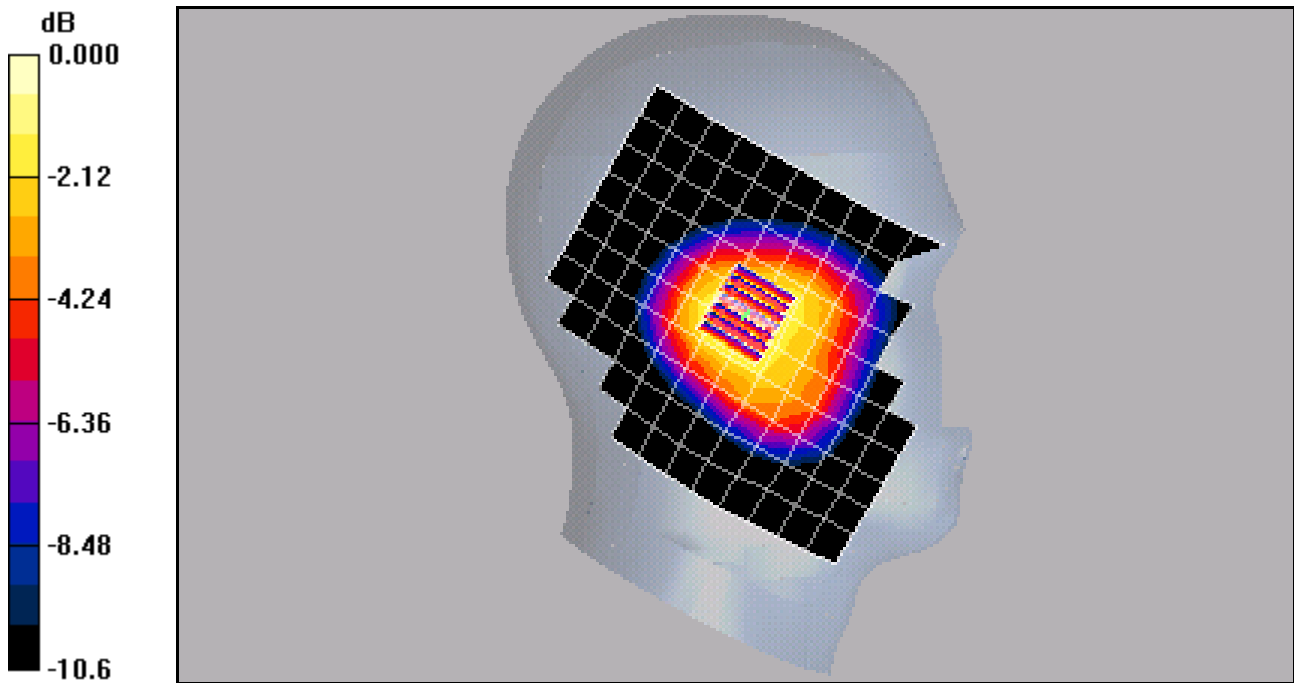

0 dB = 1.01mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW AMPS ch383 Left Tilt with Extended Battery

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900, Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493, Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 25.6 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.638 mW/g; SAR(10 g) = 0.447 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.688 mW/g

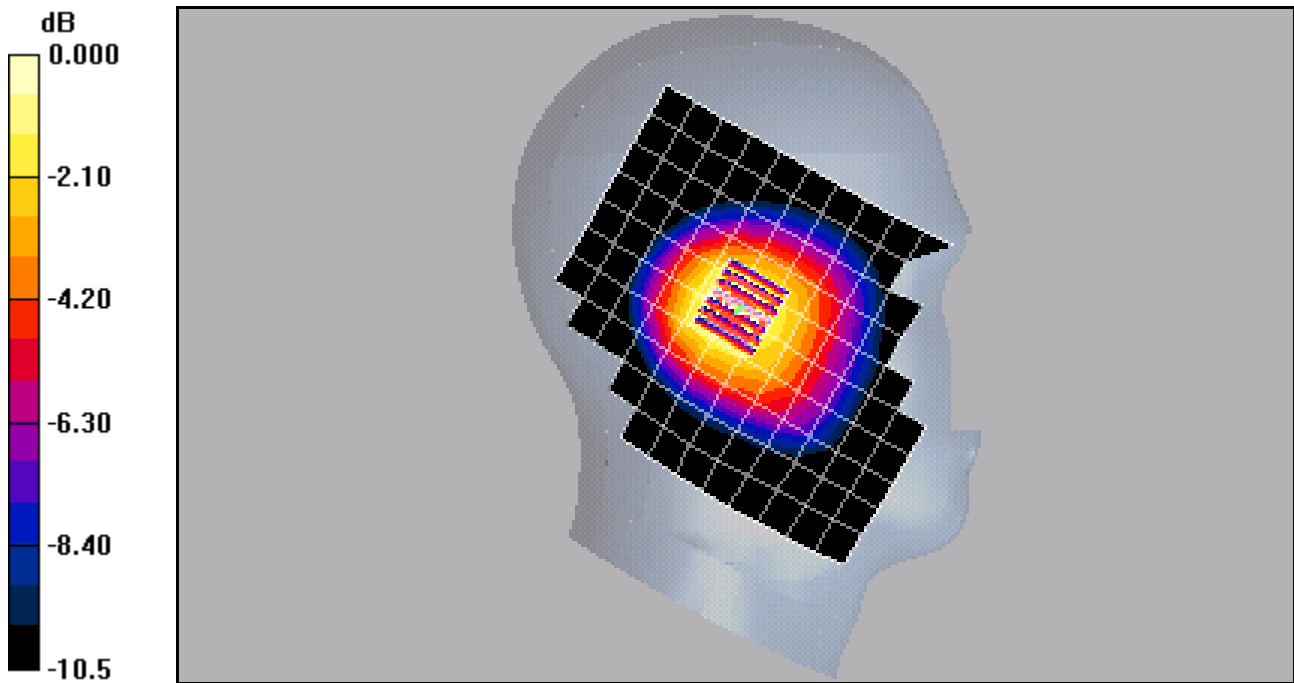

0 dB = 0.688mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW AMPS ch799 Right Cheek with Standard Battery

Communication System: AMPS, Frequency: 848.97 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 848.97$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch799 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 28.0 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.858 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.34 mW/g

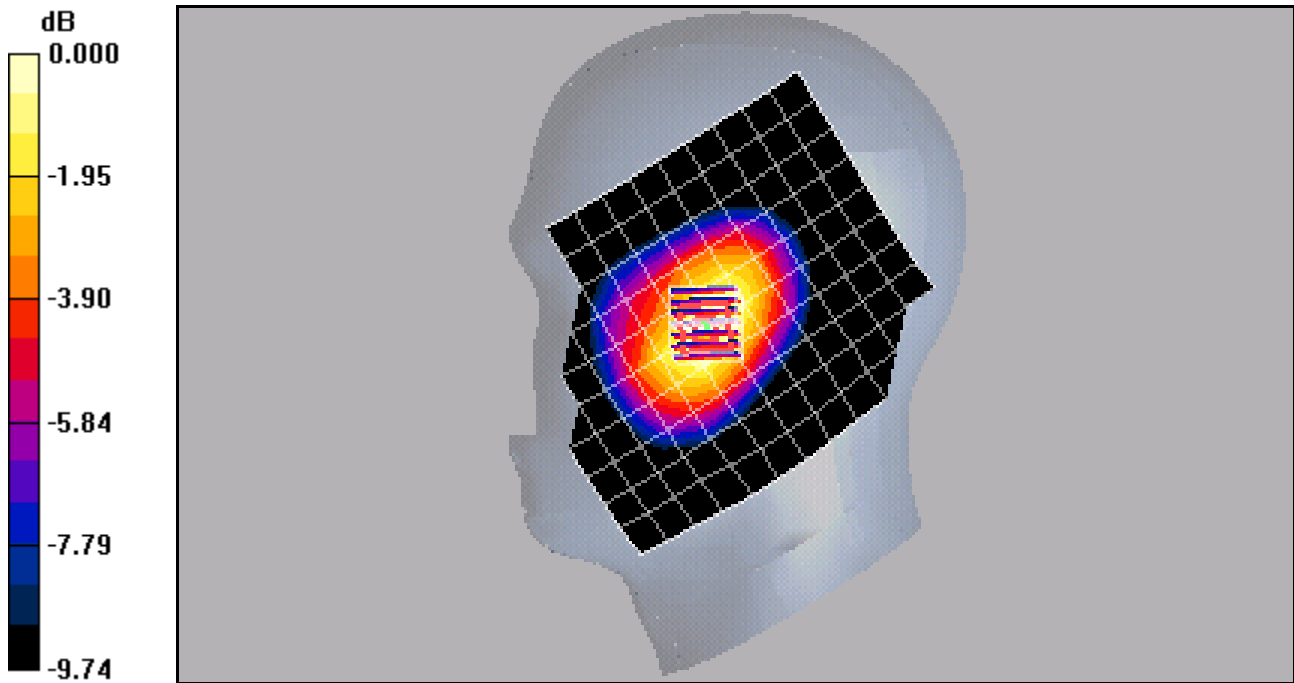

0 dB = 1.34mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW AMPS ch383 Right Tilt with Standard Battery

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 25.3 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.922 W/kg


SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.492 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.729 mW/g

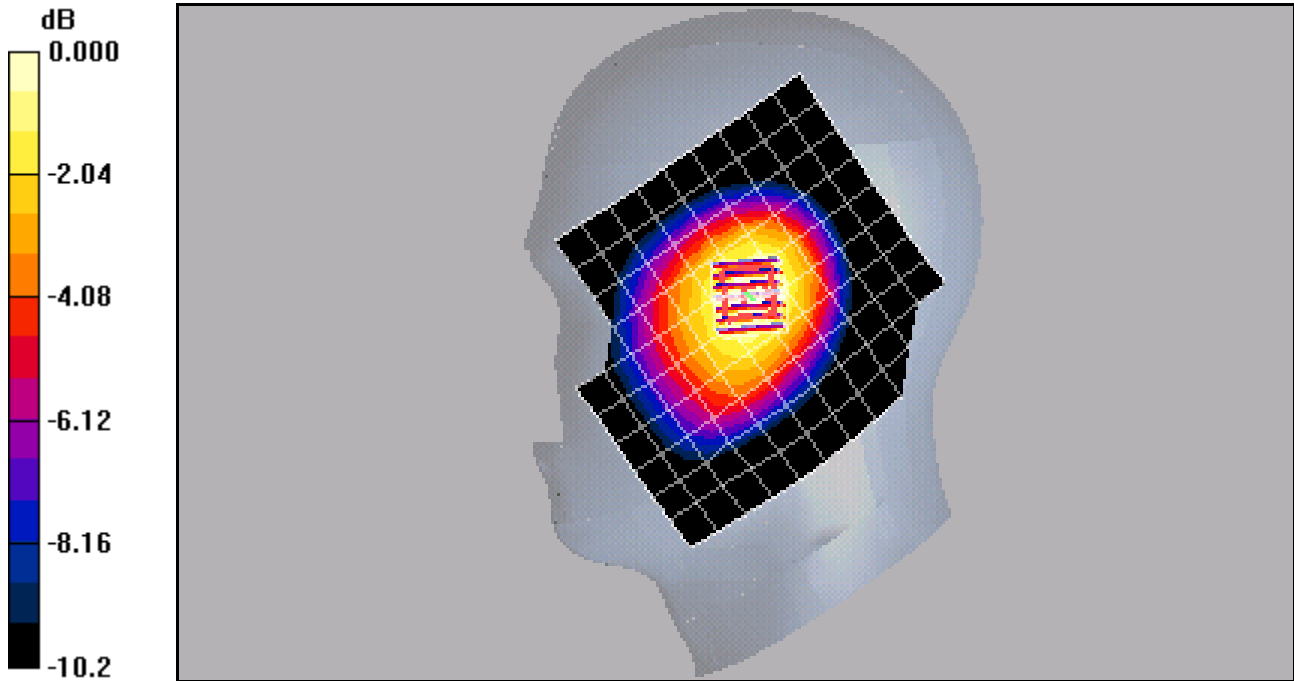

0 dB = 0.729mW/g

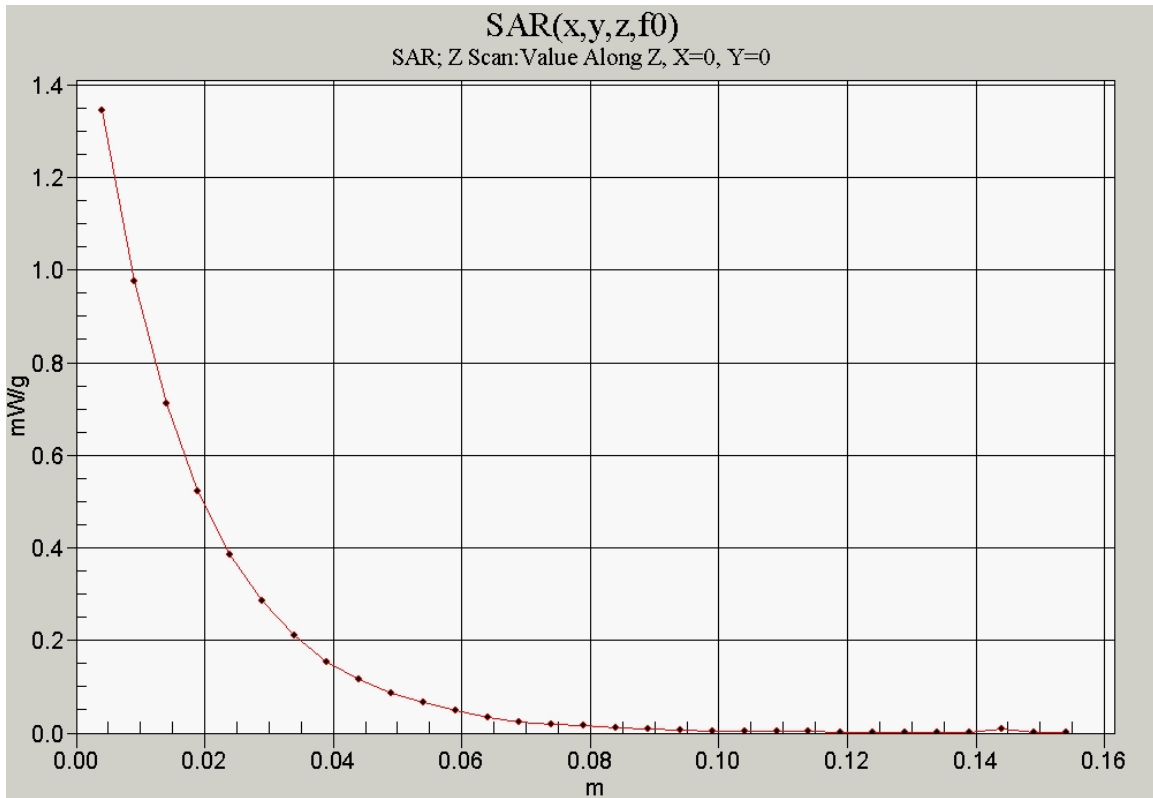

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-800 Ch777 Left Cheek with Standard Battery

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch777 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.5 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.932 mW/g; SAR(10 g) = 0.636 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.00 mW/g

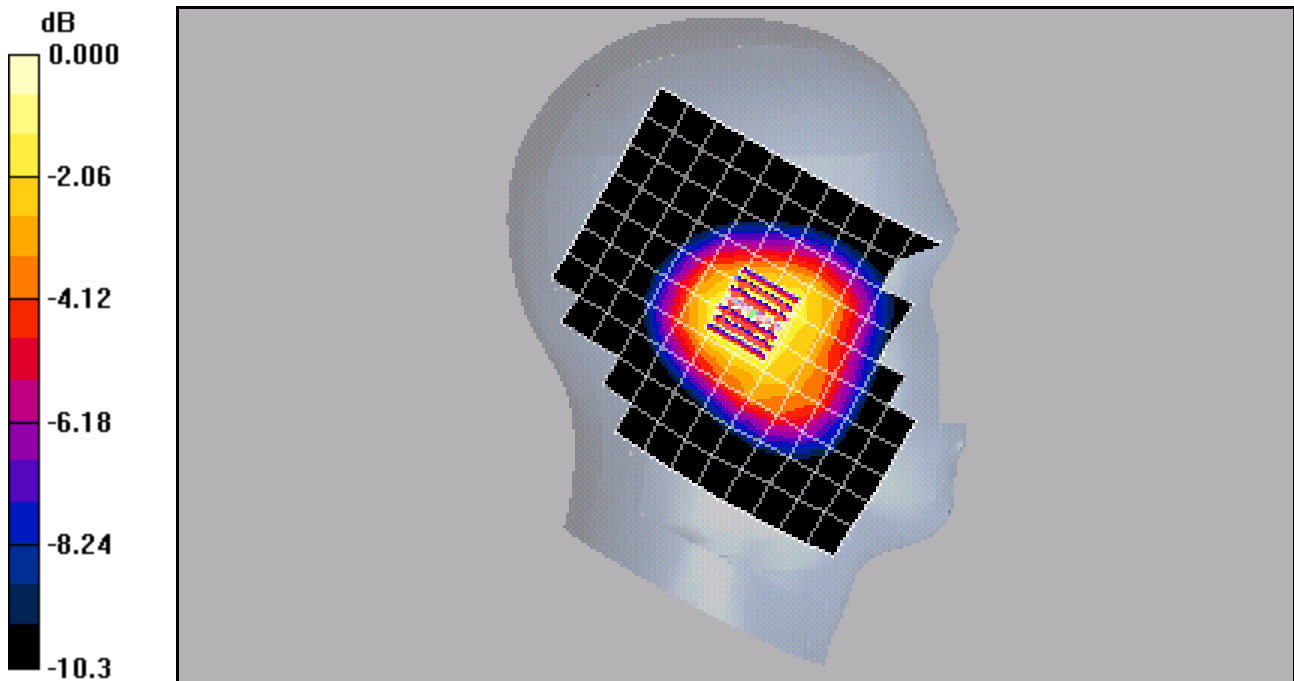

0 dB = 1.00mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-800 Ch383 Left Tilt with Extended Battery

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.6 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.497 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.761 mW/g

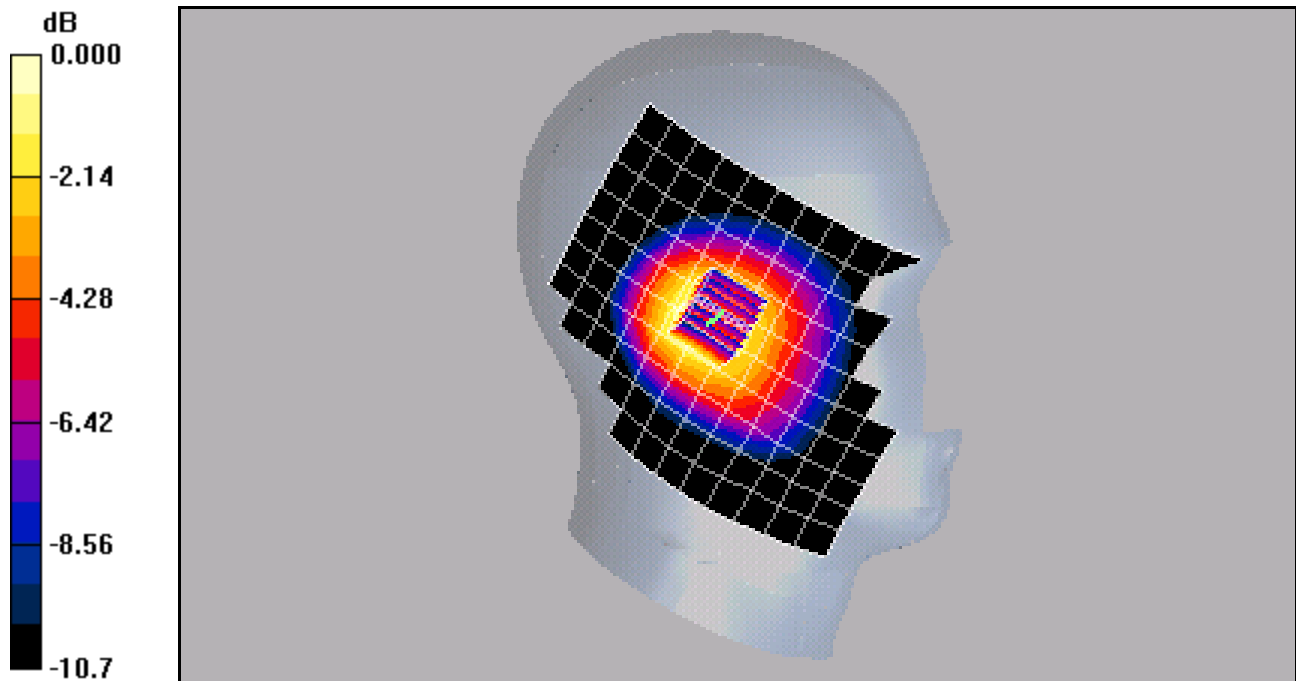

0 dB = 0.761mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-800 Ch777 Right Cheek with Standard Battery

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch777 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.3 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.753 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 mW/g

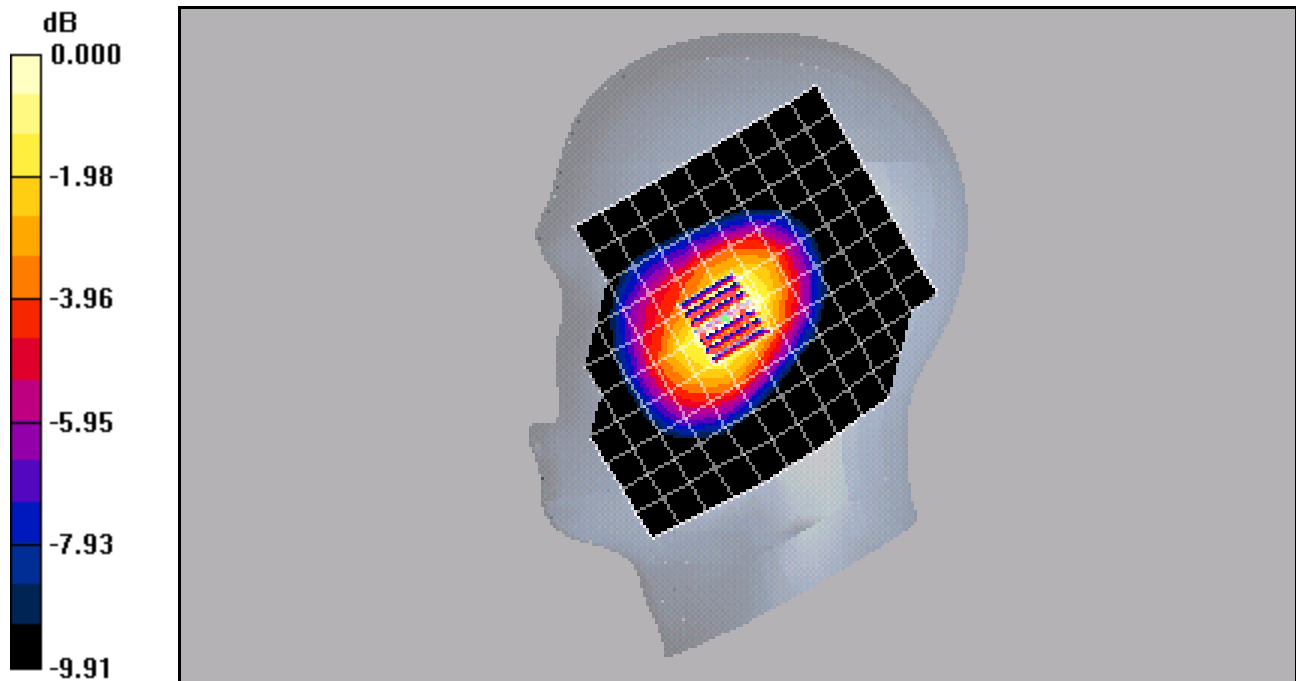

0 dB = 1.19mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-800 Ch777 Right Tilt with Extended Battery

Communication System: CDMA-800, Frequency: 848.31 MHz, Duty Cycle: 1:1

Medium: HSL900,Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.99, 5.99, 5.99), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch777 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.2 V/m; Power Drift = -0.238 dB

Peak SAR (extrapolated) = 0.943 W/kg


SAR(1 g) = 0.696 mW/g; SAR(10 g) = 0.492 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.741 mW/g

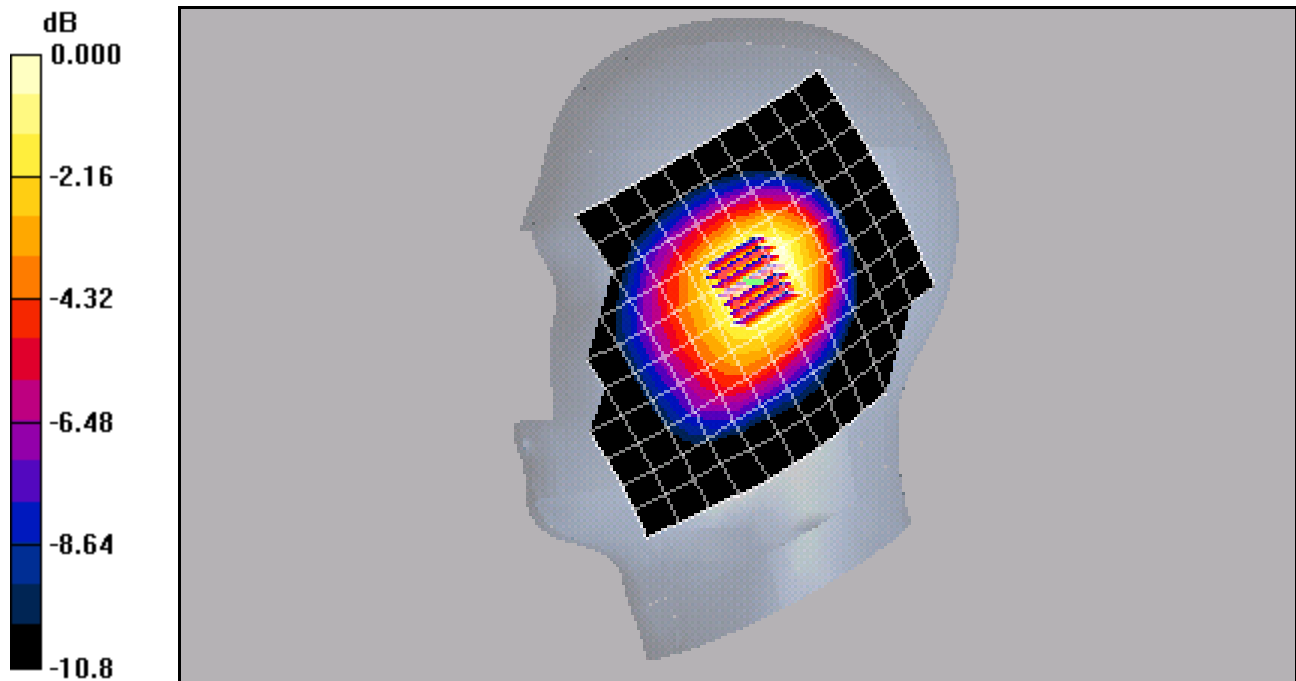

0 dB = 0.741mW/g

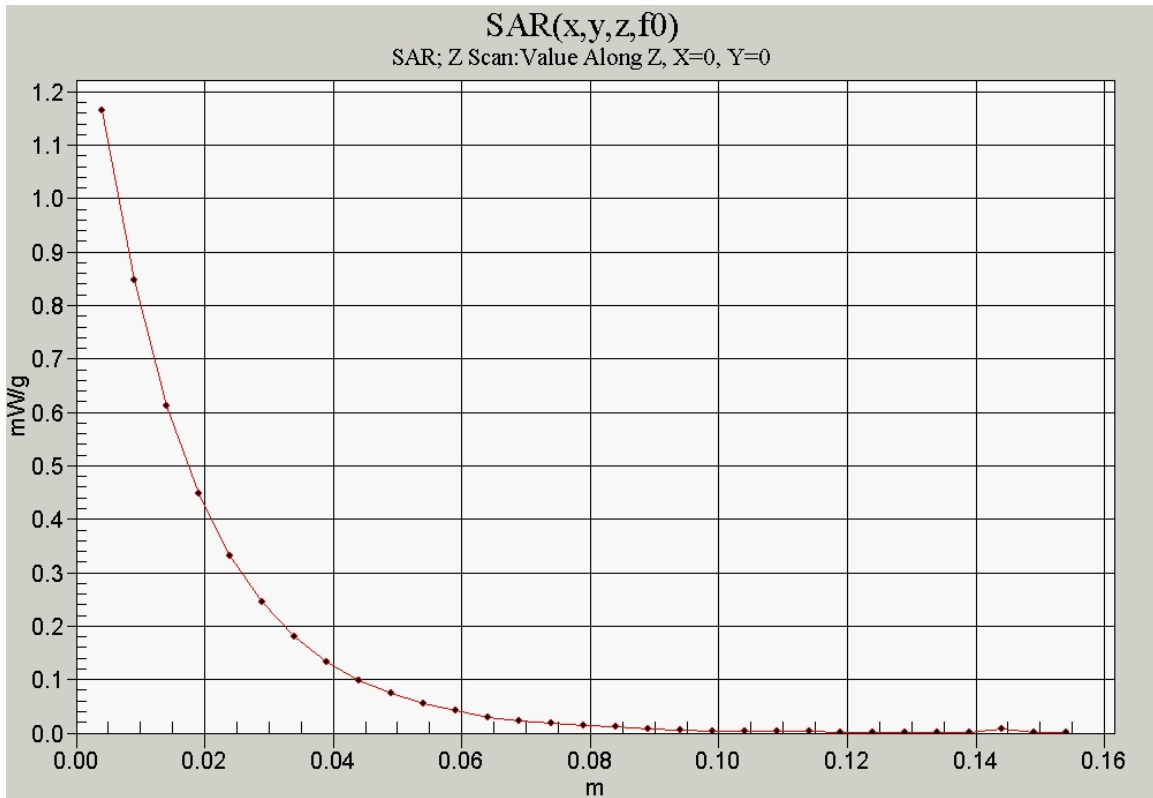

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-1900 Ch600 Left Cheek with Extended Battery

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(4.64, 4.64, 4.64), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493, Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch600 LC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.459 mW/g

Maximum value of SAR (measured) = 0.877 mW/g



PCS Ch600 LC/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.767 mW/g

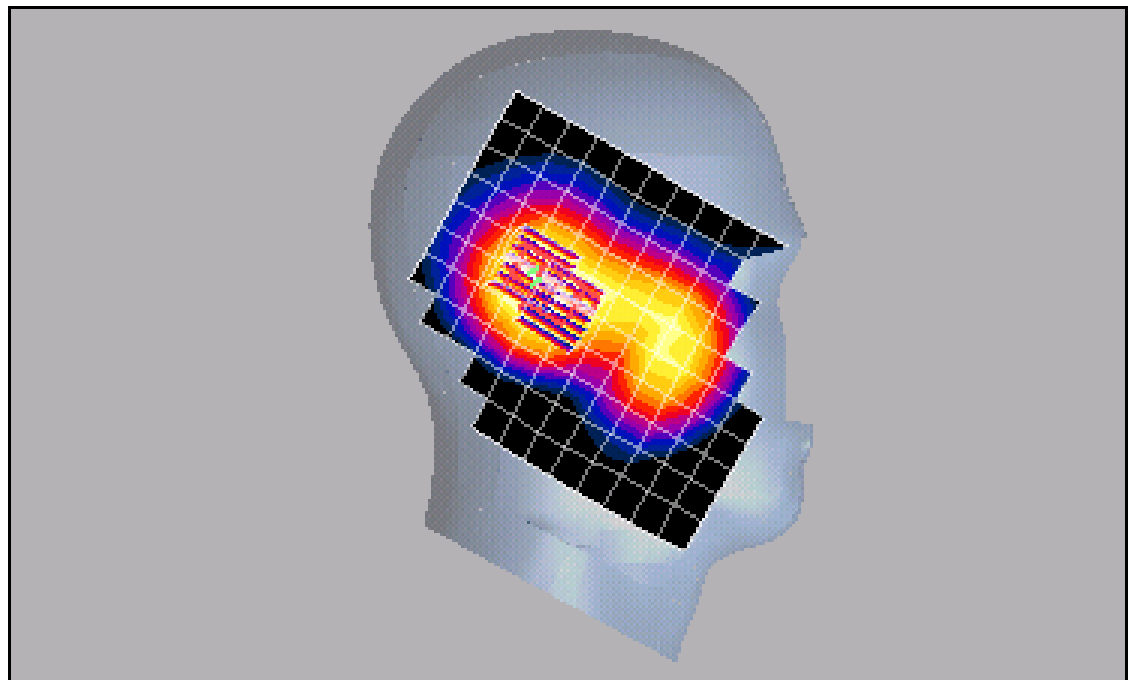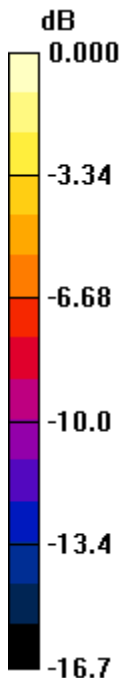

0 dB = 0.767mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-1900 Ch25 Left Tilt with Extended Battery

Communication System: CDMA-1900, Frequency: 1851.25 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used (extrapolated): $f = 1851.25$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Left Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(4.64, 4.64, 4.64), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493, Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch25 LT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 21.0 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 1.37 mW/g; SAR(10 g) = 0.749 mW/g

Info: Extrapolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.53 mW/g

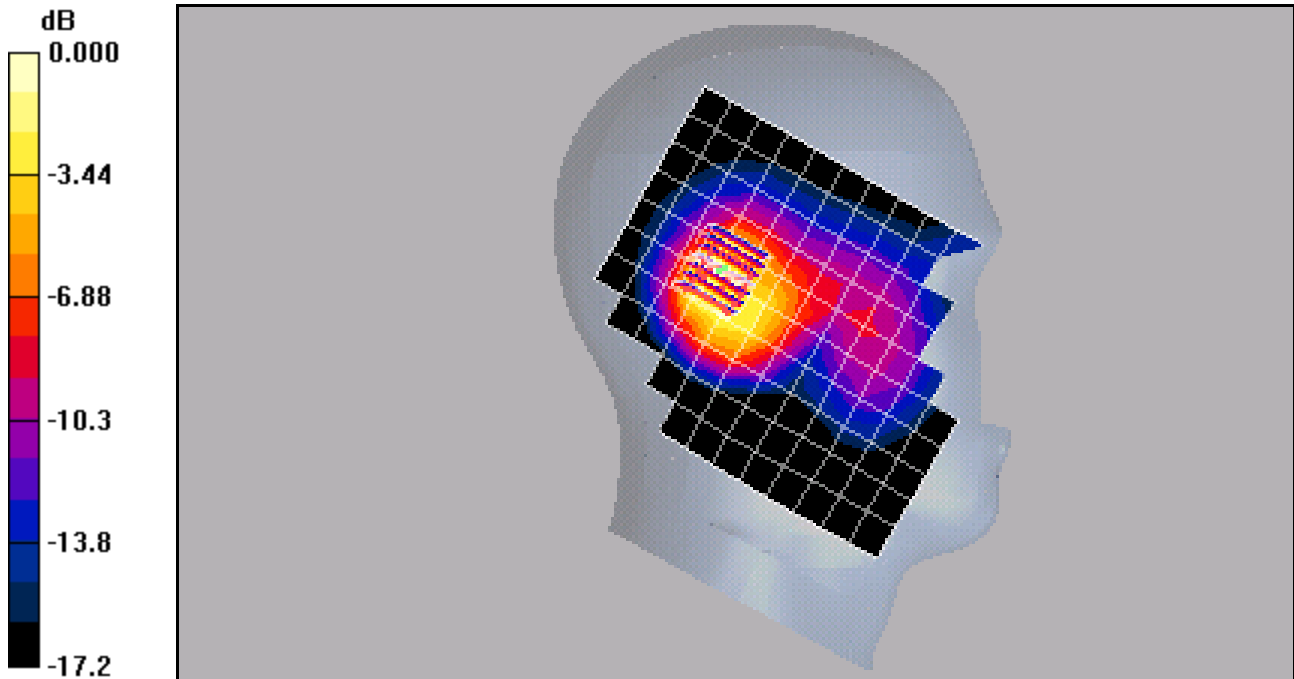

0 dB = 1.53mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-1900 Ch25 Right Cheek with Standard Battery

Communication System: CDMA-1900, Frequency: 1851.25 MHz, Duty Cycle: 1:1

Medium: HSL1800,Medium parameters used (extrapolated): $f = 1851.25$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(4.64, 4.64, 4.64), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch25 RC/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.617 mW/g

Maximum value of SAR (measured) = 1.18 mW/g


PCS Ch25 RC/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.767 mW/g; SAR(10 g) = 0.472 mW/g

Maximum value of SAR (measured) = 0.855 mW/g

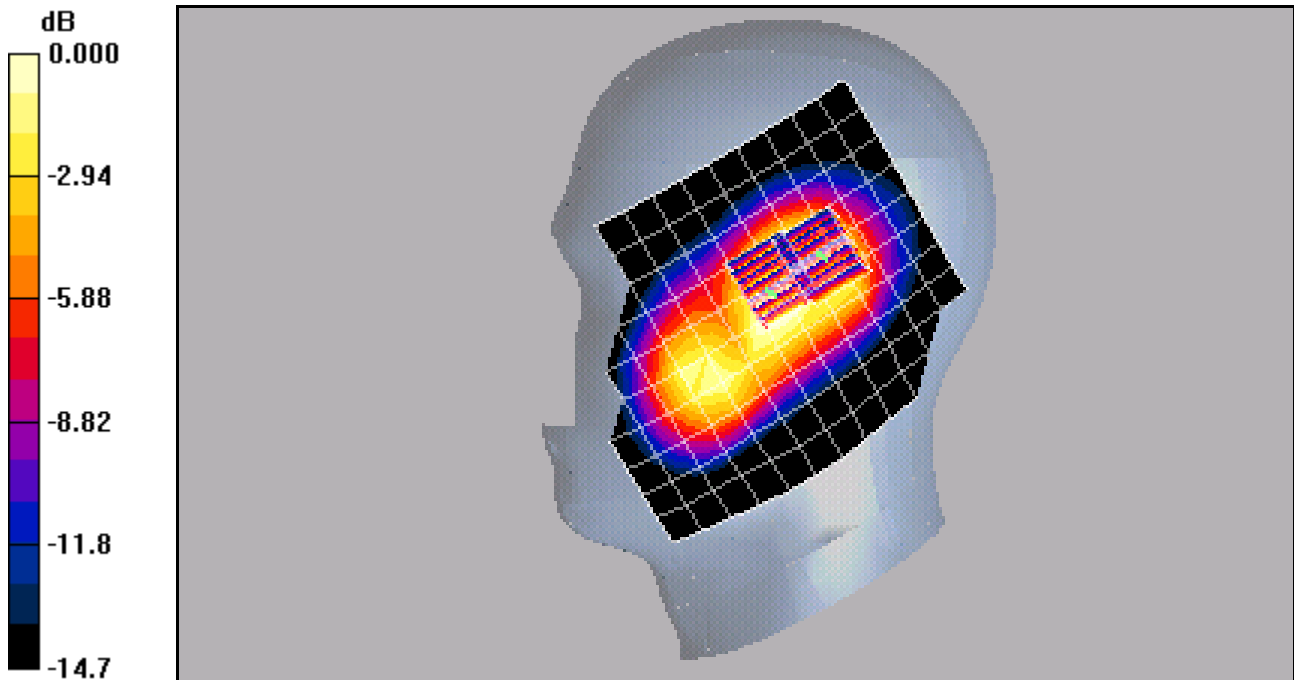

0 dB = 0.855mW/g

Test Laboratory: Kyocera Wireless Corp.

KX21-2X0 #Y7QW CDMA-1900 ch1175 Right Tilt with Extended Battery and Bluetooth

Communication System: CDMA-1900, Frequency: 1908.75 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom: SAM 12, Phantom section: Right Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(4.64, 4.64, 4.64), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493, Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 160

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch1175 RT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.759 mW/g

Maximum value of SAR (measured) = 1.62 mW/g


PCS Ch1175 RT/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.560 mW/g

Maximum value of SAR (measured) = 1.30 mW/g

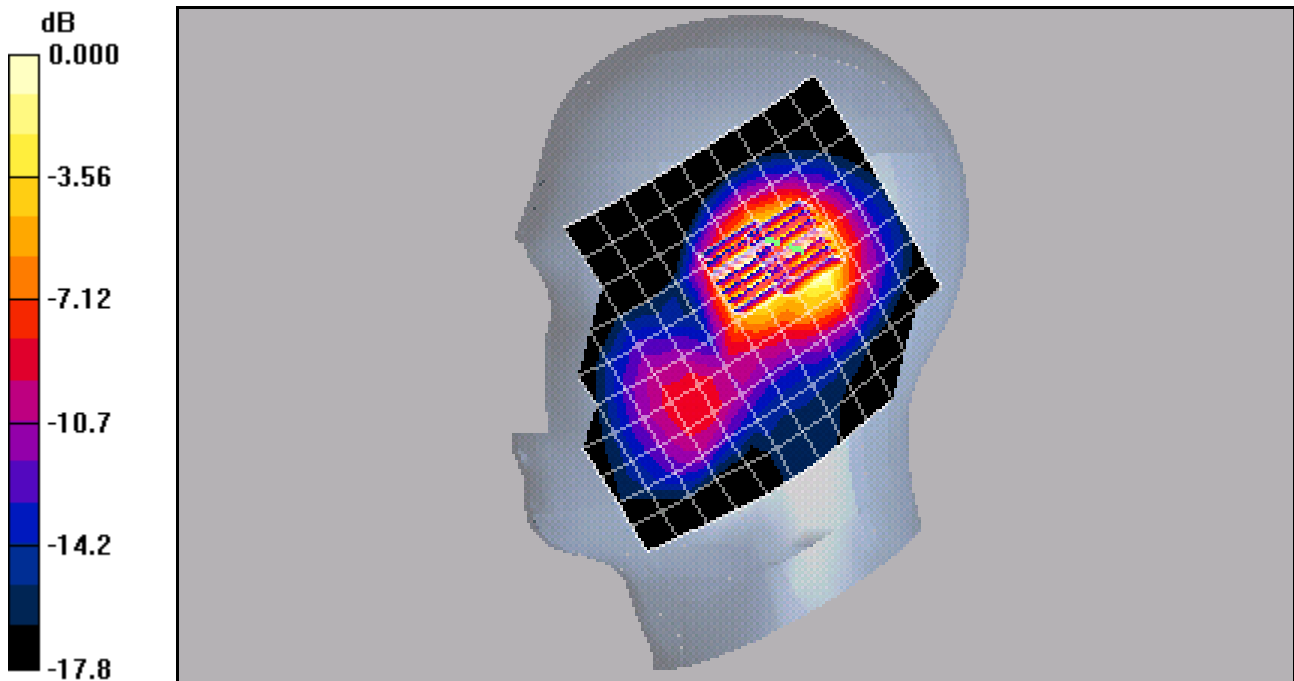

0 dB = 1.30mW/g

