

Appendix B:
SAR Distribution Printout

Test Laboratory: Kyocera Wireless Corp.

C2PC-KX21 #Y63V AMPS ch383 Flat with CV90-P096A and Extended Battery

Communication System: AMPS, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.85, 5.85, 5.85), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 159

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

AMPS Ch383 FLAT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 21.2 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.806 W/kg


SAR(1 g) = 0.602 mW/g; SAR(10 g) = 0.428 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.639 mW/g

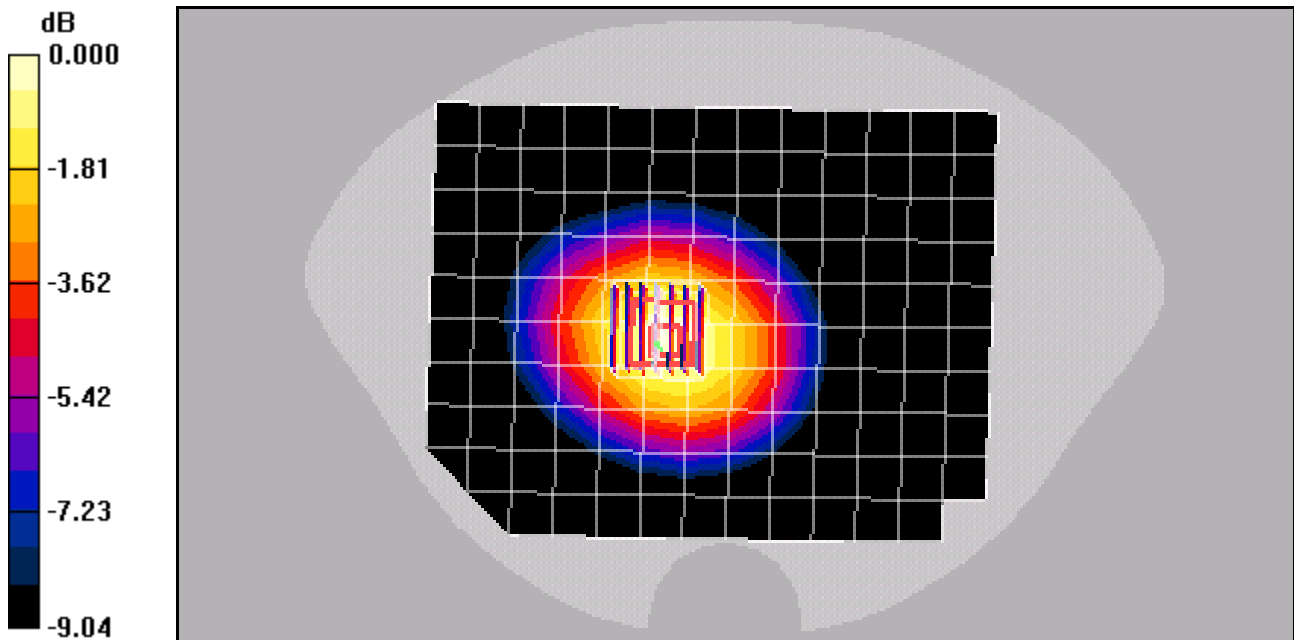

0 dB = 0.639mW/g

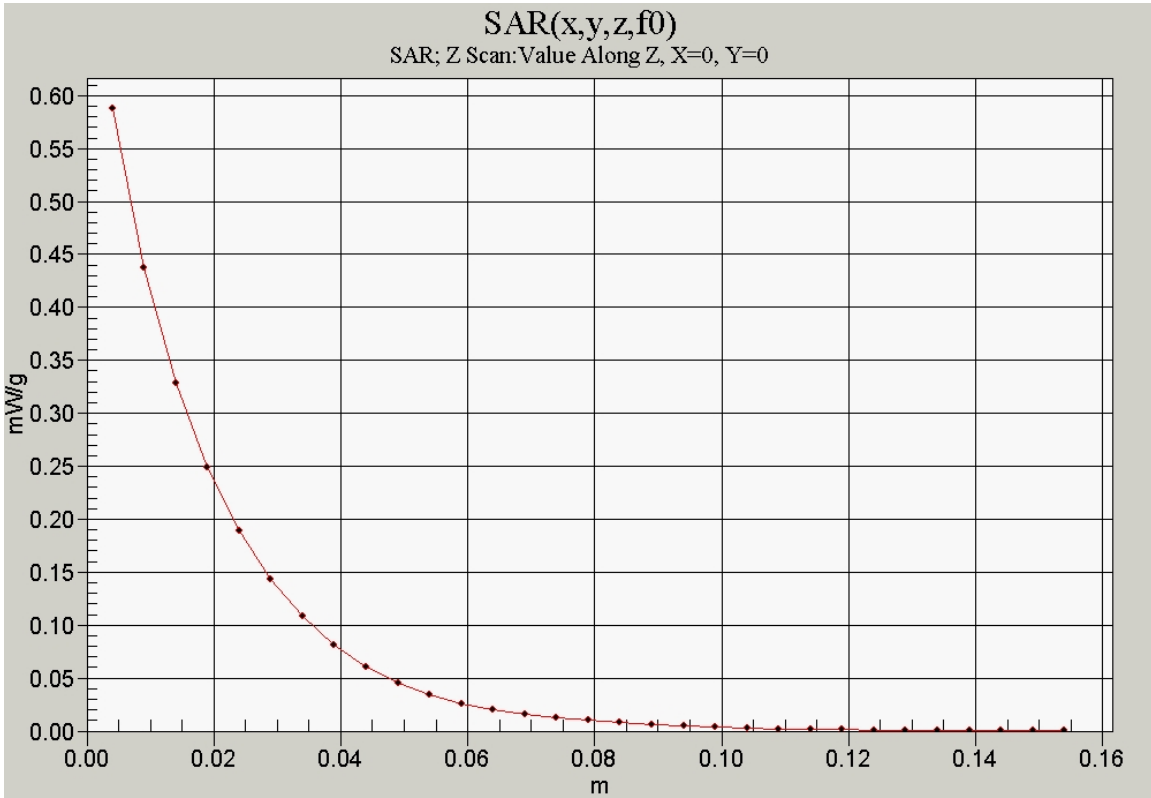

Test Laboratory: Kyocera Wireless Corp.

C2PC-KX21 #Y63V CDMA-800 ch383 Flat with CV90-P096A

Communication System: CDMA-800, Frequency: 836.49 MHz, Duty Cycle: 1:1

Medium: M900,Medium parameters used (interpolated): $f = 836.49$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom: SAM 12,Phantom section: Flat Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(5.85, 5.85, 5.85), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE3 Sn493,Calibrated: 11/14/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 159

Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

CDMA-800 Ch383 FLAT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22.8 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 0.797 W/kg


SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.431 mW/g

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.634 mW/g

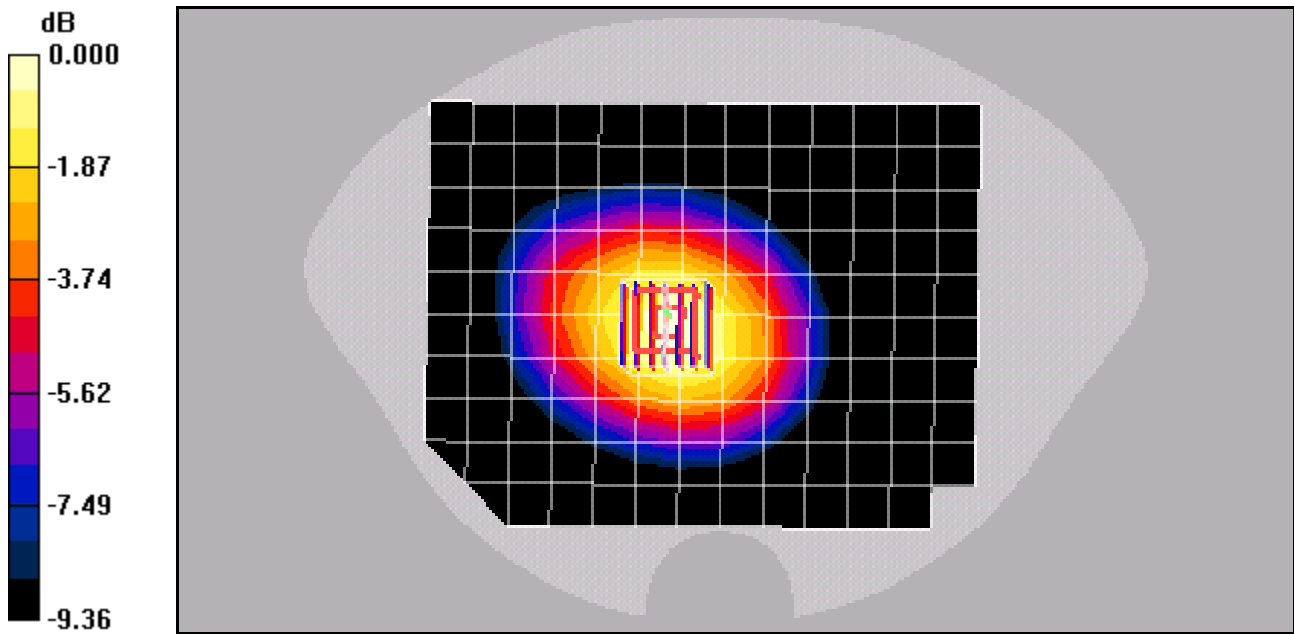

0 dB = 0.634mW/g

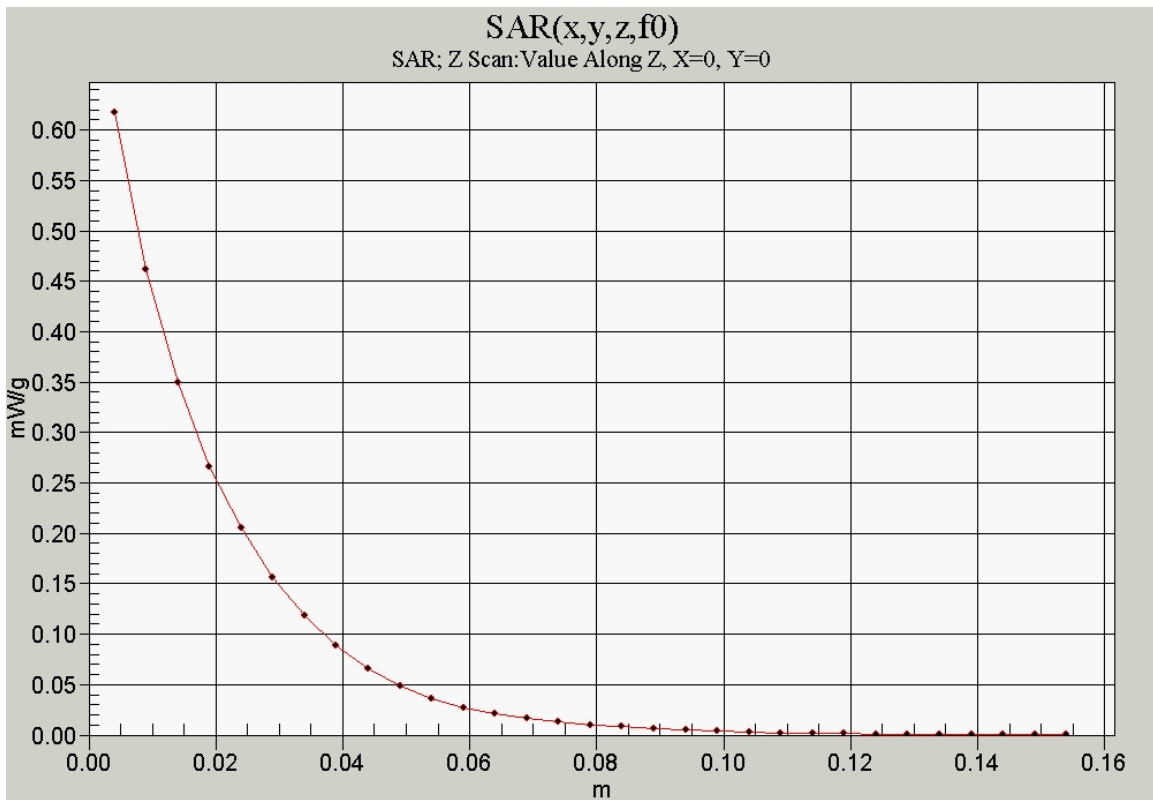

Test Laboratory: Kyocera Wireless Corp.

C2PC-KX21 #Y63V PCS ch600 Flat with CV90-P096A

Communication System: CDMA-1900, Frequency: 1880 MHz, Duty Cycle: 1:1
Medium: M1800, Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³
Phantom: SAM 12, Phantom section: Flat Section

DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(4.48, 4.48, 4.48), Calibrated: 10/25/2005
Sensor-Surface: 4mm (Mechanical Surface Detection),
Electronics: DAE3 Sn493, Calibrated: 11/14/2005
Measurement SW: DASY4, V4.4 Build 3
Postprocessing SW: SEMCAD, V1.8 Build 159

Temperature:


Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C

PCS Ch600 FLAT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.177 dB
Peak SAR (extrapolated) = 0.518 W/kg
SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.240 mW/g
Maximum value of SAR (measured) = 0.393 mW/g

PCS Ch600 FLAT/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.177 dB
Peak SAR (extrapolated) = 0.409 W/kg
SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.202 mW/g
Maximum value of SAR (measured) = 0.316 mW/g

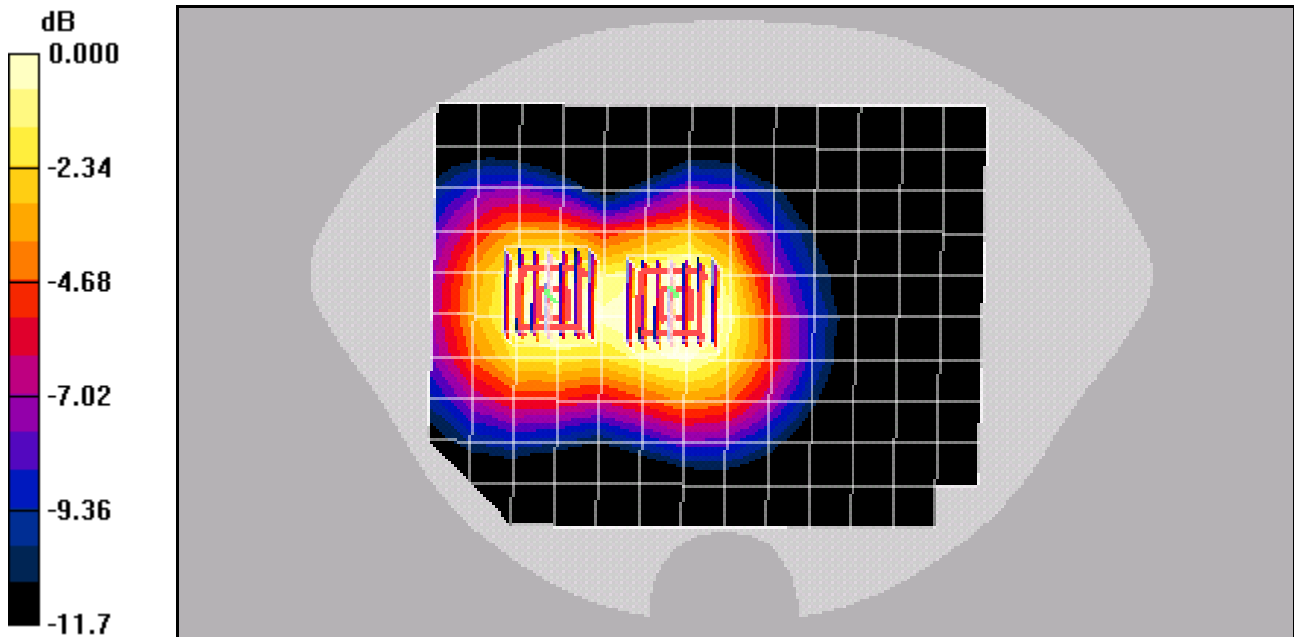

0 dB = 0.316mW/g

