

**SAR Test Report**  
**On**  
**Dual-Band Tri-mode AMPS/CDMA Cellular Phone**

<b>FCC Part 22 &amp; 24 Certification</b>	
FCC ID:	<b>OVFKWC-KX444</b>
Model:	<b>KX444</b>
Original Grant Dates:	

<b>STATEMENT OF COMPLIANCE</b>	
<p>Kyocera Wireless Corp declares under its sole responsibility that the product, FCC ID: OVFKWC-KX444 to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.</p>	
<p>Any deviations from these standards, guidelines and recommended practices are noted: NONE.</p>	
Date of Test:	November 14-21, 2003
Test performed by:	Kyocera Wireless Corp 10300 Campus Point Drive CA 92121
Report Prepared by:	Lin Lu, Regulatory Engineer, Principal

## Table of Contents

<b>1</b>	<b>INTRODUCTION.....</b>	<b>3</b>
<b>2</b>	<b>EQUIPMENT UNDER TEST (EUT).....</b>	<b>3</b>
<b>3</b>	<b>SAR TEST RESULT SUMMARY .....</b>	<b>5</b>
3.1	MAXIMUM RESULTS FOUND DURING SAR EVALUATION.....	5
3.2	HEAD CONFIGURATION.....	6
3.3	BODY WORN CONFIGURATION (WITH KWC BODY WORN ACCESSORIES) .....	6
3.4	WALKIE-TALKIE RADIO CONFIGURATION .....	6
3.5	MEASUREMENT UNCERTAINTY .....	6
<b>4</b>	<b>TEST CONDITIONS.....</b>	<b>7</b>
4.1	AMBIENT CONDITIONS .....	7
4.2	RF CHARACTERISTICS OF THE TEST SITE .....	7
4.3	TEST SIGNAL, FREQUENCIES AND OUTPUT POWER .....	7
4.4	DEVICE TEST CONDITIONS .....	7
<b>5</b>	<b>DESCRIPTION OF THE TEST EQUIPMENT .....</b>	<b>8</b>
5.1	DOSIMETRIC SYSTEM .....	8
5.2	ADDITIONAL EQUIPMENT NEEDED IN VALIDATION .....	8
5.3	TISSUE STIMULANTS .....	8
5.4	PHANTOMS DESCRIPTION.....	9
5.5	ISOTROPIC E-FIELD PROBE.....	9
<b>6</b>	<b>SYSTEM VALIDATION .....</b>	<b>10</b>
<b>7</b>	<b>DESCRIPTION OF THE TEST PROCEDURE.....</b>	<b>11</b>
7.1	TEST POSITIONS .....	11
7.1.1	<i>Initial Ear Position.....</i>	<i>11</i>
7.1.2	<i>Cheek Position.....</i>	<i>12</i>
7.1.3	<i>Tilt Position.....</i>	<i>12</i>
7.1.4	<i>Walkie-Talkie Radio Configuration .....</i>	<i>13</i>
7.1.5	<i>Body Worn Configuration.....</i>	<i>13</i>
7.2	SCAN PROCEDURES .....	13
7.3	SAR AVERAGING METHODS.....	13
<b>8</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>14</b>
<b>9</b>	<b>TEST DATA .....</b>	<b>15</b>
9.1	HEAD SAR TEST RESULTS.....	15
9.2	BODY WORN SAR TEST RESULT .....	18
<b>10</b>	<b>TEST SETUP PHOTOS .....</b>	<b>19</b>
	<b>APPENDIX A: VALIDATION TEST PRINTOUT.....</b>	<b>23</b>
	<b>APPENDIX B: SAR DISTRIBUTION PRINTOUT.....</b>	<b>23</b>
	<b>APPENDIX C: PROBE CALIBRATION PARAMETERS.....</b>	<b>23</b>

**1 INTRODUCTION**

This test report describes an environmental evaluation measurement of specific absorption rate (SAR) distribution in simulated human head tissues exposed to radio frequency (RF) radiation from a wireless portable device manufactured by Kyocera Wireless Corp. (KWC). These measurements were performed for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC). The testing was performed in accordance with FCC OET Bulletin 65 Supplement C (01/01) and IEEE P1528/D1.2 issued on April 21, 2003.

**2 EQUIPMENT UNDER TEST (EUT)**

The wireless device is described as follows:

<b>FCC ID:</b>	OVFKWC-KX444			
<b>Product:</b>	Tri-mode Dual-Band Analog/Digital Phone			
<b>Trade Name:</b>	Kyocera Wireless Corp			
<b>Model Number:</b>	KX444			
<b>EUT S/N:</b>	6DX0KD9YD			
<b>Type:</b>	[ ] Identical Prototype, [X] Pre-production			
<b>Device Category:</b>	Portable			
<b>RF Exposure Environment:</b>	General Population / Uncontrolled			
<b>Antenna Type:</b>	Fixed Stubby	<b>Antenna Location:</b>	Right/Rear	
<b>Detachable Antenna:</b>	Yes	<b>Antenna Dimensions:</b>	22.5mm (L) x 9.7mm (W)	
<b>External Input:</b>	Audio/Digital Data			
<b>Quantity:</b>	Quantity production is planned			
<b>FCC Rule Parts:</b>	§22H	§22H	§22.901(d)	§24H
<b>Modes:</b>	800 AMPS	800 CDMA	800 CDMA1X	1900 CDMA
<b>Multiple Access Scheme:</b>	FDMA	CDMA	CDMA	CDMA
<b>Duty Cycle:</b>	1:1	1:1	1:1	1:1
<b>TX Frequency (MHz):</b>	824 – 849	824 – 849	824 – 849	1850 - 1910
<b>Emission Designators:</b>	40K0F1D	40K0F8W	1M25F9W	1M25F9W
<b>Max. Output Power (mW)</b>	0.319 ERP	0.309 ERP		0.309 EIRP

**Accessories:****KWC Battery Model**

- **Standard (high capacity battery): TXBAT10023 (3.7V, 1300mA\_hr)**
- **Option (thin battery): TXBAT10009 (3.7V, 900mA\_hr)**

All measurements were done with standard production batteries. The worst cases were re-evaluated with production thin batteries.



Extended and Thin Batteries

**KWC Dexter Leather Case Model: CA90-B1860**

Leather Case and Clip



### 3 SAR TEST RESULT SUMMARY

This device has been tested for localised specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1 ~ 1992 and has been tested in accordance with the measurement procedures specified in IEEE P1528-200X Draft 6.5. Normal antenna operating positions were incorporated, with the device transmitting at frequencies consistent with normal usage of the device. The device has been shown to be capable of compliance for localised specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE std. C95.1-1992

#### 3.1 Maximum Results Found during SAR Evaluation

The equipment is deemed to fulfil the requirements if the measured values are less than or equal to the limit.

**3.2 Head Configuration**

Mode	Ch/f(MHz)	Conducte d Power (dBm)	Device Position	Measured (mW/g)	Result
AMPS	991 (824.04)	25.05	Left Cheek	1.33	<b>PASSED</b>
CDMA-800	1013 (824.0)	25.02	Left Cheek	1.36	<b>PASSED</b>
CDMA-1900	1175 (1908.75)	23.12	Left Tilt	1.46	<b>PASSED</b>

**3.3 Body Worn Configuration (with KWC body worn accessories)**

Mode/	Ch/f(MHz)	Conducte d Power (dBm)	Device Position	Measured (mW/g)	Result
AMPS	383 (836.5)	25.04	Waist level	0.561	<b>PASSED</b>
CDMA-800	383 (836.5)	25.12	Waist level	0.584	<b>PASSED</b>
CDMA-1900	600 (1880.0)	23.13	Waist level	0.311	<b>PASSED</b>

**3.4 Walkie-Talkie Radio Configuration**

Mode	Ch/f(MHz)	Conducte d Power (dBm)	Device Position	Measured (mW/g)	Result
AMPS	383 (836.5)	25.04	Flat	0.397	<b>PASSED</b>
CDMA-800	383 (836.5)	25.01	Flat	0.397	<b>PASSED</b>
CDMA-1900	600 (1880)	23.13	Flat	0.22	<b>PASSED</b>

**3.5 Measurement Uncertainty**

<b>Combined Uncertainty (Assessment &amp; Source)</b>	<b>± 10.09 %</b>
<b>Extended Uncertainty (k=2)</b>	<b>± 20.18%</b>

## 4 TEST CONDITIONS

### 4.1 Ambient Conditions

All tests were performed under the following environmental conditions:

<b>Ambient Temperature:</b>	22 ± 1 Degrees C
<b>Tissue simulating liquid temperature:</b>	22 ± 1 Degrees C
<b>Humidity:</b>	38 %
<b>Pressure:</b>	1015 mB

### 4.2 RF characteristics of the test site

All SAR measurements were performed inside a shielded room that provide isolation from external EM fields.

The E-field probes of the DASY 4 system are capable of detecting signals as low as 5 $\mu$ W/g in the liquid dielectric, and so external fields are minimised by the shielded room, leaving the phone as the dominate radiation source. 2 two-foot square ferrite panels are placed on the floor of the room beneath the phantom area of the DASY system to minimise reflected energy that would otherwise re-enter the phantom and combine constructively or destructively with the desired fields. These ferrite panels provide roughly 12 to 13 dB of attenuation in the frequency range of 900 MHz, and 7 to 8 dB of attenuation in the frequency range of 1.9 GHz.

### 4.3 Test Signal, Frequencies and Output Power

The device was controlled by using Kyocera Wireless Phone Support Toolkit, Test Code Controller.

In all operating bands, the measurements were performed on low, mid and high channels.

The phone was set to nominal maximum power level during all tests and at the beginning of the each test. Radiated power output was measured in KWC antenna range, fully an-echoic chamber from the same unit that was used in SAR testing.

DASY4 system measures power drift during SAR testing by comparing E-field in the same location at the beginning and at the end of measurement. These records were used to monitor stability of power output.

### 4.4 Device Test Conditions

The EUT was tested with a fully charged battery as supplied with the handset. Conducted RF power measurements were performed before and after each SAR measurements to confirm the output power.

**5 DESCRIPTION OF THE TEST EQUIPMENT**

**5.1 Dosimetric System**

The measurements were performed with an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) of Zurich, Switzerland. The system is comprised of high precision robot, robot controller, computer, near-field probe, probe alignment sensor and the SAM phantom containing brain or muscle equivalent material. The overall RSS uncertainty of the measurement system is  $\pm 10.09\%$  with an expanded uncertainty of  $\pm 20.18\%$  (K=2). The measurement uncertainty budget is given in section 6. Below is a list of the calibrated equipment used for the measurements:

Test Equipment	Serial Number	Cal. Due Date
DASY4 DAE3 V1	527	09-10-04
E-field Probe ET3DV6	1618	03-24-04
Dipole Validation kit, D835V2	453	02-11-04
Dipole Validation kit, D1900V2	5D005	02-20-04

*The calibration records of E-field probe are attached in Appendix C.*

**5.2 Additional equipment needed in validation**

Test Equipment	Serial Number	Cal. Due Date
Signal Generator, HP ESG-D3000A	US37231039	03-06-05
Power meter, Giga-tronics 8541C	1832754	02-17-04
Power Sensor, Giga-tronics 80601A	1831867	02-14-04
Vector Network Analyzer, Agilent 8753C	3410A05046	08-06-04
Dielectric Probe Kit, HP 85070B	3033A03145	09-30-04
Thermometer	--	--

**5.3 Tissue Stimulants**

All dielectric parameters of tissue stimulants were measured within 24 hours of SAR measurements. The depth of the tissue stimulant in the ear reference point and flat reference point of the phantom were at least 15cm during all the tests.

The list of ingredients and the percent composition used for the Head and Muscle tissue simulants are listed in the table below:

Ingredient	835 MHz		1900 MHz	
	HEAD	MUSCLE	HEAD	MUSCLE
Water	51.07%	65.45%	54%	69.91%
Cellulose	0.23%	--	--	--
Glycol monobutyl	--	--	44.91%	29.96%
Sugar	47.31%	34.31%	--	--
Preventol	0.24%	0.1%	--	--
Salt	1.15%	0.62%	0.21%	0.13%

The ingredients above are adopted from Application Note: Recipes for Head/Muscle Tissue Simulating Liquid by SPEAG.




#### 5.4 Phantoms Description

SAM v4.0 phantom, manufactured by SPEAG, was used during the measurement. It has fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined in IEEE 1528-200X. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. Reference markings on the phantom allow the complete set-up of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

The thickness of phantom shell is 2mm except for the ear, where an integrated ear spacer provides 6mm spacing from the tissue boundary. Manufacturer reports tolerance in shell thickness to be  $\pm 0.1$ mm.

#### 5.5 Isotropic E-Field Probe

<b>Model</b>	<ul style="list-style-type: none"> <li>ET3DV6</li> </ul> 
<b>Construction</b>	<ul style="list-style-type: none"> <li>Symmetrical design with triangular core</li> <li>Built-in optical fiber for surface detection system</li> <li>Built-in shielding against static charges</li> <li>PEEK enclosure material (resistant to organic solvents, e.g., glycol)</li> </ul>
<b>Calibration</b>	<ul style="list-style-type: none"> <li>Calibration certificate in Appendix C</li> </ul>
<b>Frequency</b>	<ul style="list-style-type: none"> <li>10MHz to 3GHz (dosimetry); Linearity: <math>\pm 0.2</math>dB (30MHz to 3GHz)</li> </ul>
<b>Optical Surface</b>	<ul style="list-style-type: none"> <li><math>\pm 0.2</math>mm repeatability in air and clear liquid over diffuse reflecting</li> </ul>
<b>Detection</b>	<ul style="list-style-type: none"> <li>Surface</li> </ul>
<b>Directivity</b>	<ul style="list-style-type: none"> <li><math>\pm 0.2</math>dB in HSL (rotation around probe axis)</li> <li><math>\pm 0.4</math>dB in HSL (rotation normal to probe axis)</li> </ul>
<b>Dynamic Range</b>	<ul style="list-style-type: none"> <li>5 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm 0.2</math>dB</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>Overall length: 330mm</li> <li>Tip length: 16mm</li> <li>Body diameter: 12mm</li> <li>Tip diameter: 6.8mm</li> <li>Distance from probe tip to dipole centers: 2.7mm</li> </ul>
<b>Application</b>	<ul style="list-style-type: none"> <li>General dosimetry up to 3GHz</li> <li>Compliance tests of mobile phones</li> <li>Fast automatic scanning in arbitrary phantoms.</li> </ul>

## 6 SYSTEM VALIDATION

The probes are calibrated annually by the manufacturer. Dielectric parameters of the stimulating liquids are measured with an automated Hewlett Packard 85070B dielectric probe in conjunction with an Agilent 8753C-network analyser.

The SAR measurements of the device were done within 24 hours of system accuracy verification, which was done using the dipole validation kit. Power level of 20dBm was supplied to a dipole antenna placed under the flat section of SAM phantom. The validation results are in the table below and printouts of the validation test are attached in Appendix A. All the measured parameters were within the specification.

Note since the validation reference in muscle liquid is not available, the system validation with head tissues was done for the device testing in muscle. Based on OET 65 Supplement C EAB Part 22/24 SAR review Reminder Sheet 01/2002, this is a valid test.

Tissue	Freq. (MHz)	Description	Validation SAR (mW/g), 1g	Dielectric Parameters		Temp. (°C)	Test date	Comments Validation testing -
				$\epsilon_r$	$\sigma$ (S/m)			
Head	835	Measured	1.06	42.44	0.911	22±1	11-16-03	For device testing in head liquid
		Measured	1.01	42.25	0.886	22±1	11-17-03	For device testing in head liquid
		Measured	0.998	41.0	0.872	22±1	11-18-03	For device testing in muscle
		Measured	1.09	42.25	0.903	22±1	11-19-03	For device testing in head liquid
		Measured	1.06	42.12	0.891	22±1	11-20-03	For device testing in head liquid
		<b>SPEAG Reference</b>	<b>1.04</b>	<b>41.9</b>	<b>0.89</b>	--	<b>02-11-02</b>	
		<b>FCC Reference*</b>	--	<b>41.5</b>	<b>0.90</b>	<b>20-26</b>	--	
	1900	Measured	4.60	39.44	1.39	22±1	11-13-03	for device testing in head liquid
		Measured	4.42	39.44	1.44	22±1	11-14-03	for device testing in head liquid
		Measured	4.40	39.15	1.46	22±1	11-15-03	for device testing in head & muscle liquid
		Measured	4.54	39.75	1.46	22±1	11-19-03	for device testing in head liquid
		<b>SPEAG Reference</b>	<b>4.56</b>	<b>39.1</b>	<b>1.47</b>	--	<b>02-20-02</b>	
		<b>FCC Reference*</b>	--	<b>40.0</b>	<b>1.40</b>	<b>20-26</b>	--	
	Muscle	835	Measured	--	54.53	0.945	22±1	11-18-03
<b>FCC Reference*</b>			--	<b>55.2</b>	<b>0.97</b>	--	--	
1900		Measured	--	53.21	1.51	22±1	11-15-03	for device testing in muscle
		<b>FCC Reference*</b>	--	<b>53.3</b>	<b>1.52</b>	<b>20-26</b>	--	

FCC reference values are adopted from OET Bulletin 65 (97-01) Supplement C (01-01).

**7 DESCRIPTION OF THE TEST PROCEDURE**

Measurements were made on both left-hand side and right hand side of the phantom.

The device was position against phantom according to OET Bulletin 65 (97-01) Supplement C (01-01). Definitions of terms used in aligning the device to a head phantom are available in IEEE Draft Standard P1528-2001 “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”

**7.1 Test Positions**

The device was placed in the holder. The bottom of the device aligns with the bottom of the holder clamp to provide a standard positioning and ensure enough free space for antenna.

Device holder was provided by SPEAG together with DASy4.

**7.1.1 Initial Ear Position**

The device was initially positioned with the earpiece region pressed against the ear spacer of a head phantom parallel to the “Neck-Front” (N-F) line defined along the base of the ear spacer that contains the “Ear Reference Point” (ERP). The “test device reference point” (point A) is aligned to the ERP on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”.

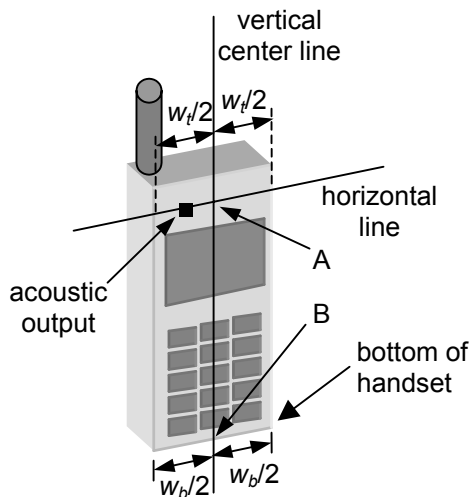


Figure 7-1 – Handset vertical and horizontal reference lines.

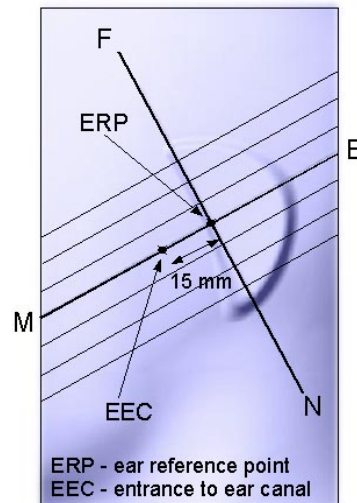


Figure 7-2 - Close up side view of phantom showing the ear region.

### 7.1.2 Cheek Position

“Initial ear position” alignments are maintained and the device is brought toward the mouth of the head phantom by pivoting along the “Neck-Front” line until any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom or when any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

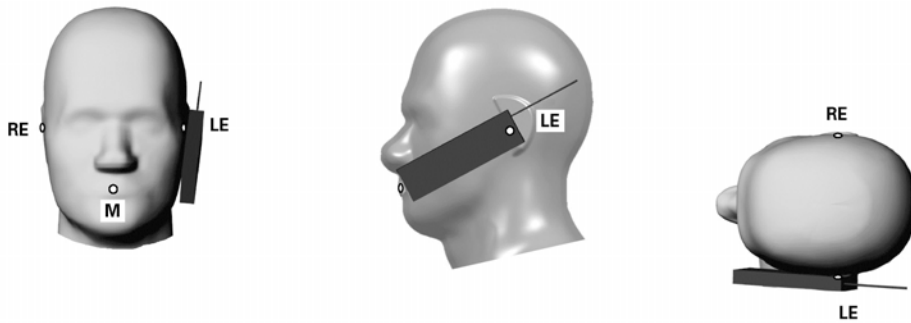


Figure 7.3 - Phone position 1, “cheek” or “touch” position.

### 7.1.3 Tilt Position

In the “cheek position”, if the earpiece of the device is not in full contact with the phantom’s ear spacer and the peak SAR location for the “cheek position” is located at the ear spacer region or corresponds to the earpiece region of the handset, the device is returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise, the device is moved away from the cheek perpendicular to the line passes through both “ear reference points” for approximate 2-3cm. While it is in this position, the device is tilted away from the mouth with respect to the “test device reference point” by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both “ear reference point” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process is repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.

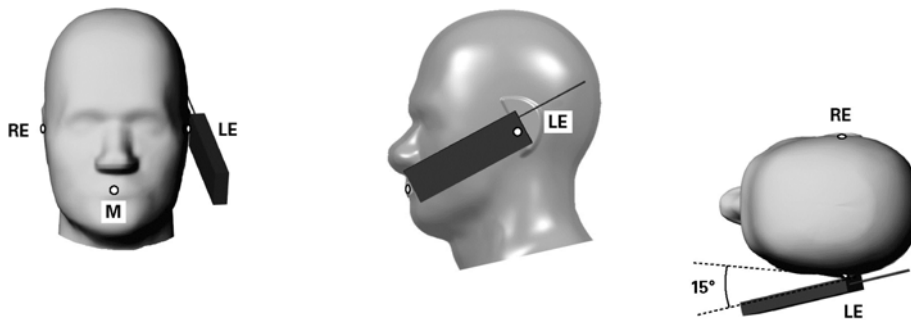


Figure 7.3 - Phone position 2, “tilted” position.

#### 7.1.4 Walkie-Talkie Radio Configuration

The walkie-talkie radio features were evaluated for the FCC RF exposure compliance. The device was positioned to be face up to the flat section of the SAM phantom with 1 inch (2.5 cm) air separation. The SAR levels were tested with 835MHz or 1900MHz brain stimulating liquid, accordingly.

#### 7.1.5 Body Worn Configuration

KWC body worn accessories were tested for the FCC RF exposure compliance. The device was positioned into the carrying case and placed below the flat phantom. Hands-free headset was connected during measurements.

The SAR levels were also measured with 25.0mm air space for the hands-free application, which allow user to use other body-worn holster that contains no metal and provides at least 25.0mm separation from the closest point of the handset to the body.

### 7.2 Scan Procedures

First coarse scans are used for quick determination of the field distribution. Next a cube scans, 7x7x7 points; spacing between each point 5x5x5mm, is performed around the highest E-field value to determine the averaged SAR-distribution over 1g.

### 7.3 SAR Averaging Methods

The maximum SAR value is average over its volume using interpolation and extrapolation.

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot" –condition [W. Gander, Computermathematik, p. 141-150] (x, y and z – directions) [numerical Recipes in C, Second Edition, p 123].

The extrapolation is based on least square algorithm [W. Gander, Computermathematik, p. 168-180]. Through the points in the first 30mm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1mm from one another.

## 8 MEASUREMENT UNCERTAINTY

Description of individual measurement uncertainty

Uncertainty Description	Uncert. Value (± %)	Prob. Dist.	Div	$C_i^{-1}$ 1g	Stand. Uncert (1g) (±%)	$V_i^2$ or $V_{eff}$
<b>Measurement system</b>						
Probe calibration	4.8	N	1	1	4.8	∞
Axial isotropy	4.7	R	$\sqrt{3}$	0.7	1.9	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	3.9	∞
Boundary effects	1.0	R	$\sqrt{3}$	1	0.6	∞
Linearity	4.7	R	$\sqrt{3}$	1	1.0	∞
System Detection limit	1.0	R	$\sqrt{3}$	1	0.5	∞
Readout Electronics	1.0	N	1	1	1.0	∞
Response Time	0.8	R	$\sqrt{3}$	1	0.5	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1.5	∞
RF ambient conditions	3.0	R	$\sqrt{3}$	1	1.7	∞
Mech. Constrains of robot	0.4	R	$\sqrt{3}$	1	0.2	∞
Probe positioning	2.9	R	$\sqrt{3}$	1	1.7	∞
Extrapolation, integration and Integration Algorithms for Max. SAR Evaluation	1.0	R	$\sqrt{3}$	1	0.6	∞
<b>Test Sample Related</b>						
Device positioning	3.0	N	1	1	3.0	∞
Device Holder	3.0	N	1	1	3.0	∞
Power drift	5.0	N	$\sqrt{3}$	1	2.9	∞
<b>Phantom and setup</b>						
Phantom uncertainty	4.0	R	$\sqrt{3}$	1	2.3	∞
Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.6	1.7	∞
Liquid conductivity (meas.)	5.0	N	1	0.6	3.0	∞
Liquid permittivity (target)	5.0	R	$\sqrt{3}$	0.6	1.7	∞
Liquid permittivity (meas.)	5.0	N	1	0.6	1.5	∞
<b>Combined Standard Uncertainty:</b>					<b>10.09</b>	
<b>Extended Standard Uncertainty (k=2):</b>					<b>20.18</b>	

N: Normal  
R: Rectangular

9 TEST DATA

9.1 Head SAR Test Results

The following tables list the SAR results in each configuration and operating mode. For each mode, corresponding SAR distribution printouts of maximum results (indicated in bold blue color in the following table) in every device position (Cheek or Tilt) are shown in Appendix B. The rest of SAR distributions are substantially similar or equivalent to the plots submitted, regardless of used channel or battery configurations.

<b>AMPS 800 HEAD</b>		<b>Channel:</b>	991	383	799
		<b>Frequency (MHz):</b>	824.04	836.49	848.97
		<b>Power before Test (dBm):</b>	25.05	25.04	25.06
		<b>Power after Test (dBm):</b>	25.02	25.03	25.00
<b>Configuration</b>	<b>Test Position</b>	<b>Antenna Position</b>	<b>SAR, 1g (W/kg)</b>		
<b>w/ standard battery</b>	<b>Left Cheek/Touch</b>	Fixed	1.25	1.10	1.20
	<b>Left Ear/Tilt</b>	Fixed	1.19	1.00	1.12
	<b>Right Cheek/Touch</b>	Fixed	1.16	0.97	1.00
	<b>Right Ear/Tilt</b>	Fixed	1.00	0.78	0.89
<b>standard batt &amp; batt cover w/ backpack clip</b>	<b>Left Cheek/Touch</b>	Fixed	1.27		
	<b>Left Ear/Tilt</b>	Fixed	1.19		
	<b>Right Cheek/Touch</b>	Fixed	1.14		
	<b>Right Ear/Tilt</b>	Fixed	1.09		
<b>w/ thin battery</b>	<b>Left Cheek/Touch</b>	Fixed	1.28		
	<b>Left Ear/Tilt</b>	Fixed	1.18		
	<b>Right Cheek/Touch</b>	Fixed	<b>1.19</b>		
	<b>Right Ear/Tilt</b>	Fixed	1.07		
<b>thin battery &amp; batt cover w/ backpack clip</b>	<b>Left Cheek/Touch</b>	Fixed	<b>1.33</b>		
	<b>Left Ear/Tilt</b>	Fixed	<b>1.22</b>		
	<b>Right Cheek/Touch</b>	Fixed	1.16		
	<b>Right Ear/Tilt</b>	Fixed	<b>1.10</b>		
<b>Configuration</b>	<b>Test Position</b>	<b>Antenna/Phone Position</b>	<b>SAR, 1g (W/kg)</b>		
<b>Standard batt</b>	Flat	Fixed/Face up, 1inch gap		<b>0.392</b>	
<b>Standard batt &amp; batt cover w/ backpack clip</b>	Flat	Fixed/Face up, 1inch gap		<b>0.364</b>	
<b>Thin batt</b>	Flat	Fixed/Face up, 1inch gap		<b>0.397</b>	
<b>Thin batt &amp; batt cover w/ backpack clip</b>	Flat	Fixed/Face up, 1inch gap		<b>0.377</b>	

<b>CDMA 800 HEAD</b>		<b>Channel:</b>	1013	383	777
		<b>Frequency (MHz):</b>	824.70	836.49	848.31
		<b>Power before Test (dBm):</b>	25.02	25.01	25.05
		<b>Power after Test (dBm):</b>	25.14	25.00	25.02
<b>Configuration</b>	<b>Test Position</b>	<b>Antenna Position</b>	<b>SAR, 1g (W/kg)</b>		
<b>w/ standard battery</b>	<b>Left Cheek/Touch</b>	Fixed	1.31	1.08	1.18
	<b>Left Ear/Tilt</b>	Fixed	1.24	0.97	1.09
	<b>Right Cheek/Touch</b>	Fixed	1.23	0.97	1.08
	<b>Right Ear/Tilt</b>	Fixed	1.06	0.79	0.86
<b>standard batt &amp; batt cover w/ backpack clip</b>	<b>Left Cheek/Touch</b>	Fixed	<b>1.36</b>		
	<b>Left Ear/Tilt</b>	Fixed	1.25		
	<b>Right Cheek/Touch</b>	Fixed	1.22		
	<b>Right Ear/Tilt</b>	Fixed	1.12		
<b>w/ thin battery</b>	<b>Left Cheek/Touch</b>	Fixed	1.35		
	<b>Left Ear/Tilt</b>	Fixed	1.25		
	<b>Right Cheek/Touch</b>	Fixed	<b>1.24</b>		
	<b>Right Ear/Tilt</b>	Fixed	1.14		
<b>thin batt &amp; batt cover w/ backpack clip</b>	<b>Left Cheek/Touch</b>	Fixed	1.35		
	<b>Left Ear/Tilt</b>	Fixed	<b>1.30</b>		
	<b>Right Cheek/Touch</b>	Fixed	1.19		
	<b>Right Ear/Tilt</b>	Fixed	<b>1.17</b>		
<b>Configuration</b>	<b>Test Position</b>	<b>Antenna/Phone Position</b>	<b>SAR, 1g (W/kg)</b>		
<b>Standard batt</b>	Flat	Fixed/Face up, 1inch gap		<b>0.366</b>	
<b>Standard batt &amp; batt cover w/ backpack clip</b>	Flat	Fixed/Face up, 1inch gap		<b>0.358</b>	
<b>Thin batt</b>	Flat	Fixed/Face up, 1inch gap		<b>0.397</b>	
<b>Thin batt &amp; batt cover w/ backpack clip</b>	Flat	Fixed/Face up, 1inch gap		<b>0.37</b>	



<b>CDMA 1900 HEAD</b>		<b>Channel:</b>	25	600	1175
		<b>Frequency (MHz):</b>	1851.25	1880	1908.75
		<b>Power before Test (dBm):</b>	23.17	23.13	23.12
		<b>Power after Test (dBm):</b>	23.12	23.05	23.16
<b>Configuration</b>	<b>Test Position</b>	<b>Antenna Position</b>	<b>SAR, 1g (W/kg)</b>		
<b>w/ standard battery</b>	<b>Left Cheek/Touch</b>	Fixed	0.84	0.94	1.00
	<b>Left Ear/Tilt</b>	Fixed	1.16	1.33	1.45
	<b>Right Cheek/Touch</b>	Fixed	0.85	0.95	<b>0.986</b>
	<b>Right Ear/Tilt</b>	Fixed	1.01	1.17	1.20
<b>standard batt &amp; batt cover w/ backpack clip</b>	<b>Left Cheek/Touch</b>	Fixed			<b>1.01</b>
	<b>Left Ear/Tilt</b>	Fixed			<b>1.46</b>
	<b>Right Cheek/Touch</b>	Fixed			0.87
	<b>Right Ear/Tilt</b>	Fixed			<b>1.28</b>
<b>w/ thin battery</b>	<b>Left Cheek/Touch</b>	Fixed			0.98
	<b>Left Ear/Tilt</b>	Fixed			1.42
	<b>Right Cheek/Touch</b>	Fixed			0.98
	<b>Right Ear/Tilt</b>	Fixed			1.19
<b>thin batt &amp; batt cover w/ backpack clip</b>	<b>Left Cheek/Touch</b>	Fixed			0.99
	<b>Left Ear/Tilt</b>	Fixed			1.46
	<b>Right Cheek/Touch</b>	Fixed			0.88
	<b>Right Ear/Tilt</b>	Fixed			1.27
<b>Configuration</b>	<b>Test Position</b>	<b>Antenna/Phone Position</b>	<b>SAR, 1g (W/kg)</b>		
<b>Standard batt</b>	Flat	Fixed/Face up, 1inch gap		<b>0.202</b>	
<b>Standard batt &amp; batt cover w/ backpack clip</b>	Flat	Fixed/Face up, 1inch gap		<b>0.219</b>	
<b>Thin batt</b>	Flat	Fixed/Face up, 1inch gap		<b>0.165</b>	
<b>Thin batt &amp; batt cover w/ backpack clip</b>	Flat	Fixed/Face up, 1inch gap		<b>0.22</b>	

**9.2 Body Worn SAR Test Result**

The device was tested with a 25mm air gap or with KWC body-worn accessories. For each configuration, SAR tests were performed only at mid channel due to very low SAR levels. All of the SAR distribution plots are provided in Appendix B.

**Waist Level SAR with KWC Body Worn Accessories**

<b>AMPS 800 BODY</b>		<b>Channel:</b>	991	383	799
		<b>Frequency (MHz):</b>	824.04	836.49	848.97
		<b>Power before Test (dBm):</b>		25.04	
		<b>Power after Test (dBm):</b>		25.03	
<b>Configuration</b>	<b>Test Position</b>	<b>Phone Configuration</b>	<b>SAR, 1g (W/kg)</b>		
Air Gap - 25mm	Flat	Face Down		<b>0.454</b>	
Leather Case: (CA90-B1860)	Flat	Face Down		<b>0.388</b>	
Kyocera Universal Belt Clip: (CE90-B1795-01)	Flat	Face Down		<b>0.561</b>	

<b>CDMA 800 BODY</b>		<b>Channel:</b>	1013	383	777
		<b>Frequency (MHz):</b>	824.70	836.49	848.31
		<b>Power before Test (dBm):</b>		25.01	
		<b>Power after Test (dBm):</b>		25.00	
<b>Configuration</b>	<b>Test Position</b>	<b>Phone Configuration</b>	<b>SAR, 1g (W/kg)</b>		
Air Gap - 25mm	Flat	Face Down		<b>0.39</b>	
Leather Case: (CA90-B1860)	Flat	Face Down		<b>0.381</b>	
Kyocera Universal Belt Clip: (CE90-B1795-01)	Flat	Face Down		<b>0.584</b>	

<b>CDMA 1900 BODY</b>		<b>Channel:</b>	25	600	1175
		<b>Frequency (MHz):</b>	1851.25	1880	1908.75
		<b>Power before Test (dBm):</b>		23.13	
		<b>Power after Test (dBm):</b>		23.05	
<b>Configuration</b>	<b>Test Position</b>	<b>Phone Configuration</b>	<b>SAR, 1g (W/kg)</b>		
Air Gap - 25mm	Flat	Face Down		<b>0.159</b>	
Leather Case: (CA90-B1860)	Flat	Face Down		<b>0.201</b>	
Kyocera Universal Belt Clip: (CE90-B1795-01)	Flat	Face Down		<b>0.311</b>	

10 TEST SETUP PHOTOS

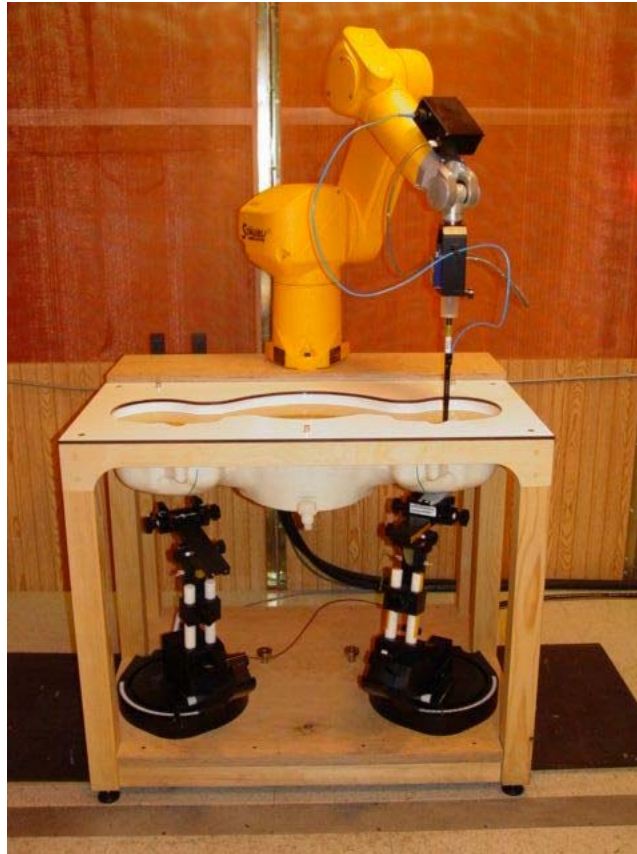


Figure 10.1 DASY 4 System



Figure 10.2 phone against the head (left cheek position)



Figure 10.3 phone against the head (left tilt position)



Figure 10.4 body SAR setup (with belt clip)



Figure 10.5 body SAR setup (with leather case)



Figure 10.6 body SAR setup (with 25mm air separation)



Figure 10.7 walkie-talkie radio setup (with 1 inch air separation)

## **Appendix A: Validation test printout**

*Please see separate attachment*

## **Appendix B: SAR distribution printout**

*Please see separate attachment*

## **Appendix C: probe calibration parameters**

*Please see separate attachment*