

Test Laboratory: Compliance Certification Services

HAC_E_Device Cell band (Backlight on - Keypad open)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 824.7 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section
 Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of Total field (slot averaged) = 0.120 A/m

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1 0.152	Grid 2 0.120	Grid 3 0.087	Grid 1 0.152	Grid 2 0.120	Grid 3 0.087
Grid 4 0.143	Grid 5 0.114	Grid 6 0.084	Grid 4 0.143	Grid 5 0.114	Grid 6 0.084
Grid 7 0.147	Grid 8 0.110	Grid 9 0.078	Grid 7 0.147	Grid 8 0.110	Grid 9 0.078

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

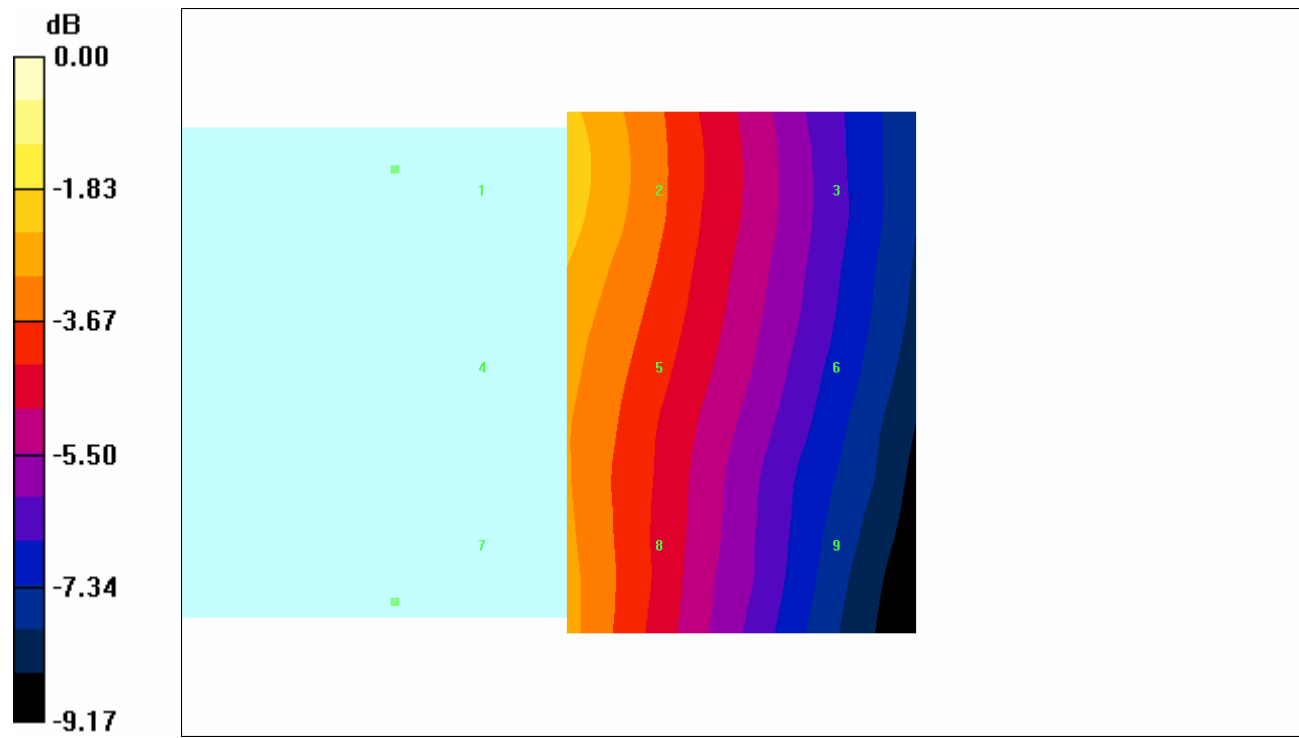

0 dB = 0.152A/m

Test Laboratory: Compliance Certification Services

HAC_E_Device Cell band (Backlight on - Keypad open)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 836.49 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section
 Measurement Standard: DASYS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of Total field (slot averaged) = 0.123 A/m
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1 0.157	Grid 2 0.123	Grid 3 0.089	Grid 1 0.157	Grid 2 0.123	Grid 3 0.089
Grid 4 0.147	Grid 5 0.118	Grid 6 0.087	Grid 4 0.147	Grid 5 0.118	Grid 6 0.087
Grid 7 0.155	Grid 8 0.114	Grid 9 0.081	Grid 7 0.155	Grid 8 0.114	Grid 9 0.081

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

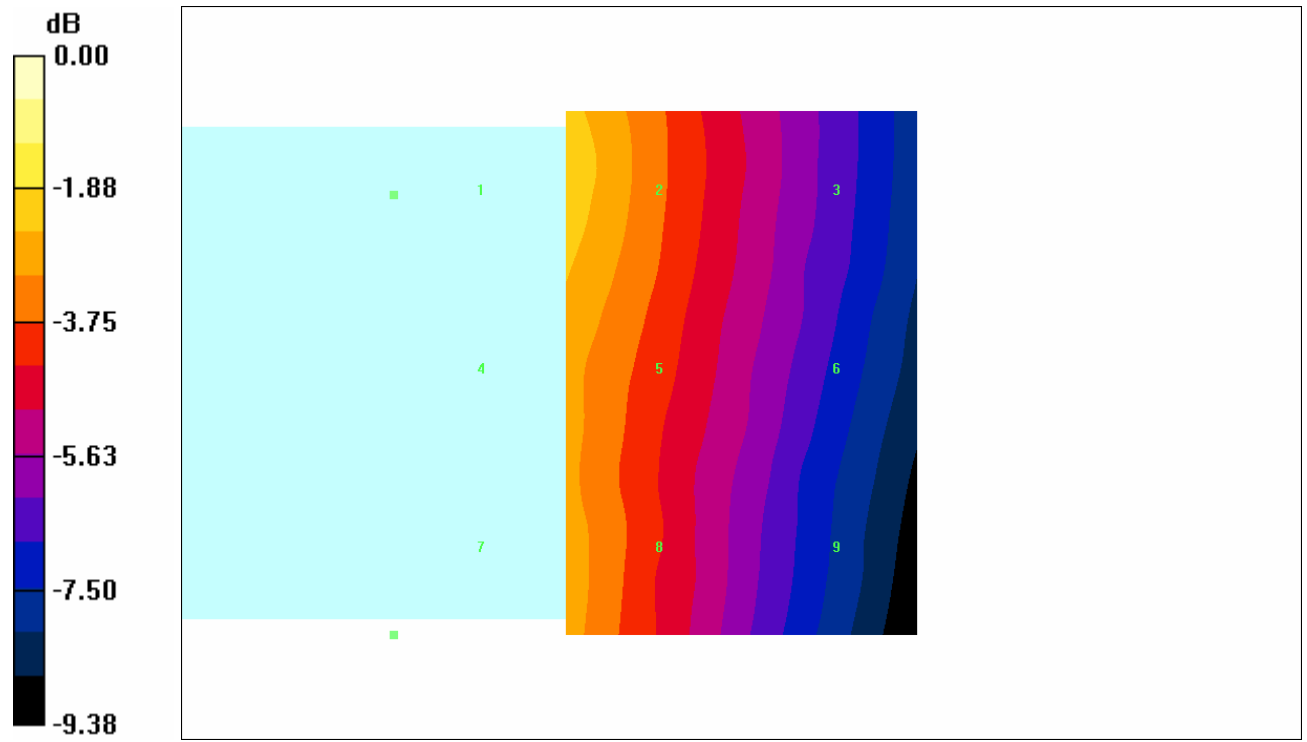

0 dB = 0.157A/m

Test Laboratory: Compliance Certification Services

HAC_E_Device Cell band (Backlight on - Keypad open)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of Total field (slot averaged) = 0.135 A/m
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1 0.170	Grid 2 0.135	Grid 3 0.097	Grid 1 0.170	Grid 2 0.135	Grid 3 0.097
Grid 4 0.161	Grid 5 0.129	Grid 6 0.094	Grid 4 0.161	Grid 5 0.129	Grid 6 0.094
Grid 7 0.169	Grid 8 0.127	Grid 9 0.089	Grid 7 0.169	Grid 8 0.127	Grid 9 0.089

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

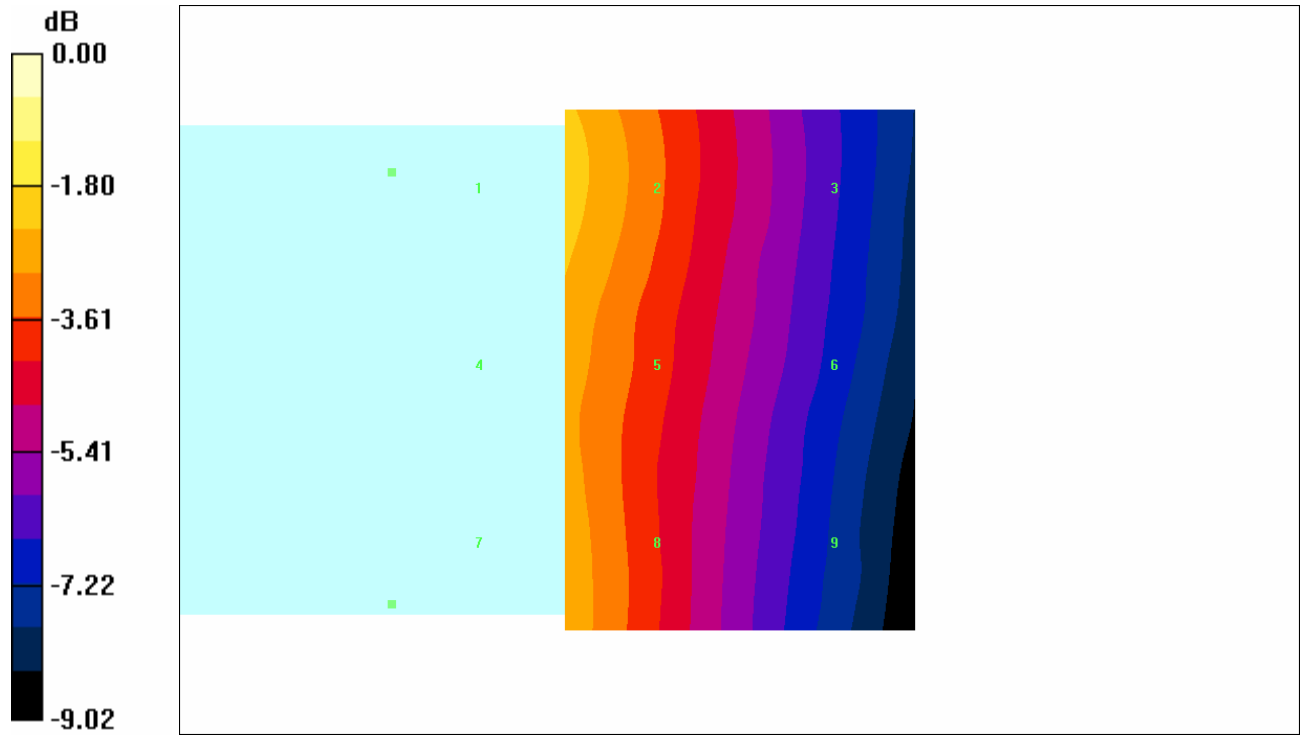

0 dB = 0.170A/m

Test Laboratory: Compliance Certification Services

HAC_H_Device Cell band (Backlight off - Keypad open)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 824.7 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of Total field (slot averaged) = 0.119 A/m
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1 0.151	Grid 2 0.119	Grid 3 0.086	Grid 1 0.151	Grid 2 0.119	Grid 3 0.086
Grid 4 0.143	Grid 5 0.113	Grid 6 0.084	Grid 4 0.143	Grid 5 0.113	Grid 6 0.084
Grid 7 0.146	Grid 8 0.108	Grid 9 0.078	Grid 7 0.146	Grid 8 0.108	Grid 9 0.078

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

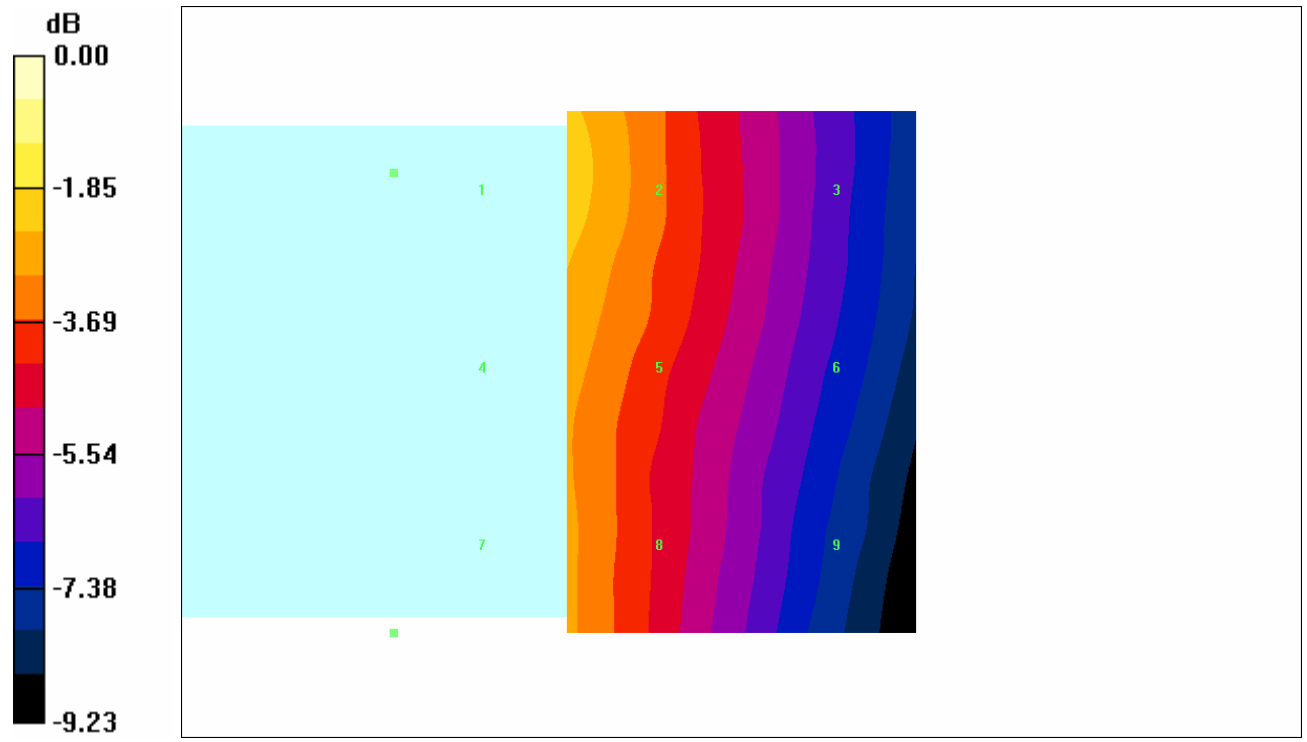

0 dB = 0.151A/m

Test Laboratory: Compliance Certification Services

HAC_H_Device Cell band (Backlight off - Keypad open)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 836.49 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of Total field (slot averaged) = 0.126 A/m
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.159	0.126	0.090	0.159	0.126	0.090
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.152	0.120	0.088	0.152	0.120	0.088
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.155	0.116	0.081	0.155	0.116	0.081

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

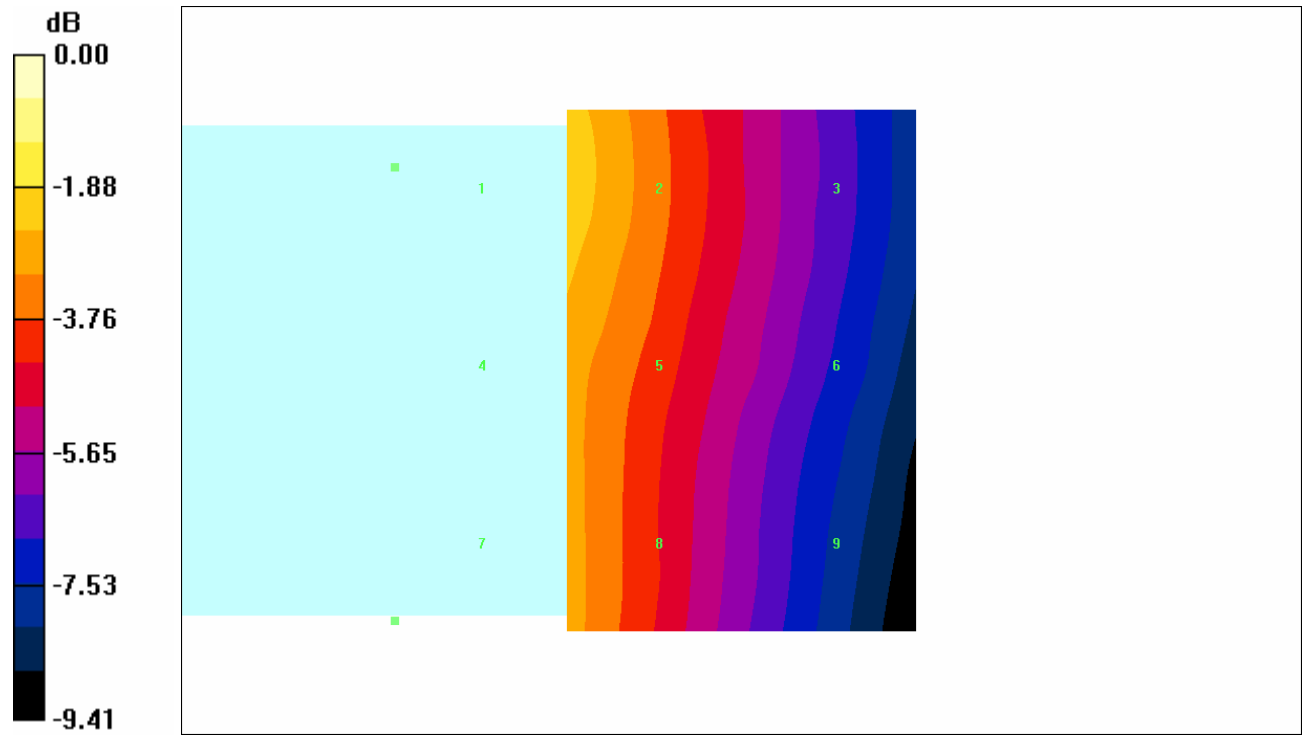

0 dB = 0.159A/m

Test Laboratory: Compliance Certification Services

HAC_H_Device Cell band (Backlight off - Keypad open)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
 Phantom section: H Dipole Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm
 Maximum value of Total field (slot averaged) = 0.135 A/m
Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1 0.172	Grid 2 0.135	Grid 3 0.097	Grid 1 0.172	Grid 2 0.135	Grid 3 0.097
Grid 4 0.163	Grid 5 0.129	Grid 6 0.095	Grid 4 0.163	Grid 5 0.129	Grid 6 0.095
Grid 7 0.170	Grid 8 0.127	Grid 9 0.090	Grid 7 0.170	Grid 8 0.127	Grid 9 0.090

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

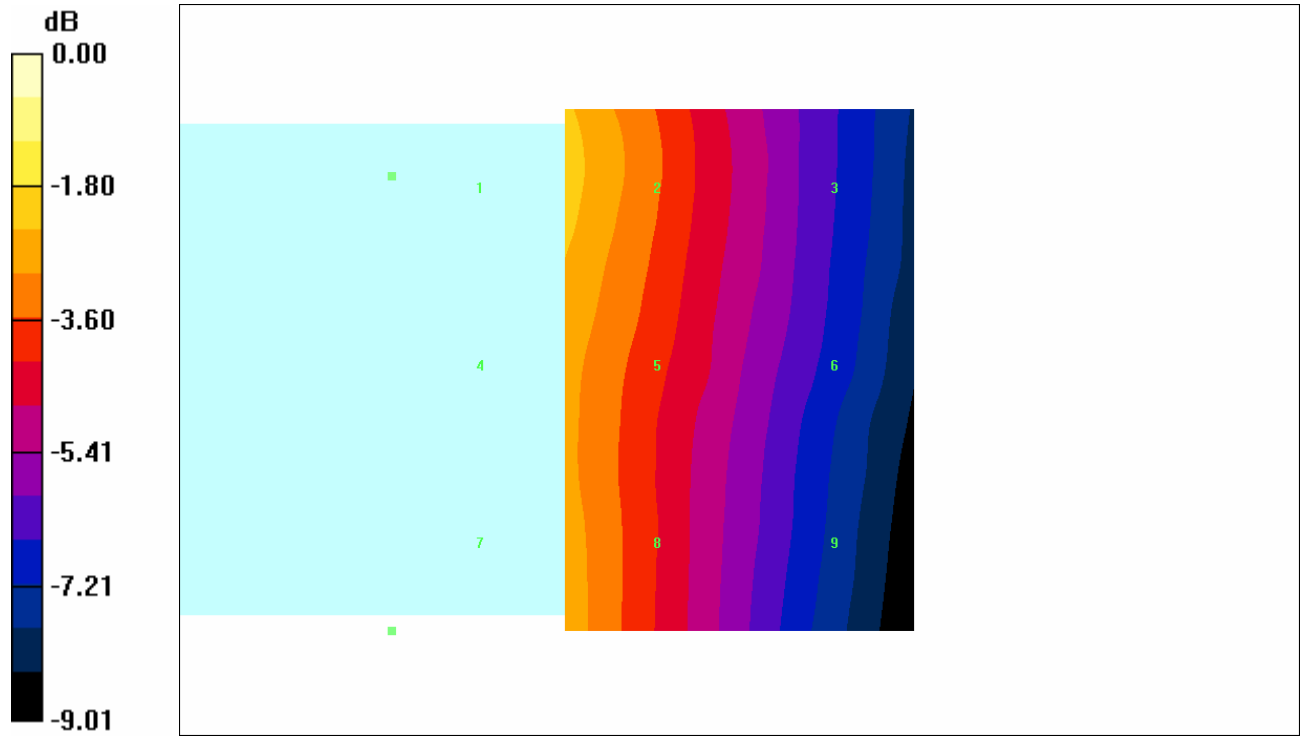

0 dB = 0.172A/m

Test Laboratory: Compliance Certification Services

HAC_H_Device Cell band (Backlight on - Keypad close)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 0.184 A/m

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1 0.164	Grid 2 0.163	Grid 3 0.154	Grid 1 0.164	Grid 2 0.163	Grid 3 0.154
Grid 4 0.183	Grid 5 0.184	Grid 6 0.173	Grid 4 0.183	Grid 5 0.184	Grid 6 0.173
Grid 7 0.192	Grid 8 0.191	Grid 9 0.175	Grid 7 0.192	Grid 8 0.191	Grid 9 0.175

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

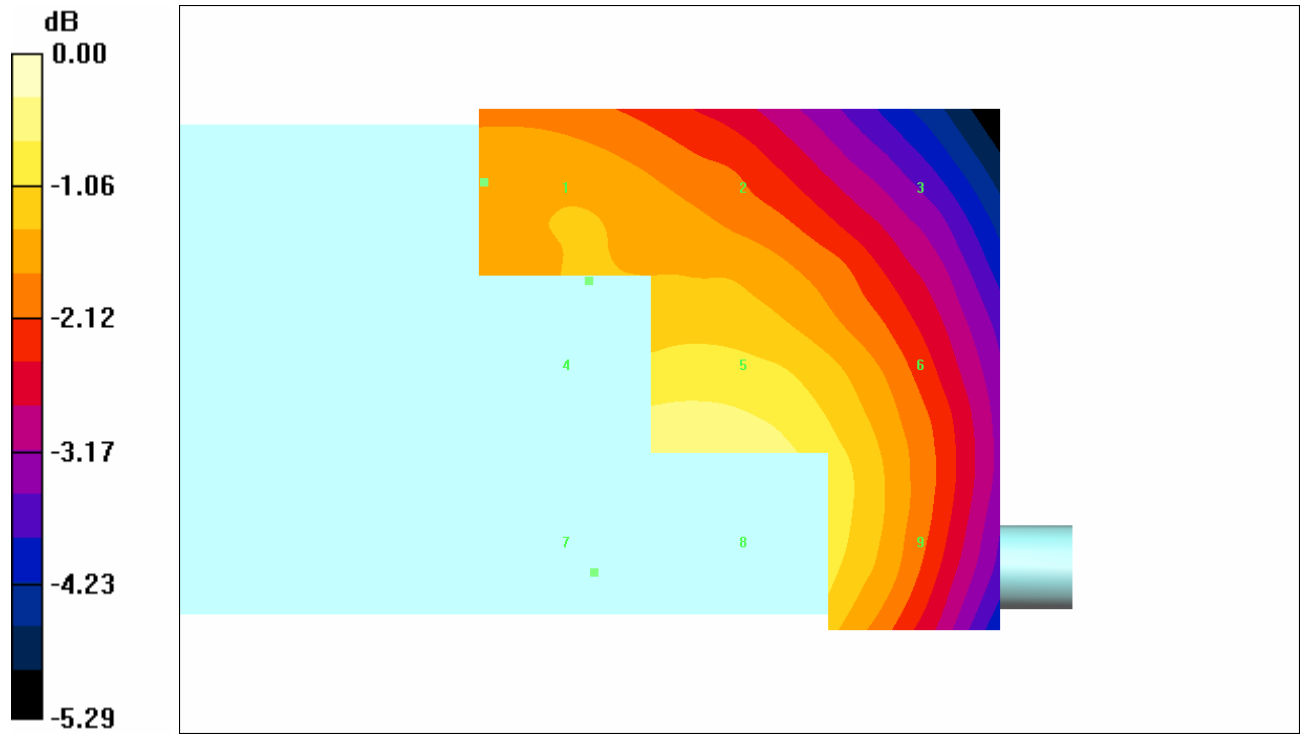

0 dB = 0.192A/m

Test Laboratory: Compliance Certification Services

HAC_H_Device Cell band (Backlight on - Keypad close)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 0.198 A/m

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.178	0.178	0.166	0.178	0.178	0.166
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.198	0.198	0.186	0.198	0.198	0.186
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.207	0.207	0.188	0.207	0.207	0.188

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

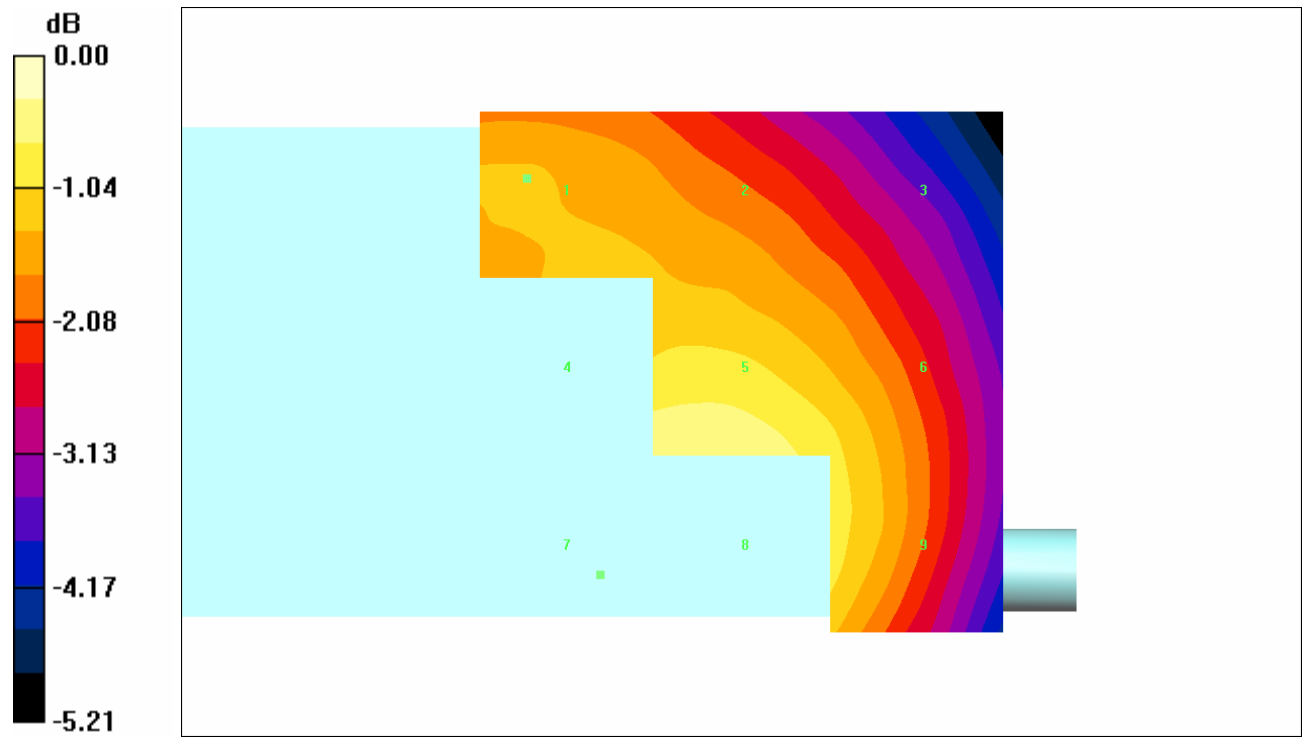

0 dB = 0.207A/m

Test Laboratory: Compliance Certification Services

HAC_H_Device Cell band (Backlight on - Keypad close)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 0.207 A/m

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1 0.188	Grid 2 0.187	Grid 3 0.173	Grid 1 0.188	Grid 2 0.187	Grid 3 0.173
Grid 4 0.207	Grid 5 0.207	Grid 6 0.195	Grid 4 0.207	Grid 5 0.207	Grid 6 0.195
Grid 7 0.216	Grid 8 0.216	Grid 9 0.197	Grid 7 0.216	Grid 8 0.216	Grid 9 0.197

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

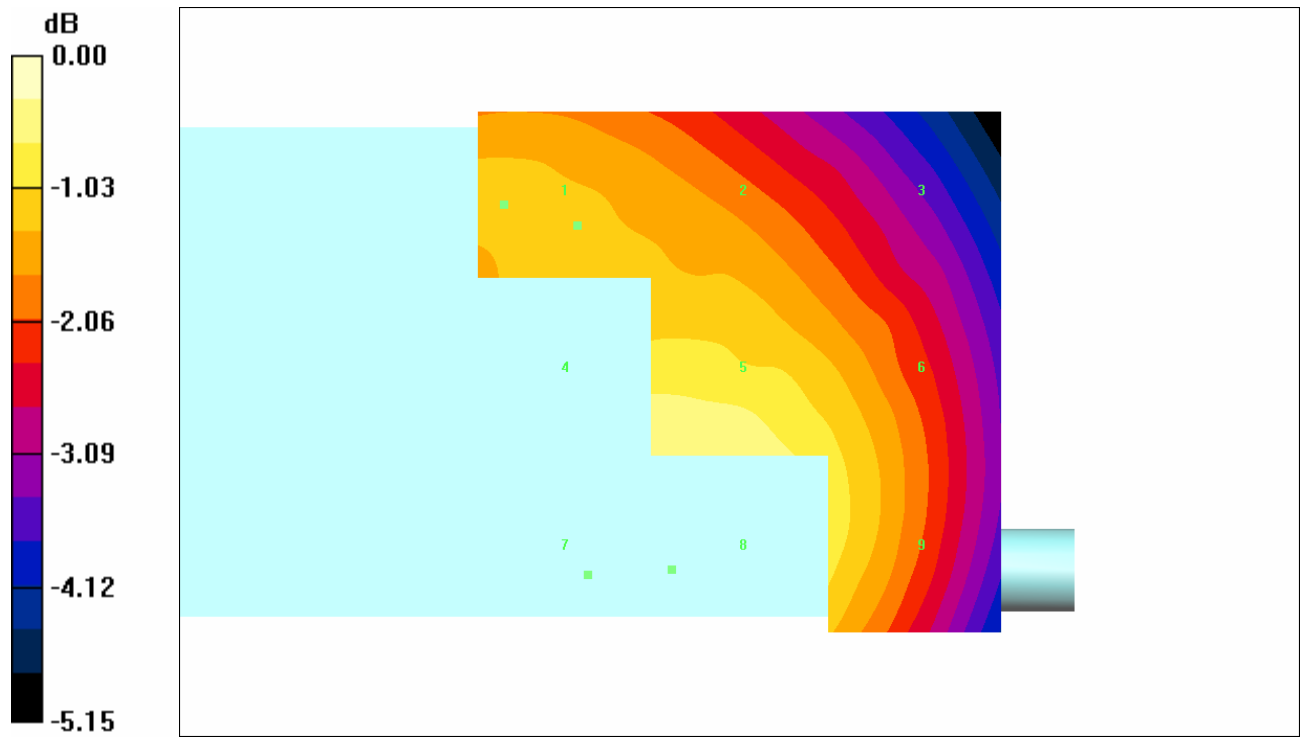

0 dB = 0.216A/m

Test Laboratory: Compliance Certification Services

HAC_E_Device Cell band (Backlight off - Keypad close)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 0.187 A/m

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1 0.168	Grid 2 0.168	Grid 3 0.156	Grid 1 0.168	Grid 2 0.168	Grid 3 0.156
Grid 4 0.187	Grid 5 0.187	Grid 6 0.177	Grid 4 0.187	Grid 5 0.187	Grid 6 0.177
Grid 7 0.196	Grid 8 0.196	Grid 9 0.179	Grid 7 0.196	Grid 8 0.196	Grid 9 0.179

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

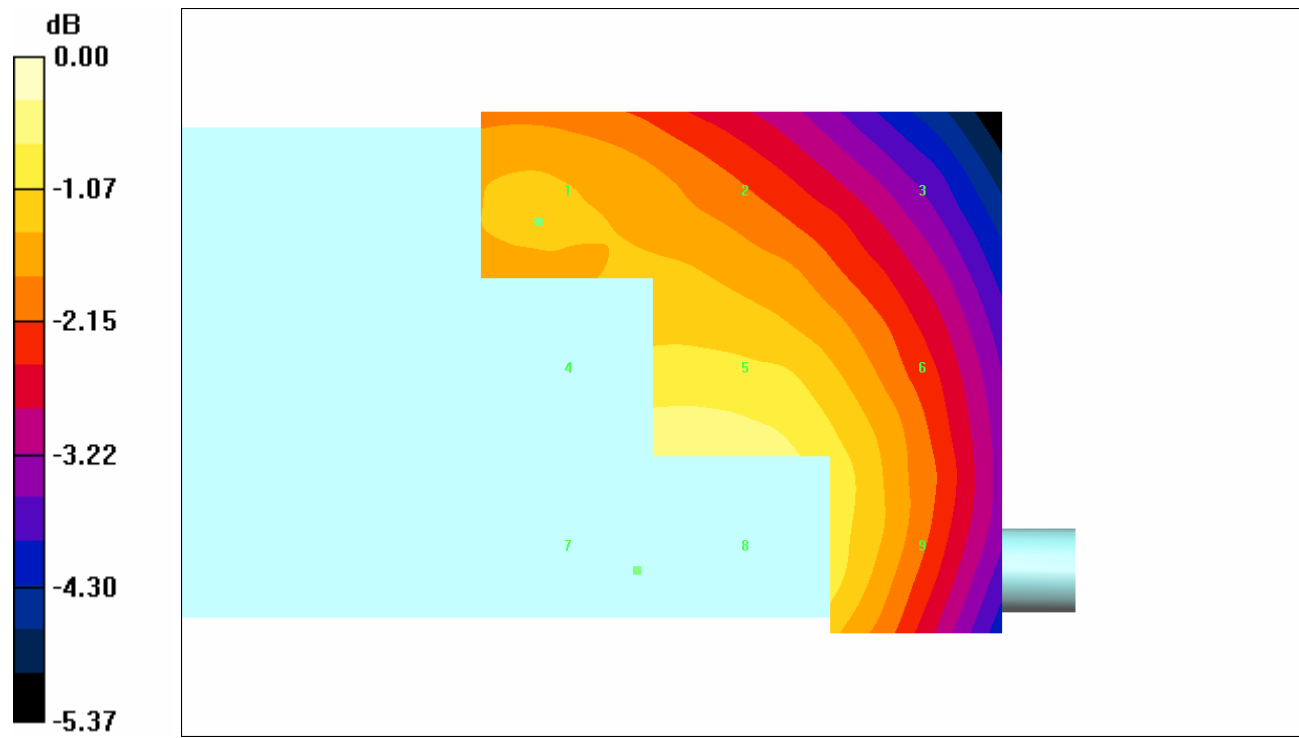

0 dB = 0.196A/m

Test Laboratory: Compliance Certification Services

HAC_E_Device Cell band (Backlight off - Keypad close)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 836.49 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 0.199 A/m

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1 0.181	Grid 2 0.180	Grid 3 0.167	Grid 1 0.181	Grid 2 0.180	Grid 3 0.167
Grid 4 0.200	Grid 5 0.199	Grid 6 0.187	Grid 4 0.200	Grid 5 0.199	Grid 6 0.187
Grid 7 0.209	Grid 8 0.209	Grid 9 0.190	Grid 7 0.209	Grid 8 0.209	Grid 9 0.190

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

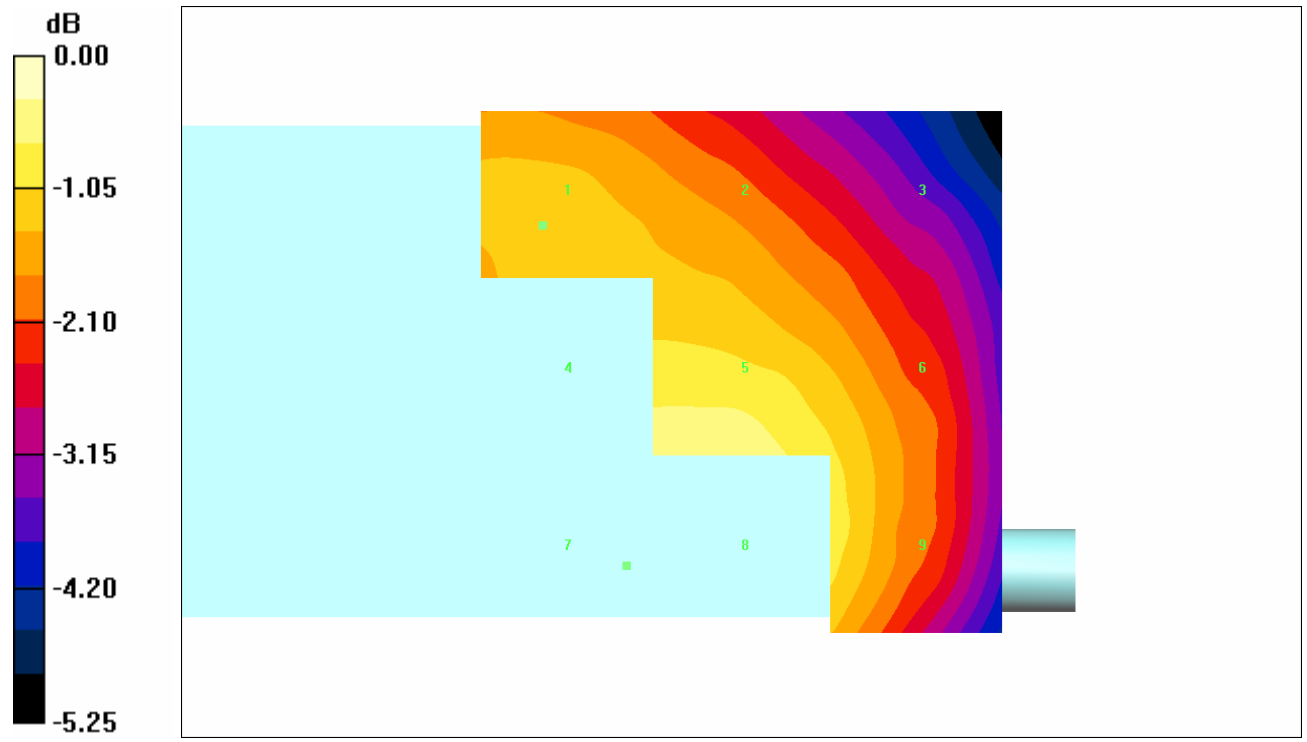

0 dB = 0.209A/m

Test Laboratory: Compliance Certification Services

HAC_E_Device Cell band (Backlight off - Keypad close)

DUT: Kyocera; Type: KX5-5C1; Serial: 20-M7405-01

Communication System: CDMA Cellular band; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: H Dipole Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 3/11/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 2/7/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA; Serial: 1011
- Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 0.209 A/m

Hearing Aid Near-Field Category: M3 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1 0.191	Grid 2 0.189	Grid 3 0.175	Grid 1 0.191	Grid 2 0.189	Grid 3 0.175
Grid 4 0.209	Grid 5 0.209	Grid 6 0.196	Grid 4 0.209	Grid 5 0.209	Grid 6 0.196
Grid 7 0.218	Grid 8 0.218	Grid 9 0.198	Grid 7 0.218	Grid 8 0.218	Grid 9 0.198

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

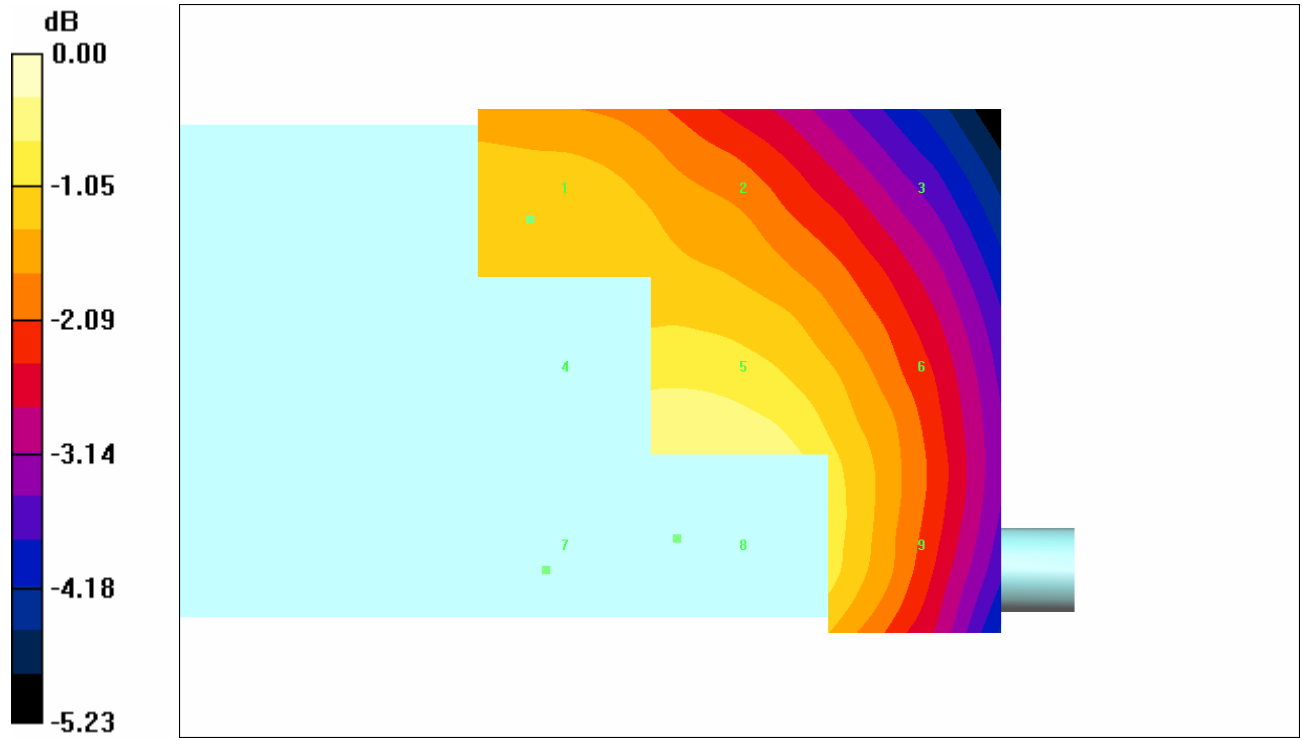

0 dB = 0.218A/m