

FCC TEST REPORT

for

47 CFR Part 22H

Equipment : Topaz
Trade Name : Kyocera
Model No. : KX7-1Y0
FCC ID : OVFKWC-KX7
Tx Frequency Range : 824~849MHz
Max. RF Output Power : 0.324W
Emission Designator : 1M25F9W
Applicant : **Kyocera Wireless Corporation**
10300 CAMPUS POINT DRIVE SAN DIEGO, CA
92121
Reference No. : **KH-5025**

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on May 04, 2005 at Sporton International Inc. LAB.

Daniel Lee 5/13/2005

Dr. Daniel Lee
EMC/SAR Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255



Table of Contents

History of this test report.....ii

1. General Information 1

 1.1. Applicant1

 1.2. Manufacturer1

 1.3. Basic Description of Equipment under Test.....1

 1.4. Feature of Equipment under Test2

 1.5. Report Date.....2

2 Test Configuration of Equipment under Test3

 2.1 Test Manner3

 2.2 Test Mode3

 2.3 Connection Diagram of Test System4

 2.4 Ancillary Equipment List.....4

3. General Information of Test Site5

 3.1 Test Voltage5

 3.2 Test in Compliance with5

 3.3 Frequency Range Investigated5

 3.4 Test Distance5

4. Test Data and Test Result.....6

 4.1 List of Measurements and Examinations6

 4.2 RF Output Power7

 4.3 ERP / EIRP Measurement8

 4.4 Occupied Bandwidth and Band Edge Measurement10

 4.5 Conducted Emission15

 4.6 Field Strength of Spurious Radiation20

 4.7 Frequency Stability (Temperature Variation)23

 4.8 Frequency Stability (Voltage Variation).....24

5 List of Measurement Equipments25

6 Uncertainty Evaluation.....26

Appendix A. Photographs of EUT External

Appendix B. Photographs of EUT Internal

Appendix C. Photographs of Setup



1. General Information

1.1. Applicant

Kyocera Wireless Corporation
10300 CAMPUS POINT DRIVE SAN DIEGO, CA 92121

1.2 Manufacturer

BenQ Corporation
157 Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan, R.O.C.

1.3 Basic Description of Equipment under Test

Equipment	: Topaz
Trade Name	: Kyocera
Model No.	: KX7-1Y0
FCC ID	: OVFKWC-KX7
Earpiece	: TXCKT10041
Charger	: TXACA10009
Battery	: TXBAT10100

**1.4 Feature of Equipment under Test**

DUT Type :	Topaz
Trade Name :	Kyocera
Model Name :	KX7-1Y0
FCC ID :	OVFKWC-KX7
Tx Frequency :	824.70~848.31 MHz
Rx Frequency :	869.70~893.31 MHz
Antenna Type :	Fixed External
Bandwidth of each channel :	1.25 MHz
Maximum Output Power to Antenna :	0.324 W (25.10 dBm)
Maximum ERP :	0.22 W (23.340 dBm)
HW Version :	LPR4-5-A
SW Version :	0.3181
Digital Modulation Emission :	OQPSK
Type of Emission :	1M25F9W
Power Rating (DC/AC, Voltage) :	DC 3.7V
DUT Stage :	Production Unit

1.5 Report Date

EUT Received : Apr. 26, 2005

Report Date : May 13, 2005



2 Test Configuration of Equipment under Test


2.1 Test Manner

- a. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
- b. During all testings, EUT is in link mode with base station emulator at maximum power level.
- c. Frequency range investigated: radiated emission 30 MHz to 9000 MHz.

2.2 Test Mode

Application	CDMA 2000 US Cellular band
Radiated Emission	<input checked="" type="checkbox"/> Mode 1: CH 384
Conducted Measurement	<input checked="" type="checkbox"/> Mode 1: CH 384

2.3 Connection Diagram of Test System

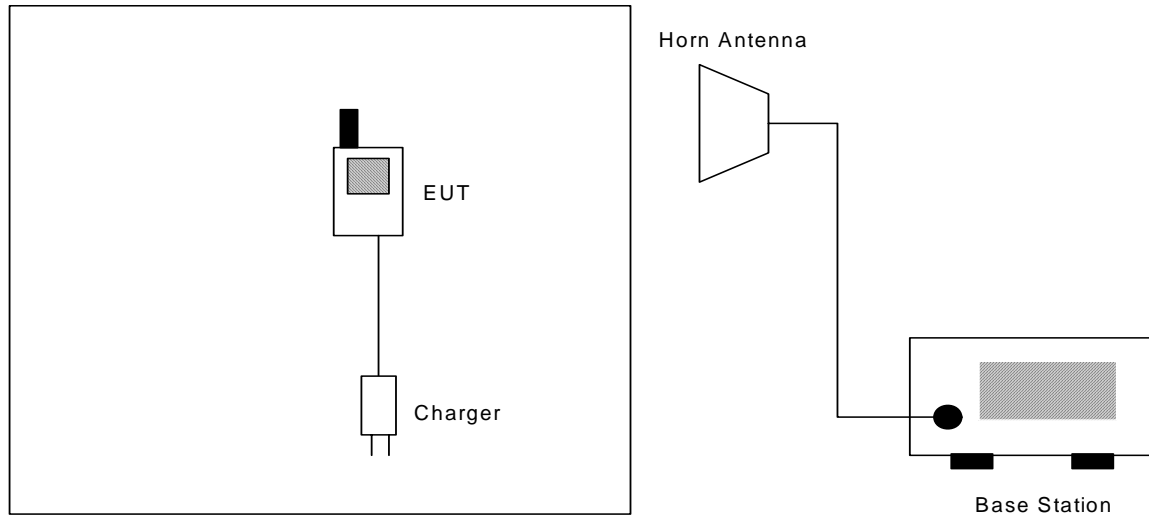

2.4 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	Serial No.
1.	Base Station	R & S	CMU200	105934
2.	Base Station	Agilent	E5515C	GB43460754



3. General Information of Test Site

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055

Test Site No : 03CH06-HY

The chamber meets the characteristics of ANSI C63.4-2003. This site is on file with the FCC. The Industry Canada file number for this site is IC 4088.

3.1 Test Voltage

120V/ 60Hz

3.2 Test in Compliance with

47 CFR Part 22H and Part 2.

3.3 Frequency Range Investigated

a. Radiation: from 30MHz to 9000MHz.

3.4 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.

**4. Test Data and Test Result****4.1 List of Measurements and Examinations**

FCC Rule	IC RULE	DESCRIPTION OF TEST	Result	Section
§2.1046	RSS-128 § 7.1	RF Output Power	Passed	4.2
§ 22.913	RSS-128 § 7.1	ERP / EIRP	Passed	4.3
§2.1049, § 22.917	RSS-128 § 7.4	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	RSS-128 § 7.4	Conducted Emission	Passed	4.5
§2.1053	RSS-128 § 7.4	Field Strength of Spurious Radiation	Passed	4.6
§2.1055, § 22.355	RSS-128 § 9	Frequency Stability vs. Temperature	Passed	4.7
§2.1055, §22.355	RSS-128 § 9	Frequency Stability vs. Voltage	Passed	4.8

4.2 RF Output Power


4.2.1 Measurement Instruments :

As described in chapter 5 of this test report.

4.2.2 Test Procedure :

1. The transmitter output was connected to power meter and base station through power divider.
2. Set EUT to maximum power through base station.
3. Select lowest, middle, and highest channels for each band.

4.2.3 Test Setup Layout :

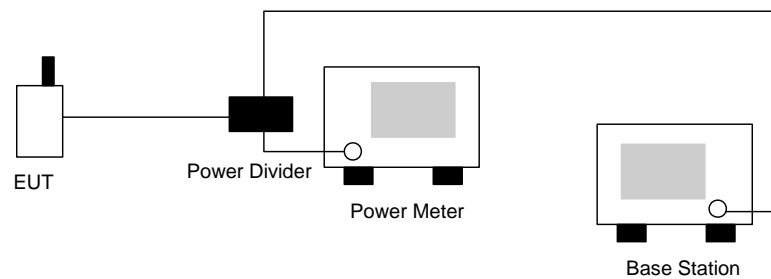

4.2.4 Test Result :

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
CDMA	1013	824.70 (Low)	25.00	0.316
	384	836.52 (Mid)	25.10	0.324
	777	848.31 (High)	24.90	0.309

4.3 ERP / EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-A.


4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

4.3.2 Test Procedure

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is varied between one meter and four meters to reach the maximum radiated power for both horizontal and vertical polarizations.
5. Taking the record of maximum ERP/EIRP.
6. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the Horn antenna is measured.
8. Repeat step 3 to step 5.

4.3.3 Test Setup Layout of ERP/EIRP

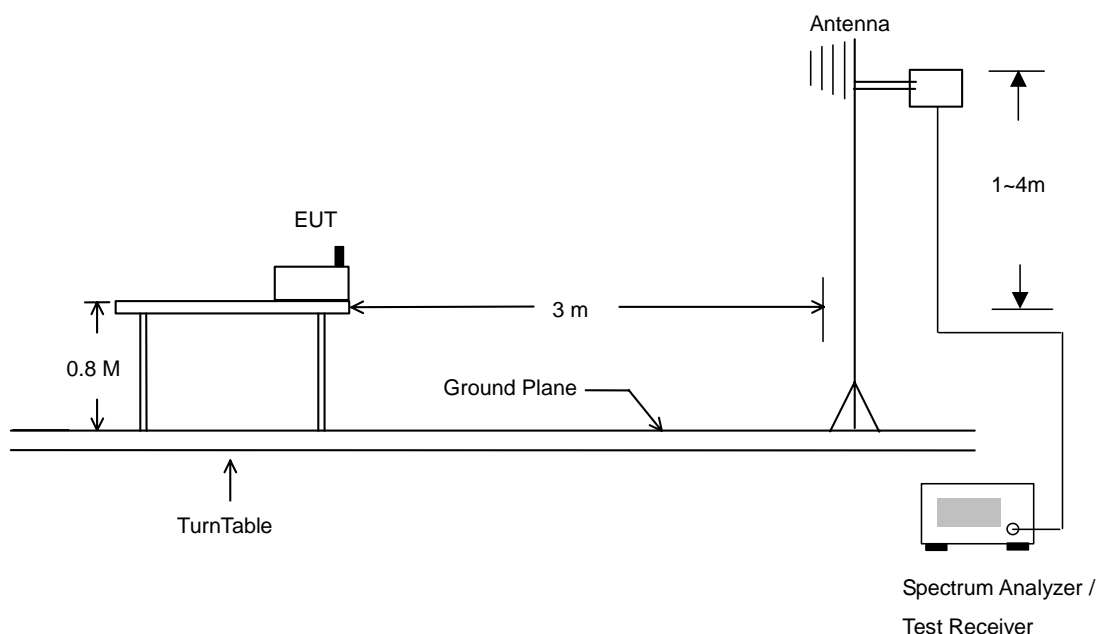



4.3.4 Test Result

CDMA Radiated Power ERP					
H Polarization			V Polarization		
Frequency (MHz)	ERP (dBm)	ERP (Watts)	Frequency (MHz)	ERP (dBm)	ERP (Watts)
824.530	12.620	0.02	824.530	22.950	0.20
836.450	10.240	0.01	836.320	21.310	0.14
848.220	12.430	0.02	848.200	23.340	0.22

4.4 Occupied Bandwidth and Band Edge Measurement


4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

4.4.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers were measured.
3. The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly $BW/10$.


4.4.3 Test Setup Layout

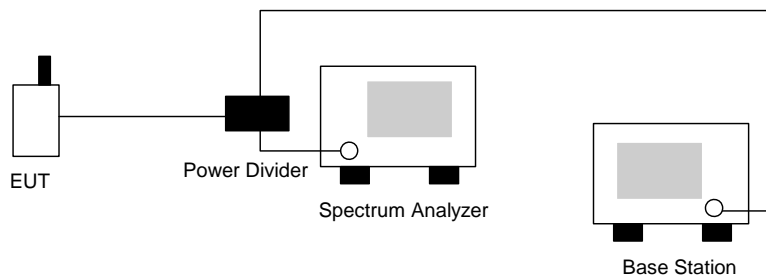



4.4.4 Test Result


- Test Mode : CDMA CH1013 Lower Band Edge
- Power State : High

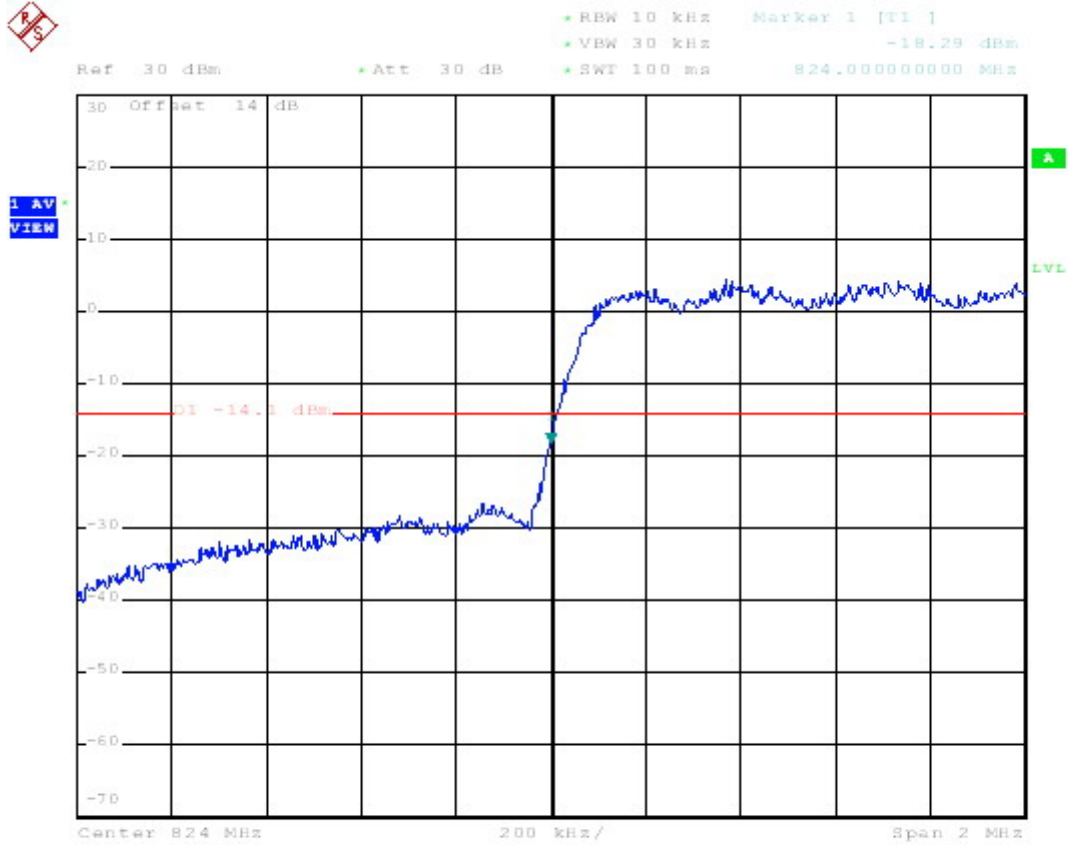

Date: 4.MAY.2005 02:32:17




- Test Mode : CDMA CH383 99% Occupied Bandwidth
- Power State : Low

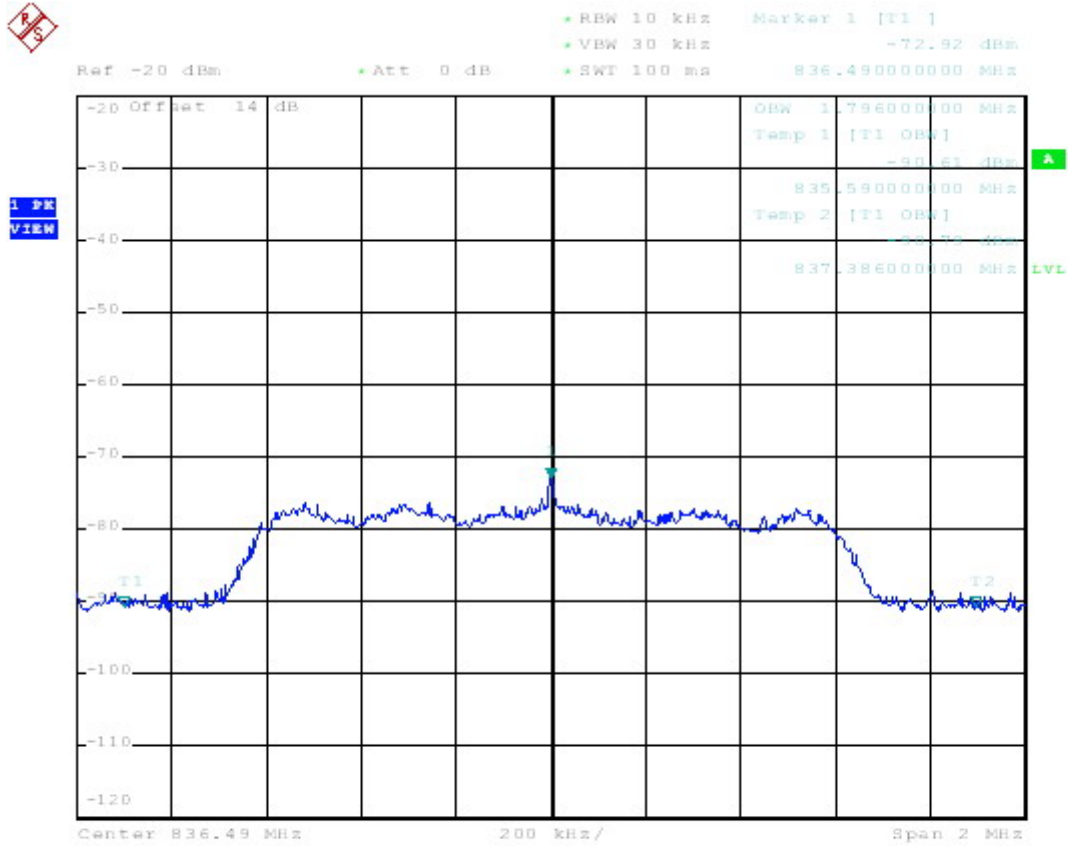

Date: 4.MAY.2005 02:39:10




- Test Mode : CDMA CH383 99% Occupied Bandwidth
- Power State : High

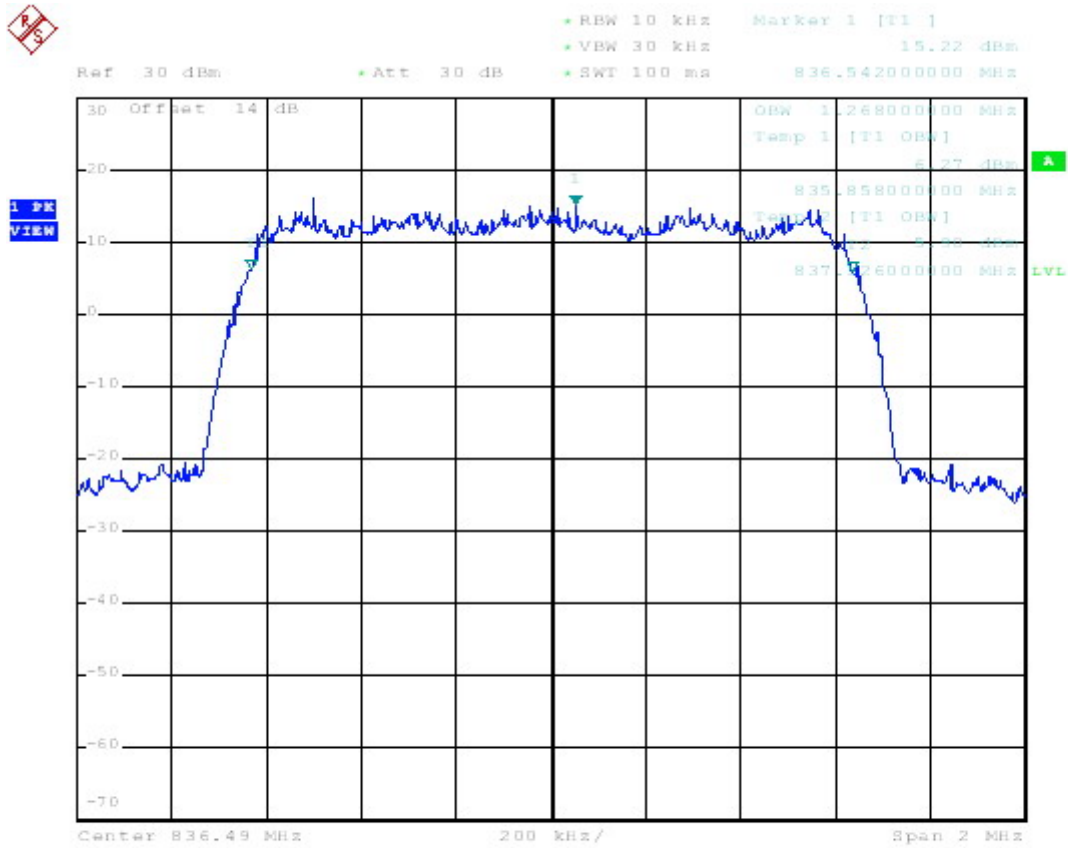

Date: 4.MAY.2005 02:40:01



- Test Mode : CDMA CH777 Higher Band Edge
- Power State : High

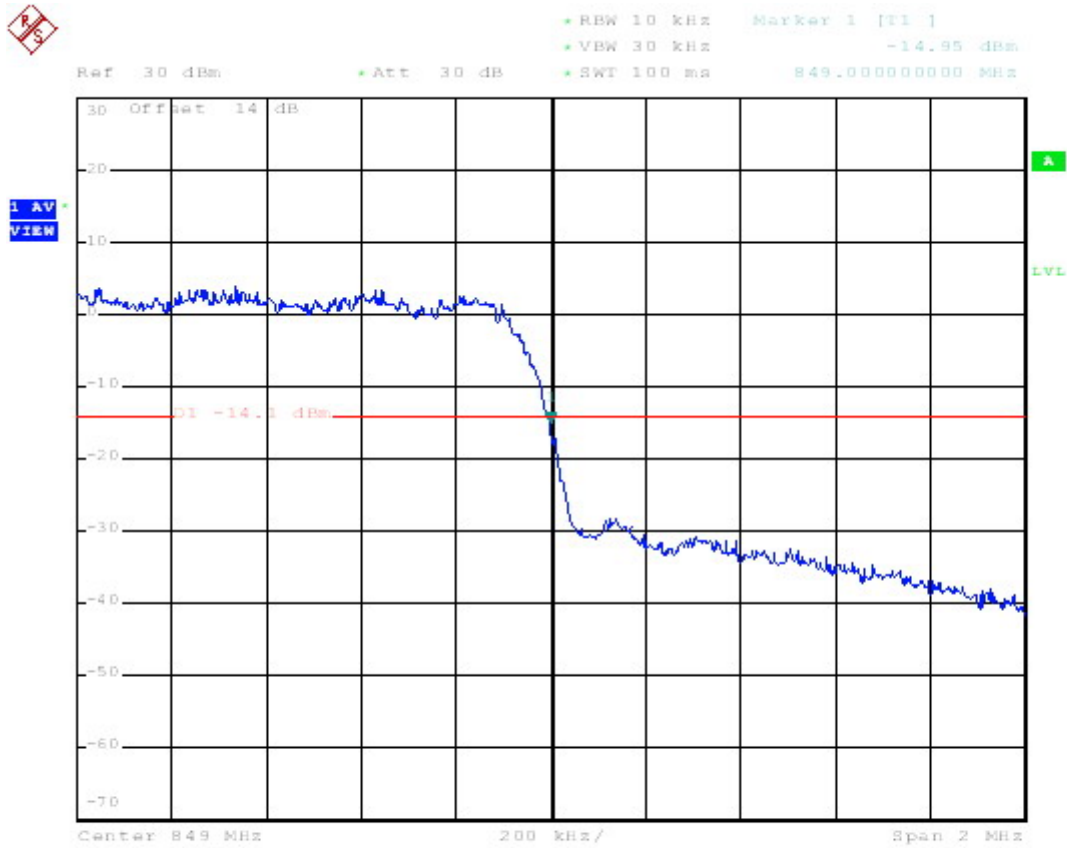

Date: 4.MAY.2005 02:33:18

4.5 Conducted Emission


4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

4.5.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


4.5.3 Test Setup Layout

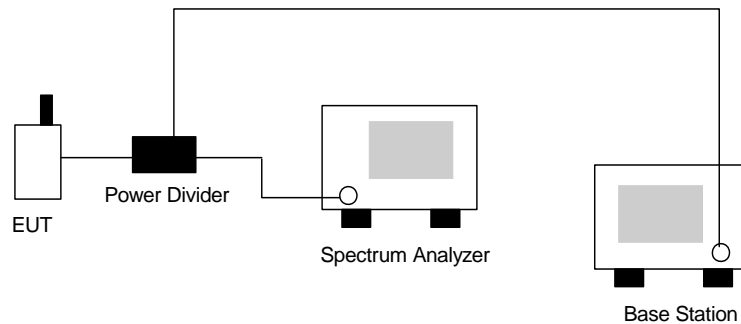



4.5.4 Test Result


- Test Mode : CDMA CH384
- Frequency Range : 30M-1G

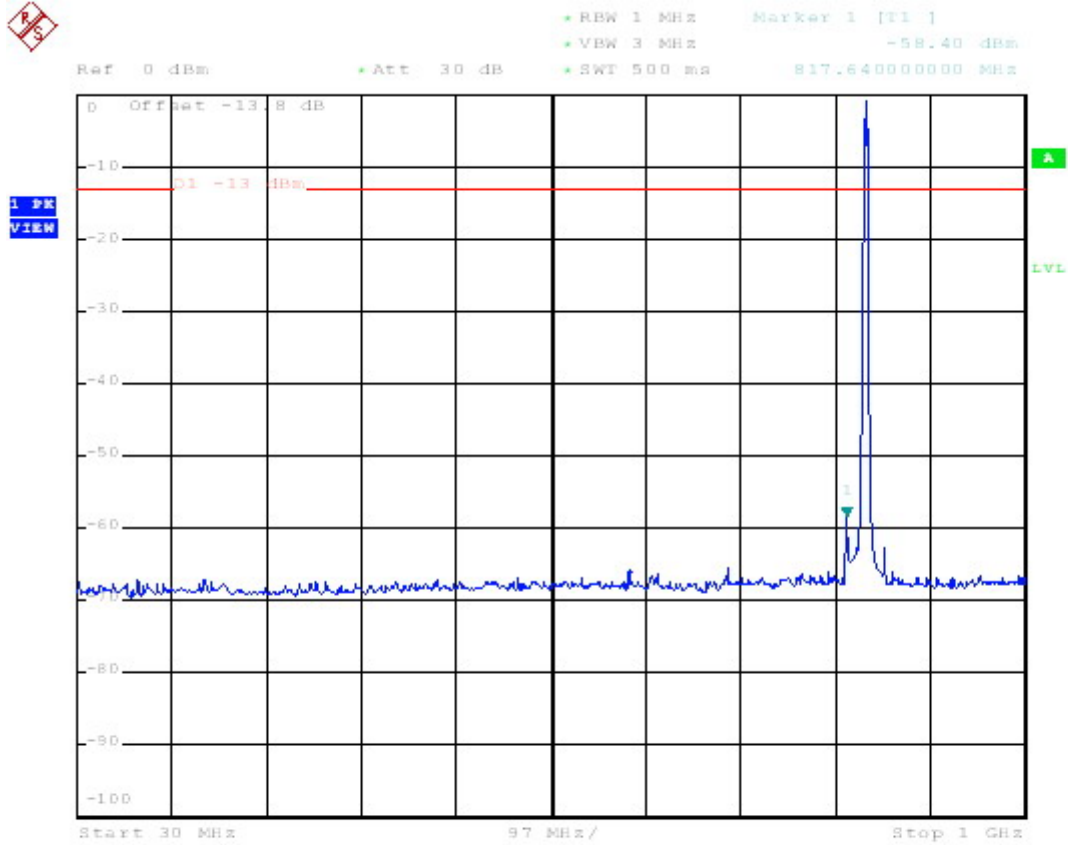

Date: 4.MAY.2005 03:03:13




- Test Mode : CDMA CH384
- Frequency Range : 1G-3G

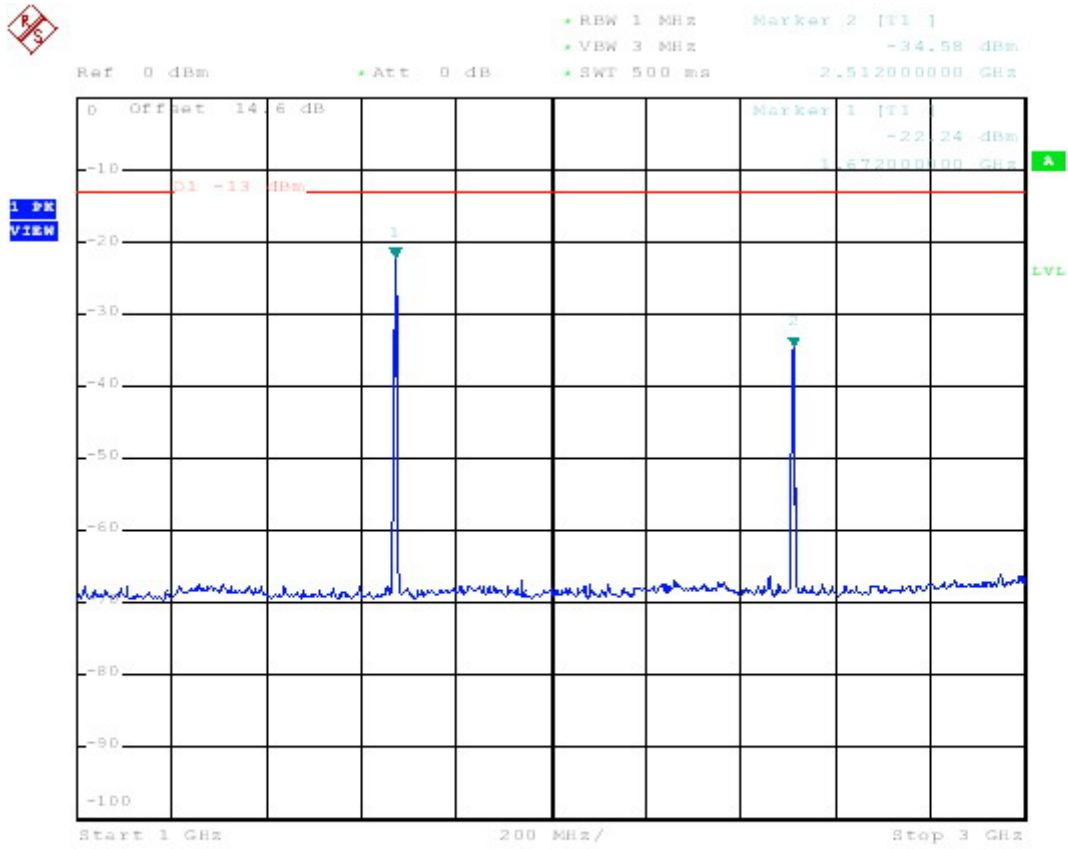

Date: 4.MAY.2005 03:10:00




- Test Mode : CDMA CH384
- Frequency Range : 3G-7G

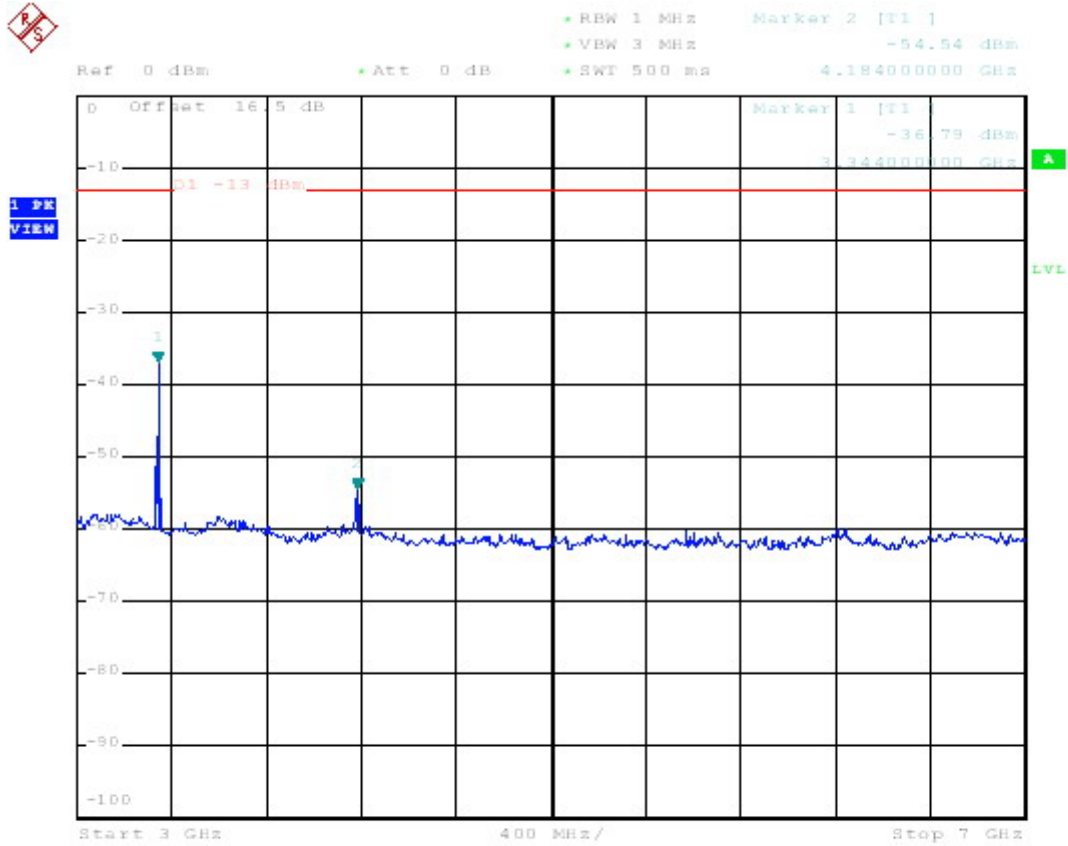

Date: 4.MAY.2005 03:11:57



- Test Mode : CDMA CH384
- Frequency Range : 7G-9G

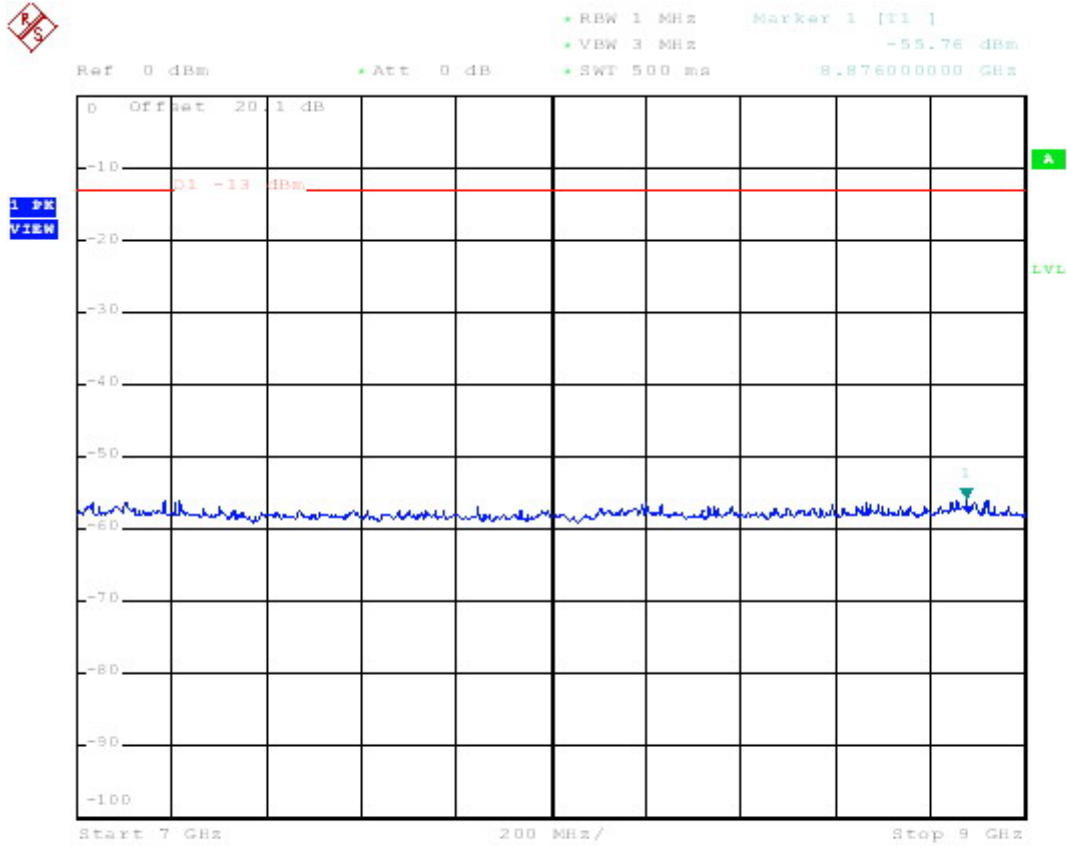

Date: 4.MAY.2005 03:14:06



4.6 Field Strength of Spurious Radiation

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-A.

4.6.1 Measurement Instruments

As described in chapter 5 of this test report.

4.6.2 Test Procedure

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the recored of output power at antenna port.
9. Repeat step 7 to step 8 for another polariztion.
10. Emission level (dBm) = output power + substituion Gain.

4.6.3 Test Setup Layout

As the setup in section 4.3.3.



4.6.4 Test Result

- Test Mode : CDMA CH 384

CDMA Radiated Spurious ERP							
H Polarization				V Polarization			
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)
30.000	-74.30	-13	-61.30	817.300	-59.14	-13	-46.14
817.300	-65.73	-13	-52.73	836.900	-56.570	-13	-43.57
855.800	-70.14	-13	-57.14	855.800	-63.900	-13	-50.90
1738.000	-54.80	-13	-41.80	1674.000	-58.840	-13	-45.84
				7568.000	-49.080	-13	-36.08



4.6.5 Test Data

Test Mode: CDMA CH 384

Horizontal Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB	dB	dB		cm	deg
1	30.00	-72.15	-59.15	-13.00	-72.51	0.36	0.00	0.00	Peak	---	---

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB	dB	dB		cm	deg
1	817.30	-63.58	-50.58	-13.00	-62.05	-1.52	0.00	0.00	Peak	---	---
2	855.80	-67.99	-54.99	-13.00	-66.83	-1.16	0.00	0.00	Peak	---	---
3	880.30	-48.03			-47.12	-0.91	0.00	0.00	Peak	---	---

Remark: #3. Pilot Channel Signal

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB	dB	dB		cm	deg
1	1738.00	-52.65	-39.65	-13.00	-52.67	0.02	0.00	0.00	Peak	---	---

Vertical Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB	dB	dB		cm	deg
1	817.30	-56.99	-43.99	-13.00	-58.20	1.21	0.00	0.00	Peak	---	---
2	836.90	-54.42	-41.42	-13.00	-55.78	1.36	0.00	0.00	Peak	---	---
3	855.80	-61.75	-48.75	-13.00	-63.26	1.51	0.00	0.00	Peak	---	---
4	880.30	-50.93			-52.64	1.71	0.00	0.00	Peak	---	---

Remark: #3. Pilot Channel Signal

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB	dB	dB		cm	deg
1	1674.00	-56.69	-43.69	-13.00	-56.21	-0.48	0.00	0.00	Peak	---	---

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Ant Pos	Table Pos
	MHz	dBm	dB	dBm	dBm	dB	dB	dB		cm	deg
1 @	7568.00	-46.93	-33.93	-13.00	-60.94	14.00	0.00	0.00	Peak	---	---

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was note within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change ws noted within one minute.
4. The temperature tests were performed for the worst case.
5. Test data was recorded.

4.7.3 Test Setup Layout

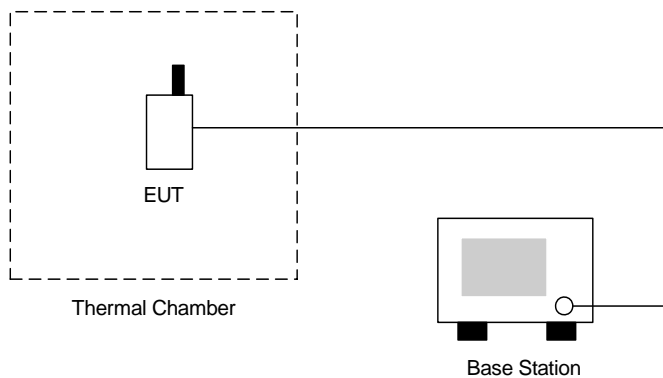

4.7.4 Test Result

- Test Mode : CDMA CH384

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-21.59	-0.01	2.5	Passed
-20	16.43	0.01		
-10	-19.6	-0.01		
0	-15.92	-0.01		
10	53.38	0.03		
20	-14.98	-0.01		
30	16.69	0.01		
40	-15.46	-0.01		
50	18.86	0.01		

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

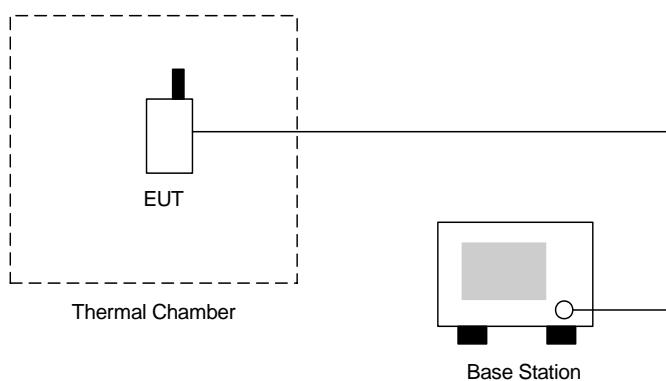

4.8.4 Test Result

- Test Mode : CDMA CH384

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	-14.98	-0.01	2.5	Passed
BEP	-25.94	-0.01		
4.3	16.94	0.01		

Remark:

1. Normal Voltage=3.7V
2. Battery End Point (BEP)=3.1V



5 List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Jul. 27, 2004	Jul. 26, 2005	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul,09,2004	Jul, 10,2005	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 22, 2004	Nov. 21, 2005	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Feb. 22, 2005	Feb. 22, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jun. 22, 2004	Jun. 22, 2005	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	May 20, 2004	May 20, 2005	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jun. 24, 2004	Jun. 24, 2005	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)
Base Station Emulator	Agilent	E5515C	GB43460754	Qual-band	Jan. 12, 2004	Jan. 12, 2006	Base Station
Radio Communication Tester	R&S	CMU200	105934	Qual-band	Aug. 24, 2004	Aug. 24, 2005	Base Station



6 Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	4.72				

END OF TEST REPORT