

Test Laboratory: Compliance Certification Services
File Name: [RC1 - SO3 8k Enhanced Low - Ch 384.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.665 dB

BWC Factor = 10.8 dB

Location: -1.4, 0.4, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 40.2241 dB

BWC Factor = 0.00842123 dB

Location: 3.3, 0.4, 363.7 mm

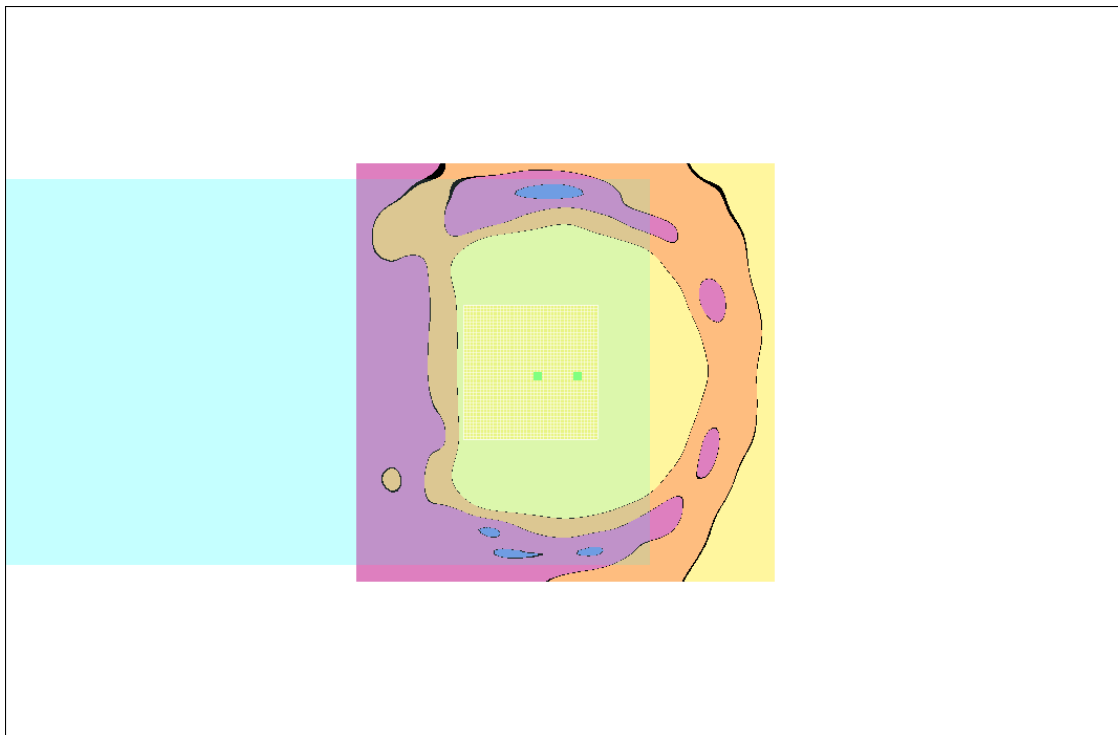

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC2 - SO17 13k Low - Ch 1013.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 39.1423 dB

BWC Factor = 10.8 dB

Location: -0.2, -0.2, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 36.4229 dB

BWC Factor = 0.00833445 dB

Location: -3.7, -3.3, 363.7 mm

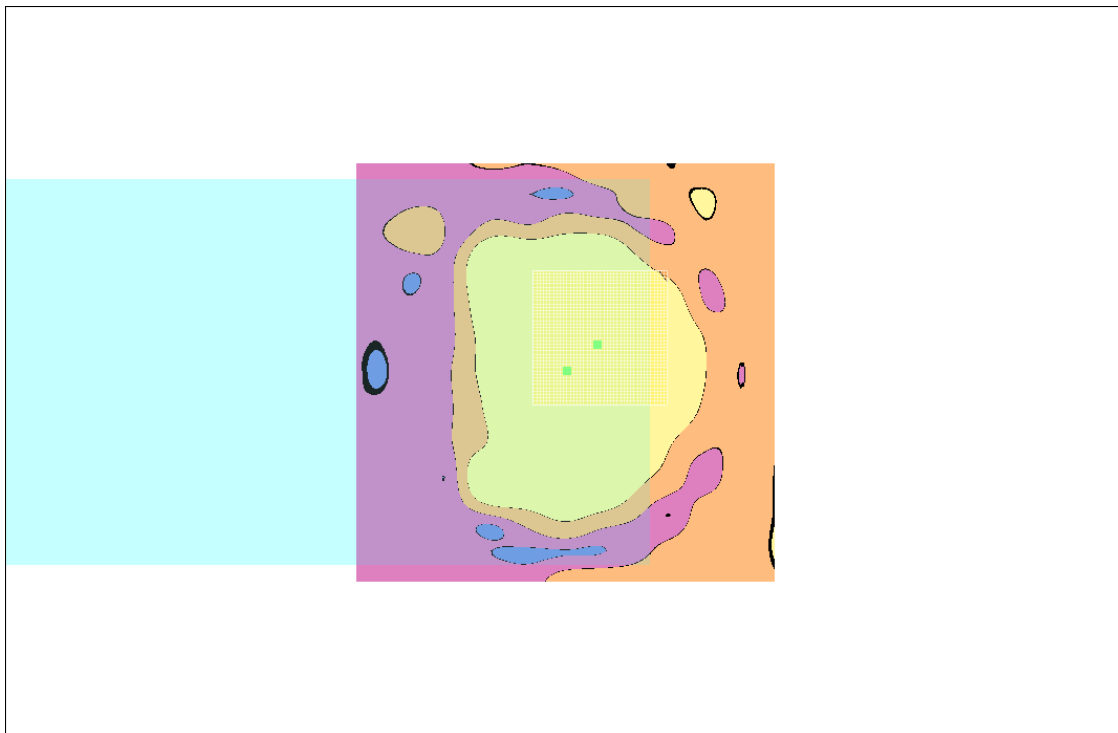

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC2 - SO17 13k Low - Ch 384.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 36.2986 dB

BWC Factor = 10.8 dB

Location: -0.2, 3.2, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 34.6367 dB

BWC Factor = 0.00859478 dB

Location: -3.7, 0.4, 363.7 mm

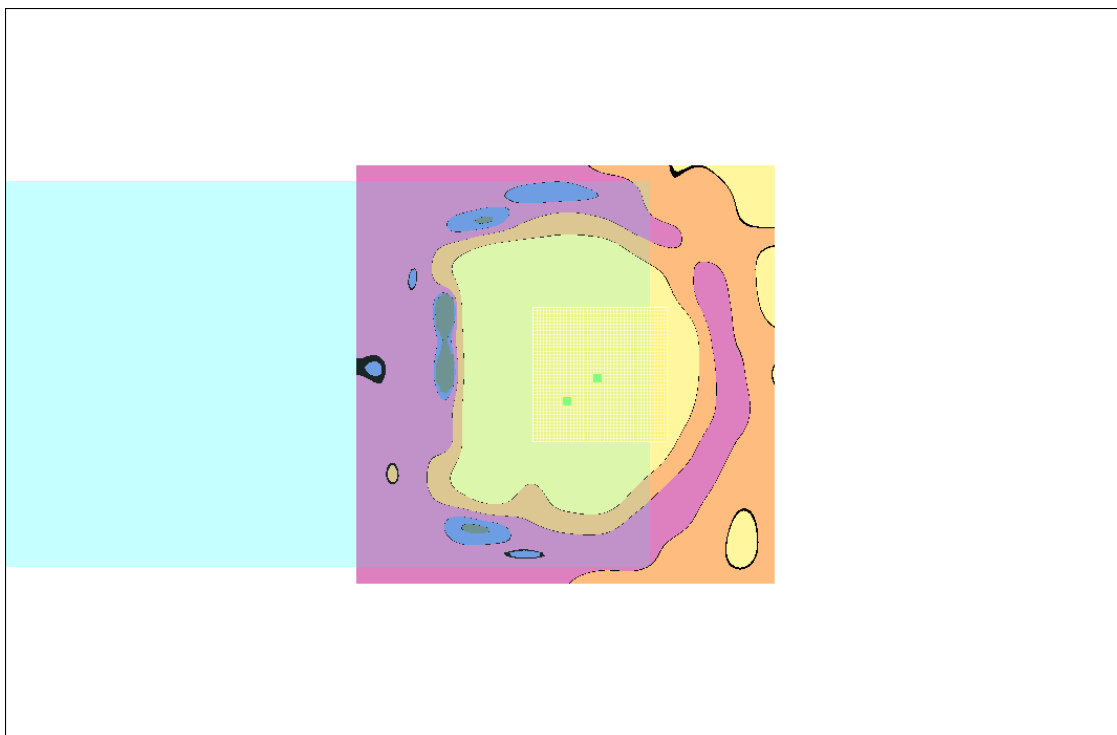

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC2 - SO17 13k Low - Ch 777.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 35.5091 dB

BWC Factor = 10.8 dB

Location: 3.4, 4.2, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.6654 dB

BWC Factor = 0.00842123 dB

Location: 3.8, 2.9, 363.7 mm

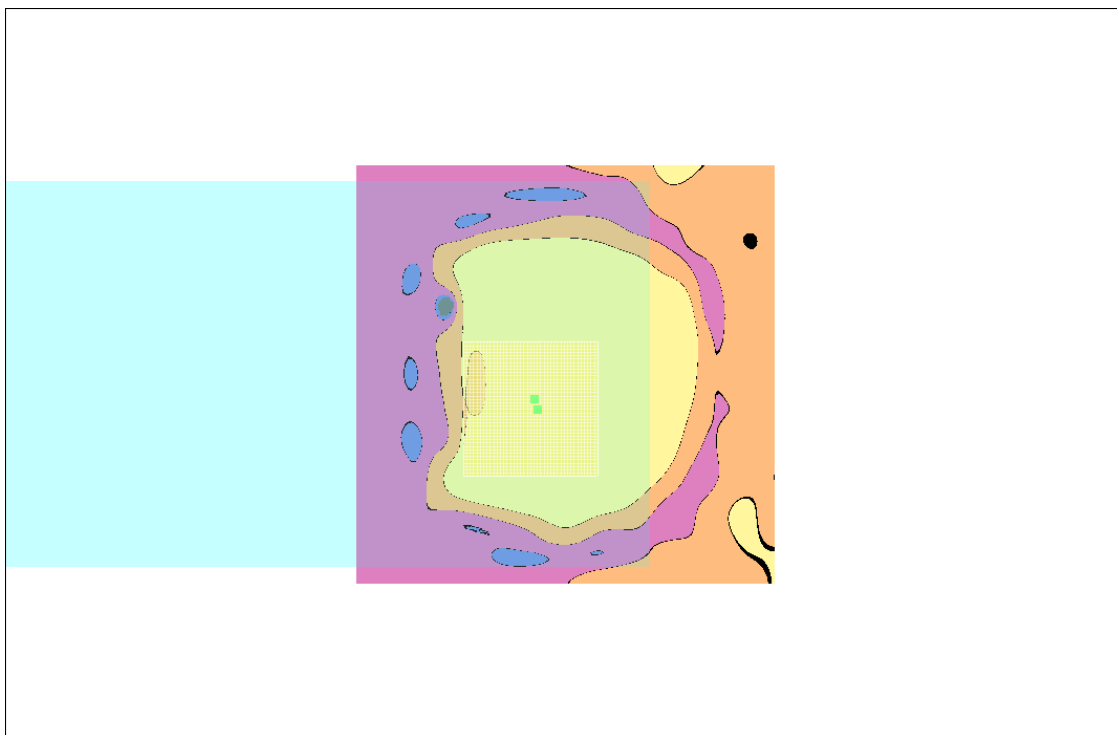

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC3 - SO3 8k Enhanced Low - Ch 384.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 47.0508 dB

BWC Factor = 10.8 dB

Location: -4.2, 4.2, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 48.6462 dB

BWC Factor = 0.00833445 dB

Location: -4.2, 4.2, 363.7 mm

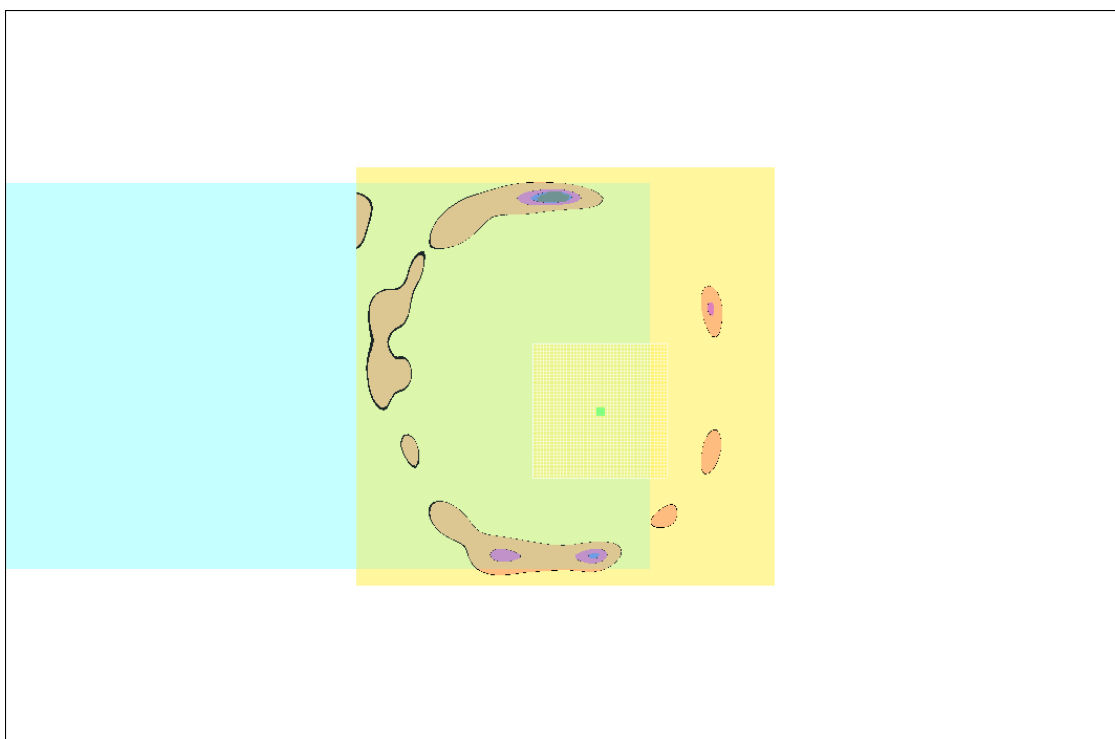

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC43 - SO3 8k Enhanced Low - Ch 384.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 45.285 dB

BWC Factor = 10.8 dB

Location: -4.2, 3.8, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 46.5675 dB

BWC Factor = 0.00868155 dB

Location: -4.2, 3.7, 363.7 mm

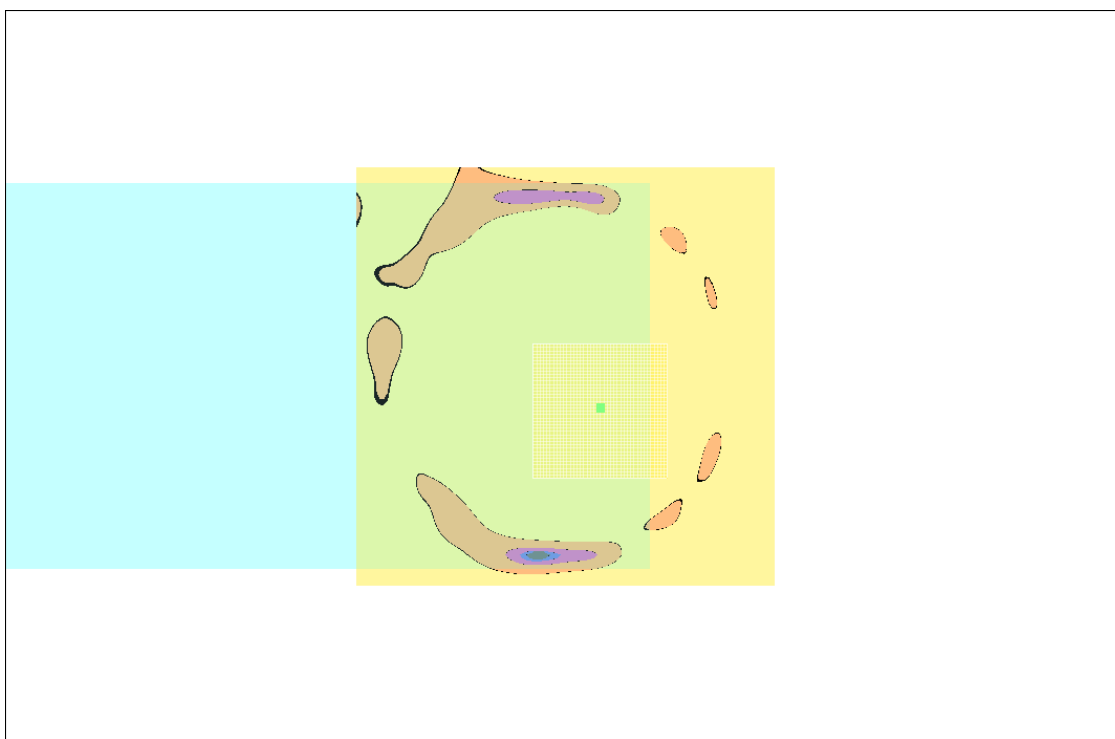

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC54 - SO17 13k Low - Ch 384.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 39.4706 dB

BWC Factor = 10.8 dB

Location: -7, -0.3, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 40.9444 dB

BWC Factor = 0.00833445 dB

Location: -4.2, -7.5, 363.7 mm

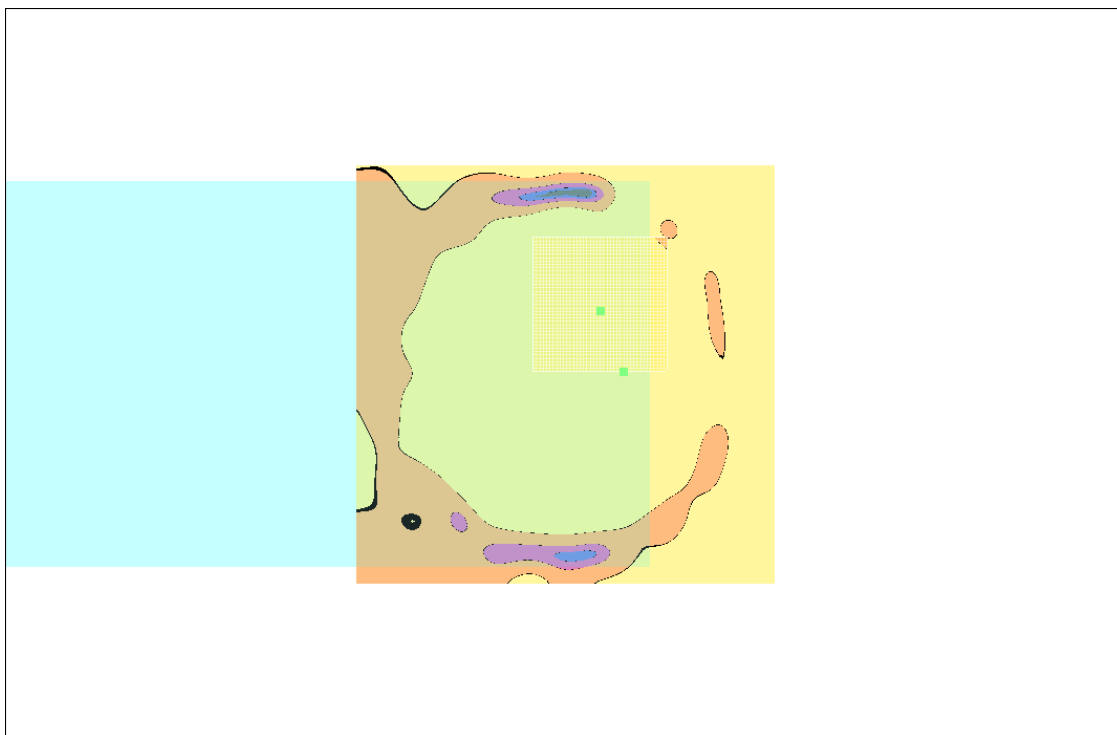

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC1 - SO3 8k Enhanced Low - Ch 600.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.3956 dB

BWC Factor = 10.8 dB

Location: 0.2, 4, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.3188 dB

BWC Factor = 0.0093757 dB

Location: 2.5, 0.8, 363.7 mm

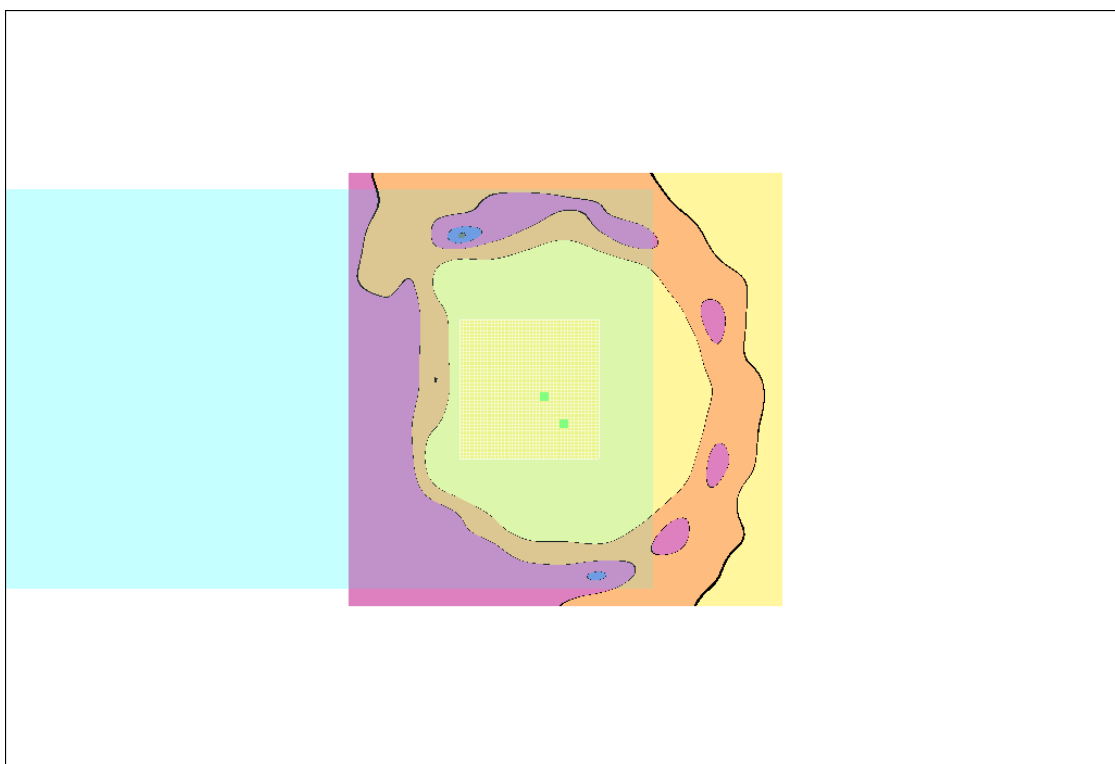

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC2 - SO17 13 Low - Ch 25.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 35.3516 dB

BWC Factor = 10.8 dB

Location: 0.2, -2, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 36.9739 dB

BWC Factor = 0.00868155 dB

Location: -3.7, -1.3, 363.7 mm

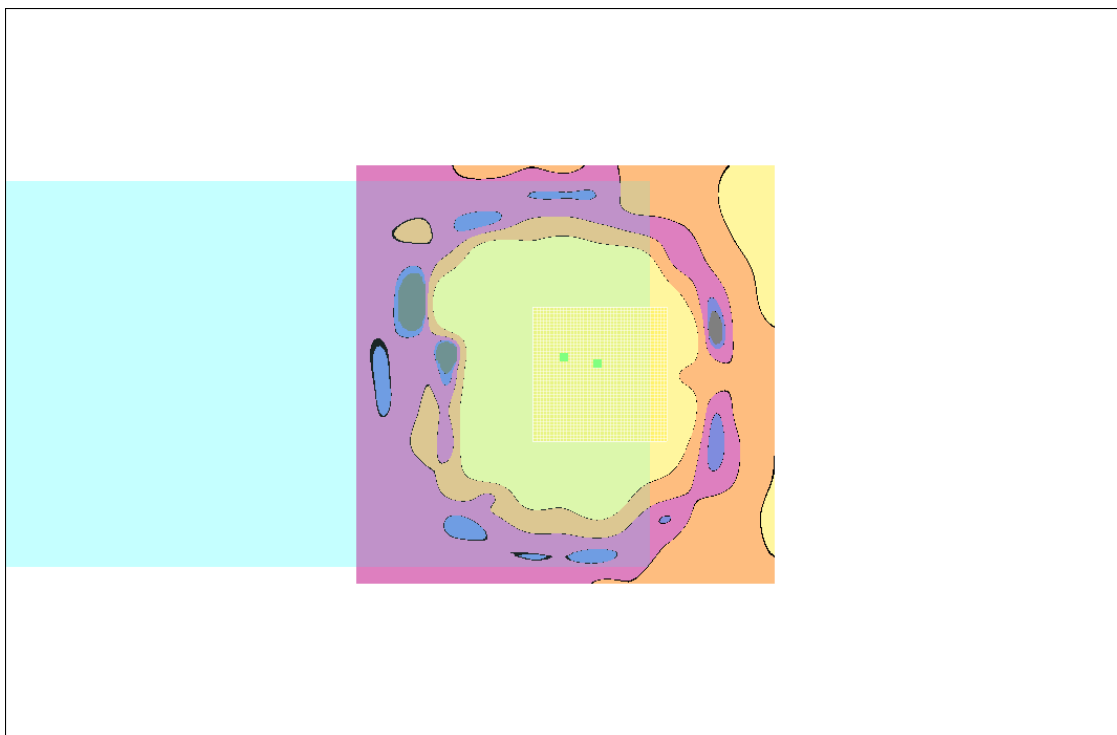

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC2 - SO17 13 Low - Ch 600.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 36.3247 dB

BWC Factor = 10.8 dB

Location: 7.4, 3.4, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 38.8187 dB

BWC Factor = 0.00564399 dB

Location: 4.6, 2.9, 363.7 mm

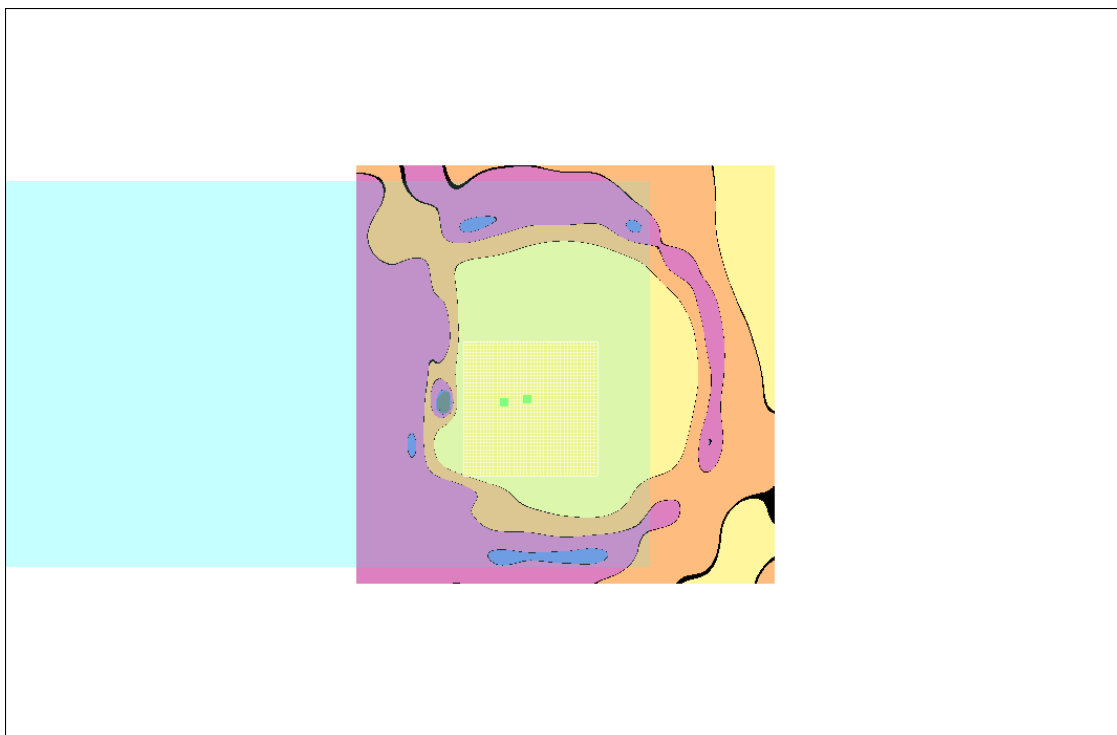

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC2 - SO17 13 Low - Ch 1175.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 37.7275 dB

BWC Factor = 10.7 dB

Location: -2.6, 0.4, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 36.4719 dB

BWC Factor = -0.0312036 dB

Location: -3.7, 1.2, 363.7 mm

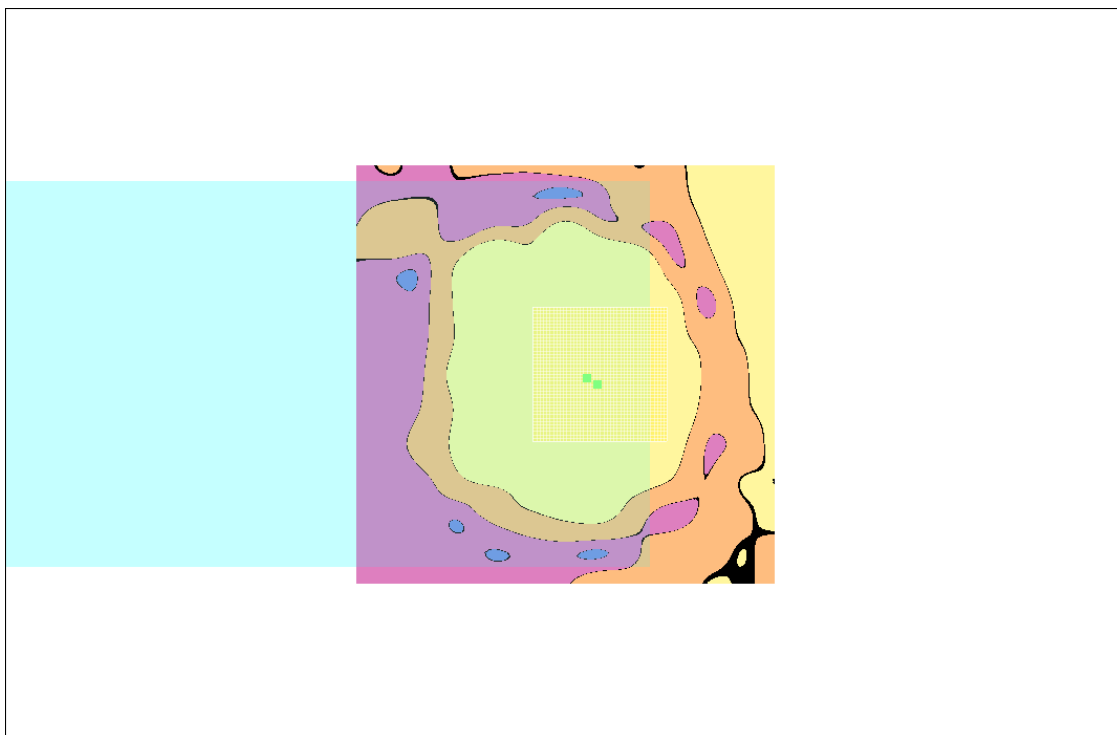

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC3 - SO3 8k Enhanced Low - Ch 600.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.5899 dB

BWC Factor = 10.8 dB

Location: -4.2, 2.6, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 46.172 dB

BWC Factor = 0.00842123 dB

Location: -4.2, 4.6, 363.7 mm

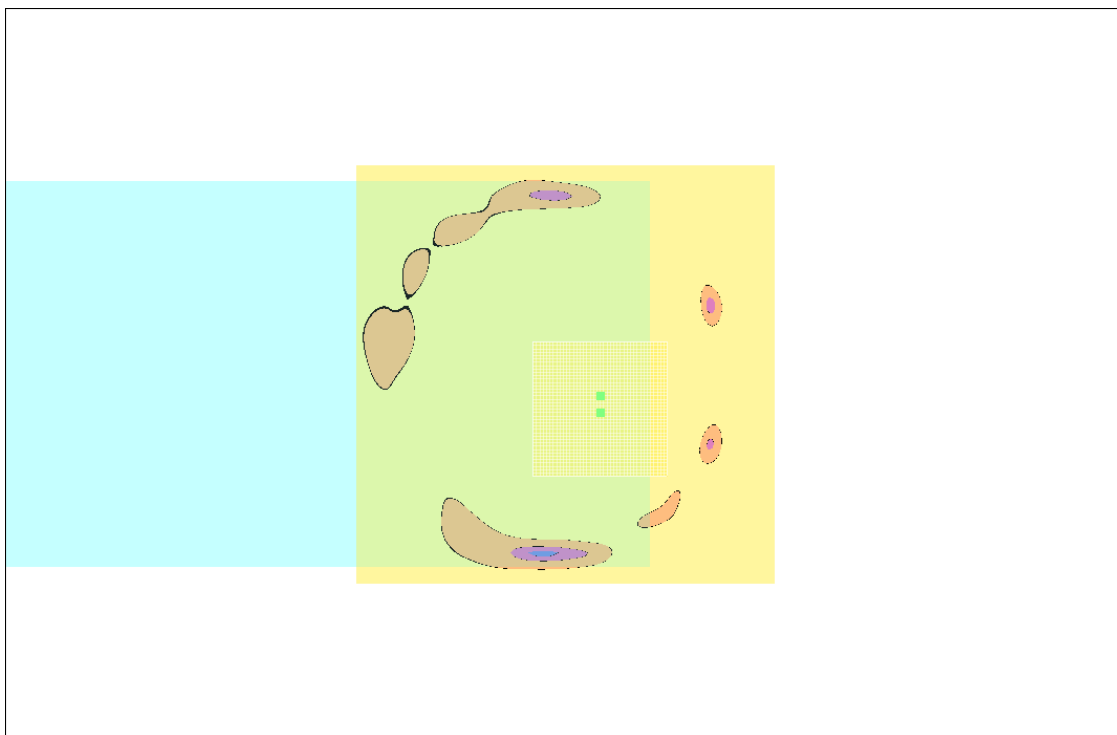

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC43 - SO3 8k Enhanced Low - Ch 600.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 44.9299 dB

BWC Factor = 10.8 dB

Location: -3, 4.2, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 48.6613 dB

BWC Factor = 0.00876832 dB

Location: -4.2, 4.2, 363.7 mm

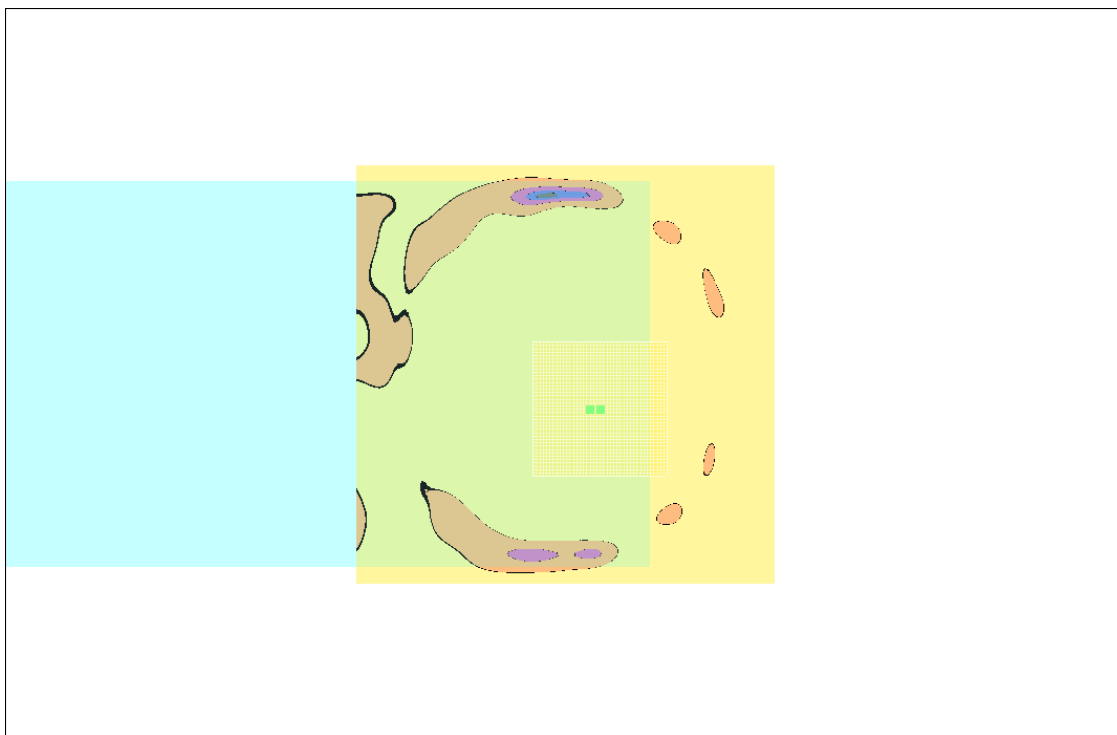

0 dB = 1.00

Test Laboratory: Compliance Certification Services
File Name: [RC54 - SO17 13 Low - Ch 600.da4](#)

DUT: Keyocera; Type: cellular Phone; Serial: N/A
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1012; ; Calibrated: 4/18/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Scans/z (axial) 300-3k response 16 x 16/ABM SNR Category(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.9498 dB

BWC Factor = 10.8 dB

Location: -0.2, 0.6, 363.7 mm

Scans/z (axial) medium 4.2mm 50 x 50/ABM SNR Category(x,y,z) (121x121x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.6818 dB

BWC Factor = 0.00833445 dB

Location: -4.2, 4.2, 363.7 mm

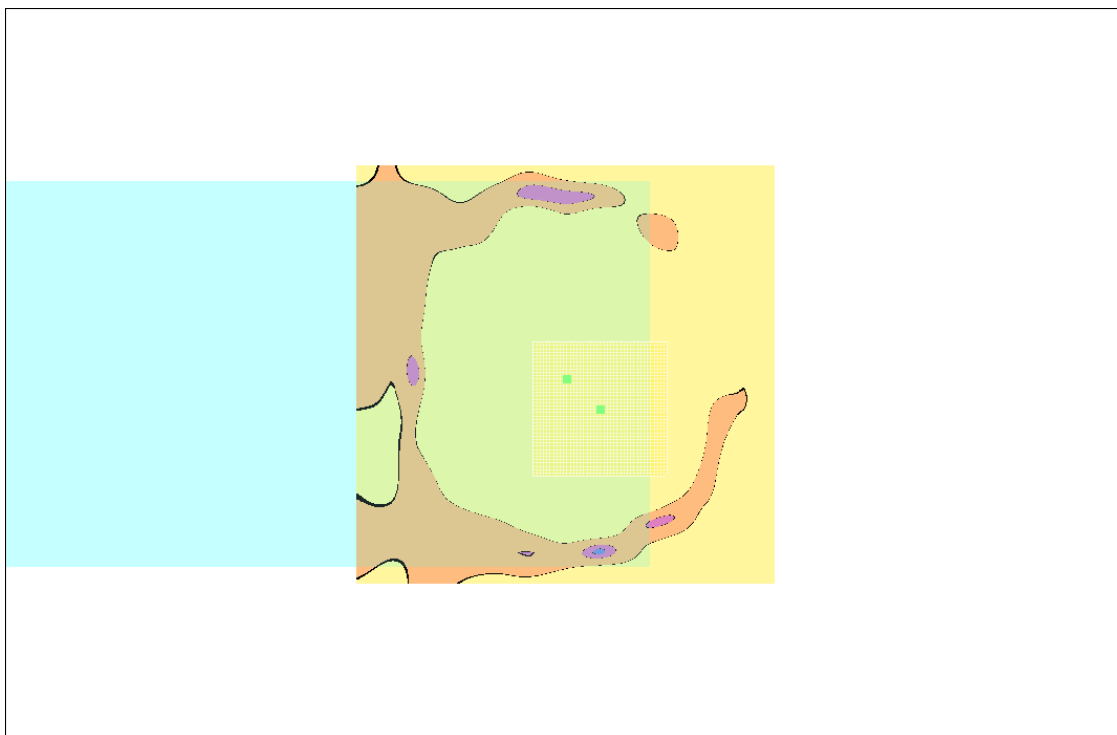

0 dB = 1.00