

Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

**Validation E Field Probe SN2341, Dipole SN1020, 835MHz**

Date: 04/12/2011

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341, ConvF(1, 1, 1), Calibrated: 7/12/2010  
 Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**E Scan 835 - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 167.7 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 175.6 V/m; Power Drift = -0.075 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>159.5 M4</b>	Grid 2 <b>167.7 M4</b>	Grid 3 <b>166.0 M4</b>
Grid 4 <b>88.9 M4</b>	Grid 5 <b>95.2 M4</b>	Grid 6 <b>94.5 M4</b>
Grid 7 <b>157.1 M4</b>	Grid 8 <b>166.7 M4</b>	Grid 9 <b>163.8 M4</b>



Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

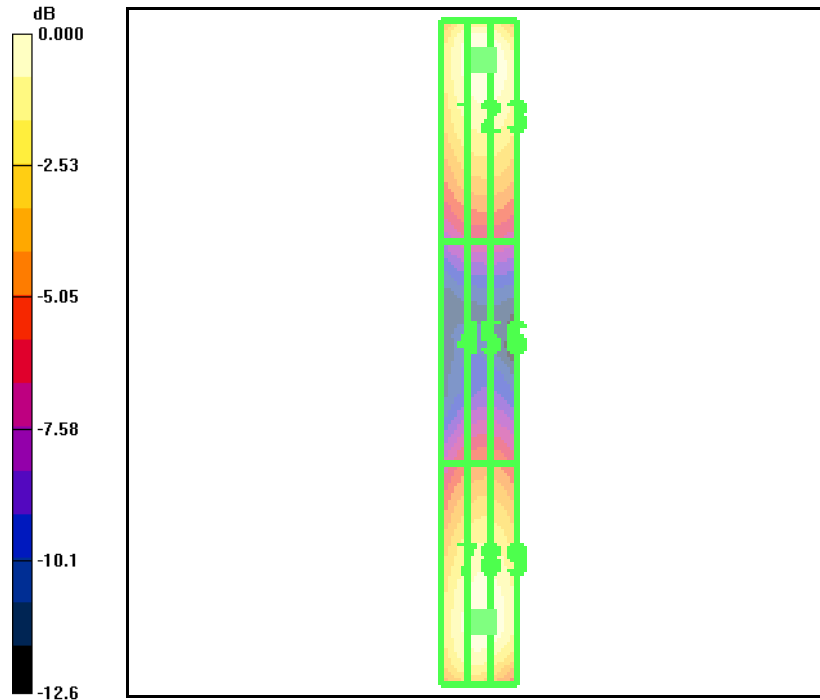

Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

**Validation H Field Probe SN6029, Dipole SN1020, 835MHz**

Date: 04/12/2011

Communication System: CW, Frequency: 835 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: H3DV5 - SN6029, , Calibrated: 7/16/2010  
 Sensor-Surface: (Fix Surface),  
 Electronics: DAE4 Sn527, Calibrated: 7/8/2010  
 Measurement SW: DASY4, V4.7 Build 80  
 Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing**

**Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.478 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.533 A/m; Power Drift = 0.069 dB


**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.442 M4</b>	Grid 2 <b>0.458 M4</b>	Grid 3 <b>0.440 M4</b>
Grid 4 <b>0.458 M4</b>	Grid 5 <b>0.478 M4</b>	Grid 6 <b>0.458 M4</b>
Grid 7 <b>0.449 M4</b>	Grid 8 <b>0.470 M4</b>	Grid 9 <b>0.448 M4</b>



Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

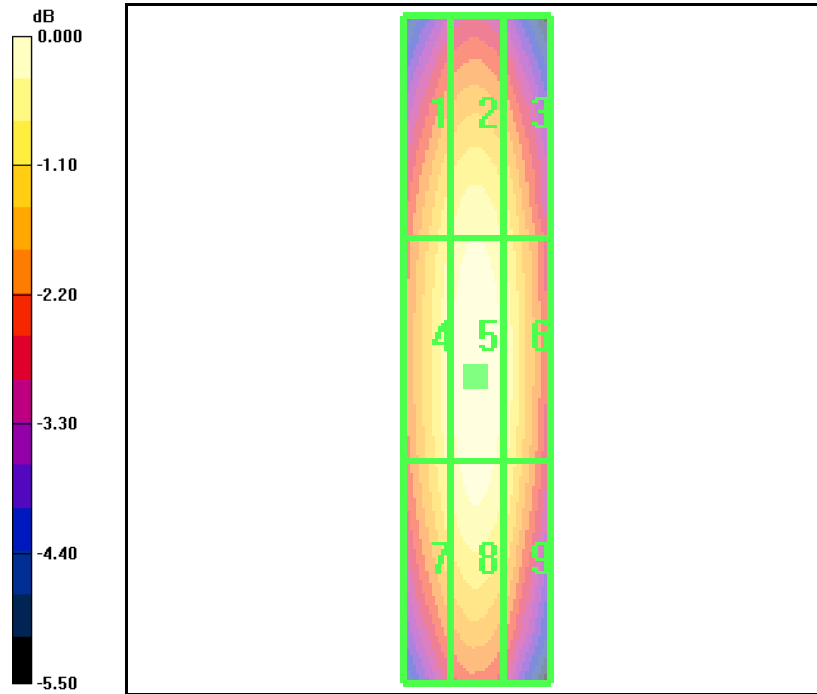

0 dB = 0.478A/m

Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

**Validation E Field Probe SN2341, Dipole SN1015, 1900MHz**

Date: 04/12/2011

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: ER3DV6 - SN2341, ConvF(1, 1, 1), Calibrated: 7/12/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8 1 deg C, Liquid T = 22.0 1 deg C

**E Scan 1880 - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 141.3 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 144.4 V/m; Power Drift = -0.026 dB


**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>135.8 M2</b>	Grid 2 <b>140.6 M2</b>	Grid 3 <b>135.9 M2</b>
Grid 4 <b>87.8 M3</b>	Grid 5 <b>93.7 M3</b>	Grid 6 <b>92.0 M3</b>
Grid 7 <b>135.4 M2</b>	Grid 8 <b>141.3 M2</b>	Grid 9 <b>138.1 M2</b>



Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

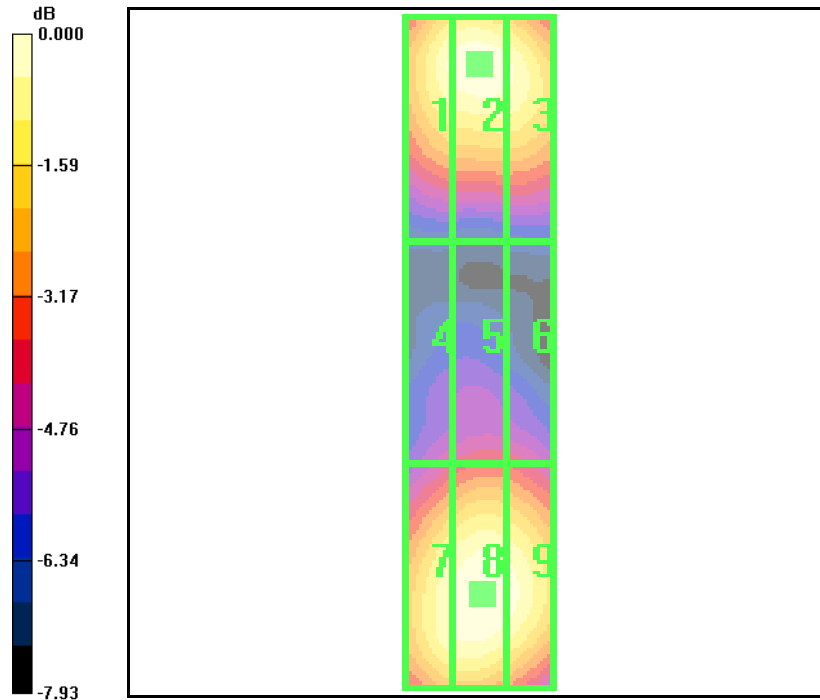

0 dB = 141.3V/m

Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

**Validation H Field Probe SN6029, Dipole SN1015, 1900MHz**

Date: 04/12/2011

Communication System: CW, Frequency: 1800 MHz, Duty Cycle: 1:1  
 Medium: Air, Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>  
 Phantom: HAC Test Arch with AMCC, Phantom section: RF Section

**DASY4 Configuration:**

Probe: H3DV5 - SN6029, , Calibrated: 7/16/2010

Sensor-Surface: (Fix Surface),

Electronics: DAE4 Sn527, Calibrated: 7/8/2010

Measurement SW: DASY4, V4.7 Build 80

Postprocessing SW: SEMCAD, V1.8 Build 186

**Temperature:**

Room T = 21.8̄ 1 deg C, Liquid T = 22.0̄ 1 deg C

**H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing**

**Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.494 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.543 A/m; Power Drift = -0.020 dB


**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
<b>0.425 M2</b>	<b>0.440 M2</b>	<b>0.420 M2</b>
Grid 4	Grid 5	Grid 6
<b>0.472 M2</b>	<b>0.494 M2</b>	<b>0.469 M2</b>
Grid 7	Grid 8	Grid 9
<b>0.441 M2</b>	<b>0.464 M2</b>	<b>0.441 M2</b>



Applicant:	Kyocera
FCC ID:	OVFS13503CB
Report #:	CT-S1350-20RFB-0411-R0

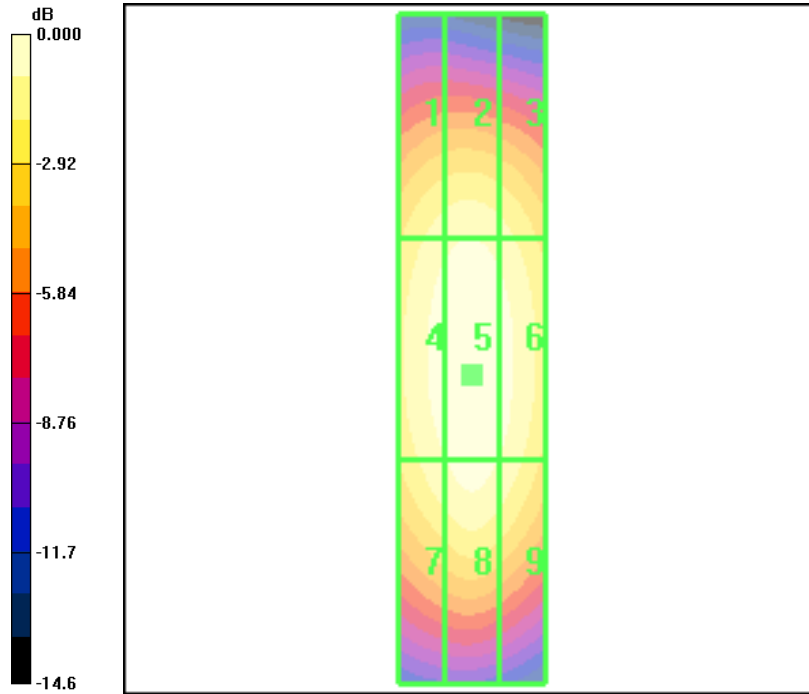

0 dB = 0.494A/m