TEST REPORT

Application No.:	SZEM2003001988CR
Applicant:	DAKANG HOLDING CO., LTD
Address of Applicant:	NO.695 kangshan road, Dipu Street, Anji county, Huzhou, Zhejiang Province, 313300 China
Manufacturer:	Dakang Holding Co., Ltd
Address of Manufacturer:	NO.695 Kangshan road, Dipu Street, Anji County, Zhejiang Province, China
Factory:	Dakang Holding Co., Ltd
Address of Factory:	NO.695 Kangshan Road, Dipu Street, Anji County, Zhejiang Province, China
Equipment Under Test (EUT):	
EUT Name:	X ROCKER/GAMING CHAIR
Model No.:	TRANS
FCC ID:	OVITRANS
Standard(s) :	47 CFR Part 15, Subpart C 15.249
Date of Receipt:	2020-03-31
Date of Test:	2020-04-01 to 2020-04-11
Date of Issue:	2020-04-14
Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu
EMC Laboratory Manager

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2020-04-14		Original

Authorized for issue by:				
				
		Leo Li /Project Engineer		
				
		Eric Fu /Reviewer		

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	**Standard**	**Method**	**Requirement**	**Result**
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Duty Cycle	47 CFR Part 15, Subpart C 15.231	ANSI C63.10:2013	47 CFR Part 15C Section 15.35 (c)	Pass
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
Restricted Band Around Fundamental Frequency	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Radiated Emissions	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 Contents

Page

1 COVER PAGE 1

2 TEST SUMMARY 3

3 CONTENTS 4

4 GENERAL INFORMATION 6

4.1 DETAILS OF E.U.T. 6
4.2 DESCRIPTION OF SUPPORT UNITS 6
4.3 MEASUREMENT UNCERTAINTY 6
4.4 TEST LOCATION 7
4.5 TEST FACILITY 7
4.6 DEVIATION FROM STANDARDS 7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS 7

5 EQUIPMENT LIST 8

6 RADIO SPECTRUM TECHNICAL REQUIREMENT 11

6.1 ANTENNA REQUIREMENT 11
6.1.1 Test Requirement: *11*
6.1.2 Conclusion *11*

7 RADIO SPECTRUM MATTER TEST RESULTS 12

7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) 12
7.1.1 E.U.T. Operation *12*
7.1.2 Measurement Procedure and Data *12*
7.2 20DB BANDWIDTH 15
7.2.1 E.U.T. Operation *15*
7.2.2 Test Setup Diagram *15*
7.2.3 Measurement Procedure and Data *15*
7.3 DUTY CYCLE 18
7.4 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A)) 19
7.4.1 E.U.T. Operation *19*
7.4.2 Test Setup Diagram *19*
7.4.3 Measurement Procedure and Data *20*
7.5 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY 22
7.5.1 E.U.T. Operation *22*
7.5.2 Test Setup Diagram *22*
7.5.3 Measurement Procedure and Data *23*
7.6 RADIATED EMISSIONS 28
7.6.1 E.U.T. Operation *29*
7.6.2 Test Setup Diagram *29*
7.6.3 Measurement Procedure and Data *29*

8 PHOTOGRAPHS 42

8.1 TEST SETUP 42

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.2 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) 42

4 General Information

4.1 Details of E.U.T.

	Power Supply:	3V DC (1.5Vx2"AAA" Size Batteries) DC 3V from adapter input AC 120V/60Hz
	Operation Frequency:	914MHz, 915MHz, 916MHz
	Modulation Type:	Pi/4 DQPSK
	Number of Channels:	3
	Channel Spacing:	1MHz
	Antenna Type:	PCB Antenna
	Antenna Gain:	0dBi

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC/DC adapter	ANSMANN	APS 1000	N/A

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	± 7.25 x 10^{-8}
2	Duty cycle	± 0.37%
3	Occupied Bandwidth	± 3%
4	Conduction emission	± 3.0dB (150kHz to 30MHz)
5	RF Radiated power	± 4.5dB (Below 1GHz)
		± 4.8dB (Above 1GHz)
6	Radiated Spurious emission test	± 4.5dB (Below 1GHz)
		± 4.8dB (Above 1GHz)
7	Temperature test	± 1℃
8	Humidity test	± 3%
9	Supply voltages	± 1.5%
10	Time	± 3%

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2019-06-13	2022-06-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2019-07-11	2020-07-10
LISN	Rohde & Schwarz	ENV216	SEM007-01	2019-09-24	2020-09-23
LISN	ETS-LINDGREN	3816/2	SEM007-02	2020-04-01	2021-03-31
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2020-03-24	2021-03-23

20dB Bandwidth					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Shielding Room	SAEMC	MSR733	SEM001-09	2019-06-13	2022-06-12
DC Power Supply	Rohde & Schwarz	NGSM 32/10	SEM011-04	2020-03-24	2021-03-23
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2019-09-24	2020-09-23
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2019-07-11	2020-07-10
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2019-09-24	2020-09-23
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2019-09-24	2020-09-23
Electric and Magnetic Field Analyzer	Narda	EHP-50F	SEM022-05	2019-11-28	2020-11-27
Electric Field Probe	WANDEL & GOLTERMANN	EMR-20	EMC0907	2019-05-21	2020-05-20
EMF Tester	Narda	ELT-400	SZE039-4	2019-07-08	2020-07-07

Duty Cycle					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Shielding Room	SAEMC	MSR733	SEM001-09	2019-06-13	2022-06-12
DC Power Supply	Rohde & Schwarz	NGSM 32/10	SEM011-04	2020-03-24	2021-03-23
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2019-09-24	2020-09-23
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2019-07-11	2020-07-10
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2019-09-24	2020-09-23
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2019-09-24	2020-09-23

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Electric and Magnetic Field Analyzer	Narda	EHP-50F	SEM022-05	2019-11-28	2020-11-27
Electric Field Probe	WANDEL & GOLTERMANN	EMR-20	EMC0907	2019-05-21	2020-05-20
EMF Tester	Narda	ELT-400	SZE039-4	2019-07-08	2020-07-07

Restricted Band Around Fundamental Frequency					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2019-07-11	2020-07-10
EXA Spectrum Analyzer	AgilentTechnologies Inc	N9010A	SEM004-12	2020-04-09	2021-04-08
Horn Antenna	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2019-09-24	2020-09-23
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2020-04-01	2021-03-31
Pre-amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2020-04-01	2021-03-31
DC Power Supply	Zhao Xin	KXN-6020D	SEM011-08	2019-09-24	2020-09-23
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21

Radiated Spurious Emissions (Below 1GHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2019-07-11	2020-07-10
EXA Spectrum Analyzer	AgilentTechnologies Inc	N9010A	SEM004-12	2020-04-09	2021-04-08
Horn Antenna	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2019-09-24	2020-09-23
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2020-04-01	2021-03-31

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Pre-amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2020-04-01	2021-03-31
DC Power Supply	Zhao Xin	KXN-6020D	SEM011-08	2019-09-24	2020-09-23
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21

Radiated Spurious Emissions (Above 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2019-07-11	2020-07-10
EXA Spectrum Analyzer	AgilentTechnologies Inc	N9010A	SEM004-12	2019-04-12	2020-04-11
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2019-09-24	2020-09-23
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2019-04-01	2020-03-31
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2019-04-01	2020-03-31
DC Power Supply	Zhao Xin	KXN-6020D	SEM011-08	2019-09-24	2020-09-23
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21

General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2019-09-26	2020-09-25
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2019-09-26	2020-09-25
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2019-09-26	2020-09-25
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2020-04-07	2021-04-06

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently

attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

Antenna location: Refer to Internal photos.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.8 °C Humidity: 55.4 % RH Atmospheric Pressure: 1015 mbar

Test mode b:TX mode_Keep the EUT in transmitting with modulation mode.(AC supply)

7.1.2 Measurement Procedure and Data

1) The mains terminal disturbance voltage test was conducted in a shielded room.

2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:b; Line:Live Line

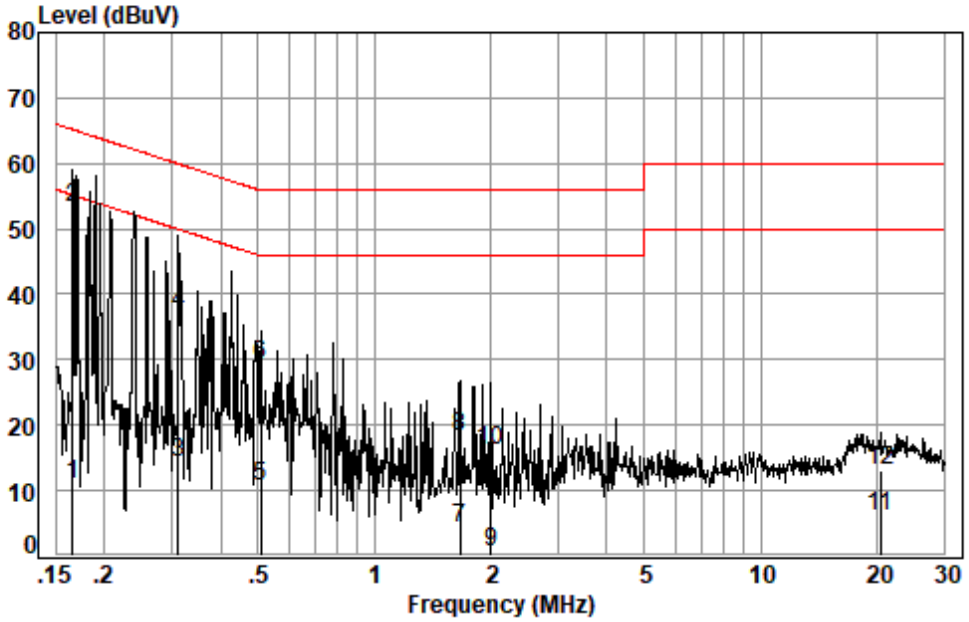

Site : Shielding Room
Condition: Line
Job No. : 01988CR
Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1659	0.01	9.59	1.42	11.02	55.16	-44.14	Average
2	0.1659	0.01	9.59	43.68	53.28	65.16	-11.88	QP
3	0.3116	0.04	9.59	4.56	14.19	49.93	-35.74	Average
4	0.3116	0.04	9.59	27.59	37.22	59.93	-22.71	QP
5	0.5074	0.06	9.59	1.07	10.72	46.00	-35.28	Average
6	0.5074	0.06	9.59	19.41	29.06	56.00	-26.94	QP
7	1.6713	0.14	9.61	-5.64	4.11	46.00	-41.89	Average
8	1.6713	0.14	9.61	8.44	18.19	56.00	-37.81	QP
9	2.0012	0.16	9.62	-9.24	0.54	46.00	-45.46	Average
10	2.0012	0.16	9.62	6.33	16.11	56.00	-39.89	QP
11	20.3773	0.24	10.64	-4.68	6.20	50.00	-43.80	Average
12	20.3773	0.24	10.64	2.32	13.20	60.00	-46.80	QP

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Mode:b; Line:Neutral Line

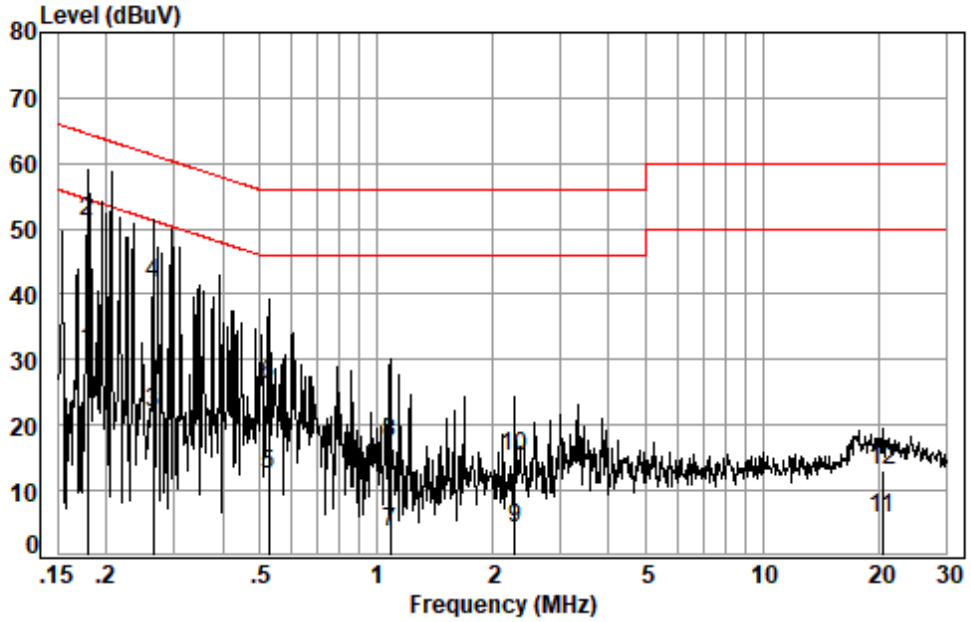

Site : Shielding Room
Condition: Neutral
Job No. : 01988CR
Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1787	0.02	9.55	21.69	31.26	54.55	-23.29	Average
2	0.1787	0.02	9.55	41.62	51.19	64.55	-13.36	QP
3	0.2644	0.03	9.54	12.29	21.86	51.29	-29.43	Average
4	0.2644	0.03	9.54	32.16	41.73	61.29	-19.56	QP
5	0.5265	0.06	9.54	2.85	12.45	46.00	-33.55	Average
6	0.5265	0.06	9.54	16.41	26.01	56.00	-29.99	QP
7	1.0881	0.10	9.55	-6.13	3.52	46.00	-42.48	Average
8	1.0881	0.10	9.55	7.78	17.43	56.00	-38.57	QP
9	2.2847	0.16	9.57	-5.34	4.39	46.00	-41.61	Average
10	2.2847	0.16	9.57	5.52	15.25	56.00	-40.75	QP
11	20.3773	0.24	10.63	-5.18	5.69	50.00	-44.31	Average
12	20.3773	0.24	10.63	2.31	13.18	60.00	-46.82	QP

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
Test Method: ANSI C63.10 (2013) Section 6.9
Limit: N/A

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 27.6 °C Humidity: 41.6 % RH Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)
b:TX mode_Keep the EUT in transmitting with modulation mode.(AC supply)

The worst case for final test: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)

7.2.2 Test Setup Diagram

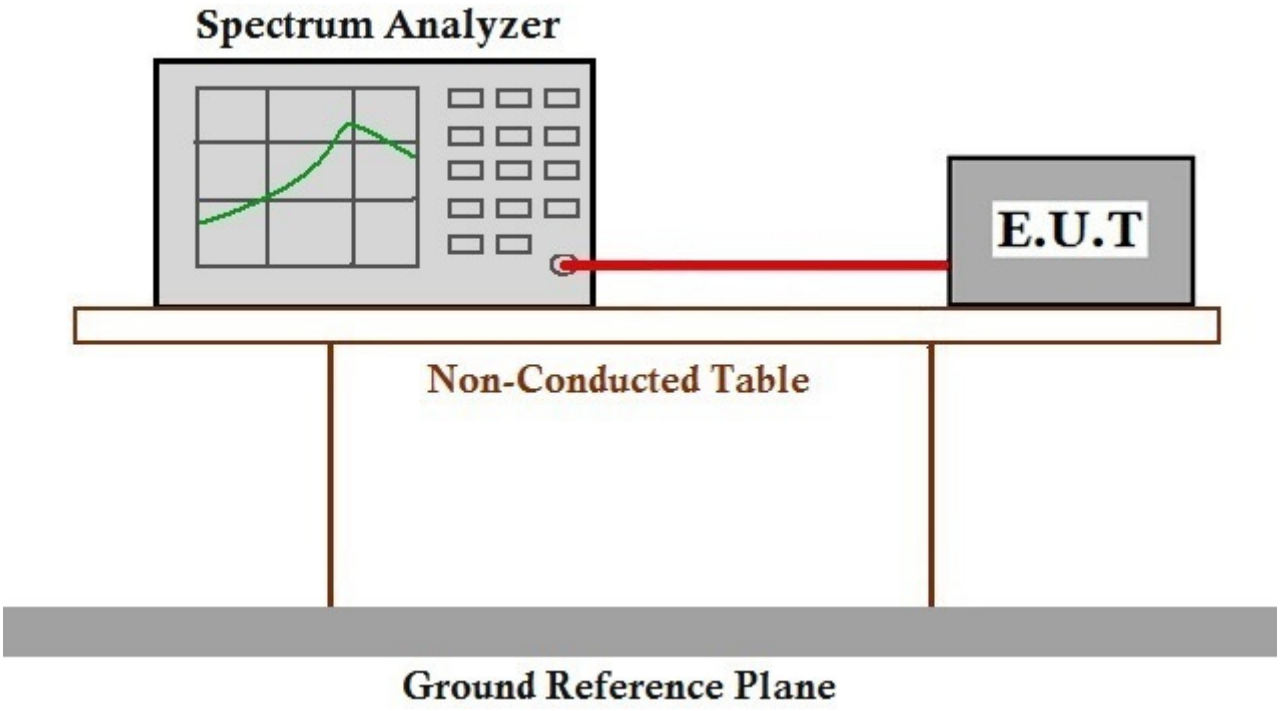

7.2.3 Measurement Procedure and Data

Frequency(MHz)	20dB bandwidth (KHz)	Limit (KHz)	Results
914	276.92	N/A	Pass
915	279.81	N/A	
916	278.85	N/A	

Mode:a; Channel:Low

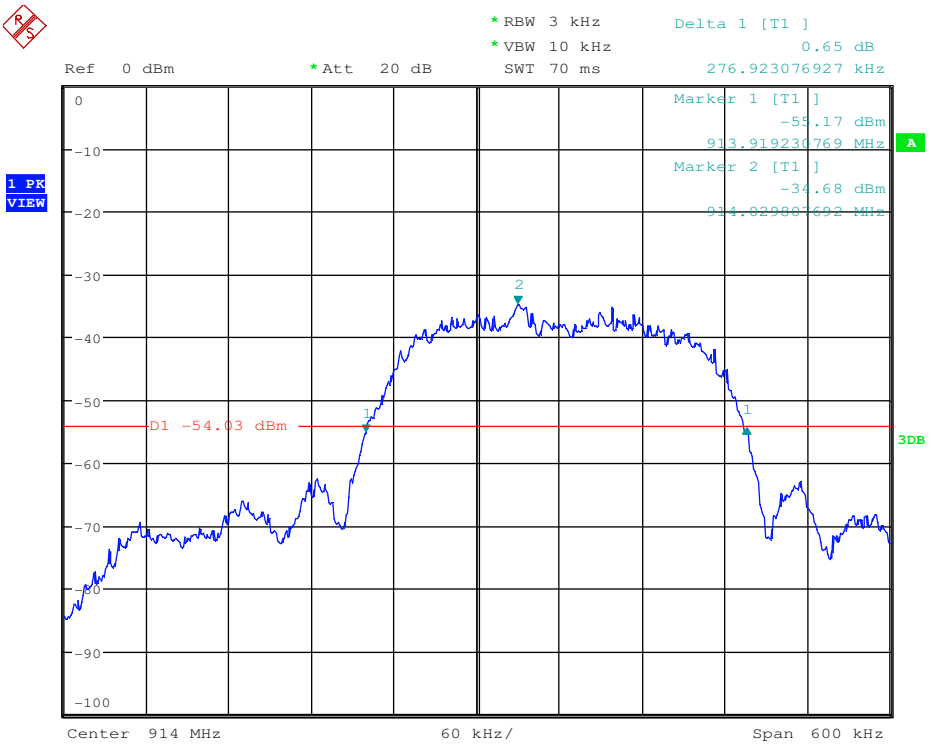

Mode:a; Channel:middle

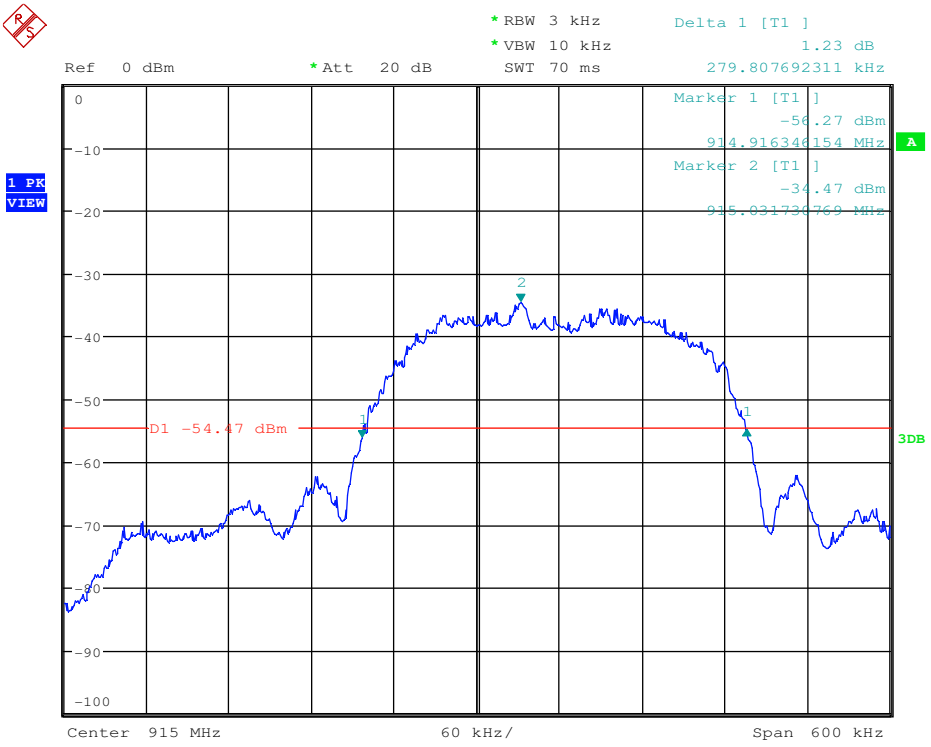

Mode:a; Channel:High

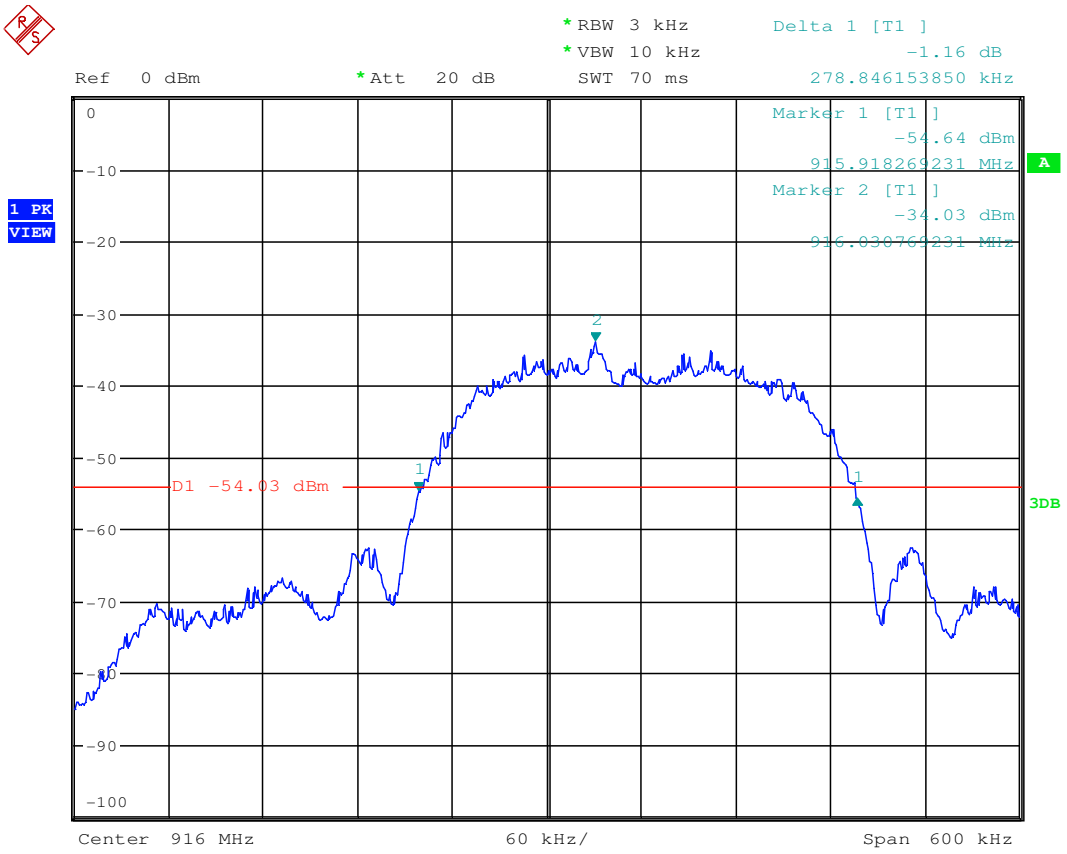

7.3 Duty Cycle

Test Requirement:	47 CFR Part 15C Section 15.35 (c)
Test Method:	ANSI C63.10:2013
Test Setup:	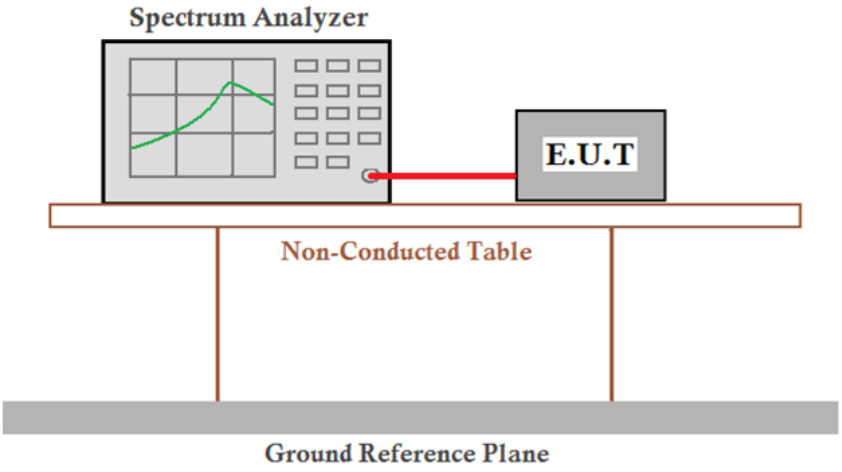
Limit:	N/A
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5 for details
Test Results:	Pass

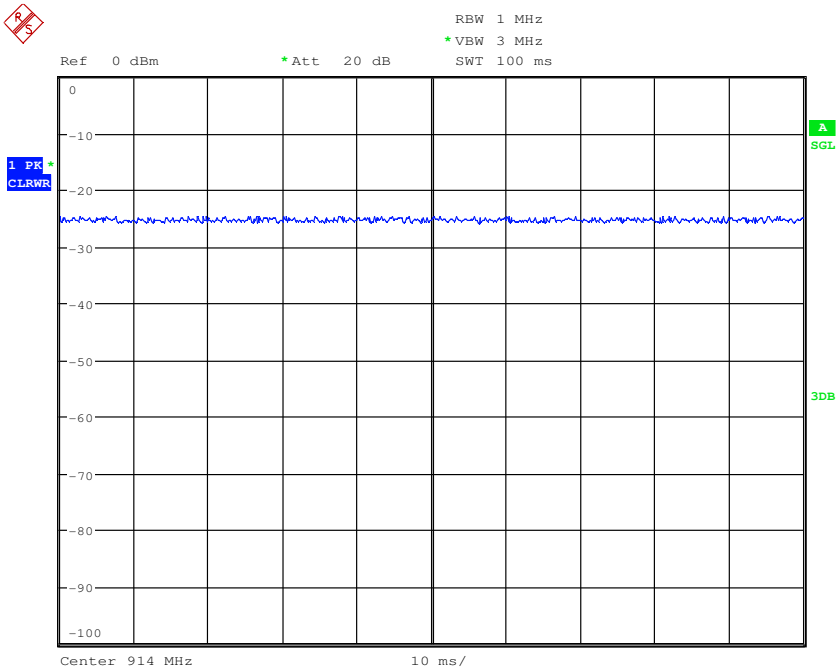

7.4 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)

Test Method: ANSI C63.10 (2013) Section 6.5&6.6

Measurement Distance: 3m

Limit:

Fundamental frequency(MHz)	Field strength of fundamental(millivolts/meter)	Field strength of harmonics(microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500
Remark: The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For fundamental frequency in “902-928MHz”, the field strength of fundamental is based on Quasi-Peak.		

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 51 % RH Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)
b:TX mode_Keep the EUT in transmitting with modulation mode.(AC supply)

The worst case for final test: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)

7.4.2 Test Setup Diagram

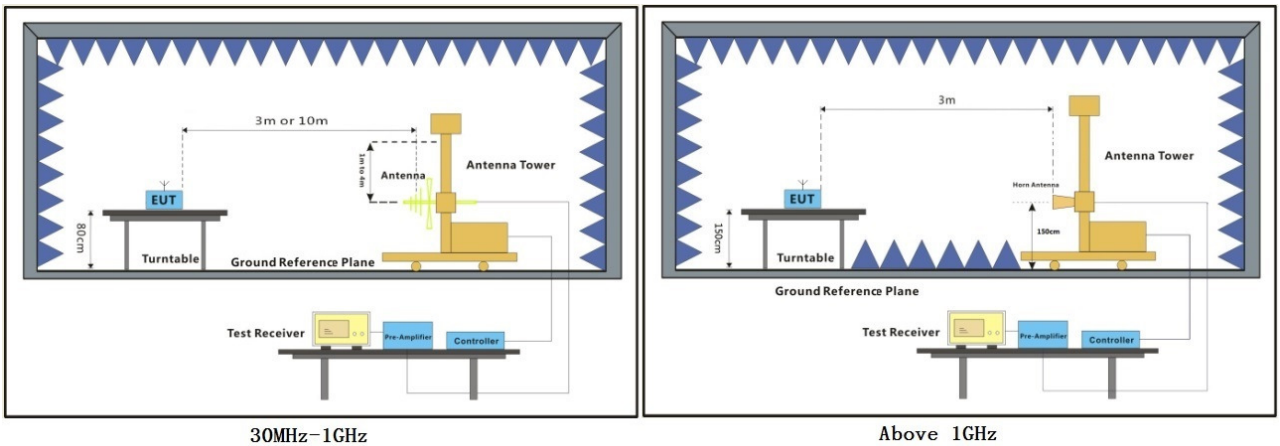

30MHz-1GHz Above 1GHz

7.4.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

914MHz:

QP value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
914	3.61	29.87	27.24	73.98	80.22	114	-33.78	Horizontal
914	3.62	29.88	27.23	62	68.27	114	-45.73	Vertical

915MHz:

QP value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
915	3.62	29.88	27.23	74.12	80.39	114	-33.61	Horizontal
915	3.62	29.88	27.23	62.59	68.86	114	-45.14	Vertical

916MHz:

QP value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
916	3.62	29.88	27.23	75.45	81.72	114	-32.28	Horizontal
916	3.62	29.88	27.23	63.02	69.29	114	-44.71	Vertical

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.5 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6
Measurement Distance: 3m
Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value
Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209,whichever is the lesser attenuation.		

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 51 % RH Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)
b:TX mode_Keep the EUT in transmitting with modulation mode.(AC supply)

The worst case for final test: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)

7.5.2 Test Setup Diagram

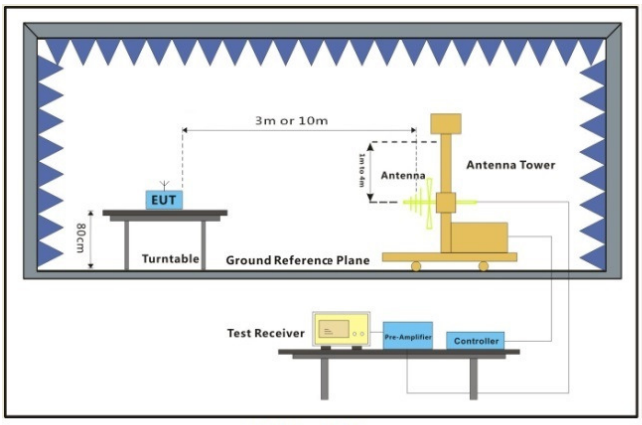

30MHz-1GHz

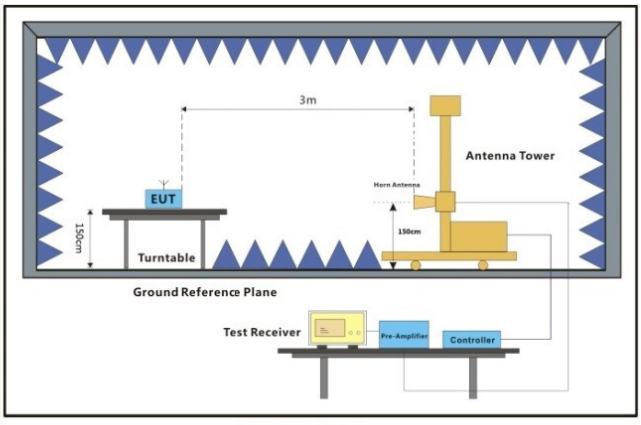

Above 1GHz

7.5.3 Measurement Procedure and Data

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Mode:a; Polarization:Horizontal

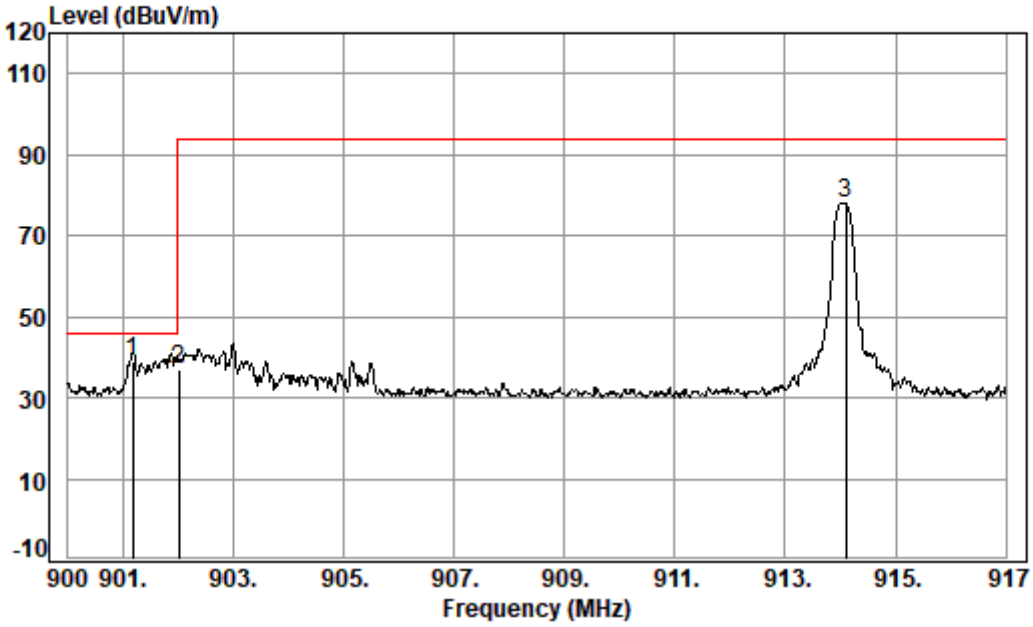

Condition: 3m HORIZONTAL
Job No. : 01988CR
Test mode: 914M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	901.17	3.60	29.81	27.29	32.76	38.88	46.00	-7.12	QP
2	902.01	3.60	29.81	27.28	30.97	37.10	94.00	-56.90	QP
3	914.09	3.62	29.87	27.24	71.92	78.17	94.00	-15.83	QP

Mode:a; Polarization:Vertical

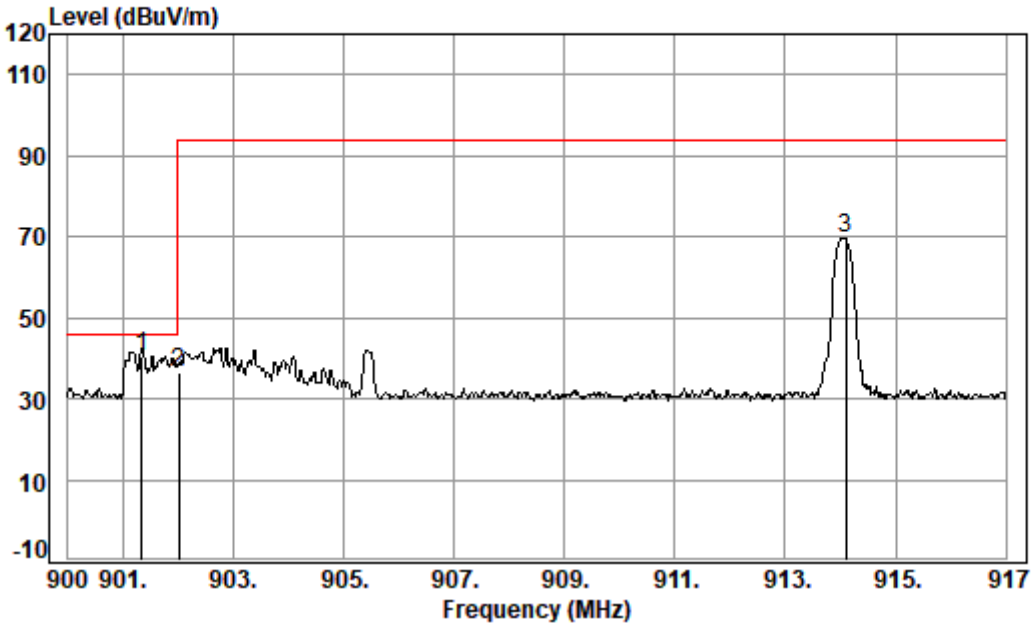

Condition: 3m VERTICAL
Job No. : 01988CR
Test mode: 914M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	901.34	3.60	29.81	27.29	34.43	40.55	46.00	-5.45	QP
2	902.01	3.60	29.81	27.28	30.11	36.24	94.00	-57.76	QP
3	914.09	3.62	29.87	27.24	63.20	69.45	94.00	-24.55	QP

Mode:a; Polarization:Horizontal

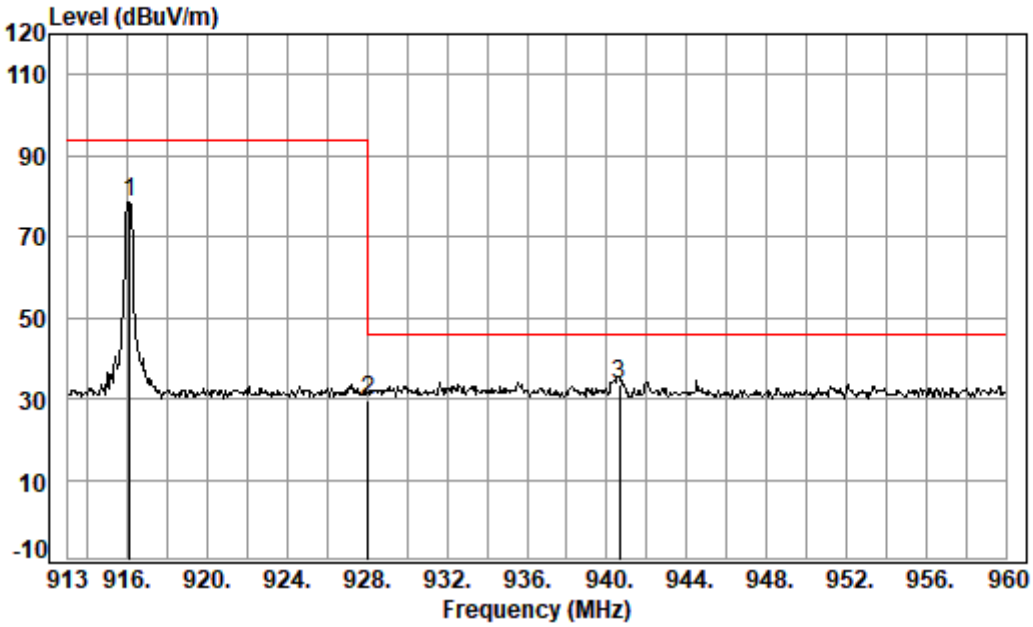

Condition: 3m HORIZONTAL
Job No. : 01988CR
Test mode: 916M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	916.08	3.62	29.88	27.23	72.20	78.47	94.00	-15.53	QP
2	928.02	3.63	29.95	27.18	23.09	29.49	46.00	-16.51	QP
3 pp	940.62	3.64	30.01	27.13	27.03	33.55	46.00	-12.45	QP

Mode:a; Polarization:Vertical

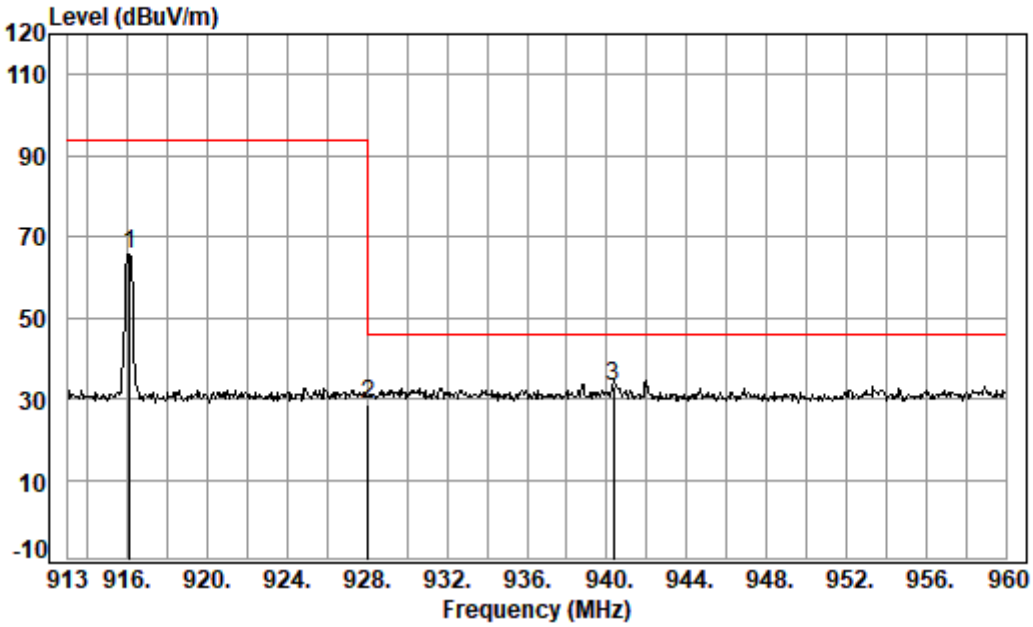

Condition: 3m VERTICAL
Job No. : 01988CR
Test mode: 916M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	916.08	3.62	29.88	27.23	59.44	65.71	94.00	-28.29	QP
2	928.02	3.63	29.95	27.18	22.17	28.57	46.00	-17.43	QP
3 pp	940.32	3.64	30.01	27.13	26.43	32.95	46.00	-13.05	QP

7.6 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)
Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 51 % RH Atmospheric Pressure: 1015 mbar

Pretest these modes to find the worst case: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)
b:TX mode_Keep the EUT in transmitting with modulation mode.(AC supply)

The worst case for final test: a:TX mode_Keep the EUT in transmitting with modulation mode.(DC supply)

7.6.2 Test Setup Diagram

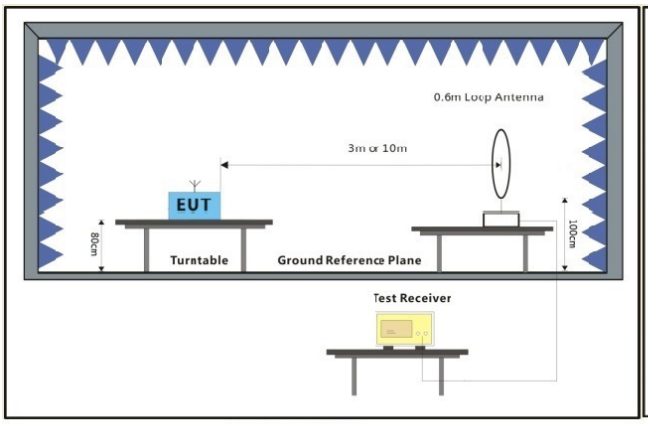

Below 30MHz

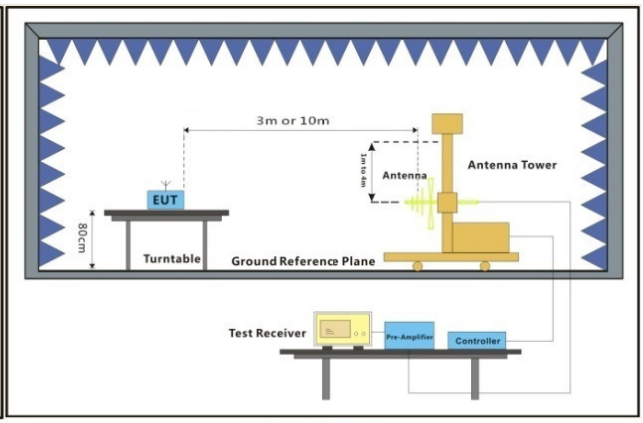

30MHz-1GHz

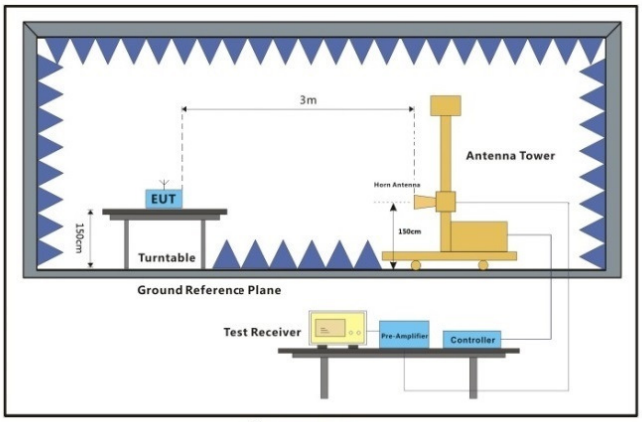

Above 1GHz

7.6.3 Measurement Procedure and Data

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

below 1GHz

Mode:a; Polarization:Horizontal

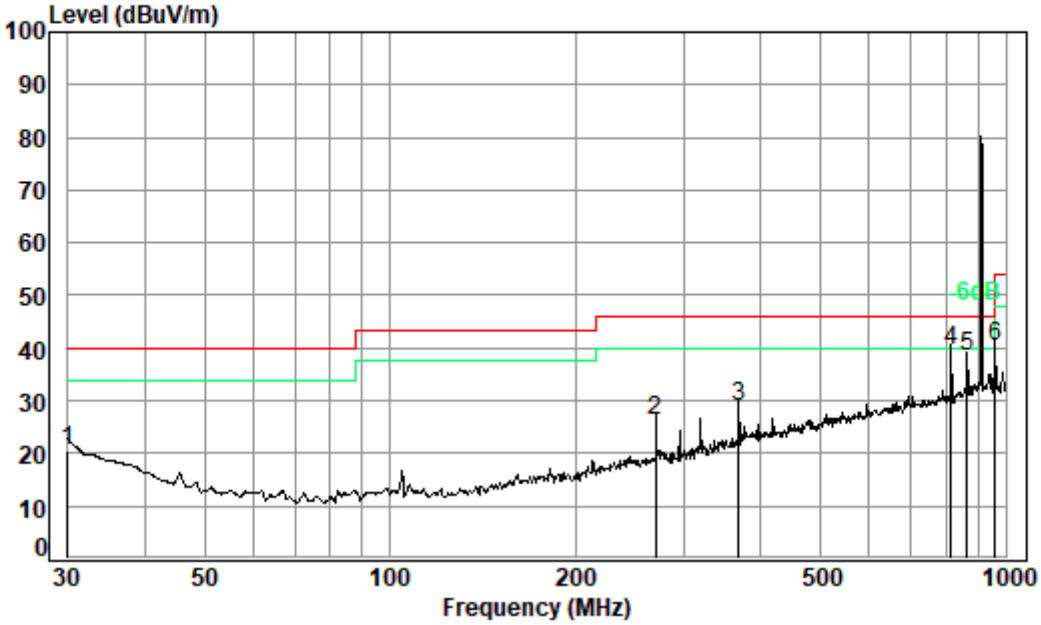

Condition: 3m HORIZONTAL
Job No. : 01988CR
Test mode: a
: 914M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.00	0.60	22.50	27.73	25.29	20.66	40.00	-19.34	QP
2	270.37	1.77	18.94	26.96	32.56	26.31	46.00	-19.69	QP
3	368.11	2.11	21.59	27.27	32.63	29.06	46.00	-16.94	QP
4 pp	815.97	3.27	28.72	27.65	35.31	39.65	46.00	-6.35	QP
5	866.09	3.47	29.38	27.43	32.83	38.25	46.00	-7.75	QP
6	962.16	3.66	30.12	27.05	33.54	40.27	54.00	-13.73	QP

Mode:a; Polarization:Vertical

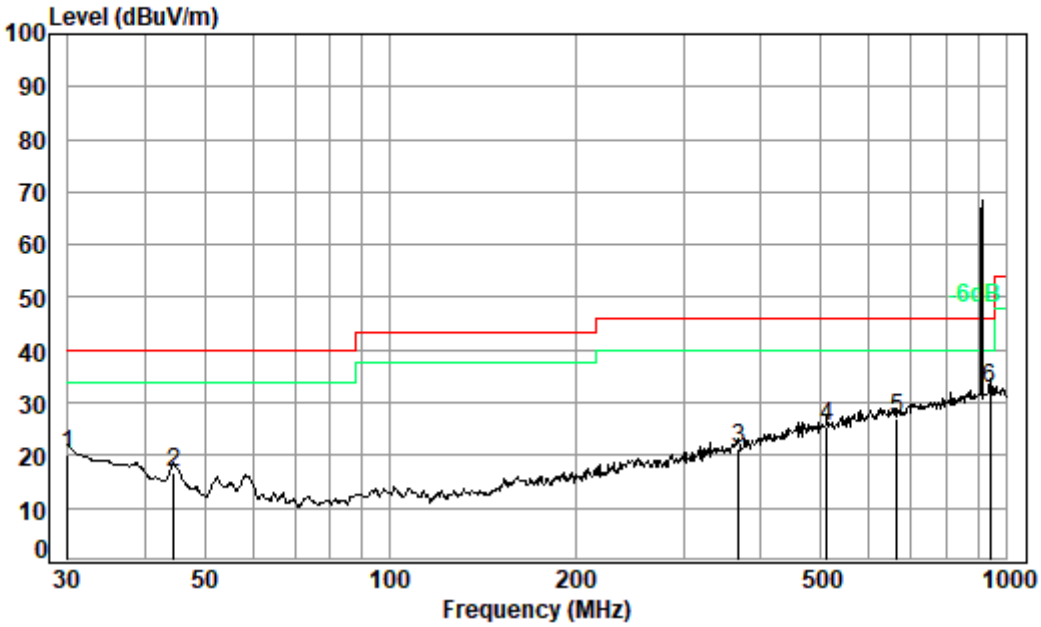

Condition: 3m VERTICAL
Job No. : 01988CR
Test mode: a
: 914M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.00	0.60	22.50	27.73	24.71	20.08	40.00	-19.92	QP
2	44.59	0.70	15.89	27.70	27.80	16.69	40.00	-23.31	QP
3	368.11	2.11	21.59	27.27	24.84	21.27	46.00	-24.73	QP
4	511.84	2.61	24.86	27.88	25.85	25.44	46.00	-20.56	QP
5	665.80	2.84	27.48	28.01	24.74	27.05	46.00	-18.95	QP
6 pp	942.13	3.64	30.02	27.13	26.07	32.60	46.00	-13.40	QP

above 1GHz

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:Low

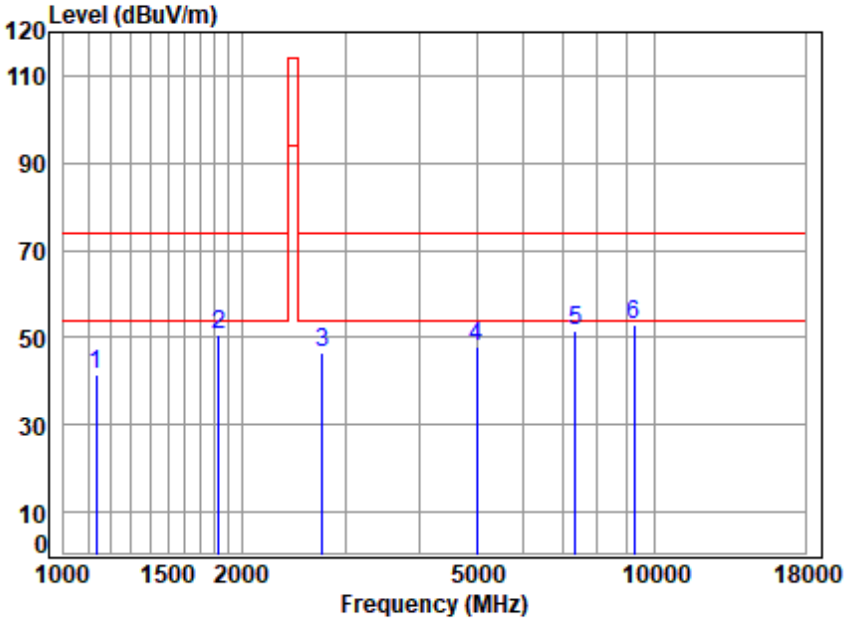

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01988CR
Mode : 914 TX RSE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1135.617	2.35	24.29	40.23	55.05	41.46	74.00	-32.54	Peak
2	1829.582	2.95	27.18	40.70	61.05	50.48	74.00	-23.52	Peak
3	2742.143	4.08	29.82	41.11	53.70	46.49	74.00	-27.51	Peak
4	5002.497	6.98	34.20	42.90	49.48	47.76	74.00	-26.24	Peak
5	7347.474	8.30	36.18	41.51	48.54	51.51	74.00	-22.49	Peak
6	9258.909	8.92	37.41	39.10	45.64	52.87	74.00	-21.13	Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:Low

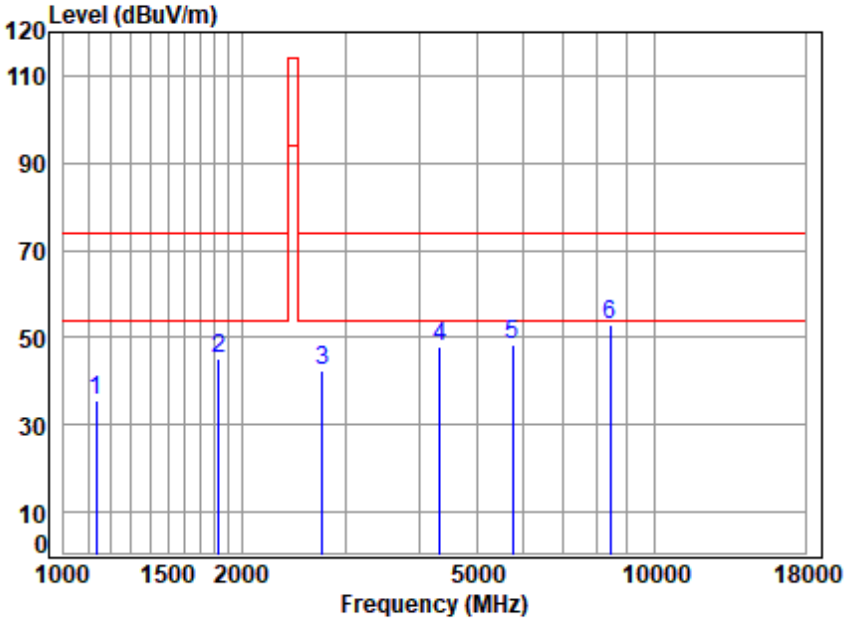

Site : chamber
Condition: 3m VERTICAL
Job No : 01988CR
Mode : 914 TX RSE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1135.617	2.35	24.29	40.23	49.17	35.58	74.00	-38.42	Peak
2	1829.582	2.95	27.18	40.70	55.59	45.02	74.00	-28.98	Peak
3	2742.143	4.08	29.82	41.11	49.61	42.40	74.00	-31.60	Peak
4	4341.886	6.46	33.33	42.43	50.43	47.79	74.00	-26.21	Peak
5	5746.982	7.14	34.85	42.40	48.98	48.57	74.00	-25.43	Peak
6	8416.584	8.39	36.95	40.47	47.90	52.77	74.00	-21.23	Peak

below 1GHz

Mode:a; Polarization:Horizontal

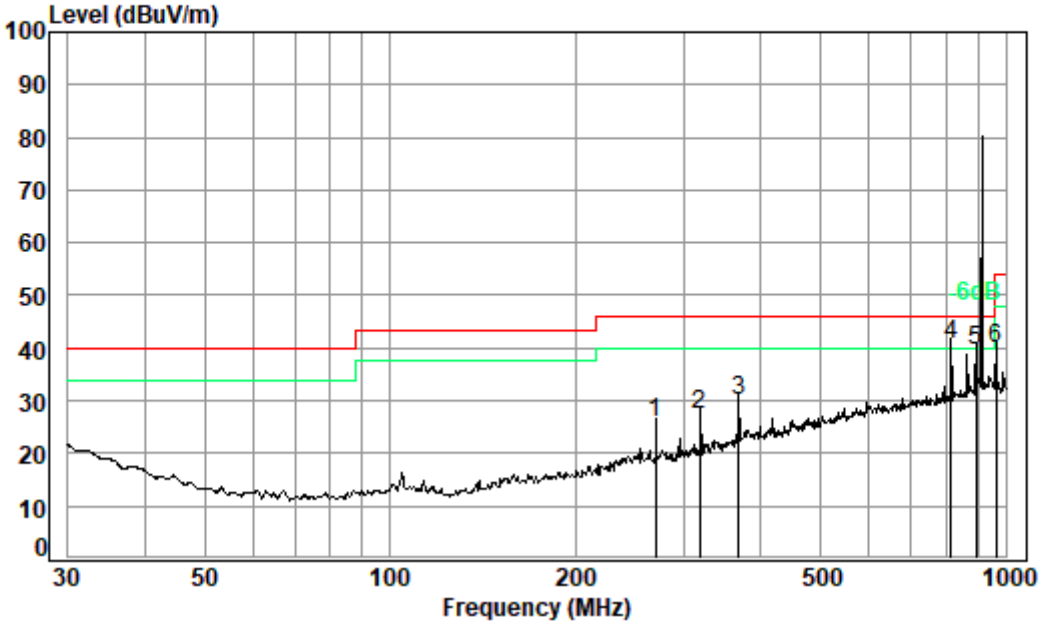

Condition: 3m HORIZONTAL
Job No. : 01988CR
Test mode: a
: 915M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	270.37	1.77	18.94	26.96	31.95	25.70	46.00	-20.30	QP
2	318.82	1.96	20.19	27.00	32.20	27.35	46.00	-18.65	QP
3	368.11	2.11	21.59	27.27	33.75	30.18	46.00	-15.82	QP
4 pp	815.97	3.27	28.72	27.65	36.31	40.65	46.00	-5.35	QP
5	893.86	3.58	29.72	27.32	33.58	39.56	46.00	-6.44	QP
6	965.54	3.67	30.13	27.04	33.35	40.11	54.00	-13.89	QP

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Mode:a; Polarization:Vertical

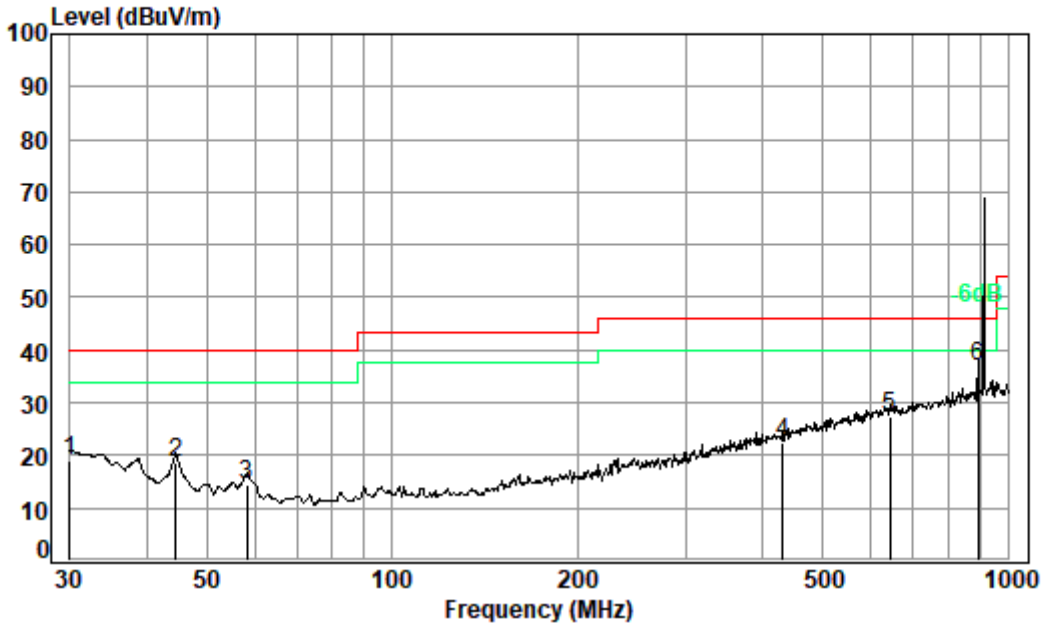

Condition: 3m VERTICAL
Job No. : 01988CR
Test mode: a
: 915M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.00	0.60	22.50	27.73	23.73	19.10	40.00	-20.90	QP
2	44.59	0.70	15.89	27.70	29.60	18.49	40.00	-21.51	QP
3	58.20	0.80	13.37	27.68	28.07	14.56	40.00	-25.44	QP
4	431.03	2.33	23.14	27.56	24.46	22.37	46.00	-23.63	QP
5	642.86	2.79	27.18	28.06	25.58	27.49	46.00	-18.51	QP
6 pp	893.86	3.58	29.72	27.32	31.06	37.04	46.00	-8.96	QP

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

above 1GHz

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:middle

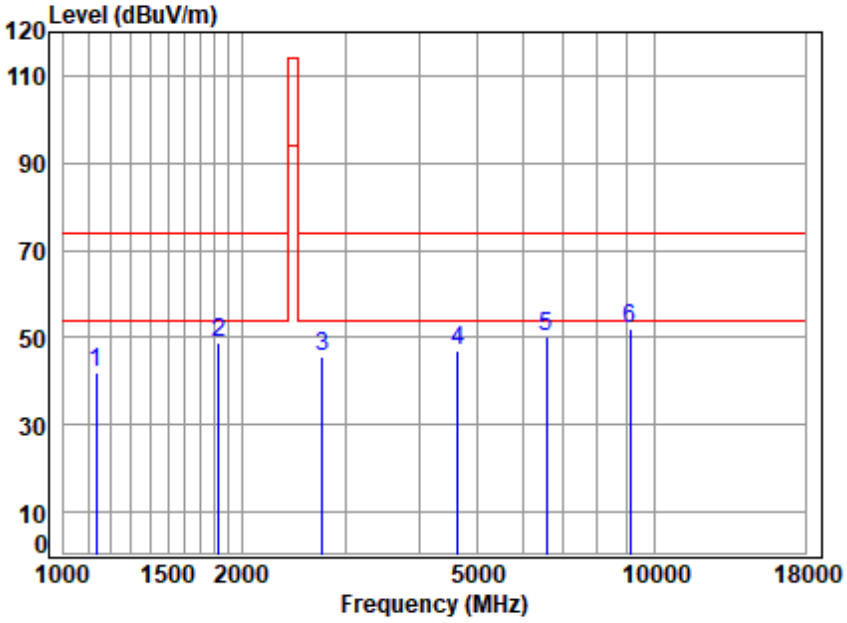

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01988CR
Mode : 915 TX RSE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1135.617	2.35	24.29	40.23	55.65	42.06	74.00	-31.94	Peak
2	1829.582	2.95	27.18	40.70	59.51	48.94	74.00	-25.06	Peak
3	2742.143	4.08	29.82	41.11	52.76	45.55	74.00	-28.45	Peak
4	4640.339	6.36	33.77	42.65	49.39	46.87	74.00	-27.13	Peak
5	6564.209	7.79	35.64	41.92	48.68	50.19	74.00	-23.81	Peak
6	9099.724	9.63	37.28	39.35	44.41	51.97	74.00	-22.03	Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:middle

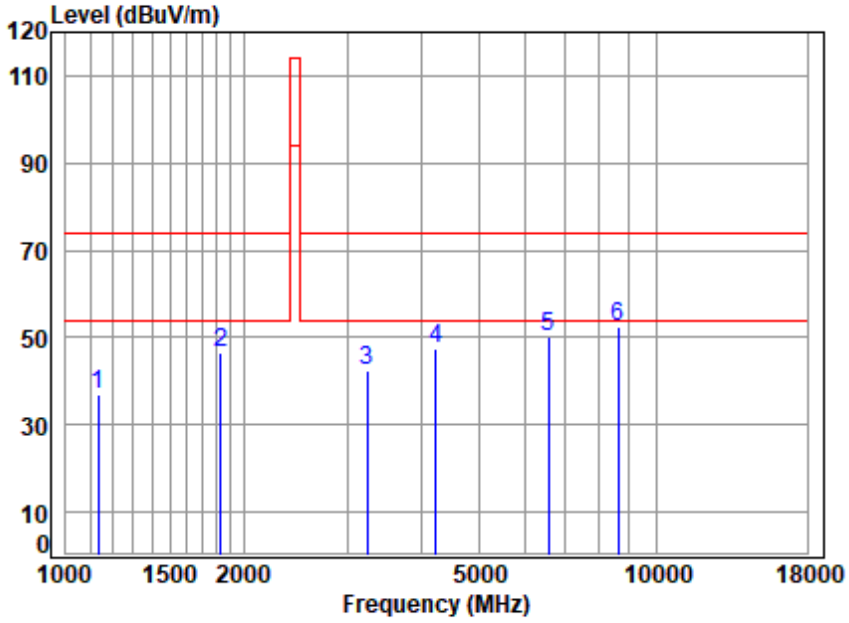

Site : chamber
Condition: 3m VERTICAL
Job No : 01988CR
Mode : 915 TX RSE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1135.617	2.35	24.29	40.23	50.66	37.07	74.00	-36.93	Peak
2	1829.582	2.95	27.18	40.70	57.24	46.67	74.00	-27.33	Peak
3	3242.619	5.60	31.30	41.46	47.19	42.63	74.00	-31.37	Peak
4	4230.396	6.18	33.13	42.34	50.59	47.56	74.00	-26.44	Peak
5	6564.209	7.79	35.64	41.92	48.82	50.33	74.00	-23.67	Peak
6	8613.468	8.87	37.05	40.14	46.49	52.27	74.00	-21.73	Peak

below 1GHz

Mode:a; Polarization:Horizontal

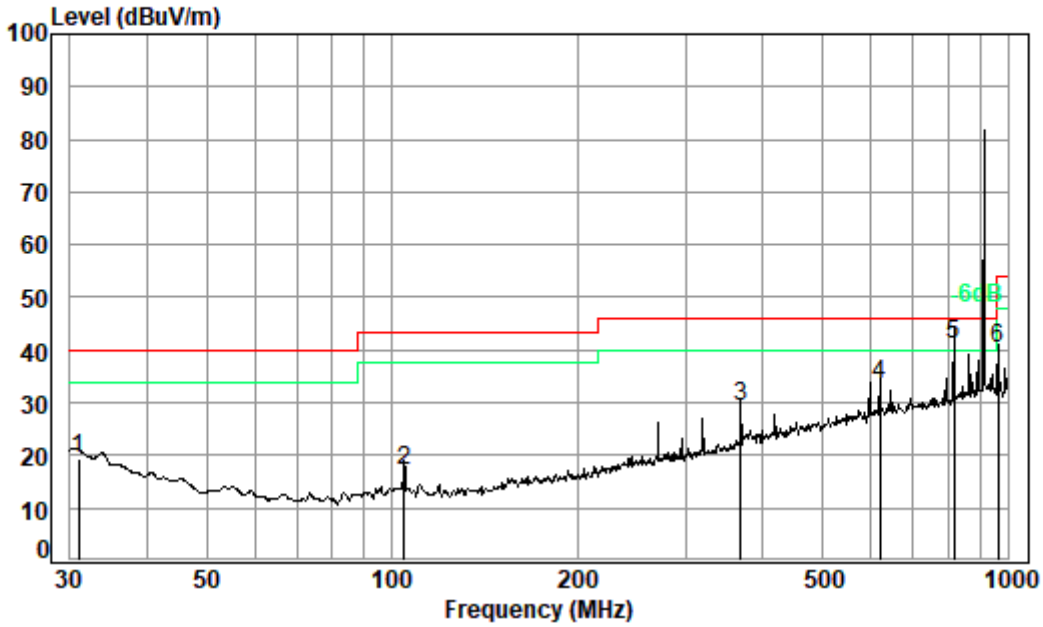

Condition: 3m HORIZONTAL
Job No. : 01988CR
Test mode: a
: 916M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.96	0.60	21.95	27.73	24.58	19.40	40.00	-20.60	QP
2	104.54	1.21	13.78	27.61	29.66	17.04	43.50	-26.46	QP
3	368.11	2.11	21.59	27.27	33.00	29.43	46.00	-16.57	QP
4	620.71	2.75	26.89	28.12	32.01	33.53	46.00	-12.47	QP
5 pp	818.83	3.28	28.76	27.64	36.65	41.05	46.00	-4.95	QP
6	965.54	3.67	30.13	27.04	33.40	40.16	54.00	-13.84	QP

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Mode:a; Polarization:Vertical

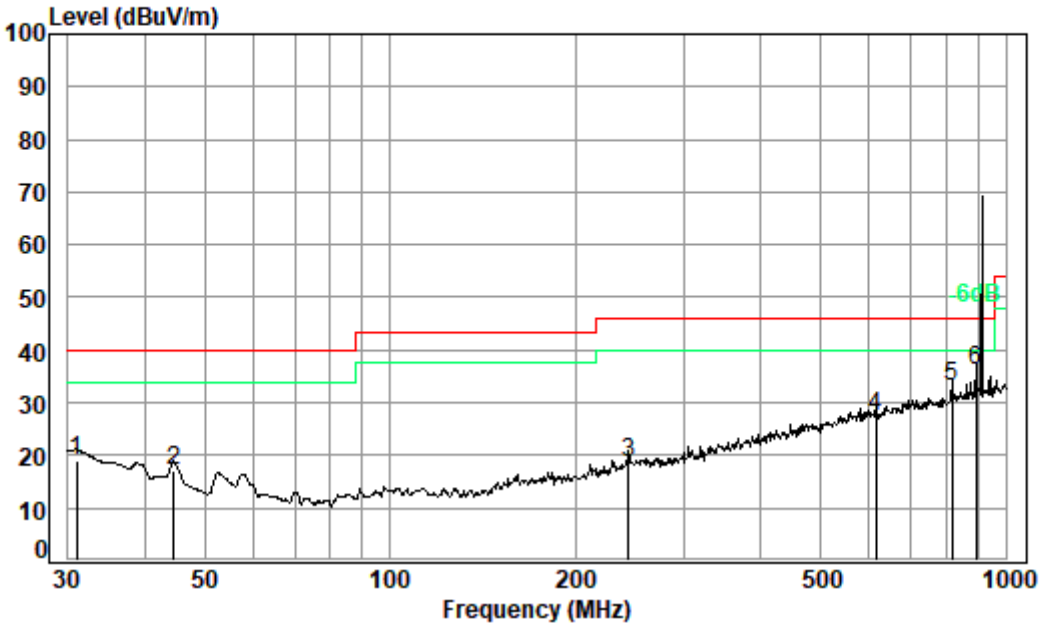

Condition: 3m VERTICAL
Job No. : 01988CR
Test mode: a
: 916M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.96	0.60	21.95	27.73	24.33	19.15	40.00	-20.85	QP
2	44.59	0.70	15.89	27.70	28.29	17.18	40.00	-22.82	QP
3	244.23	1.65	18.87	27.03	25.29	18.78	46.00	-27.22	QP
4	614.21	2.73	26.80	28.13	25.98	27.38	46.00	-18.62	QP
5	818.83	3.28	28.76	27.64	28.75	33.15	46.00	-12.85	QP
6 pp	893.86	3.58	29.72	27.32	30.26	36.24	46.00	-9.76	QP

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

above 1GHz

Mode:a; Polarization:Horizontal; Modulation:GFSK; Channel:High

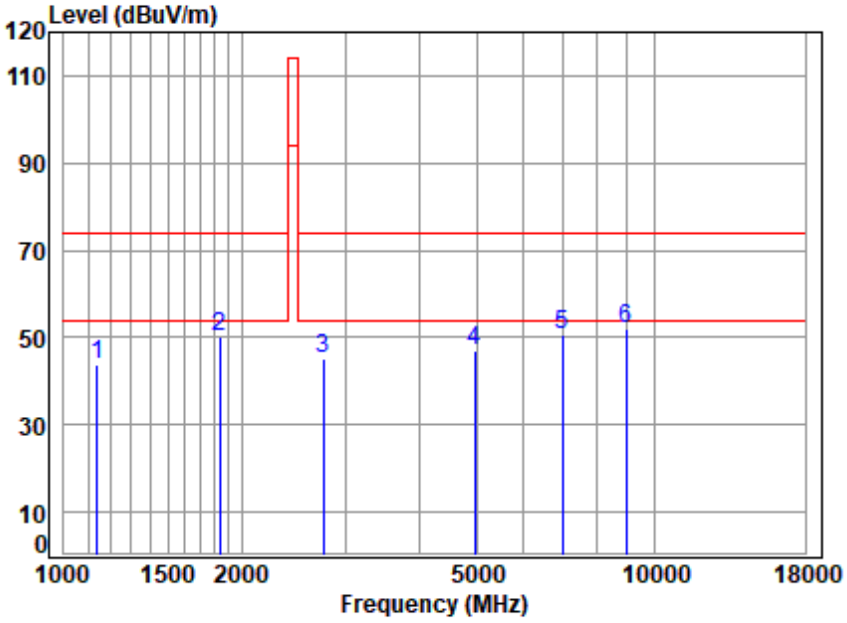

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01988CR
Mode : 916 TX RSE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1138.904	2.37	24.31	40.23	57.22	43.67	74.00	-30.33	Peak
2	1834.878	2.99	27.20	40.71	60.51	49.99	74.00	-24.01	Peak
3	2750.080	4.04	29.85	41.11	52.20	44.98	74.00	-29.02	Peak
4	4973.662	7.01	34.17	42.88	48.85	47.15	74.00	-26.85	Peak
5	6974.982	7.81	35.89	41.70	48.48	50.48	74.00	-23.52	Peak
6	8969.161	8.84	37.19	39.56	45.50	51.97	74.00	-22.03	Peak

Mode:a; Polarization:Vertical; Modulation:GFSK; Channel:High

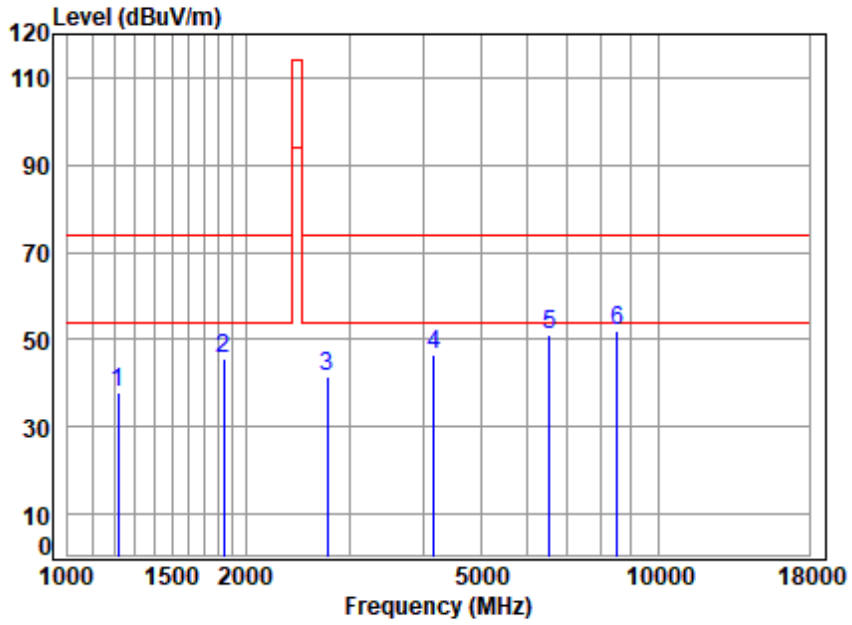

Site : chamber
Condition: 3m VERTICAL
Job No : 01988CR
Mode : 916 TX RSE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	2.68	24.67	40.30	50.64	37.69	74.00	-36.31	Peak
2	1834.878	2.99	27.20	40.71	56.11	45.59	74.00	-28.41	Peak
3	2750.080	4.04	29.85	41.11	48.86	41.64	74.00	-32.36	Peak
4	4169.698	6.09	33.02	42.30	49.64	46.45	74.00	-27.55	Peak
5	6545.263	7.68	35.63	41.93	49.80	51.18	74.00	-22.82	Peak
6	8514.456	8.66	37.01	40.31	46.58	51.94	74.00	-22.06	Peak

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8 Photographs

8.1 Test Setup

Please refer to setup photos.

8.2 EUT Constructional Details (EUT Photos)

Please Refer to external and internal photos for details.

- End of the Report -

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com