


WUGU 966 Chamber A

Job No.:	70319002	Ant. Polar.:	Horizontal
Standard:	FCC part 15C A(3M)	Tested Distance:	3m
Test Item:	Radiated Emission	Date:	2007/4/9
Temp.(°C)/Hum.(%RH):	20°C/50%RH	Time:	PM 02:35
Company:	星喬	Tested By:	NAN
Model:	APOS	Test Mode:	normal

Test Mode/Description:

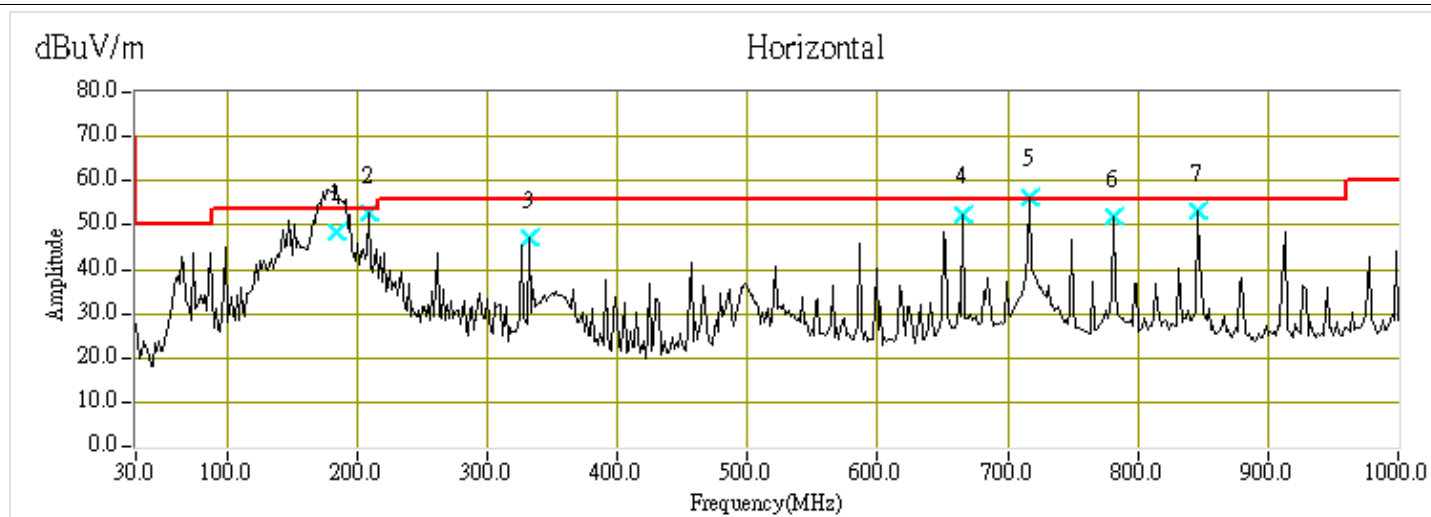

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
1	183.58	63.75	-15.18	48.57	53.50	-4.93	112.00	100.00	QP
2	209.45	67.90	-15.22	52.68	53.50	-0.82	25.80	100.00	Peak
3	332.32	58.30	-11.24	47.06	56.00	-8.94	193.90	100.00	Peak
4	665.35	57.29	-4.93	52.37	56.00	-3.63	142.30	100.00	Peak
5	717.08	55.67	-4.41	51.26	56.00	-4.74	129.00	100.00	Peak
6	781.75	54.96	-3.25	51.71	56.00	-4.29	195.80	100.00	Peak
7	846.42	55.80	-2.67	53.14	56.00	-2.86	211.30	100.00	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).