


WUGU 966 Chamber A

Job No.:	70319002	Ant. Polar.:	Horizontal
Standard:	FCC part 15C A(3M)	Tested Distance:	3m
Test Item:	Radiated Emission	Date:	2007/4/25
Temp.(°C)/Hum.(%RH):	20°C/50%RH	Time:	PM 06:35
Company:	星喬	Tested By:	WOLF
Model:	APOS XXX X=0-9 A-Z	Test Mode:	NO RF

Test Mode/Description:

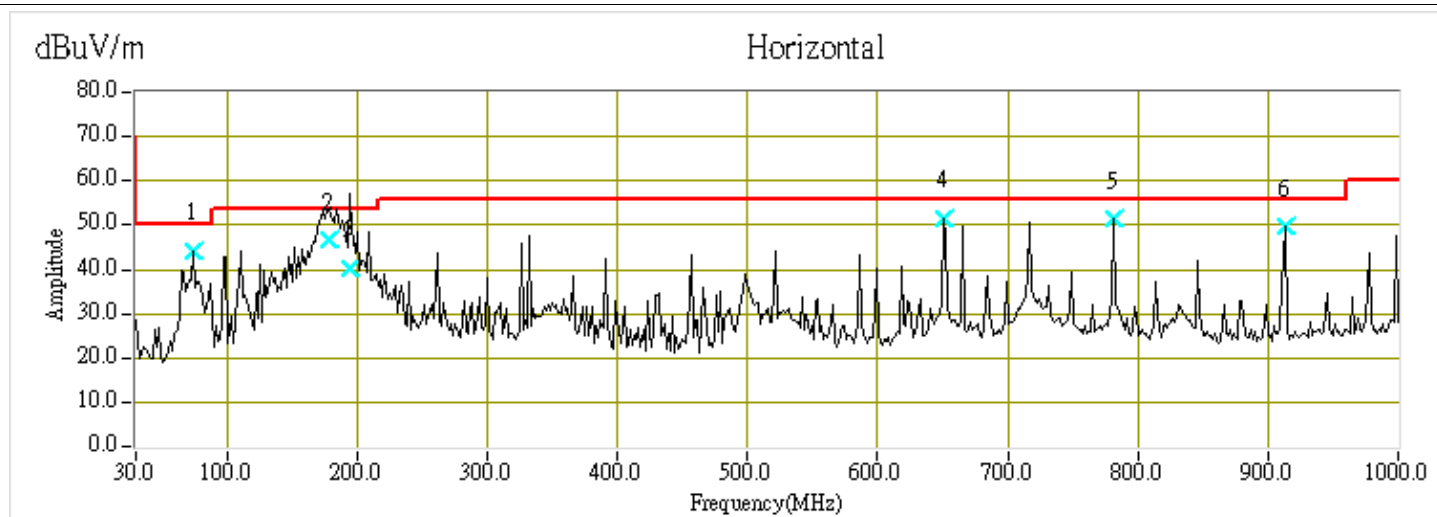

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
1	73.65	63.20	-19.04	44.16	50.00	-5.84	175.10	230.00	Peak
2	178.73	61.83	-15.16	46.67	53.50	-6.83	138.80	100.00	QP
3	194.90	54.48	-14.16	40.32	53.50	-13.18	48.90	230.00	QP
4	650.80	56.69	-5.20	51.49	56.00	-4.51	213.70	230.00	Peak
5	781.75	54.66	-3.25	51.41	56.00	-4.59	196.50	100.00	Peak
6	912.70	51.39	-1.80	49.59	56.00	-6.41	313.00	100.00	Peak

Remark:

- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).