


WUGU 966 Chamber A

Job No.:	70319002	Ant. Polar.:	Vertical
Standard:	FCC part 15C A(3M)	Tested Distance:	3m
Test Item:	Radiated Emission	Date:	2007/4/9
Temp.(°C)/Hum.(%RH):	20°C/50%RH	Time:	PM 02:29
Company:	星喬	Tested By:	NAN
Model:	APOS	Test Mode:	normal

Test Mode/Description:

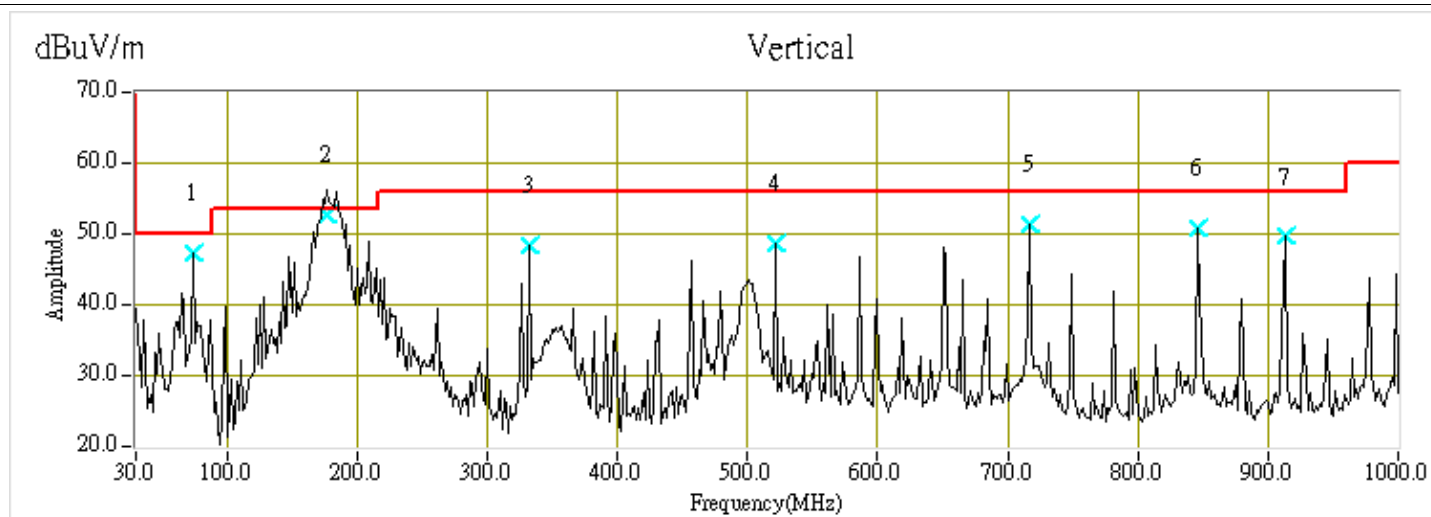

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
1	73.65	66.47	-19.04	47.42	50.00	-2.58	284.20	230.00	Peak
2	177.12	67.67	-14.98	52.69	53.50	-0.81	357.00	100.00	QP
3	332.32	59.67	-11.24	48.43	56.00	-7.57	161.40	100.00	Peak
4	521.47	55.92	-7.22	48.70	56.00	-7.30	224.50	100.00	Peak
5	717.08	55.76	-4.41	51.35	56.00	-4.65	0.20	100.00	Peak
6	846.42	53.54	-2.67	50.87	56.00	-5.13	182.40	100.00	Peak
7	912.70	51.40	-1.80	49.60	56.00	-6.40	182.40	100.00	Peak

Remark:

- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).