


WUGU 966 Chamber A

Job No.:	70319002	Ant. Polar.:	Vertical
Standard:	FCC part 15C A(3M)	Tested Distance:	3m
Test Item:	Radiated Emission	Date:	2007/4/25
Temp.(°C)/Hum.(%RH):	20°C/50%RH	Time:	PM 05:39
Company:	星喬	Tested By:	WOLF
Model:	APOS XXX X=0-9 A-Z	Test Mode:	NO RF

Test Mode/Description:

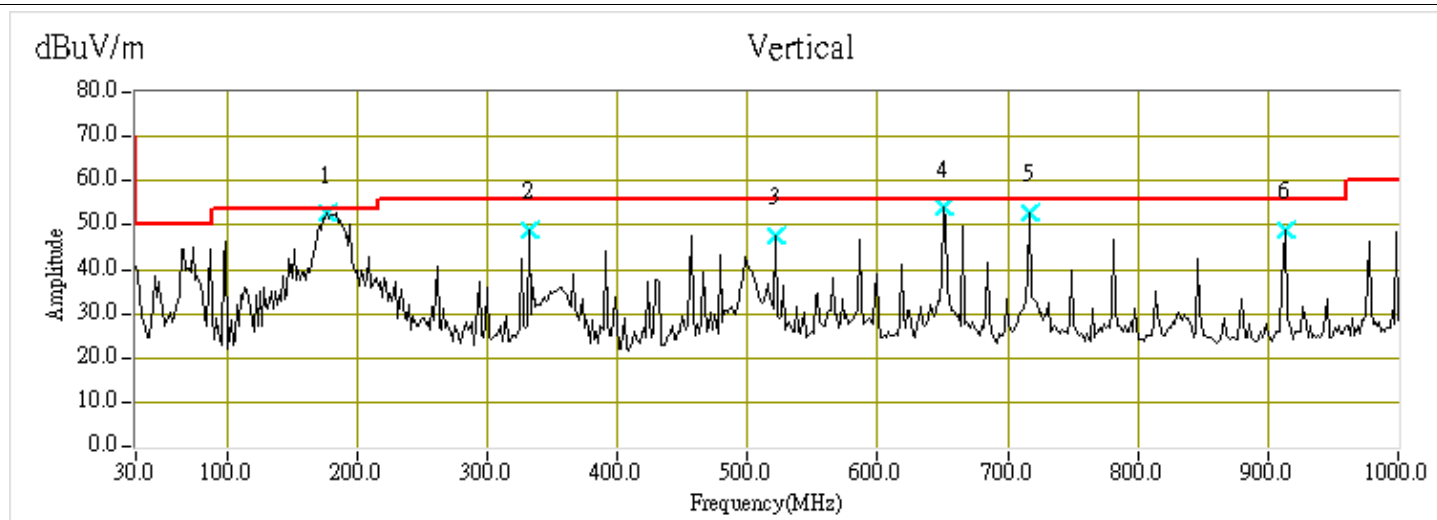

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Azimuth (°)	Height (cm)	Remark
1	177.12	67.72	-14.98	52.74	53.50	-0.76	346.80	100.00	QP
2	332.32	60.21	-11.24	48.97	56.00	-7.03	171.10	100.00	Peak
3	521.47	54.97	-7.22	47.75	56.00	-8.25	211.00	100.00	Peak
4	650.80	59.18	-5.20	53.97	56.00	-2.03	4.20	100.00	Peak
5	717.08	57.38	-4.41	52.97	56.00	-3.03	0.50	100.00	Peak
6	912.70	50.69	-1.80	48.89	56.00	-7.11	186.30	100.00	Peak

Remark:

- Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
- Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).