



## **FCC Part 15 Subpart C**

### **TEST REPORT**

### **FOR**

**Product Name: Mobile Panel PC**

**Model : MPC ; MPCu ; MPCd ; MPCw ; r5PAD; MPCx ;  
(x=0~9;a~z,A~Z or blank)**

**Trade Name: SENOR**

Issued to

**SENOR TECH CO.,LTD.**

5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City 22150, Taiwan

Issued by

**Global Certification Corp.**

No.146, Sec. 2, Xiangzhang Rd., Xizhi Dist.,New Taipei City 221,  
Taiwan (R.O.C.)



*Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of Global Certification Corporation. This document may be altered or revised by Global Certification Corporation. Personnel only, and shall be noted in the revision section of the document.*



**Revision History**

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
1.	FR2W-790101	FR2W-790101	Feb. 27, 2018	Original Report	Michelle



---

<b>TABLE OF CONTENTS</b>	<b>3</b>
<b>1. GENERAL INFORMATION</b>	<b>5</b>
1.1 DESCRIPTION OF THE TESTED SAMPLES	6
<b>2. TEST METHODOLOGY</b>	<b>8</b>
2.1 GENERAL TEST PROCEDURES	8
2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	8
2.3 DESCRIPTION OF TEST MODES	9
2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS	10
<b>3. TEST AND MEASUREMENT EQUIPMENT</b>	<b>11</b>
3.1 CALIBRATION	11
3.2 EQUIPMENT	11
<b>4. ANTENNA REQUIREMENTS</b>	<b>13</b>
4.1 STANDARD APPLICABLE	13
4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN	13
<b>5. PEAK OUTPUT POWER</b>	<b>14</b>
5.1 TEST SETUP	14
5.2 LIMIT	14
5.3 TEST PROCEDURE	14
5.4 TEST RESULT	14
5.5 TEST DATA	14
<b>6. BAND EDGE</b>	<b>16</b>
6.1 TEST SETUP	16
6.2 LIMIT	17
6.3 RESULT	17
6.4 TEST DATA	18
<b>7. 6DB BANDWIDTH</b>	<b>30</b>
7.1 TEST LIMIT	30
7.2 TEST LIMIT	30
7.3 TEST SETUP LAYOUT	30
7.4 TEST RESULT AND DTA	30
7.5 TEST DATA	31
<b>8. RADIATED EMISSION</b>	<b>36</b>
8.1 TEST SETUP	36
8.2 LIMIT	37
8.3 TEST PROCEDURE	38
8.4 RESULT	38
8.5 TEST DATA	38
<b>9. CONDUCTED EMISSIONS</b>	<b>60</b>
9.1 TEST SETUP	60
9.2 LIMIT	60
9.3 TEST PROCEDURE	60
9.4 TEST SPECIFICATION	60
9.5 RESULT	61
9.6 TEST DATA	61
<b>10. SPURIOUS EMISSIONS</b>	<b>63</b>



---

10.1	CONDUCTED MEASUREMENT-----	63
10.2	TEST SETUP -----	63
10.3	LIMIT -----	63
10.4	TEST PROCEDURE-----	63
10.5	TEST RESULTS-----	63
10.6	TEST DATA -----	64



**1. GENERAL INFORMATION**

**Applicant** : SENOR TECH CO.,LTD.  
**Address** : 5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City  
22150, Taiwan  
**Manufacturer** : SENOR TECH CO.,LTD.  
**Address** : 5F., No. 165, Kang Ning Street, Xizhi Dist., New Taipei City  
22150, Taiwan  
**EUT** : Mobile Panel PC  
**Model No.** : MPC ; MPCu ; MPCd ; MPCw ; r5PAD; MPCx ;  
(x=0~9;a~z,A~Z or blank)  
**Trade Name** : SENOR  
**Model Differences** : The major electrical and mechanical constructions of series models are identical  
to the basic model, except different marketing purpose. The model, **MPC** are the  
testing sample, and the final test data are shown on this test report.

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.10-2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

**FCC Part 15 Subpart C 15.247**


**Tested By:**

**Approved by:**

Feb. 27, 2018  
**Date**

  
\_\_\_\_\_  
*Eason Hsu, Engineer*

Feb. 27, 2018  
**Date**

  
\_\_\_\_\_  
*Adam Chou, Manager*

**Designation Number: TW1640**



**1.1 DESCRIPTION OF THE TESTED SAMPLES**

EUT Name : Mobile Panel PC  
Model Number : MPC  
FCC ID : OVS-MPC  
Power From InsideOutside  
Adaptor Battery Power Supply DC Power Source Support Unit PC  
Power Rating(Battery) : 3.8Vdc  
Power Rating(Adapter) I/P : 100-240Vac 56/60Hz 0.5A  
O/P : 5.0Vdc, 3.0A  
Operate Frequency : Refer to the channel list as described below  
Number of Channels : 13  
Modulation Type : N/A  5 MHz  
Antenna Type : DSSS, OFDM  
Antenna gain : 2.38 dBi

**1.3 LIST OF MEASUREMENTS AND EXAMINATIONS**

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
15.247(a)(1)	Spurious Emmission	Pass
15.247(a)(2)	6dB Bandwidth Measurement	Pass
15.247(b)	Peak Output Power Measurement Data	Pass
15.247(b)	Band Edges Measurement Data	Pass





## 2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI C63.10:2013 and FCC CFR 47 Part 15 Subpart C.

### 2.1 GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.10:2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

#### Radiated Emissions

The EUT is a placed on a turn table, which is 1.5 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

### 2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6





(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### **2.3 DESCRIPTION OF TEST MODES**

The EUT was tested under following modes:

**Modes:**

- 1. Continuous transmitting**

**Channels:**

- 1. 2.412GHz (Lowest Channel)**
- 2. 2.437GHz (Middle Channel)**
- 3. 2.462GHz (Highest Channel)**



## 2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

### **Setup Diagram**

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

### **Support Equipment**

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

**Grounding:** Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



### 3. TEST AND MEASUREMENT EQUIPMENT

#### 3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

#### 3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

**TABLE 1 LIST OF TEST AND MEASUREMENT EQUIPMENT**

Instrument	Manufacturer	Model No.	Serial No.	Calibration Due Date	Note
EMC Test Receiver	R&S	ESCI	100438	Dec. 16, 2018	
LISN #1	SCHWARZBECK	NNLK8121	550213	Feb. 02, 2019	For EUT
LISN #2	EMCO	3825/2	9001-1400	N/A	For Support Unit
RF Cable	Huber+Suhner	RG223/U	Cable-001	Dec.17, 2018	
Impedance Stabilization	Teseq GmbH	ISNT800	23334	Nov. 08, 2018	
Absorbing Clamp	COM-POWER	AB-050	421915	Aug. 17,2019	
RF Cable	Huber+Suhner	5D-FB	CABLE-007	Aug. 16,2019	
EMC Test Receiver	R&S	FSV40	101088	Sep. 28, 2018	
Bilog Antenna	SUNOL	JB1	A052204	Feb. 21, 2019	
Pre-Amplifier	WIRELESS	FPA-6592G	60028	Sep. 28, 2018	
RF Cable_NSA_Rx	HUBER + UHNER	RG213/U	Cable-004	Sep. 27, 2018	
Double Ridged Guide HORN ANTENNA	EST.LINDGREN	3117	119028	Apr.18, 2019	
SMA_Cable	HUBER SUHNER	EMC104-SM-SM-1000	170238	Mar. 05, 2019	



---

RF Cable (sVSWR_TX)	Huber Suhenr	SUCOFLEX 104	293864/4	Mar. 05, 2019	
Microwave Preamplifier	EMCINSTRUMEN T	EMC051845	980059	Apr. 17, 2019	
EMC Test Receiver	R&S	ESCI	100438	Dec. 16, 2018	

Calibration interval of instruments listed above is one year



## **4. ANTENNA REQUIREMENTS**

### **4.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(b), if transmitting antennas of direction gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN**

Antenna type: FPCB Antenna  
Antenna Gain: 2.38dBi



## **5. PEAK OUTPUT POWER**

### **5.1 TEST SETUP**



### **5.2 LIMIT**

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to § 15.247(b)(3) , for systems using digital modulation in the bands of 902 – 928 MHz , 2400 – 2483.5 MHz: 1 Watt.
2. According to § 15.247(b)(4) , the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used , the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) , (b)(2) , and (b)(3) of this section , as appropriate , by the amount in dB that directional gain of the antenna exceeds 6 dBi.

### **5.3 TEST PROCEDURE**

1. Peak power is measured using the wideband power meter.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

### **5.4 TEST RESULT: PASS**


### **5.5 TEST DATA:**



Modulation Type	Packet	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit(dBm)	Max. Limit(W)
802.11b	1 Mbps	2412 MHz	17.2	0.05248075	30.00	1.00
		2437 MHz	16.19	0.04159106	30.00	1.00
		2462 MHz	16.09	0.04064433	30.00	1.00
802.11g	6 Mbps	2412 MHz	23.45	0.22130947	30.00	1.00
		2437 MHz	23.33	0.21527817	30.00	1.00
		2462 MHz	23.14	0.20606299	30.00	1.00
802.11n HT20	MCS 0	2412 MHz	22.54	0.17947336	30.00	1.00
		2437 MHz	22.11	0.16255488	30.00	1.00
		2462 MHz	21.2	0.13182567	30.00	1.00

## 6. BAND EDGE

### 6.1 TEST SETUP

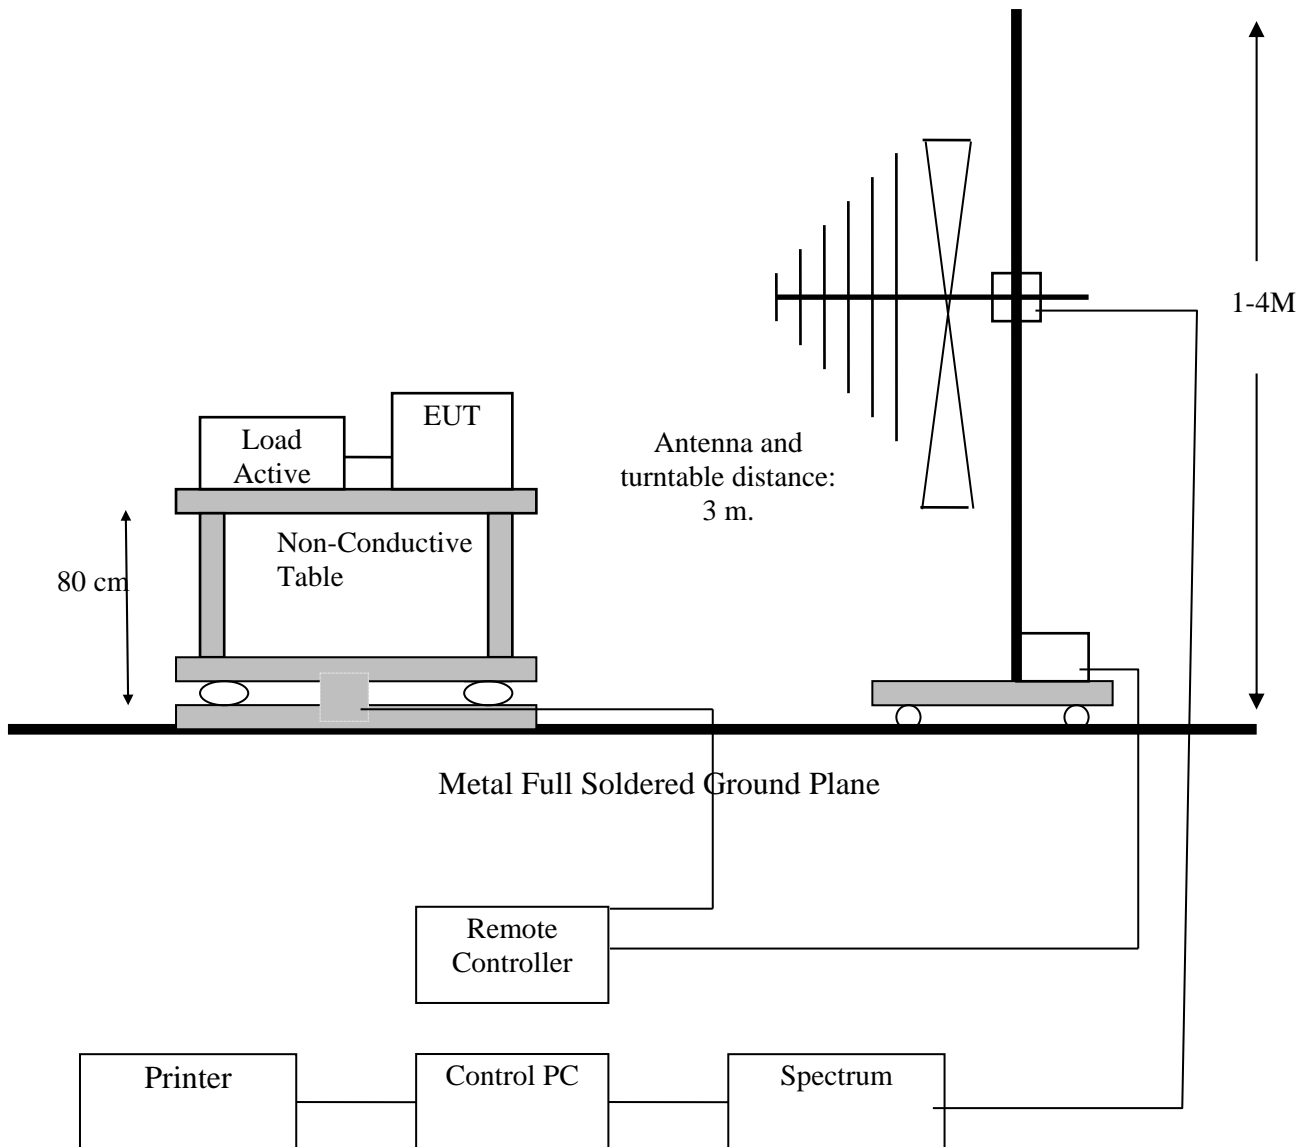





**6.2 LIMIT**

Restricted Bands:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
1.705-30	30 (at 30-meter)	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54


**6.3 RESULT: PASS**



**6.4 TEST DATA:**

**802.11b**

Lowest Channel- Horizontal

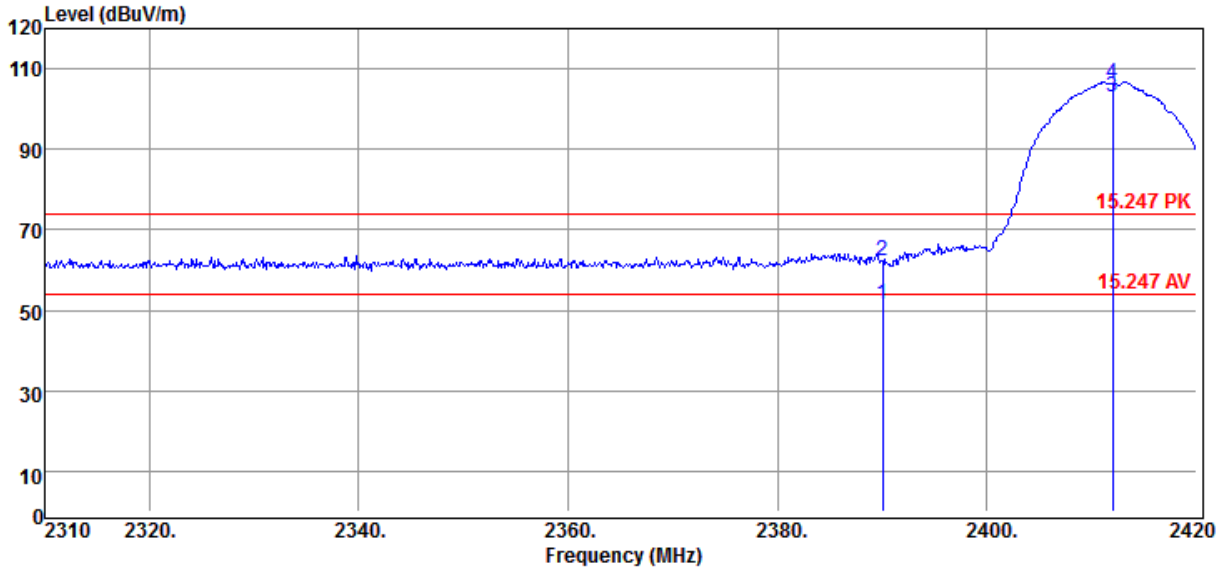

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2390.00	14.97	36.33	3.83	32.50	0.00	51.30	54.00	-2.70	1
2	2390.00	25.76	36.33	3.83	32.50	0.00	62.09	74.00	-11.91	2
3	2412.00	66.66	36.36	3.82	32.54	0.00	103.02	54.00	49.02	3
4	2412.00	70.04	36.36	3.82	32.54	0.00	106.40	74.00	32.40	4


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

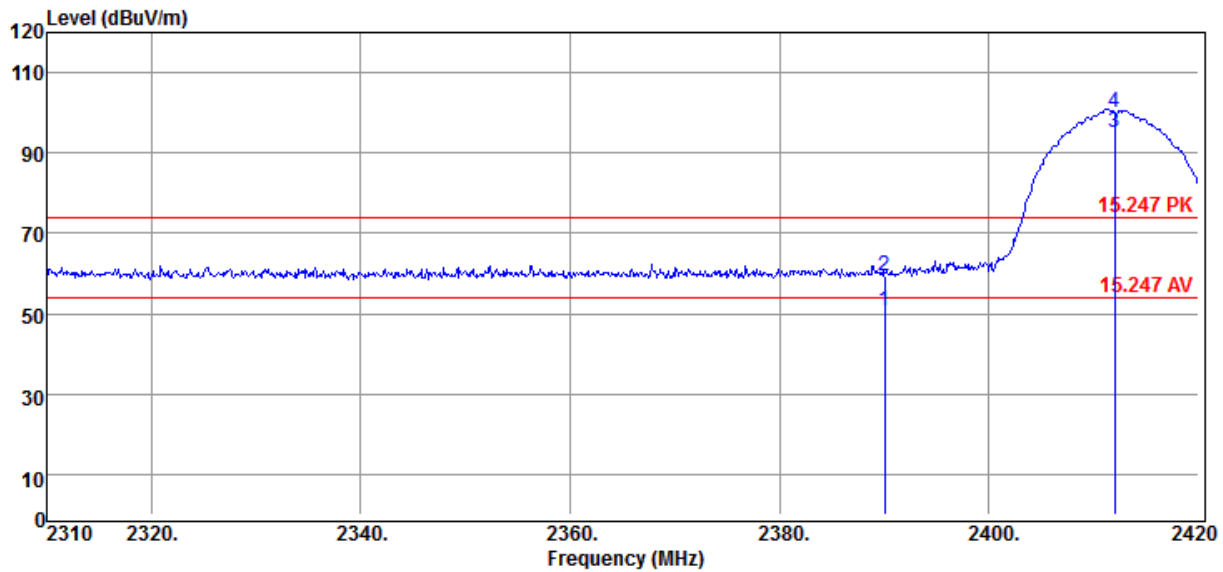

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2390.00	14.15	36.33	3.83	32.50	0.00	50.48	54.00	-3.52	Average
2	2390.00	23.25	36.33	3.83	32.50	0.00	59.58	74.00	-14.42	Peak
3	2412.00	58.76	36.36	3.82	32.54	0.00	95.12	54.00	41.12	Average
4	2412.00	63.85	36.36	3.82	32.54	0.00	100.21	74.00	26.21	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Horizontal

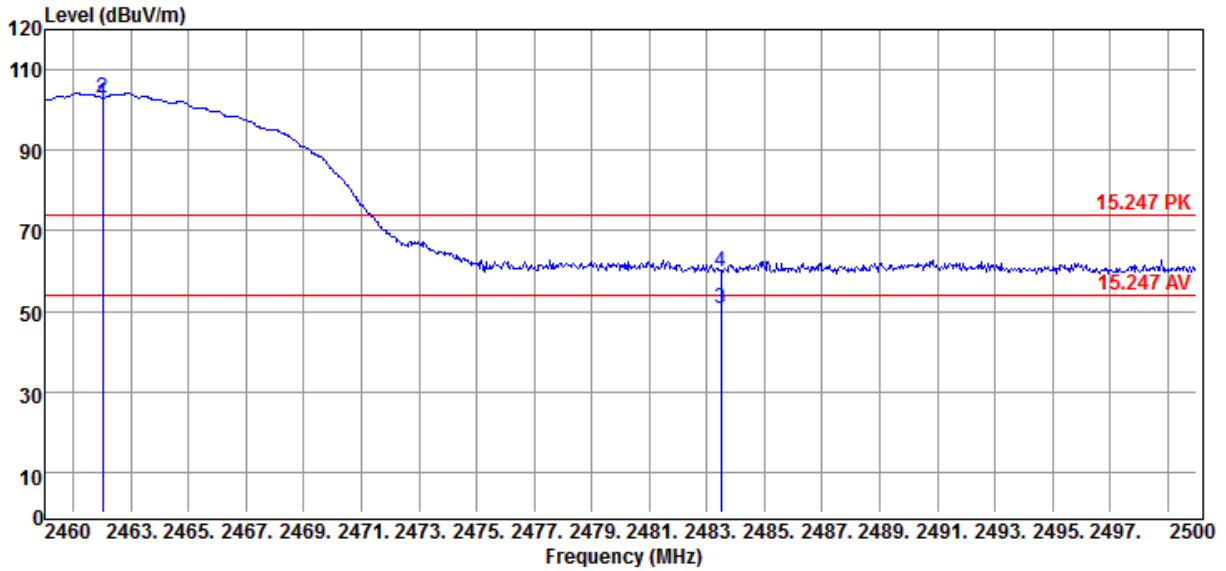

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2462.00	65.37	36.43	3.80	32.63	0.00	101.80	54.00	47.80	Average
2	2462.00	66.56	36.43	3.80	32.63	0.00	102.99	74.00	28.99	Peak
3	2483.50	14.39	36.46	3.79	32.67	0.00	50.85	54.00	-3.15	Average
4	2483.50	23.38	36.46	3.79	32.67	0.00	59.84	74.00	-14.16	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Vertical

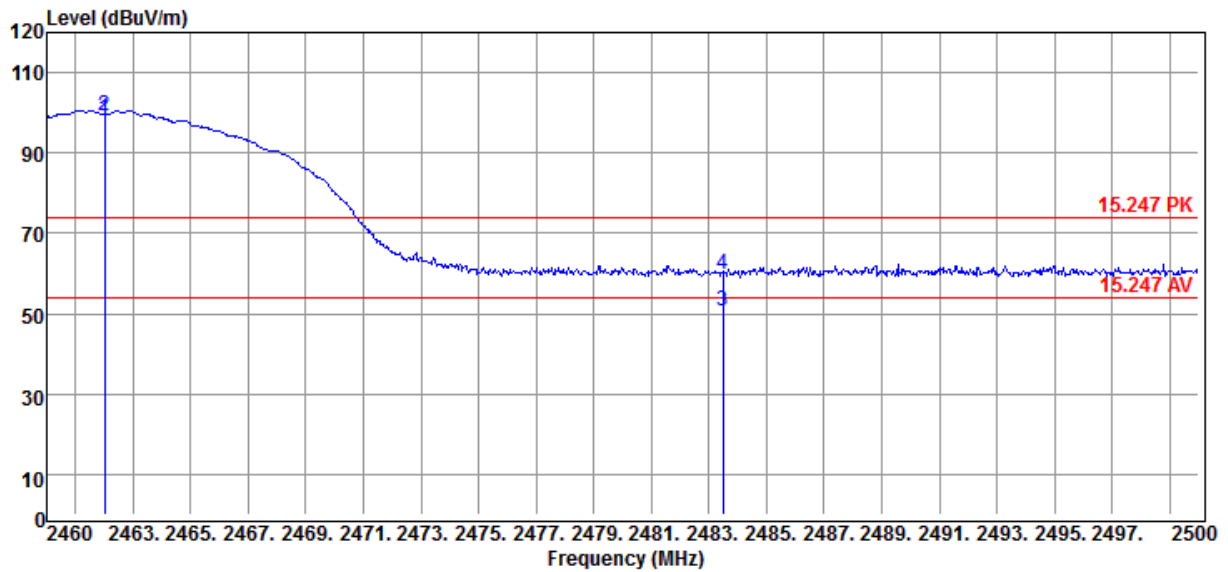

1	2	3	4							
Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	2462.00	61.82	36.43	3.80	32.63	0.00	98.25	54.00	44.25	Average
2	2462.00	63.01	36.43	3.80	32.63	0.00	99.44	74.00	25.44	Peak
3	2483.50	14.17	36.46	3.79	32.67	0.00	50.63	54.00	-3.37	Average
4	2483.50	23.29	36.46	3.79	32.67	0.00	59.75	74.00	-14.25	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**802.11g**

Lowest Channel- Horizontal

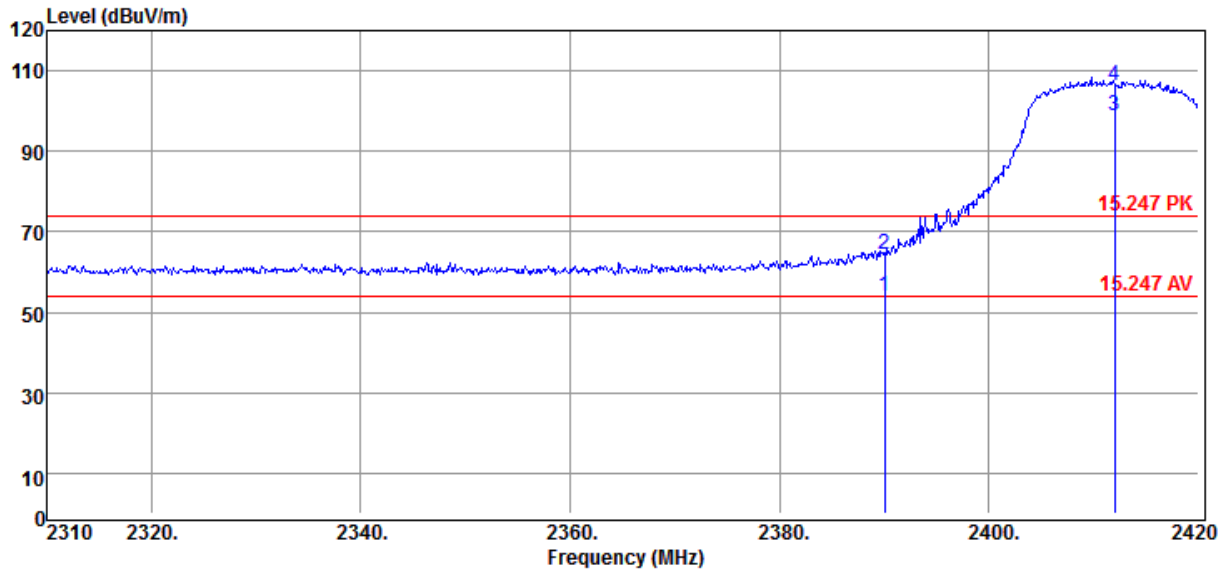

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark
1	2390.00	17.48	36.33	3.83	32.50	0.00	53.81	54.00	-0.19	Average
2	2390.00	27.87	36.33	3.83	32.50	0.00	64.20	74.00	-9.80	Peak
3	2412.00	62.57	36.36	3.82	32.54	0.00	98.93	54.00	44.93	Average
4	2412.00	69.99	36.36	3.82	32.54	0.00	106.35	74.00	32.35	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

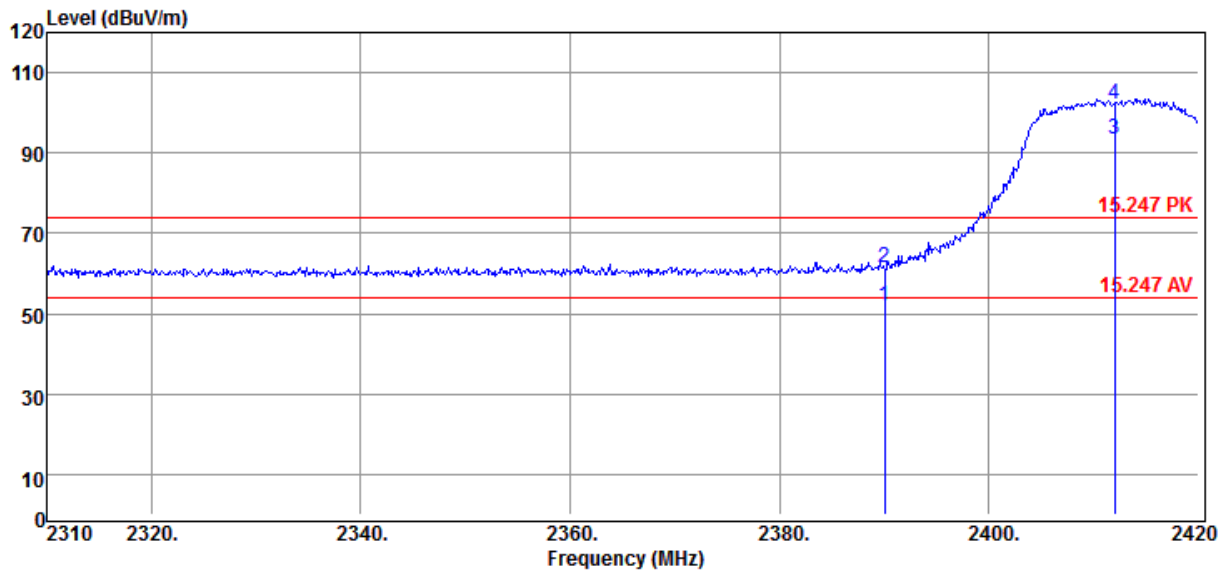

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2390.00	15.37	36.33	3.83	32.50	0.00	51.70	54.00	-2.30	Average
2	2390.00	25.00	36.33	3.83	32.50	0.00	61.33	74.00	-12.67	Peak
3	2412.00	56.92	36.36	3.82	32.54	0.00	93.28	54.00	39.28	Average
4	2412.00	65.97	36.36	3.82	32.54	0.00	102.33	74.00	28.33	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Horizontal

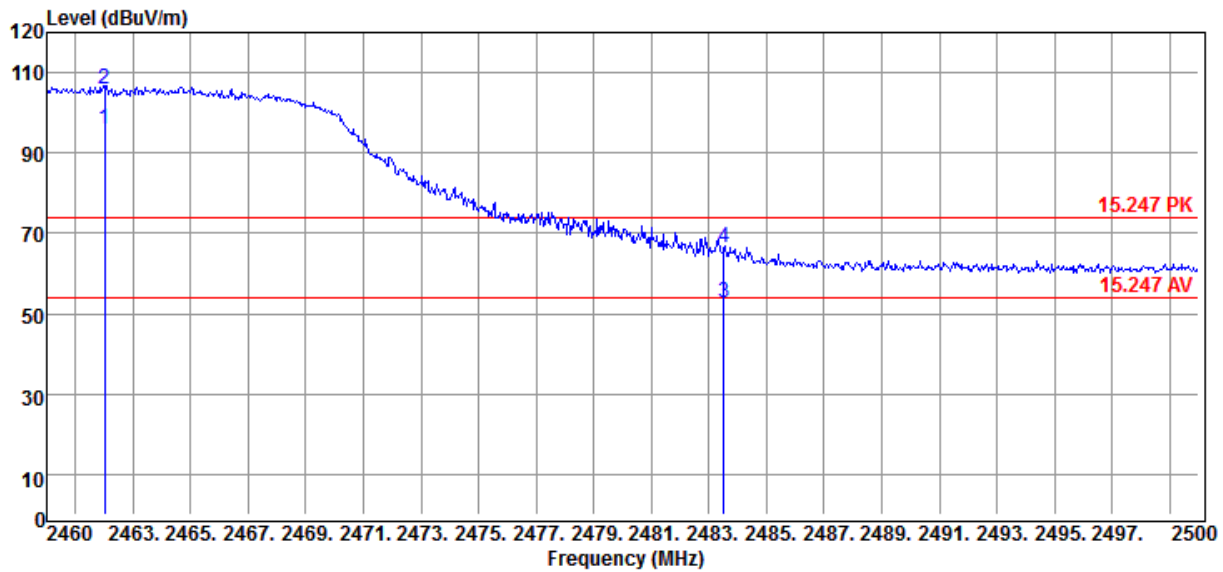

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	2462.00	59.34	36.43	3.80	32.63	0.00	95.77	54.00	41.77	Average
2	2462.00	69.64	36.43	3.80	32.63	0.00	106.07	74.00	32.07	Peak
3	2483.52	16.36	36.46	3.79	32.67	0.00	52.82	54.00	-1.18	Average
4	2483.52	30.14	36.46	3.79	32.67	0.00	66.60	74.00	-7.40	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line





Highest Channel- Vertical

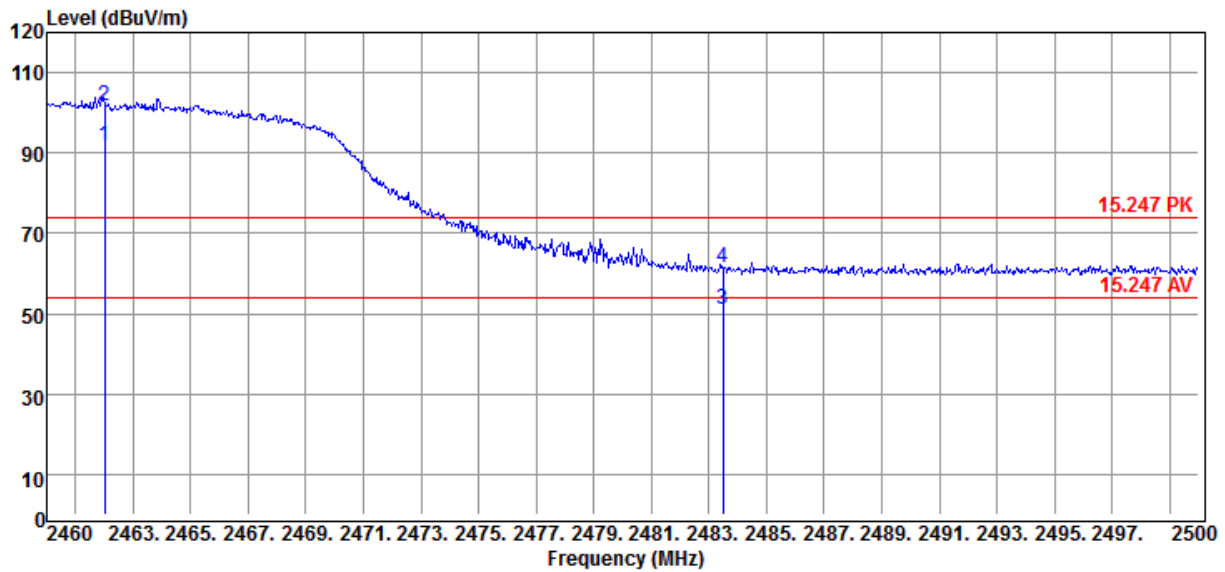

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	2462.00	55.20	36.43	3.80	32.63	0.00	91.63	54.00	37.63	Average
2	2462.00	65.29	36.43	3.80	32.63	0.00	101.72	74.00	27.72	Peak
3	2483.50	14.53	36.46	3.79	32.67	0.00	50.99	54.00	-3.01	Average
4	2483.50	25.12	36.46	3.79	32.67	0.00	61.58	74.00	-12.42	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**802.11 n20**

Lowest Channel- Horizontal

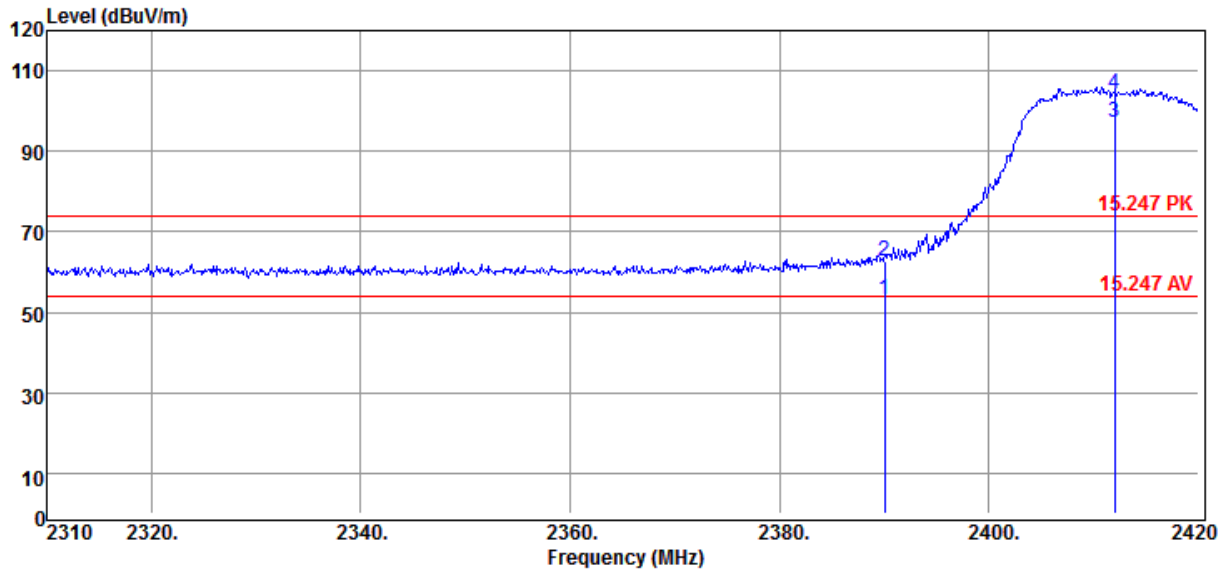

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	2390.00	16.88	36.33	3.83	32.50	0.00	53.21	54.00	-0.79	Average
2	2390.00	26.54	36.33	3.83	32.50	0.00	62.87	74.00	-11.13	Peak
3	2412.00	60.99	36.36	3.82	32.54	0.00	97.35	54.00	43.35	Average
4	2412.00	67.93	36.36	3.82	32.54	0.00	104.29	74.00	30.29	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

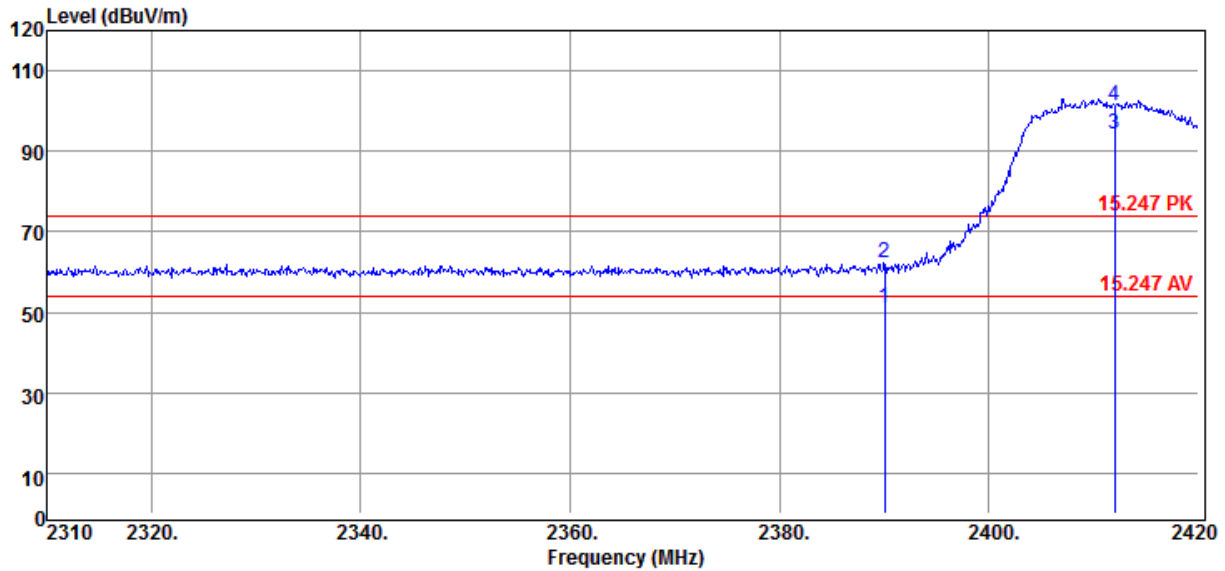

Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark	
1	2390.00	14.78	36.33	3.83	32.50	0.00	51.11	54.00	-2.89	Average
2	2390.00	26.06	36.33	3.83	32.50	0.00	62.39	74.00	-11.61	Peak
3	2412.00	58.01	36.36	3.82	32.54	0.00	94.37	54.00	40.37	Average
4	2412.00	64.97	36.36	3.82	32.54	0.00	101.33	74.00	27.33	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Horizontal

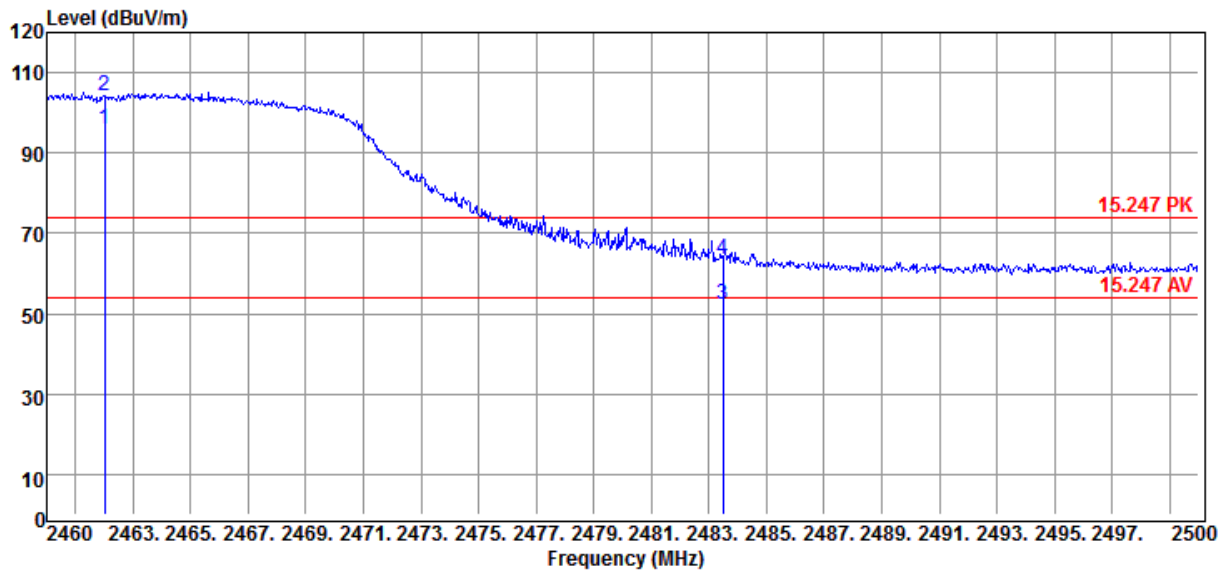

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	2462.00	59.60	36.43	3.80	32.63	0.00	96.03	54.00	42.03	Average
2	2462.00	67.74	36.43	3.80	32.63	0.00	104.17	74.00	30.17	Peak
3	2483.50	15.72	36.46	3.79	32.67	0.00	52.18	54.00	-1.82	Average
4	2483.50	26.90	36.46	3.79	32.67	0.00	63.36	74.00	-10.64	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel- Vertical

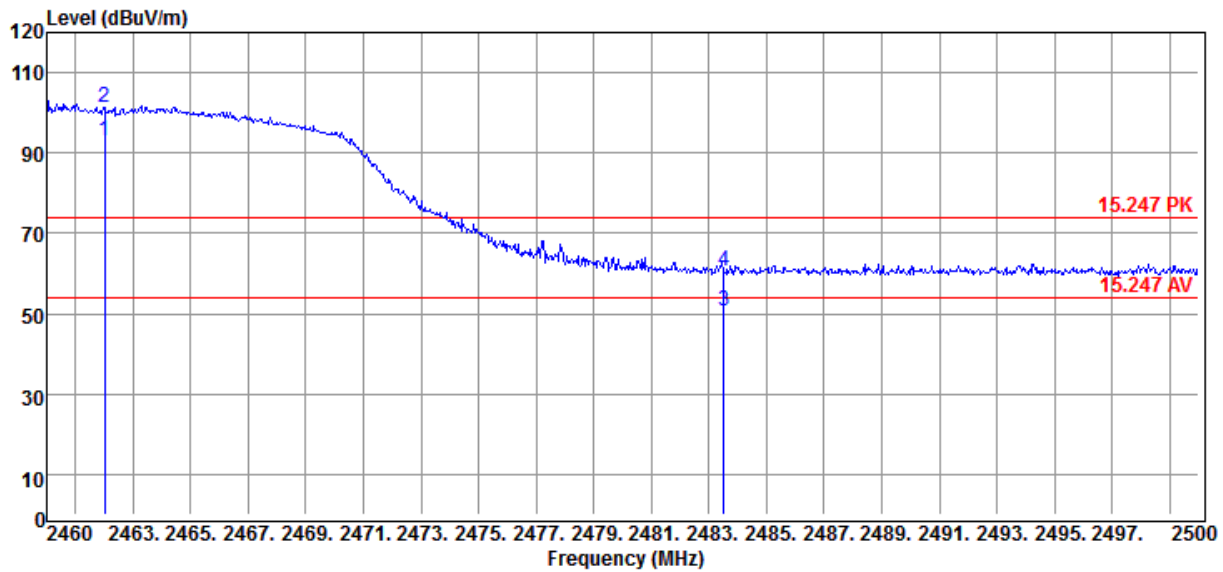

Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark	
1	2462.00	56.69	36.43	3.80	32.63	0.00	93.12	54.00	39.12	Average
2	2462.00	64.98	36.43	3.80	32.63	0.00	101.41	74.00	27.41	Peak
3	2483.52	14.38	36.46	3.79	32.67	0.00	50.84	54.00	-3.16	Average
4	2483.52	24.11	36.46	3.79	32.67	0.00	60.57	74.00	-13.43	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain  
 Real Level = Meter Level + System Factor  
 Margin = Real Level - Limit Line

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.



## 7. 6DB BANDWIDTH

### 7.1 TEST LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 6dB bandwidth of the hopping channel, whichever is greater

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 Mw.

### 7.2 TEST LIMIT

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100KHz.
- c. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 7.3 TEST SETUP LAYOUT



### 7.4 TEST RESULT AND DTA

#### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
1	2412	9.077 MHz
6	2437	8.528 MHz
11	2462	9.077 MHz

#### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
1	2412	15.112 MHz
6	2437	15.062 MHz
11	2462	15.112 MHz

#### 802.11 n20


Channel	Frequency (MHz)	6dB Bandwidth (MHz)
1	2412	15.112 MHz
6	2437	15.112 MHz
11	2462	15.112 MHz




**7.5 TEST DATA:**

**802.11b**


**Lowest Channel**

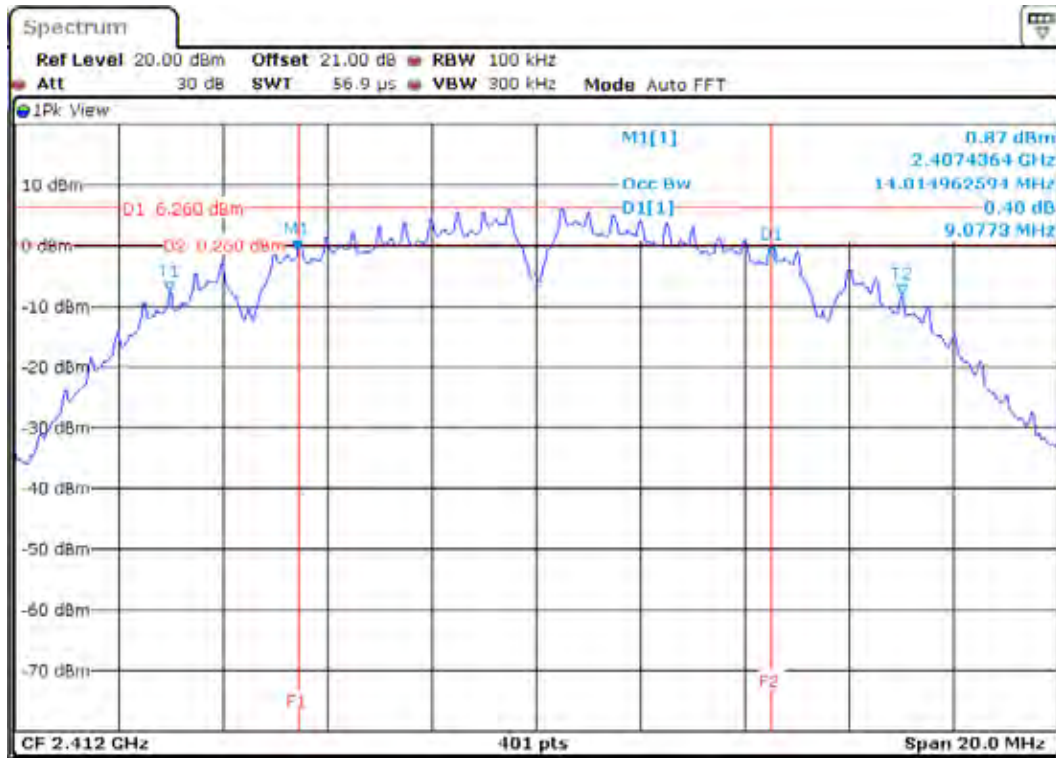


**Middle Channel**

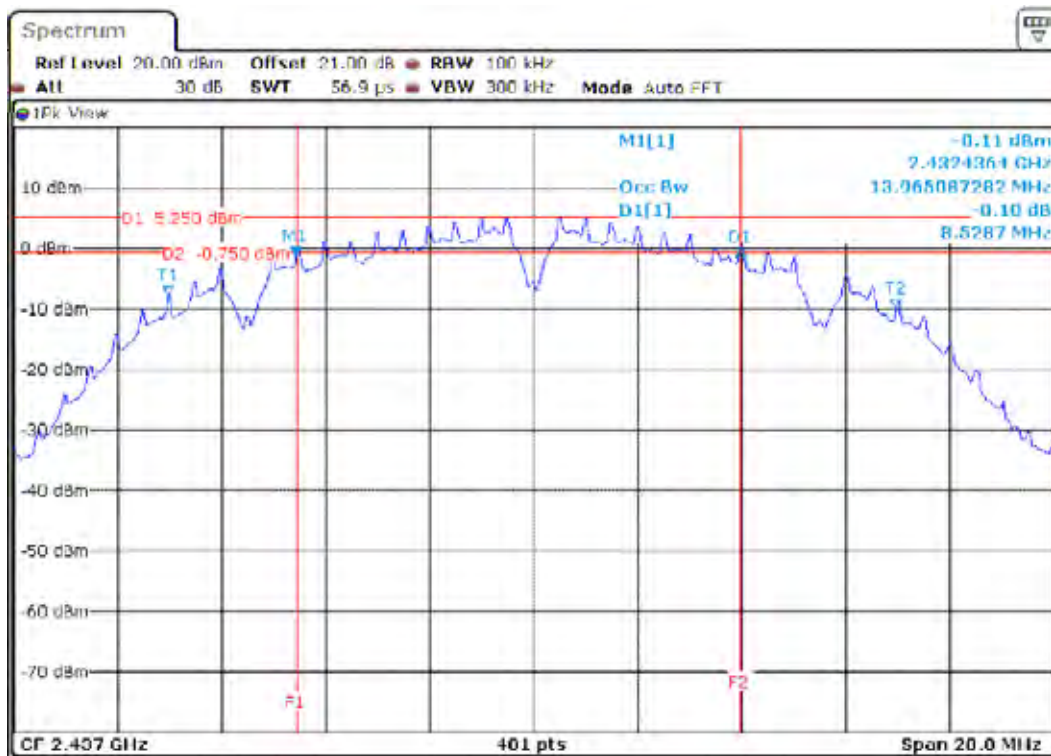

Highest Channel

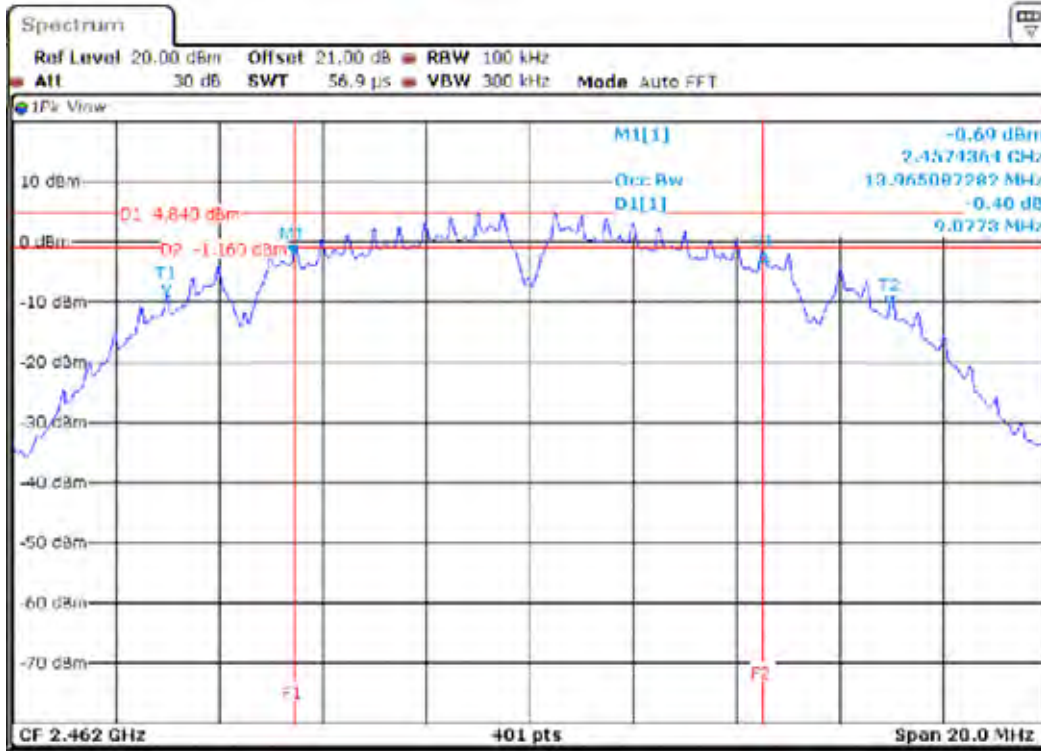


802.11g  
Lowest Channel

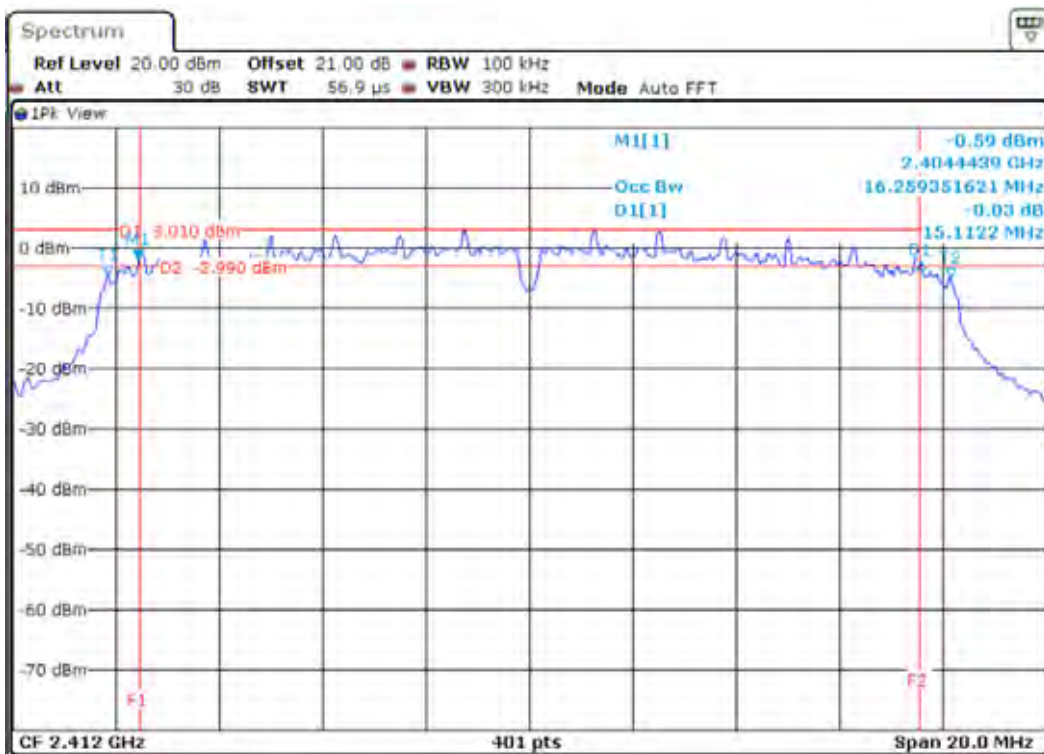






Middle Channel

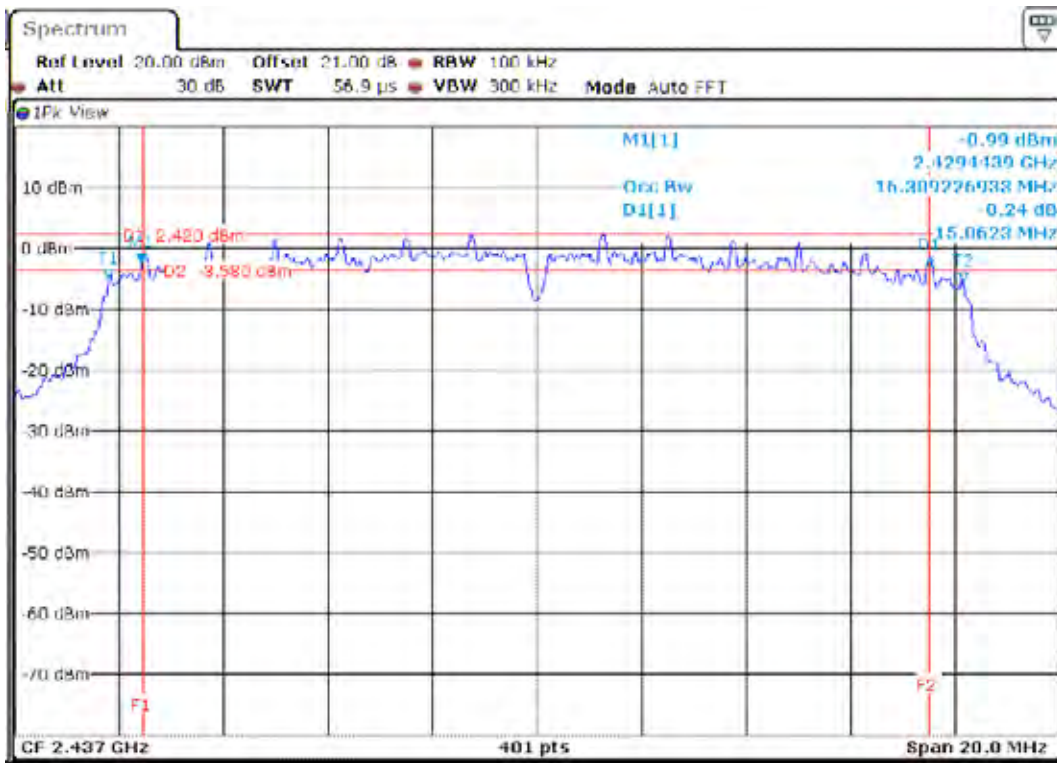


Highest Channel

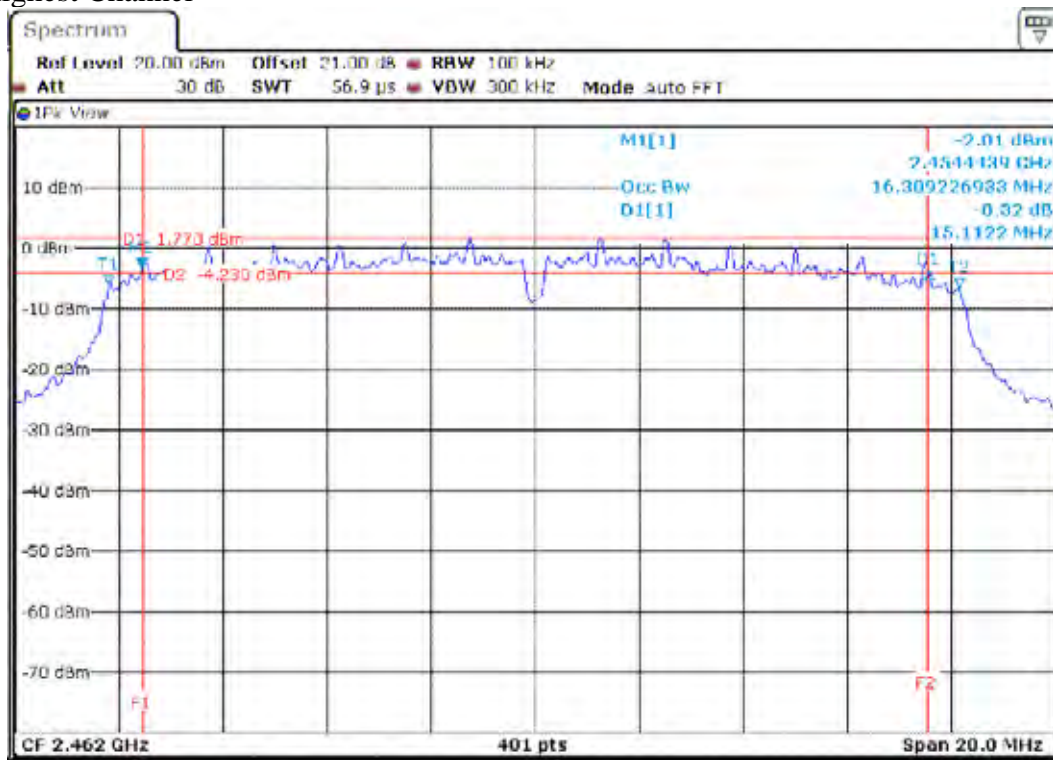




**802.11 n20**  
Lowest Channel

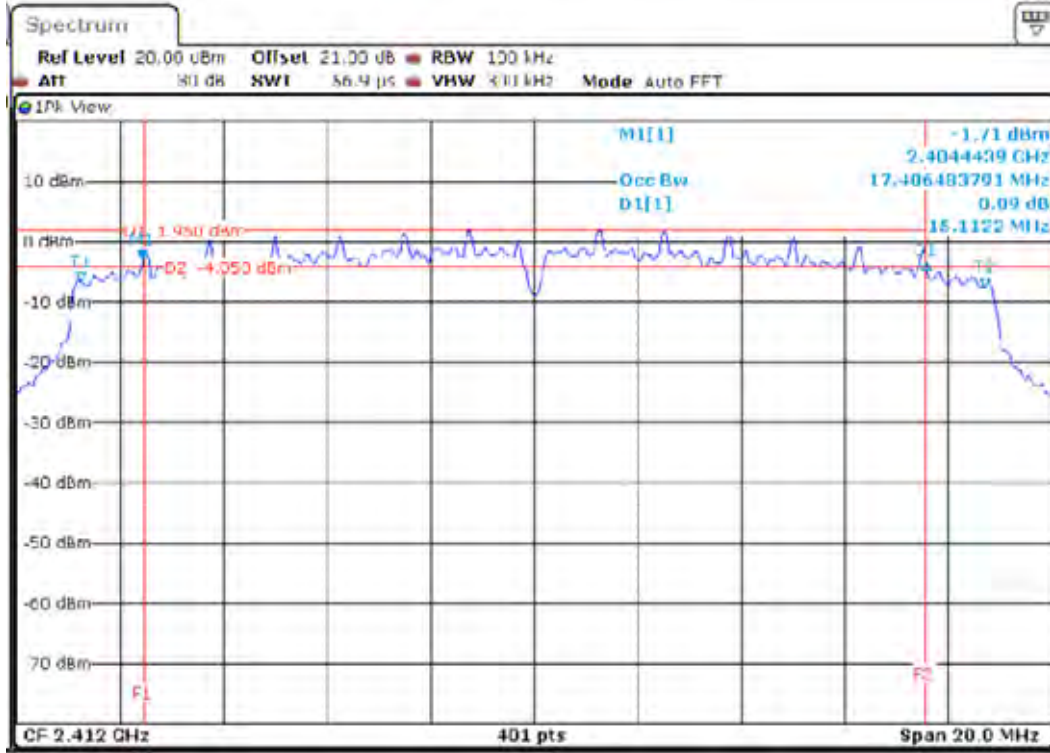


Middle Channel

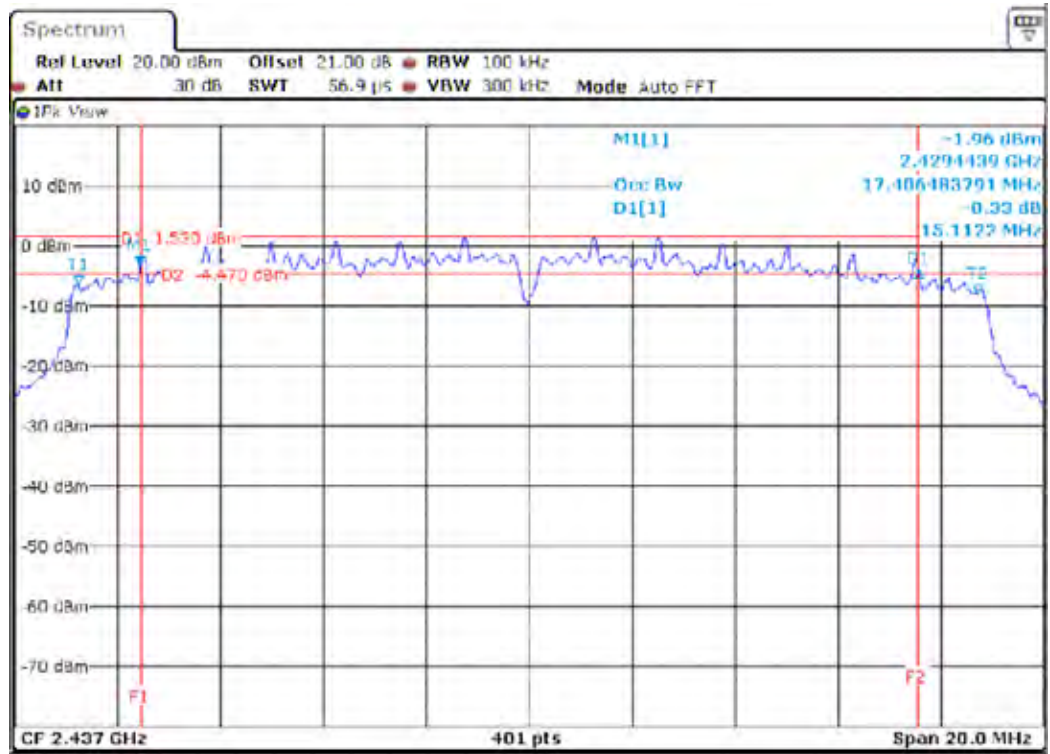




Highest Channel

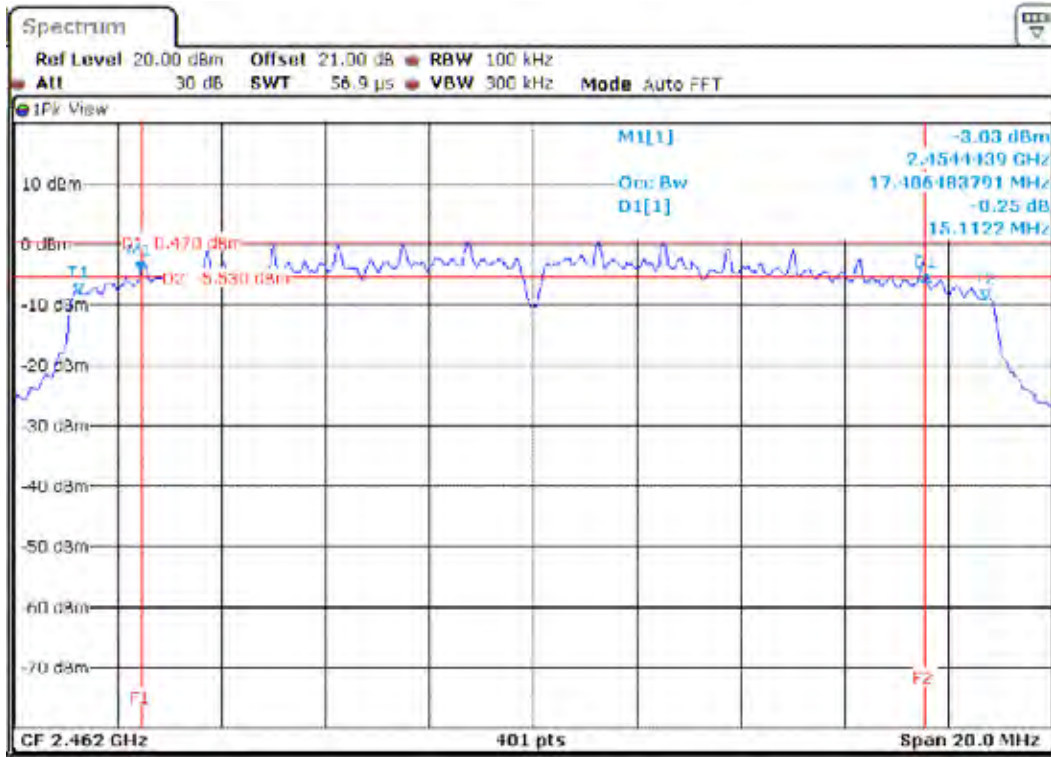

## 8. RADIATED EMISSION

### 8.1 TEST SETUP

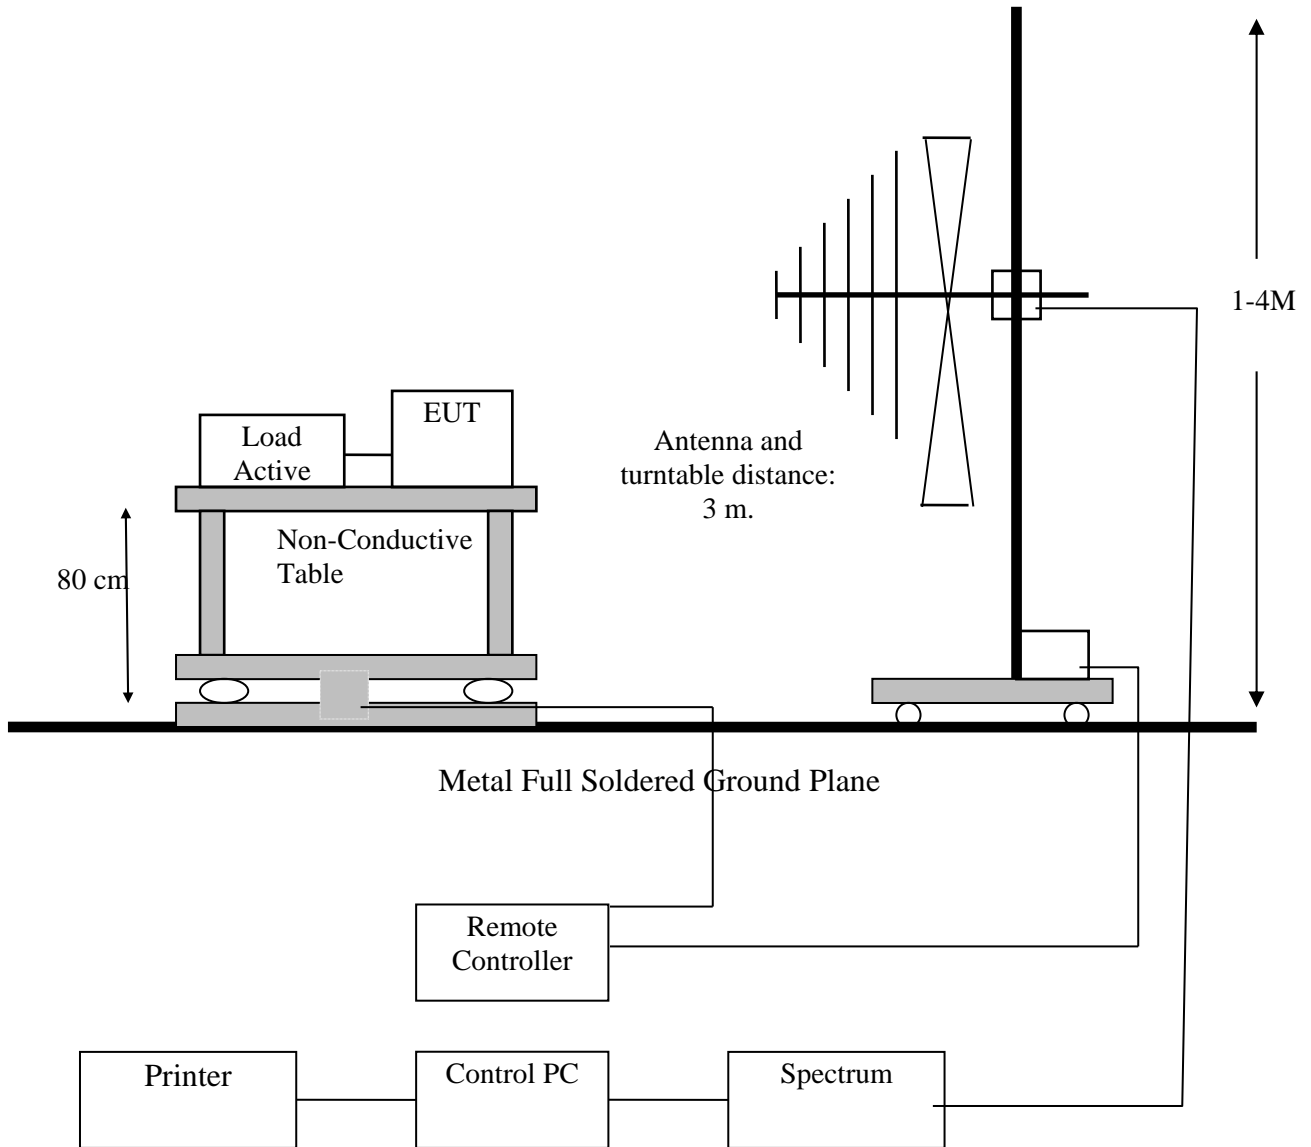



## 8.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

*In the above emission table, the tighter limit applies at the band edges.*

Frequency (Hz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength ( $\text{dB}\mu\text{V/m}$ at 3-meter)
1.705-30	30 (at 30-meter)	69.54
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54



### **8.3 TEST PROCEDURE**

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

### **8.4 RESULT: PASS**


### **8.5 TEST DATA:**

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.



**30MHz ~ 1GMz**

Horizontal

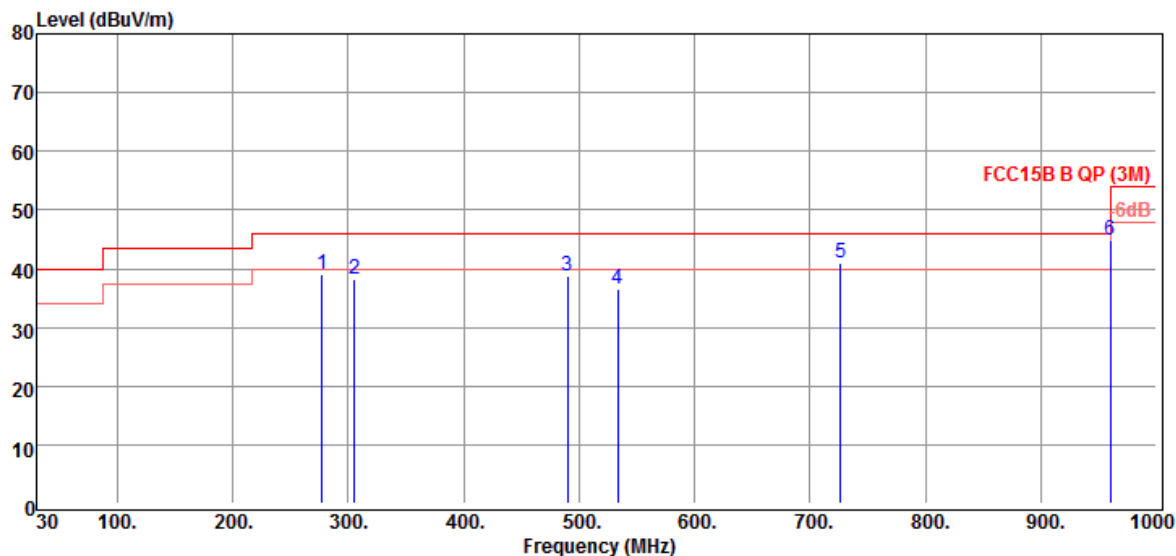

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	277.35	46.14	-7.09	1.66	19.75	28.50	39.05	46.00	-6.95	Peak
2	305.48	44.60	-6.43	1.79	20.21	28.43	38.17	46.00	-7.83	Peak
3	489.78	40.04	-1.15	2.59	24.02	27.76	38.89	46.00	-7.11	Peak
4	533.43	36.75	-0.22	2.64	24.67	27.53	36.53	46.00	-9.47	Peak
5	726.46	37.07	4.00	3.13	27.07	26.20	41.07	46.00	-4.93	Peak
6	960.00	36.30	8.54	3.71	29.62	24.79	44.84	46.00	-1.16	QP


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Vertical

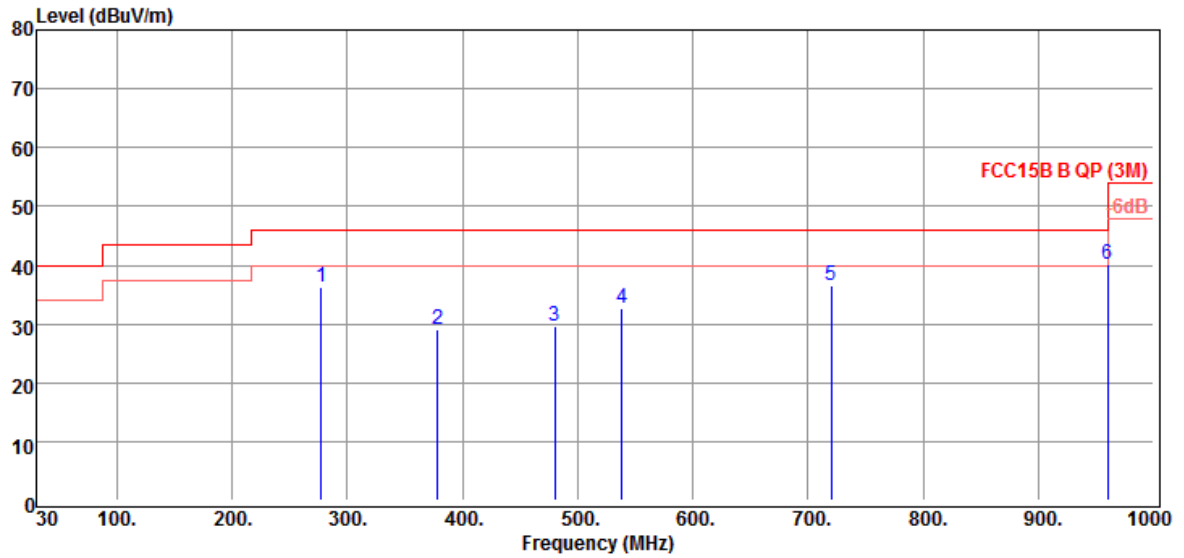

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	277.35	43.39	-7.09	1.66	19.75	28.50	36.30	46.00	-9.70	Peak
2	378.23	33.28	-4.17	2.22	21.78	28.17	29.11	46.00	-16.89	Peak
3	480.08	31.15	-1.40	2.56	23.84	27.80	29.75	46.00	-16.25	Peak
4	538.28	32.71	-0.11	2.65	24.74	27.50	32.60	46.00	-13.40	Peak
5	720.64	32.64	3.88	3.12	26.99	26.23	36.52	46.00	-9.48	Peak
6	960.23	31.49	8.54	3.71	29.62	24.79	40.03	54.00	-13.97	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line






**1GHz ~26.5GHz**

**802.11b**

Lowest Channel- Horizontal

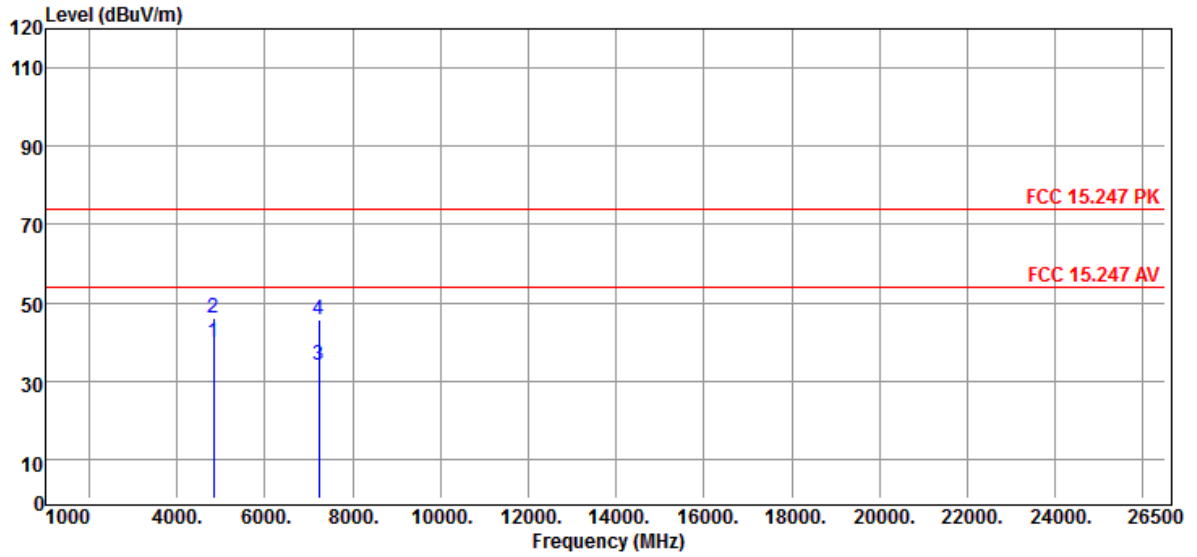

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4824.00	46.02	-5.97	6.28	34.59	46.84	40.05	54.00	-13.95	Average
2	4824.00	52.13	-5.97	6.28	34.59	46.84	46.16	74.00	-27.84	Peak
3	7236.00	36.33	-2.32	8.11	36.03	46.46	34.01	54.00	-19.99	Average
4	7236.00	47.99	-2.32	8.11	36.03	46.46	45.67	74.00	-28.33	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

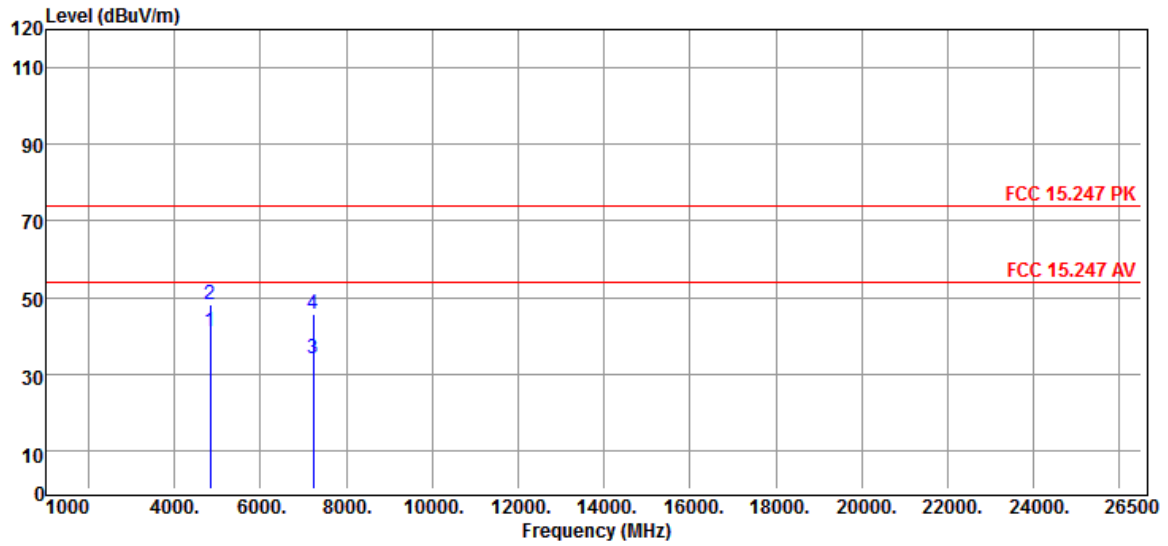

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line	dB	
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m		
1	4824.00	47.03	-5.97	6.28	34.59	46.84	41.06	54.00	-12.94	Average
2	4824.00	54.18	-5.97	6.28	34.59	46.84	48.21	74.00	-25.79	Peak
3	7236.00	36.41	-2.32	8.11	36.03	46.46	34.09	54.00	-19.91	Average
4	7236.00	48.10	-2.32	8.11	36.03	46.46	45.78	74.00	-28.22	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel- Horizontal

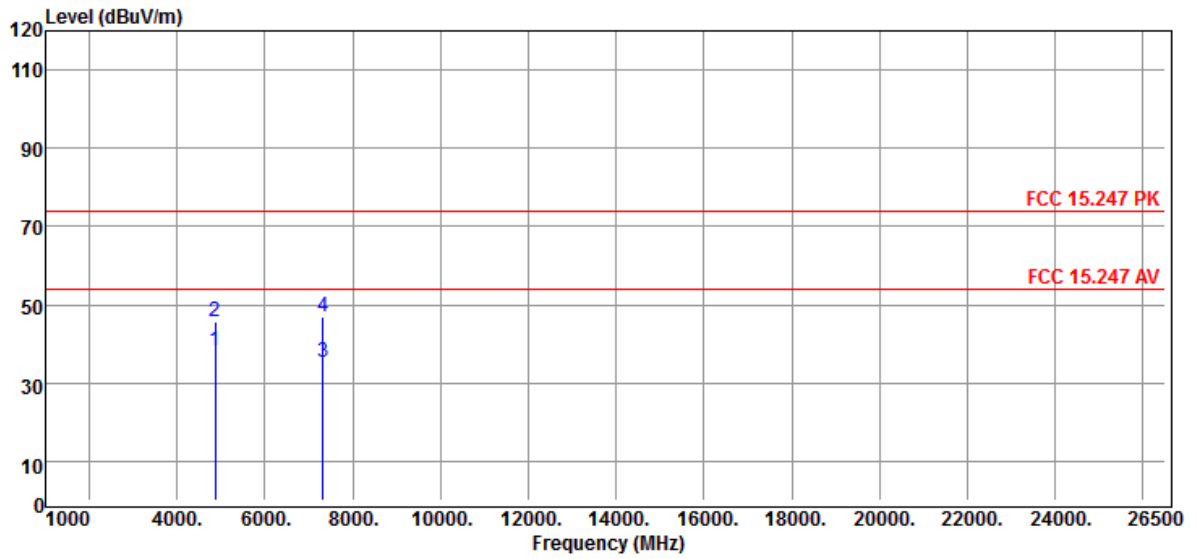

1	2	3	4							
Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4874.00	43.93	-5.89	6.32	34.62	46.83	38.04	54.00	-15.96	Average
2	4874.00	51.40	-5.89	6.32	34.62	46.83	45.51	74.00	-28.49	Peak
3	7311.00	37.34	-2.10	8.17	36.14	46.41	35.24	54.00	-18.76	Average
4	7311.00	48.92	-2.10	8.17	36.14	46.41	46.82	74.00	-27.18	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel-Vertical

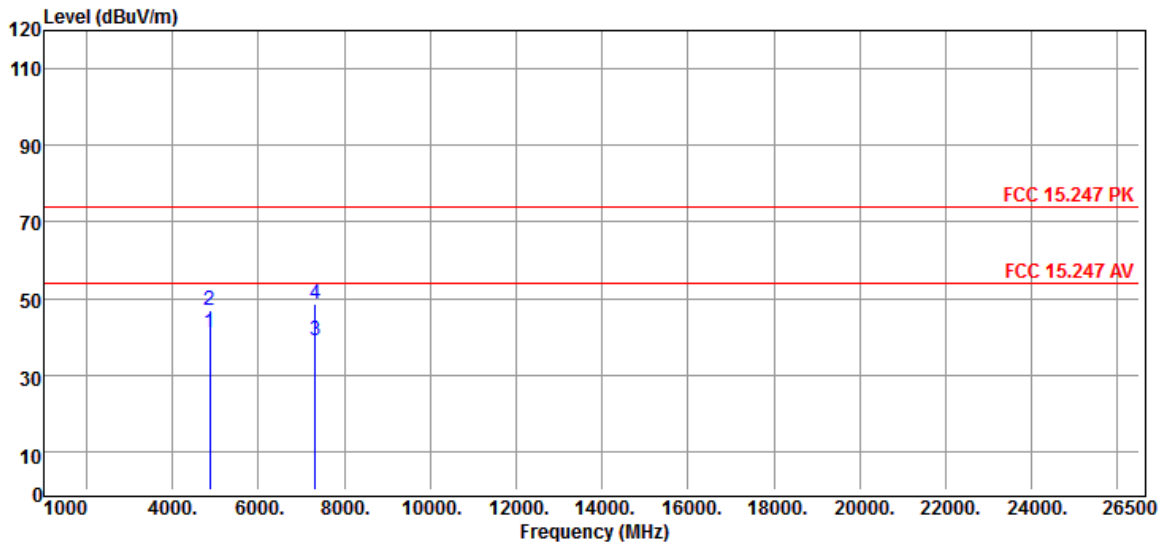

1	2	3	4	5	6	7	8	9	10	
Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4874.00	47.20	-5.89	6.32	34.62	46.83	41.31	54.00	-12.69	Average
2	4874.00	52.84	-5.89	6.32	34.62	46.95	74.00	-27.05	Peak	
3	7311.00	41.32	-2.10	8.17	36.14	46.41	39.22	54.00	-14.78	Average
4	7311.00	50.67	-2.10	8.17	36.14	46.41	48.57	74.00	-25.43	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel-Vertical

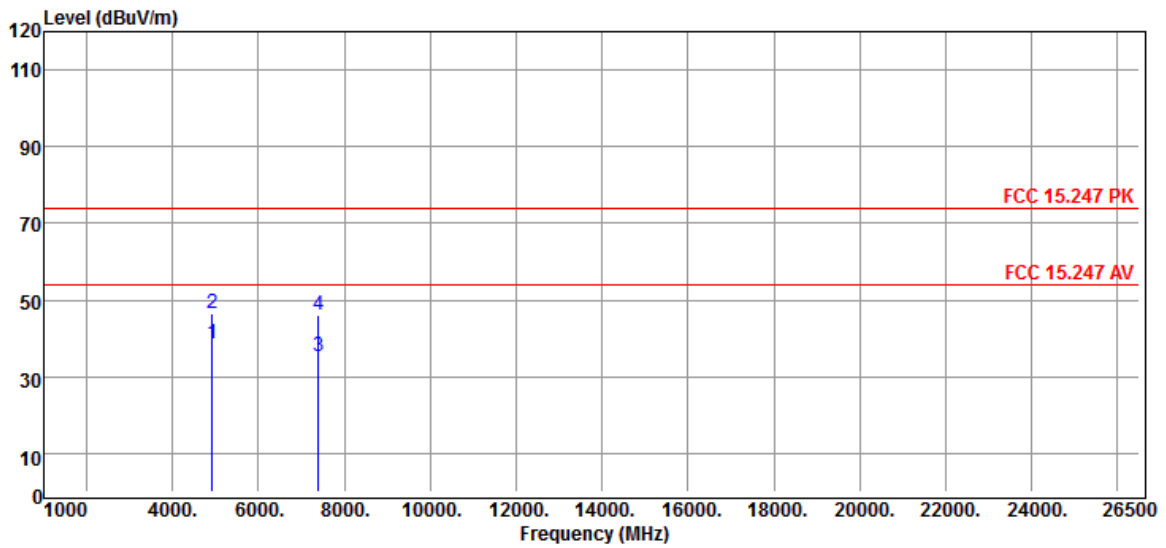

Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark	
1	4924.00	44.30	-5.82	6.35	34.65	46.82	38.48	54.00	-15.52	Average
2	4924.00	52.27	-5.82	6.35	34.65	46.82	46.45	74.00	-27.55	Peak
3	7386.00	37.19	-1.90	8.23	36.24	46.37	35.29	54.00	-18.71	Average
4	7386.00	47.98	-1.90	8.23	36.24	46.37	46.08	74.00	-27.92	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel-Vertical

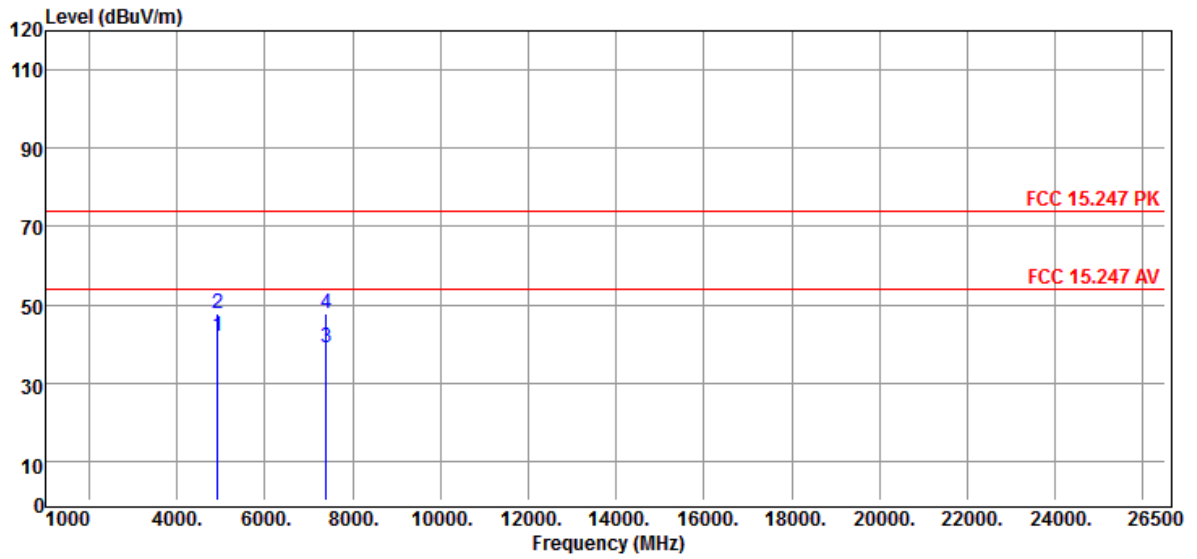

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4924.00	47.60	-5.82	6.35	34.65	46.82	41.78	54.00	-12.22	Average
2	4924.00	53.65	-5.82	6.35	34.65	46.82	47.83	74.00	-26.17	Peak
3	7386.00	40.79	-1.90	8.23	36.24	46.37	38.89	54.00	-15.11	Average
4	7386.00	49.68	-1.90	8.23	36.24	46.37	47.78	74.00	-26.22	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**802.11g**

Lowest Channel- Horizontal

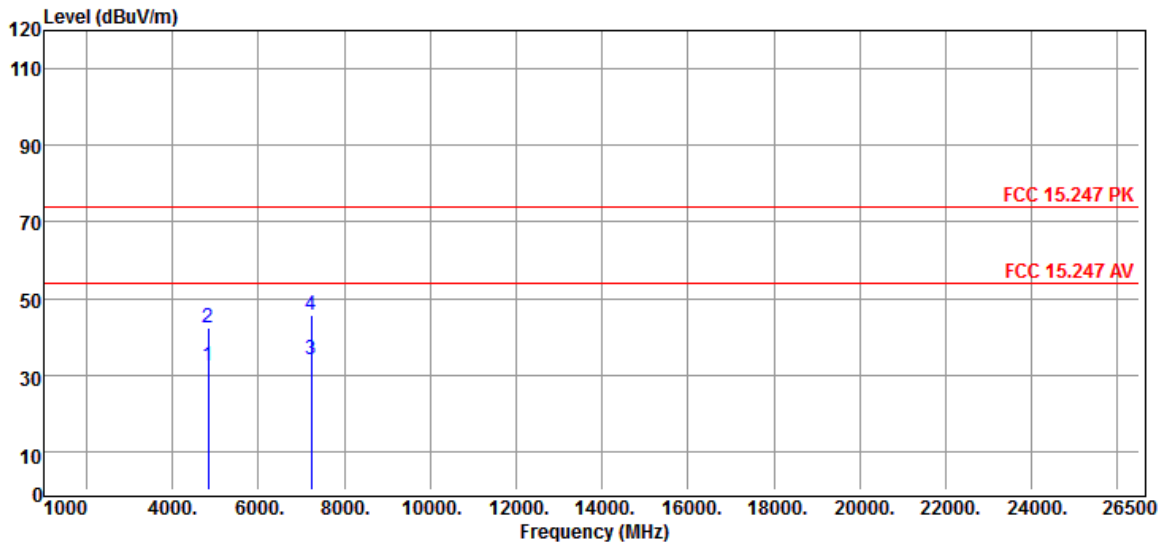

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4824.00	38.16	-5.97	6.28	34.59	46.84	32.19	54.00	-21.81	Average
2	4824.00	48.35	-5.97	6.28	34.59	46.84	42.38	74.00	-31.62	Peak
3	7236.00	36.44	-2.32	8.11	36.03	46.46	34.12	54.00	-19.88	Average
4	7236.00	48.10	-2.32	8.11	36.03	46.46	45.78	74.00	-28.22	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

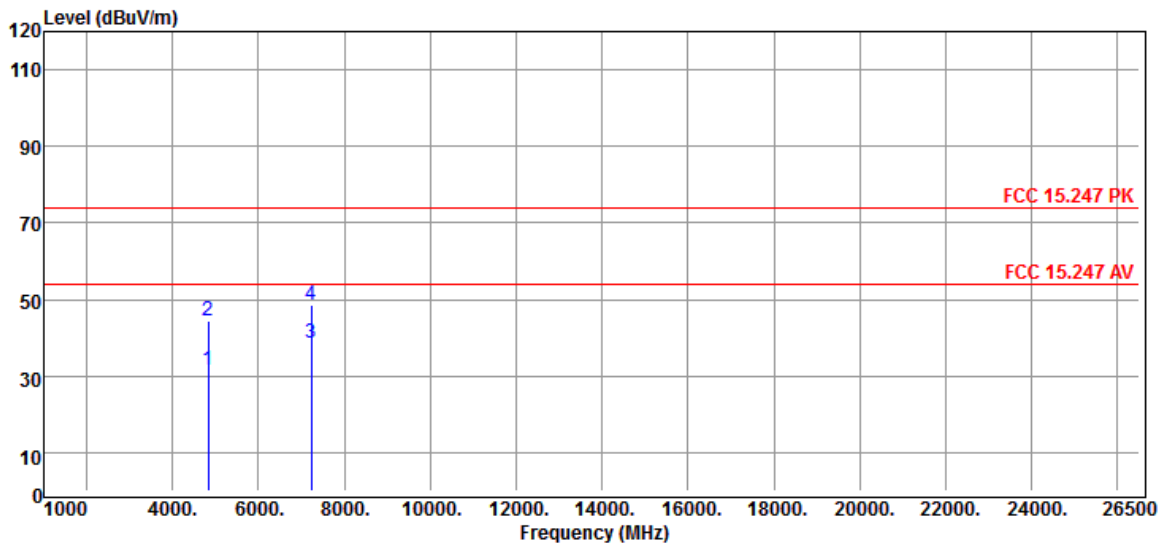

Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark	
1	4824.00	37.68	-5.97	6.28	34.59	46.84	31.71	54.00	-22.29	Average
2	4824.00	50.44	-5.97	6.28	34.59	46.84	44.47	74.00	-29.53	Peak
3	7236.00	40.84	-2.32	8.11	36.03	46.46	38.52	54.00	-15.48	Average
4	7236.00	50.86	-2.32	8.11	36.03	46.46	48.54	74.00	-25.46	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line





Middle Channel- Horizontal

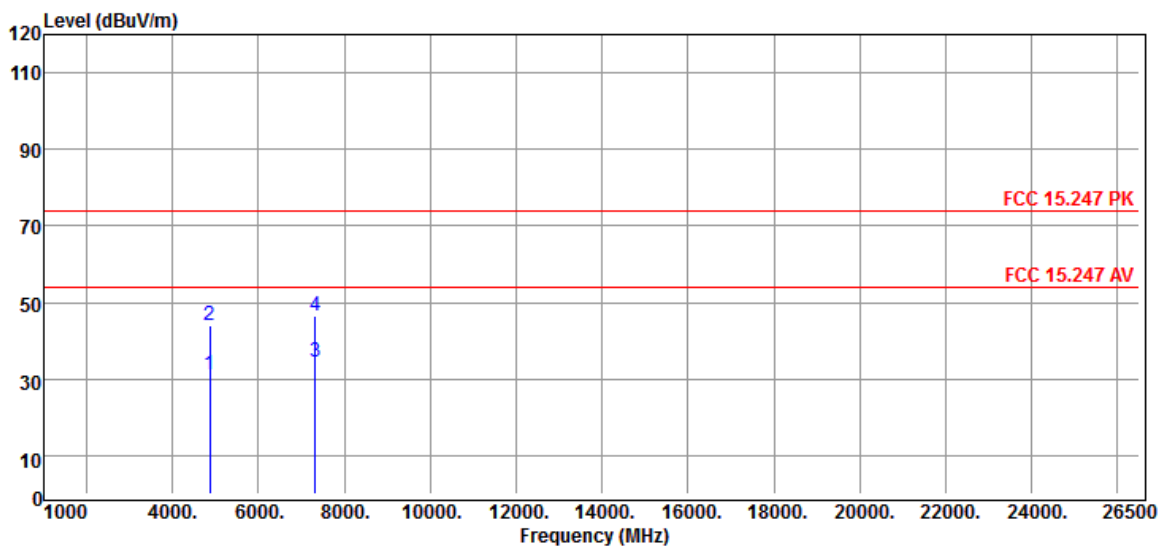

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark	
1	4874.00	37.18	-5.89	6.32	34.62	46.83	31.29	54.00	-22.71	Average
2	4874.00	49.73	-5.89	6.32	34.62	46.83	43.84	74.00	-30.16	Peak
3	7311.00	36.38	-2.10	8.17	36.14	46.41	34.28	54.00	-19.72	Average
4	7311.00	48.50	-2.10	8.17	36.14	46.41	46.40	74.00	-27.60	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel-Vertical

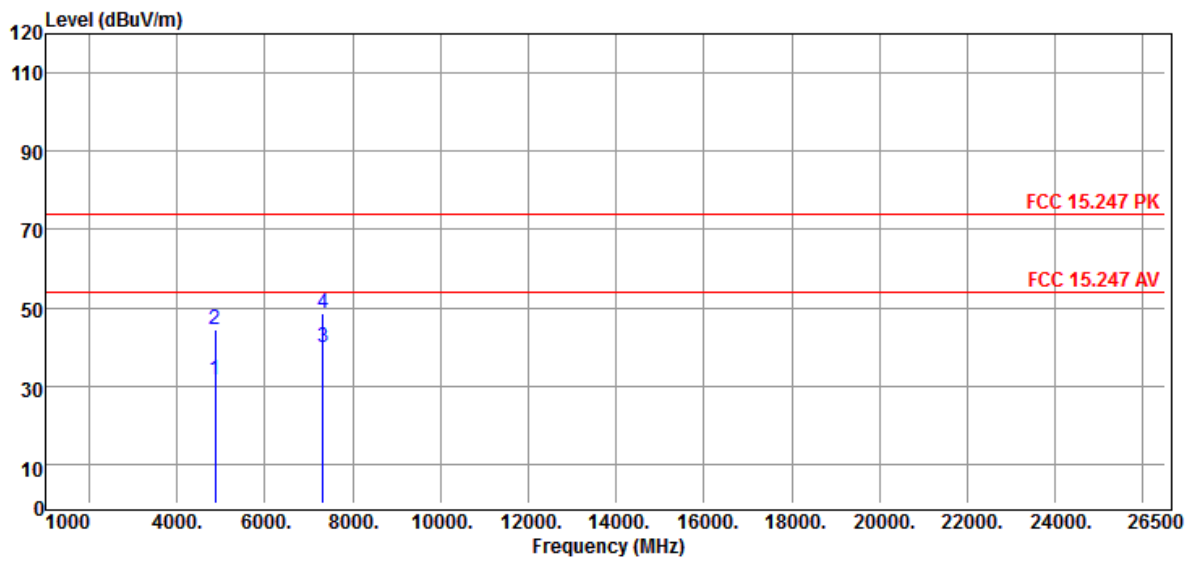

	Freq	Meter	System	Cable	Antenna	Preamp	Real	Limit	Margin	Remark
	MHz	Level	Factor	Loss	Factor	Gain	Level	Line	dB	
		dBuV	dB/m	dB	dB/m	dB	dBuV/m	dBuV/m		
1	4874.00	37.27	-5.89	6.32	34.62	46.83	31.38	54.00	-22.62	Average
2	4874.00	50.18	-5.89	6.32	34.62	46.83	44.29	74.00	-29.71	Peak
3	7311.00	41.81	-2.10	8.17	36.14	46.41	39.71	54.00	-14.29	Average
4	7311.00	50.53	-2.10	8.17	36.14	46.41	48.43	74.00	-25.57	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel-Vertical

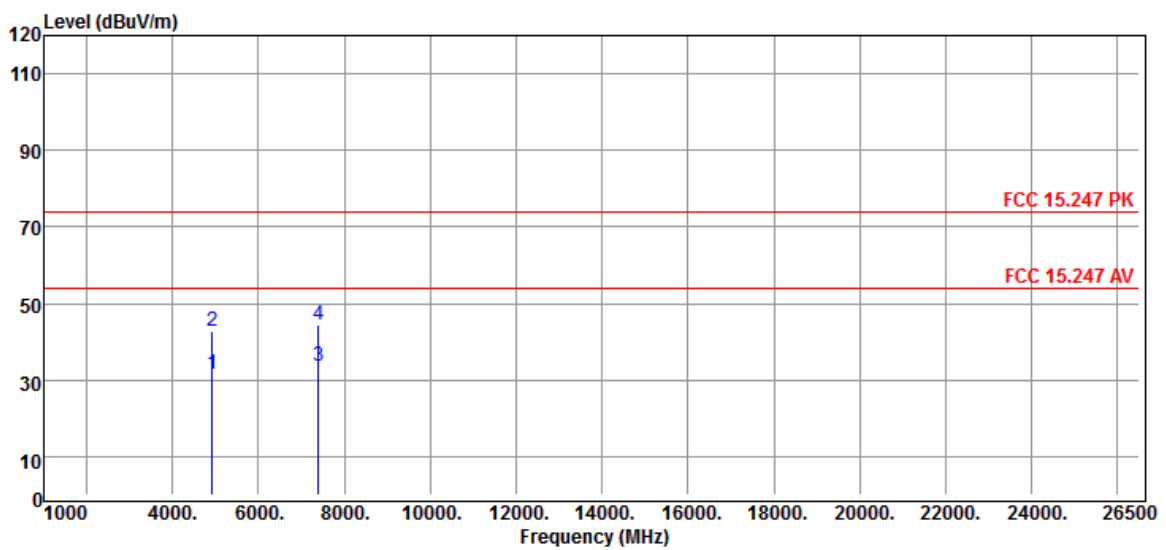

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4924.00	37.55	-5.82	6.35	34.65	46.82	31.73	54.00	-22.27	Average
2	4924.00	48.53	-5.82	6.35	34.65	46.82	42.71	74.00	-31.29	Peak
3	7386.00	35.62	-1.90	8.23	36.24	46.37	33.72	54.00	-20.28	Average
4	7386.00	46.34	-1.90	8.23	36.24	46.37	44.44	74.00	-29.56	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel-Vertical

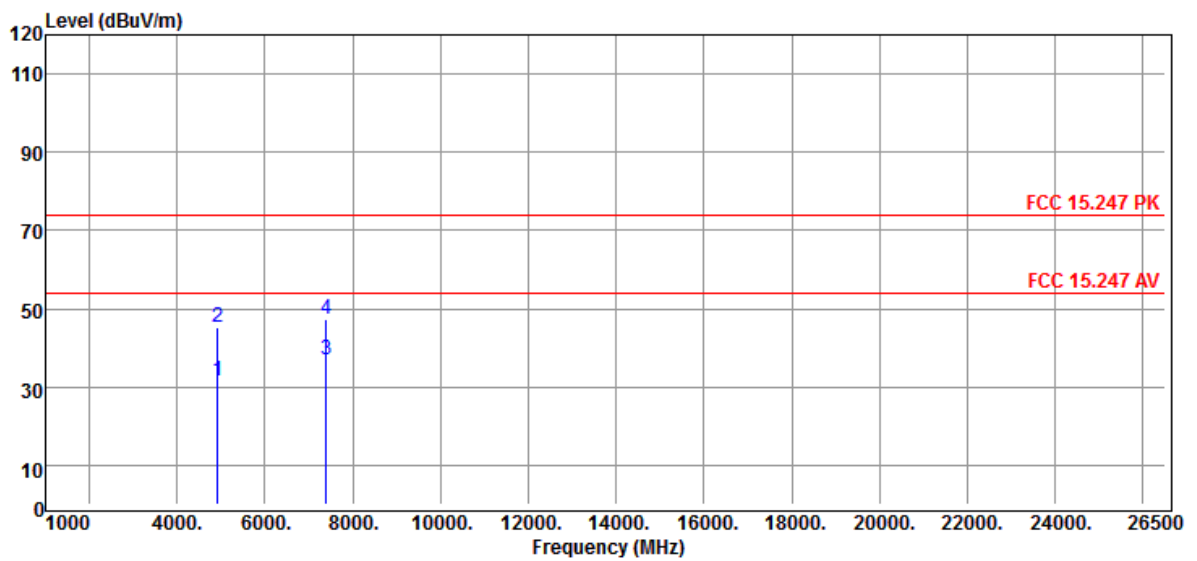

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4924.00	37.43	-5.82	6.35	34.65	46.82	31.61	54.00	-22.39	Average
2	4924.00	51.07	-5.82	6.35	34.65	46.82	45.25	74.00	-28.75	Peak
3	7386.00	39.03	-1.90	8.23	36.24	46.37	37.13	54.00	-16.87	Average
4	7386.00	49.42	-1.90	8.23	36.24	46.37	47.52	74.00	-26.48	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



**802.11 n20**

Lowest Channel- Horizontal

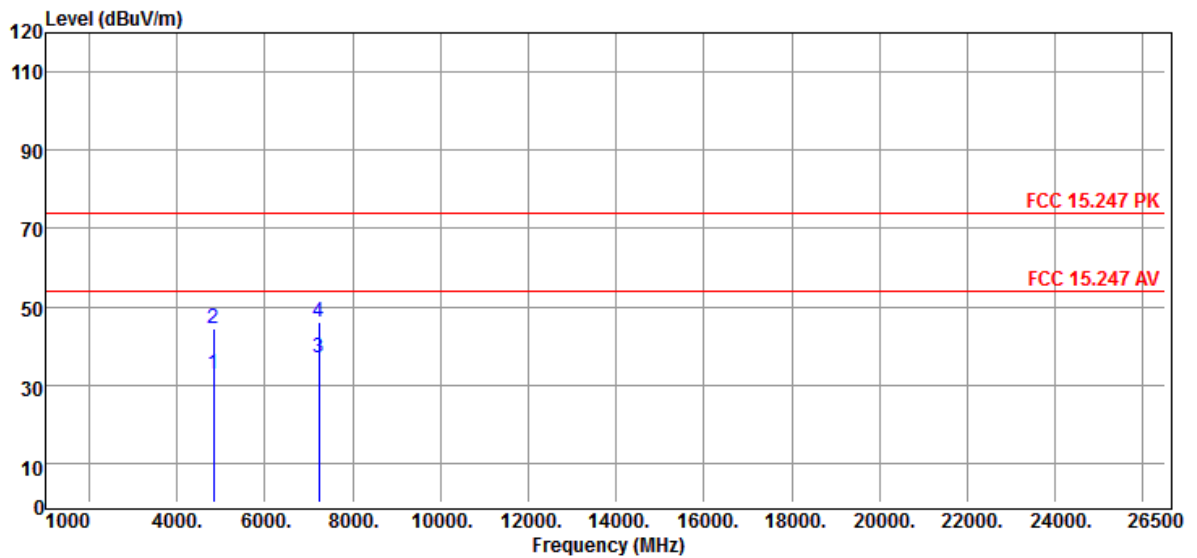

	Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark
1	4824.00	38.82	-5.97	6.28	34.59	46.84	32.85	54.00	-21.15	Average
2	4824.00	50.30	-5.97	6.28	34.59	46.84	44.33	74.00	-29.67	Peak
3	7236.00	39.17	-2.32	8.11	36.03	46.46	36.85	54.00	-17.15	Average
4	7236.00	48.59	-2.32	8.11	36.03	46.46	46.27	74.00	-27.73	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Lowest Channel-Vertical

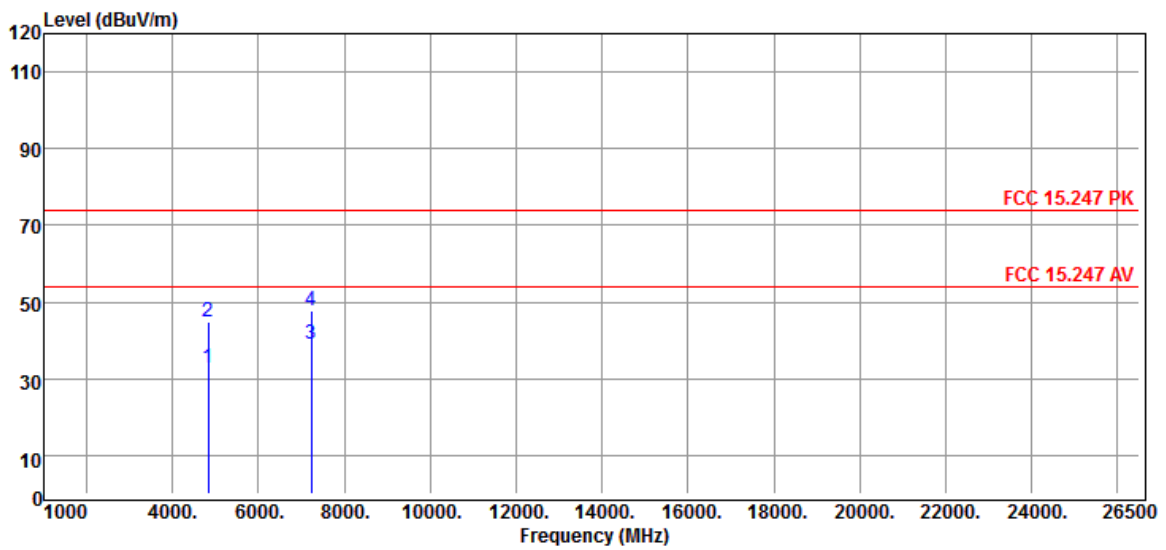

1	2	3	4	5	6	7	8	9	10	
1	2	3	4	5	6	7	8	9	10	
1	2	3	4	5	6	7	8	9	10	
1	2	3	4	5	6	7	8	9	10	
1	4824.00	38.91	-5.97	6.28	34.59	46.84	32.94	54.00	-21.06	Average
2	4824.00	50.93	-5.97	6.28	34.59	46.84	44.96	74.00	-29.04	Peak
3	7236.00	41.45	-2.32	8.11	36.03	46.46	39.13	54.00	-14.87	Average
4	7236.00	50.05	-2.32	8.11	36.03	46.46	47.73	74.00	-26.27	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Middle Channel- Horizontal

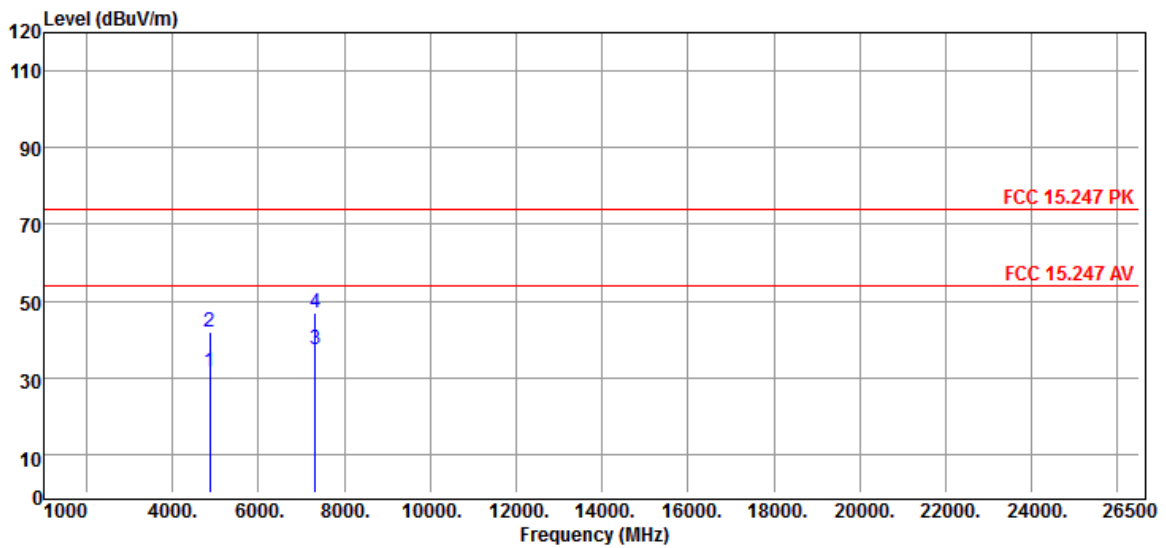


Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4874.00	37.45	-5.89	6.32	34.62	46.83	31.56	54.00	-22.44	Average
2	4874.00	47.90	-5.89	6.32	34.62	46.83	42.01	74.00	-31.99	Peak
3	7311.00	39.64	-2.10	8.17	36.14	46.41	37.54	54.00	-16.46	Average
4	7311.00	49.10	-2.10	8.17	36.14	46.41	47.00	74.00	-27.00	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain  
Real Level = Meter Level + System Factor  
Margin = Real Level - Limit Line



Middle Channel-Vertical

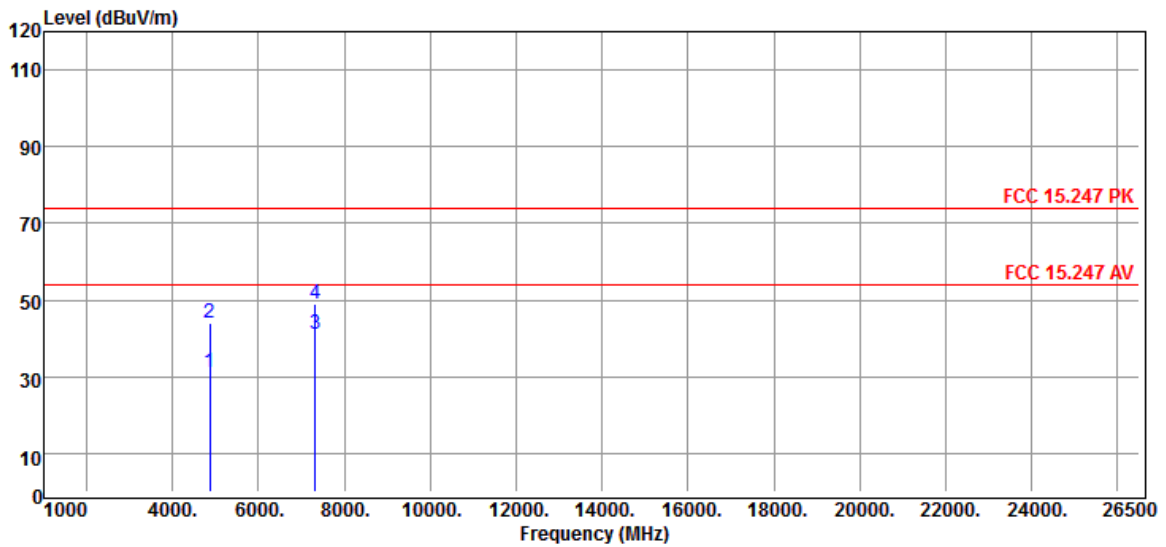

Freq MHz	Meter Level dBUV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBUV/m	Limit Line dBUV/m	Margin dB	Remark	
1	4874.00	37.24	-5.89	6.32	34.62	46.83	31.35	54.00	-22.65	Average
2	4874.00	50.03	-5.89	6.32	34.62	46.83	44.14	74.00	-29.86	Peak
3	7311.00	43.13	-2.10	8.17	36.14	46.41	41.03	54.00	-12.97	Average
4	7311.00	51.05	-2.10	8.17	36.14	46.41	48.95	74.00	-25.05	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain


Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line





Highest Channel-Horizontal

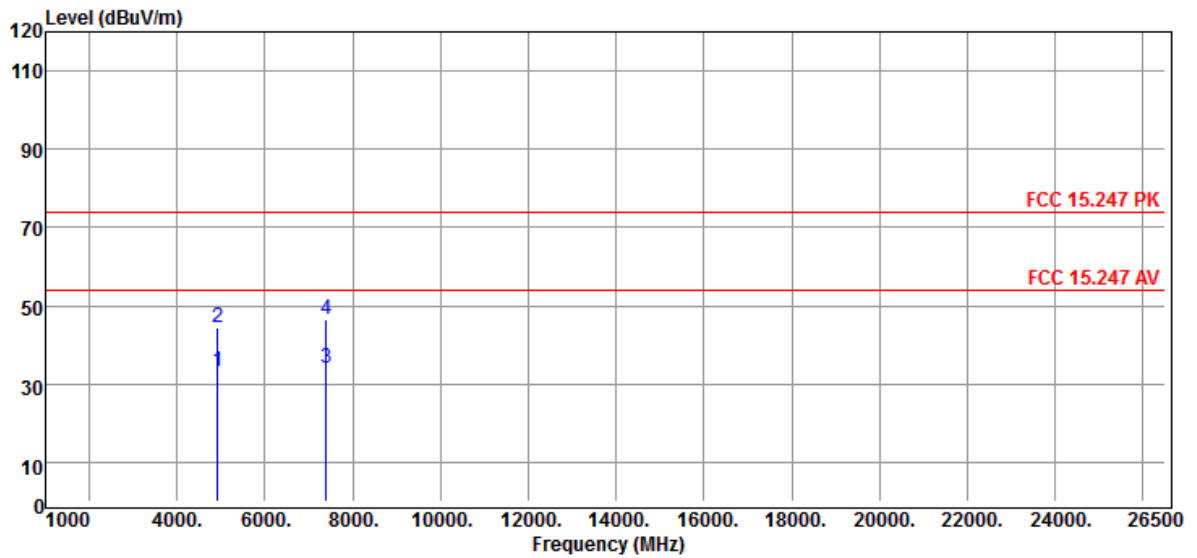

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4924.00	38.86	-5.82	6.35	34.65	46.82	33.04	54.00	-20.96	Average
2	4924.00	50.08	-5.82	6.35	34.65	46.82	44.26	74.00	-29.74	Peak
3	7386.00	35.89	-1.90	8.23	36.24	46.37	33.99	54.00	-20.01	Average
4	7386.00	48.26	-1.90	8.23	36.24	46.37	46.36	74.00	-27.64	Peak


System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line



Highest Channel -Vertical

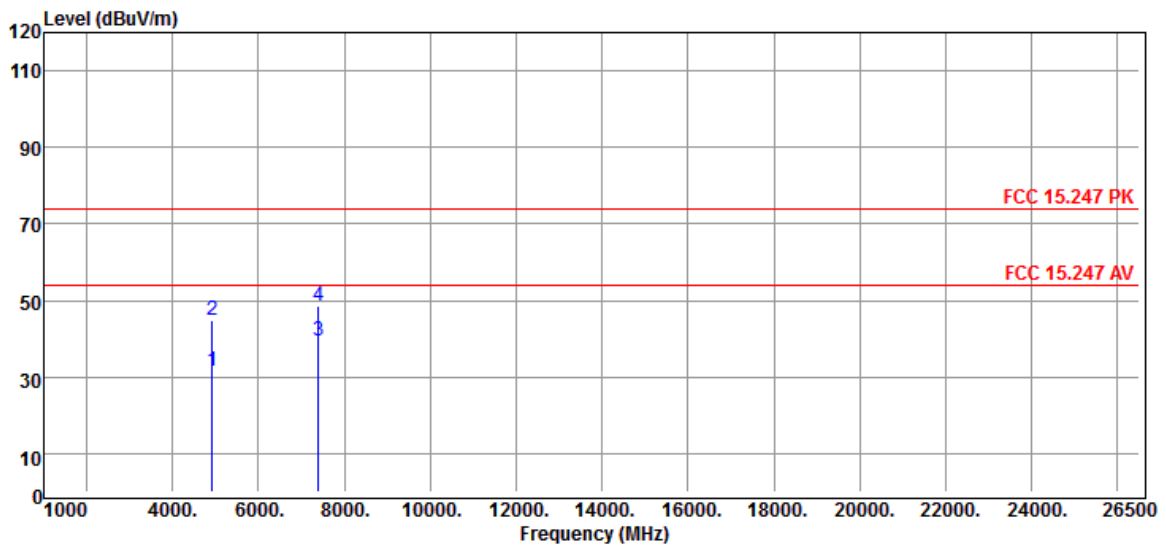

Freq MHz	Meter Level dBuV	System Factor dB/m	Cable Loss dB	Antenna Factor dB/m	Preamp Gain dB	Real Level dBuV/m	Limit Line dBuV/m	Margin dB	Remark	
1	4924.00	37.54	-5.82	6.35	34.65	46.82	31.72	54.00	-22.28	Average
2	4924.00	50.69	-5.82	6.35	34.65	46.82	44.87	74.00	-29.13	Peak
3	7386.00	41.47	-1.90	8.23	36.24	46.37	39.57	54.00	-14.43	Average
4	7386.00	50.39	-1.90	8.23	36.24	46.37	48.49	74.00	-25.51	Peak

System Factor = Cable Loss + Antenna Factor - Preamp Gain

Real Level = Meter Level + System Factor

Margin = Real Level - Limit Line




Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.



## 9. CONDUCTED EMISSIONS

### 9.1 TEST SETUP

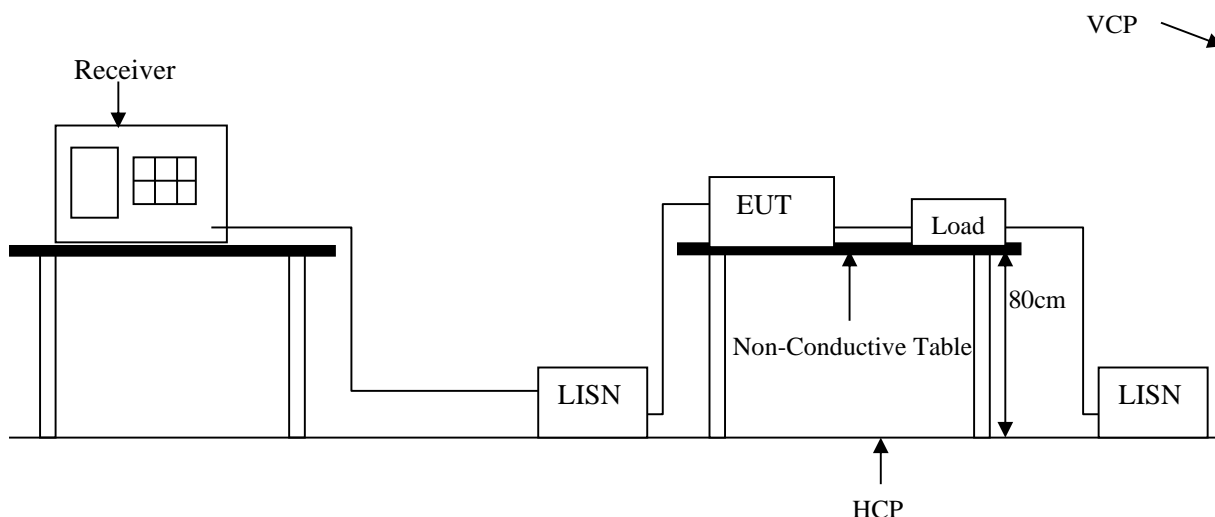

### 9.2 LIMIT

Frequency range (MHz)	CLASS A		CLASS B	
	QP dB(uV)	Average dB(uV)	QP dB(uV)	Average dB(uV)
0.15-0.5	79 dBuV	66 dBuV	66 - 56 dBuV	56 - 46 dBuV
0.5-5.0	73 dBuV	60 dBuV	56 dBuV	46 dBuV
5.0-30.0	73 dBuV	60 dBuV	60 dBuV	50 dBuV

Remark: In the above table, the tighter limit applies at the band edges.

### 9.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50  $\mu$ H coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to EN 55022 regulations: The measurement procedure on conducted emission interference.

The resolution bandwidth of the field strength meter is set at 9 KHz.

### 9.4 TEST SPECIFICATION


According to PART15.207



**9.5 RESULT: NOT AVAILIABLE, BECAUSE EUT IS POWERED BY BATTERY.**

**9.6 TEST DATA:**

LINE

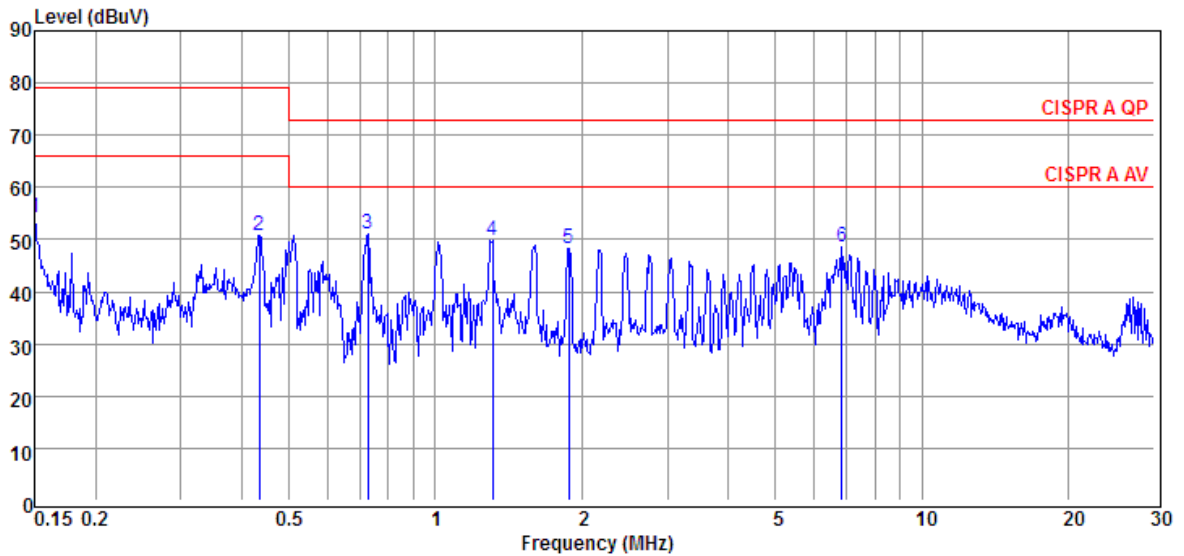


	Freq MHz	Meter Level dBUV	System Factor dB	Cable Loss dB	LISN Factor dB	Real Level dBUV	Limit Line dBUV	Margin dB	Remark
1	0.15	34.23	20.11	20.10	0.01	54.34	79.00	-24.66	Peak
2	0.44	30.64	20.16	20.14	0.02	50.80	79.00	-28.20	Peak
3	0.73	30.77	20.20	20.17	0.03	50.97	73.00	-22.03	Peak
4	1.31	29.68	20.24	20.21	0.03	49.92	73.00	-23.08	Peak
5	1.88	28.05	20.27	20.23	0.04	48.32	73.00	-24.68	Peak
6	6.84	28.05	20.51	20.39	0.12	48.56	73.00	-24.44	Peak

System Factor = Cable Loss + ISN Factor  
 Cable Loss = Pulse limiter + Insertion Loss  
 Real Level = Meter Level + System Factor  
 Margin = Real Level - Limit Line



NEUTRAL

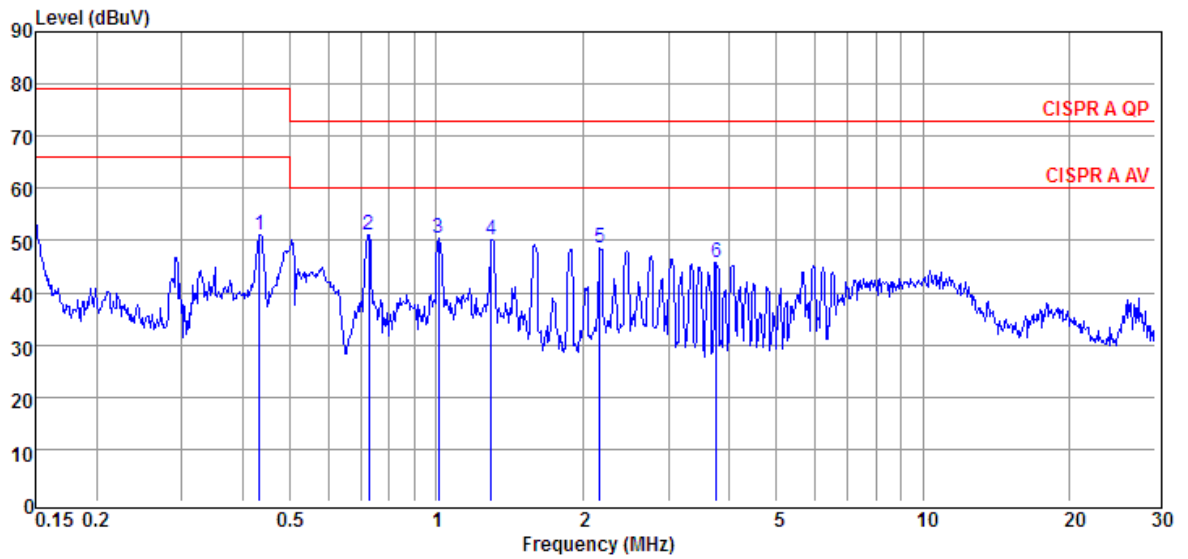

	Freq MHz	Meter Level dBuV	System Factor dB	Cable Loss dB	LISN Factor dB	Real Level dBuV	Limit Line dBuV	Margin dB	Remark
1	0.43	30.81	20.17	20.14	0.03	50.98	79.00	-28.02	Peak
2	0.73	30.94	20.21	20.17	0.04	51.15	73.00	-21.85	Peak
3	1.01	30.30	20.23	20.19	0.04	50.53	73.00	-22.47	Peak
4	1.30	29.83	20.25	20.20	0.05	50.08	73.00	-22.92	Peak
5	2.17	28.26	20.30	20.24	0.06	48.56	73.00	-24.44	Peak
6	3.76	25.45	20.38	20.29	0.09	45.83	73.00	-27.17	Peak

System Factor = Cable Loss + ISN Factor  
 Cable Loss = Pulse limiter + Insertion Loss  
 Real Level = Meter Level + System Factor  
 Margin = Real Level - Limit Line



## **10. SPURIOUS EMISSIONS**

### **10.1 CONDUCTED MEASUREMENT**

#### **10.2 TEST SETUP**



#### **10.3 LIMIT**

According to § 15.247(d) , in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intention radiator in operating , the radio radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power , based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands , as defined in § 15.205(a) , must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### **10.4 TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13 GHz to 26GHz range for IEEE 802.11b/g.


#### **10.5 TEST RESULTS: PASSED**



**10.6 TEST DATA:**

**802.11b**


**Lowest Channel**

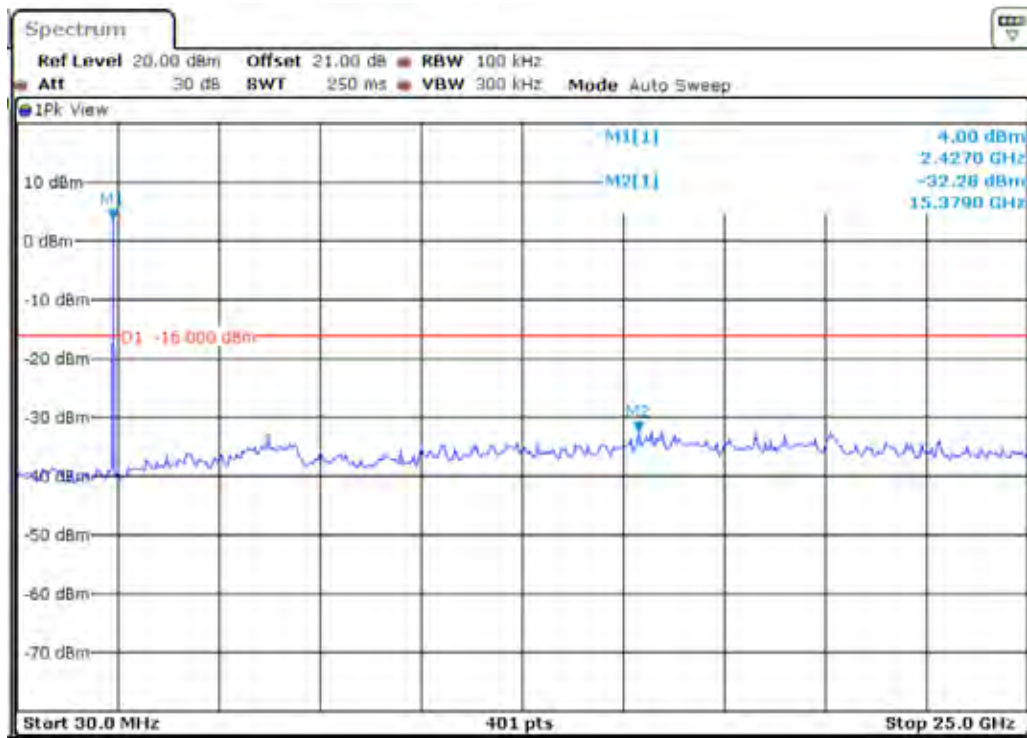






Middle Channel

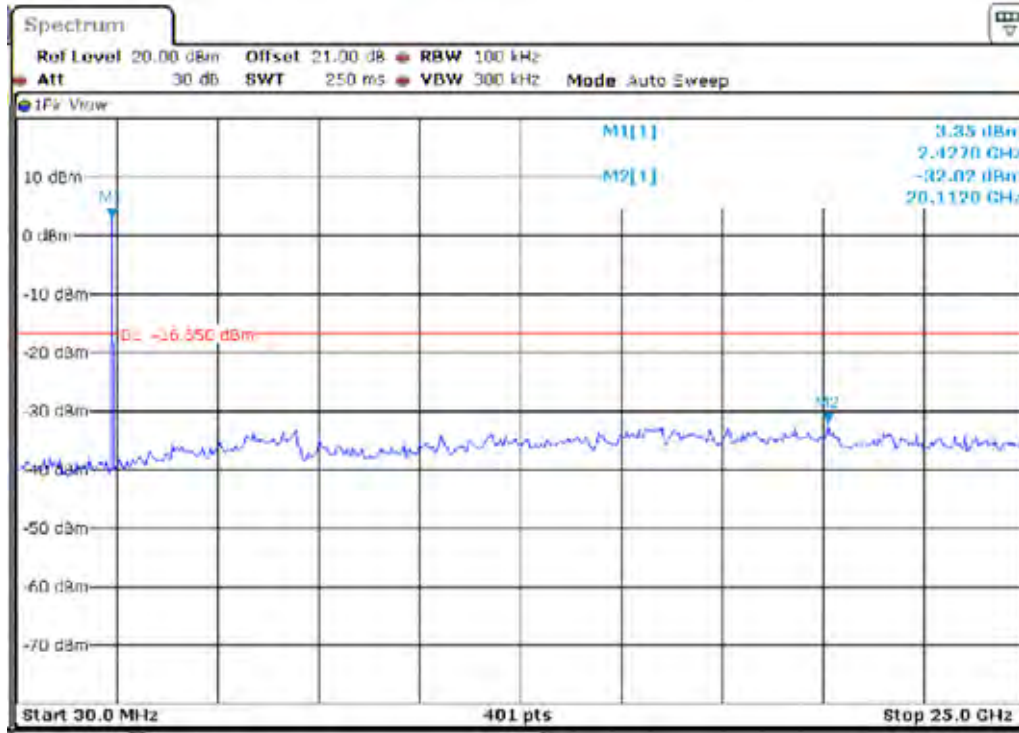


Highest Channel

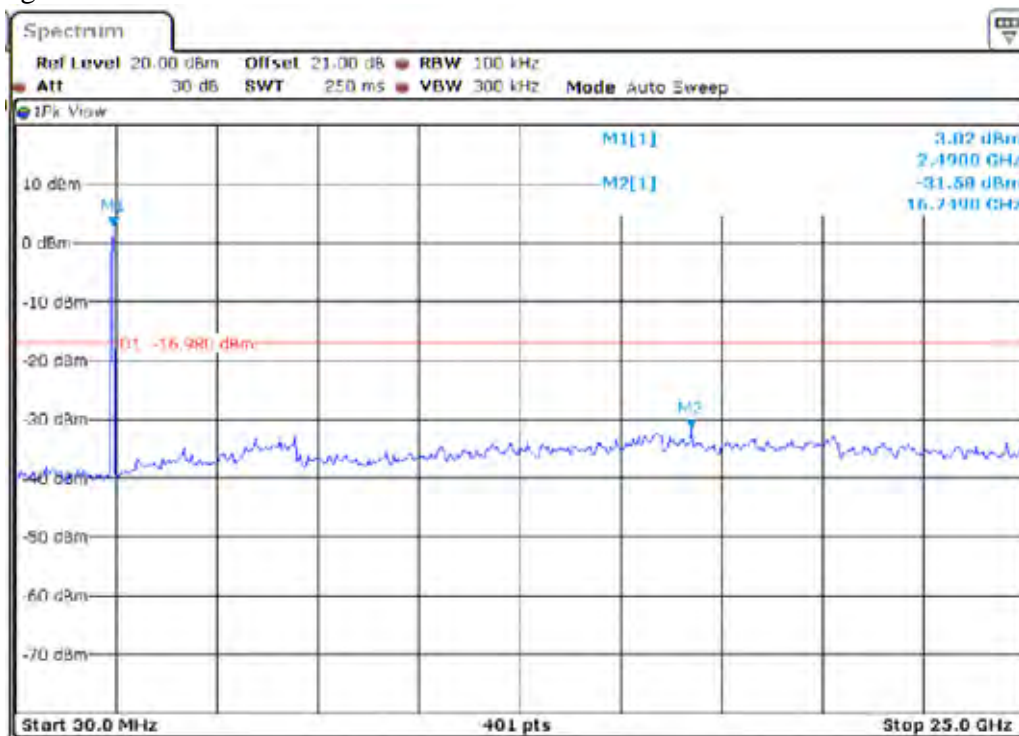




**802.11g**  
Lowest Channel

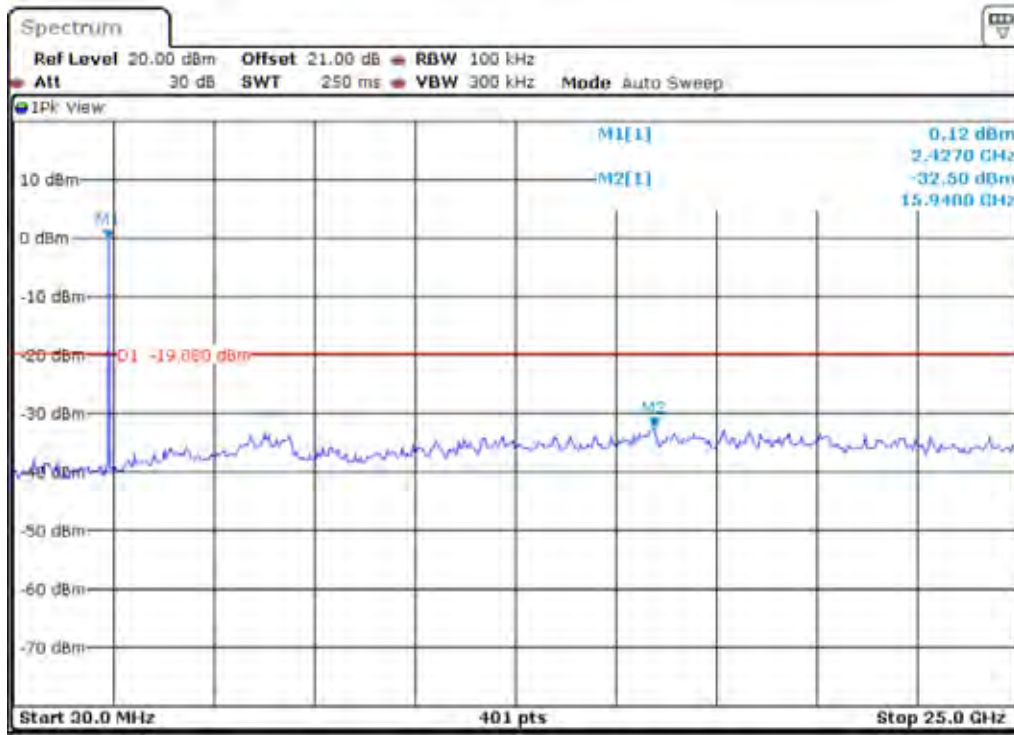


Middle Channel

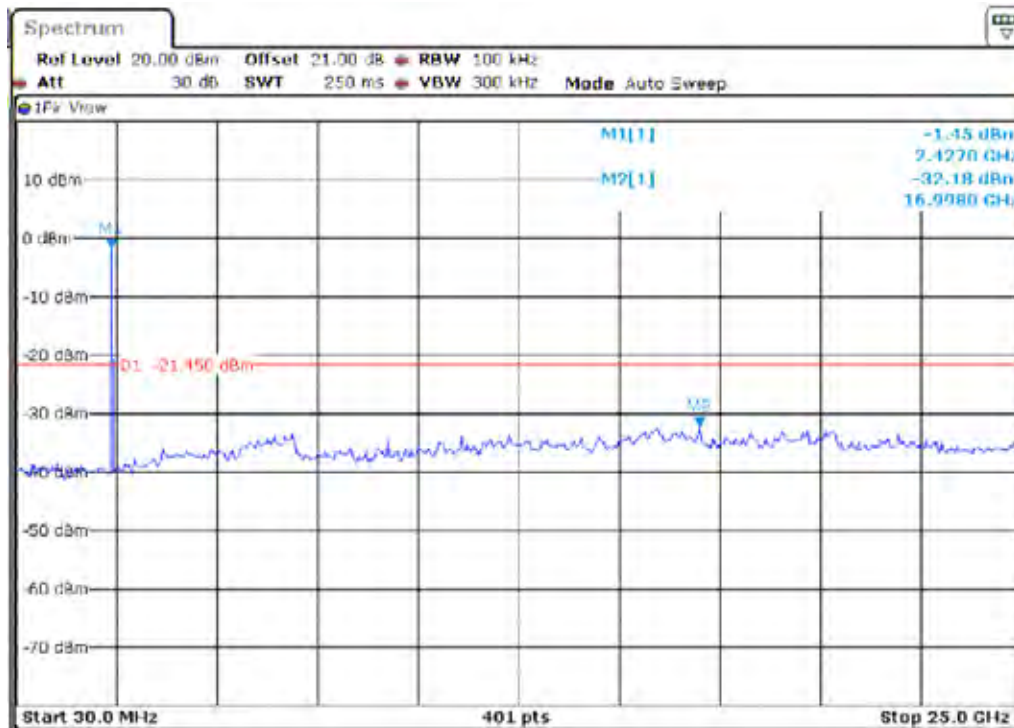




Highest Channel

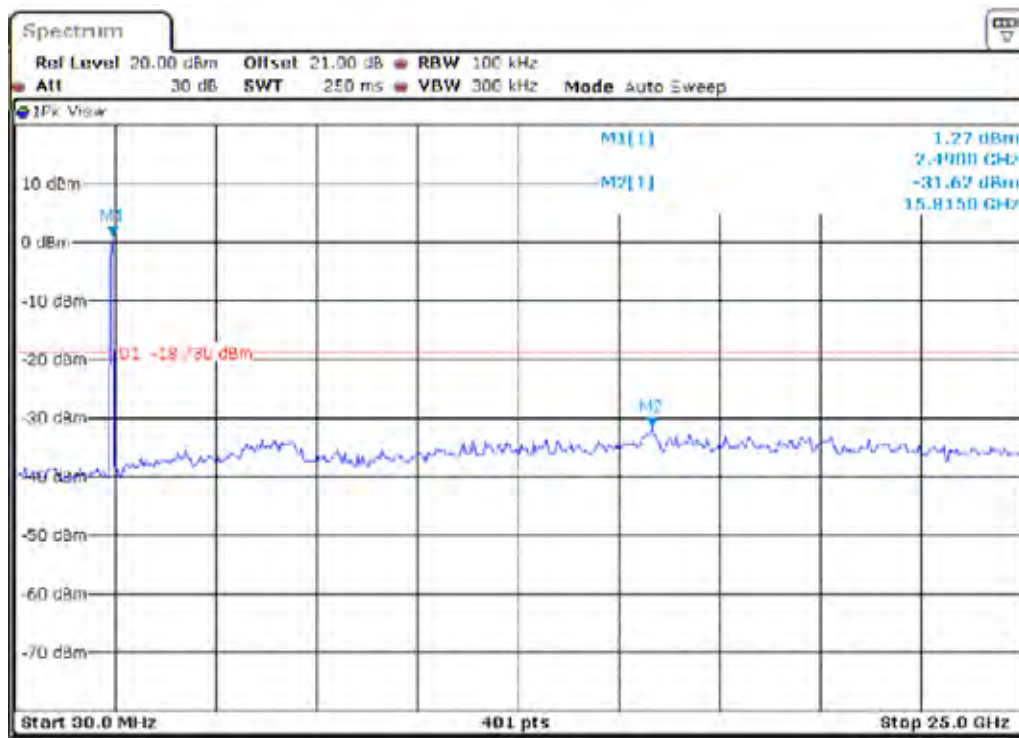


**802.11 n20**

Lowest Channel

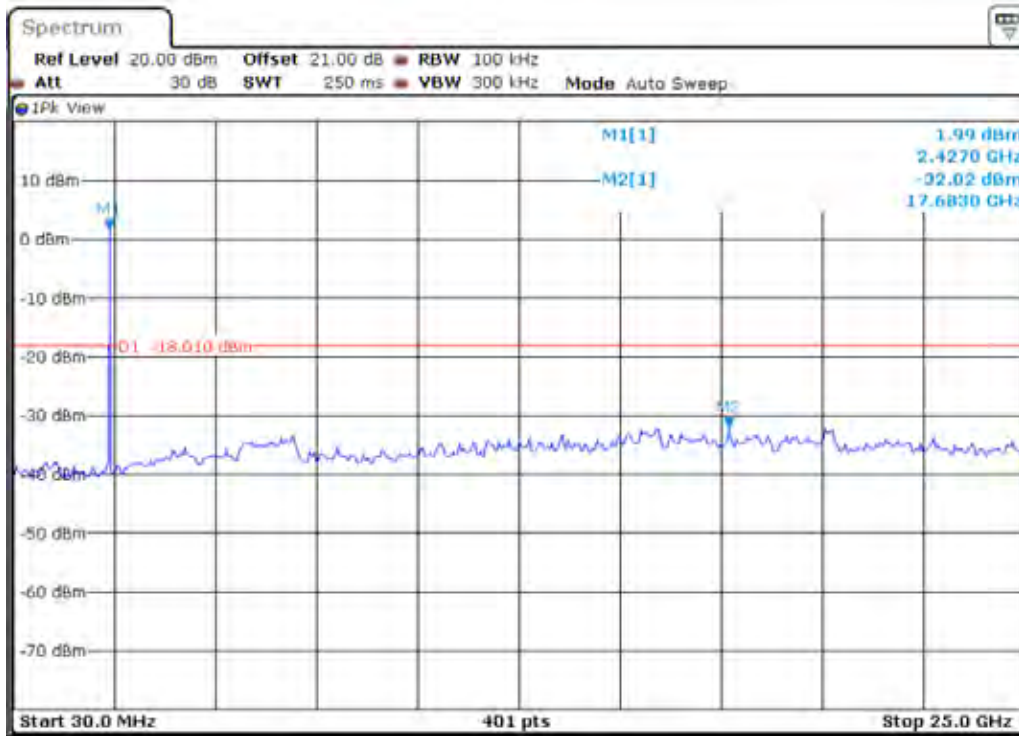

Middle Channel

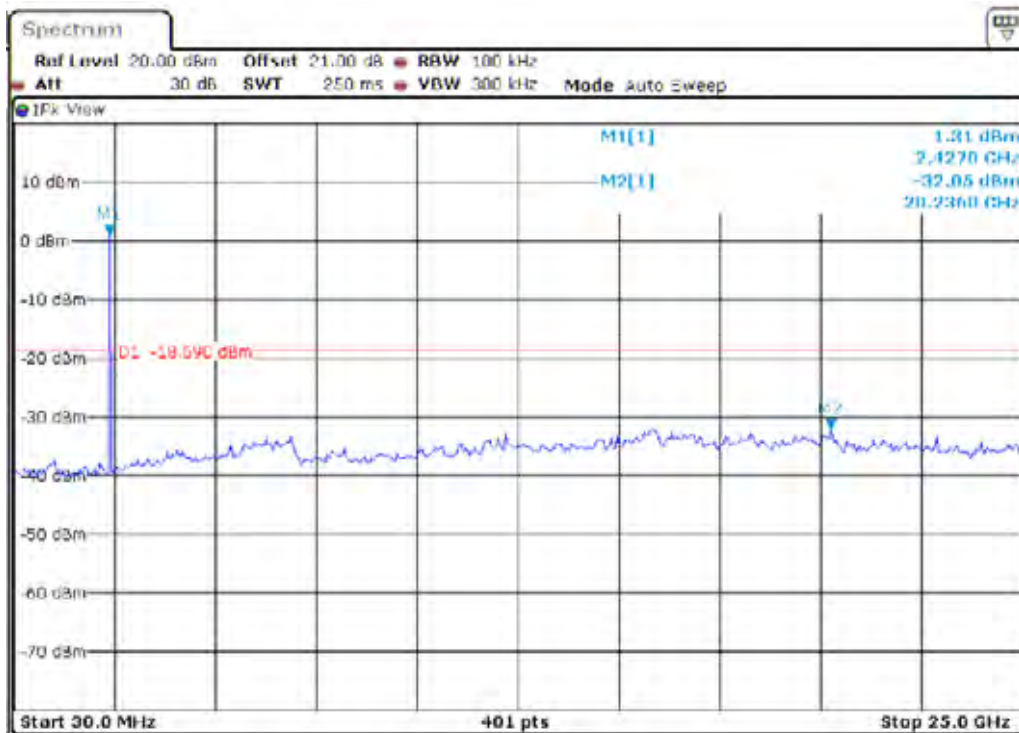

Highest Channel

