



COMPANY NAME: COM NET ERICSSON.
EUT: UHF-M SPLIT 450-488 MHz PANTHER 300P
CLIENT REFERENCE NUMBER:
WORK ORDER NUMBER: 2000278
FCC ID: OWDTR-0003-A

6.0 FCC Rules and Regulations Part 2 §2.1049 (c) (1): Occupied Bandwidth

OCCUPIED BANDWIDTH - COMPLIANCE WITH THE EMISSION MASKS

6.1 Test Procedure


ANSI/TIA/EIA-603-1992, section 2.2.11

Device with audio modulation: Transmitter is modulated with a 2500 Hz sine wave at an input level of 16 dB greater than that required to produce 50% of rated system deviation at 1000 Hz.

Device with digital modulation: N/A

6.2 Test Data


6.2.1 Channel 1: 4 W for 25 kHz Channel Bandwidth: Mask B (Audio Modulation: 2,500 Hz)

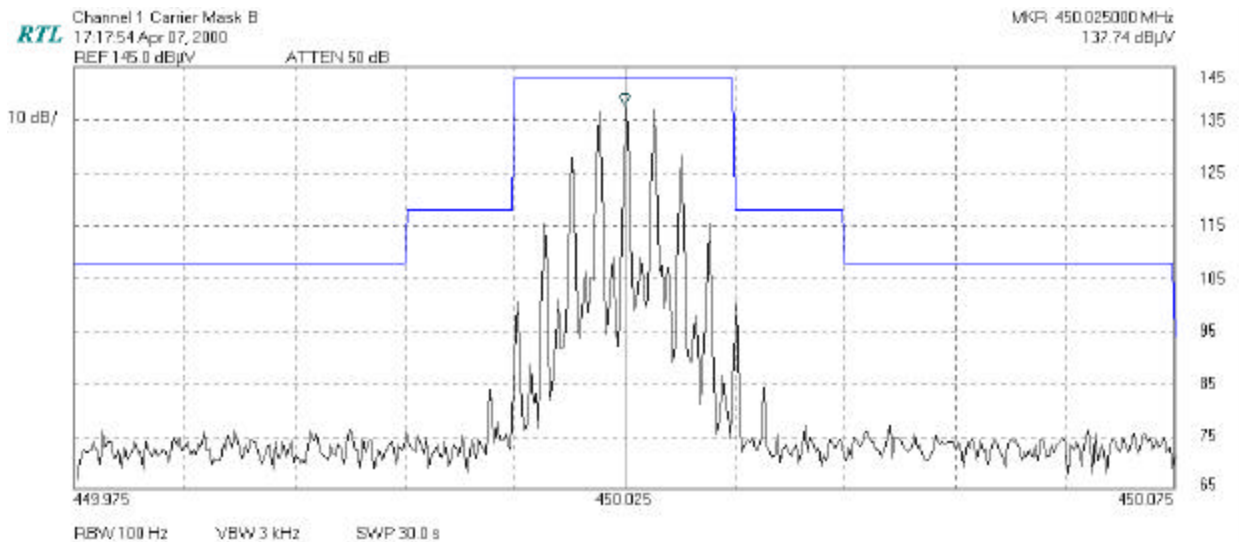



COMPANY NAME: COM NET ERICSSON.
EUT: UHF-M SPLIT 450-488 MHz PANTHER 300P
CLIENT REFERENCE NUMBER:
WORK ORDER NUMBER: 2000278
FCC ID: OWDTR-0003-A

6.2.2 Channel 4: 4 W for 12.5 kHz Channel Bandwidth: Mask D (Audio Modulation: 2,500 Hz)

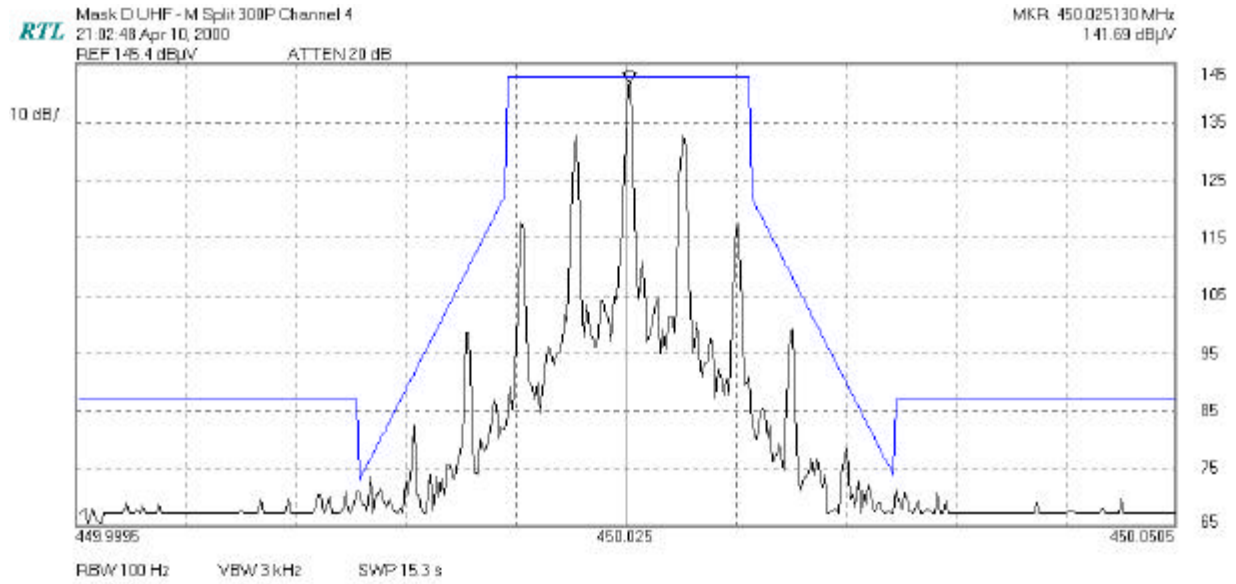

6.3 Test Equipment

Spectrum Analyzer HP8564E s/n 3943A01719