



Engineering and Testing for EMC and Safety Compliance

TYPE CERTIFICATION REPORT

**M/A COM Private Radio Systems, Inc.
 3315 Old Forest Road
 Lynchburg, VA 24501
 Bryan McWatters (434) 385-2146**

MODEL: Jaguar J700P 800 MHz Portable Radio

FCC ID: OWDTR-0014-E

November 21, 2001

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	§15.109: RADIATED EMISSIONS LIMITS
PART 90: 1998	PRIVATE LAND MOBILE RADIO SERVICES
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA-603- 1992	LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS
ANSI/TIA/EIA-603-1-1998	ADDENDUM TO ANSI/TIA/EIA 603-1992
ANSI/TIA/EIA-102.CAAA; 1999	DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS
RSS-119; Issue 6; 2000	LAND MOBILE AND FIXED RADIO TRANSMITTERS AND RECEIVERS 27.41 TO 960.0 MHZ

Frequency Range	Output Power (W) Conducted High/Low	Freq. Tolerance (ppm)	Emission Designator
806.0-823.9875 MHz	3.1; 1.1	1.5	16K0F3E
806.0-823.9875 MHz	3.1; 1.1	1.5	12K8F1D
806.0-823.9875 MHz	3.1; 1.1	1.5	12K8F1E
851.0-868.9875 MHz	3.1; 1.1	1.5	16K0F3E
851.0-868.9875 MHz	3.1; 1.1	1.5	12K8F1D
851.0-868.9875 MHz	3.1; 1.1	1.5	12K8F1E

REPORT PREPARED BY:

**Test Engineer: Daniel Baltzell
 Administrative Writer: Melissa Fleming**

Document Number: 2001266 / QRTL01-264

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.



TABLE OF TABLES

TABLE 1-0-1:	EQUIPMENT UNDER TEST (EUT)	7
TABLE 1-0-2:	EXTERNAL COMPONENTS USED IN TEST CONFIGURATION	7
TABLE 4-1:	RF POWER OUTPUT	11
TABLE 4-2:	RF POWER OUTPUT (RATED POWER)	12
TABLE 4-3:	TEST EQUIPMENT USED FOR TESTING (RF POWER OUTPUT - CONDUCTED)	12
TABLE 5-1:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 806.0125MHZ	13
TABLE 5-2:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 7 – 851.0125MHZ	14
TABLE 5-3:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 11 – 868.9875MHZ	14
TABLE 5-4:	TEST EQUIPMENT USED FOR TESTING (CONDUCTED – SPURIOUS EMISSIONS)	14
TABLE 6-1:	FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 1 – 806.0125MHZ	15
TABLE 6-2:	FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 7 – 851.0125MHZ	16
TABLE 6-3:	FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 11 – 868.9875MHZ	16
TABLE 6-4:	TEST EQUIPMENT USED FOR TESTING (FIELD STRENGTH OF SPURIOUS RADIATION)	16
TABLE 7-1:	TEST EQUIPMENT USED FOR TESTING (OCCUPIED BANDWIDTH)	28
TABLE 8-1:	TEMPERATURE FREQUENCY STABILITY	31
TABLE 8-2:	TEMPERATURE FREQUENCY STABILITY CHANNEL 5, 823.9875 MHz	31
TABLE 8-3:	TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/TEMPERATURE)	31
TABLE 8-4:	FREQUENCY STABILITY/VOLTAGE VARIATION	32
TABLE 8-5:	TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/VOLTAGE)	32
TABLE 9-1:	TEST EQUIPMENT USED FOR TESTING (AUDIO FREQUENCY RESPONSE)	34
TABLE 10-1:	TEST EQUIPMENT USED FOR TESTING (AUDIO LOW PASS FILTER RESPONSE)	35
TABLE 11-1:	TEST EQUIPMENT USED FOR TESTING (MODULATION LIMITING)	37

TABLE OF PLOTS

PLOT 7-1:	OCCUPIED BANDWIDTH {25 kHz CHANNEL BANDWIDTH: NON-NPSPAC MASK B (AUDIO MODULATION: 2,500 Hz)} PART 90.210	18
PLOT 7-2:	OCCUPIED BANDWIDTH {25 kHz CHANNEL BANDWIDTH: NPSPAC MASK B (AUDIO MODULATION: 2,500 Hz)} PART 90.210	19
PLOT 7-3:	OCCUPIED BANDWIDTH {25 kHz CHANNEL BANDWIDTH: MASK EA; FCC PART 90.691(AUDIO MODULATION: 2,500 Hz)} PART 90.210	20
PLOT 7-4:	OCCUPIED BANDWIDTH {MASK EA; (2 LEVEL FM DIGITAL MODULATION)} PART 90.210	21
PLOT 7-5:	OCCUPIED BANDWIDTH {MASK H; (NPSPAC 2 LEVEL FM DIGITAL MODULATION)} PART 90.210	22
PLOT 7-6:	OCCUPIED BANDWIDTH {MASK G; (NON-NPSPAC 2 LEVEL FM DIGITAL MODULATION)} PART 90.210	23
PLOT 7-7:	OCCUPIED BANDWIDTH {MASK EA; (C4FM DIGITAL MODULATION)} PART 90.210	24
PLOT 7-8:	OCCUPIED BANDWIDTH {MASK G; (C4FM NON-NPSPAC DIGITAL MODULATION)} PART 90.210	25
PLOT 7-9:	OCCUPIED BANDWIDTH {MASK H; (C4FM NPSPAC DIGITAL MODULATION)} PART 90.210	26
PLOT 7-10:	OCCUPIED BANDWIDTH (NON-NPSPAC 2 LEVEL FM DIGITAL MODULATION) (9 kHz) – 99% POWER BANDWIDTH; PART 90.210	27
PLOT 7-11:	OCCUPIED BANDWIDTH (C4FM NON-NPSPAC DIGITAL MODULATION) (8.1 kHz) – 99% POWER BANDWIDTH; PART 90.210	28
PLOT 8-1:	TEMPERATURE FREQUENCY STABILITY	30
PLOT 8-2:	FREQUENCY STABILITY/VOLTAGE VARIATION	32
PLOT 9-1:	MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE {25 kHz CHANNEL BANDWIDTH}	34
PLOT 10-1:	MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER	35
PLOT 11-1:	MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND NEGATIVE PEAK	36
PLOT 11-2:	MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND POSITIVE PEAK	37

TABLE OF FIGURES

FIGURE 1-1:	CONFIGURATION OF TESTED SYSTEM	8
-------------	--------------------------------------	---



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

1 GENERAL INFORMATION

The following Report of a Type Certification, is prepared on behalf of **M/A COM Private Radio Systems, Inc.** in accordance with the Federal Communications Commissions and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **Jaguar J700P 800 MHz Portable Radio; FCC ID: OWDTR-0014-E**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47, Industry Canada RSS-119, and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application report.



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

1.3 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	§15.109: RADIATED EMISSIONS LIMITS
PART 90: 1998	PRIVATE LAND MOBILE RADIO SERVICES
ANSI C63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA-603- 1992	LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS
ANSI/TIA/EIA-603-1-1998	ADDENDUM TO ANSI/TIA/EIA 603-1992
ANSI/TIA/EIA-102.CAAA; 1999	DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS
RSS-119; Issue 6; 2000	LAND MOBILE AND FIXED RADIO TRANSMITTERS AND RECEIVERS 27.41 TO 960.0 MHZ

Frequency Range	Output Power (W) Conducted High/Low	Freq. Tolerance (ppm)	Emission Designator
806.0125-823.9875 MHz	3.1; 1.1	1.5	16K0F3E
806.0125-823.9875 MHz	3.1; 1.1	1.5	12K8F1D
806.0125-823.9875 MHz	3.1; 1.1	1.5	12K8F1E
851.0125-868.9875 MHz	3.1; 1.1	1.5	16K0F3E
851.0125-868.9875 MHz	3.1; 1.1	1.5	12K8F1D
851.0125-868.9875 MHz	3.1; 1.1	1.5	12K8F1E

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the above standards for Certification methodology.

Signature: 

Date: October 17, 2001

Typed/Printed Name: Bruno Clavier


Position: Vice President of Operations
(NVLAP Signatory)

Signature: 

Date: October 17, 2001

Typed/Printed Name: Daniel W. Baltzell

Position: Test Engineer

 Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 200061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



1.4 TESTED SYSTEM DETAILS

Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

TABLE 1-1: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
RADIO	M/A COM Private Radio Systems, Inc.	JAGUAR J700P		OWDTR- 0014-E	N/A	03718

TABLE 1-2: EXTERNAL COMPONENTS USED IN TEST CONFIGURATION

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
BATTERY	M/A COM Private Radio Systems, Inc.	BKB 191 210/3 R2A	N/A	N/A	N/A	N/A
WHIP ANTENNA	M/A COM Private Radio Systems, Inc.	KRE1011506/1	N/A	N/A	N/A	N/A
BATTERY CHARGER	M/A COM Private Radio Systems, Inc.	BML 161 78/6 REV R1A	N/A	N/A	N/A	N/A
HAND MICROPHON E	M/A COM Private Radio Systems, Inc.	KRY 101 1617/83 R1A	N/A	N/A	N/A	N/A



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

3 RADIATED EMISSIONS

3.1 RADIATED MEASUREMENT

Before final measurements of radiated emissions were made on the open-field three-meter range, the EUT was scanned indoors at a three meter distance in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as well as daily calibration methods, technician training, and emphasis to employees on avoiding error.



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

4 PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED

4.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

4.2 TEST DATA

The following channels (in MHz) were tested: 806.0125, 815.5, 823.9875, 851.0125, 863.0, 868.9875
The Output Power levels are shown.

CARRIER OUTPUT POWER (UNMODULATED)

TABLE 4-1: RF POWER OUTPUT

Channel	Frequency (MHz)	RF Power measured (Watt)*
1	806.0125	3.13
2	806.0125	1.05
3	815.5000	3.11
4	815.5000	1.08
5	823.9875	3.09
6	823.9875	1.06
7	851.0125	3.07
8	851.0125	1.05
9	863.0000	3.09
10	863.0000	1.08
11	868.9875	3.13
12	868.9875	1.07
13	868.9875	1.07
14	868.9875	1.07
15	868.9875	1.07
16	868.9875	1.07

* Measurement accuracy: +/- 3%




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

TABLE 4-2: RF POWER OUTPUT (RATED POWER)

Rated Power (W)
High Power 3.0
Low Power 1.0

TEST PERSONNEL:

DANIEL BALTZELL
TEST TECHNICIAN/ENGINEER



SIGNATURE

JANUARY 22, 2002
DATE OF TEST

TABLE 4-3: TEST EQUIPMENT USED FOR TESTING (RF POWER OUTPUT - CONDUCTED)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
900770	Hewlett Packard	437B	Power Meter	2949A02966
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102
900769	Hewlett Packard	8481B	Power Sensor	2702A05059
901184/901186	Agilent	E4416A/E9323A	Power meter / Sensor	GB41050573/US40410380



5 PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

5.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, Section 2.2.13

Analog modulation: The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

The transmitter is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence - 9600bps

5.2 TEST DATA

Frequency range of measurement per Part 2.1057: 9kHz to 10 x Fc

Limits: Mask B (dBm): $P(\text{dBm}) - (43 + 10 \times \text{LOG } P(\text{W}))$

The following channels (in MHz) were investigated: 806.0125, 815.5, 823.9875, 851.0125, 863.0, and 868.9875


The worse case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

TABLE 5-1 CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 806.0125MHZ
 (806.0125 MHz); 25kHz channel spacing; Mask B; Conducted power = 3.04 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
1612.0350	73.7	48.0	-25.7
2418.0475	80.2	48.0	-32.2
3224.0600	104.2	48.0	-56.2
4030.0725	97.6	48.0	-49.6
4836.0850	118.1	48.0	-70.1
5642.0975	128.9	48.0	-80.9
6448.1100	120.0	48.0	-72.0
7254.1225	116.6	48.0	-68.6
8060.1350	115.7	48.0	-67.7

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER



 SIGNATURE

JANUARY 22, 2002
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

TABLE 5-2 CONDUCTED SPURIOUS EMISSIONS CHANNEL 7 – 851.0125MHZ
 (851.0125 MHz); 25kHz channel spacing; Mask B; Conducted power = 3.07 W


Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
1702.0250	73.2	47.8	-25.2
2553.0375	86.3	47.8	-38.3
3404.0500	100.6	47.8	-52.6
4255.0625	113.0	47.8	-65.0
5106.0750	124.3	47.8	-76.3
5957.0875	113.4	47.8	-65.4
6808.1000	127.9	47.8	-79.9
7659.1125	124.9	47.8	-76.9
8510.1250	130.3	47.8	-82.3

TABLE 5-3 CONDUCTED SPURIOUS EMISSIONS CHANNEL 11 – 868.9875MHZ
 (868.9875 MHz); 25kHz channel spacing; Mask B; Conducted power = 3.13 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
1737.9752	64.6	47.8	-16.6
2606.9628	83.7	47.8	-35.7
3475.9504	100.0	47.8	-52.0
4344.9380	104.6	47.8	-56.6
5213.9256	130.7	47.8	-82.7
6082.9132	116.6	47.8	-68.6
6951.9008	126.9	47.8	-78.9
7820.8884	127.5	47.8	-79.5
8689.8760	129.9	47.8	-81.9

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER



 SIGNATURE

JANUARY 22, 2002
 DATE OF TEST

TABLE 5-4: TEST EQUIPMENT USED FOR TESTING (CONDUCTED – SPURIOUS EMISSIONS)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 kHz – 6.5 GHz)	3325A00159



6 FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION

6.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence - 9600bps

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator and the gain of the antenna was further corrected to a half wave dipole.

6.2 TEST DATA

6.2.1 CFR 47 PART 90.210 REQUIREMENTS

The worst-case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

TABLE 6-1: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 1 – 806.0125MHZ (806.0125 MHz) 25kHz channel spacing; Conducted power = 3.04W

Frequency	S/G level (dBm)	Cable Loss*	Difference in gain (ref. To ½ wave dipole)	Emission level (dBc)	Limit (dBc) Mask B	Margin (dB)
1612.0350	-62.6	0.9	4.7	93.8	47.98	-45.8
2418.0475	-39.8	1.0	5.1	70.7	47.98	-22.7
3224.0600	-56.9	1.5	6.1	87.3	47.98	-39.3
4030.0725	-45.7	0.9	5.9	75.7	47.98	-27.7
4836.0850	-45.3	1.1	7.0	74.4	47.98	-26.4
5642.0975	-65.6	2.8	6.6	96.8	47.98	-48.9
6448.1100	<-70.0					
7254.1225	<-70.0					
8060.1350	<-70.0					

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

TABLE 6-2: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 7 - 851.0125MHZ (851.0125 MHz); 25kHz Channel spacing; Conducted power = 3.07W

Frequency	S/G level (dBm)	Cable Loss*	Difference in gain (ref. To 1/2 wave dipole)	Emission level (dBc)	Limit (dBc) Mask B	Margin (dB)
1702.02	-63.0	0.9	4.7	93.9	47.75	-46.2
2553.04	-38.1	1.7	5.3	69.3	47.75	-21.5
3404.00	-44.8	1.6	6.0	75.1	47.75	-27.4
4255.00	-40.7	1.1	9.7	66.9	47.75	-19.1
5106.00	<-70.0					
5957.20	<-70.0					
6808.05	<-70.0					
7659.30	<-70.0					
8510.60	<-70.0					

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the 1/2 wave dipole antenna.


TABLE 6-3: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 11 – 868.9875MHZ (868.9875 MHz); 25kHz Channel spacing; Conducted power = 3.13W

Frequency	S/G level (dBm)	Cable Loss*	Difference in gain (ref. To 1/2 wave dipole)	Emission level (dBc)	Limit (dBc) Mask B	Margin (dB)
1737.98	-65.8	0.9	4.7	96.7	47.75	-48.9
2606.85	-40.8	1.8	5.4	71.9	47.75	-24.2
3475.96	-48.2	1.6	6.0	78.6	47.75	-30.8
4344.90	-47.7	1.0	6.7	76.8	47.75	-29.0
5213.90	<-70.0					
6082.80	<-70.0					
6951.95	<-70.0					
7820.90	<-70.0					
8680.90	<-70.0					

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the 1/2 wave dipole antenna.

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


 SIGNATURE

JANUARY 22, 2002
 DATE OF TEST

TABLE 6-4: TEST EQUIPMENT USED FOR TESTING (FIELD STRENGTH OF SPURIOUS RADIATION)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
900791	Schaffner@Chase	CBL6112	Antenna (25MHz – 2GHz)	2099
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719
900917	Hewlett Packard	8648C	Synthesized. Signal Generator (9 kHz to 3200 MHz)	3537A01741
900928	Hewlett Packard	83752A	Synthesized Sweeper, 0.01 to 20 GHz	3610A00866



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

7 FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH

OCCUPIED BANDWIDTH - COMPLIANCE WITH THE EMISSION MASKS

7.1 TEST PROCEDURE


ANSI/TIA/EIA-603-1992, section 2.2.11 and TIA/EIA-102.CAAA-1999 section 2.2.5

Device with audio modulation: Transmitter is modulated with a 2500 Hz sine wave at an input level of 16 dB greater than that required to produce 50% of rated system deviation at 1000 Hz.

Device with digital modulation

7.2 TEST DATA

PLOT 7-1: OCCUPIED BANDWIDTH {25 kHz CHANNEL BANDWIDTH: NON-NPSPAC MASK B (AUDIO MODULATION: 2,500 HZ)} PART 90.210

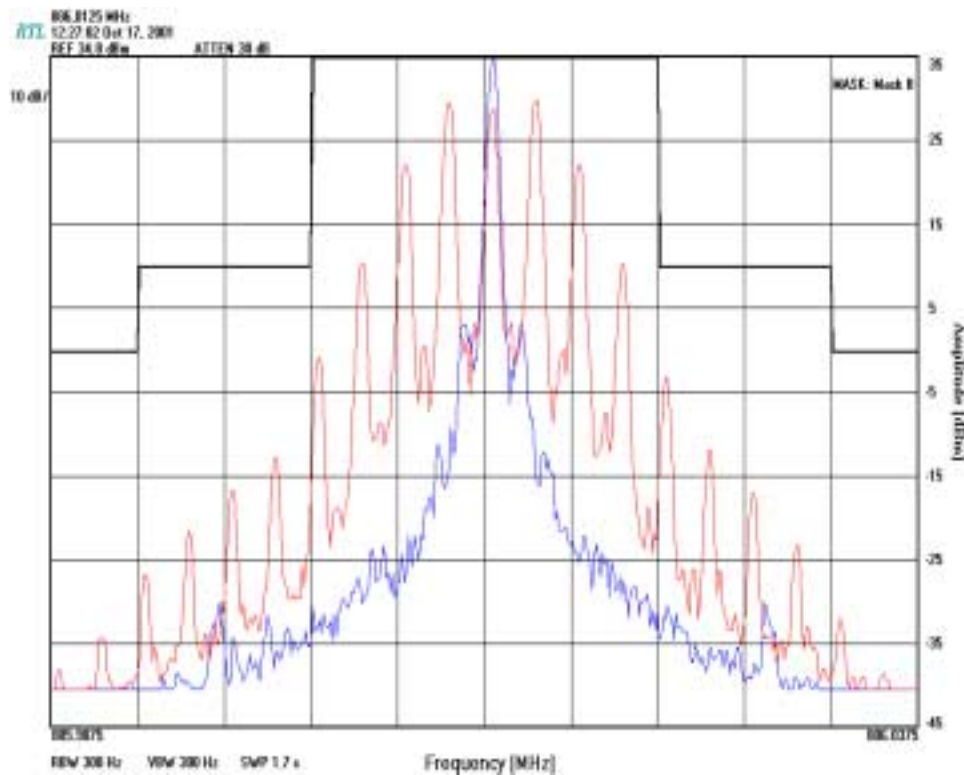

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER

SIGNATURE


OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-2: OCCUPIED BANDWIDTH {25 kHz CHANNEL BANDWIDTH: NPSPAC MASK B (AUDIO MODULATION: 2,500 HZ)} PART 90.210

Center Frequency 868.9875 MHz

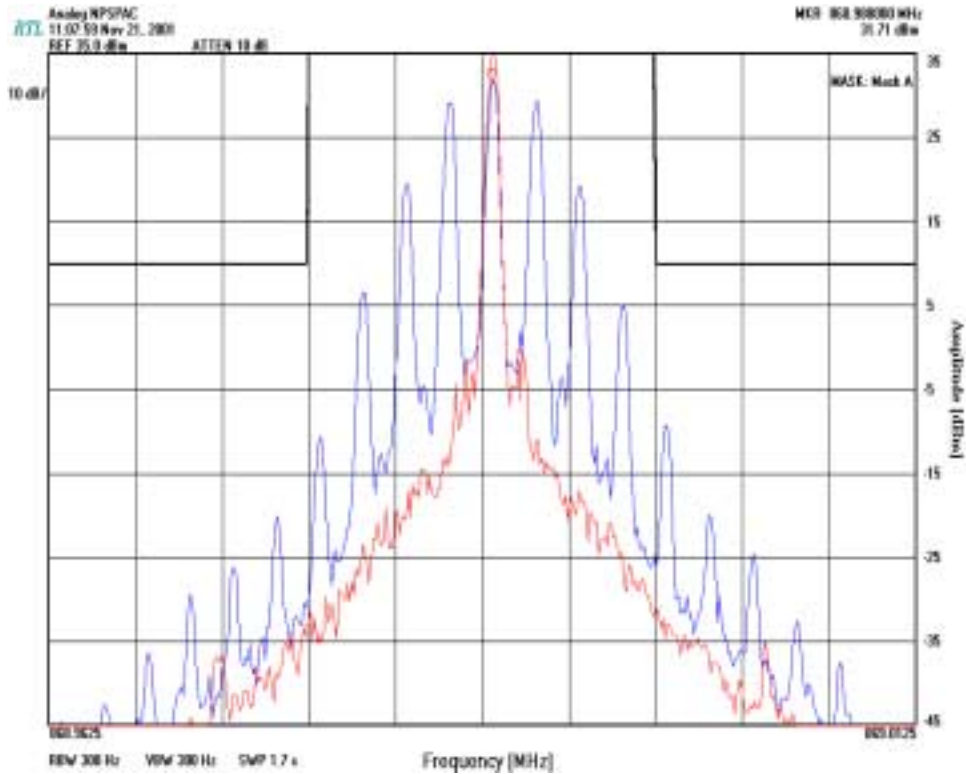

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-3: OCCUPIED BANDWIDTH {25 kHz CHANNEL BANDWIDTH: MASK EA; FCC PART 90.691(AUDIO MODULATION: 2,500 HZ)} PART 90.210

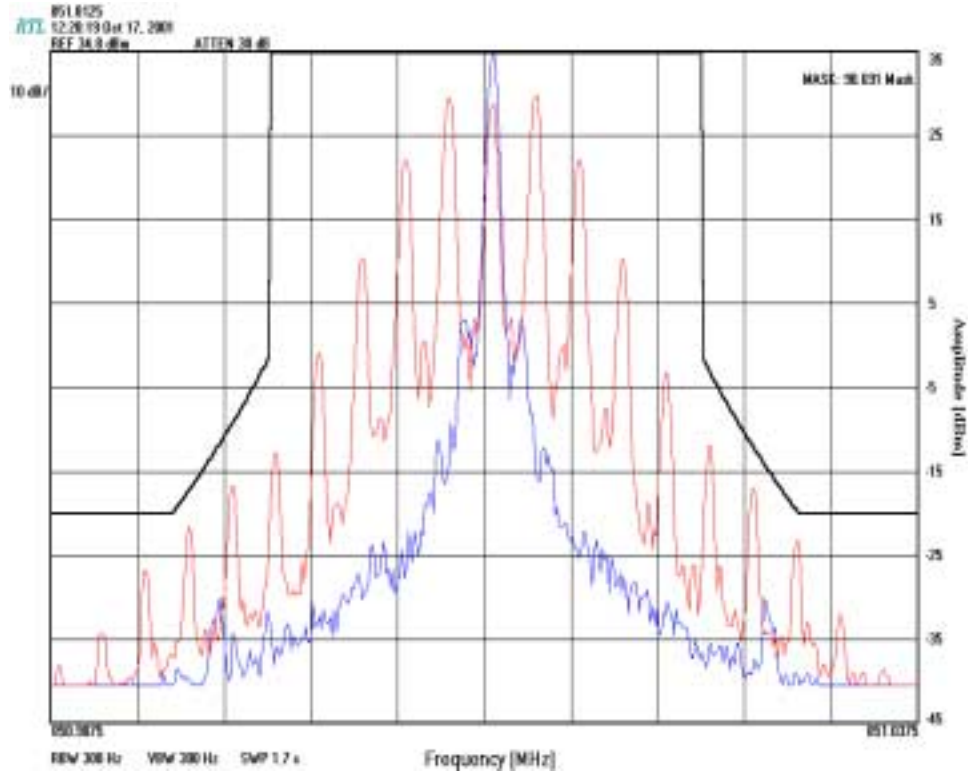

TEST PERSONNEL:

DANIEL BALTZEL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-4: OCCUPIED BANDWIDTH {MASK EA; (2 LEVEL FM DIGITAL MODULATION)} PART 90.210

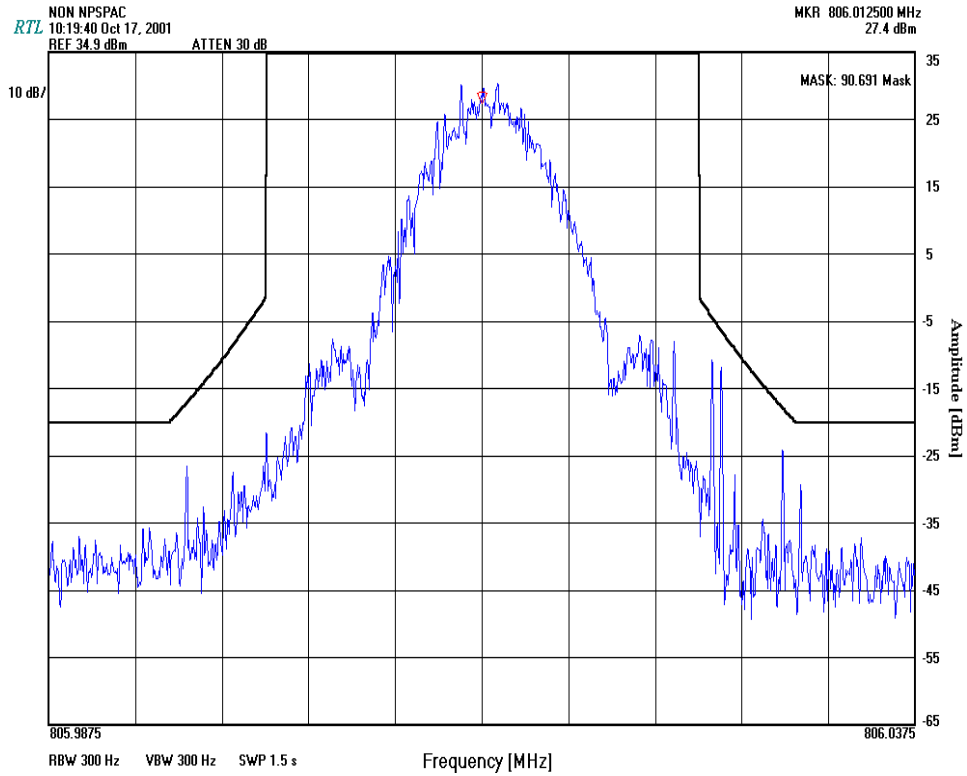

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-5: OCCUPIED BANDWIDTH {MASK H; (NPSPAC 2 LEVEL FM DIGITAL MODULATION)}
 PART 90.210

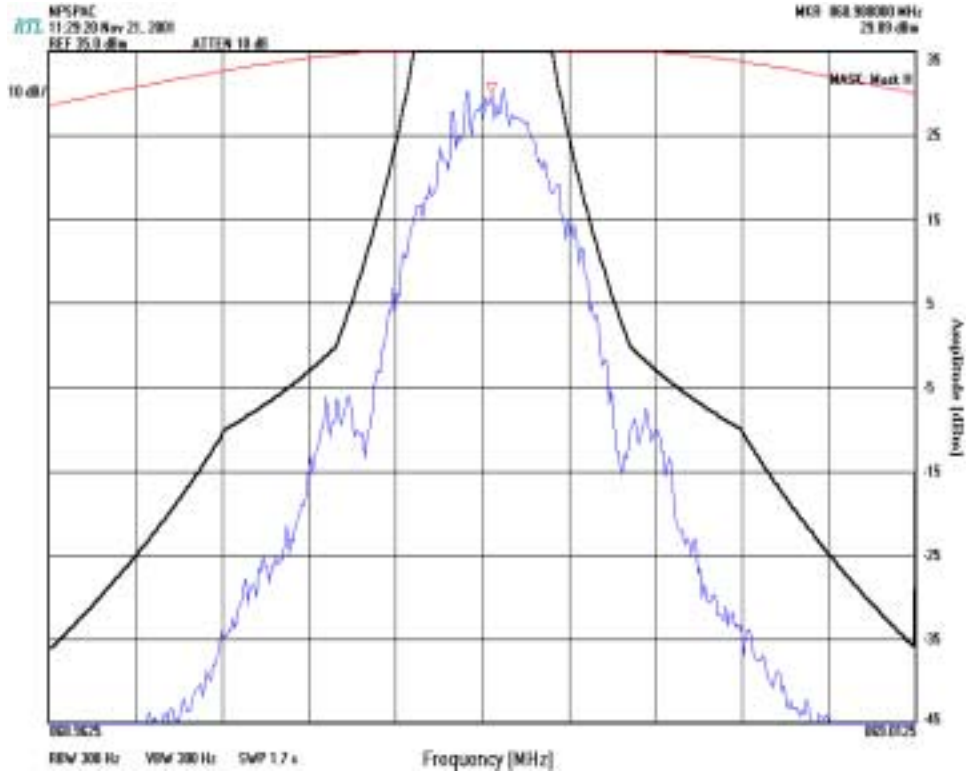

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-6: OCCUPIED BANDWIDTH {MASK G; (NON-NPSPAC 2 LEVEL FM DIGITAL MODULATION)}
 PART 90.210

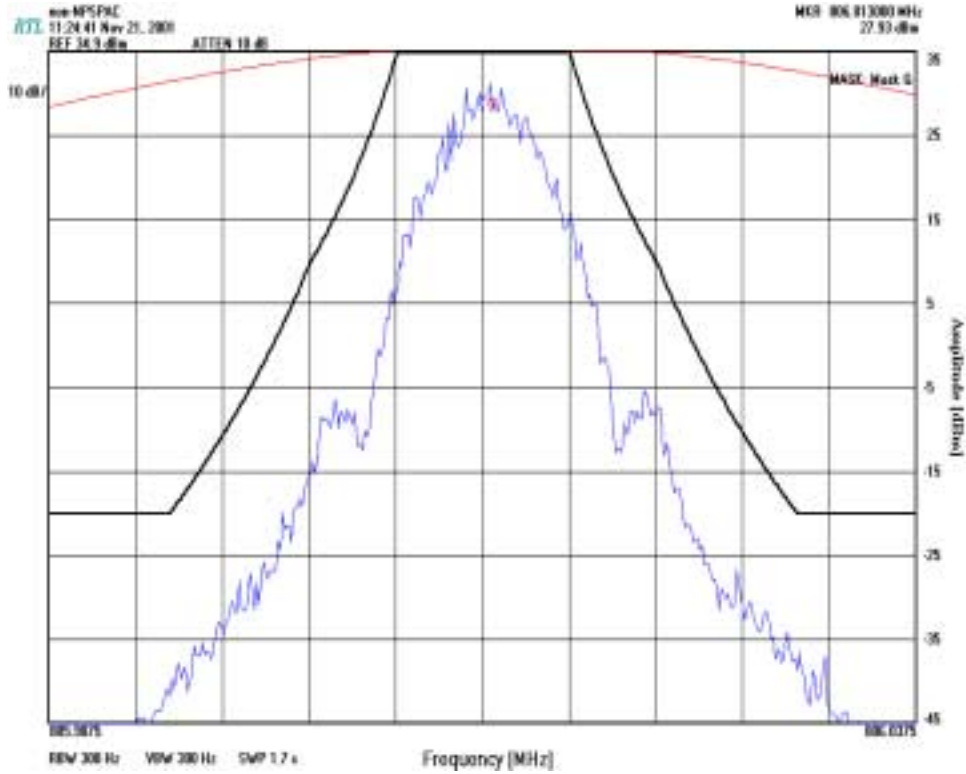

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-7: OCCUPIED BANDWIDTH {MASK EA; (C4FM DIGITAL MODULATION)} PART 90.210

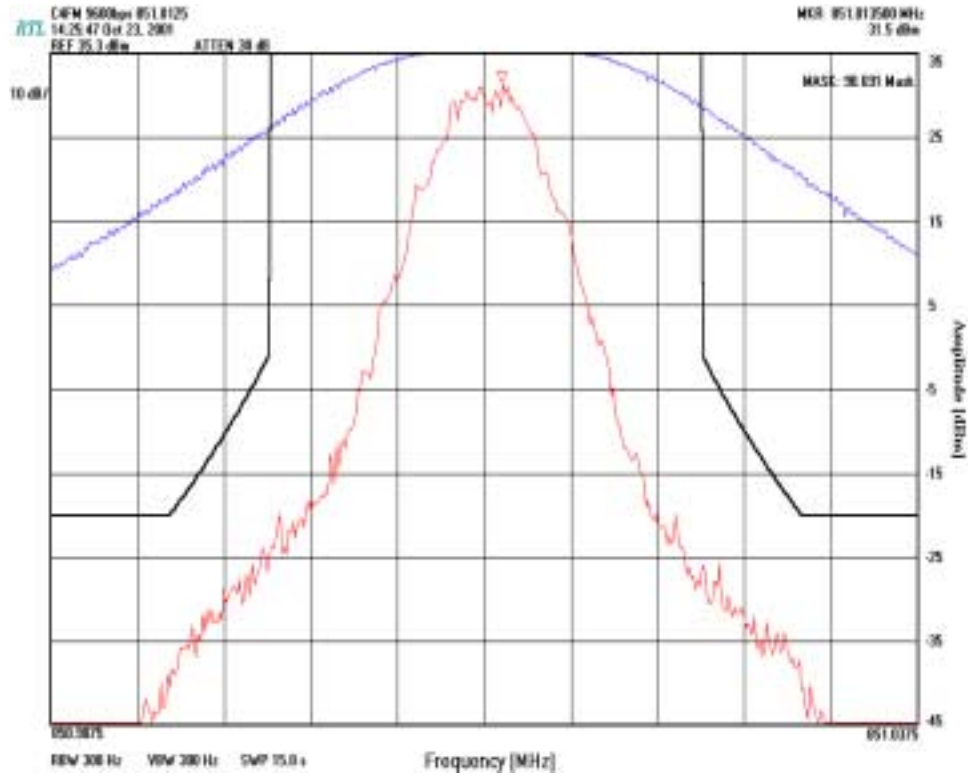

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-8: OCCUPIED BANDWIDTH {MASK G; (C4FM NON-NPSPAC DIGITAL MODULATION)} PART 90.210

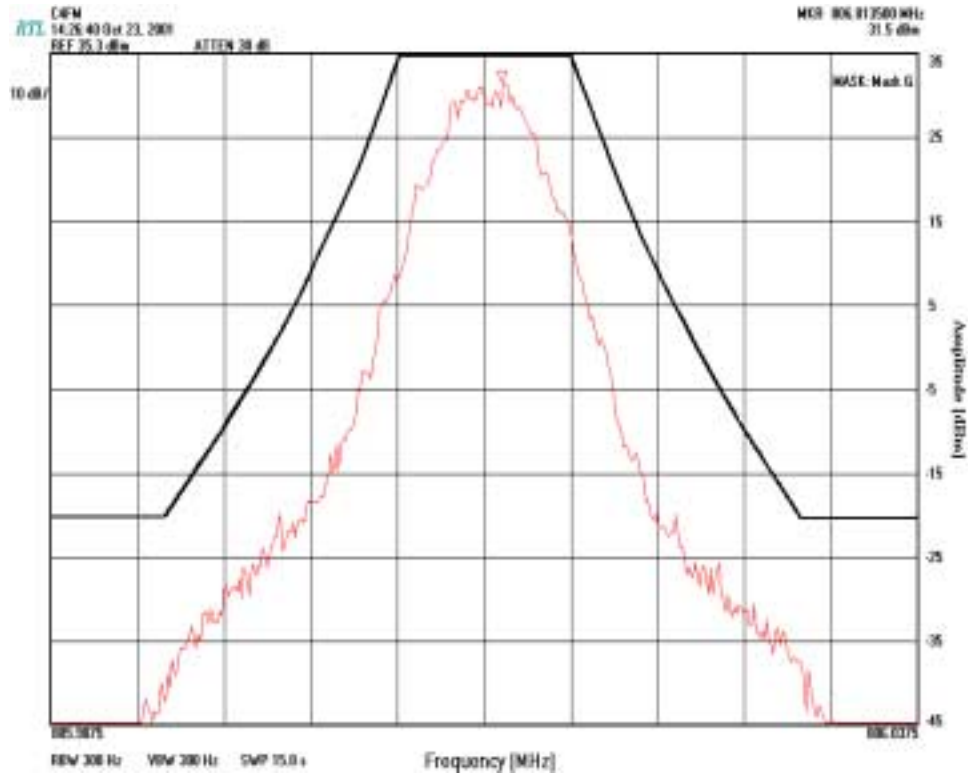

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-9: OCCUPIED BANDWIDTH {MASK H; (C4FM NPSPAC DIGITAL MODULATION)} PART 90.210

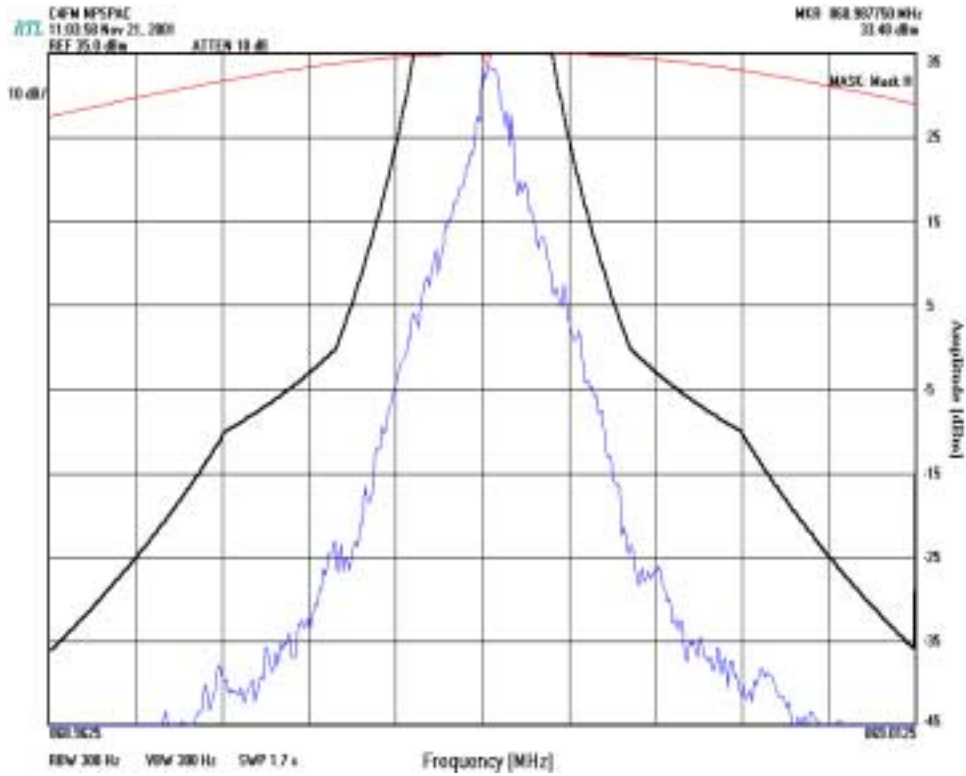

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-10: OCCUPIED BANDWIDTH (NON-NPSPAC 2 LEVEL FM DIGITAL MODULATION) (9 KHZ) – 99% POWER BANDWIDTH; PART 90.210

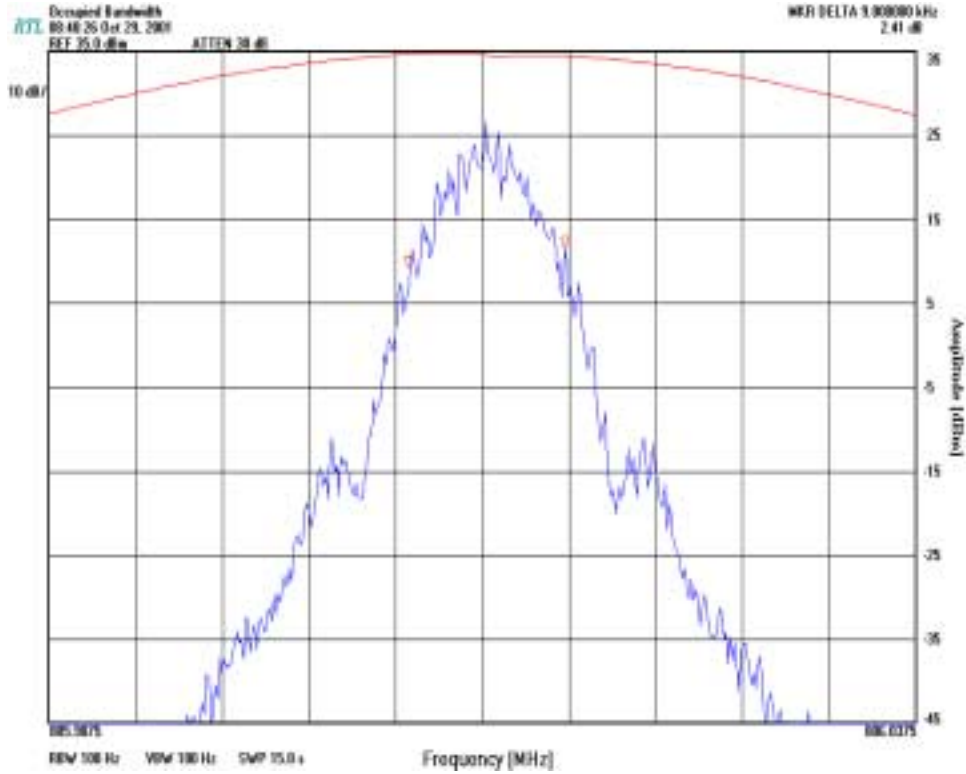

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 7-11: OCCUPIED BANDWIDTH (C4FM NON-NPSPAC DIGITAL MODULATION) (8.1 KHZ) – 99% POWER BANDWIDTH; PART 90.210

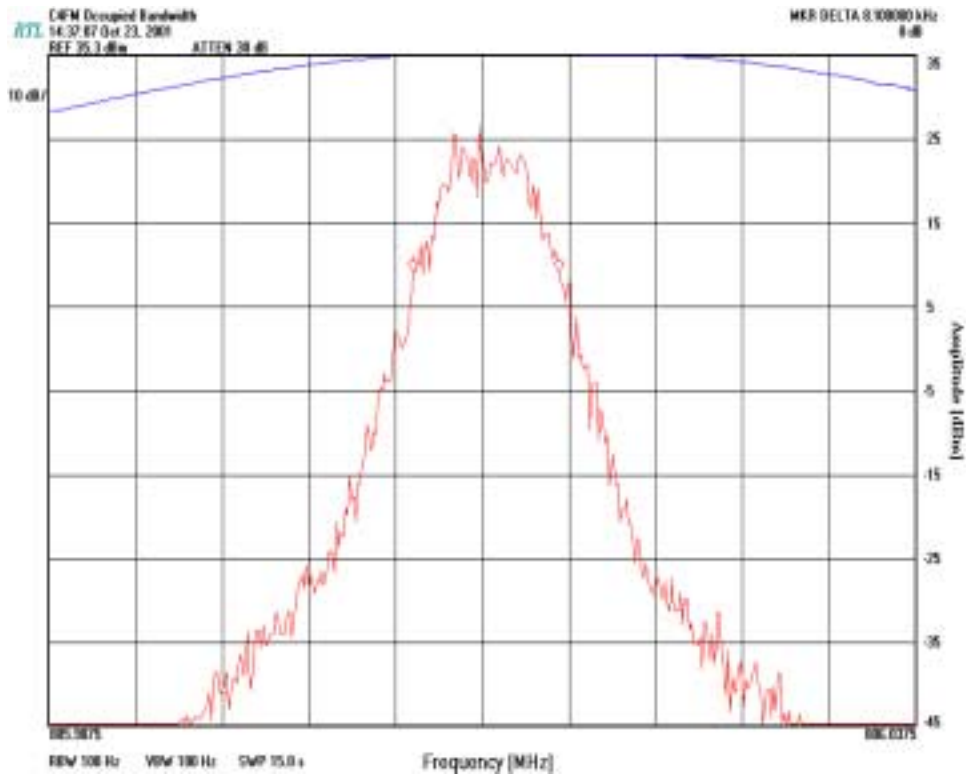

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER

SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST

TABLE 7-1: TEST EQUIPMENT USED FOR TESTING (OCCUPIED BANDWIDTH)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

8 FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY

8.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to $+50^{\circ}\text{C}$.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A $\frac{1}{2}$ an hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied from 85% to 115% of the nominal voltage.

The worst-case test data are shown.




8.2 TEST DATA

8.2.1 FREQUENCY STABILITY/TEMPERATURE VARIATION

Limit is 1.5 ppm for device with a 25 kHz channel bandwidth


The 3 Watt radio was tested with a 25 kHz channel bandwidth.

PLOT 8-1: TEMPERATURE FREQUENCY STABILITY

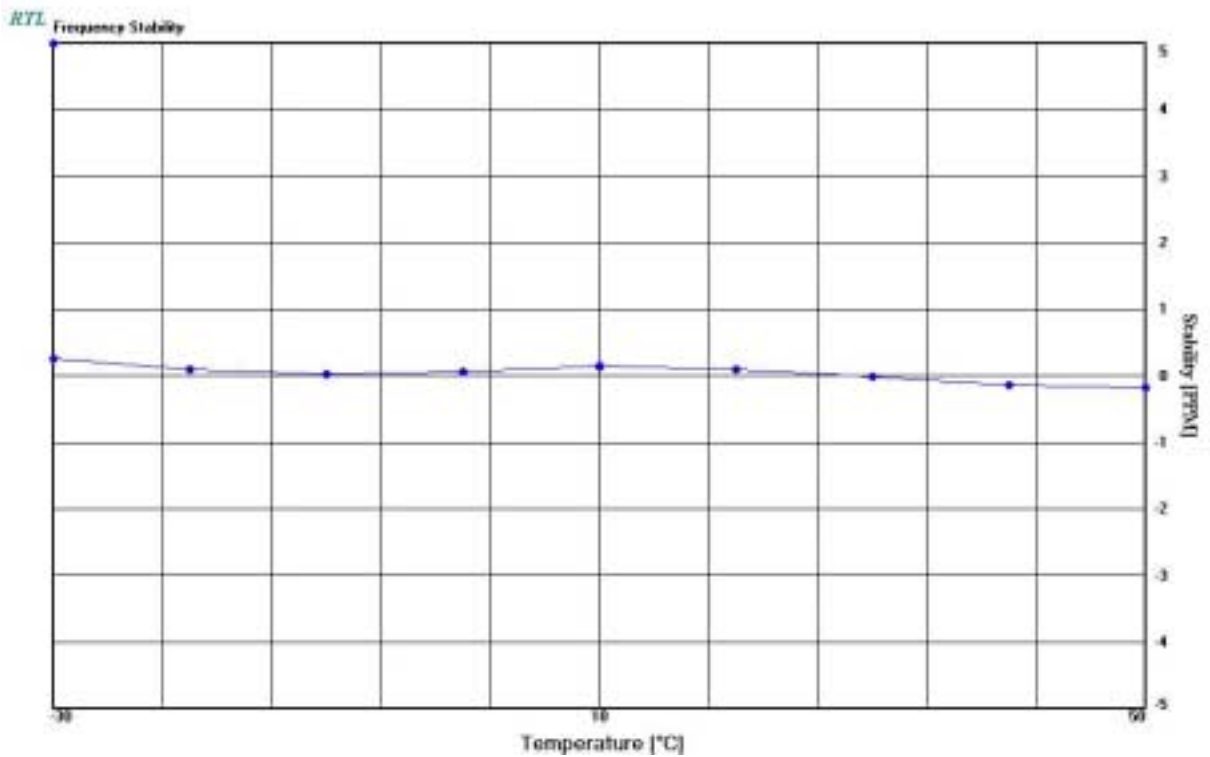

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER



 SIGNATURE

OCTOBER 15, 2001
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

TABLE 8-1: TEMPERATURE FREQUENCY STABILITY


Worse case deviation was found to be at -30° C of 0.27 ppm.

TABLE 8-2: TEMPERATURE FREQUENCY STABILITY CHANNEL 5, 823.9875 MHZ

Temperature (C)	Frequency Measured (MHz)	ppm
-30	823.987720	0.27
-20	823.987580	0.10
-10	823.987520	0.02
0	823.987550	0.06
10	823.987620	0.15
20	823.987580	0.10
30	823.987490	-0.01
40	823.987390	-0.13
50	823.987360	-0.17

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER



 SIGNATURE

OCTOBER 15, 2001
 DATE OF TEST

TABLE 8-3: TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/TEMPERATURE)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	11/07/01
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102	06/08/01



PLOT 8-2: FREQUENCY STABILITY/VOLTAGE VARIATION

Voltage Frequency Stability
 (Battery endpoint = 6.375 VDC)

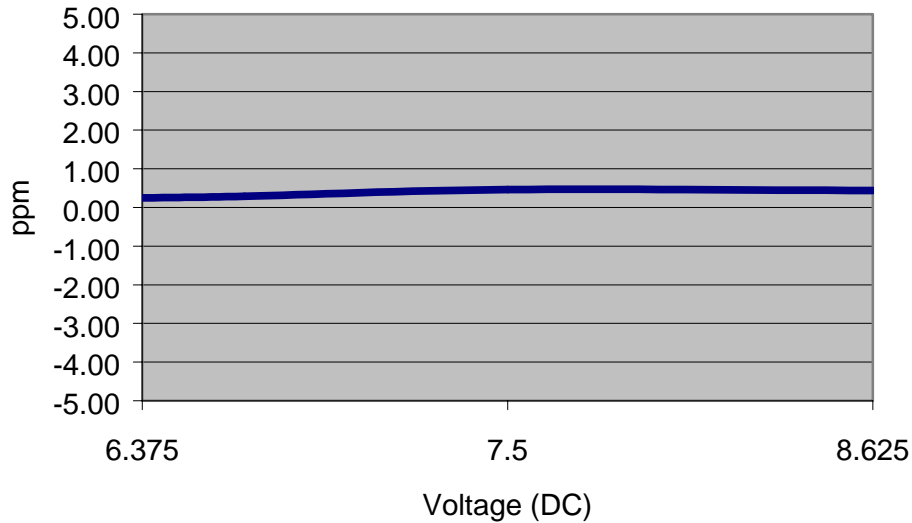


TABLE 8-4: FREQUENCY STABILITY/VOLTAGE VARIATION

The battery endpoint was measured at 6.375 VDC. The worse case variation is 0.46 ppm at the nominal voltage of 7.5 VDC.

Voltage (VDC)	ppm
6.375	0.250
6.4	0.260
6.5	0.270
6.6	0.278
6.7	0.289
7.500	0.46
8.625	0.44

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER

SIGNATURE

OCTOBER 17, 2001
 DATE OF TEST

TABLE 8-5: TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/VOLTAGE)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	11/07/01
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102	06/08/01



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

9 FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE

9.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz is set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref.

The audio signal generator was varied from 100Hz to 5kHz with the input level held constant.

The deviation in kHz was recorded using a modulation analyzer as DEVfreq.

The response in dB relative to 1 kHz was calculated as follows:

Audio Frequency Response = $20 \text{ LOG } (\text{DEVfreq}/\text{DEVref})$



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

9.2 TEST DATA

PLOT 9-1: MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE {25 kHz CHANNEL BANDWIDTH}



TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER

Daniel W. Baltzell

 SIGNATURE

JANUARY 22, 2002
 DATE OF TEST

TABLE 9-1: TEST EQUIPMENT USED FOR TESTING (AUDIO FREQUENCY RESPONSE)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	06/21/01
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102	06/08/01
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892	06/08/01



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

10 FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER


10.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

10.2 TEST DATA

PLOT 10-1: MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER

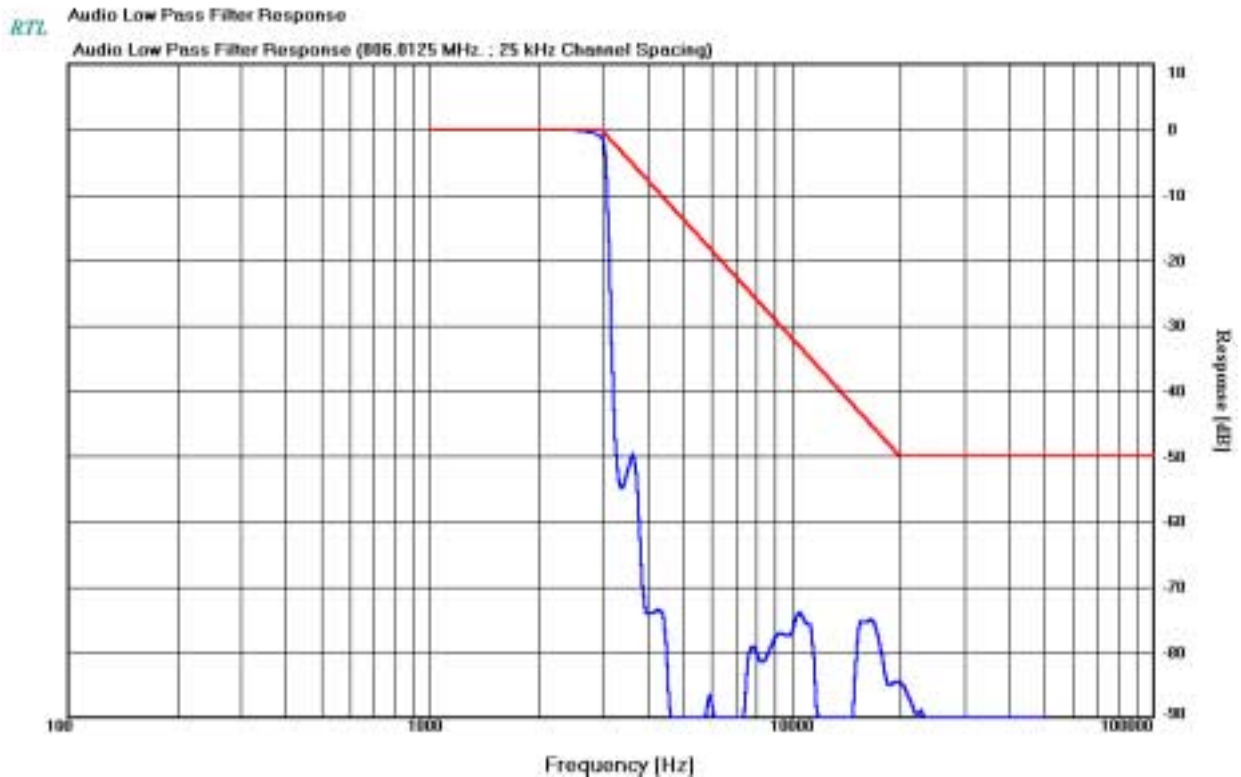

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER

Daniel W. Baltzell

 SIGNATURE

JANUARY 22, 2002
 DATE OF TEST

TABLE 10-1: TEST EQUIPMENT USED FOR TESTING (AUDIO LOW PASS FILTER RESPONSE)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	06/21/01
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102	06/08/01
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892	06/08/01



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

11 FCC RULES AND REGULATIONS PART 2 §2.1047 (B): MODULATION CHARACTERISTICS - MODULATION LIMITING


11.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.3

The transmitter is adjusted for full rated system deviation. The audio input level is adjusted for 60% of rated system deviation at 1000Hz. Using this level as a reference (0dB) the audio input level is varied from the reference to a level +20 dB above it and -20 dB under it, for modulation frequencies of 300Hz, 1,000Hz, and 2,500Hz. The system deviation obtained as a function of the input level is recorded. Both Positive and Negative Peak deviations were recorded.

11.2 TEST DATA

PLOT 11-1: MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND NEGATIVE PEAK

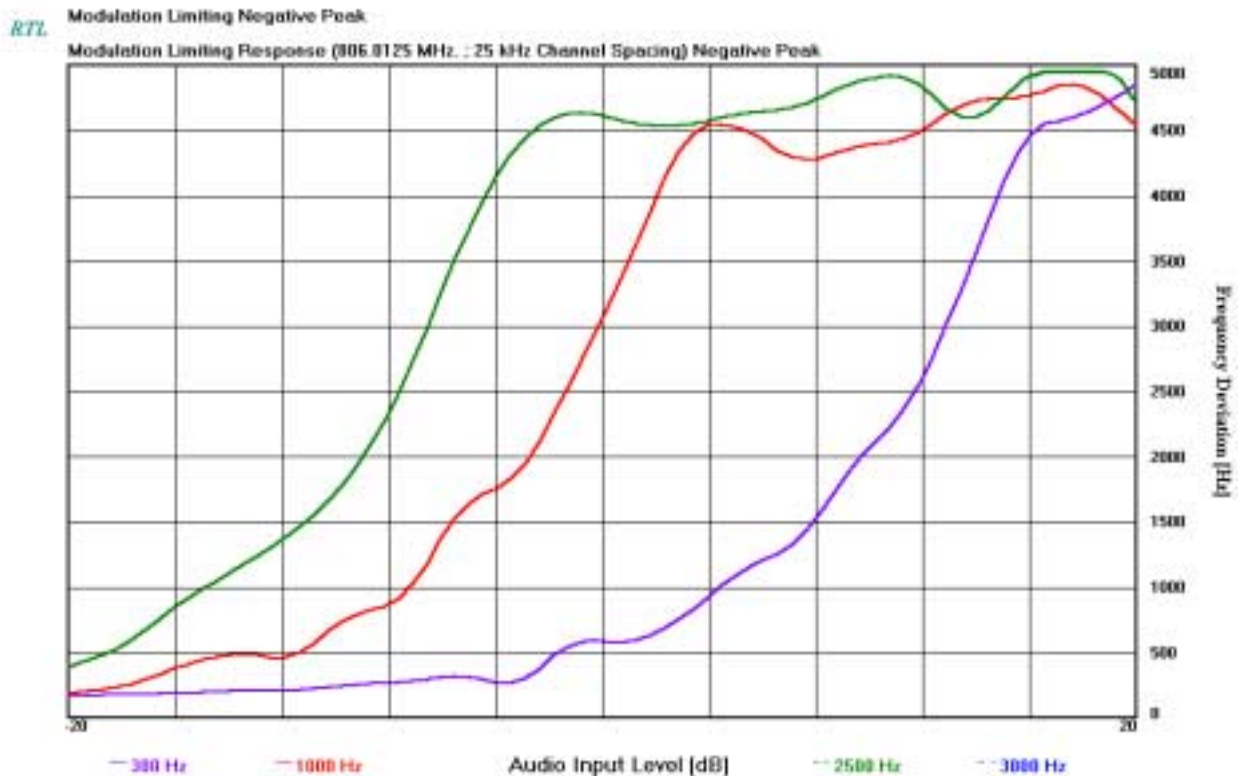

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER


SIGNATURE

JANUARY 22, 2002
 DATE OF TEST



360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

PLOT 11-2: MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND POSITIVE PEAK

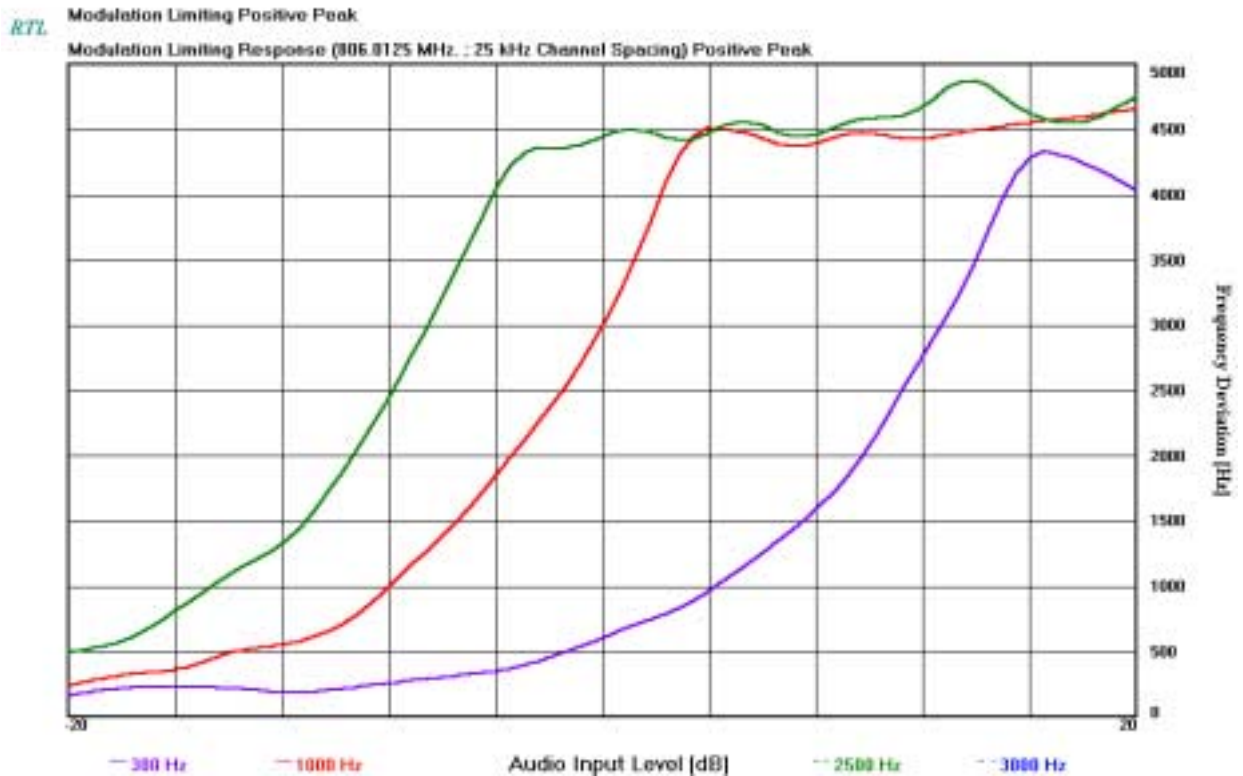

TEST PERSONNEL:

DANIEL BALTZELL
 TEST TECHNICIAN/ENGINEER

Daniel W. Baltzell

 SIGNATURE

JANUARY 22, 2002
 DATE OF TEST

TABLE 11-1: TEST EQUIPMENT USED FOR TESTING (MODULATION LIMITING)

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	06/21/01
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102	06/08/01
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892	06/08/01

