



Engineering and Testing for EMC and Safety Compliance

TYPE CERTIFICATION REPORT

M/A-COM, Inc.
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Daryl Popowitch
Phone: (434) 455-9527

MODEL: MastrIII/Sitepro Trunking Base Station Radio

FCC ID: OWDTR-0028-E

October 1, 2003

| STANDARDS REFERENCED FOR THIS REPORT | |
|--------------------------------------|--|
| PART 2: 2001 | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS |
| PART 15: 2001 | RADIO FREQUENCY DEVICES - §15.109: RADIATED EMISSIONS LIMITS |
| PART 90: 2001 | PRIVATE LAND MOBILE RADIO SERVICES |
| ANSI C63.4-1992 | STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS |
| ANSI/TIA/EIA603- 1992 | LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS |
| ANSI/TIA/EIA 603-1-1998 | ADDENDUM TO ANSI/TIA/EIA 603-1992 |
| ANSI/TIA/EIA -102.CAAA; 1999 | DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS |
| RSS-119; Issue 6; 2000 | LAND MOBILE AND FIXED RADIO TRANSMITTERS AND RECEIVERS 27.41 TO 960.0 MHz |

| Frequency Range | Maximum Measured Output Power (W) Conducted | Frequency Tolerance (ppm) | Emission Designator |
|-----------------|---|---------------------------|---------------------------------------|
| 470-494 MHz | 91.20 | 1.5 | 16K0F3E (Voice) |
| 470-494 MHz | 91.20 | 1.5 | 11K0F3E (Voice) |
| 470-494 MHz | 91.20 | 1.5 | 6K0F1D (2 level NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 6K0F1E (2 level NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 6K9F1D (2 level XNB NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 6K9F1E (2 level XNB NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 10K0F1D (2 level WB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 10K0F1E (2 level WB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 8K1F1D (4 Level) measured |
| 470-494 MHz | 91.20 | 1.5 | 8K1F1E (4 Level) measured |

REPORT PREPARED BY TEST ENGINEER: DAN BIGGS

Document Number: 2003061 / QRTL03-804

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.

TABLE OF CONTENTS

| | | |
|-------|--|----|
| 1 | GENERAL INFORMATION..... | 5 |
| 1.1 | TEST FACILITY..... | 5 |
| 1.2 | RELATED SUBMITTAL(S)/GRANT(S)..... | 5 |
| 2 | CONFORMANCE STATEMENT..... | 6 |
| 3 | TESTED SYSTEM DETAILS..... | 7 |
| 4 | FCC RULES AND REGULATIONS PART 2 §2.1033(C)(8) VOLTAGES AND CURRENTS THROUGH THE FINAL AMPLIFYING STAGE..... | 8 |
| 5 | FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED..... | 9 |
| 5.1 | TEST PROCEDURE..... | 9 |
| 5.2 | TEST DATA..... | 9 |
| 6 | FCC RULES AND REGULATIONS PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... | 10 |
| 6.1 | TEST PROCEDURE..... | 10 |
| 6.2 | TEST DATA..... | 10 |
| 7 | FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION..... | 14 |
| 7.1 | TEST PROCEDURE..... | 14 |
| 7.2 | TEST DATA..... | 14 |
| 7.2.1 | CFR 47 PART 90.210 REQUIREMENTS..... | 14 |
| 8 | FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH..... | 16 |
| 8.1 | TEST PROCEDURE..... | 16 |
| 8.2 | TEST DATA..... | 16 |
| 9 | FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY..... | 22 |
| 9.1 | TEST PROCEDURE..... | 22 |
| 9.2 | TEST DATA..... | 23 |
| 9.2.1 | FREQUENCY STABILITY/TEMPERATURE VARIATION..... | 23 |
| 9.2.2 | FREQUENCY STABILITY/VOLTAGE VARIATION..... | 25 |
| 10 | FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE..... | 27 |
| 10.1 | TEST PROCEDURE..... | 27 |
| 10.2 | TEST DATA..... | 27 |
| 11 | FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER..... | 29 |
| 11.1 | TEST PROCEDURE..... | 29 |
| 11.2 | TEST DATA..... | 29 |
| 12 | FCC RULES AND REGULATIONS PART 2 §2.1047 (B): MODULATION CHARACTERISTICS - MODULATION LIMITING..... | 31 |
| 12.1 | TEST PROCEDURE..... | 31 |
| 12.2 | TEST DATA..... | 31 |
| 13 | FCC RULES AND REGULATIONS PART 90 §90.214: TRANSIENT FREQUENCY BEHAVIOR..... | 35 |
| 13.1 | TEST PROCEDURE..... | 35 |
| 13.2 | TEST DATA..... | 35 |
| 14 | FCC RULES AND REGULATIONS PART 2 §2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH..... | 39 |
| 15 | CONCLUSION..... | 39 |

TABLE OF TABLES

| | | |
|-------------|---|----|
| TABLE 3-1: | EQUIPMENT UNDER TEST (EUT) | 7 |
| TABLE 3-2: | SUPPORT EQUIPMENT | 7 |
| TABLE 5-1: | RF POWER OUTPUT (HIGH POWER): CARRIER OUTPUT POWER (UNMODULATED) | 9 |
| TABLE 5-2: | RF POWER OUTPUT (RATED POWER) | 9 |
| TABLE 5-3: | TEST EQUIPMENT USED FOR TESTING (RF POWER OUTPUT - CONDUCTED) | 9 |
| TABLE 6-1: | CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 470.025 MHz – HIGH POWER | 10 |
| TABLE 6-2: | CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 470.025 MHz – LOW POWER | 11 |
| TABLE 6-3: | CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 482.525 MHz – HIGH POWER | 11 |
| TABLE 6-4: | CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 482.525 MHz - LOW POWER | 12 |
| TABLE 6-5: | CONDUCTED SPURIOUS EMISSIONS CHANNEL 3 – 493.975 MHz- HIGH POWER | 12 |
| TABLE 6-6: | CONDUCTED SPURIOUS EMISSIONS CHANNEL 3 – 493.975 MHz - LOW POWER | 13 |
| TABLE 6-7: | TEST EQUIPMENT USED FOR TESTING (CONDUCTED SPURIOUS EMISSIONS) | 13 |
| TABLE 7-1: | FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 482.525 MHz; NARROW BAND | 14 |
| TABLE 7-2: | FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 482.525 MHz; NARROW BAND | 15 |
| TABLE 7-3: | TEST EQUIPMENT USED FOR TESTING (FIELD STRENGTH OF SPURIOUS RADIATION) | 15 |
| TABLE 8-1: | TEST EQUIPMENT USED FOR TESTING (OCCUPIED BANDWIDTH) | 21 |
| TABLE 9-1: | TEMPERATURE FREQUENCY STABILITY CHANNEL 2, 482.525 MHz | 24 |
| TABLE 9-2: | TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/TEMPERATURE) | 24 |
| TABLE 9-3: | FREQUENCY STABILITY/VOLTAGE VARIATION CHANNEL 2, 482.525 MHz | 25 |
| TABLE 9-4: | TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/VOLTAGE) | 26 |
| TABLE 10-1: | TEST EQUIPMENT USED FOR TESTING (AUDIO FREQUENCY RESPONSE) | 28 |
| TABLE 11-1: | TEST EQUIPMENT USED FOR TESTING (AUDIO LOW PASS FILTER RESPONSE) | 30 |
| TABLE 12-1: | TEST EQUIPMENT USED FOR TESTING (MODULATION LIMITING) | 34 |
| TABLE 13-1: | TEST EQUIPMENT USED FOR TESTING (TRANSIENT FREQUENCY BEHAVIOR) | 38 |

TABLE OF PLOTS

| | | |
|------------|---|----|
| PLOT 8-1: | OCCUPIED BANDWIDTH; WIDE BAND; AUDIO MODULATION: 2,500 Hz | 16 |
| PLOT 8-2: | OCCUPIED BANDWIDTH; NARROW BAND; AUDIO MODULATION: 2,500 Hz | 17 |
| PLOT 8-3: | 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; WIDE BAND; 9600 BAUD | 18 |
| PLOT 8-4: | 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 9600 BAUD | 19 |
| PLOT 8-5: | 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 9600 BAUD; XNB | 20 |
| PLOT 8-6: | 99% OCCUPIED BANDWIDTH - C4FM; NARROW BAND; 4800 BAUD | 21 |
| PLOT 9-1: | TEMPERATURE FREQUENCY STABILITY | 23 |
| PLOT 9-2: | VOLTAGE FREQUENCY STABILITY | 25 |
| PLOT 10-1: | MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE {12.5 kHz CHANNEL BANDWIDTH} | 27 |
| PLOT 11-1: | MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER | 29 |
| PLOT 12-1: | MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; POSITIVE PEAK | 31 |
| PLOT 12-2: | MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; NEGATIVE PEAK | 32 |
| PLOT 12-3: | MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; POSITIVE PEAK | 33 |
| PLOT 12-4: | MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; NEGATIVE PEAK | 34 |
| PLOT 13-1: | TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHz; HIGH POWER; WIDE BAND; CARRIER ON TIME | 35 |
| PLOT 13-2: | TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHz; HIGH POWER; WIDE BAND; CARRIER OFF TIME | 36 |
| PLOT 13-3: | TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHz; HIGH POWER; NARROW BAND; CARRIER ON TIME | 37 |
| PLOT 13-4: | TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHz; HIGH POWER; NARROW BAND; CARRIER OFF TIME | 38 |

TABLE OF FIGURES

| | | |
|-------------|-------------------------------------|---|
| FIGURE 3-1: | CONFIGURATION OF TESTED SYSTEM..... | 8 |
|-------------|-------------------------------------|---|

TABLE OF APPENDICES

| | | |
|-------------|---|----|
| APPENDIX A: | FCC PART 1.1307, 1.1310, 2.1091, 2.1093: RF EXPOSURE..... | 40 |
| APPENDIX B: | CONFIDENTIALITY REQUEST | 41 |
| APPENDIX C: | OPERATIONAL DESCRIPTION..... | 42 |
| APPENDIX D: | LABEL INFORMATION | 43 |
| APPENDIX E: | PARTS LIST..... | 44 |
| APPENDIX F: | PARTS LIST / TUNE UP PROCEDURE | 45 |
| APPENDIX G: | SCHEMATICS..... | 46 |
| APPENDIX H: | BLOCK DIAGRAM | 47 |
| APPENDIX I: | MANUAL | 48 |
| APPENDIX J: | TEST CONFIGURATION PHOTOGRAPHS | 49 |
| APPENDIX K: | EXTERNAL PHOTOGRAPHS | 50 |
| APPENDIX L: | INTERNAL PHOTOGRAPHS | 51 |

TABLE OF PHOTOGRAPHS

| | | |
|---------------|------------------------------------|----|
| PHOTOGRAPH 1: | RADIATED EMISSIONS FRONT VIEW..... | 49 |
| PHOTOGRAPH 2: | RADIATED EMISSIONS REAR VIEW | 49 |

1 GENERAL INFORMATION

The following Type Certification Report is prepared on behalf of **M/A-COM, Inc.** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **MastrIII/Sitepro Trunking Base Station Radio**; **FCC ID: OWDTR-0028-E**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47, Industry Canada RSS-119, and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application report.

2 CONFORMANCE STATEMENT

| STANDARDS REFERENCED FOR THIS REPORT | |
|--------------------------------------|---|
| PART 2: 1999 | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS |
| PART 15: 1999 | §15.109: RADIATED EMISSIONS LIMITS |
| PART 90: 1998 | PRIVATE LAND MOBILE RADIO SERVICES |
| ANSI C63.4-1992 | STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS |
| ANSI/TIA/EIA603- 1992 | LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS |
| ANSI/TIA/EIA 603-1-1998 | ADDENDUM TO ANSI/TIA/EIA 603-1992 |
| ANSI/TIA/EIA -102.CAAA; 1999 | DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS |
| RSS-119; Issue 6; 2000 | LAND MOBILE AND FIXED RADIO TRANSMITTERS AND RECEIVERS 27.41 TO 960.0 MHz |

| Frequency Range | Maximum Measured Output Power (W) Conducted | Frequency Tolerance (ppm) | Emission Designator |
|-----------------|---|---------------------------|---------------------------------------|
| 470-494 MHz | 91.20 | 1.5 | 16K0F3E (Voice) |
| 470-494 MHz | 91.20 | 1.5 | 11K0F3E (Voice) |
| 470-494 MHz | 91.20 | 1.5 | 6K0F1D (2 level NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 6K0F1E (2 level NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 6K9F1D (2 level XNB NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 6K9F1E (2 level XNB NB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 10K0F1D (2 level WB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 10K0F1E (2 level WB 9600) measured |
| 470-494 MHz | 91.20 | 1.5 | 8K1F1D (4 Level) measured |
| 470-494 MHz | 91.20 | 1.5 | 8K1F1E (4 Level) measured |

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the above standards for Certification methodology.

Signature: *Richard B. Mc Murray*

Date: October 1, 2003

Typed/Printed Name: Rick McMurray

Position: Vice President of Operations

Signature: *Daniel Biggs*

Date: October 1, 2003

Typed/Printed Name: Daniel W. Biggs

Position: Test Engineer

3 TESTED SYSTEM DETAILS

Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.


TABLE 3-1: EQUIPMENT UNDER TEST (EUT)

| Part | Manufacturer | Model | PN/SN | FCC ID | RTL Bar Code |
|--|---------------|----------------|---|--------------|--------------|
| UHF Basestation Radio | M/A-COM, Inc. | SMRMCX, SXRJTX | N/A | OWDTR-0028-E | |
| T/R Shelf Transmit Synthesizer Receive Synthesizer RX Front End Module IF Module DSP module Power module | M/A-COM, Inc. | 470-494 MHz | 19D902839G9 19D902780G9 19D902781G7 19D902782G9 EA101401V1 EA101800V1 19D902589G2 | N/A | 15249 |
| T/R Shelf Transmit Synthesizer Receive Synthesizer RX Front End Module IF Module DSP module Power module | M/A-COM, Inc. | 470-494 MHz | 19D902839G9 19D902780G9 19D902781G7 19D902782G9 EA101401V1 EA101800V1 19D902589G2 | N/A | 15258 |
| Power amplifier | M/A-COM, Inc. | 470-494 MHz | 19D902797G9 | N/A | N/A |
| SitePro Controller | M/A-COM, Inc. | | EA101209V1 | N/A | N/A |
| Power Supply | M/A-COM, Inc. | | 19A149978P1/ 03109467 | N/A | N/A |

TABLE 3-2: SUPPORT EQUIPMENT

| Part | Manufacturer | Model | Serial Number | FCC ID | RTL Bar Code |
|---------------------------|--------------|--------------|-----------------------|--------|--------------|
| Laptop Computer | DELL | Latitude Cpi | N/A | N/A | 15218 |
| RG6 to 9 pin Serial Cable | | | CA101302V1 Rev R1A | N/A | N/A |

FIGURE 3-1: CONFIGURATION OF TESTED SYSTEM

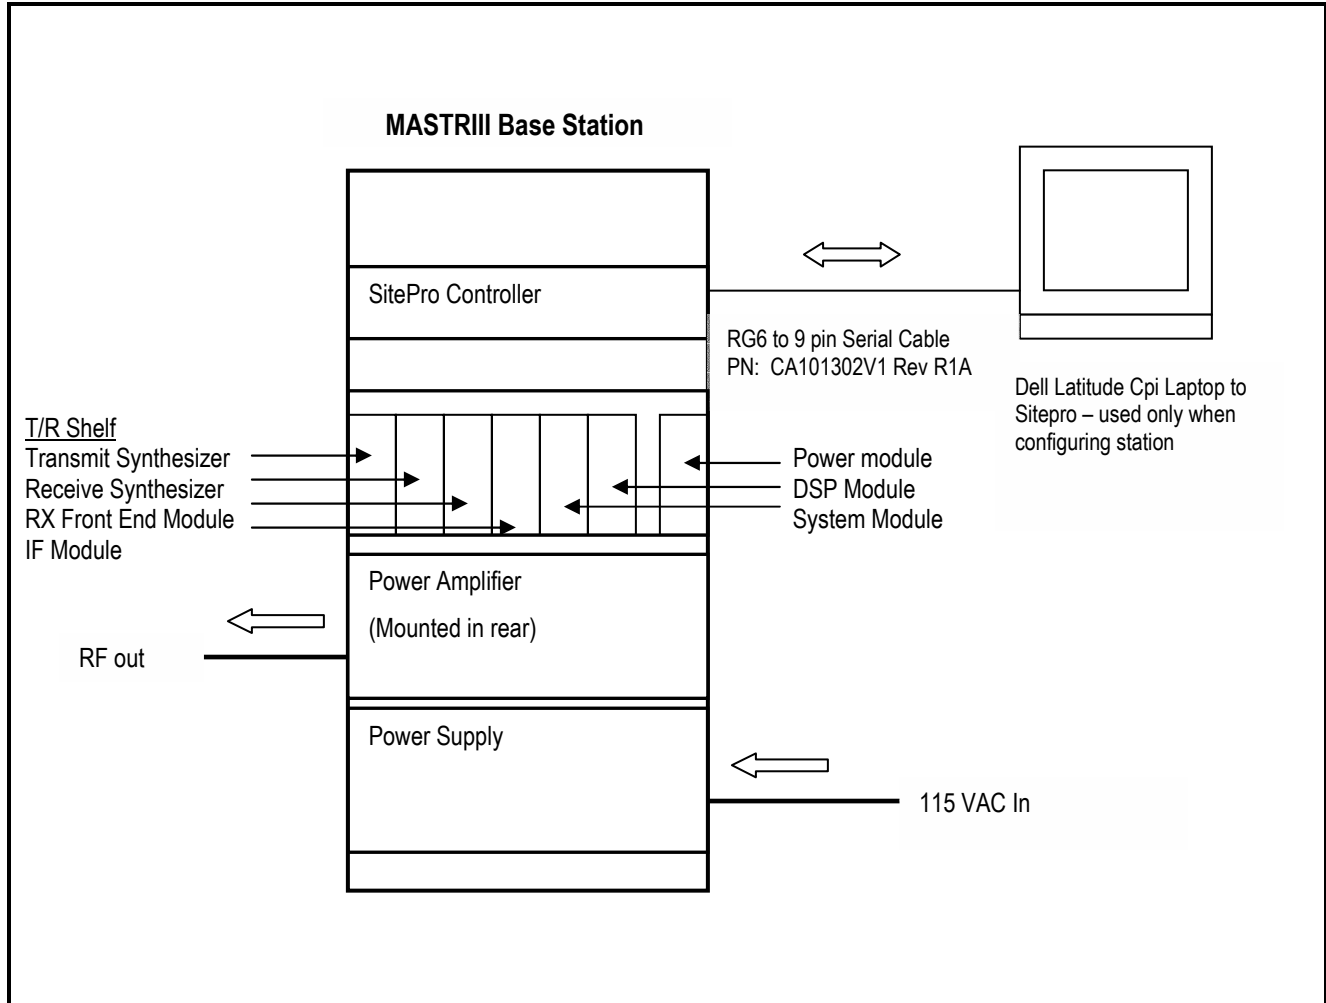

4 FCC RULES AND REGULATIONS PART 2 §2.1033(C)(8) VOLTAGES AND CURRENTS THROUGH THE FINAL AMPLIFYING STAGE

Nominal DC Voltage: 115 VAC
Current: 5 AMPS

5 FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED

5.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50Ω load impedance.

5.2 TEST DATA

The following channels (in MHz) were tested: 470.025, 482.525, and 493.975

TABLE 5-1: RF POWER OUTPUT (HIGH POWER): CARRIER OUTPUT POWER (UNMODULATED)

| Channel | Frequency (MHz) | RF Power Measured (Watt)* |
|----------------|-----------------|---------------------------|
| 1 (High Power) | 470.025 | 90.57 |
| 2 (High Power) | 482.525 | 90.16 |
| 3 (High Power) | 493.975 | 91.20 |
| 1 (Low Power) | 470.025 | 45.71 |
| 2 (Low Power) | 482.525 | 45.60 |
| 3 (Low Power) | 493.975 | 46.13 |

* Measurement accuracy: +/- .02 dB (logarithmic mode)

TABLE 5-2: RF POWER OUTPUT (RATED POWER)

| Rated Power (W) |
|-----------------|
| 45-90 |

TABLE 5-3: TEST EQUIPMENT USED FOR TESTING (RF POWER OUTPUT - CONDUCTED)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Due Date |
|---------------|--------------|---------------|----------------------|---------------------------|----------------------|
| 901184/901186 | Agilent | E4416A/E9323A | Power Meter / Sensor | GB41050573/US420.52510380 | 07/30/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---|---------------|
| DANIEL BIGGS |  | JUNE 10, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

6 FCC RULES AND REGULATIONS PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

6.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

The transmitter is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600-bps

6.2 TEST DATA

Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc

Limits: Mask D (dBm): $P(\text{dBm}) - (50 + 10 \times \text{LOG } P(\text{W}))$

The following channels (in MHz) were investigated: 470.025, 482.525, and 493.975. The worse case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

TABLE 6-1: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 470.025 MHZ – HIGH POWER

(470.025 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 90.57 W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 940.05 | 89.31 | 69.57 | -19.74 |
| 1410.075 | 83.31 | 69.57 | -13.74 |
| 1880.1 | 92.94 | 69.57 | -23.37 |
| 2350.125 | 92.11 | 69.57 | -22.54 |
| 2820.15 | 90.91 | 69.57 | -21.34 |
| 3290.175 | 87.47 | 69.57 | -17.90 |
| 3760.2 | 87.62 | 69.57 | -18.05 |
| 4230.225 | 86.31 | 69.57 | -16.74 |
| 4700.25 | 88.83 | 69.57 | -19.26 |
| 5170.275 | 89.75 | 69.57 | -20.18 |

TABLE 6-2: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 470.025 MHZ – LOW POWER

(470.025 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 45.71 W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 940.05 | 90.47 | 66.60 | -23.87 |
| 1410.075 | 84.38 | 66.60 | -17.78 |
| 1880.1 | 88.82 | 66.60 | -22.22 |
| 2350.125 | 91.17 | 66.60 | -24.57 |
| 2820.15 | 87.82 | 66.60 | -21.22 |
| 3290.175 | 86.72 | 66.60 | -20.12 |
| 3760.2 | 85.65 | 66.60 | -19.05 |
| 4230.225 | 85.44 | 66.60 | -18.84 |
| 4700.25 | 84.59 | 66.60 | -17.99 |
| 5170.275 | 87.29 | 66.60 | -20.69 |

TABLE 6-3: CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 482.525 MHZ – HIGH POWER

(482.525 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 90.16 W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 965.05 | 88.22 | 69.55 | -18.67 |
| 1447.575 | 87.18 | 69.55 | -17.63 |
| 1930.1 | 83.87 | 69.55 | -14.32 |
| 2412.625 | 93.34 | 69.55 | -23.79 |
| 2895.15 | 91.86 | 69.55 | -22.31 |
| 3377.675 | 89.34 | 69.55 | -19.79 |
| 3860.2 | 83.26 | 69.55 | -13.71 |
| 4342.725 | 90.28 | 69.55 | -20.73 |
| 4825.25 | 88.85 | 69.55 | -19.30 |
| 5307.775 | 86.53 | 69.55 | -16.98 |

TABLE 6-4: CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 482.525 MHZ - LOW POWER

(482.525 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 45.60 W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 965.05 | 88.44 | 66.59 | -21.85 |
| 1447.575 | 85.47 | 66.59 | -18.88 |
| 1930.1 | 88.39 | 66.59 | -21.80 |
| 2412.625 | 88.84 | 66.59 | -22.25 |
| 2895.15 | 86.44 | 66.59 | -19.85 |
| 3377.675 | 85.11 | 66.59 | -18.52 |
| 3860.2 | 81.64 | 66.59 | -15.05 |
| 4342.725 | 84.79 | 66.59 | -18.20 |
| 4825.25 | 83.80 | 66.59 | -17.21 |
| 5307.775 | 83.44 | 66.59 | -16.85 |

TABLE 6-5: CONDUCTED SPURIOUS EMISSIONS CHANNEL 3 – 493.975 MHZ- HIGH POWER

(493.975 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 91.20 W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 987.95 | 83.77 | 69.60 | -14.17 |
| 1481.925 | 85.44 | 69.60 | -15.84 |
| 1975.9 | 85.54 | 69.60 | -15.94 |
| 2469.875 | 82.94 | 69.60 | -13.34 |
| 2963.85 | 81.60 | 69.60 | -12.00 |
| 3457.825 | 79.43 | 69.60 | -9.83 |
| 3951.8 | 77.44 | 69.60 | -7.84 |
| 4445.775 | 79.93 | 69.60 | -10.33 |
| 4939.75 | 83.60 | 69.60 | -14.00 |
| 5433.725 | 80.77 | 69.60 | -11.17 |

TABLE 6-6: CONDUCTED SPURIOUS EMISSIONS CHANNEL 3 – 493.975 MHZ - LOW POWER


(493.975 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 46.13 W

| Frequency (MHz) | Level (dBc) | Limit (dBc) | Margin(dB) |
|-----------------|-------------|-------------|------------|
| 987.95 | 82.64 | 66.64 | -16.00 |
| 1481.925 | 83.31 | 66.64 | -16.67 |
| 1975.9 | 81.47 | 66.64 | -14.83 |
| 2469.875 | 80.48 | 66.64 | -13.84 |
| 2963.85 | 78.98 | 66.64 | -12.34 |
| 3457.825 | 76.47 | 66.64 | -9.83 |
| 3951.8 | 73.81 | 66.64 | -7.17 |
| 4445.775 | 76.47 | 66.64 | -9.83 |
| 4939.75 | 80.30 | 66.64 | -13.66 |
| 5433.725 | 77.97 | 66.64 | -11.33 |

TABLE 6-7: TEST EQUIPMENT USED FOR TESTING (CONDUCTED SPURIOUS EMISSIONS)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|----------|---|---------------|------------------|
| 901215 | Hewlett Packard | 8596EM | EMC Analyzer (9 kHz-12.8 GHz) | 3826A00144 | 08/23/03 |
| 901057 | Hewlett Packard | 3336B | Synthesizer/Level Generator | 2514A02585 | 07/31/03 |
| 901054 | Hewlett Packard | HP 3586B | Selective Level Meter | 1928A01892 | 09/09/04 |
| 900913 | Hewlett Packard | 85462A | EMI Receiver RF Section (9 kHz – 6.5 GHz) | 3325A00159 | 12/05/03 |

TEST PERSONNEL:

| | | |
|--------------------------|---|---------------|
| DANIEL BIGGS |  | JUNE 18, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

7 FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION

7.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600-bps

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator and the gain of the antenna was further corrected to a half wave dipole.

7.2 TEST DATA

7.2.1 CFR 47 PART 90.210 REQUIREMENTS

The worst-case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

TABLE 7-1: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 482.525 MHZ; NARROW BAND

Radiated Spurious Emissions
 Mid Band Channel 2 (482.525 MHz, Narrowband)
 Limit = 50 + 10 Log P = 69.55 dBc
 Conducted Power = 49.55 dBm = 90.16 W

| Frequency (MHz) | Spectrum Analyzer Level (dBuV) | Signal Generator Level (dBm) | Cable Loss* (dB) | Antenna Gain (dBd) | Corrected Signal Generator Level (dBc) | Margin (dB) |
|-----------------|--------------------------------|------------------------------|------------------|--------------------|--|-------------|
| 965.05 | 49.5 | -62.2 | 0.4 | -1.3 | 113.5 | -43.9 |
| 1447.575 | 49.1 | -53.8 | 0.5 | 4.2 | 99.7 | -30.2 |
| 1930.1 | 66.6 | -31.4 | 0.6 | 4.8 | 76.8 | -7.2 |
| 2412.625 | 40.5 | -40.9 | 0.7 | 5.1 | 86.1 | -16.5 |
| 2895.15 | 40.3 | -42.5 | 0.8 | 6.0 | 86.8 | -17.3 |
| 3377.675 | 34.8 | -46.1 | 0.8 | 6.0 | 90.4 | -20.9 |
| 3860.2 | 33.3 | -44.6 | 0.9 | 5.9 | 89.2 | -19.6 |
| 4342.725 | 33.2 | -38.2 | 0.9 | 6.7 | 82.0 | -12.4 |
| 4825.25 | 34.5 | -32.4 | 1.0 | 7.0 | 76.0 | -6.4 |
| 5307.775 | 33.9 | -37.9 | 1.1 | 6.6 | 81.9 | -12.4 |

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

TABLE 7-2: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 482.525 MHZ; NARROW BAND

Radiated Spurious Emissions
 Mid Band Channel 2 (482.525 MHz, Narrowband)
 Limit = 50 + 10 Log P = 66.59 dBc
 Conducted Power = 46.59 dBm = 45.60 W


| Frequency (MHz) | Spectrum Analyzer Level (dBuV) | Signal Generator Level (dBm) | Cable Loss* (dB) | Antenna Gain (dBd) | Corrected Signal Generator Level (dBc) | Margin (dB) |
|-----------------|--------------------------------|------------------------------|------------------|--------------------|--|-------------|
| 965.05 | 49.5 | -62.2 | 0.4 | -1.3 | 110.5 | -43.9 |
| 1447.575 | 46.2 | -56.7 | 0.5 | 4.2 | 99.6 | -33.1 |
| 1930.1 | 63.5 | -34.5 | 0.6 | 4.8 | 76.9 | -10.3 |
| 2412.625 | 40.8 | -40.6 | 0.7 | 5.1 | 82.8 | -16.2 |
| 2895.15 | 38.7 | -44.1 | 0.8 | 6.0 | 85.5 | -18.9 |
| 3377.675 | 34.3 | -46.6 | 0.8 | 6.0 | 88.0 | -21.4 |
| 3860.2 | 39.1 | -38.8 | 0.9 | 5.9 | 80.4 | -13.8 |
| 4342.725 | 32.2 | -39.2 | 0.9 | 6.7 | 80.0 | -13.4 |
| 4825.25 | 32.1 | -34.8 | 1.0 | 7.0 | 75.4 | -8.8 |
| 5307.775 | 30.9 | -40.9 | 1.1 | 6.6 | 82.0 | -15.4 |

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

TABLE 7-3: TEST EQUIPMENT USED FOR TESTING (FIELD STRENGTH OF SPURIOUS RADIATION)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|---------------|---|---------------|------------------|
| 901053 | Schaffner-Chase | CBL6112 | Antenna (25 MHz – 2 GHz) | 2648 | 07/03/04 |
| 900932 | Hewlett Packard | 8449B OPT H02 | Preamplifier (1-26.5 GHz) | 3008A00505 | N/A |
| 901020 | Hewlett Packard | 8564E | Portable Spectrum Analyzer (9 kHz - 40 GHz) | 3943A01719 | 07/15/04 |
| 900917 | Hewlett Packard | 8648C | Synthesized. Signal Generator (9 kHz to 3200 MHz) | 3537A01741 | 05/02/04 |
| 900928 | Hewlett Packard | HP 83752A | Synthesized Sweeper .01-20GHz | 3610A00866 | 08/05/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---|---------------|
| DANIEL BIGGS |  | JUNE 19, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

8 FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH

OCCUPIED BANDWIDTH - COMPLIANCE WITH THE EMISSION MASKS

8.1 TEST PROCEDURE


ANSI/TIA/EIA-603-1992, section 2.2.11 and TIA/EIA-102.CAAA-1999 section 2.2.5

Device with audio modulation: Transmitter was modulated with a 2,500 Hz sine wave at an input level of 16 dB greater than that required to produce 50% of rated system deviation at 1,000 Hz.


Device with digital modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600-bps

8.2 TEST DATA


PLOT 8-1: OCCUPIED BANDWIDTH; WIDE BAND; AUDIO MODULATION: 2,500 HZ

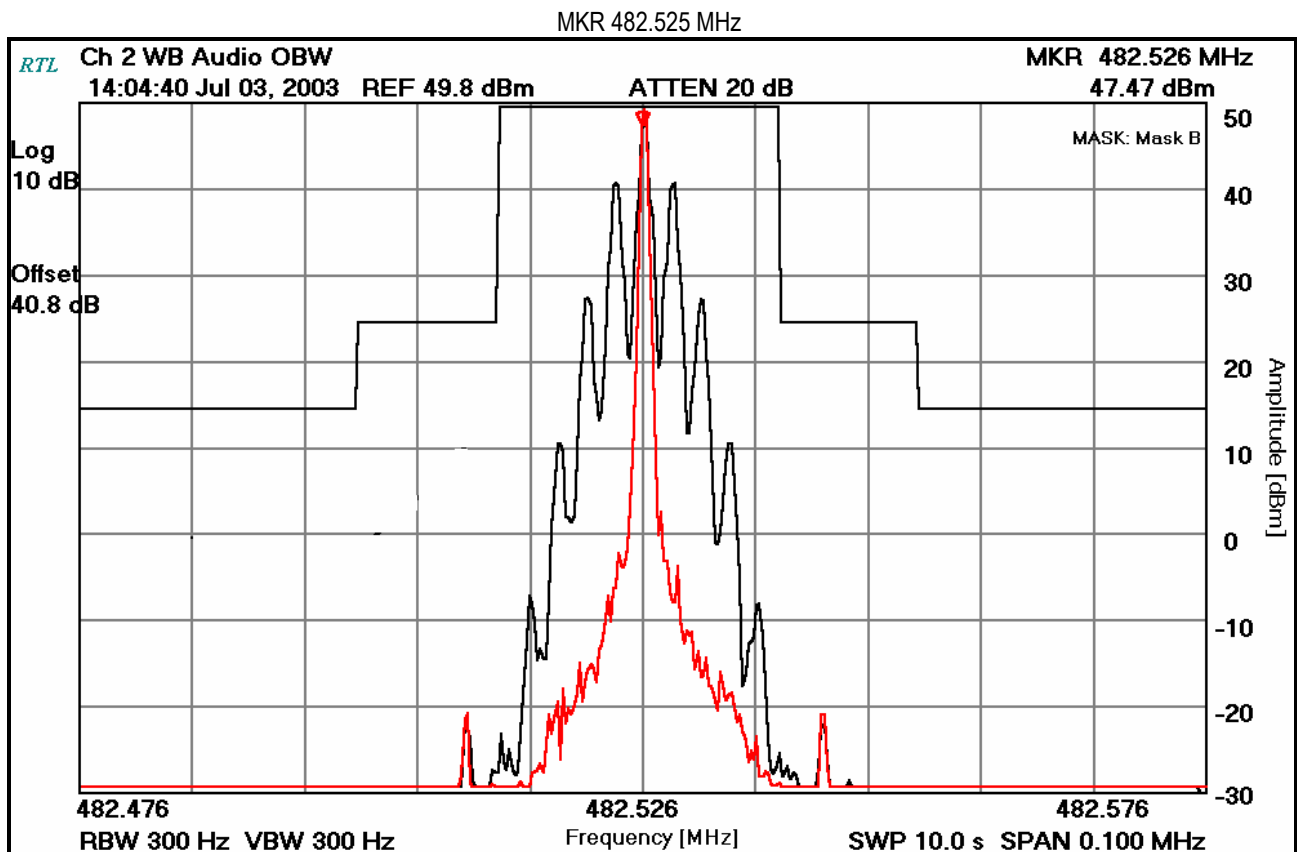


PLOT 8-2: OCCUPIED BANDWIDTH; NARROW BAND; AUDIO MODULATION: 2,500 HZ

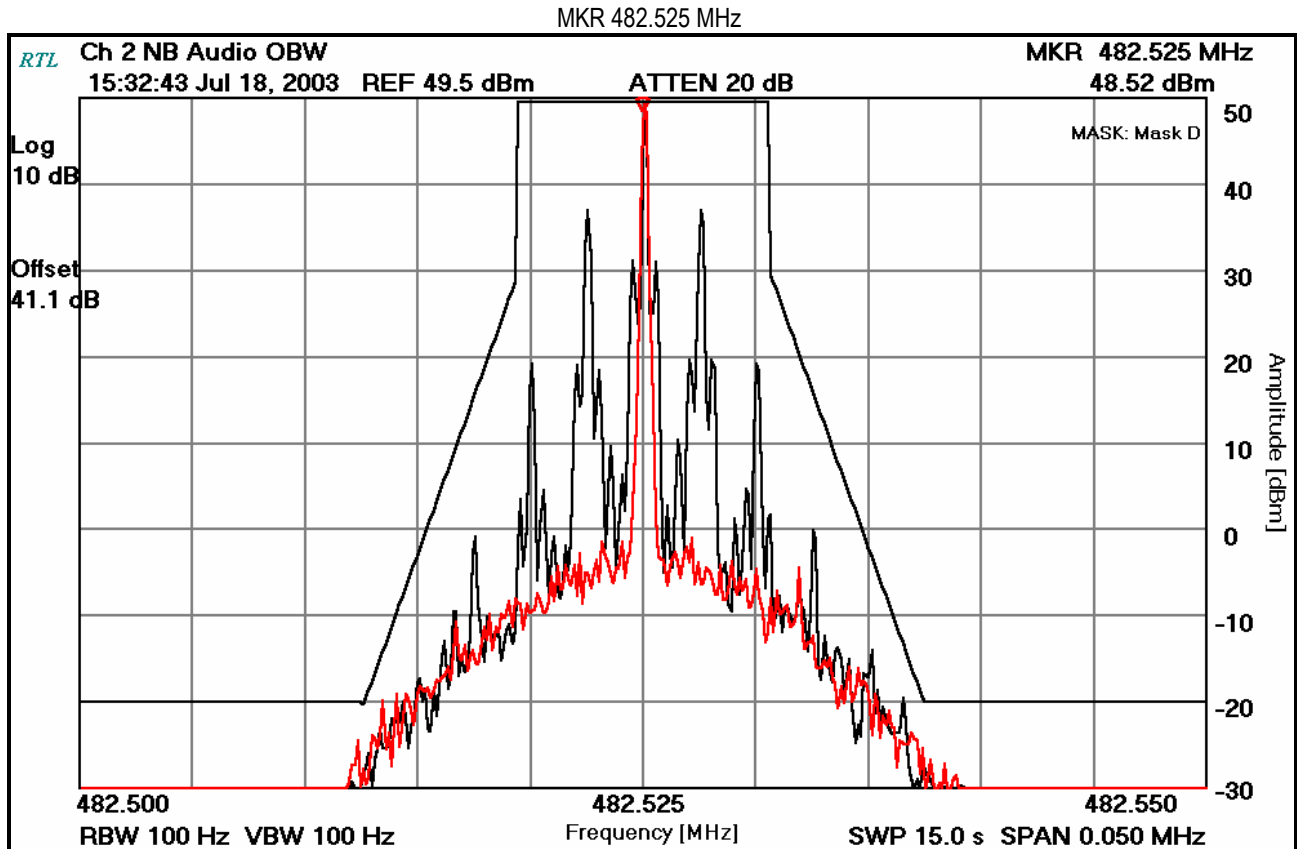


PLOT 8-3: 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; WIDE BAND; 9600 BAUD

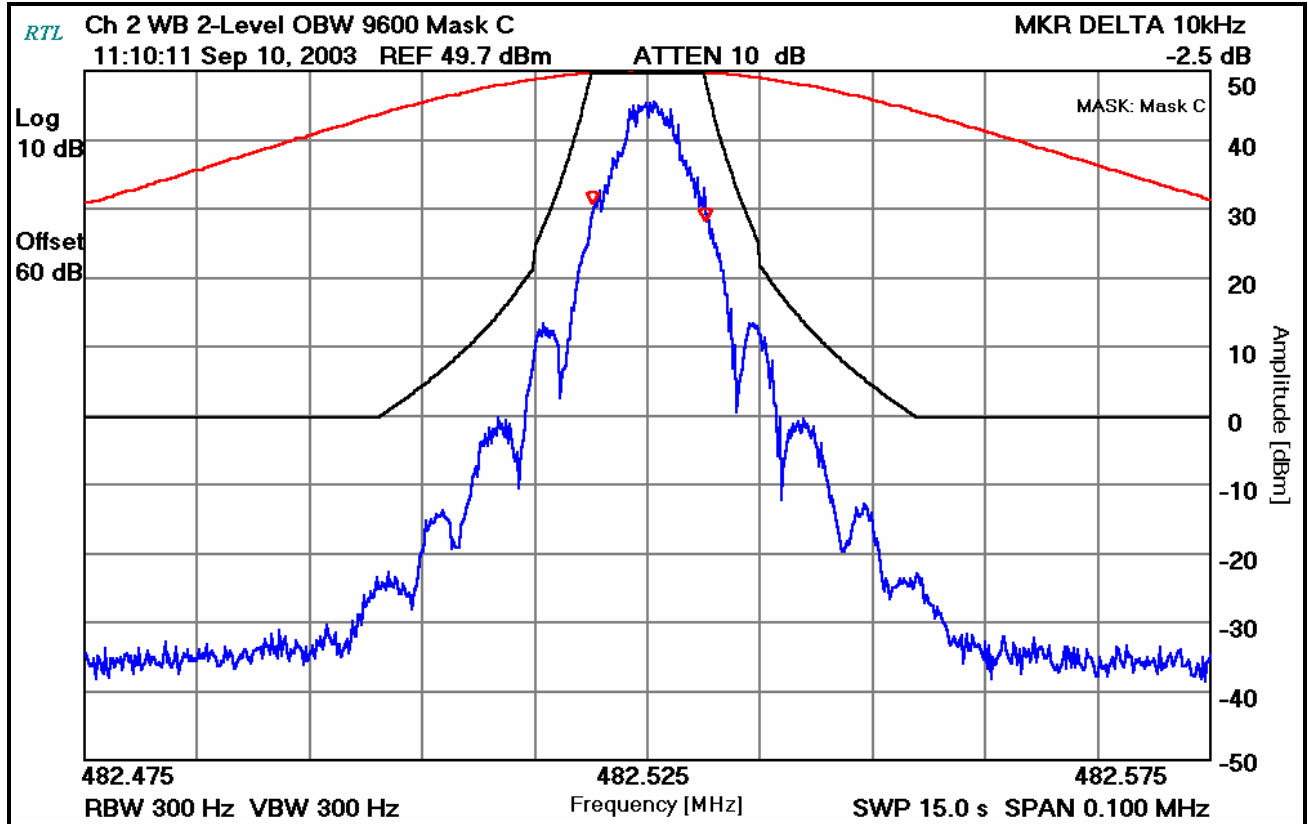

PLOT 8-4: 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 9600 BAUD

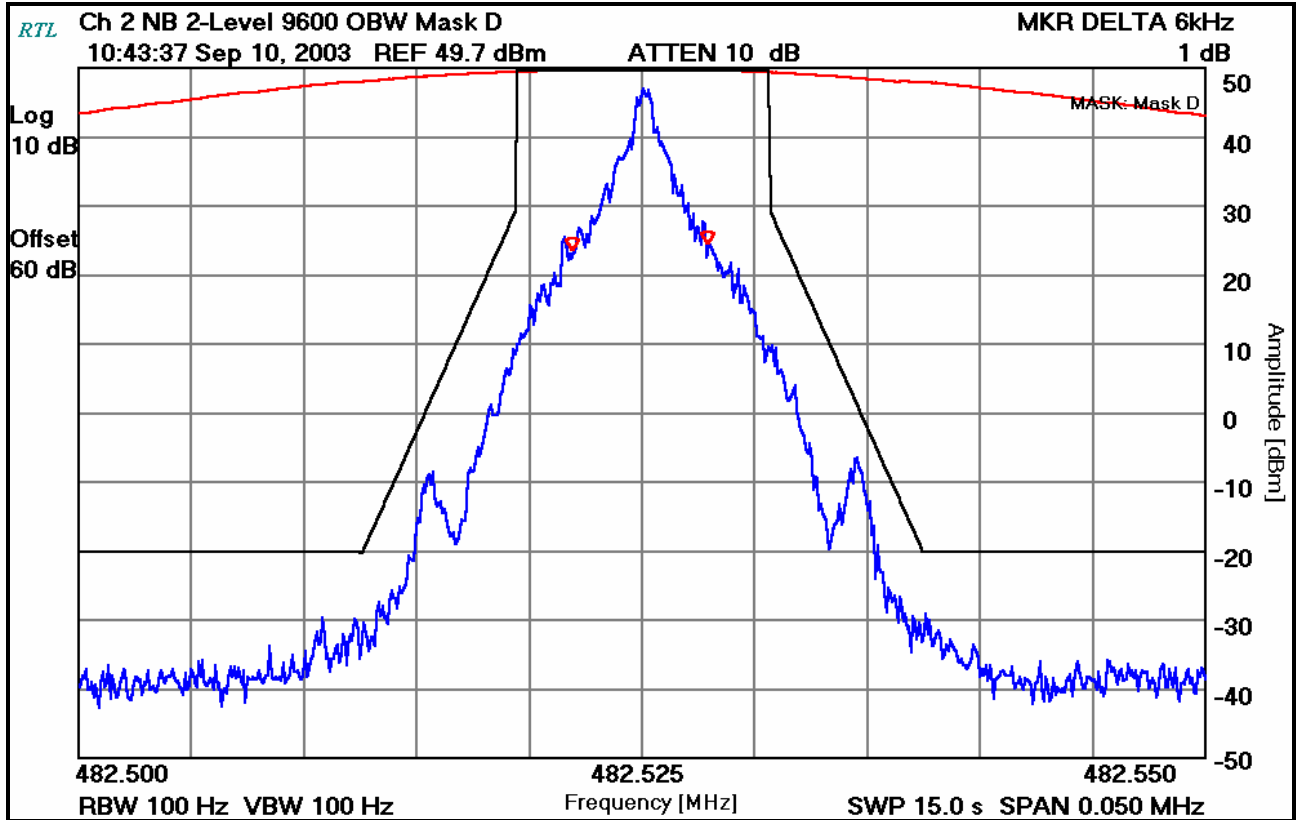

PLOT 8-5: 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 9600 BAUD; XNB

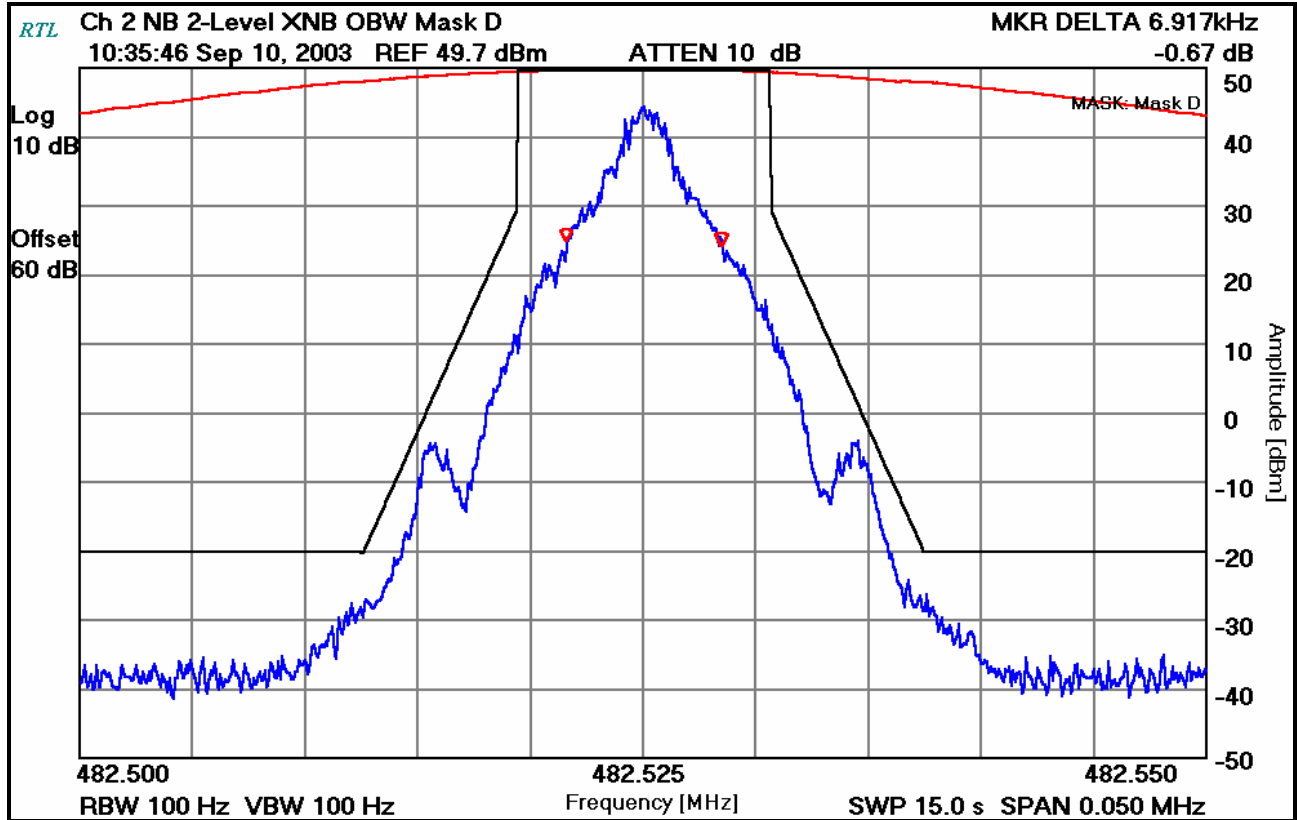

PLOT 8-6: 99% OCCUPIED BANDWIDTH - C4FM; NARROW BAND; 4800 BAUD

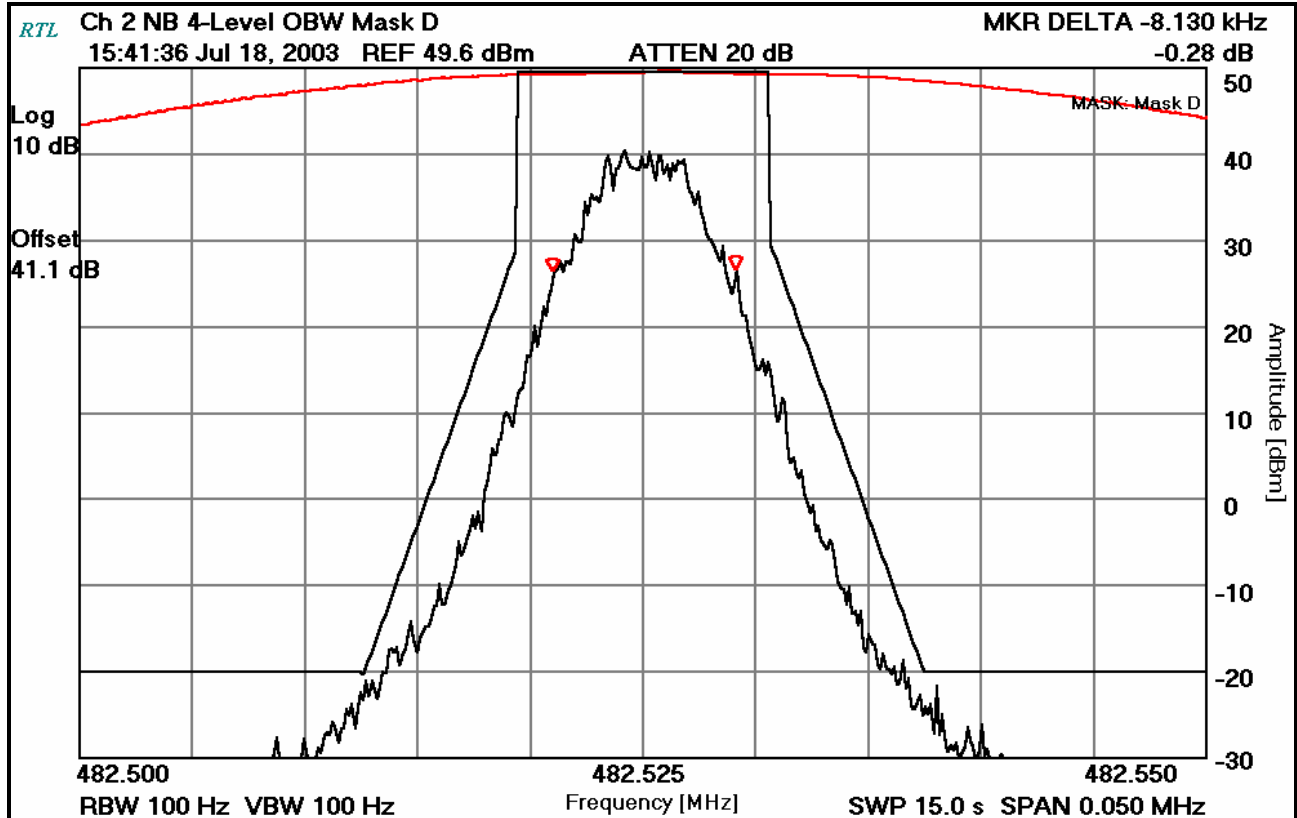


TABLE 8-1: TEST EQUIPMENT USED FOR TESTING (OCCUPIED BANDWIDTH)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|--------------------|---|---------------|------------------|
| 901020 | Hewlett Packard | 8564E | Portable Spectrum Analyzer (9 kHz - 40 GHz) | 3943A01719 | 07/15/04 |
| 901118 | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer | 2406A00178 | 06/18/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---|----------------------------------|
| DANIEL BIGGS |  | JULY 3 & 18 & SEPTEMBER 10, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATES OF TEST |

9 FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY

9.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½ hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

The worst-case test data are shown below in Table 9-1 and Table 9-3.

9.2 TEST DATA

9.2.1 FREQUENCY STABILITY/TEMPERATURE VARIATION

Limit is 1.5 ppm for a basestation device with a 12.5 kHz channel bandwidth. Worst-case deviation was found to be .81 ppm at -30°C.

PLOT 9-1: TEMPERATURE FREQUENCY STABILITY

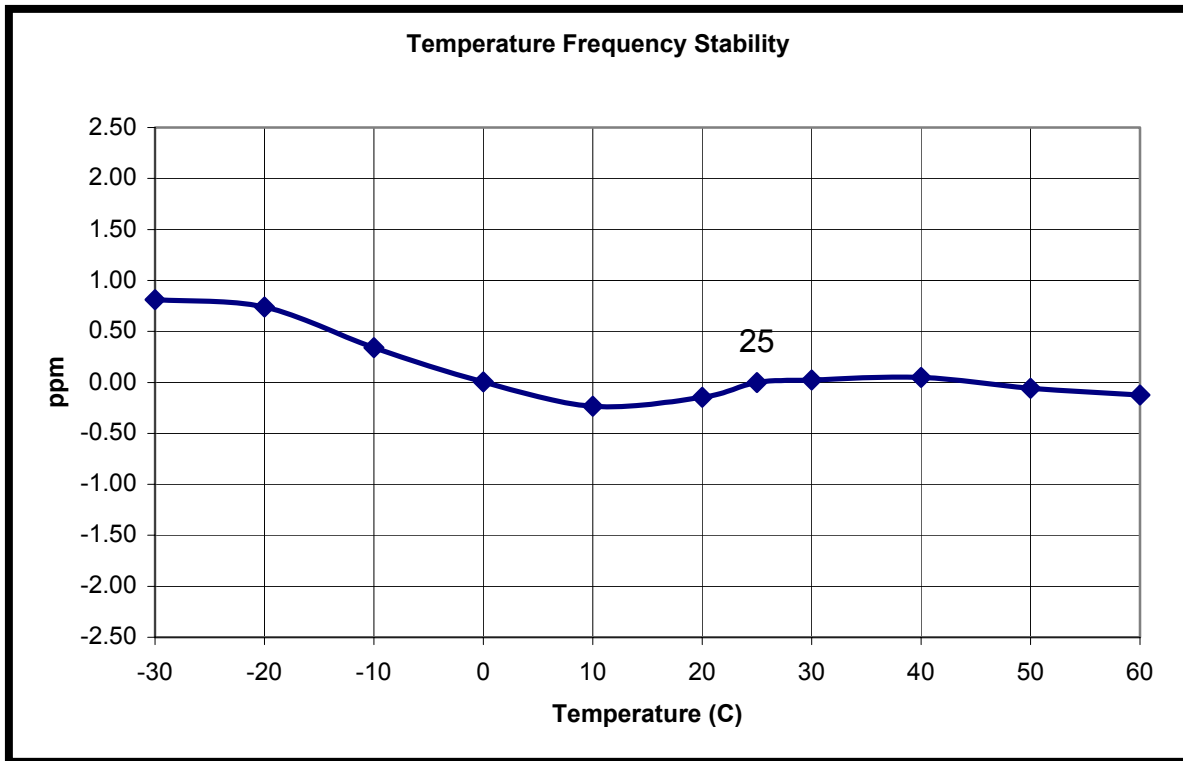



TABLE 9-1: TEMPERATURE FREQUENCY STABILITY CHANNEL 2, 482.525 MHZ

| Temperature C | Measured Frequency (MHz) | ppm |
|---------------|--------------------------|-------|
| -30 | 482.525940 | 0.81 |
| -20 | 482.525905 | 0.74 |
| -10 | 482.525713 | 0.34 |
| 0 | 482.525550 | 0.00 |
| 10 | 482.525435 | -0.23 |
| 20 | 482.525478 | -0.15 |
| 25 | 482.525548 | 0.00 |
| 30 | 482.525560 | 0.02 |
| 40 | 482.525572 | 0.05 |
| 50 | 482.525520 | -0.06 |
| 60 | 482.525488 | -0.12 |

TABLE 9-2: TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/TEMPERATURE)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|--------------------------|--------------------|-----------------------------------|---------------|------------------|
| 900946 | Tenney Engineering, Inc. | TH65 | Temperature Chamber with Humidity | 11380 | 12/16/03 |
| 901118 | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer | 2406A00178 | 06/18/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---|---------------|
| DANIEL BIGGS |  | JUNE 19, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

9.2.2 FREQUENCY STABILITY/VOLTAGE VARIATION

Worst-case variation is .06 ppm at the 102 VAC.

PLOT 9-2: VOLTAGE FREQUENCY STABILITY

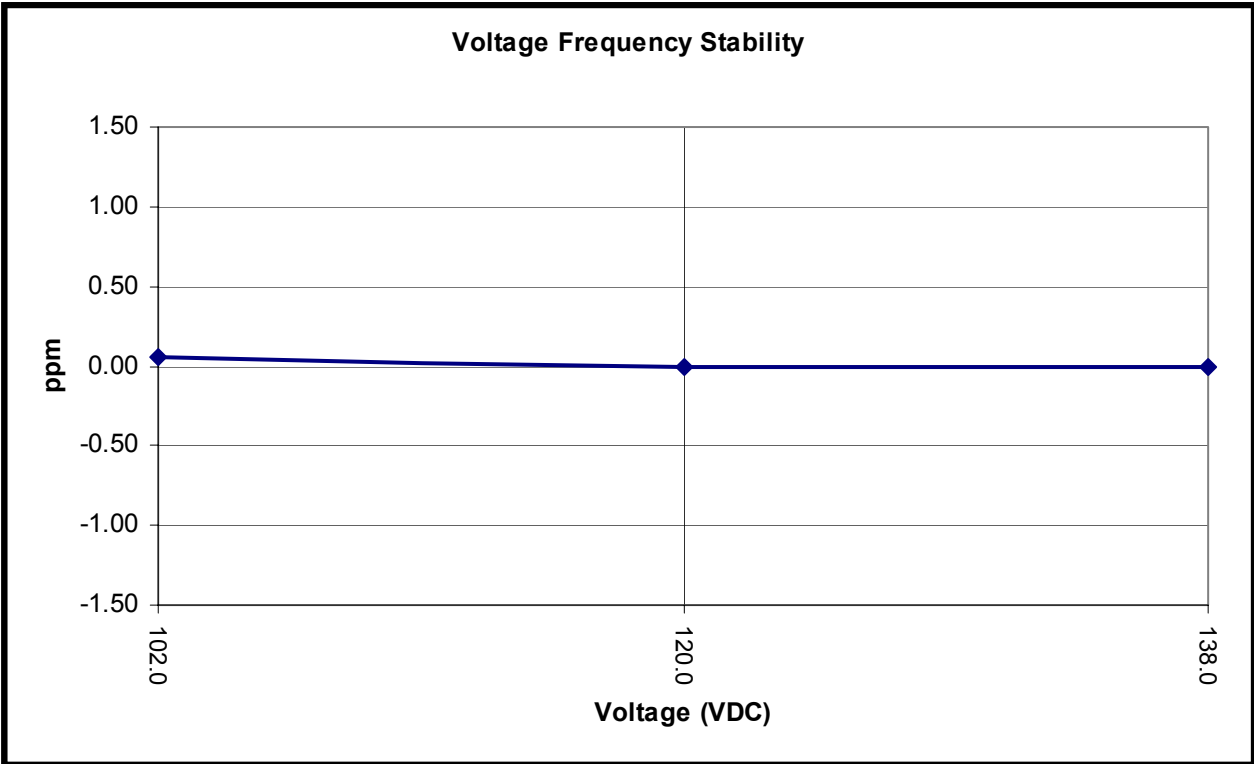



TABLE 9-3: FREQUENCY STABILITY/VOLTAGE VARIATION CHANNEL 2, 482.525 MHZ

| Voltage (VAC) | Measured Frequency (MHz) | ppm |
|---------------|--------------------------|-------|
| 102 | 482.525258 | 0.06 |
| 120 | 482.525230 | 0.00 |
| 138 | 482.525225 | -0.01 |

TABLE 9-4: TEST EQUIPMENT USED FOR TESTING (FREQUENCY STABILITY/VOLTAGE)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|--------------------|--|---------------|------------------|
| 901020 | Hewlett Packard | 8564E | Portable Spectrum Analyzer (9 kHz - 40 GHz) | 3943A01719 | 07/15/04 |
| 901118 | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer | 2406A00178 | 06/18/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---|---------------|
| DANIEL BIGGS |  | JUNE 17, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

10 FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE

10.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

$$\text{Audio Frequency Response} = 20 \text{ LOG} (\text{DEVfreq}/\text{DEVref})$$

10.2 TEST DATA

PLOT 10-1: MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE {12.5 KHZ CHANNEL BANDWIDTH}

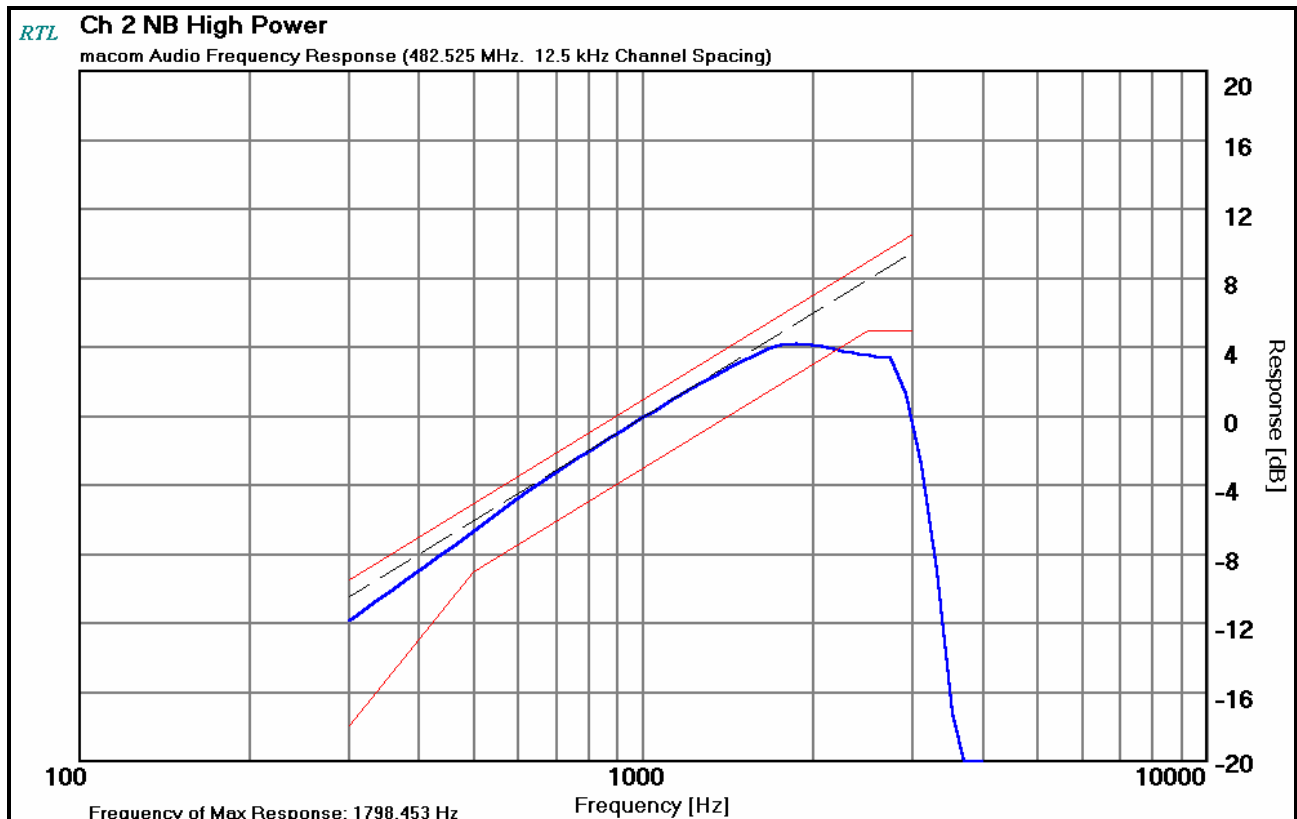



TABLE 10-1: TEST EQUIPMENT USED FOR TESTING (AUDIO FREQUENCY RESPONSE)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|--------------------|-----------------------------|---------------|------------------|
| 901057 | Hewlett Packard | 3336B | Synthesizer/Level Generator | 2514A02585 | 08/06/04 |
| 901118 | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer | 2406A00178 | 06/18/04 |
| 901054 | Hewlett Packard | HP 3586B | Selective Level Meter | 1928A01892 | 09/09/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---|---------------|
| DANIEL BIGGS |  | JUNE 24, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

11 FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER

11.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

11.2 TEST DATA

PLOT 11-1: MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER

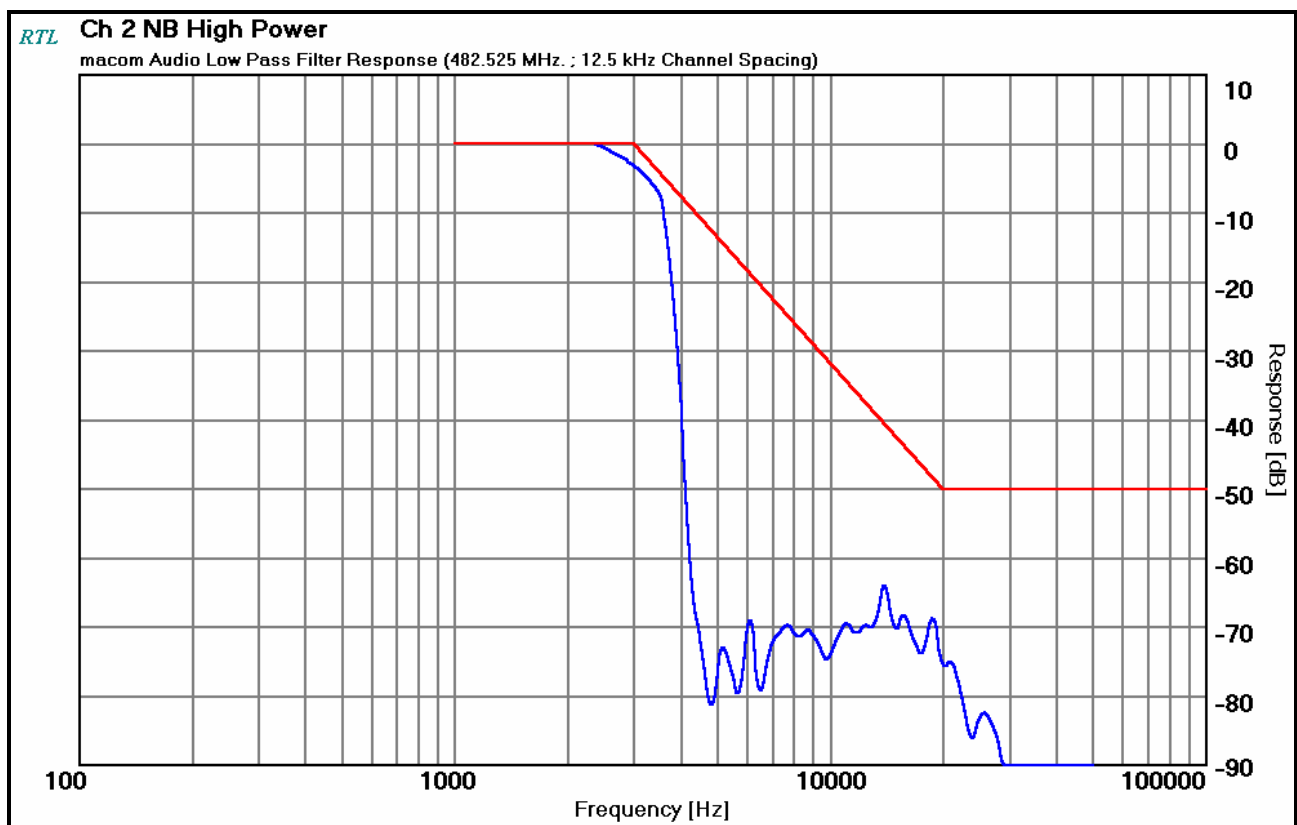


TABLE 11-1: TEST EQUIPMENT USED FOR TESTING (AUDIO LOW PASS FILTER RESPONSE)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|--------------------|-----------------------------|---------------|------------------|
| 901057 | Hewlett Packard | 3336B | Synthesizer/Level Generator | 2514A02585 | 08/06/04 |
| 901118 | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer | 2406A00178 | 06/18/04 |
| 901054 | Hewlett Packard | HP 3586B | Selective Level Meter | 1928A01892 | 09/09/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---|---------------|
| DANIEL BIGGS |  | JUNE 24, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

12 FCC RULES AND REGULATIONS PART 2 §2.1047 (B): MODULATION CHARACTERISTICS - MODULATION LIMITING


12.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.3


The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level as a reference (0dB) the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.

12.2 TEST DATA


PLOT 12-1: MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; POSITIVE PEAK

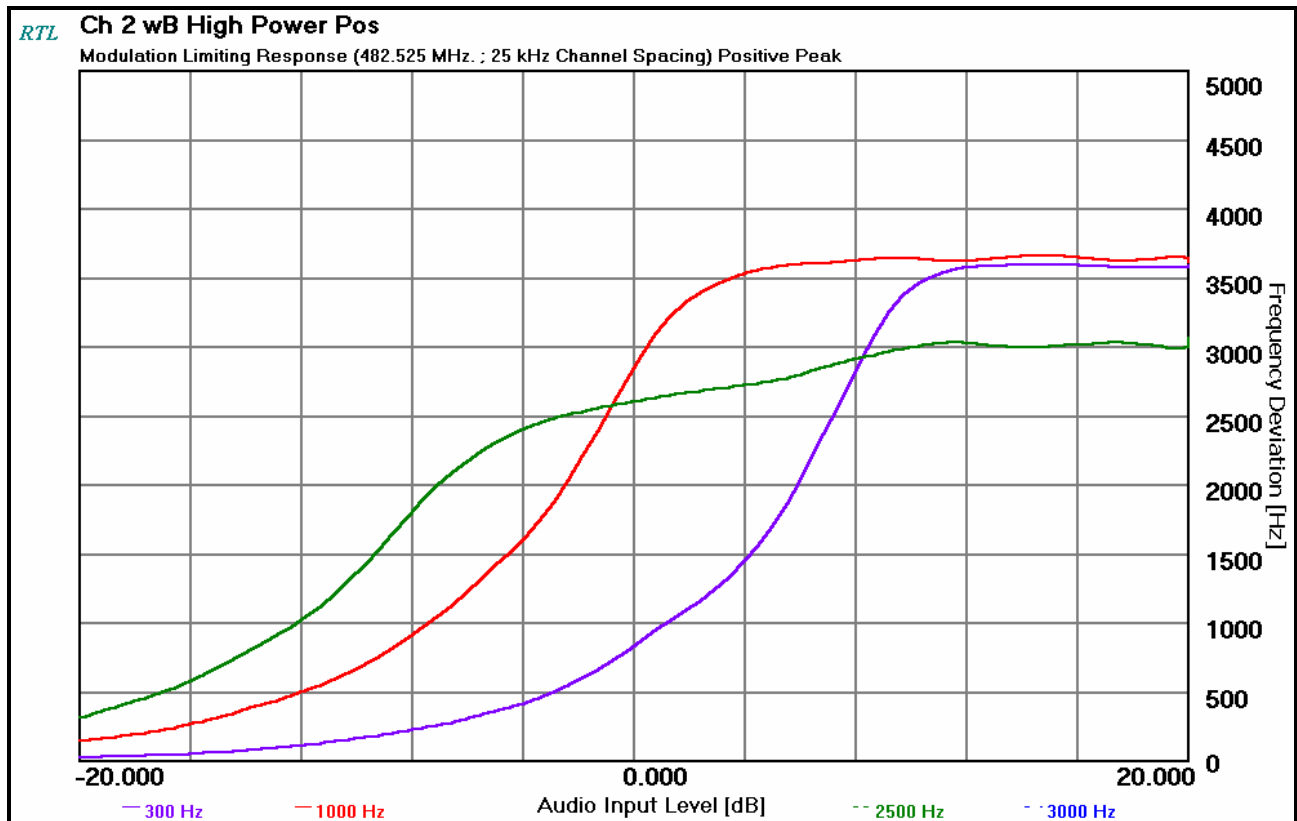

PLOT 12-2: MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; NEGATIVE PEAK

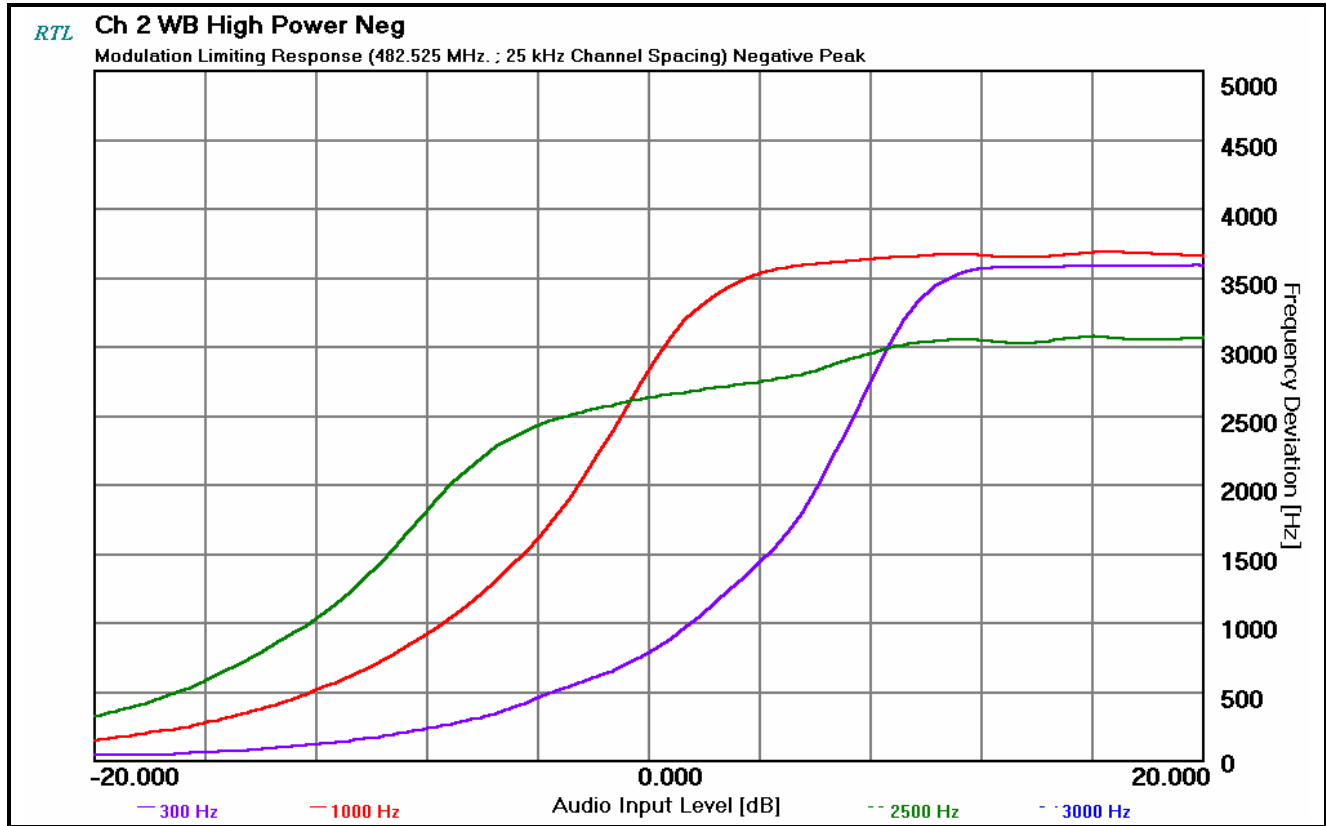

PLOT 12-3: MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; POSITIVE PEAK

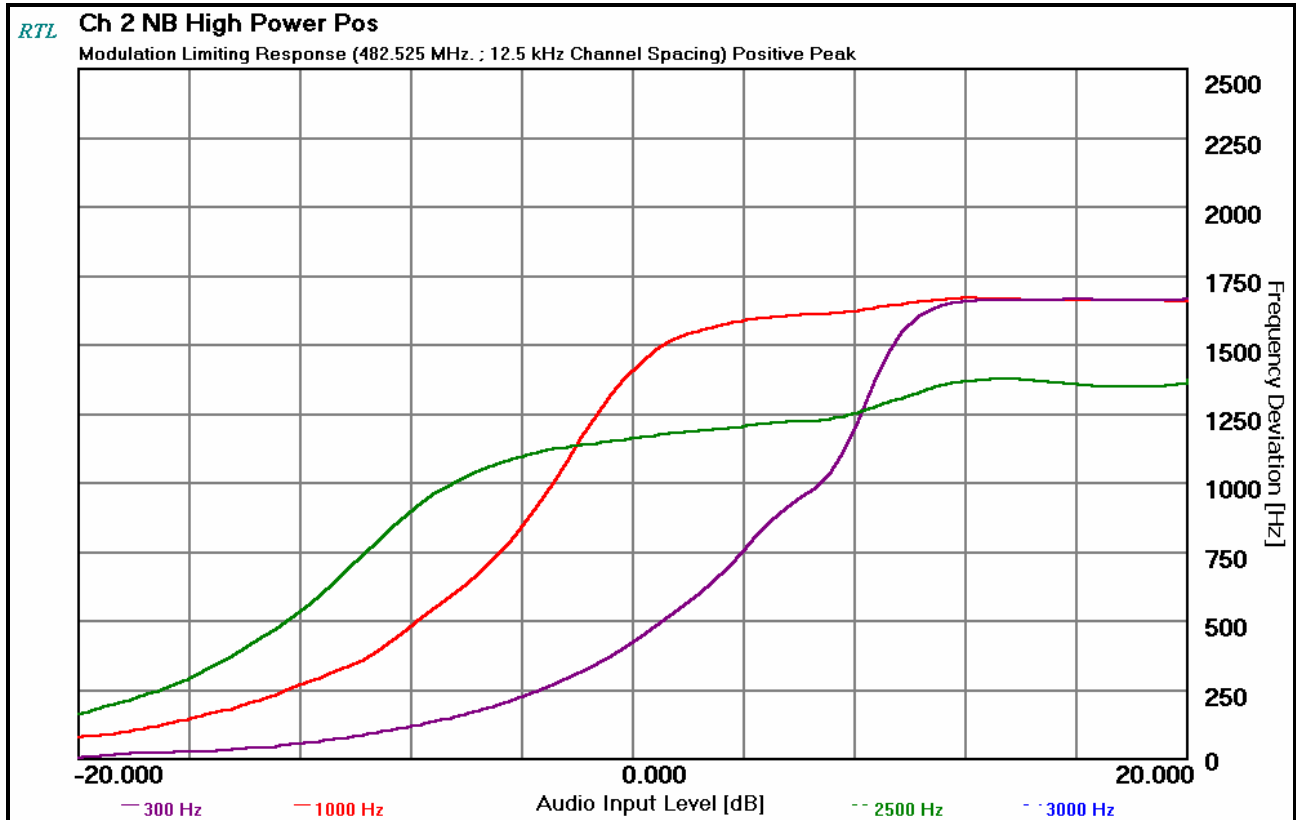

PLOT 12-4: MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; NEGATIVE PEAK

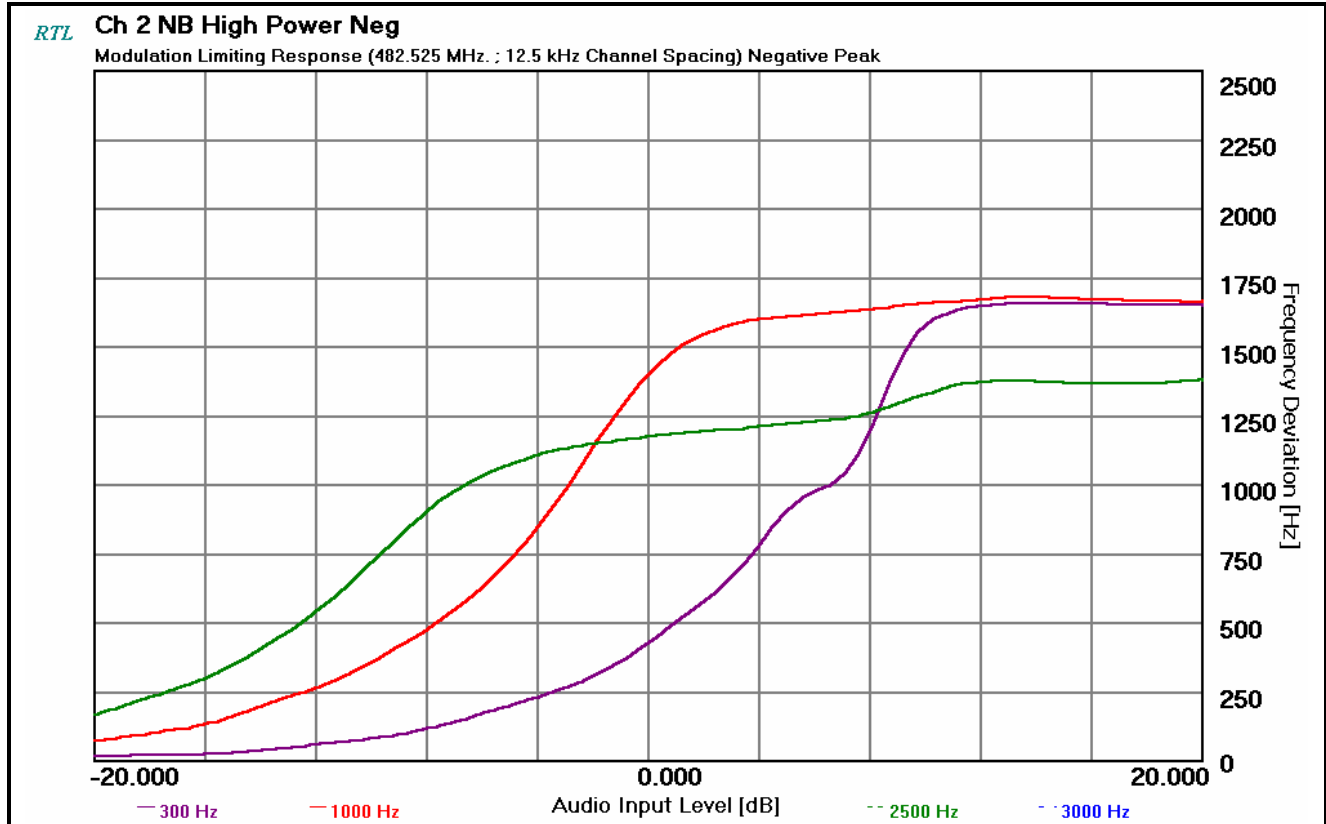


TABLE 12-1: TEST EQUIPMENT USED FOR TESTING (MODULATION LIMITING)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|--------------------|-----------------------------|---------------|------------------|
| 901057 | Hewlett Packard | 3336B | Synthesizer/Level Generator | 2514A02585 | 08/06/04 |
| 901118 | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer | 2406A00178 | 06/18/04 |
| 901054 | Hewlett Packard | HP 3586B | Selective Level Meter | 1928A01892 | 09/09/04 |

TEST PERSONNEL:

| | | |
|--------------------------|---------------------|---------------|
| DANIEL BIGGS | <i>Daniel Biggs</i> | JUNE 24, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |


13 FCC RULES AND REGULATIONS PART 90 §90.214: TRANSIENT FREQUENCY BEHAVIOR

13.1 TEST PROCEDURE


ANSI/TIA/EIA-603-1992, section 2.2.3

13.2 TEST DATA


PLOT 13-1: TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHZ; HIGH POWER; WIDE BAND; CARRIER ON TIME

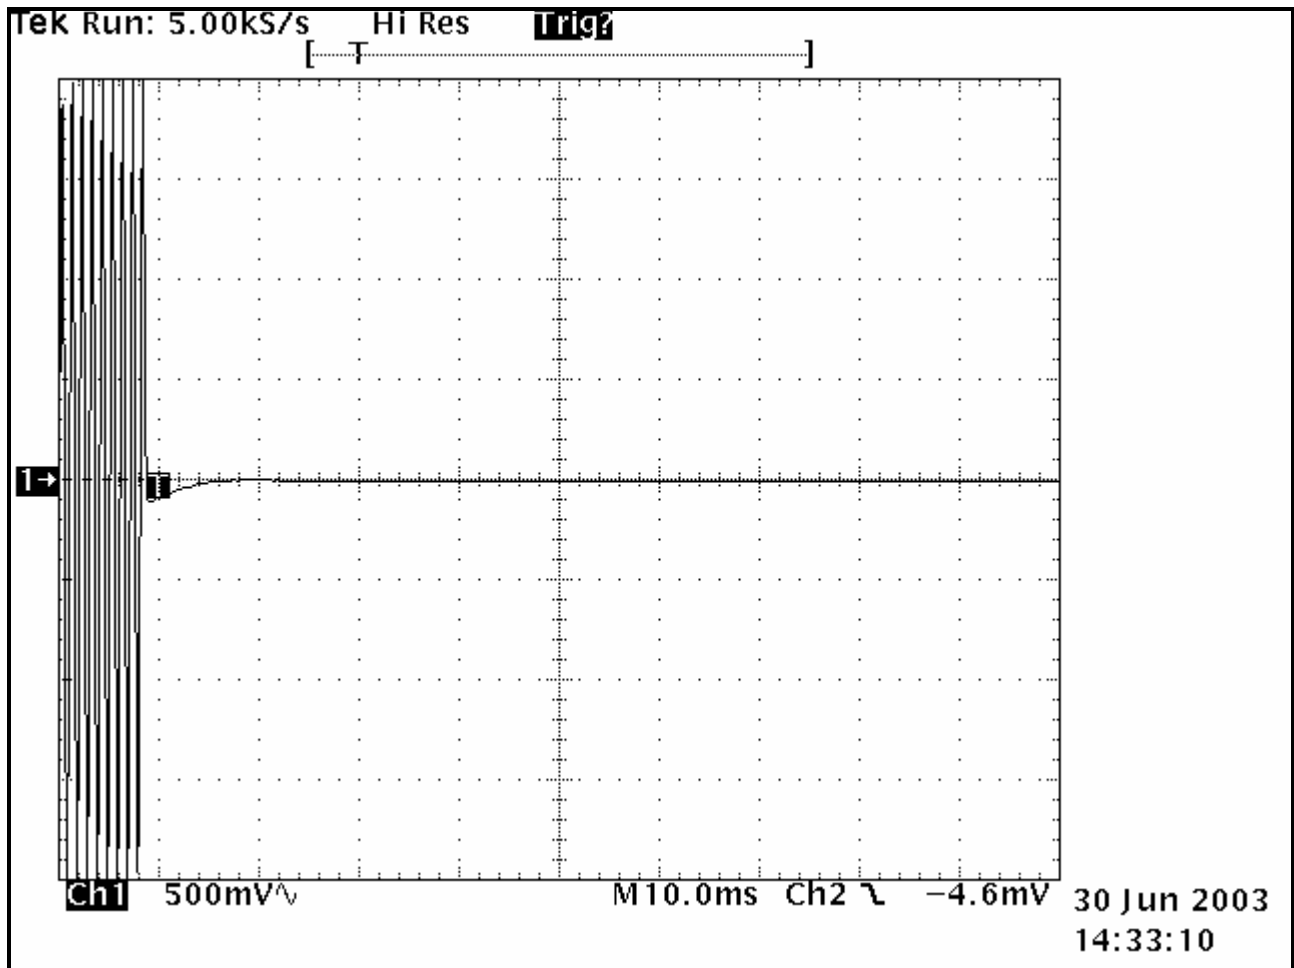

PLOT 13-2: TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHZ; HIGH POWER; WIDE BAND; CARRIER OFF TIME

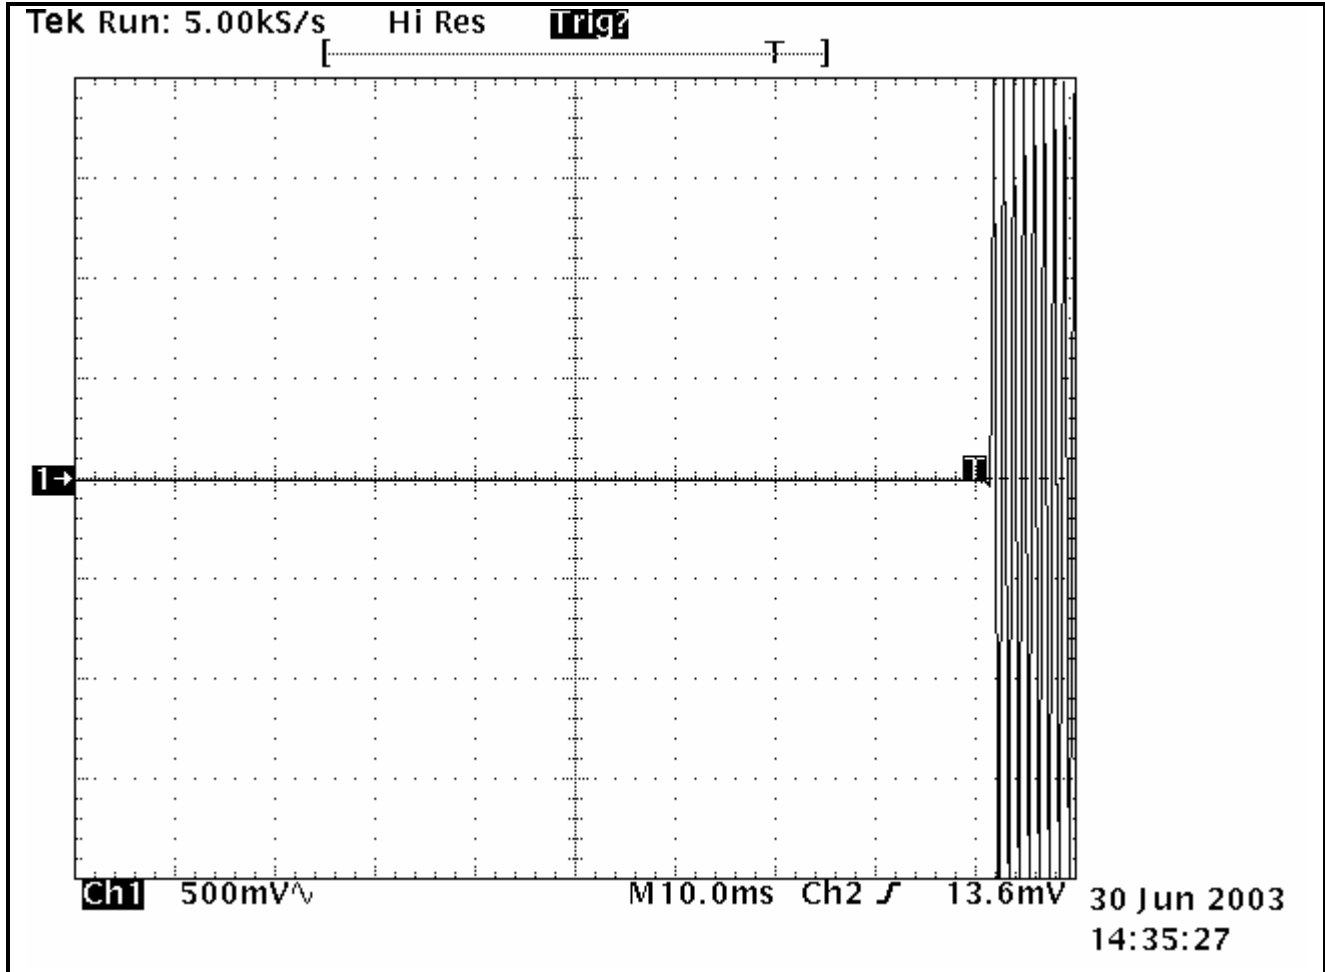

PLOT 13-3: TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHZ; HIGH POWER; NARROW BAND; CARRIER ON TIME

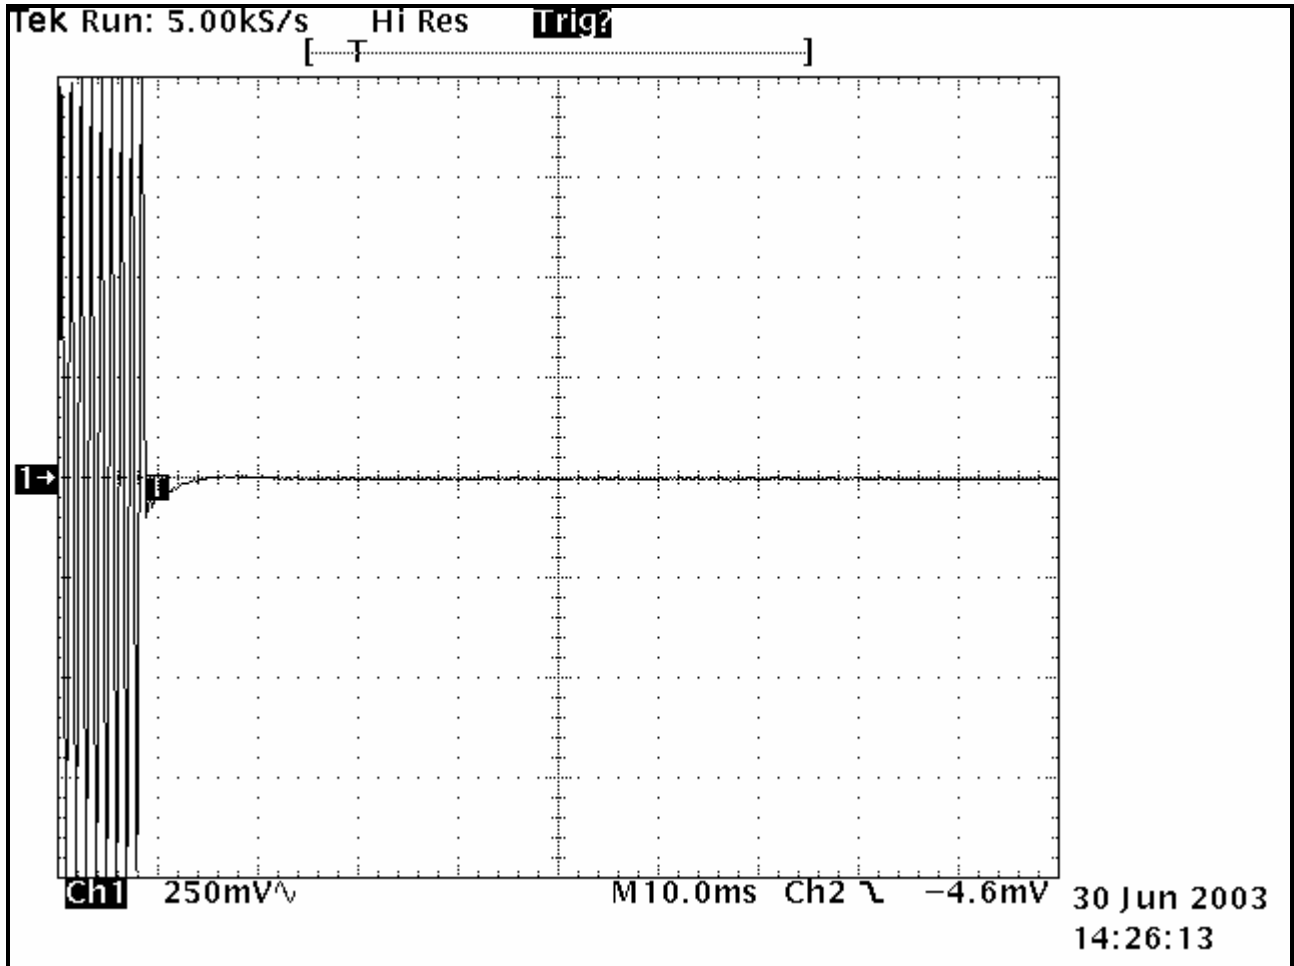

PLOT 13-4: TRANSIENT FREQUENCY BEHAVIOR – 482.525 MHZ; HIGH POWER; NARROW BAND; CARRIER OFF TIME

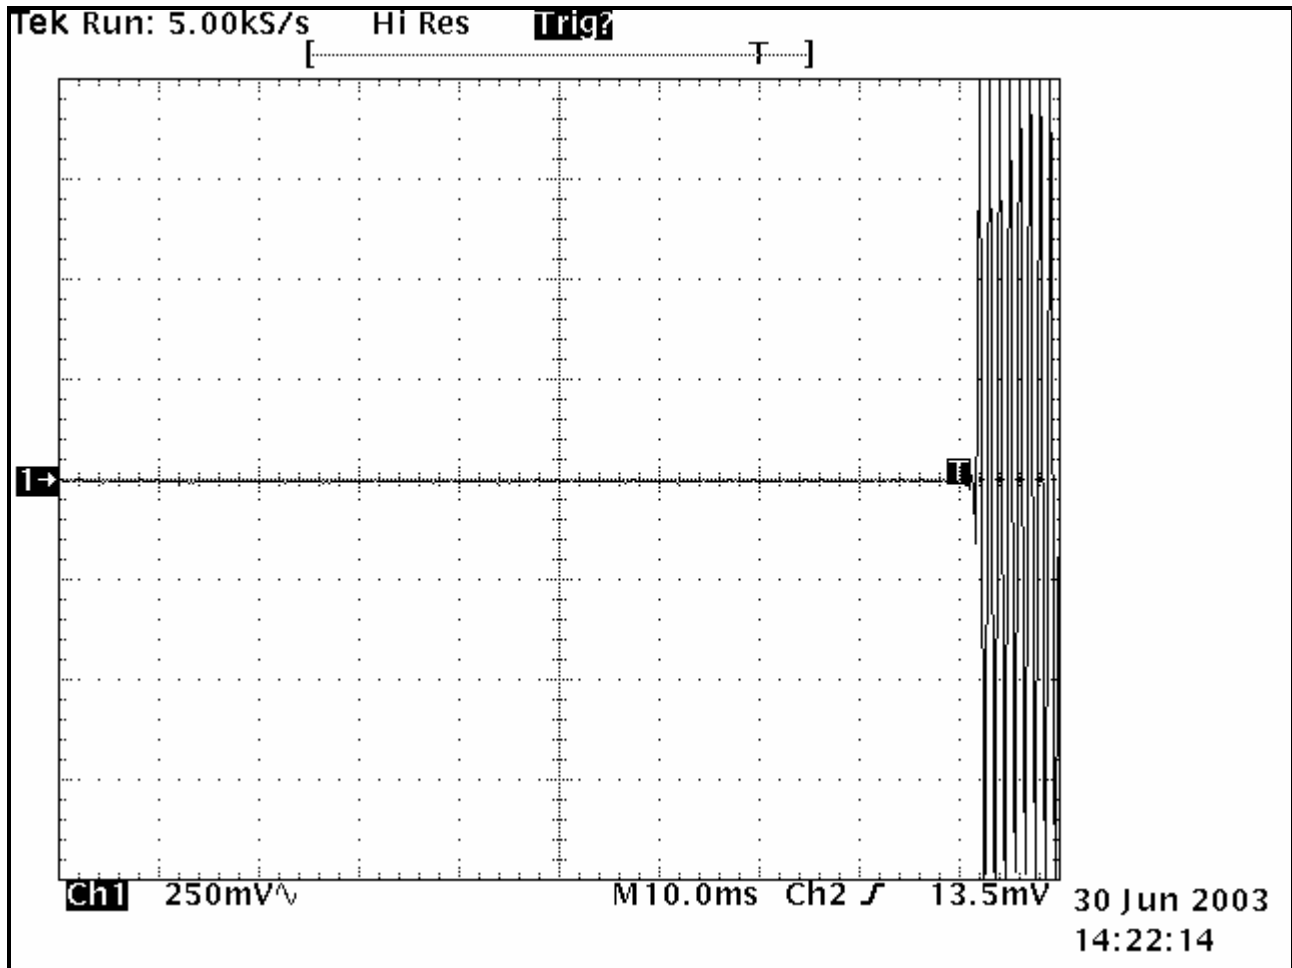


TABLE 13-1: TEST EQUIPMENT USED FOR TESTING (TRANSIENT FREQUENCY BEHAVIOR)

| RTL Asset # | Manufacturer | Model | Part Type | Serial Number | Calibration Date |
|-------------|-----------------|--------------------|---------------------|---------------|------------------|
| 900917 | Hewlett Packard | 8648C | Signal Generator | 3537A01741 | 05/02/04 |
| 901118 | Hewlett Packard | 8901A Opt. 002-003 | Modulation Analyzer | 2406A00178 | 06/18/04 |
| 900561 | Tektronix | TDS540B | Oscilloscope | B020129 | 02/19/04 |
| 900352 | Werlatone | C1795 | Directional Coupler | 4989 | N/A |

TEST PERSONNEL:

| | | |
|--------------------------|---------------------|---------------|
| DANIEL BIGGS | <i>Daniel Biggs</i> | JUNE 30, 2003 |
| TEST TECHNICIAN/ENGINEER | SIGNATURE | DATE OF TEST |

14 FCC RULES AND REGULATIONS PART 2 §2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH

Type of Emission: F3E, F1D, F1E

Necessary Bandwidth and Emission Bandwidth:

Part 90

Voice – 25 kHz channel separation

Calculation:

Max modulation(M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2xM+2xDK = 16.0$ kHz

Emission designator: 16K0F3E

Part §90.210

Digital voice and data – 25 kHz separation 9600 Baud

Measurement: 99.0% Occupied Bandwidth

$B_n = 10.00$ kHz

Emission designator: 10K0F1D, 10K0F1E

Part §90.210

Digital voice and data – 12.5 kHz separation 9600 Baud; XNB Mode

Measurement: 99.0% Occupied Bandwidth

$B_n = 6.917$ kHz

Emission designator: 6K9F1D, 6K9F1E

Part §90.210

C4FM –

Measurement: 99.0% Occupied Bandwidth

$B_n = 8.13$ kHz

Emission designator: 8K1F1D, 8K1F1E

Part §90.210

Voice – 12.5 kHz channel separation

Calculation:

Max modulation(M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2xM+2xDK = 11.0$ kHz

Emission designator: 11K0F3E

Part §90.210

Digital voice and data – 12.5 kHz separation 9600 Baud

Measurement: 99.0% Occupied Bandwidth

$B_n = 6.00$ kHz

Emission designator: 6K0F1D, 6K0F1E

15 CONCLUSION

The data in this measurement report shows that the **M/A-COM, Inc. Model MASTRIII w/ Sitepro; FCC ID: OWDTR-0028-E**, complies with all the requirements of Parts 90, 15 and 2 of the FCC Rules, and Industry Canada RSS-119, Issue 6, 2000.