



Certification Report for M/A-COM MASTRIII UHF Base Station with Data Module FCC Part 90 & RSS-119

Document Number: KP001000-CR-RAD-03-01
Release Date: December 22, 2004

Prepared for: M/A-COM, Inc.
221 Jefferson Ridge Parkway
Lynchburg, Virginia
U.S.A., 24501

Author: Denis Lalonde
Radio Compliance Discipline Leader

Solectron EMS Canada Inc.
21 Richardson Side Road,
Kanata, Ontario, K2K 2C1
<http://www.solectrontechnicalctr.com/>

© Copyright Solectron EMS Canada Inc. December 22, 2004

The master of this document is stored on an electronic database and is "write-protected" and may be altered only by authorized persons at Solectron EMS Canada Inc. Viewing of the master document electronically ensures access to the current issue. Any hard copies must be regarded as uncontrolled copies.




Solectron EMS Canada Inc. accepts no liability for the content of this document except when it is reproduced in its entirety by a method acceptable to Solectron EMS Canada Inc.

Release Control Record

This document is based on CEI document template KG000347-TR-EMC-03.

| Release no. | Reason for change | Date released |
|-------------|-------------------|-------------------|
| 01 | Original Release | December 22, 2004 |

Approvals

| Function | Name | Job title | Signature |
|---------------------------|------------------|------------------------------------|---|
| Document Release Approval | Simon Richardson | Project Manager |  22 DEC 2004 |
| Author | Denis Lalonde | Radio Compliance Discipline Leader |  Dec 22, 2004 |
| Technical Reviewer | Jacques Rollin | EMC Advisor |  Dec 22, 2004 |

Accreditations

Solectron EMS Canada test facilities are accredited by the Standards Council of Canada (SCC) in accordance with the scope of accreditation outlined at the following web site <http://www.scc.ca/scopes/reg126-eng-s.pdf>. [1]. The SCC is a member of the APLAC [16] and ILAC [17] organizations which, through mutual recognition arrangements, provide accreditation of test facilities in the member countries.



The Solectron Design and Engineering 10-meter Ambient Free Chamber (AFC) complies with the Industry Canada (IC) requirements for Test Facilities and Test Methods [18] under reference file number 4180. Through IC MRAs, EMC measurements are accepted in the following countries: USA, Australia, Singapore, Chinese Taipei (Taiwan), and the Republic of Korea. Further information can be found at the IC Certification and Engineering Bureau web site <http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/Home> under the "conformity assessment bodies" link.

The VCCI [15] lab registration numbers associated with our test facilities are: R-1641, C-1749, C-1750, T-148, and T-149.

Solectron EMS Canada is ISO 9001:2000 and ISO-IEC 17025 certified and its processes are documented in the Solectron EMS Canada Quality Manual [2] and Lab Operations Manual [3].

Table of Contents

| | |
|---|-----------|
| RELEASE CONTROL RECORD..... | 2 |
| APPROVALS | 2 |
| ACCREDITATIONS | 2 |
| TABLE OF CONTENTS..... | 3 |
| LIST OF FIGURES | 5 |
| LIST OF TABLES | 6 |
| 1. EXECUTIVE SUMMARY..... | 8 |
| 2. COMPLIANCE SUMMARY..... | 9 |
| 3. EQUIPMENT UNDER TEST (EUT) | 10 |
| 3.1 PRODUCT FUNCTIONAL DESCRIPTION | 10 |
| 3.2 MANUFACTURER INFORMATION..... | 10 |
| 3.3 TRANSMITTER SPECIFICATIONS..... | 10 |
| 3.4 SYSTEM COMPONENTS | 11 |
| 3.5 SUPPORT EQUIPMENT | 11 |
| 3.6 SYSTEM SET-UP AND TEST CONFIGURATIONS | 12 |
| 3.7 EUT INTERFACES AND CABLES | 12 |
| 3.8 SYSTEM MODIFICATIONS | 13 |
| 4. GENERAL TEST CONDITIONS | 14 |
| 4.1 TEST FACILITY | 14 |
| 4.2 MEASUREMENT INSTRUMENTATION..... | 14 |
| 5. DETAILED TEST RESULTS..... | 15 |
| 5.1 RF POWER | 15 |
| 5.1.1 Test Specification | 15 |
| 5.1.1.1 Limits | 15 |
| 5.1.2 Test Facility Information..... | 15 |
| 5.1.3 Test Procedure | 15 |
| 5.1.4 Test Results..... | 15 |
| 5.1.5 Test Conclusion | 16 |
| 5.1.6 Test Equipment List..... | 16 |
| 5.2 CONDUCTED SPURIOUS EMISSIONS | 16 |
| 5.2.1 Test Specification | 16 |
| 5.2.1.1 Limits | 16 |
| 5.2.2 Test Facility Information..... | 17 |
| 5.2.3 Test Procedure | 17 |
| 5.2.4 Test Results..... | 17 |

| | | |
|---------|--|----|
| 5.2.5 | Test Conclusion | 17 |
| 5.2.6 | Test Equipment List..... | 17 |
| 5.3 | EMISSION MASK..... | 18 |
| 5.3.1 | Test Specification | 18 |
| 5.3.1.1 | Limits | 18 |
| 5.3.2 | Test Facility Information..... | 18 |
| 5.3.3 | Test Procedure | 19 |
| 5.3.4 | Test Results..... | 19 |
| 5.3.5 | Test Conclusion | 19 |
| 5.3.6 | Test Equipment List..... | 19 |
| 5.4 | FIELD STRENGTH OF SPURIOUS EMISSIONS | 19 |
| 5.4.1 | Test Specification | 19 |
| 5.4.1.1 | Limits | 20 |
| 5.4.2 | Test Facility Information..... | 20 |
| 5.4.3 | Test Procedure | 20 |
| 5.4.4 | Test Results..... | 21 |
| 5.4.5 | Test Conclusion | 22 |
| 5.4.6 | Test Equipment List..... | 22 |
| 5.5 | FREQUENCY STABILITY..... | 23 |
| 5.5.1 | Test Specification | 23 |
| 5.5.1.1 | Limits | 23 |
| 5.5.2 | Test Facility Information..... | 23 |
| 5.5.3 | Test Procedure | 23 |
| 5.5.4 | Test Results..... | 24 |
| 5.5.5 | Test Conclusion | 24 |
| 5.5.6 | Test Equipment List..... | 24 |
| 5.6 | TRANSIENT FREQUENCY BEHAVIOR | 25 |
| 5.6.1 | Test Specification | 25 |
| 5.6.1.1 | Limits | 25 |
| 5.6.2 | Test Facility Information..... | 26 |
| 5.6.3 | Test Procedure | 26 |
| 5.6.4 | Test Results..... | 26 |
| 5.6.5 | Test Conclusion | 26 |
| 5.6.6 | Test Equipment List..... | 26 |
| 5.7 | OCCUPIED BANDWIDTH..... | 27 |
| 5.7.1 | Test Specification | 27 |
| 5.7.2 | Test Facility Information..... | 27 |
| 5.7.3 | Test Procedure | 27 |
| 5.7.4 | Test Results..... | 27 |
| 5.7.5 | Test Equipment List..... | 28 |
| 5.8 | RECEIVE ANTENNA PORT CONDUCTED EMISSIONS | 28 |
| 5.8.1 | Test Specification | 28 |

| | | |
|-----------|---|-----------|
| 5.8.1.1 | Limits | 28 |
| 5.8.2 | Test Facility Information | 28 |
| 5.8.3 | Test Configurations | 29 |
| 5.8.4 | Test Procedure | 29 |
| 5.8.5 | Test Results:..... | 30 |
| 5.8.6 | Test Conclusion | 30 |
| 5.8.7 | Test Equipment List..... | 30 |
| 6. | REFERENCES | 31 |
| 7. | APPENDICES | 33 |
| 7.1 | APPENDIX A: GLOSSARY | 33 |
| 7.2 | APPENDIX B: TEST SET-UP PHOTOGRAPHS | 34 |
| 7.3 | APPENDIX C: CONDUCTED SPURIOUS EMISSIONS PLOTS | 35 |
| 7.4 | APPENDIX D: EMISSION MASK PLOTS..... | 39 |
| 7.5 | APPENDIX E: FIELD STRENGTH OF SPURIOUS EMISSIONS PLOTS..... | 40 |
| 7.6 | APPENDIX F: TRANSIENT FREQUENCY BEHAVIOR PLOTS | 48 |
| 7.7 | APPENDIX G: OCCUPIED BANDWIDTH PLOTS..... | 49 |
| 7.8 | APPENDIX H: CONDUCTED RECEIVER EMISSIONS PLOTS | 50 |

List of Figures

| | | |
|--------------|---|----|
| FIGURE 3-1 | PRODUCT DESCRIPTION..... | 10 |
| FIGURE 3-2: | MODULE CONFIGURATION | 12 |
| FIGURE 3-3: | SYSTEM CONFIGURATION | 12 |
| FIGURE 5-1: | RX ANTENNA PORT TEST METHOD | 29 |
| FIGURE 7-1: | M/A-COM MASTRIII UHF BASE STATION WITH DATA MODULE RADIATED EMISSIONS SET-UP | 34 |
| FIGURE 7-2: | TX AT 403.025 MHz, 100 W POWER, 30 MHz TO 800 MHz | 35 |
| FIGURE 7-3: | TX AT 403.025 MHz, 100 W POWER, 800 MHz TO 5.12 GHz..... | 35 |
| FIGURE 7-4: | TX AT 403.025 MHz , 10 W POWER, 30 MHz TO 800 MHz | 36 |
| FIGURE 7-5: | TX AT 403.025 MHz , 10 W POWER, 800 MHz TO 5.12 GHz..... | 36 |
| FIGURE 7-6: | TX AT 449.975 MHz, 100 W POWER, 30 MHz TO 800 MHz | 37 |
| FIGURE 7-7: | TX AT 449.975 MHz, 100 W POWER, 800 MHz TO 5.12 GHz..... | 37 |
| FIGURE 7-8: | TX AT 449.975 MHz , 10 W POWER, 30 MHz TO 800 MHz | 38 |
| FIGURE 7-9: | TX AT 449.975 MHz , 10 W POWER, 800 MHz TO 5.12 GHz..... | 38 |
| FIGURE 7-10: | 2 LEVEL 9600 BAUD SIGNAL WITH +/- 3 kHz DEVIATION, 425.025 MHz..... | 39 |
| FIGURE 7-11: | FIELD STRENGTH WITH 100 W Tx, 30 MHz TO 1 GHz (Tx AT 403.025 MHz)..... | 40 |

FIGURE 7-12: FIELD STRENGTH WITH 100 W TX, 1 GHZ TO 5.12 GHZ, LOW FREQUENCY SPLIT (TX AT 403.025 MHZ) 41

FIGURE 7-13: FIELD STRENGTH WITH 10 W TX, 30 MHZ TO 1 GHZ (TX AT 403.025 MHZ) 42

FIGURE 7-14: FIELD STRENGTH WITH 10 W TX, 1 GHZ TO 5.12 GHZ, (TX AT 403.025 MHZ) 43

FIGURE 7-15: FIELD STRENGTH WITH 100 W TX, 30 MHZ TO 1 GHZ (TX AT 449.975 MHZ) 44

FIGURE 7-16: FIELD STRENGTH WITH 100 W TX, 1 GHZ TO 5.12 GHZ, (TX AT 449.975 MHZ) ... 45

FIGURE 7-17: FIELD STRENGTH WITH 10 W TX, 30 MHZ TO 1 GHZ (TX AT 449.975 MHZ) 46

FIGURE 7-18: FIELD STRENGTH WITH 10 W TX, 1 GHZ TO 5.12 GHZ, (TX AT 449.975 MHZ) 47

FIGURE 7-19 TRANSIENT FREQUENCY BEHAVIOR, TX AT 425.025 MHZ, WIDEBAND, TRANSMITTER ON 48

FIGURE 7-20 TRANSIENT FREQUENCY BEHAVIOR, TX AT 425.025 MHZ, WIDEBAND, TRANSMITTER OFF 48

FIGURE 7-21: 2 LEVEL 9600 BAUD SIGNAL WITH +/- 3 KHZ DEVIATION, 425.025 MHZ 49

FIGURE 7-22: RX AT 423.975 MHZ, 30 MHZ TO 1GHZ 50

FIGURE 7-23: RX AT 423.975 MHZ, 1 GHZ TO 2.56 GHZ 50

List of Tables

TABLE 2-1: COMPLIANCE RESULTS SUMMARY 9

TABLE 3-1: TRANSMITTER SPECIFICATIONS 11

TABLE 3-2: MASTRIII UHF BTS COMPONENTS 11

TABLE 3-3: SUPPORT EQUIPMENT 11

TABLE 3-4: SYSTEM CABLES 13

TABLE 5-1: RF POWER REQUIREMENTS 15

TABLE 5-2: RF POWER LIMIT 15

TABLE 5-3: RF POWER LEVELS 16

TABLE 5-4: TEST EQUIPMENT USED FOR RF POWER 16

TABLE 5-5: CONDUCTED SPURIOUS EMISSIONS REQUIREMENT 16

TABLE 5-6: CONDUCTED SPURIOUS EMISSION LIMIT 17

TABLE 5-7: CONDUCTED SPURIOUS EMISSIONS 17

TABLE 5-8: TEST EQUIPMENT USED FOR CONDUCTED SPURIOUS EMISSIONS 18

TABLE 5-9: EMISSION MASK REQUIREMENT 18

TABLE 5-10: EMISSION MASK LIMITS 18

TABLE 5-11: EMISSION MASK RESULTS 19

TABLE 5-12: TEST EQUIPMENT USED FOR EMISSION MASK 19

TABLE 5-13: FIELD STRENGTH OF SPURIOUS EMISSIONS REQUIREMENT 20

| | |
|--|----|
| TABLE 5-14: FIELD STRENGTH OF SPURIOUS EMISSIONS LIMIT | 20 |
| TABLE 5-15: FIELD STRENGTH OF SPURIOUS EMISSIONS | 22 |
| TABLE 5-16: TEST EQUIPMENT USED FOR FIELD STRENGTH OF SPURIOUS EMISSIONS..... | 22 |
| TABLE 5-17: FREQUENCY STABILITY REQUIREMENT..... | 23 |
| TABLE 5-18: FREQUENCY STABILITY LIMITS | 23 |
| TABLE 5-19: FREQUENCY STABILITY RESULTS (425.025 MHz)..... | 24 |
| TABLE 5-20: TEST EQUIPMENT USED FOR FREQUENCY STABILITY | 25 |
| TABLE 5-21: TRANSIENT FREQUENCY BEHAVIOR REQUIREMENT..... | 25 |
| TABLE 5-22: TRANSIENT FREQUENCY BEHAVIOR LIMIT..... | 25 |
| TABLE 5-23: TRANSIENT FREQUENCY BEHAVIOR TEST RESULTS | 26 |
| TABLE 5-24: TEST EQUIPMENT USED FOR TRANSIENT FREQUENCY BEHAVIOR MEASUREMENT ... | 26 |
| TABLE 5-25: OCCUPIED BANDWIDTH..... | 27 |
| TABLE 5-26: OCCUPIED BANDWIDTH VALUES (425.025 MHz)..... | 27 |
| TABLE 5-27: TEST EQUIPMENT USED FOR OCCUPIED BANDWIDTH..... | 28 |
| TABLE 5-28: RECEIVE PORT CONDUCTED EMISSIONS REQUIREMENT..... | 28 |
| TABLE 5-29: RECEIVE ANTENNA PORT CONDUCTED EMISSIONS LIMITS | 28 |
| TABLE 5-30: TEST EQUIPMENT USED FOR CONDUCTED SPURIOUS EMISSIONS..... | 30 |

1. Executive Summary

This test report documents the measurements performed on the M/A-COM MASTRIII UHF Base Station with Data Module as part of an Original Equipment Certification for the FCC Part 90, and Industry Canada RSS-119 certifications.

On the basis of measurements performed between November and December 2004, the M/A-COM MASTRIII UHF Base Station with Data Module is verified to be compliant with FCC Part 90, and Industry Canada RSS-119 requirements. The test data included in this report apply to the product titled above manufactured by M/A-COM, Inc.

The frequency of the band of operation is 403 to 450 MHz.

The FCCID of the new equipment is OWDTR-0040-E.

The Industry Canada certification number is 3636B-0040.

A detailed summary of compliance results is found in Table 2-1: Compliance Results Summary on page 9.

2. Compliance Summary

This section summarizes all the measurements performed on M/A-COM MASTRIII UHF Base Station with Data Module and its compliance to FCC Part 90, and Industry Canada RSS-119.

Table 2-1: Compliance Results Summary

| Product Summary | | | | | |
|-----------------|--|---|-------------------|------|---|
| Product Name: | M/A-COM MASTRIII UHF Base Station with Data Module | Project Manager: | Simon Richardson | | |
| Product Code: | TR-0040 | Measurements by : | Denis Lalonde | | |
| Product Status: | | Date: | December 22, 2004 | | |
| Test Cases | | | | | |
| Performed | Description | Specification | Test Results | | Notes |
| | | | Pass | Fail | |
| ■ | RF Power | FCC Part 90.205 and 2.1046 RSS-119 sect. 5.4 | ■ | □ | |
| ■ | Conducted Spurious Emissions | FCC Part 90.210 & 2.1051 RSS-119 sect. 6.3 | ■ | □ | |
| ■ | Emission Mask | FCC Part 90.210 & 2.1049 RSS-119 sect. 6.4 | ■ | □ | |
| ■ | Field Strength of Spurious Emissions | FCC Part 90.210 & 2.1053 | ■ | □ | |
| ■ | Frequency Stability | FCC Part 90.213 and 2.1055 RSS-119 sect. 7 | ■ | □ | |
| □ | Audio Frequency Response | FCC 2.1047 | □ | □ | |
| □ | Audio Low Pass Filter | FCC 2.1047 RSS-119 sect. 6.6 | □ | □ | |
| □ | Modulation Limiting | FCC 2.1047 | □ | □ | |
| ■ | Transient Frequency Behavior | FCC 90.214 RSS-119 sect. 6.5 | ■ | □ | |
| ■ | Occupied Bandwidth | FCC 2.202 RSP 100 sect. 7.2 | ■ | □ | |
| □ | RF Exposure | FCC 1.1310 RSS-119 sect. 9.0 | □ | □ | To be evaluated during licensing of equipment |
| ■ | Conducted Emissions Rx port | RSS-119 sect. 8 FCC 15.111 | ■ | □ | |

The master of this document is stored on an electronic database and is "write-protected" and may be altered only by authorized persons at Soletron EMS Canada Inc.. Viewing of the master document electronically ensures access to the current issue. Any hard copies must be regarded as uncontrolled copies.

3. Equipment Under Test (EUT)

3.1 Product Functional Description

The product trade name of the unit tested is “M/A-COM MASTRIII UHF Base Station with Data Module”.

Figure 3-1 provides a brief description of the tested product.

Figure 3-1 Product Description



The MASTR III P25 digital Base Station, built on the tradition of the popular MASTR series of repeaters, is an industry leader in interoperability, performance, and reliability. The MASTR III P25 provides secure digital communications for mission critical applications. The station is capable of both conventional Project 25 digital communications and conventional analog communications for maximum flexibility. The addition of a SitePro Controller provides the capability of delivering Internet Protocol (IP) data and voice to a M/A-COM P25[®] network.



3.2 Manufacturer Information

| | |
|-----------------|---|
| Company Name | M/A-COM, Inc. |
| Mailing Address | 221 Jefferson Ridge Parkway, Lynchburg, Virginia, U.S.A., 24501 |
| Product Name | M/A-COM MASTRIII UHF Base Station with Data Module |

3.3 Transmitter Specifications

Table 3-1 lists the specifications of the transmitter under test. Operation over the full frequency band of operation is achieved through the use of 2 different sets of transmitter/receiver synthesizers and receive front end modules. The only differences between modules of different frequency bands are the values of passive tuning components.

Table 3-1: Transmitter Specifications

| | Fundamental Characteristics |
|-----------------|--|
| Tx power | 10 to 100 W |
| Tx frequency | Configuration 1: 403 to 430 MHz Configuration 2: 425 to 450 MHz |
| Channel spacing | 25 kHz |

3.4 System Components

The system tested consists of the units shown in Table 3-2. The capability to operate over all the frequency bands identified in Table 3-1 was achieved by selecting a Tx Synthesizer, Rx Synthesizer, Rx Front End, and Power Amplifier modules which are dedicated for their respective frequency band.

Table 3-2: MASTRIII UHF BTS Components

| Component | Model | Serial Number |
|-----------------------|------------------------------|---------------|
| MASTRIII shelf | SXGPNX | 9861756 |
| Tx Synthesizer module | EA101685V11 | SLR 0438 0994 |
| | EA101685V12 | SLR 0438 1501 |
| Rx Synthesizer module | EA101684V12 | SLR 0438 1507 |
| | EA101684V13 | SLR 0438 0985 |
| Rx Front End module | 19D902782G11 (403 – 430 MHz) | 06BD5P |
| | 19D902782G7 (425 – 450 MHz) | 06B6A2 |
| IF module | EA101401V1 | SLR 03150255 |
| System module | 19D902590G6 | SLR 0251 2492 |
| Data module | 19D504558 G1 | SLR 04160954 |
| Power module | 19D902589G2 | CKA 01390368 |
| Power supply | PS103010V120 | QG12659 |
| RF Power Amplifier | EA101292V21 | 09430362 |

3.5 Support Equipment

The support equipment used for operation and monitoring of the EUT is described in Table 3-3.

Table 3-3: Support Equipment

| Description | Model Number |
|---------------------------|--------------|
| IBM Thinkpad PC | 600E |
| GE Digital Test Generator | 19A149117P2 |

3.6 System Set-up and Test Configurations

The system configuration used for all test cases is presented in Figure 3-2 and Figure 3-3.

Figure 3-2: Module Configuration


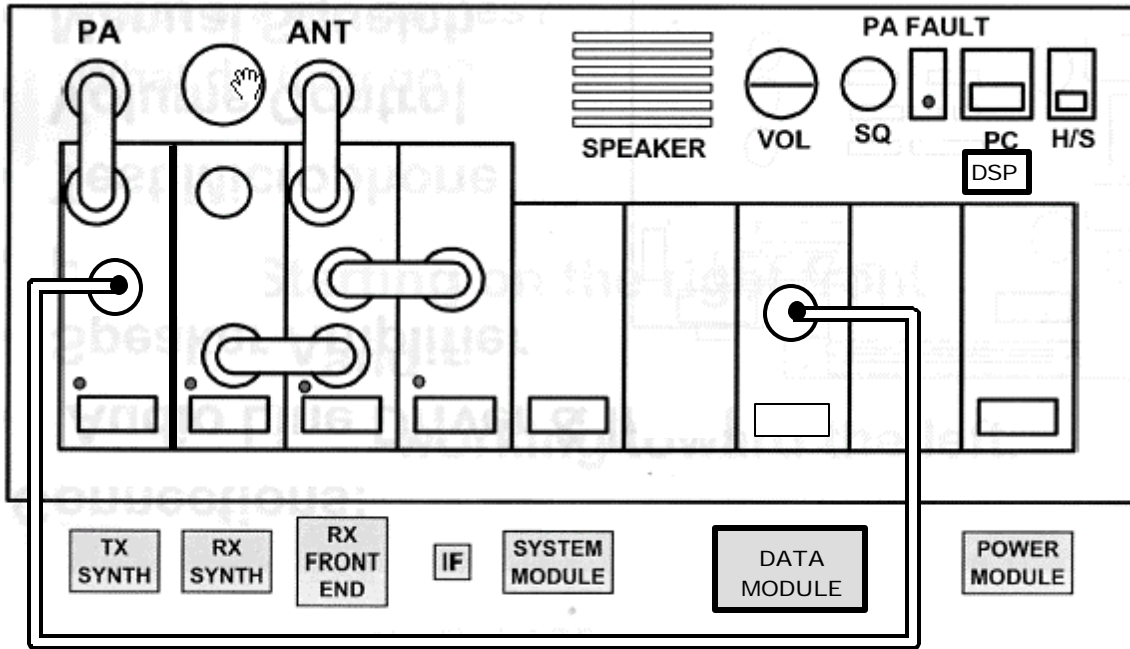


Figure 3-3: System Configuration

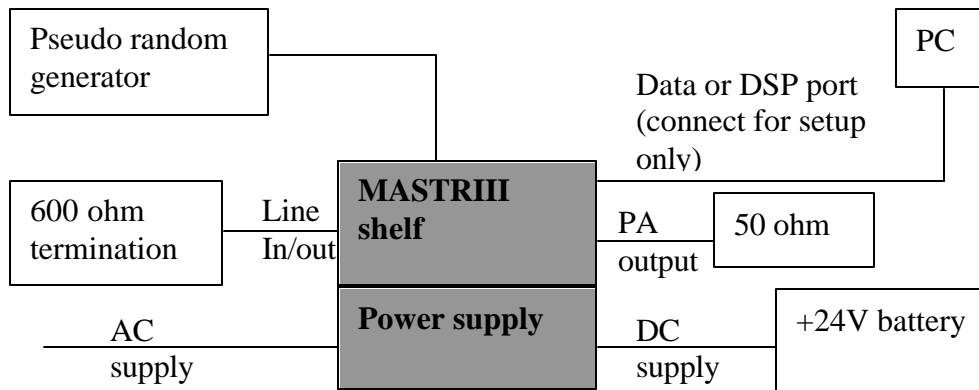

A photograph of the test setup used in this test report is presented in Appendix B: Test Set-up Photographs, on page 34.

3.7 EUT Interfaces and Cables

The system contains the following interfaces, as shown in Table 3-4.

Table 3-4: System Cables

| Interface Type | EUT Connection | Description | Type | Length | Qty |
|-----------------------|-----------------------------------|----------------------|------------|--------|-----|
| AC Mains | AC power supply | 3 wire AC cord | unshielded | 6 feet | 1 |
| DC Mains | Battery connector of power supply | 2 wire battery cable | unshielded | 6 feet | 1 |
| Telephone line in/out | MASTRIII shelf | 2 twisted pair | unshielded | 6 feet | 1 |

3.8 System Modifications

No modifications were required to pass the requirements.

4. General Test Conditions

4.1 Test Facility

Radiated emissions testing was performed in a 10-meter Ambient Free Chamber (AFC) located at 21 Richardson Side road, Kanata, Ontario, Canada. The AFC consists of a shielded room lined with ferrite tiles and anechoic material.

These test facilities are accredited by the Standards Council of Canada (SCC) [1]. Through a Mutual Recognition Agreement (MRA) between the National Voluntary Laboratory Accreditation Program (NVLAP) and SCC, the accreditation status of the AFC facility is valid for the U.S.

4.2 Measurement Instrumentation

The measurement instrumentation conforms to ANSI C63.2 [5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5. Detailed Test Results

5.1 RF Power

5.1.1 Test Specification

The system was tested to the requirements listed in Table 5-1:

Table 5-1: RF Power Requirements

| Requirement | Part / Section |
|-------------|----------------|
| FCC | 90.205, 2.1046 |
| RSS-119 | 5.4 |

5.1.1.1 Limits

The system was tested to the rated power of the EUT, listed in Table 5-2.

Table 5-2: RF Power Limit

| Configuration | Frequency | Rated Power |
|---------------|----------------|----------------------------|
| 1 | 403 to 430 MHz | 10 to 100 W (40 to 50 dBm) |
| 2 | 425 to 450 MHz | 10 to 100 W (40 to 50 dBm) |

5.1.2 Test Facility Information

Location: Solectron Design and Engineering Lab 1
Date tested: December 20, 2004
Tested by: Denis Lalonde

5.1.3 Test Procedure

The output of the power amplifier was connected to a power meter using a calibrated RF attenuator and cable.

The unmodulated RF signal was set at the bottom, middle, and top of the frequency band. The lowest and highest possible power levels were evaluated. Each of the 2 Tx/Rx Synthesizers were tested.

5.1.4 Test Results

Test results are shown in Table 5-3.

Table 5-3: RF Power Levels

| Channel (MHz) | Low Power (dBm) | Hi Power (dBm) |
|-----------------------------|-----------------|----------------|
| 403.025 (low split synth.) | 40.1 | 50.0 |
| 425.025 (low split synth.) | 40.1 | 50.0 |
| 449.975 (high split synth.) | 40.1 | 50.0 |

5.1.5 Test Conclusion

The test results met the requirement.

5.1.6 Test Equipment List

Table 5-4: Test Equipment Used for RF Power

| Category | Manufacture | Model Number | Description | Serial Number | Cal. Due |
|--------------|-------------|--------------|--------------|---------------|---------------|
| Attenuator | Weinschel | 53-20-33 | 20 dB, 500 W | KW975 | 22 April 2005 |
| Attenuator | Weinschel | 6070-10 | 10 dB, 25 W | BE0846 | 25 Oct. 2005 |
| Power meter | Anritsu | M2438A | Power meter | SSG012588 | 27 April 2005 |
| Power sensor | Anritsu | M2424A | Power sensor | SSG012587 | 27 April 2005 |

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.2 Conducted Spurious Emissions

5.2.1 Test Specification

The system was tested to the limits of the requirements listed in Table 5-5:

Table 5-5: Conducted Spurious Emissions Requirement

| Requirement | Part / Section |
|-------------|----------------|
| FCC | 90.210, 2.1051 |
| RSS-119 | 6.3 |

5.2.1.1 Limits

The following specification levels are applicable to this test:

Table 5-6: Conducted Spurious Emission Limit

| Frequency Range (MHz) | Limit (dBm) |
|-----------------------|-------------|
| 30 to 4500 | -13 dBm |

The limit is calculated in section 5.4.

5.2.2 Test Facility Information

Location: Solectron Design and Engineering Lab 1
Date tested: December 20, 2004
Tested by: Denis Lalonde

5.2.3 Test Procedure

Conducted spurious emissions were measured at the bottom and top of the frequency band. Two sets of synthesizers were tested at their maximum (100 W) and minimum power levels (10 W). The transmitter was modulated with a 2 level digital signal with 9600 bits/sec bit rate.

The measurement was separated in 2 frequency bands;

1. 30 MHz to 800 MHz: the power amplifier output is connected to the spectrum analyzer through a 10 dB and a 20 dB attenuator.
2. 800 MHz to 5.12 GHz: the power amplifier output is connected to the spectrum analyzer through a 20 dB and a 2 GHz to 800 MHz high-pass filter.

5.2.4 Test Results

The test result are shown in Table 5-7.

Table 5-7: Conducted Spurious Emissions

| Configuration | Channel (MHz) | Maximum level of spurious emission (dBm) | | Reference |
|---------------|---------------|--|-----------|--------------------------|
| | | Hi Power | Low Power | |
| 1 | 403.025 | -24.2 | -33.8 | Figure 7-2 to Figure 7-5 |
| 2 | 449.975 | -24.5 | -34.3 | Figure 7-6 to Figure 7-9 |

5.2.5 Test Conclusion

The test results met the requirement.

5.2.6 Test Equipment List

Table 5-8: Test Equipment used for Conducted Spurious Emissions

| Category | Manufacture | Model Number | Description | Serial Number | Cal. Due |
|-------------------|--------------------|--------------|-------------------|---------------|------------|
| Attenuator | Weinschel | 53-20-33 | 20 dB, 500 W | KW975 | 22/04/2005 |
| Attenuator | Weinschel | 6070-10 | 10 dB, 25 W | BE0846 | 13/10/2005 |
| Spectrum analyzer | HP | 8564A | 40 GHz | SSG012069 | 28/04/2005 |
| High Pass filter | Microwave Circuits | H8008501 | 800 MHz high pass | SSG012709 | NR |
| Signal generator | HP | 83732A | 20 GHz | SSG012125 | 13/10/2005 |

NR: not required

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.3 Emission Mask

5.3.1 Test Specification

The system was tested to the limits of the requirements listed in Table 5-9:

Table 5-9: Emission Mask Requirement

| Requirement | Part / Section |
|-------------|----------------|
| FCC | 90.210, 2.1049 |
| RSS-119 | 6.4 |

5.3.1.1 Limits

The specification levels in Table 5-10 were used.

Table 5-10: Emission Mask Limits

| Channel spacing (kHz) | Modulation Type | Mask |
|-----------------------|---------------------------|----------------|
| 25 | 2 level digital +/- 3 kHz | Part 90 Mask C |

5.3.2 Test Facility Information

Location: Solectron Design and Engineering Lab 1

Date tested: December 20, 2004

Tested by: Denis Lalonde

5.3.3 Test Procedure

The emission mask measurements were performed at 425.025 MHz. The system was tested at its maximum (100 W) power level. The modulation of the transmitted signal was setup as follows:

1. 2 level 9600 baud modulation: The MASTRIII Base Station was modulated with a 2 level 9600 baud pseudo-random TTL-level signal. The Data Module was adjusted to produce +/- 3 kHz deviation at the power amplifier RF output.

For this measurement, the power amplifier output was connected to the spectrum analyzer through a 10 dB and a 20 dB attenuator.

5.3.4 Test Results

Table 5-11 lists the modulation modes measured:

Table 5-11: Emission Mask Results

| Frequency (MHz) | Type of signal | Test result | Reference |
|-----------------|---|-------------|-------------|
| 425.025 MHz | 2 level 9600 baud / +/- 3 KHz deviation | Pass | Figure 7-10 |

5.3.5 Test Conclusion

The test results met the requirement.

5.3.6 Test Equipment List

Table 5-12: Test Equipment used for Emission Mask

| Category | Manufacture | Model | Description | Serial Number | Cal. Due |
|-------------------|-------------|----------|--------------|---------------|------------|
| Attenuator | Weinschel | 53-20-33 | 20 dB, 500 W | KW975 | 22/04/2005 |
| Attenuator | Weinschel | 6070-10 | 10 dB, 25 W | BE0846 | 13/10/2005 |
| Spectrum analyzer | HP | 8564A | 40 GHz | SSG012069 | 28/04/2005 |

The measurement instrumentation conforms to ANSI C63.2[5]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.4 Field Strength of Spurious Emissions

5.4.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-13: Field Strength of Spurious Emissions Requirement

| Requirement | Part / Section |
|-------------|----------------|
| FCC | 90.210, 2.1053 |

5.4.1.1 Limits

The following specification levels are worst-case limits taken from all test specifications.

Table 5-14: Field Strength of Spurious Emissions Limit

| Frequency Range (MHz) | ERP Limit (dBm) |
|-----------------------|-----------------|
| 30 to 4500 | -13 |

The ERP limit was calculated using the minimum attenuation requirement of FCC 90.210 d)3).

$$\begin{aligned}
 \text{Attenuation} &= 43 + 10 \log (P) \text{ dB} \\
 &= 43 + 10 \log (100) \\
 &= 63 \text{ dB}
 \end{aligned}$$

$$\begin{aligned}
 \text{ERP limit} &= 10 \log (100 \text{ W}) - 63 \text{ dB} \\
 &= -13 \text{ dBm}
 \end{aligned}$$

When operating at 10 W, the ERP limit for spurious emissions is – 13 dBm.

5.4.2 Test Facility Information

Location: Soletron Design and Engineering 10m Ambient Free Chamber
Date tested: December 11 and 12, 2004
Tested by: S. Cullen, and D. Lalonde

5.4.3 Test Procedure

Verifications of the test equipment and AFC were performed prior to the installation of the EUT in accordance with the quality assurance procedures in KP000270-LP-EMC-01-01 [7]. The test was performed as per the relevant Test procedures: ANSI C63.4 [4].

The system was tested in the following manner:

- The EUT was placed on a turntable inside the AFC and it was configured as in normal operation. The system and its cables were separated from the ground plane by an insulating support 10 mm in height. The system was grounded in accordance with its normal installation specifications. No additional grounding connections are allowed.

- For tests between 30 MHz and 1 GHz a broadband bilog antenna was placed at a 10 m distance; a horn antenna, placed also at 10 m distance from the EUT, was used for measurements between 1 GHz and 5.12 GHz.
- A pre-scan was performed to find emissions (frequencies) requiring detail measurement. The pre-scan (using a peak detector) was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for antenna heights of 1 to 4 meters, in steps of 1 meter, and for horizontal and vertical polarizations of the receiving antenna (for measurements above 30 MHz).
- Prescan optimization was performed based on the pre-scan data. All frequencies, having emission levels within 10 dB of the specification(s) limits, were optimized. For each such frequency, the EUT was rotated in azimuth over 360 degrees and the direction of maximum emission was noted. Antenna height was then varied from 1 to 4 meters at this azimuth to obtain maximum emissions. The procedure was repeated for both horizontal and vertical polarizations of the search antenna. Then the maximum level measured was recorded.
- The frequency range investigated was 30 MHz to 5.12 GHz.
- Between 30 MHz and 1 GHz, a resolution bandwidth of 120 kHz was used.
- Above 1 GHz, a 1 MHz resolution bandwidth and 1 MHz video bandwidth were used.
- The highest emissions were evaluated using the substitution method. This is accomplished by replacing the EUT by a calibrated antenna, cable and signal generator. This equipment is used to transmit a signal that will generate a RF meter reading level identical to the one recorded when the EUT was present. The signal generator power level, the calibration data of the cable and antenna is then used to evaluate the Effective Radiated Power (ERP) of the EUT. The following formula is used:

$$\text{ERP} = \text{Signal generator level} - \text{Cable losses} + \text{Antenna gain (dBi)} - \text{Gain of tuned dipole (dBi)}$$

$$\text{Margin} = \text{Limit} - \text{ERP}$$

The measurement was performed while the power amplifier was operating at minimum power output (10 W) and its maximum power output (100 W). A 2 level 9600 baud wideband signal tuned at 403.025 MHz and 449.975 MHz was used for this test. A 50 ohm load was connected to the power amplifier output.

5.4.4 Test Results

Table 5-15 lists the highest emissions measured, all other emissions had more than 20 dB margin:

Table 5-15: Field Strength of Spurious Emissions

| Tx Channel | Freq. of Emission (MHz) | Signal Generator Level Hi Power (dBm) | Antenna Gain (dBi) | Cable losses (dB) | ERP Low Power (dBm) | ERP Hi Power (dBm) | Margin (dB) | Reference |
|-------------|-------------------------|---------------------------------------|--------------------|-------------------|---------------------|--------------------|-------------|----------------------------|
| 403.025 MHz | 1209.075 (3Tx) | -26.5 | 7.0 | 1.2 | -43.7 | -22.9 | 9.9 | Figure 7-11 to Figure 7-14 |
| | 1612.1 (4Tx) | -54.8 | 8.4 | 1.3 | -64.7 | -49.9 | 36.9 | |
| | 2821.175 (7Tx) | -38.4 | 9.7 | 1.8 | -61.9 | -32.7 | 19.7 | |
| 449.975 MHz | 1349.925 (3Tx) | -48.6 | 7.6 | 1.3 | -58.0 | -44.5 | 31.5 | Figure 7-15 to Figure 7-18 |
| | 2249.875 (5Tx) | -43.7 | 9.1 | 1.6 | -54.3 | -38.4 | 25.4 | |

5.4.5 Test Conclusion

The test results met the requirement.

5.4.6 Test Equipment List

Table 5-16: Test Equipment used for Field Strength of Spurious Emissions

| Description | Manufacturer | Model | Serial Number | Cal. Due |
|--|------------------|-----------------------|---------------|------------|
| Bilog Antenna | Antenna Research | LPB 2520A | SSG012299 | 3/2/2005 |
| Double Ridged Horn | Emco | 3115 | SSG012298 | 12/29/2004 |
| Pre-Amplifier | BNR | LNA | SSG012360 | 2/11/2005 |
| Quasi-Peak Adapter, HP85650A, (EMI # 2) | HP | 85650A | SSG013046 | 10/13/2005 |
| RF Amplifier, HP8447 # 1 | Agilent | 8447D | SSG013045 | 10/13/2005 |
| Spec. A, RF PreSelector, HP85685A (AFC #1) | HP | 85685A | SSG012010 | 4/29/2005 |
| Spectrum Analyzer Display, HP 85662A | HP | 85662A | SSG012433 | 4/29/2005 |
| Spectrum Analyzer, HP8566B, (AFC #1) | HP | 8566B | SSG012521 | 4/29/2005 |
| Sucoflex Cable, EMC Cable # 1 | Huber & Suhner | 106A | SSG012454 | 2/12/2005 |
| Sucoflex Cable, EMC Cable # 2 | Huber & Suhner | 106A | SSG012453 | 2/12/2005 |
| Sucoflex Cable, EMC Cable # 5 | Huber & Suhner | 104PEA | SSG012359 | 2/11/2005 |
| Sucoflex Cable, EMC Cable # 6 | Huber & Suhner | 106A | SSG012456 | 2/12/2005 |
| Utiflex Cable, EMC Cable # 4 | Micro-Coax | UFA 147B-1-0300-70X70 | SSG012309 | 10/13/2005 |

| Description | Manufacturer | Model | Serial Number | Cal. Due |
|------------------|--------------|--------|---------------|------------|
| Signal generator | HP | 83732A | SSG012125 | 13/10/2005 |
| Horn Antenna | EMCO | 3115 | 2703 | 24/02/05 |

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.5 Frequency Stability

5.5.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-17: Frequency Stability Requirement

| Requirement | Part / Section |
|-------------|----------------|
| FCC | 90.213, 2.1055 |
| RSS-119 | 7.0 |

5.5.1.1 Limits

The specification levels are listed in Table 5-18.

Table 5-18: Frequency Stability Limits

| Frequency Range (MHz) | Bandwidth (kHz) | Minimum Frequency Stability (ppm) |
|-----------------------|-----------------|-----------------------------------|
| 421 to 512 | 25 | 2.5 |

5.5.2 Test Facility Information

Location: Solectron Design and Engineering Lab 9

Date tested: December 17, 2004

Tested by: Denis Lalonde

5.5.3 Test Procedure

The 425.025 MHz unmodulated output of the power amplifier was connected through attenuators into a frequency counter. A 10 MHz rubidium frequency reference was used to provide improved frequency accuracy to the frequency counter.

Frequency measurements were performed with 1 configuration of the base station frequency reference. A 12.8 MHz internal frequency reference is used when the base station is deployed with 25 kHz bandwidths.

The base station was installed in an environmental chamber. The temperature was changed from – 30 degree Celsius up to 50 degree Celsius in 10 degree increments while the EUT was powered off. The temperature was allowed to stabilize for 1 hour after changing the temperature. The measurement of frequency was done 5 minutes after the base station was powered on.

Frequency accuracy measurement were also performed at 20 degree Celsius while modifying the voltage of the AC mains from 85% (102 VAC) to 115% (138 VAC) of the nominal value (120 VAC).

5.5.4 Test Results

The table below lists the frequency stability measurement results:

Table 5-19: Frequency Stability Results (425.025 MHz)

| Temperature (degree. Celsius) | AC Voltage (V) | Internal 12.8 MHz Frequency Reference (Used for 25 kHz Bandwidth) | |
|-------------------------------------|----------------------|--|--------------------------|
| | | Frequency (MHz) | Frequency Error (ppm) |
| -30 | 120 | 425.02471 | -0.68 |
| -20 | 120 | 425.02476 | -0.56 |
| -10 | 120 | 425.024995 | -0.01 |
| 0 | 120 | 425.024965 | -0.08 |
| 10 | 120 | 425.025064 | 0.15 |
| 20 | 102 | 425.024999 | 0.00 |
| 20 | 120 | 425.024999 | 0.00 |
| 20 | 138 | 425.024999 | 0.00 |
| 30 | 120 | 425.024781 | -0.52 |
| 40 | 120 | 425.024671 | -0.77 |
| 50 | 120 | 425.024537 | -1.09 |

5.5.5 Test Conclusion

The test results met the requirement.

5.5.6 Test Equipment List

Table 5-20: Test Equipment used for Frequency Stability

| Category | Manufacture | Model | Description | Serial Number | Cal. Due |
|---------------------|-------------|----------|-----------------|---------------|------------|
| Frequency Reference | UCT | 2008 | Rubidium 10 MHz | A1010 | 27/04/2005 |
| Attenuator | Weinschel | 53-20-33 | 20 dB, 500 W | KW975 | 22/04/2005 |
| Attenuator | Weinschel | 6070-10 | 10 dB, 25 W | BE0846 | 13/10/2005 |
| Digital Multimeter | Fluke | 83 | | SSG012586 | 20/04/2005 |
| Frequency Counter | HP | 5385A | | SS013044 | 12/07/2005 |

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.6 Transient Frequency Behavior

5.6.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-21: Transient Frequency Behavior Requirement

| Requirement | Part / Section |
|-------------|----------------|
| FCC | 90.214 |
| RSS-119 | 6.5 |

5.6.1.1 Limits

The specification levels are listed in Table 5-22.

Table 5-22: Transient Frequency Behavior Limit

| Channel Spacing (kHz) | Time Interval (ms) | Maximum Frequency Difference (kHz) |
|-----------------------|--------------------|------------------------------------|
| 25 | T1 = 10 | +/- 25 |
| | T2= 25 | +/- 12.5 |
| | T3= 10 | +/- 25 |

Note:

T1 is the time period immediately following Txon

T2 the time period immediately following T1.

T3 is the time period from the instant when the transmitter is turned off until Txoff.

5.6.2 Test Facility Information

Location: Solectron Design and Engineering Lab 1
Date tested: December 20, 2004
Tested by: Denis Lalonde

5.6.3 Test Procedure

The test procedure of ANSI/TIA-603B-2002 [14] section 2.2.19 (modulation domain analyzer method) was used.

5.6.4 Test Results

Table 5-23 shows the transient frequency behavior measurement results. Each graph shows the transmitted signal frequency at the center of the +/- 5 kHz frequency scale over 35 msec.

Table 5-23: Transient Frequency Behavior Test Results

| Channel | Channel Spacing (kHz) | Time Interval (ms) | Maximum Frequency Difference (kHz) | Measured Frequency Difference (kHz) | Measurement reference |
|-------------|-----------------------|--------------------|------------------------------------|-------------------------------------|---------------------------|
| 425.025 MHz | 25 | T1 = 10 | +/- 25 | < 1 | Figure 7-19 |
| | | T2 = 25 | +/-12.5 | < 1 | Figure 7-19 & Figure 7-20 |
| | | T3 = 10 | +/- 25 | < 1 | Figure 7-20 |

5.6.5 Test Conclusion

The test results met the requirement.

5.6.6 Test Equipment List

Table 5-24: Test Equipment used for Transient Frequency Behavior Measurement

| Category | Manufacture | Model | Description | Serial Number | Cal. Due |
|----------------------------|-------------|----------|--------------|---------------|------------|
| Attenuator | Weinschel | 53-20-33 | 20 dB, 500 W | KW975 | 22/04/2005 |
| Attenuator | Weinschel | 6070-10 | 10 dB, 25 W | BE0846 | 13/10/2005 |
| Modulation Domain analyzer | HP | 53310A | | 3121A01217 | 27/04/2005 |

Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.7 Occupied Bandwidth

5.7.1 Test Specification

The system occupied bandwidth was evaluated according to the specifications listed in Table 5-25:

Table 5-25: Occupied Bandwidth

| Requirement | Part / Section |
|-------------|----------------|
| FCC | 2.202 |
| RSP-100 | 7.2 |

5.7.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1
Date tested: December 20, 2004
Tested by: Denis Lalonde

5.7.3 Test Procedure

Occupied bandwidth measurements was performed at 425.025 MHz.

- 2 level 9600 baud modulation: The MASTRIII Base Station was modulated with a 2 level 9600 baud pseudo-random TTL-level signal. The Data Module was adjusted to produce +/- 3 kHz deviation at the power amplifier RF output.

For this measurement, the power amplifier output was connected to the spectrum analyzer through a 10 dB and a 20 dB attenuator.

The occupied bandwidth was measured using the 99% bandwidth measuring feature of the spectrum analyzer.

5.7.4 Test Results

The table below lists the calculated and measured occupied bandwidth.

Table 5-26: Occupied Bandwidth Values (425.025 MHz)

| Type of signal | Calculation | Measurement (kHz) | Emission designator |
|-------------------------------------|---|-------------------------|---------------------|
| 2 level 9600 baud / 3 KHz deviation | Max. modulation (B) = 9.6 kHz Max. deviation (D) = 3 kHz $K = 1$ $B_n = B + 2DK$ $B_n = 15.6 \text{ kHz}$ | 10.8 kHz Figure 7-21 | 15K6F1D 15K6F1E |

5.7.5 Test Equipment List

Table 5-27: Test Equipment used for Occupied bandwidth

| Category | Manufacture | Model | Description | Serial Number | Cal. Due |
|-------------------|-------------|----------|--------------|---------------|------------|
| Attenuator | Weinschel | 53-20-33 | 20 dB, 500 W | KW975 | 22/04/2005 |
| Attenuator | Weinschel | 6070-10 | 10 dB, 25 W | BE0846 | 13/10/2005 |
| Spectrum analyzer | HP | 8564A | 40 GHz | SSG012069 | 28/04/2005 |

The measurement instrumentation conforms to ANSI C63.2[5]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.8 Receive Antenna Port Conducted Emissions

These tests are performed to assure that the product does not produce excessive conducted emissions on the receive antenna port.

5.8.1 Test Specification

The system was tested to the requirements listed in Table 5-28:

Table 5-28: Receive Port Conducted Emissions Requirement

| Requirement | Section | Country of Application |
|------------------------|---------|------------------------|
| RSS-119 | 8 | Canada |
| FCC Part 15, Subpart B | 15.111 | USA |

5.8.1.1 Limits

The specification levels in Table 5-29 are worst-case limits taken from all test specifications.

Table 5-29: Receive Antenna Port Conducted Emissions Limits

| Frequency Range (MHz) | FCC Part 15 / RSS-119 (dBm) |
|-----------------------|-----------------------------|
| 30 - 2560 | -57 |

5.8.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1

Date tested: December 20, 2004

Tested by: Denis Lalonde

5.8.3 Test Configurations


For conducted emissions test cases, the EUT hardware configuration / software load used is described in sections 3.6 (see Figure 3-2).

5.8.4 Test Procedure

Verifications of the test equipment were performed prior to the installation of the EUT in accordance with the quality assurance procedures in KP000270-LP-EMC-01-01 [7]. The test was performed as per the relevant Test procedures: ANSI C63.4 [4], RSS-119[13].

The test method shown in Figure 5-1 was used for conducted emission measurements on the receive antenna port.

Figure 5-1: Rx Antenna Port Test Method

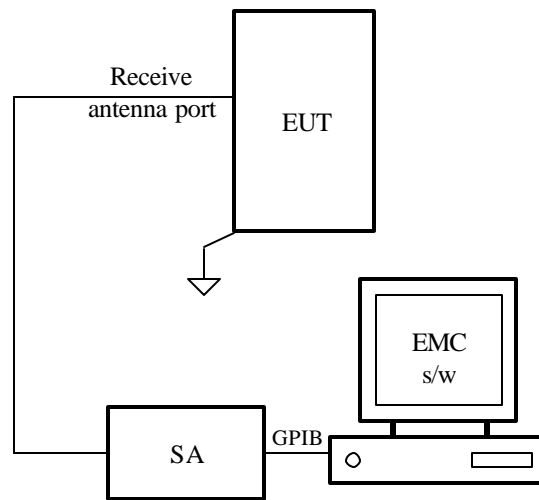

Abbreviations used in the above figures:

EUT Equipment under test
SA Spectrum Analyzer

- The connection of the antenna port cable was representative of installation practice as shown in the figure above.
- Conducted emissions were measured by connecting the spectrum analyzer input to the antenna port of the Receiver Front End Module
- A pre-scan was taken for all the frequency range from the requirement, using a peak detector on the spectrum analyzer. The pre-scan data was then compared to the specification limits. All emissions within 10 dB from the limit lines were recorded.

5.8.5 Test Results:

This section presents the conducted emissions on the receive antenna port test results. Graphical representations of the measurements taken appear in Appendix H: Conducted Receiver Emissions Plots.

All emissions had more than 10 dB margin.

5.8.6 Test Conclusion

The EUT has passed the Receive Antenna Port Conducted Emissions tests with respect to FCC Part 15 and RSS-119 with more than 10 dB of margin.

5.8.7 Test Equipment List

Table 5-30: Test Equipment used for Conducted Spurious Emissions

| Category | Manufacture | Model Number | Description | Serial Number | Cal. Due |
|-------------------|-------------|--------------|-------------|---------------|------------|
| Spectrum analyzer | HP | 8564A | 40 GHz | SSG012069 | 28/04/2005 |

The measurement instrumentation conforms to ANSI C63.2 [5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

6. References

1. Standards Council of Canada Scope of Accreditation Letter SCC 1003-15/163 dated 2002-12-16 (Scope of accreditation is effective until 2005-10-05 and includes FCC Part 15 and ICES-003). This scope of accreditation is outlined at the following web site <http://www.scc.ca/scopes/reg126-eng-s.pdf>.
2. Solectron EMS Canada Inc. Quality Manual, K0000608-QD-QM-01-07, 2004.
3. Solectron EMS Canada Inc. Lab Operations Manual KG000347-QD-LAB-01-05, 2004.
4. ANSI C63.4-2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz, 17 June 2001.
5. ANSI C63.2-1996, American National Standard for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications.
6. CISPR 16-1, Specification for Radio Disturbance and Immunity Measuring Apparatus and Methods - Part 1: Radio Disturbance and Immunity Measuring Apparatus, Edition 2.0, 1999-10.
7. Solectron EMS Canada Inc., EMC General Lab Test Procedure, KP000270-LP-EMC-01-01, February 2004.
8. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 2, U.S. Federal Communications Commission.
9. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 22, U.S. Federal Communications Commission.
10. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 74, U.S. Federal Communications Commission.
11. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 80, U.S. Federal Communications Commission.
12. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 90, U.S. Federal Communications Commission.
13. RSS-119, Issue 6, “Land Mobile and Fixed Radio, Transmitters and Receivers, 27.41 to 960 MHz” March 25, 2000.
14. ANSI/TIA-603-B-2002, “Land Mobile FM or PM Communications Equipment Measurement and Performance Standards”, November 7, 2002
15. VCCI, V-3/02.04 16th edition, April 2002. Title: AGREEMENT OF VOLUNTARY CONTROL COUNCIL FOR INTERFERENCE BY INFORMATION TECHNOLOGY EQUIPMENT
16. APLAC, Asia Pacific Laboratory Accreditation Cooperation, Website (February 10th, 2004): <http://www.aplac.org>.

17. ILAC, International Laboratory Accreditation Cooperation,
Website (February 10th, 2004): <http://www.ilac.org/>
18. Industry Canada, RSS 212, Test Facilities and Test Methods for Radio Equipment, Issue 1
(Provisional), February 27, 1999.

7. Appendices


7.1 Appendix A: Glossary

Included below are definitions and abbreviations of terms used in this document.

| Term | Definition |
|---------|---|
| AC | Alternating Current |
| AFC | Ambient Free Chamber |
| AM | Amplitude modulation |
| ANSI | American National Standards Institute |
| AVG | Average detector |
| CISPR | Comité International Spécial Perturbation Radioélectrique (International Special Committee on Radio Interference) |
| Class A | Class A Limits for typical commercial establishments |
| Class B | Class B Limits for typical domestic and residential establishments |
| dB | Decibel |
| EMC | Electromagnetic Compatibility |
| EMI | Electromagnetic Interference |
| EN | European Normative |
| EUT | Equipment Under Test |
| FCC | Federal Communications Commission, USA |
| GND | Ground |
| IC | Industry Canada |
| PA | Broadband Power Amplifier |
| RBW | Resolution Bandwidth |
| RF | Radio-Frequency |
| RFI | Radio-Frequency Interference |
| SCC | Standards Council of Canada |

7.2 Appendix B: Test Set-up Photographs

Figure 7-1: M/A-COM MASTRIII UHF Base Station with Data Module Radiated Emissions Set-up

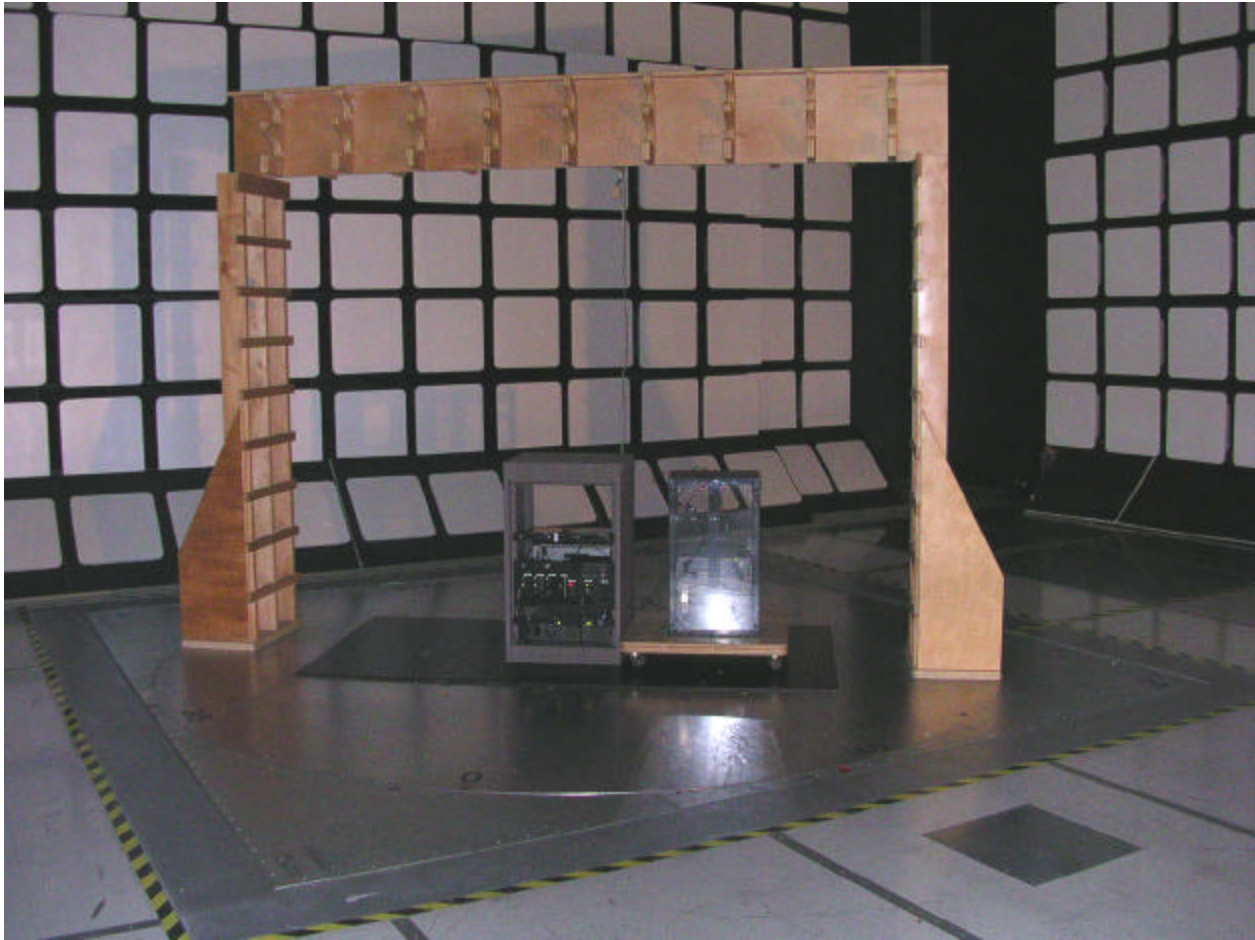

7.3 Appendix C: Conducted Spurious Emissions Plots

Figure 7-2: Tx at 403.025 MHz, 100 W Power, 30 MHz to 800 MHz

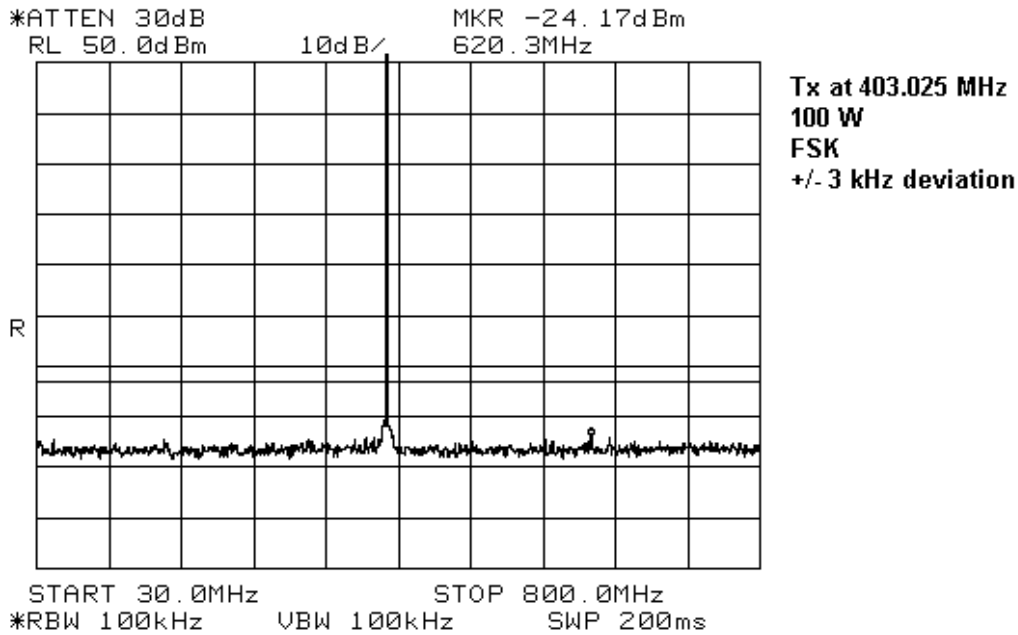


Figure 7-3: Tx at 403.025 MHz, 100 W Power, 800 MHz to 5.12 GHz

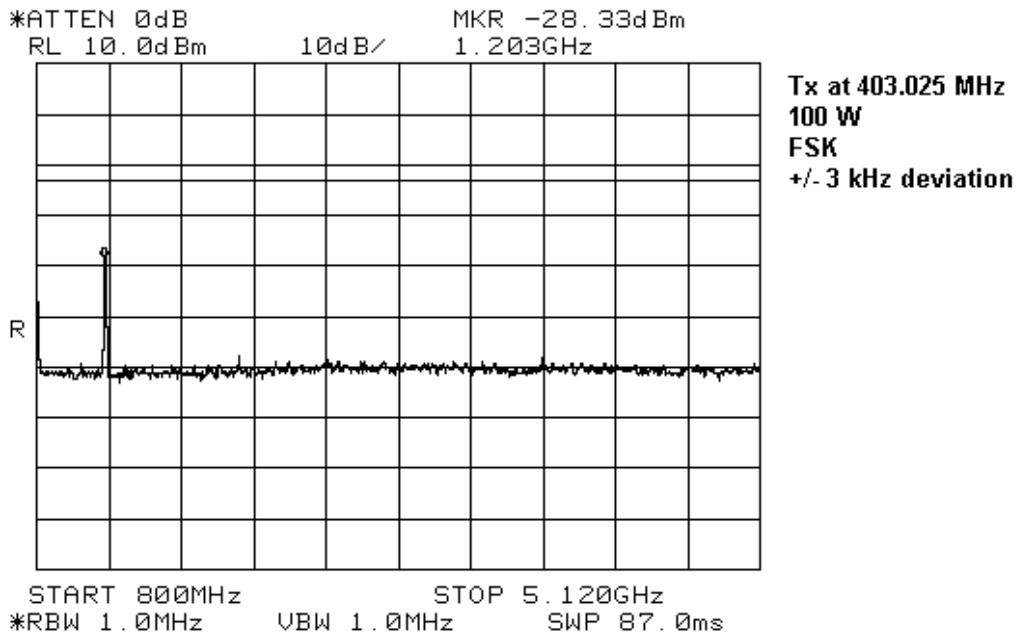


Figure 7-4: Tx at 403.025 MHz , 10 W Power, 30 MHz to 800 MHz

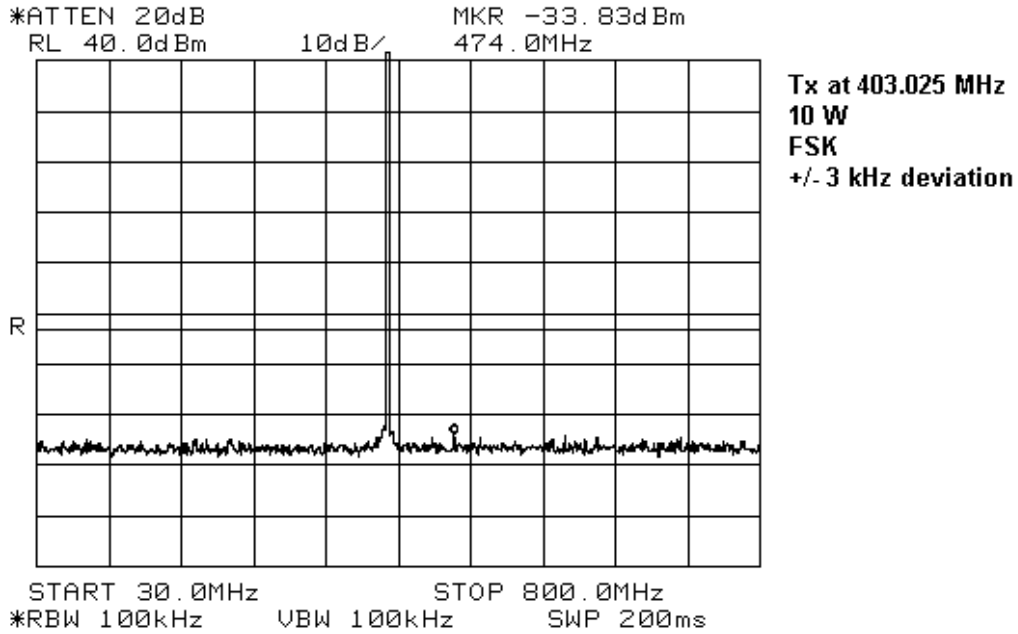


Figure 7-5: Tx at 403.025 MHz , 10 W Power, 800 MHz to 5.12 GHz

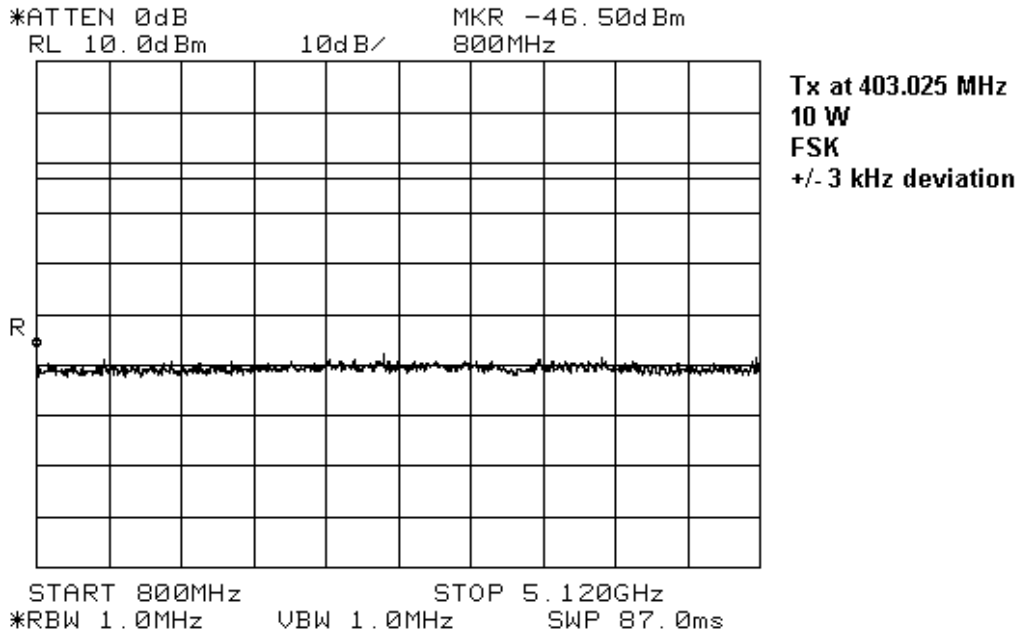


Figure 7-6: Tx at 449.975 MHz, 100 W Power, 30 MHz to 800 MHz

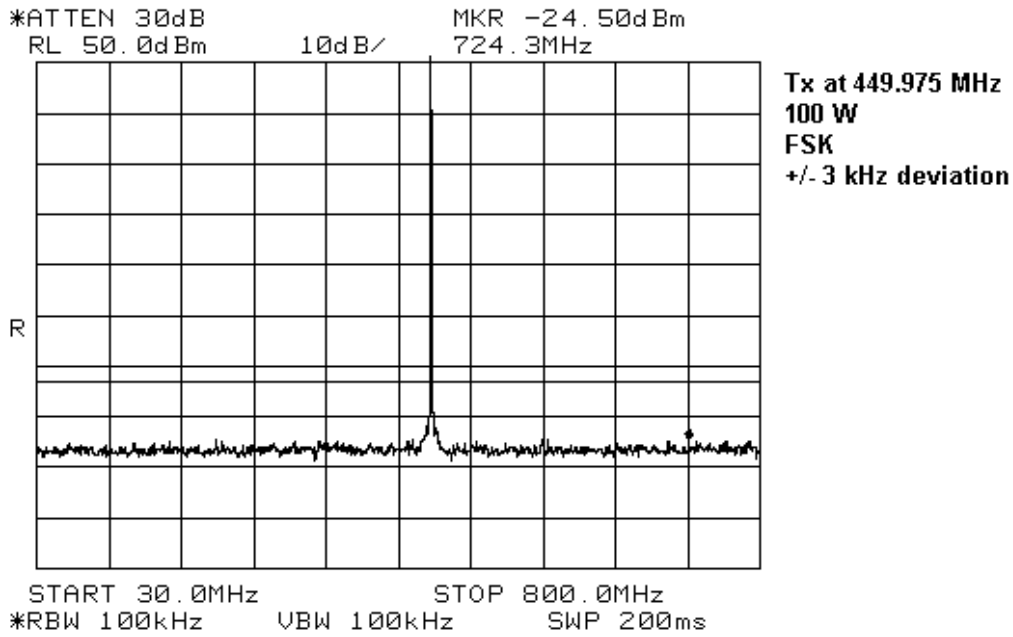


Figure 7-7: Tx at 449.975 MHz, 100 W Power, 800 MHz to 5.12 GHz

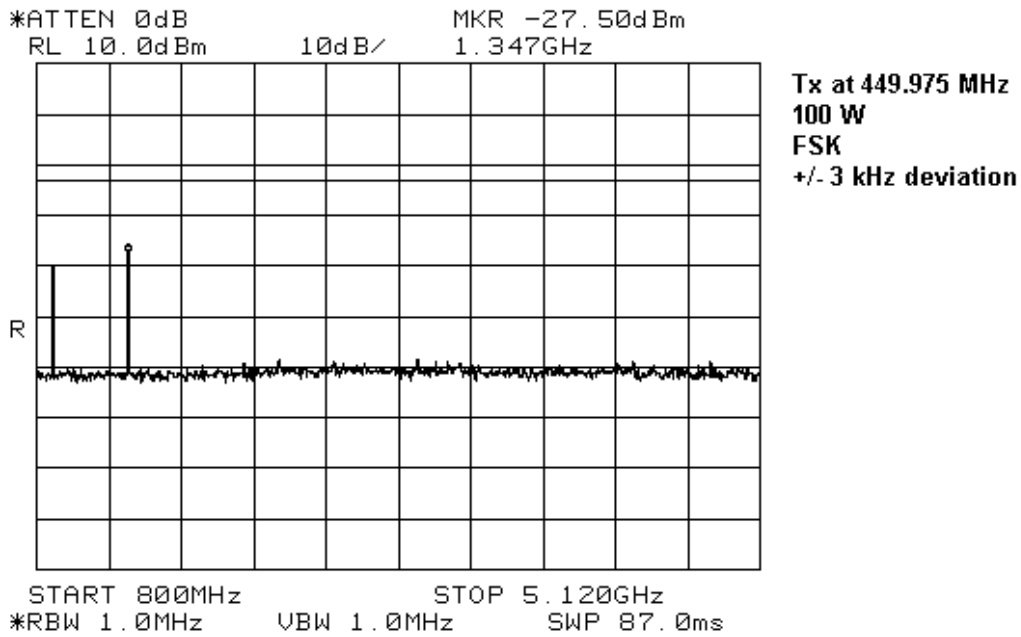


Figure 7-8: Tx at 449.975 MHz , 10 W Power, 30 MHz to 800 MHz


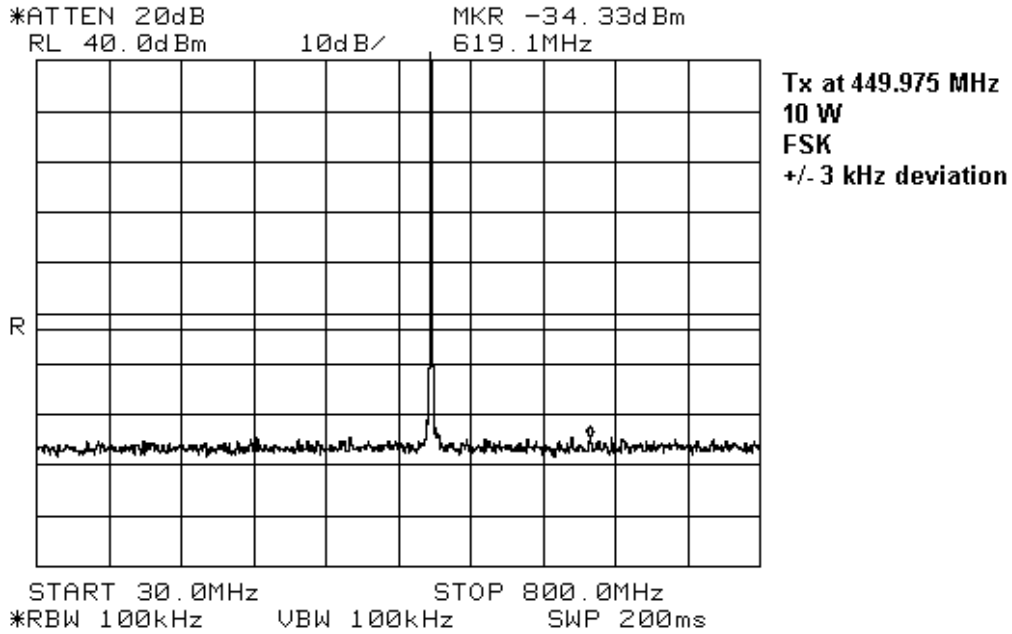



Figure 7-9: Tx at 449.975 MHz , 10 W Power, 800 MHz to 5.12 GHz

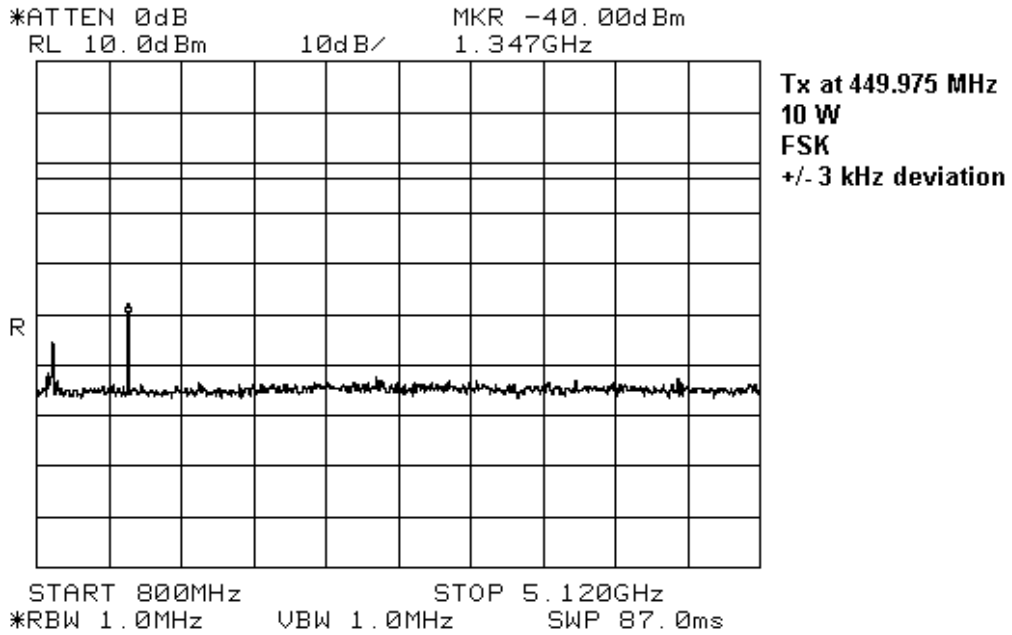

7.4 Appendix D: Emission Mask Plots

This appendix presents all emission mask plots for the test cases measured.


Figure 7-10: 2 Level 9600 baud Signal with +/- 3 kHz Deviation, 425.025 MHz

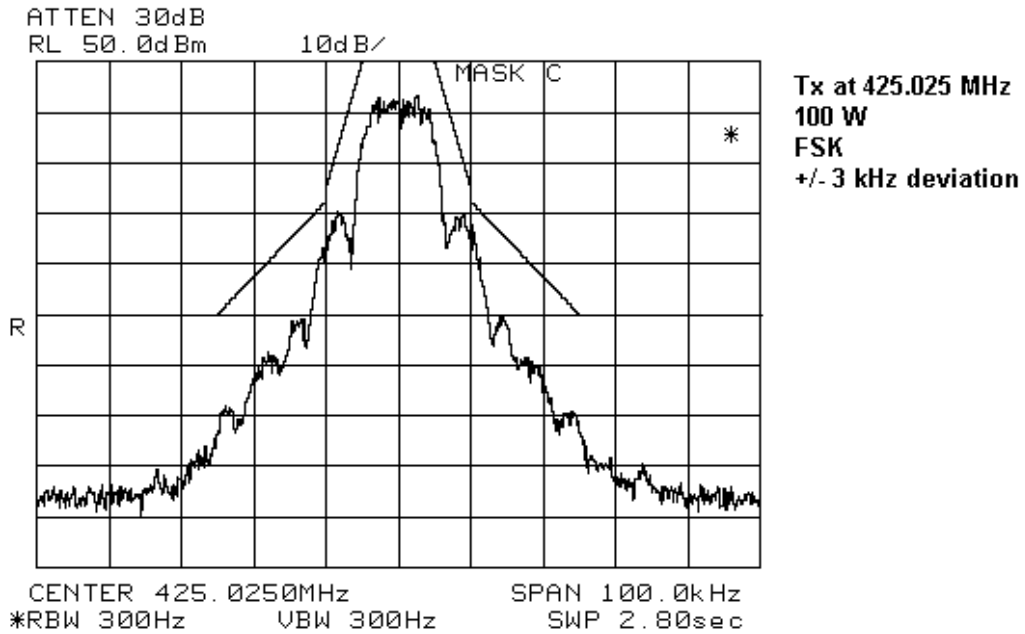

7.5 Appendix E: Field Strength of Spurious Emissions Plots

This appendix presents all field strength plots for the test cases measured.

Figure 7-11: Field Strength with 100 W Tx, 30 MHz to 1 GHz (Tx at 403.025 MHz)

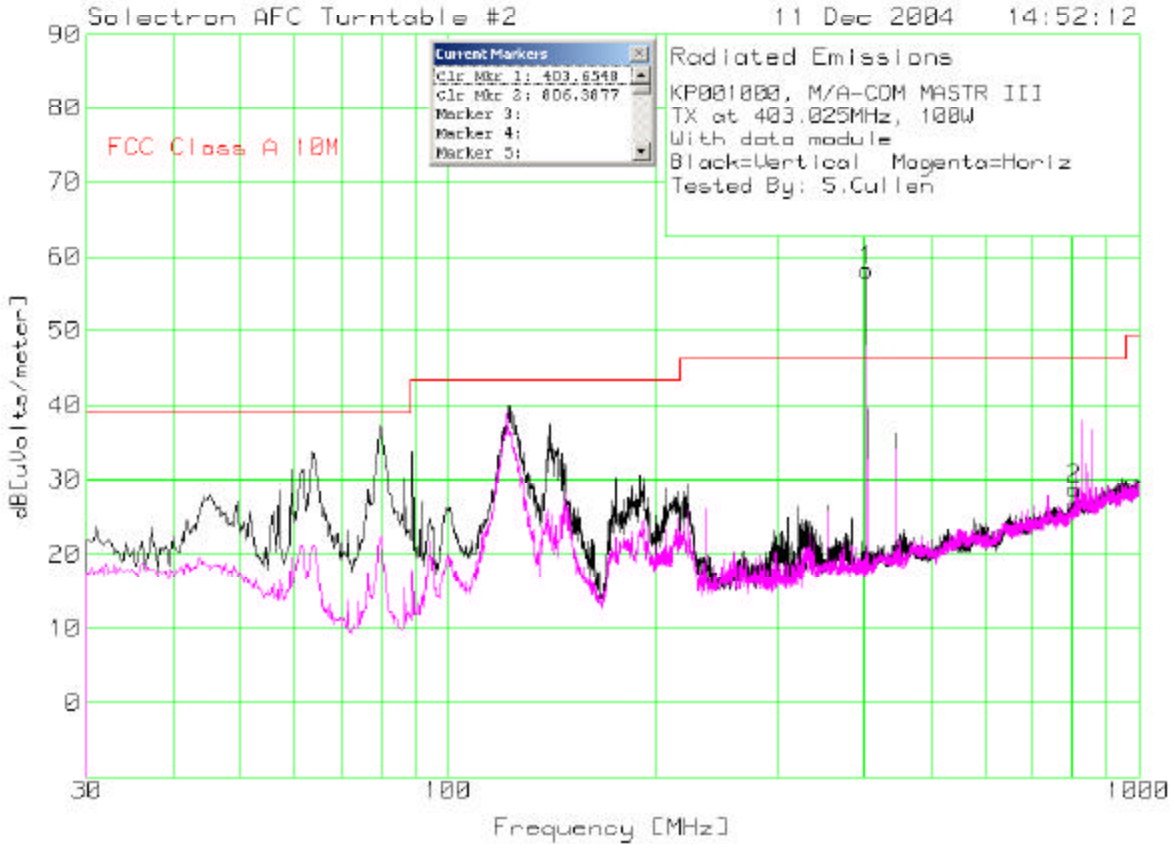

Note: the emissions at 403 MHz is leakage of the transmitted signal.

Figure 7-12: Field Strength with 100 W Tx, 1 GHz to 5.12 GHz, low frequency split (Tx at 403.025 MHz)


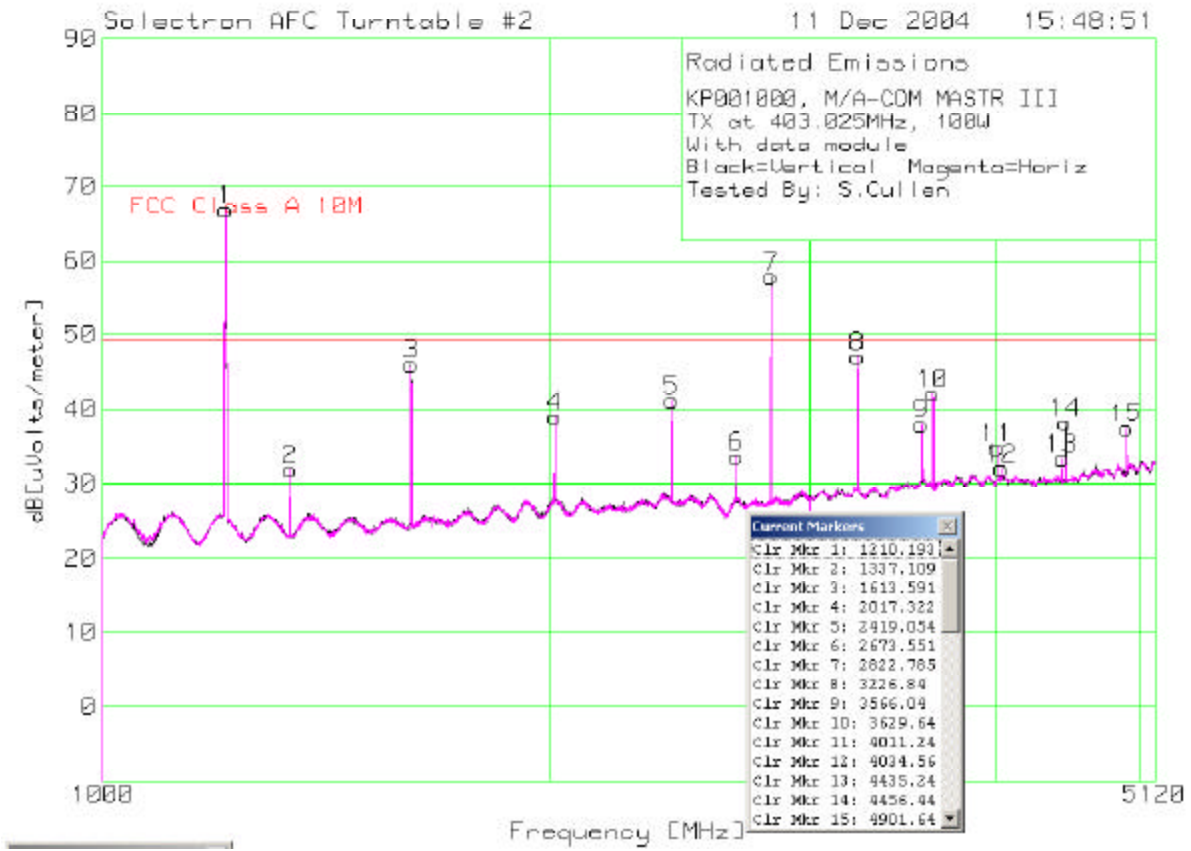


Figure 7-13: Field Strength with 10 W Tx, 30 MHz to 1 GHz (Tx at 403.025 MHz)

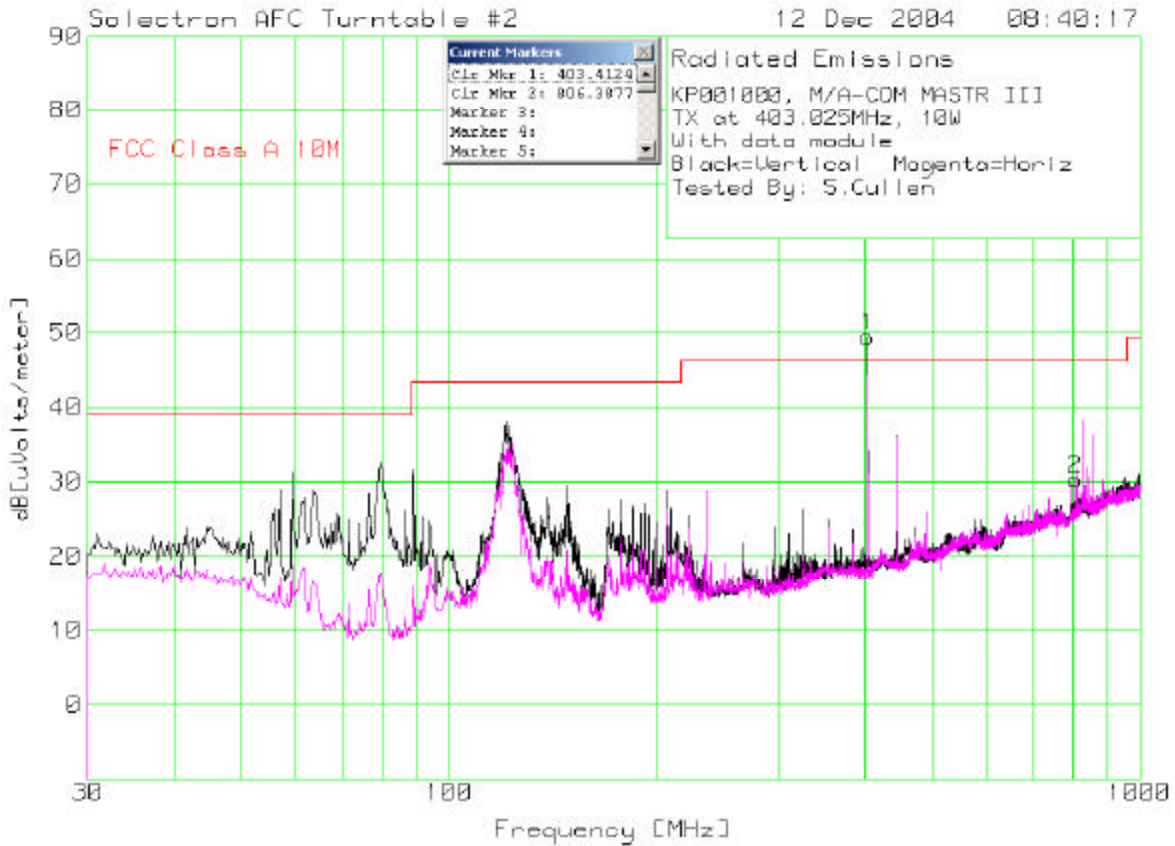

Note: the emissions at 403 MHz is leakage of the transmitted signal.

Figure 7-14: Field Strength with 10 W Tx, 1 GHz to 5.12 GHz, (Tx at 403.025 MHz)


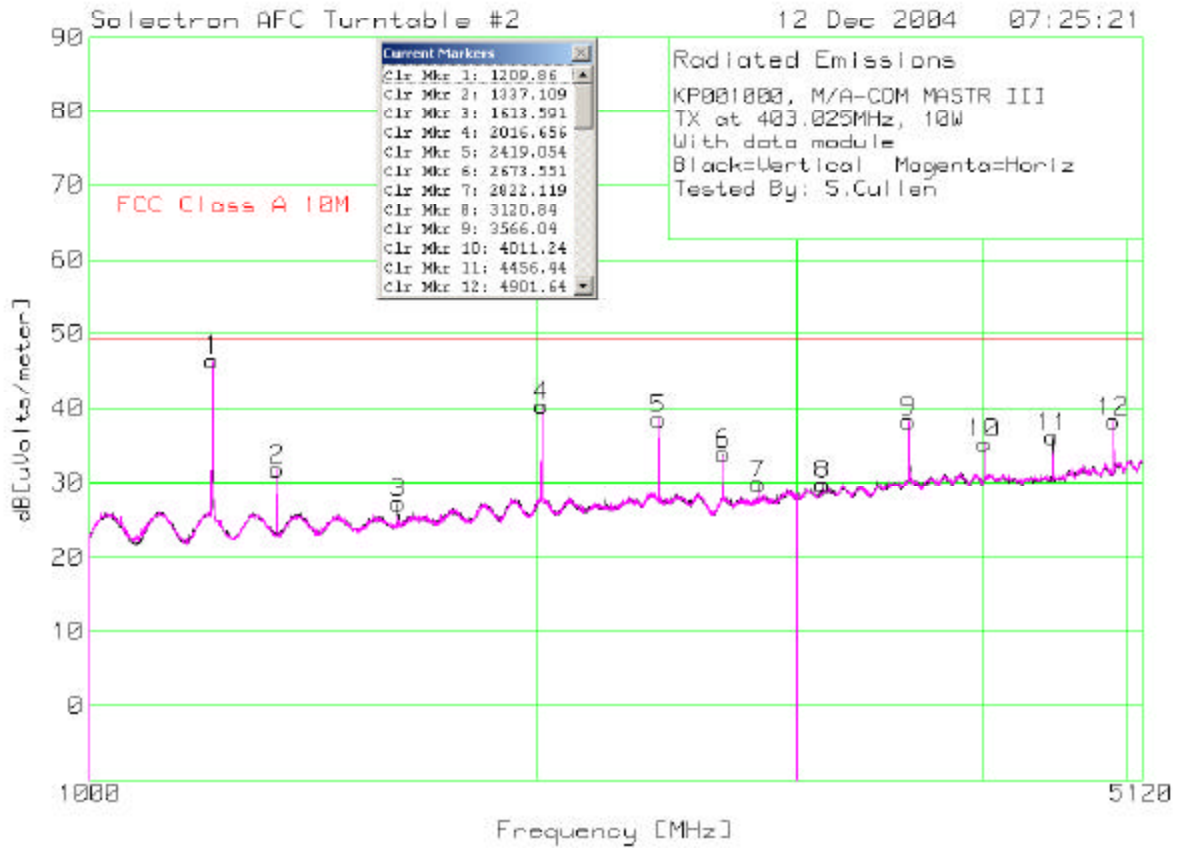


Figure 7-15: Field Strength with 100 W Tx, 30 MHz to 1 GHz (Tx at 449.975 MHz)

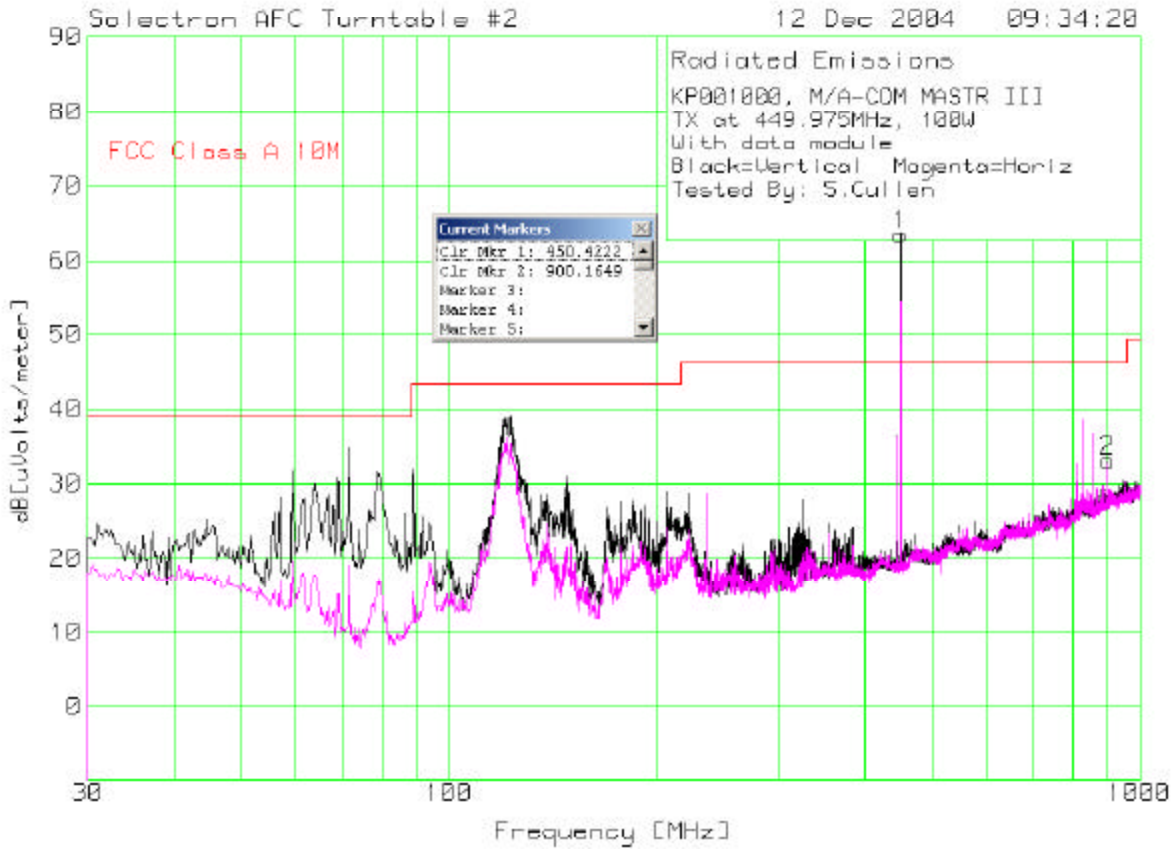

Note: the emissions at 450 MHz is leakage of the transmitted signal.

Figure 7-16: Field Strength with 100 W Tx, 1 GHz to 5.12 GHz, (Tx at 449.975 MHz)



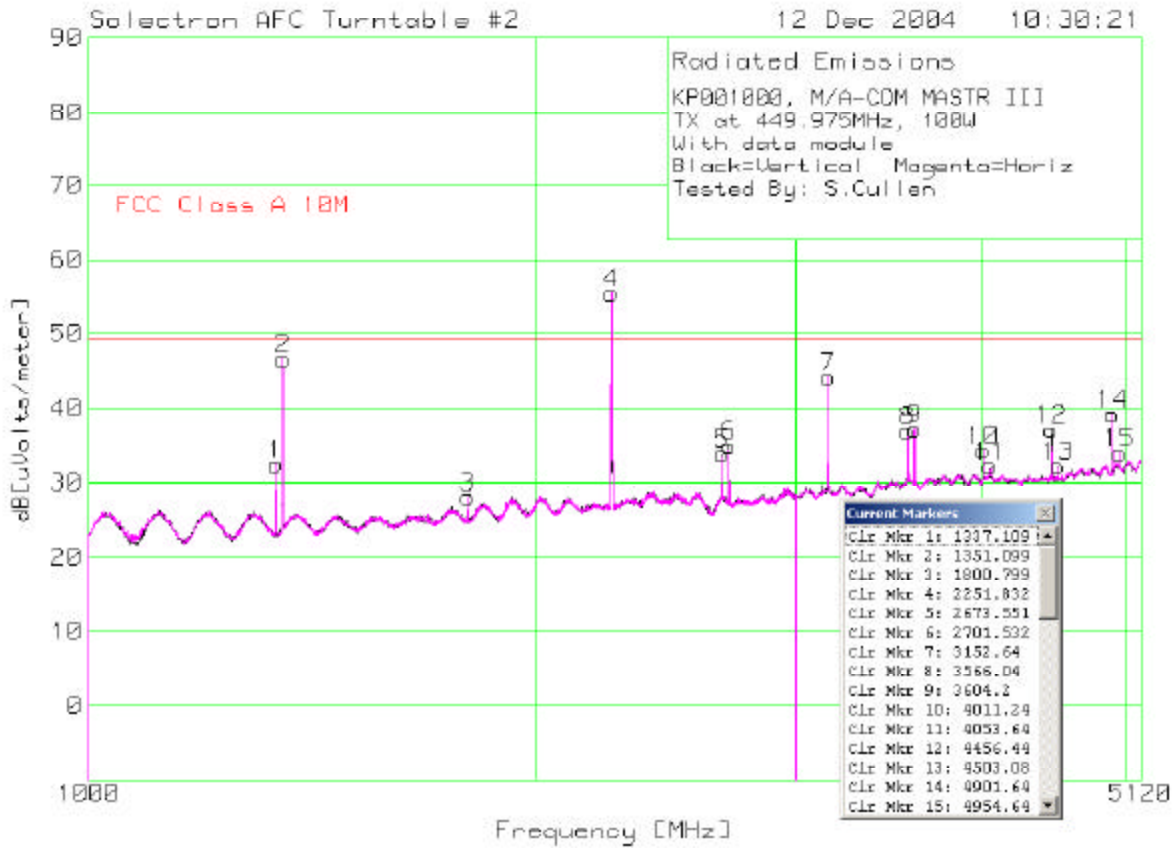


Figure 7-17: Field Strength with 10 W Tx, 30 MHz to 1 GHz (Tx at 449.975 MHz)

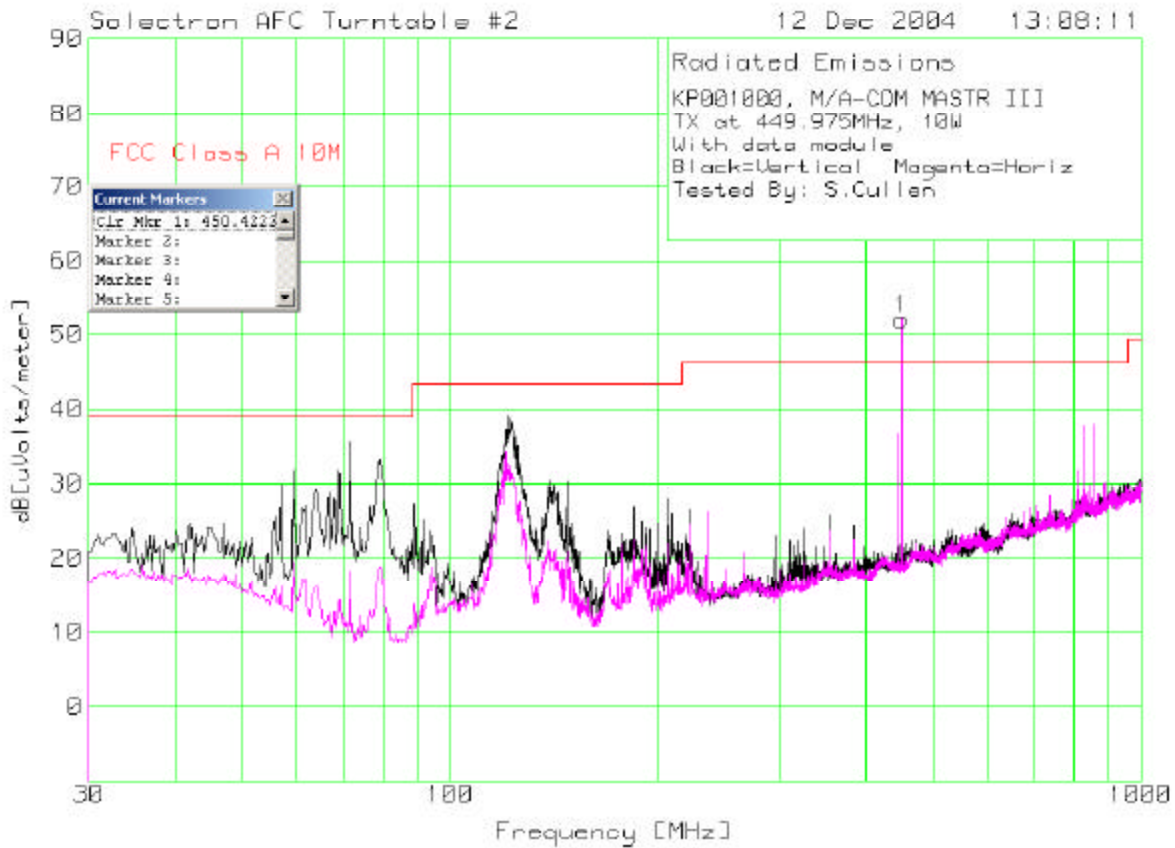

Note: the emissions at 450 MHz is leakage of the transmitted signal.

Figure 7-18: Field Strength with 10 W Tx, 1 GHz to 5.12 GHz, (Tx at 449.975 MHz)

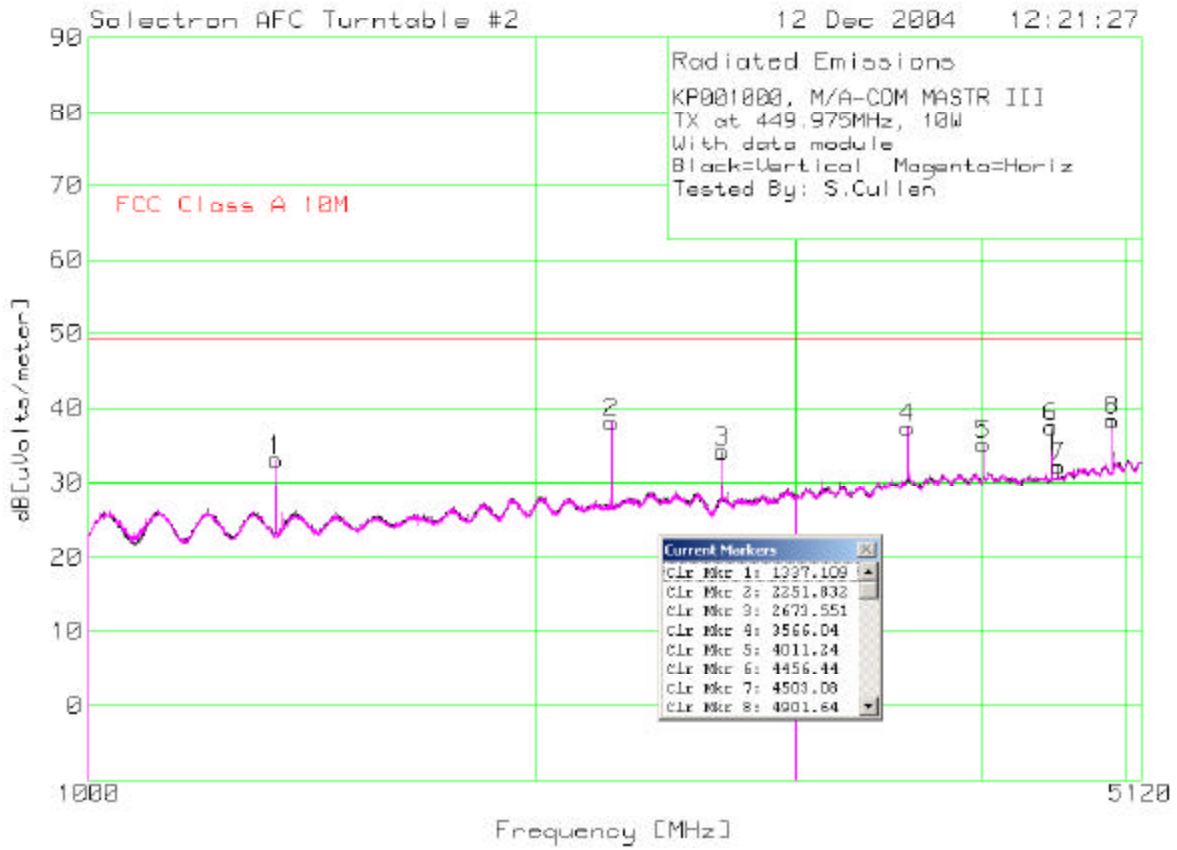

7.6 Appendix F: Transient Frequency Behavior Plots

This appendix presents all the transient frequency behavior plots for the test cases measured.

Figure 7-19 Transient Frequency Behavior, Tx at 425.025 MHz, Wideband, Transmitter on


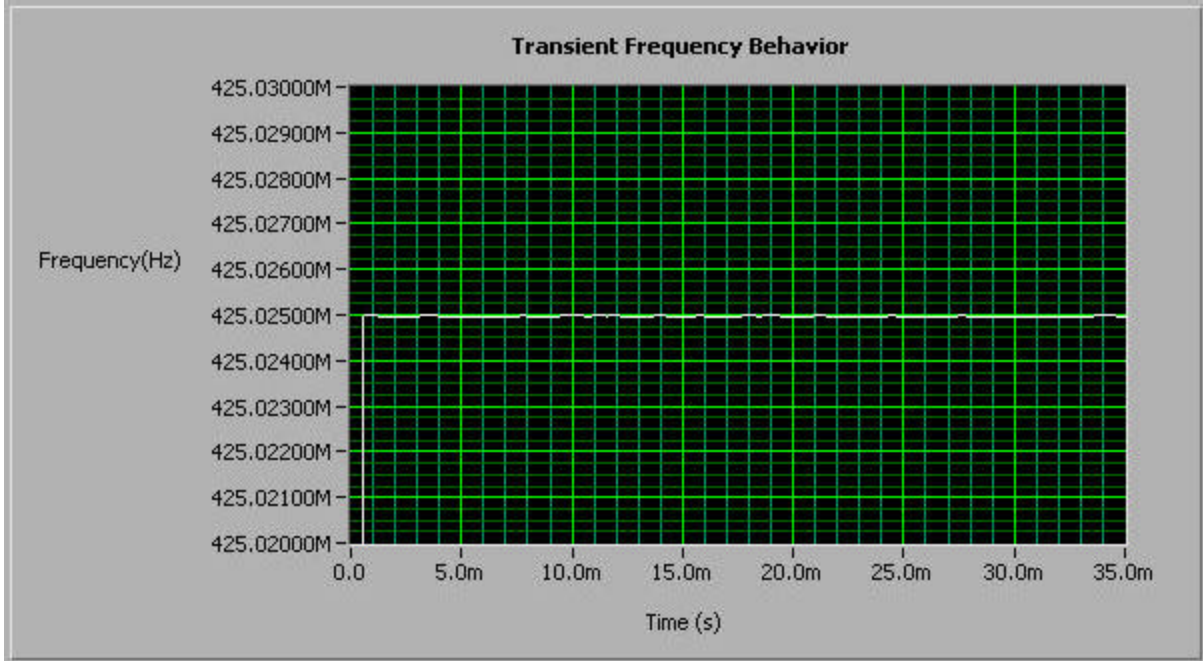


Figure 7-20 Transient Frequency Behavior, Tx at 425.025 MHz, Wideband, Transmitter off

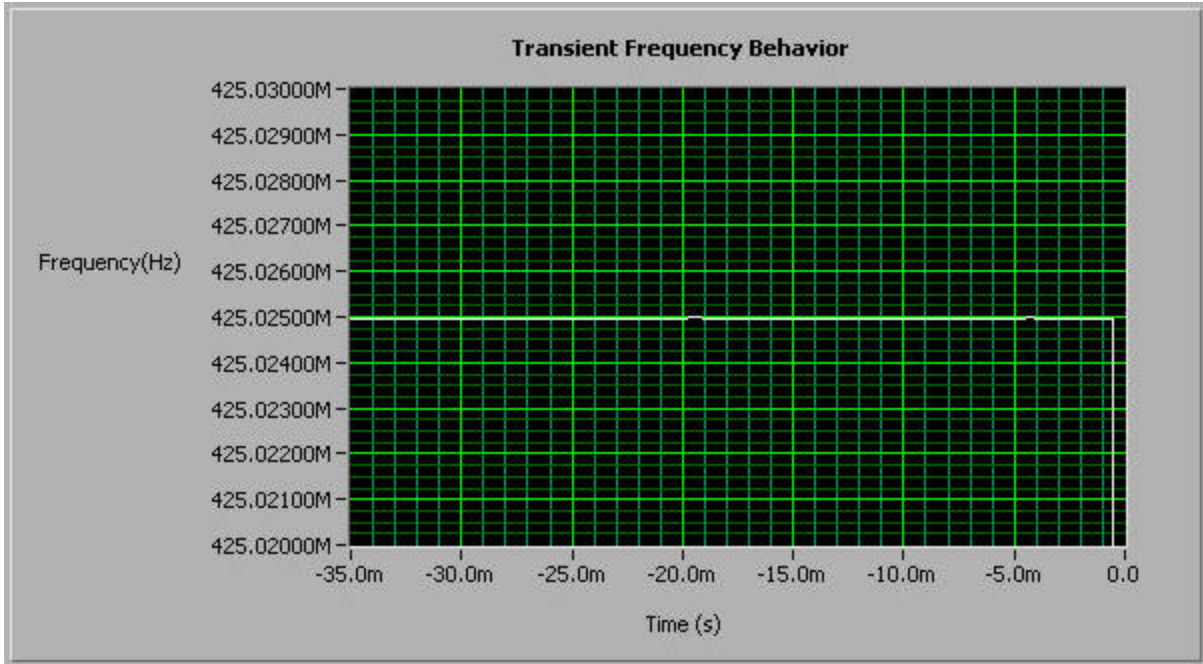

SOLETRON EMS CANADA INC.

Certification Report for M/A-COM MASTRIII UHF Base Station with Data Module FCC Part 90 & RSS-119

© Copyright Solectron EMS Canada Inc. December 22, 2004

The master of this document is stored on an electronic database and is "write-protected" and may be altered only by authorized persons at Solectron EMS Canada Inc. Viewing of the master document electronically ensures access to the current issue. Any hard copies must be regarded as uncontrolled copies.

Solectron EMS Canada Inc. accepts no liability for the content of this document except when it is reproduced in its entirety by a method acceptable to Solectron EMS Canada Inc.
