



Engineering and Testing for EMC and Safety Compliance



Accredited under A2LA Testing Certificate # 2653.01

## FCC & IC Certification Report

**M/A-COM, Inc.**  
221 Jefferson Ridge Parkway  
Lynchburg, VA 24501  
Daryl Popowitch  
Phone: (434) 455-9527

**MODEL: M7300/M5300 Mobile Radio  
700/800 MHz**

**FCC ID: OWDTR-0051-E  
IC: 3636B-0051**

**May 28, 2008**

<b>Standards Referenced for this Report</b>	
Part 2: 2007	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2007	Private Land Mobile Radio Services
TIA-EIA-603-C August 2004	Land Mobile FM or PM Communications Equipment – Measurement and Performance Standards
ANSI/TIA/EIA – 102.CAAA-2002	Digital C4FM/CQPSK Transceiver Measurement Methods
ANSI/TIA/EIA– 102.BAAA–1998	Project 25 FDMA Common Air Interface—New Technology Standards Project—Digital Radio Technical Standards
RSS-119 Issue 9 2007	Land Mobile and Fixed Radio Transmitters and Receivers 27.41 to 960.0 MHz

**Report Prepared By: Richard B. McMurray, P.E.**

Document Number: 2008095

*This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. Test results relate only to the item tested.*

Frequency Range (MHz)	Rated Output Power (W) Conducted	Frequency Tolerance (ppm)	Modulation	Mode	Emission Designator
763-775, 793-805	19	0.4	P25 (digitized data)	T/A, Trunked/Conventional	8K4F1D
763-775, 793-805	19	0.4	P25 (digitized voice)	T/A, Trunked/Conventional	8K4F1E
763-775, 793-805	19	0.4	OTP	Trunked	12K1F9W
763-775, 793-805	19	0.4	Analog FM (12.5 kHz spaced)	T/A, Trunked/Conventional	11K0F3E
806-824	35	1.5	P25 (digitized data)	Trunked/Conventional	8K4F1D
806-824	35	1.5	P25 (digitized voice)	Trunked/Conventional	8K4F1E
851-869	35	1.5	P25 (digitized data)	T/A	8K4F1D
851-869	35	1.5	P25 (digitized voice)	T/A	8K4F1E
806-824	35	1.5	OTP	SMR/NPSPAC Trunked	12K1F9W
806-809	35	1.5	Analog FM (NPSPAC)	Trunked/Conventional	14K0F3E
806-821	35	1.5	Analog FM (SMR)	Trunked/Conventional	16K0F3E
821-824	35	1.5	Analog FM (SMR)	Trunked/Conventional	16K0F3E
821-824	35	1.5	Analog FM (NPSPAC)	Trunked/Conventional	14K0F3E
851-854	35	1.5	Analog FM (NPSPAC)	T/A	14K0F3E
851-869	35	1.5	Analog FM (SMR)	T/A	16K0F3E
866-869	35	1.5	Analog FM (NPSPAC)	T/A	14K0F3E
806-809	35	1.5	2-level (digitized data)	NPSPAC Trunked/Conventional	11K9F1D
806-809	35	1.5	2-level (digitized voice)	NPSPAC Trunked/Conventional	11K9F1E
806-809	35	1.5	2-level (digitized data)	SMR Trunked/Conventional	14K2F1D
806-809	35	1.5	2-level (digitized voice)	SMR Trunked/Conventional	14K2F1E
809-824	35	1.5	2-level (digitized data)	SMR Trunked/Conventional	14K2F1D
809-824	35	1.5	2-level (digitized voice)	SMR Trunked/Conventional	14K2F1E
821-824	35	1.5	2-level (digitized data)	NPSPAC Trunked/Conventional	11K9F1D
821-824	35	1.5	2-level (digitized voice)	NPSPAC Trunked/Conventional	11K9F1E
851-854	35	1.5	2-level (digitized data)	NPSPAC T/A	11K9F1D
851-854	35	1.5	2-level (digitized voice)	NPSPAC T/A	11K9F1E
851-854	35	1.5	2-level (digitized data)	SMR T/A	14K2F1D
851-854	35	1.5	2-level (digitized voice)	SMR T/A	14K2F1E
854-866	35	1.5	2-level (digitized data)	SMR T/A	14K2F1D
854-866	35	1.5	2-level (digitized voice)	SMR T/A	14K2F1E
866-869	35	1.5	2-level (digitized data)	SMR T/A	14K2F1D
866-869	35	1.5	2-level (digitized voice)	SMR T/A	14K2F1E
866-869	35	1.5	2-level (digitized data)	NPSPAC T/A	11K9F1D
866-869	35	1.5	2-level (digitized voice)	NPSPAC T/A	11K9F1E

## Table of Contents

1	Test Result Summary .....	6
2	General Information .....	6
2.1	Test Facility .....	7
2.2	Related Submittal(s)/Grant(s) .....	7
2.3	Grant Notes .....	7
3	Tested System Details .....	7
4	FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage.....	9
5	FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/90.542(a)(6): Transmitting Power Limits, RSS-119 5.4: Transmitter Output Power .....	9
5.1	Test Procedure .....	9
5.2	Test Data .....	9
6	FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.543: Emission Limitations, RSS-119 5.8: Transmitter Unwanted Emissions .....	10
6.1	Test Procedure .....	10
6.2	Test Data .....	10
7	FCC Rules and Regulations Part 90.543(a): Emission Limitations: ACP Requirements .....	13
7.1	Test Procedure .....	13
7.2	Test Data .....	15
8	FCC Rules and Regulations Part 2.1053(a): Field Strength of Spurious Radiation; Part 90 90.543(f): Out of Band Emissions Limit; RSS-119 5.8: Unwanted Emissions .....	18
8.1	Test Procedure .....	18
8.2	Test Data .....	18
8.2.1	CFR 47 Part 90.210 Requirements.....	18
9	FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.543(d): Authorized Bandwidth; RSS-119 5.8: Transmitter Unwanted Emissions.....	21
9.1	Test Procedure .....	21
9.2	Test Data .....	21
10	FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.539: Frequency Stability; RSS-119 5.3: Transmitter Frequency Stability .....	36
10.1	Test Procedure .....	36
10.2	Test Data .....	37
10.2.1	Frequency Stability/Temperature Variation.....	37
10.2.2	Frequency Stability/Voltage Variation .....	38
11	FCC Part 2.1047(a): Modulation Characteristics - Audio Frequency Response.....	39
11.1	Test Procedure .....	39
11.2	Test Data .....	39
12	FCC Part 2.1047(a): Modulation Characteristics – Audio Low Pass Filter.....	41
12.1	Test Procedure .....	41
12.2	Test Data .....	41
13	FCC Rules and Regulations Part 2.1047(b): Modulation Characteristics - Modulation Limiting .....	43
13.1	Test Procedure .....	43
13.2	Test Data .....	43
14	FCC Rules and Regulations Part 2 §2.202: Necessary Bandwidth and Emission Bandwidth.....	48
15	Conclusion .....	49

## Table of Figures

Figure 3-1:	Configuration of Tested System .....	8
-------------	--------------------------------------	---

## Table of Tables

Table 3-1:	Equipment Under Test (EUT) .....	7
Table 5-1:	RF Conducted Output Power - Measured .....	9
Table 5-2:	Test Equipment Used For Testing RF Power Output - Conducted .....	9
Table 6-1:	Test Equipment Used For Testing Spurious Emissions .....	12
Table 7-1:	P25 Mode – 769.00625 MHz - 12.5 kHz Channel Spacing .....	15
Table 7-2:	P25 Mode – 799.00625 MHz - 12.5 kHz Channel Spacing .....	15
Table 7-3:	OTP NB – 769.00625 MHz - 12.5 kHz Channel Spacing .....	16
Table 7-4:	OTP NB – 799.00625 MHz - 12.5 kHz Channel Spacing .....	16
Table 7-5:	Test Equipment Used For Testing ACP Requirements .....	17
Table 8-1:	Field Strength of Spurious Radiation – Analog Mode – 769.00625 MHz .....	18
Table 8-2:	Field Strength of Spurious Radiation in the 1559–1610 MHz Band – FCC 15.543(f) .....	19
Table 8-3:	Test Equipment Used For Testing Field Strength of Spurious Radiation .....	20
Table 9-1:	Test Equipment Used For Testing Occupied Bandwidth .....	35
Table 10-1:	Temperature Frequency Stability – 769.00625 MHz .....	37
Table 10-2:	Temperature Frequency Stability – 816.0125 MHz .....	37
Table 10-3:	Frequency Stability/Voltage Variation – 769.00625 MHz .....	38
Table 10-4:	Frequency Stability/Voltage Variation – 816.0125 MHz .....	38
Table 10-5:	Test Equipment Used For Testing Frequency Stability .....	38
Table 11-1:	Test Equipment Used For Testing Audio Frequency Response .....	40
Table 12-1:	Test Equipment Used For Testing Audio Low Pass Filter Response .....	42
Table 13-1:	Test Equipment Used For Testing Modulation Limiting .....	47

### Table of Plots

Plot 6.1:	769.00625 MHz – P25 RND.....	10
Plot 6.2:	799.00625 MHz – P25 RND.....	11
Plot 6.3:	816.0125 MHz – P25 RND.....	11
Plot 6.4:	860.0125 MHz – P25 RND.....	12
Plot 9.1:	Occupied Bandwidth – 806.0125 MHz; Analog (Mask B).....	21
Plot 9.2:	Occupied Bandwidth – 869.9875 MHz; Analog (Mask B).....	22
Plot 9.3:	Occupied Bandwidth – 764.0065 MHz; Analog (Mask B).....	23
Plot 9.4:	Occupied Bandwidth – 804.99375 MHz; Analog (Mask B).....	24
Plot 9.5:	Occupied Bandwidth – 869.9875 MHz; 9600 WB (Mask G).....	25
Plot 9.6:	Occupied Bandwidth – 869.9875 MHz; P25 (Mask G).....	26
Plot 9.7:	Occupied Bandwidth – 806.0125 MHz; 9600 WB; (Mask H).....	27
Plot 9.8:	Occupied Bandwidth – 806.0125 MHz; P25; (Mask H).....	28
Plot 9.9:	Occupied Bandwidth – 806.0125 MHz; CPM; (Mask H).....	29
Plot 9.10:	Occupied Bandwidth – 869.9875 MHz; CPM; (Mask G).....	30
Plot 9.11:	Occupied Bandwidth – 866.0125 MHz; OTP NPS; (Mask G).....	31
Plot 9.12:	Occupied Bandwidth – 866.0125 MHz; NPSPAC P25; (Mask G).....	32
Plot 9.13:	Occupied Bandwidth – 866.0125 MHz; 9600 NP; (Mask G).....	33
Plot 9.14:	Occupied Bandwidth – 866.0125 MHz; NPSPAC; (Mask B).....	34
Plot 9.15:	Occupied Bandwidth – 866.0125 MHz; NPSPAC CPM; (Mask G).....	35
Plot 11.1:	Modulation Characteristics - Audio Frequency Response.....	39
Plot 12.1:	Modulation Characteristics – Audio Low Pass Filter.....	41
Plot 13.1:	Modulation Characteristics – Modulation Limiting; Positive Peak; Wideband.....	43
Plot 13.2:	Modulation Characteristics – Modulation Limiting; Negative Peak; Wideband.....	44
Plot 13.3:	Modulation Characteristics – Modulation Limiting; Positive Peak; Narrowband.....	45
Plot 13.4:	Modulation Characteristics – Modulation Limiting; Negative Peak; Narrowband.....	46

### Table of Appendixes

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093: RF Exposure.....	50
Appendix B:	Agency Authorization.....	51
Appendix C:	FCC Confidentiality Request Letter.....	52
Appendix D:	AFC Attestation.....	53
Appendix E:	Part 90 Subpart R Application Review.....	54
Appendix F:	Label Information.....	55
Appendix G:	Operational Description.....	58
Appendix H:	Parts List.....	59
Appendix I:	Test / Tune Procedure.....	60
Appendix J:	Schematics.....	61
Appendix K:	Block Diagram.....	62
Appendix L:	Manual.....	63
Appendix M:	Test Configuration Photographs.....	64
Appendix N:	External Photographs.....	66
Appendix O:	Internal Photographs.....	67

### Table of Photographs

Photograph 1:	FCC ID/IC Label Sample & Location.....	55
Photograph 2:	Part 15.19 Label Sample.....	56
Photograph 3:	Part 15.19 Label Location.....	57
Photograph 4:	Radiated Emissions – Front View.....	64
Photograph 5:	Radiated Emissions – Back View.....	65

## 1 Test Result Summary

Test	FCC Reference	IC Reference	Result
RF Power Output	2.1046(a), 90.541(b), 90.542(a)(6)	RSS-119 5.4	Complies
Spurious Emissions at Antenna Terminals	2.1046(a), 90.541(b), 90.542(a)(6)	RSS-119 5.4	Complies
Field strength of spurious radiation	2.1053(a), 90.543(f)	RSS-119 5.5, 5.8	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 90.543(d)	RSS-119 5.5, 5.8	Complies
Adjacent Channel Power	90.543	RSS-119 5.58	Complies
Frequency Stability vs. Temperature and Voltage	2.1055, 90.539	RSS-119 5.3	Complies
Modulation Characteristics	2.1047(a)(b)	N/A	Complies

## 2 General Information

The following Type Certification Report is prepared on behalf of **M/A-COM, Inc.** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **M7300/M5300 Mobile Radio; FCC ID: OWDTR-0051-E, IC: 3636B-0051.**

The radio has two models:

Two products are formed from the 700/800 MHz radio hardware platform. All use the same FCC/IC ID.

700 / 800 MHz mobile radio – M7300

800 MHz mobile radio – M5300

The M5300 is a variant of the M7300, with 800 MHz operation only configured for customer use. The hardware is exactly the same as the M7300; the 700 MHz operation is disabled via firmware.

There is also a DeskTop station version of the product. The DeskTop station is a mobile radio mounted inside of an enclosure suitable for a desktop office environment.

The radio can be used with a GPS, remote and front mount control heads, and is subject to FCC DoC. The control heads come in two versions: a scan and system version. The system version provides more functionality than the scan version through additional buttons. Other than the buttons, both control heads are electrically identical. The system control head was used for testing. DoC testing was performed for the aforementioned accessories and the data is contained in a separate DoC report.

The M7300 version of the product was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47 Parts 2 and 90, and Industry Canada RSS-119. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

## 2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

## 2.2 Related Submittal(s)/Grant(s)

N/A

## 2.3 Grant Notes

Power is continuously variable from:

700 MHz band: 1.5 - 19 W

800 MHz band: 5 – 35 W.


The DeskTop station version of the product considers antenna selection and co-location at the time of site licensing.

## 3 Tested System Details

The test sample was received on April 30, 2008. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable. The device was programmed for multiple modes of operation and modulation types.

**Table 3-1: Equipment Under Test (EUT)**

Part	Manufacturer	Model	PN	FCC ID	RTL Bar Code
700 / 800 MHz Mobile Radio (remote mount)	M/A-COM, Inc.	M7300	ET28LL20U	OWDTR-0051-E	18481
Remote Mount Control Head	M/A-COM, Inc.	CH721	CU23218-0004	N/A	18456
700 / 800 MHz Mobile Radio	M/A-COM, Inc	M7300	EMS2E	OWDTR-0051-E	18455

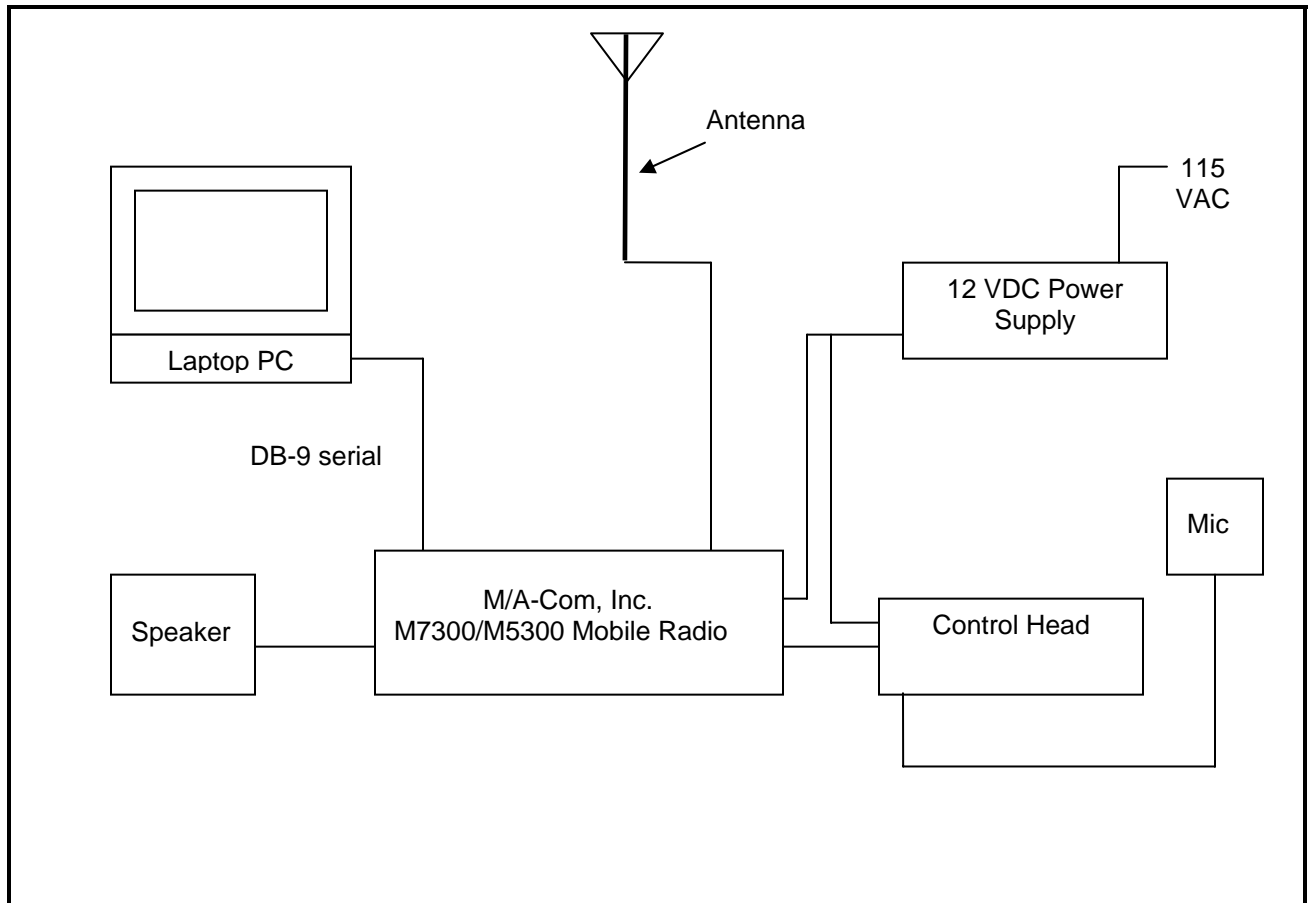

**Figure 3-1: Configuration of Tested System**



#### 4 FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage

700 MHz band: 13.28 V / 7.0 A  
 800 MHz band: 13.28 V / 8.5 A

#### 5 FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.541(b)/90.542(a)(6): Transmitting Power Limits, RSS-119 5.4: Transmitter Output Power

##### 5.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50  $\Omega$  load impedance.

##### Manufacturer's rated power:

700 MHz band: Conducted power is continuously variable from 1.5 to 19 W  
 800 MHz band: Conducted power is continuously variable from 5 W to 35 W

##### 5.2 Test Data

**Table 5-1: RF Conducted Output Power - Measured**

Frequency (MHz)	High Power (dBm)	High Power (W)	Low Power (dBm)	Low Power (W)
769.00625	42.6	18.3	32.2	1.7
799.00625	42.7	18.6	32.4	1.7
804.99375	42.7	18.8	32.4	1.7
816.0125	45.8	38.0	37.4	5.5
860.0125	44.9	30.9	37.5	5.6

##### Notes:


- Data presented is for "P25 RND" mode (P25 protocol using or random data). All other modes were investigated and found to have equivalent power within measurement tolerances.
- Firmware power setting of 177 for 700 MHz band, 350 for 800 MHz band

**Table 5-2: Test Equipment Used For Testing RF Power Output - Conducted**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	10/24/08
901356	Agilent Technologies	E9323A	Power Sensor	31764-264	10/24/08

##### Test Personnel:

Richard B. McMurray, P.E.  
 EMC Test Engineer

  
 Signature

May 21, 2008  
 Date Of Test

## 6 FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.543: Emission Limitations, RSS-119 5.8: Transmitter Unwanted Emissions

### 6.1 Test Procedure

ANSI/TIA/EIA-603-2002, Section 2.2.13

The transmitter is terminated with a 50  $\Omega$  load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 modes.

### 6.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc


Limits: (43 + 10 LOG P(W))

The following channels (in MHz) were investigated:


769.00625, 799.00625, 816.0125 and 860.0125

Both high and low power settings were checked; high power was found to be worst case. All modes were investigated and P25 RND is presented as representative data.


**Plot 6.1: 769.00625 MHz – P25 RND**

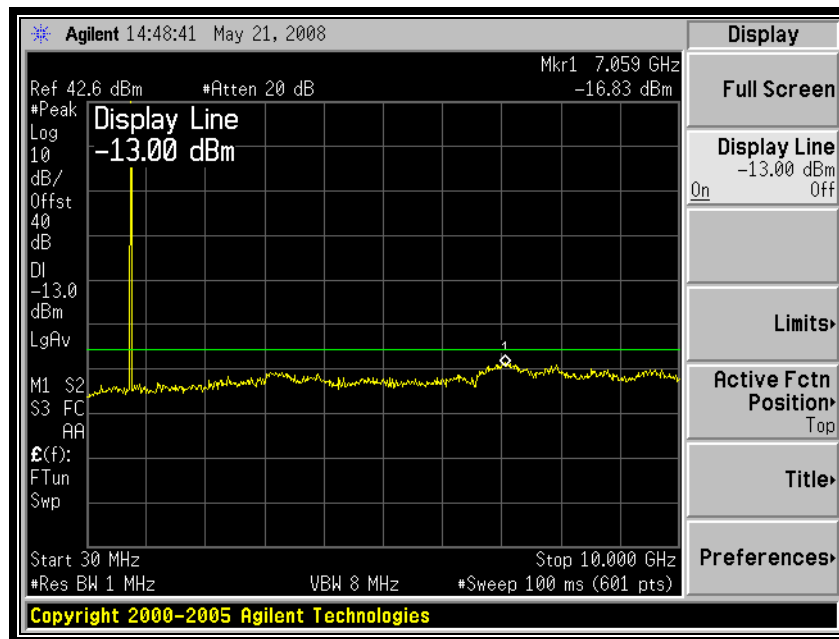


**Plot 6.2: 799.00625 MHz – P25 RND**

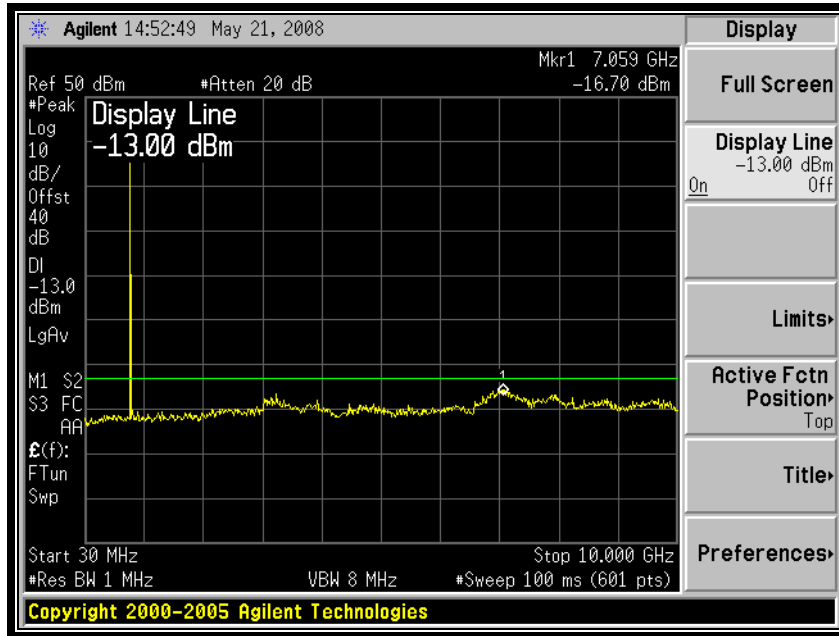

**Plot 6.3: 816.0125 MHz – P25 RND**

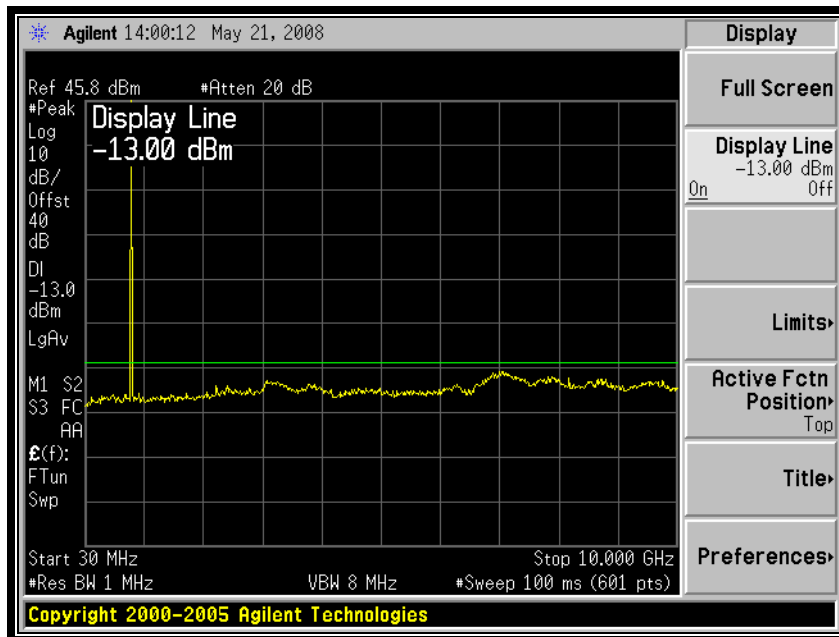

**Plot 6.4: 860.0125 MHz – P25 RND**

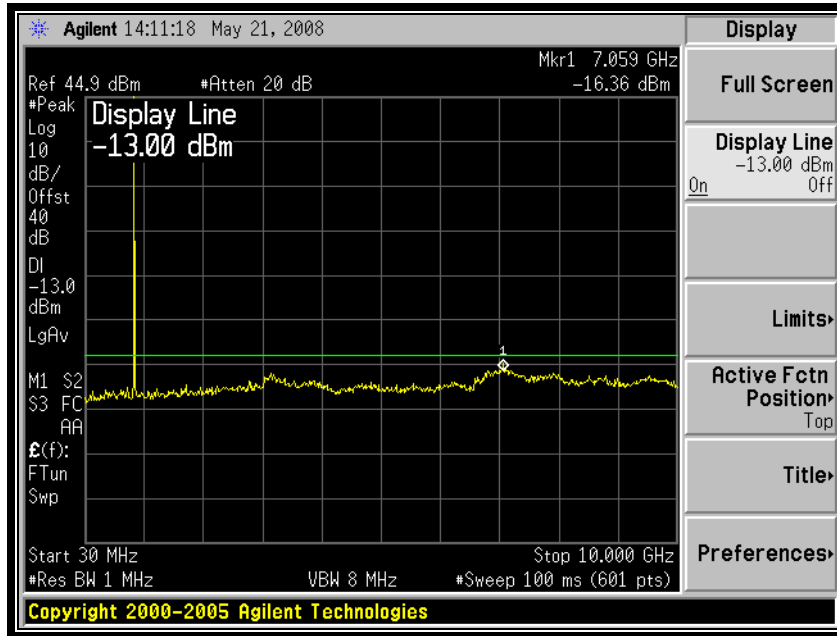

**Table 6-1: Test Equipment Used For Testing Spurious Emissions**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	6/14/2008

**Test Personnel:**

Richard B. McMurray, P.E.  
 EMC Test Engineer

*Richard B. McMurray*  
 Signature

May 21, 2008  
 Date Of Test

## 7 FCC Rules and Regulations Part 90.543(a): Emission Limitations: ACP Requirements

Effective October 23, 2007, transmitters designed to operate in 769–775 MHz and 799–805 MHz frequency bands must meet the emission limitations in paragraphs (a) through (d) of this section. Transmitters operating in 763–768 MHz and 793–798 MHz bands must meet the emission limitations in (e) of this section.

### 7.1 Test Procedure

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 modes.

For a mobile transmitter designed to operate with a 12.5 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)9.375	6.25	-40
(+/-)15.625	6.25	-60
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

For a mobile transmitter designed to operate with a 25 kHz channel bandwidth, the ACP shall be in accordance with the values in the following table:

Offset from Center Frequency (kHz)	Measurement Bandwidth (kHz)	Maximum ACP Relative (dBc)
(+/-)15.625	6.25	-40
(+/-)21.875	6.25	-60
(+/-)37.5	25	-60
(+/-)62.5	25	-65
(+/-)87.5	25	-65
(+/-)150	100	-65
(+/-)250	100	-65
(+/-)350	100	-65
>400 kHz to 12 MHz	30(s)	-75
12 MHz to paired receive band	30(s)	-75
In the paired receive band	30(s)	-100

## **FCC Rules and Regulations Part 90 §90.543(b)**

Setting Reference Level - Part 90 §90.543(b)(1): Using a spectrum analyzer capable of ACP measurements, set the measurement bandwidth to the channel size. Set the frequency offset of the measurement to zero and adjust the center frequency of the spectrum analyzer to give the power level in the measurement bandwidth. Record this power as the reference power level.

Measuring the power level at the frequency offset < 600 kHz - Part 90 §90.543(b)(2): Using a spectrum analyzer capable of ACP measurements, set the measurement bandwidth as shown in table. Measure ACP in dBm. These measurements were made at maximum power. Calculate the coupled power by subtracting the measurements made in this step from the reference power level. The absolute ACCP values must be less than the values given in the table for each condition.

Measuring the power level at the frequency offset >600 kHz - Part 90 §90.543(b)(3): Set the spectrum analyzer to 30 kHz resolution bandwidth, 1 MHz video bandwidth and sample detection mode. Sweep +/-6 MHz from the carrier frequency. Set the reference level to the RMS value of the transmitter power and note the power. The response at frequencies >600 kHz must be less than the values listed in the table.

## 7.2 Test Data

**Table 7-1: P25 Mode – 769.00625 MHz - 12.5 kHz Channel Spacing**

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP Low Offset (dBc)	Max ACP High Offset (dBc)
(+/-)9.375	6.25	-40	-42.4	-48.9
(+/-)15.625	6.25	-60	-71.1	-69.0
(+/-)21.875	6.25	-60	-72.5	-72.5
(+/-)37.5	25	-60	-71.1	-71.5
(+/-)62.5	25	-65	-76.5	-75.7
(+/-)87.5	25	-65	-80.0	-78.9
(+/-)150	100	-65	-77.4	-77.8
(+/-)250	100	-65	-78.5	-79.6
(+/-)350	100	-65	-83.4	-83.0

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-75.3
12 MHz to receive band	30(s)	-75	-79.9
In receive band	30(s)	-100	< -100

**Table 7-2: P25 Mode – 799.00625 MHz - 12.5 kHz Channel Spacing**

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP Low Offset (dBc)	Max ACP High Offset (dBc)
(+/-)9.375	6.25	-40	-42.0	-48.0
(+/-)15.625	6.25	-60	-72.7	-72.5
(+/-)21.875	6.25	-60	-72.3	-73.4
(+/-)37.5	25	-60	-72.1	-72.6
(+/-)62.5	25	-65	-76.8	-77.8
(+/-)87.5	25	-65	-80.2	-81.4
(+/-)150	100	-65	-79.2	-79.0
(+/-)250	100	-65	-80.0	-79.6
(+/-)350	100	-65	-84.1	-84.3

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-79.0
12 MHz to receive band	30(s)	-75	-76.9
In receive band	30(s)	-100	< -100

**Table 7-3: OTP NB – 769.00625 MHz - 12.5 kHz Channel Spacing**

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP Low Offset (dBc)	Max ACP High Offset (dBc)
(+/-)9.375	6.25	-40	-48.8	-46.0
(+/-)15.625	6.25	-60	-71.5	-70.2
(+/-)21.875	6.25	-60	-74.8	-74.1
(+/-)37.5	25	-60	-72.7	-72.7
(+/-)62.5	25	-65	-77.1	-76.9
(+/-)87.5	25	-65	-80.7	-80.3
(+/-)150	100	-65	-77.1	-76.4
(+/-)250	100	-65	-78.9	-79.1
(+/-)350	100	-65	-83.3	-82.9

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-76.6
12 MHz to receive band	30(s)	-75	-77.3
In receive band	30(s)	-100	< -100

**Table 7-4: OTP NB – 799.00625 MHz - 12.5 kHz Channel Spacing**

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP Low Offset (dBc)	Max ACP High Offset (dBc)
(+/-)9.375	6.25	-40	-41.8	-42.7
(+/-)15.625	6.25	-60	-71.4	-70.7
(+/-)21.875	6.25	-60	-72.7	-72.8
(+/-)37.5	25	-60	-72.5	-71.5
(+/-)62.5	25	-65	-76.9	-77.0
(+/-)87.5	25	-65	-79.9	-80.8
(+/-)150	100	-65	-77.3	-77.9
(+/-)250	100	-65	-78.8	-77.1
(+/-)350	100	-65	-83.8	-84.1

Offset from Center Frequency (kHz)	Measurement BW (kHz)	Max ACP (dBc)	Max ACP (dBc)
>400 to 12 MHz	30(s)	-75	-78.5
12 MHz to receive band	30(s)	-75	-76.7
In receive band	30(s)	-100	< -100




**Table 7-5: Test Equipment Used For Testing ACP Requirements**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	6/14/2008

**Test Personnel:**

---

Richard B. McMurray, P.E. EMC Test Engineer	 Signature	May 21-23, 2008 Dates Of Test
--	--	----------------------------------

## 8 FCC Rules and Regulations Part 2.1053(a): Field Strength of Spurious Radiation; Part 90 90.543(f): Out of Band Emissions Limit; RSS-119 5.8: Unwanted Emissions

### 8.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.12

Analog Modulation: The transmitter is terminated with a 50  $\Omega$  load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz. Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 and EDACS modes.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna was further corrected to a half wave dipole.

For emissions in the 1559-1610 band, Part 15.543(f) states: “For operations in the 763–775 MHz and 793–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.”

### 8.2 Test Data

#### 8.2.1 CFR 47 Part 90.210 Requirements

The worst-case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

**Both high and low power settings were checked; high power was reported as worst case. The following is presented as the worst case channel with only 6,152.054 MHz having an emission within a 20 dB margin of the limit; no other emissions for any other channels investigated were found to have emissions within this 20 dB margin.**

**Table 8-1: Field Strength of Spurious Radiation – Analog Mode – 769.00625 MHz**

Conducted Power = 42.6 dBm = 18.3 W - Limit = 43 + 10 Log P = 55.6 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
1538.014	58.3	-42.8	6.6	5.0	87.0	-31.4
2307.02	43.9	-58.4	8.0	6.7	102.3	-46.7
3076.027	52.8	-45.3	9.1	7.5	89.5	-33.9
3845.034	52.2	-42.5	9.7	7.4	87.4	-31.8
4614.041	51.0	-39.8	11.0	8.4	85.0	-29.4
5383.048	35.5	-54.6	11.4	8.3	100.3	-44.7
6152.054	59.2	-27.2	11.7	9.0	72.5	-16.9
6921.061	43.2	-44.3	11.1	9.6	88.4	-32.8
7690.068	40.4	-49.8	11.3	8.8	94.9	-39.3

\*This insertion loss corresponds to the cable connecting the RF Signal Generator to the 1/2-wave dipole antenna.


**Table 8-2: Field Strength of Spurious Radiation in the 1559–1610 MHz Band – FCC 15.543(f)**

Fundamental/ Harmonic (MHz)	Spectrum Analyzer Level - Horizontal Polarity	Spectrum Analyzer Level - Vertical Polarity	Signal Generator Level - Horizontal Substitution (dBm)	Signal Generator Level - Vertical Substitution (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator (worst case) (dBW/MHz)	Limit (dBW/MHz)	Margin (dB)
794.000									
1588.000	-7.0	-6.8	-51.4	-51.1	6.7	5.2	-82.6	-80.0	-2.6
796.007									
1592.013	-9.2	-9.2	-53.6	-56.4	6.0	5.2	-87.2	-80.0	-7.2
799.007									
1598.014	-6.8	-5.6	-52.9	-51.0	6.2	5.2	-82.0	-80.0	-2.0
801.407									
1602.813	-8.2	-7.3	-52.9	-53.6	7.1	5.4	-84.6	-80.0	-4.6
803.007									
1606.014	-8.0	-7.2	-51.5	-52.1	7.3	5.2	-83.6	-80.0	-3.6
804.994									
1609.989	-10.0	-7.6	-56.6	-52.3	7.4	5.2	-84.5	-80.0	-4.5

**Table 8-3: Test Equipment Used For Testing Field Strength of Spurious Radiation**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901053	Schaffner-Chase	CBL6112	Antenna (25 MHz – 2 GHz)	2648	12/20/08
901365	MITEQ	JS4-00102600-41-5P	Amplifier, 0.1-26 GHz, 30dB gain	N/A	10/8/08
901215	Hewlett Packard	8596EM	Portable Spectrum Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/17/08
900928	Hewlett Packard	HP 83752A	Synthesized Sweeper (.01 - 20 GHz)	3610A00866	12/7/08
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	6/14/10
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	6/14/10
900323	EMCO	3160-07	Horn Antenna (8.2 - 12.4 GHz)	9605-1054	6/14/10
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	10/5/08
901425	Insulated Wire, Inc.	KPS-1503-2400-KPS	RF cable, 20'	NA	10/5/08
901426	Insulated Wire Inc.	KPS-1503-3600-KPS	RF cable, 30'	NA	10/5/08
901132	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	2/1/09
900816	Weinschel Corp.	2	3 dB Attenuator; 5 W	BG1273	12/2/08
901375	Weinschel Corp	2	6 dB Attenuator; 5 W	AP5914	12/2/08
901358	Aeroflex/Weinschel	47-3-34	Attenuator, 3 dB0. (1 - 18 GHz)	BS0146	12/17/08
900819	Weinschel Corp	2	10 dB Attenuator; 5 W	BF0830	12/2/08

**Test Personnel:**

Daniel Baltzell Test Technician/Engineer	 Signature	May 26, 2008 Date Of Test
---	---	------------------------------

## 9 FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.543(d): Authorized Bandwidth; RSS-119 5.8: Transmitter Unwanted Emissions

Occupied Bandwidth - Compliance with the Emission Masks


### 9.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.11 and TIA/EIA-102.CAAA-2002 section 2.2.5


Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 and EDACS modes.

### 9.2 Test Data


Plot 9.1: Occupied Bandwidth – 806.0125 MHz; Analog (Mask B)

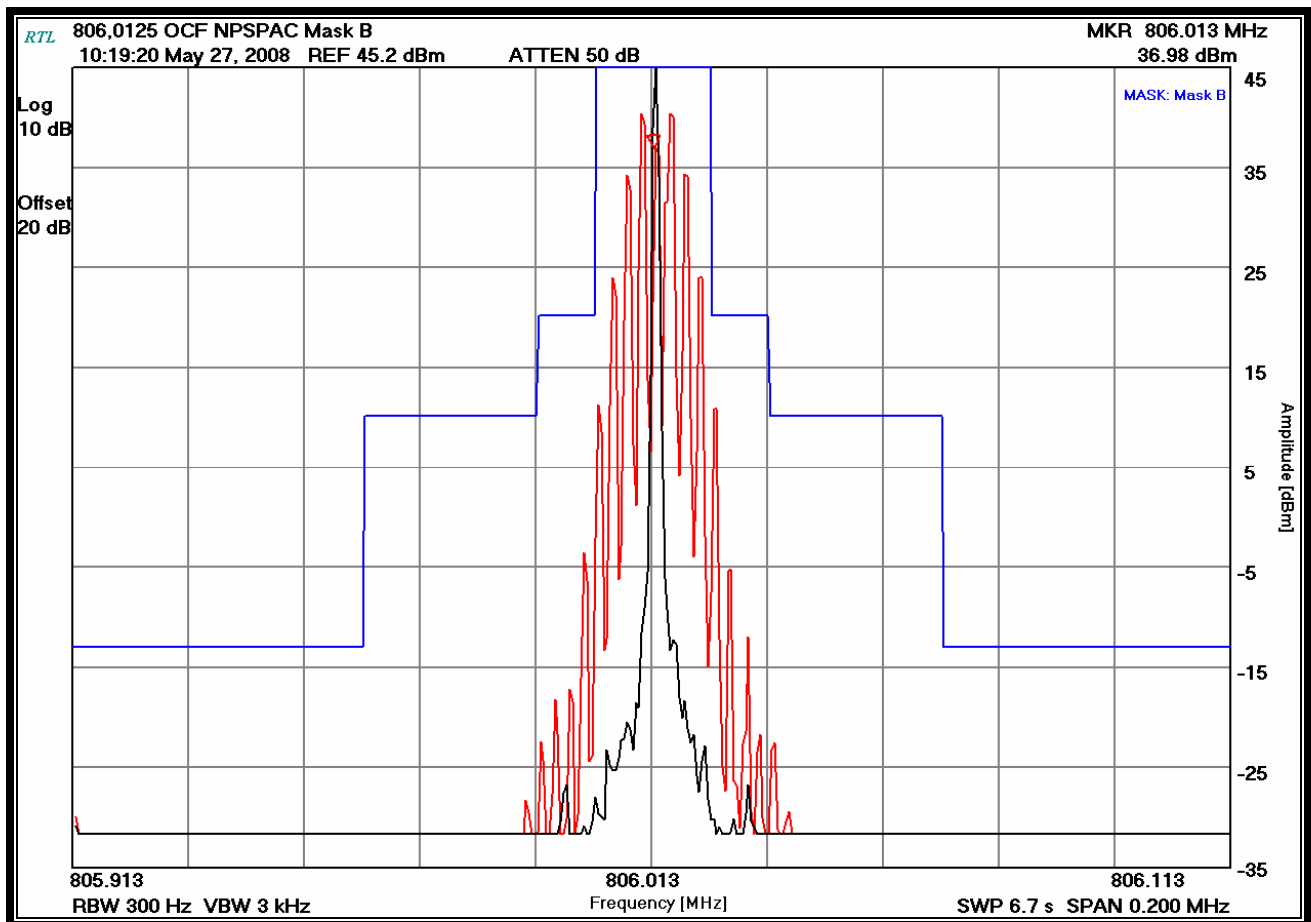


**Plot 9.2: Occupied Bandwidth – 869.9875 MHz; Analog (Mask B)**

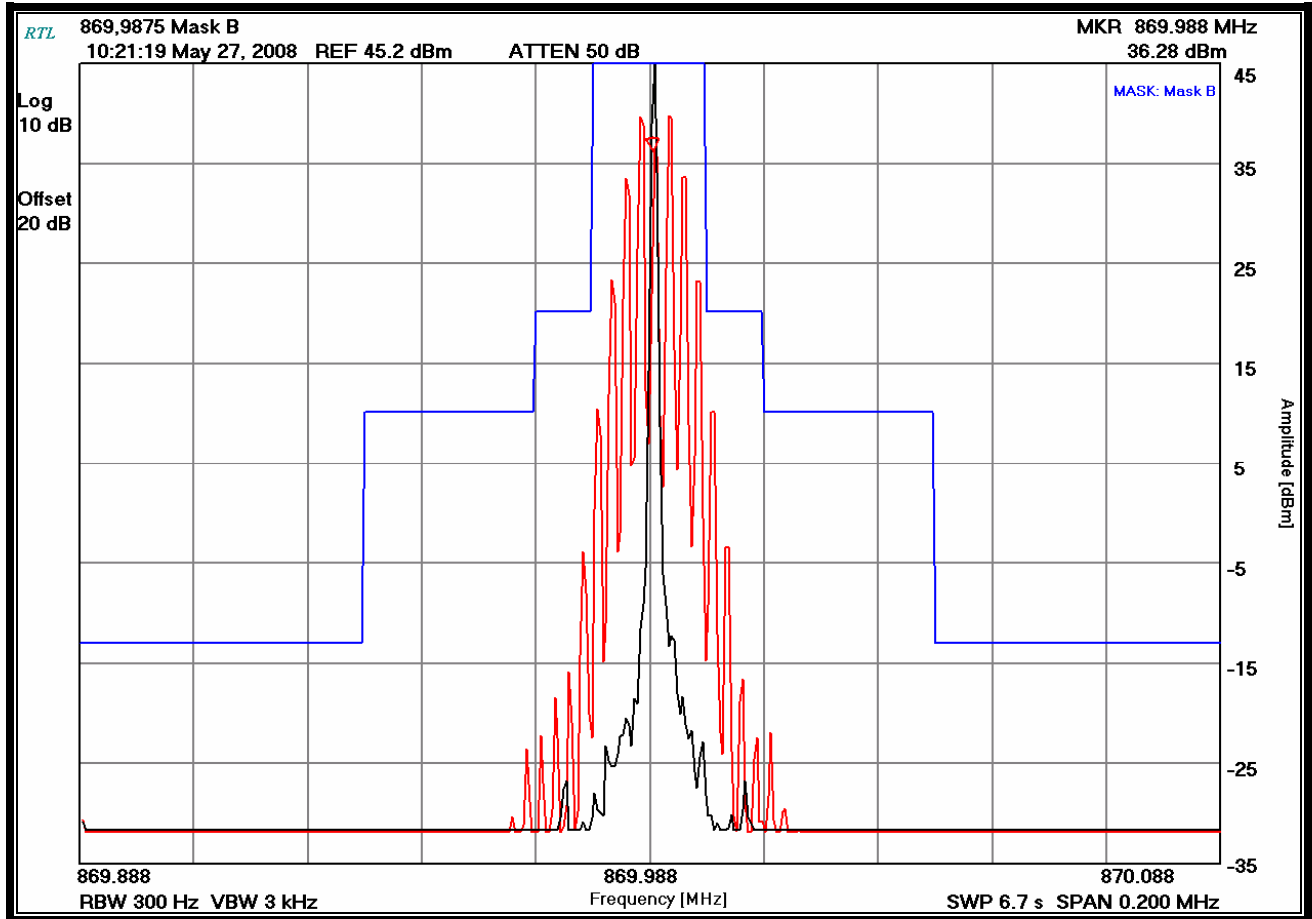

**Plot 9.3: Occupied Bandwidth – 764.0065 MHz; Analog (Mask B)**

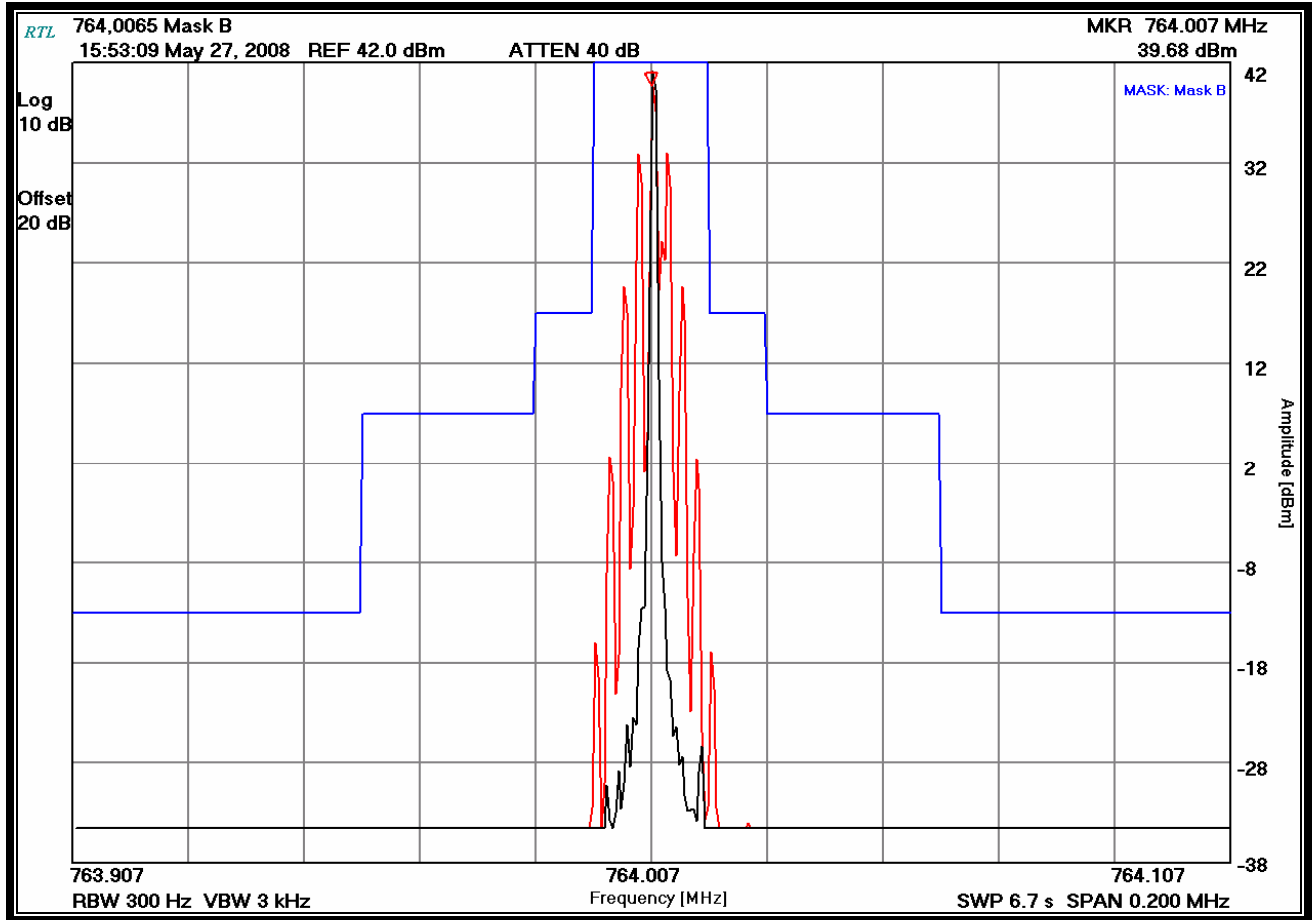


**Plot 9.4: Occupied Bandwidth – 804.99375 MHz; Analog (Mask B)**

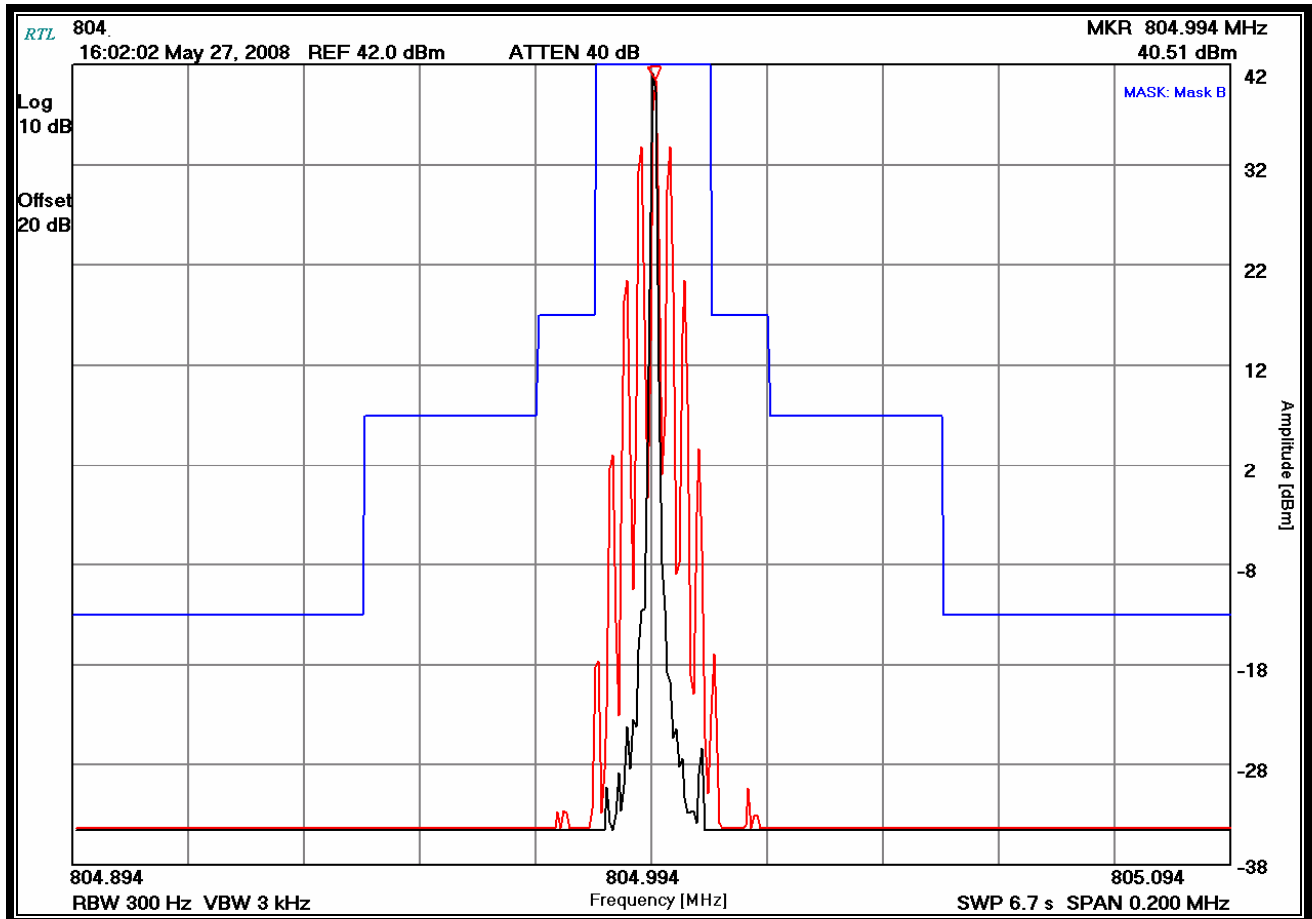





**Plot 9.5: Occupied Bandwidth – 869.9875 MHz; 9600 WB (Mask G)**

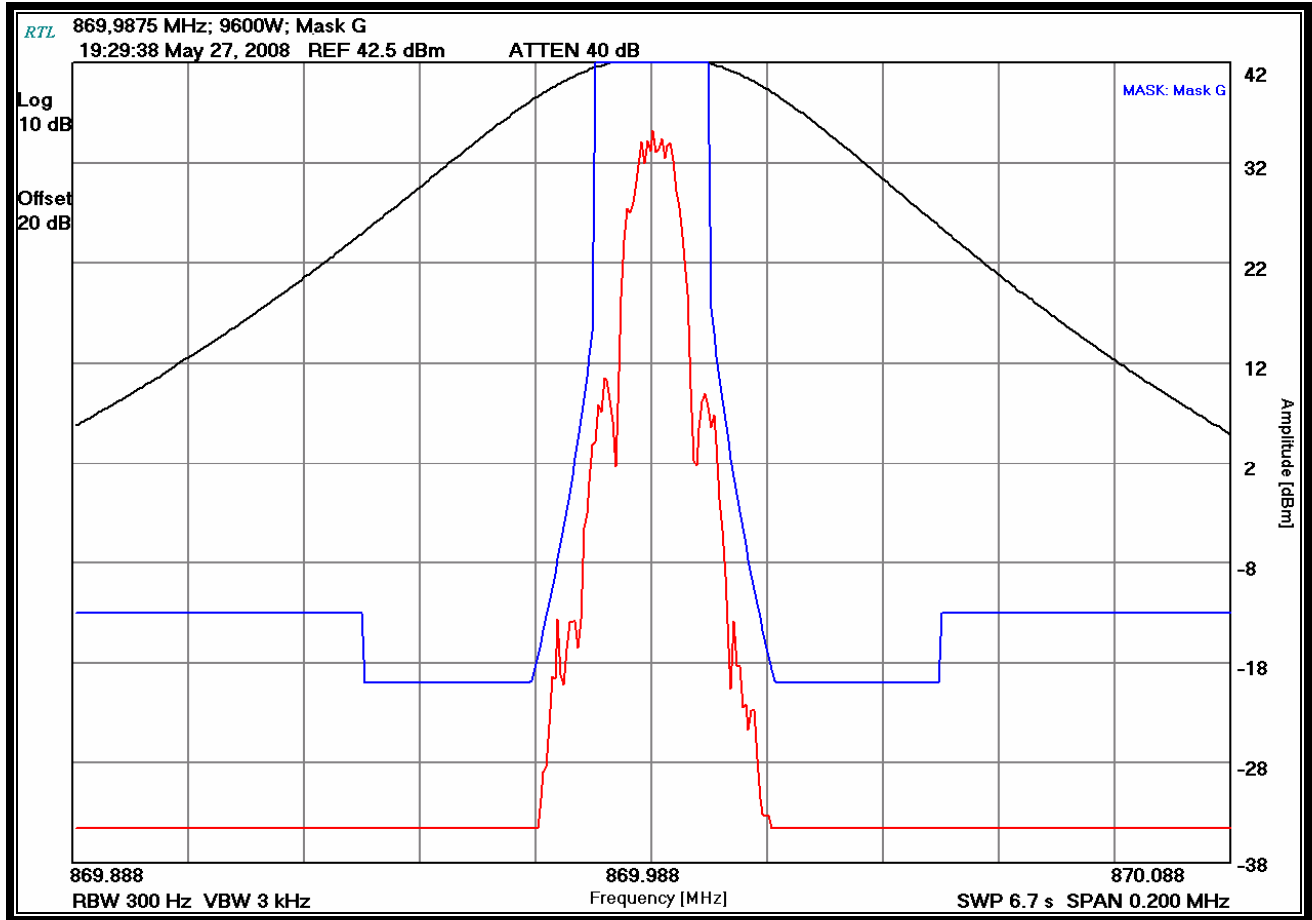


**Plot 9.6: Occupied Bandwidth – 869.9875 MHz; P25 (Mask G)**

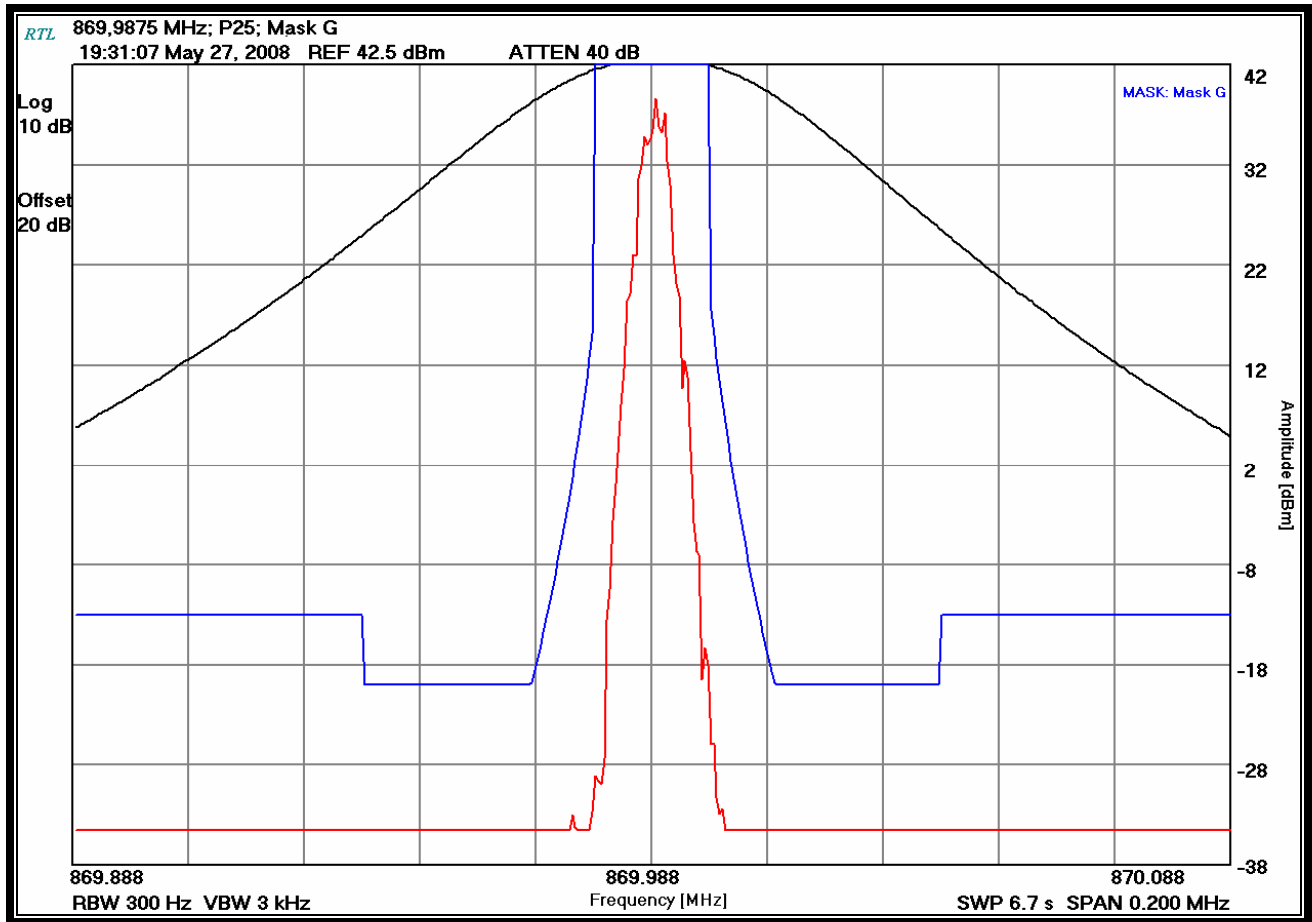


**Plot 9.7: Occupied Bandwidth – 806.0125 MHz; 9600 WB; (Mask H)**

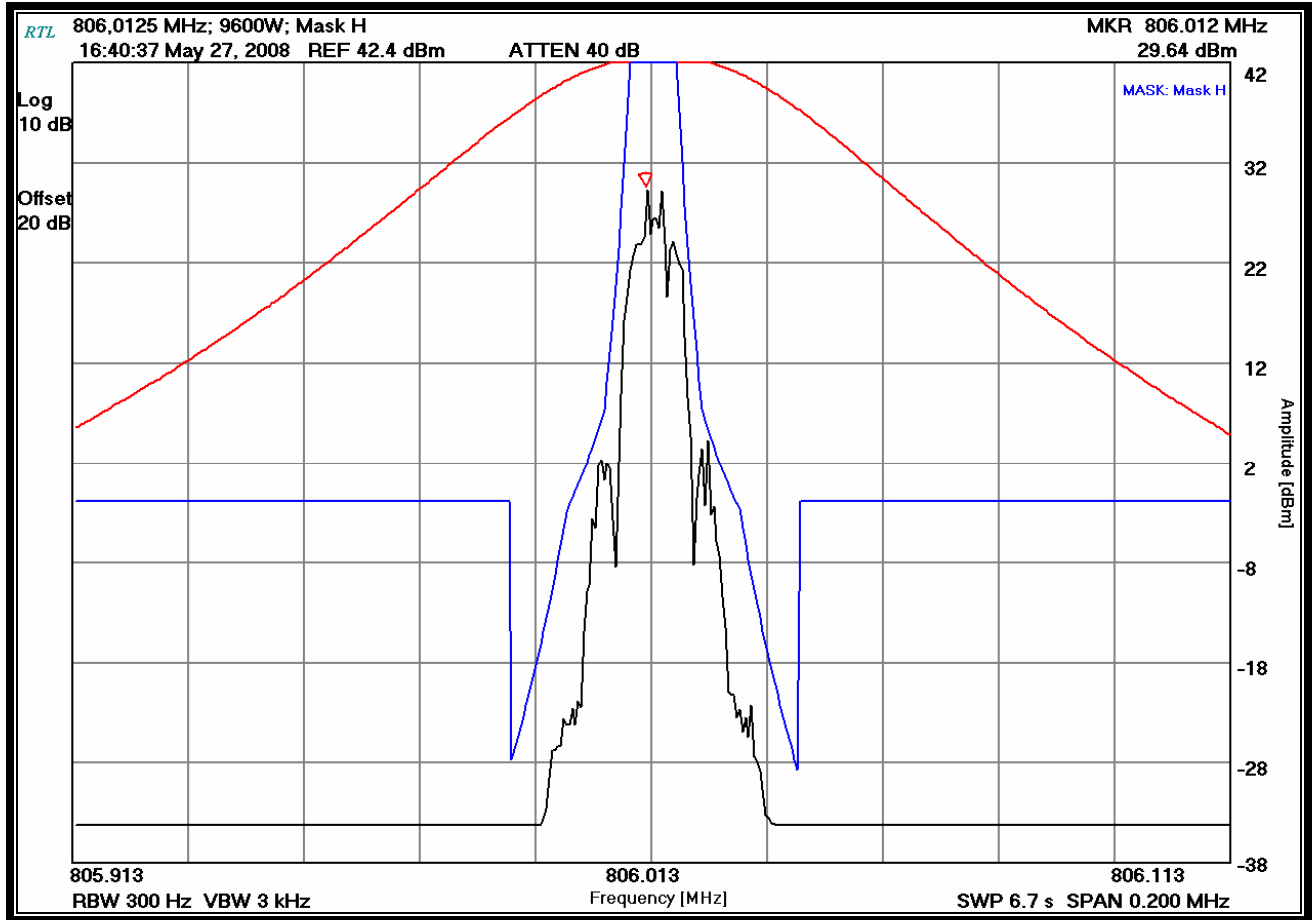


**Plot 9.8: Occupied Bandwidth – 806.0125 MHz; P25; (Mask H)**

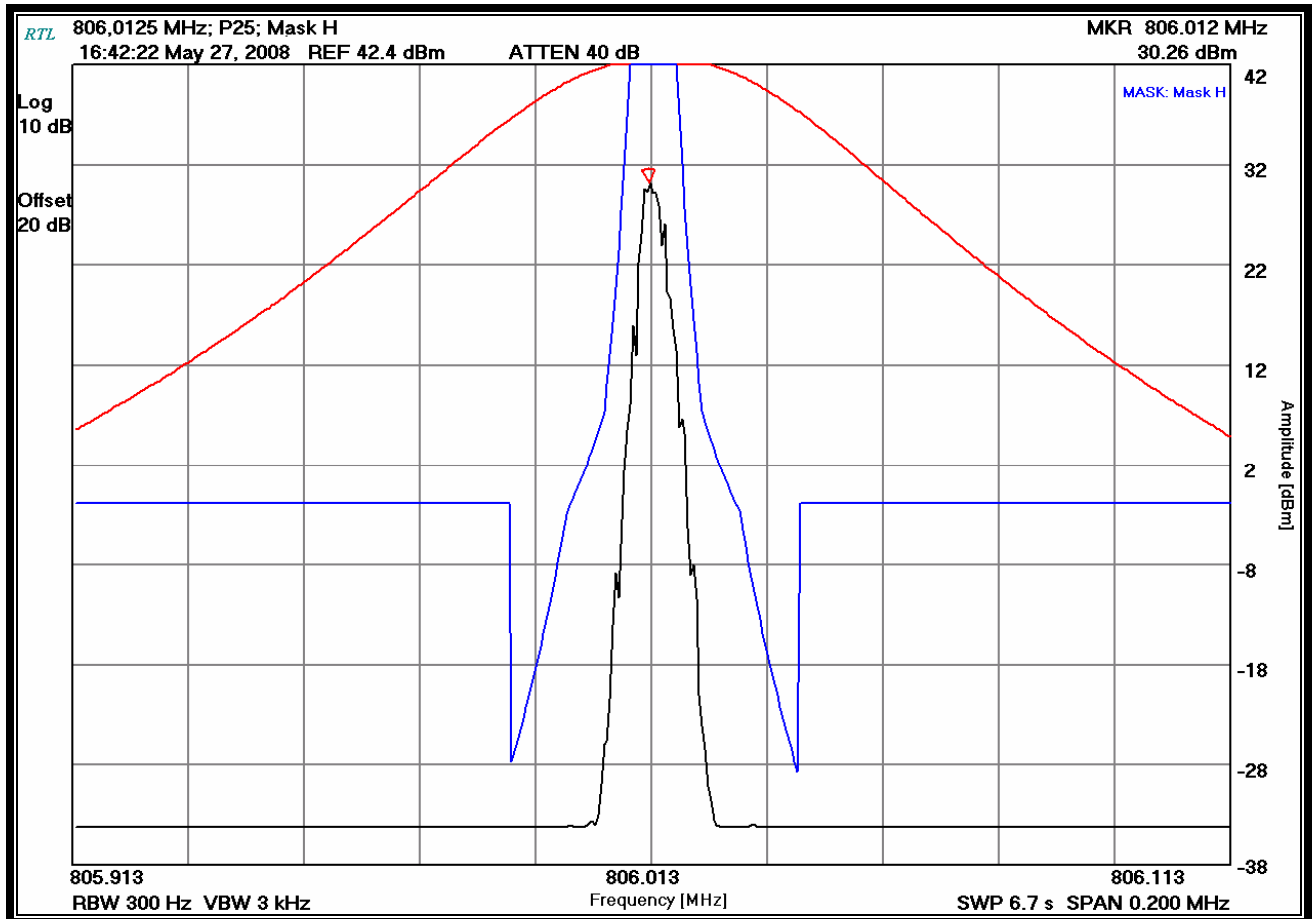


**Plot 9.9: Occupied Bandwidth – 806.0125 MHz; CPM; (Mask H)**

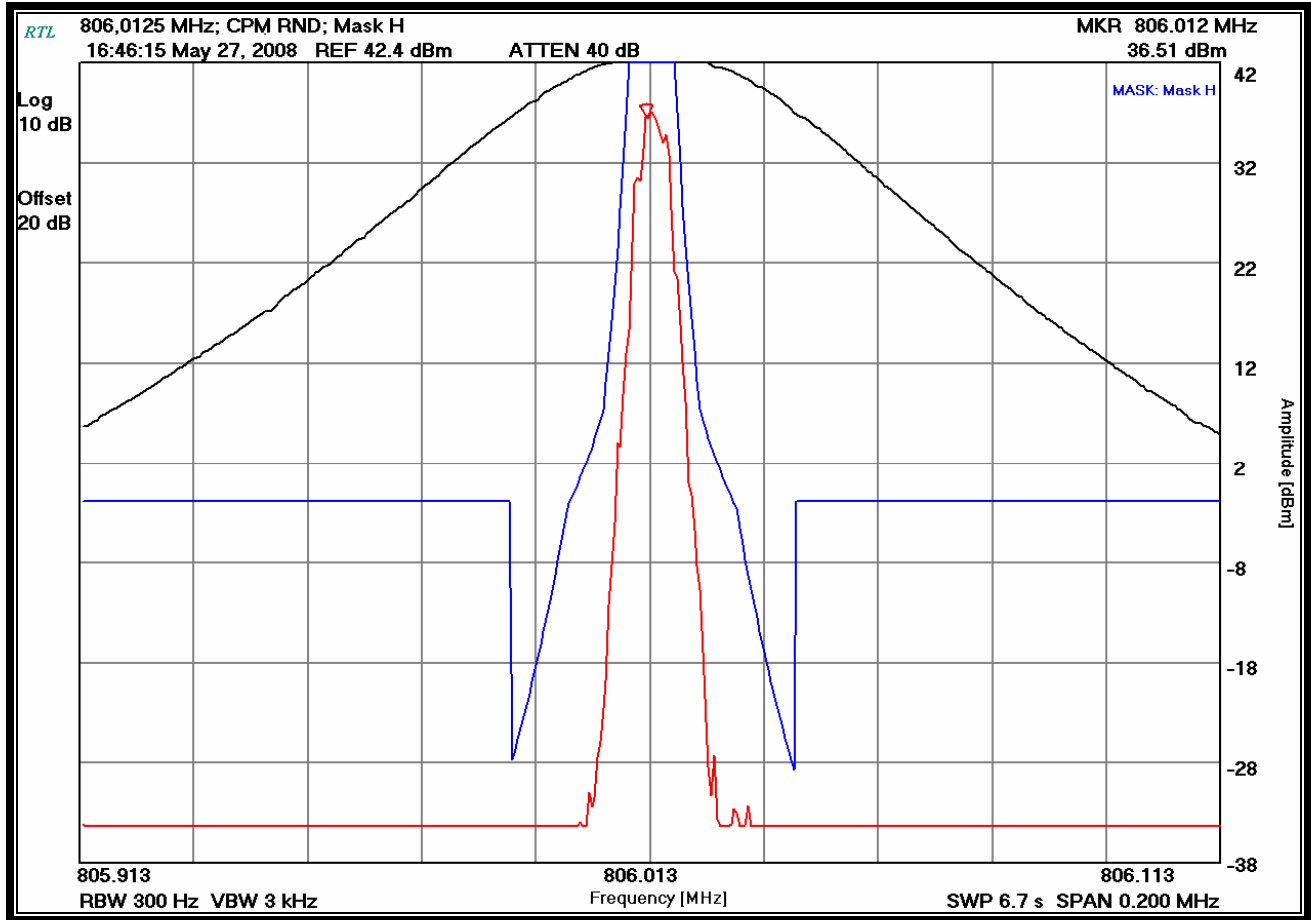


**Plot 9.10: Occupied Bandwidth – 869.9875 MHz; CPM; (Mask G)**

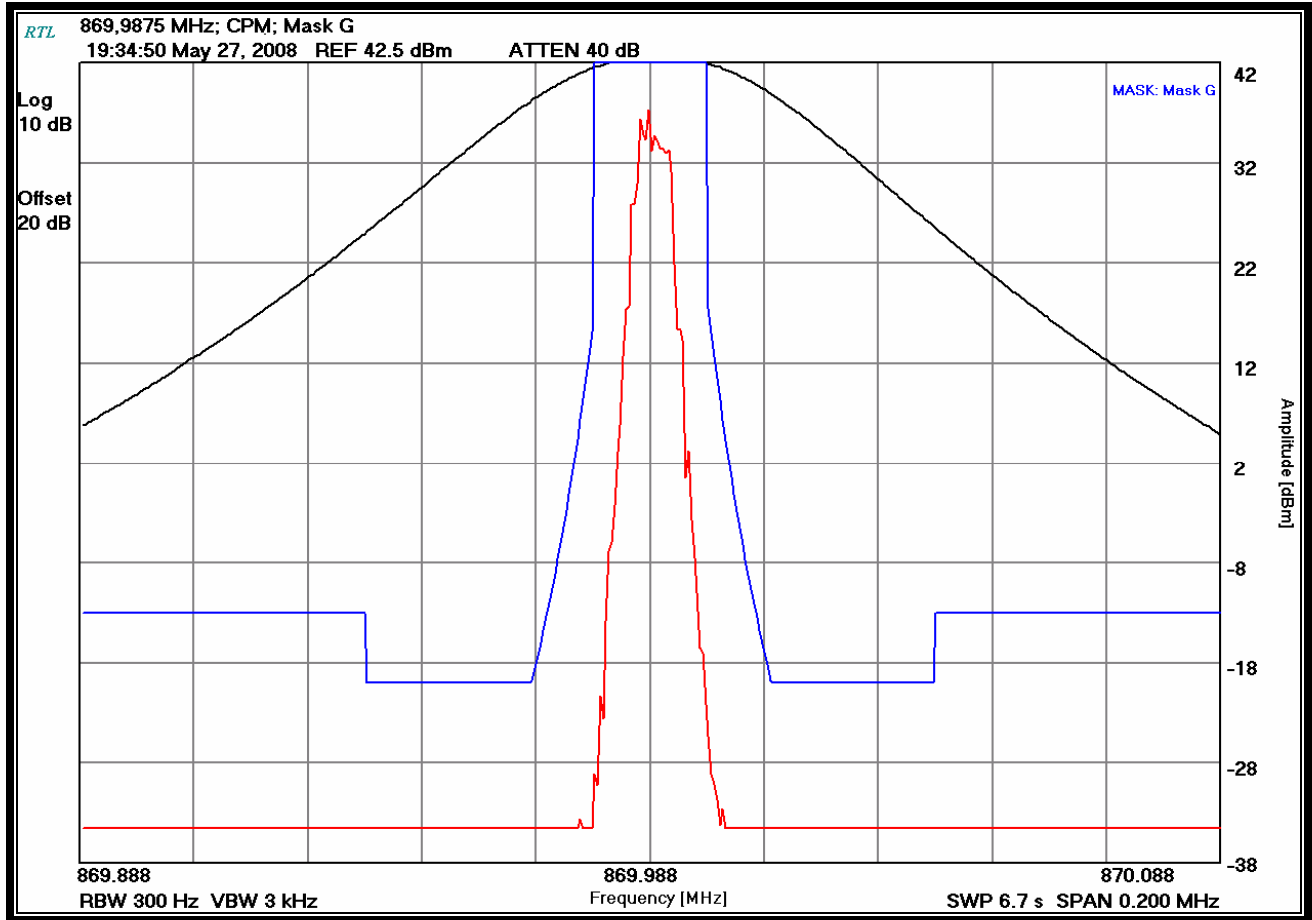

**Plot 9.11: Occupied Bandwidth – 866.0125 MHz; OTP NPS; (Mask G)**

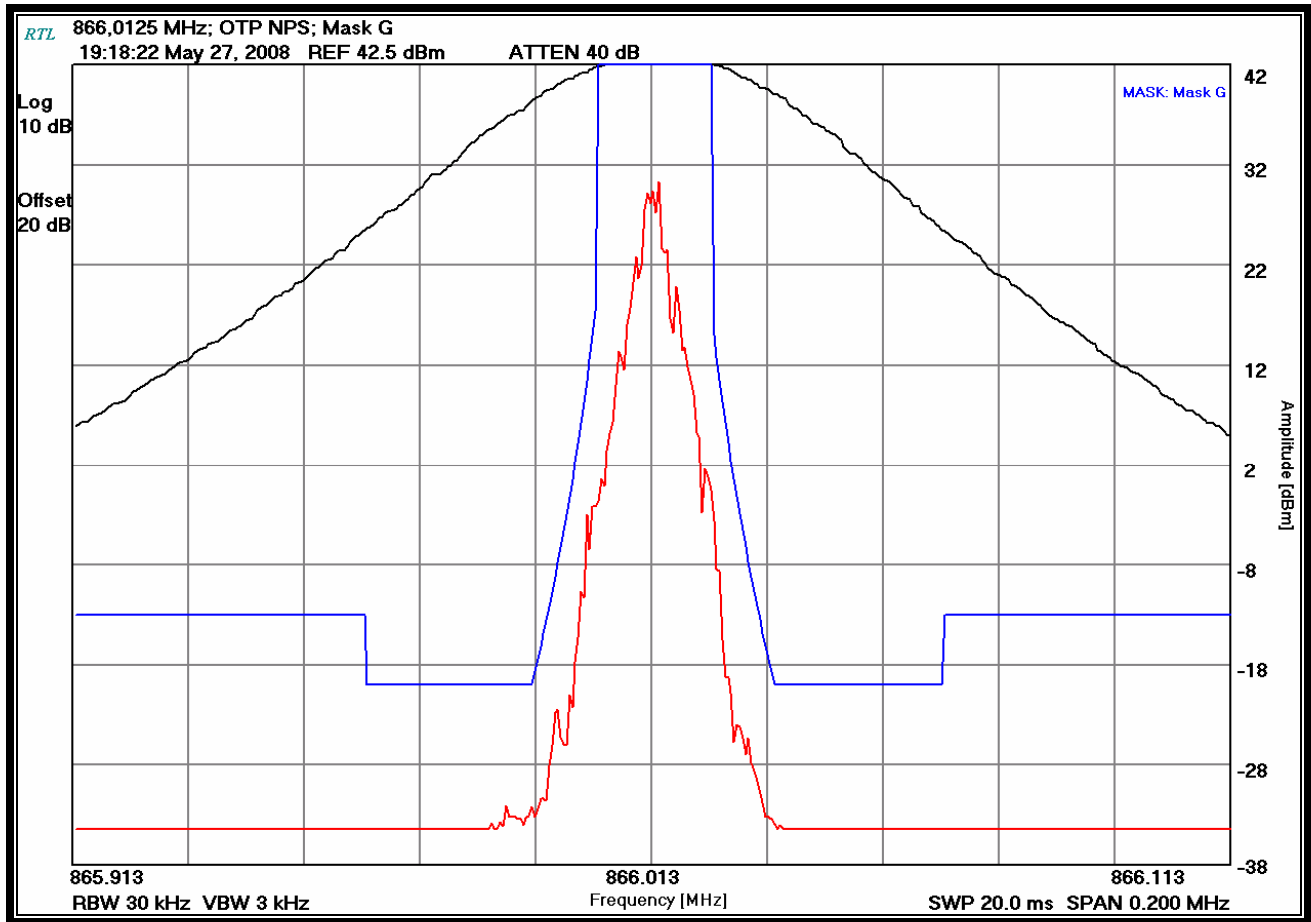


**Plot 9.12: Occupied Bandwidth – 866.0125 MHz; NPSPAC P25; (Mask G)**

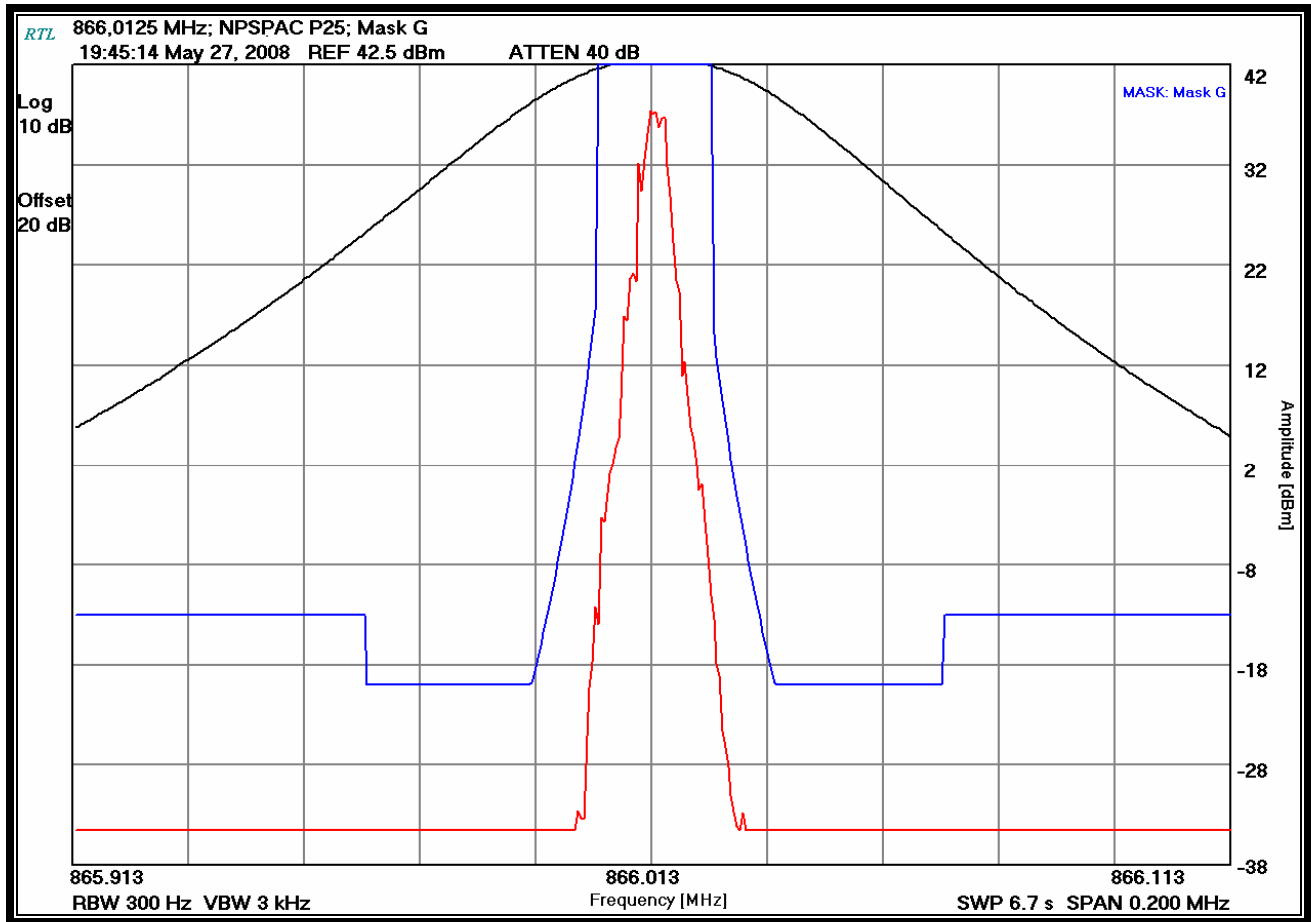





**Plot 9.13: Occupied Bandwidth – 866.0125 MHz; 9600 NP; (Mask G)**

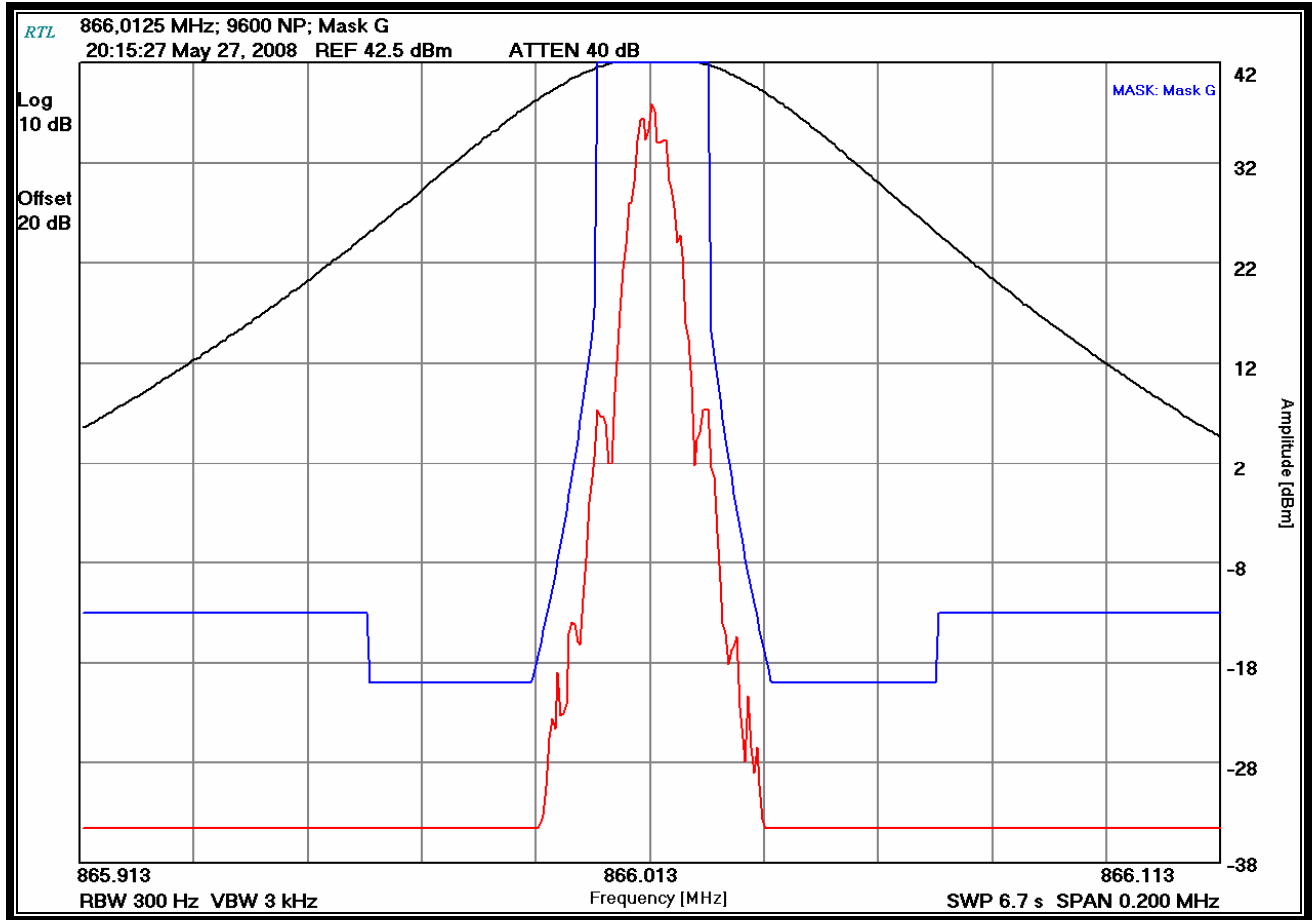

**Plot 9.14: Occupied Bandwidth – 866.0125 MHz; NPSPAC; (Mask B)**

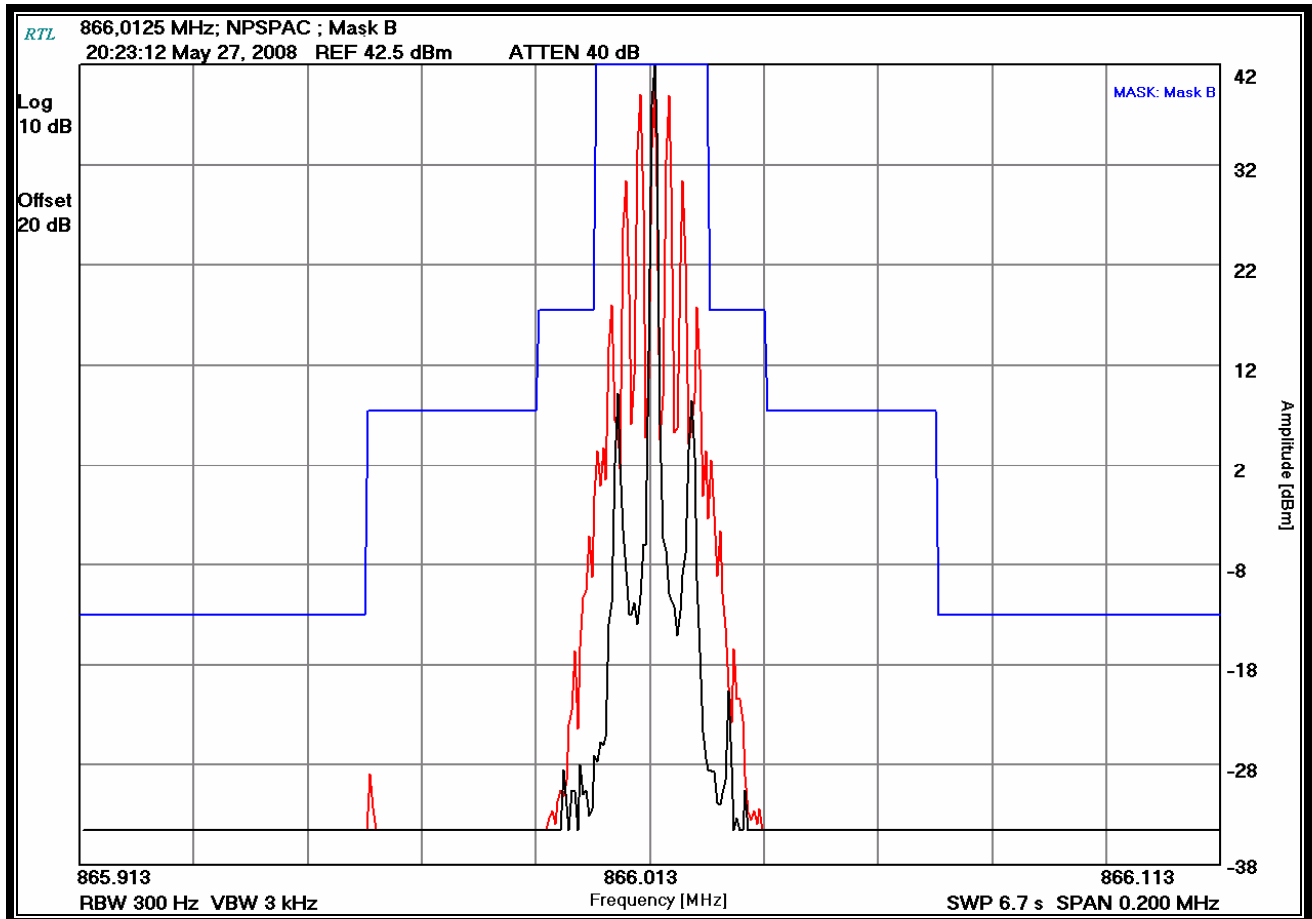

**Plot 9.15: Occupied Bandwidth – 866.0125 MHz; NPSPAC CPM; (Mask G)**

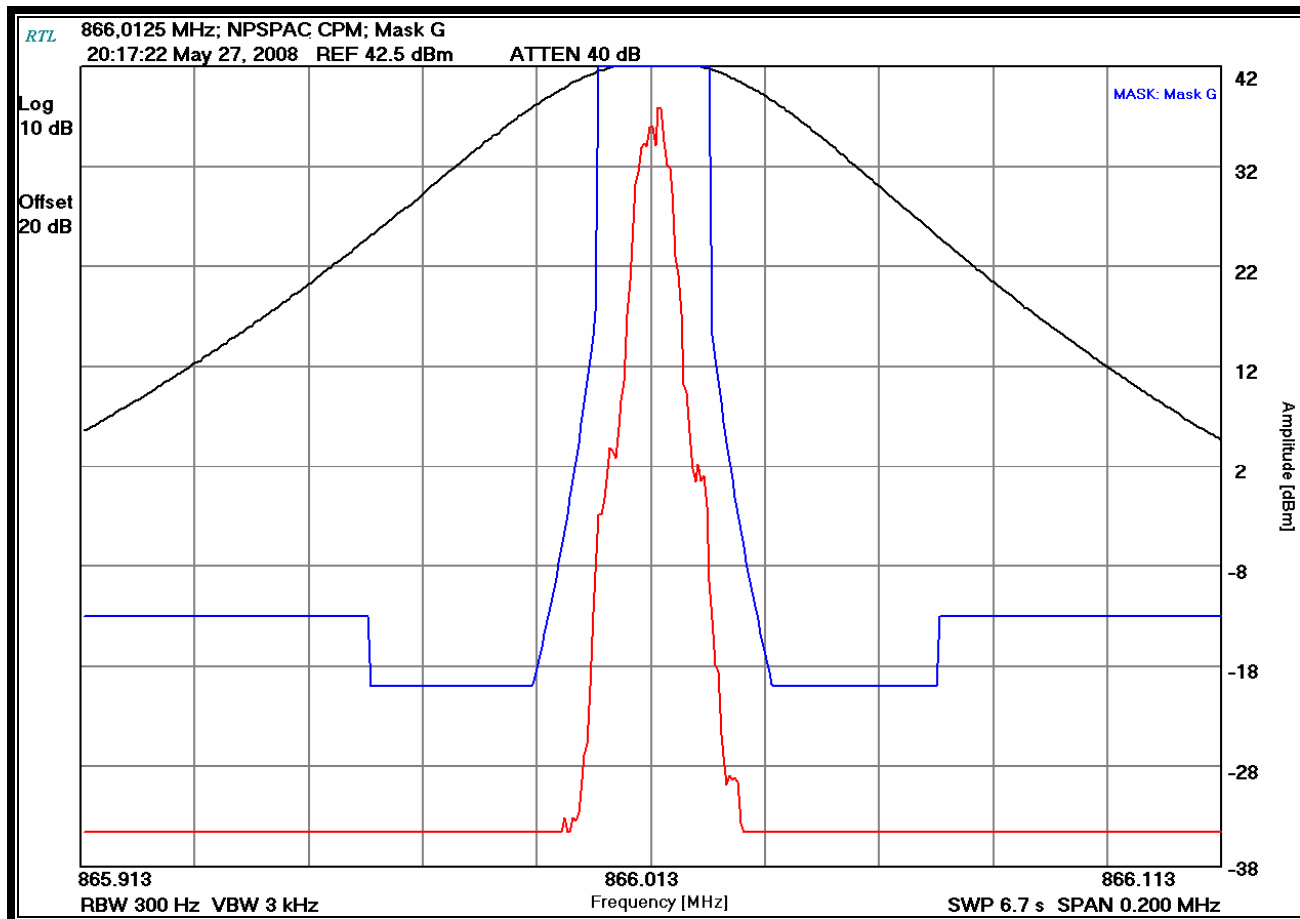

**Table 9-1: Test Equipment Used For Testing Occupied Bandwidth**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz - 12.8 GHz)	3826A00144	10/17/08
901307	Inmet	6N-10dB	Attenuator 10 dB	64671	1/11/09
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10dB 50W	BH1487	12/5/08

**Test Personnel:**

Daniel Baltzell  
 Test Technician/Engineer

Signature

May 27, 2008  
 Date Of Test

## **10 FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.539: Frequency Stability; RSS-119 5.3: Transmitter Frequency Stability**

### **10.1 Test Procedure**

ANSI/TIA/EIA-603-2002, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

Limit for 700 band:

§90.539: Transmitters designed to operate in 769-775 MHz and 799-805 MHz frequency bands must meet the frequency stability requirements in this section.

- (a) Mobile, portable and control transmitters must normally use automatic frequency control (AFC) to lock on to the base station signal.
- (b) The frequency stability of base transmitters operating in the narrowband segment must be 100 parts per billion or better.
- (c) The frequency stability of mobile, portable, and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station.

Note: When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).

Limit for 800 band:

§90.213: Mobile stations over 2 W operating power - 1.5 ppm.

## 10.2 Test Data

**Table 10-1: Temperature Frequency Stability – 769.00625 MHz**

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	769006044	-0.33
-20	769005888	-0.13
-10	769005900	-0.15
0	769005842	-0.07
10	769005818	-0.04
20 (reference)	769005787	0.00
30	769005844	-0.07
40	769005963	-0.23
50	769006132	-0.45
60	769006188	-0.52

The worst-case deviation was found to be 0.45 ppm. The requirement for this band at 12.5 kHz channel spacing is 1.5 ppm.

Result: The EUT is compliant.

Note: Please see manufacturer's attestation exhibit regarding frequency stability when locked to a base station.

### 10.2.1 Frequency Stability/Temperature Variation

**Table 10-2: Temperature Frequency Stability – 816.0125 MHz**

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	816012189	-0.18
-20	816012138	-0.12
-10	816012079	-0.04
0	816012103	-0.07
10	816012011	0.04
20 (reference)	816012043	0.00
30	816012080	-0.05
40	816012161	-0.14
50	816012386	-0.42
60	816012438	-0.48

The worst-case deviation was found to be 0.48 ppm. The requirement for this band at 12.5 kHz channel spacing is 1.5 ppm.

Result: The EUT is compliant.

**10.2.2 Frequency Stability/Voltage Variation**

**Table 10-3: Frequency Stability/Voltage Variation – 769.00625 MHz**

Voltage (VDC)	Measured Frequency (Hz)	ppm
11.7	769006001	0.10
13.8 (reference)	769006079	0.00
15.9	769006007	0.09


**Table 10-4: Frequency Stability/Voltage Variation – 816.0125 MHz**

Voltage (VDC)	Measured Frequency (Hz)	ppm
11.7	816012298	0.01
13.8 (reference)	816012305	0.00
15.9	816012282	0.03

**Table 10-5: Test Equipment Used For Testing Frequency Stability**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	05/08/09
901300	Agilent Technologies	53131A	Frequency Counter	MY40001345	05/13/09

**Test Personnel:**

Richard B. McMurray, P.E. EMC Test Engineer	 Signature	May 22-23, 2008 Date Of Test
--	--	---------------------------------

## 11 FCC Part 2.1047(a): Modulation Characteristics - Audio Frequency Response

### 11.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

$$\text{Audio Frequency Response} = 20 \text{ LOG} (\text{DEVfreq}/\text{DEVref})$$

### 11.2 Test Data

Plot 11.1: Modulation Characteristics - Audio Frequency Response




**Table 11-1: Test Equipment Used For Testing Audio Frequency Response**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	12/12/08
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	08/21/08

**Test Personnel:**

Daniel Baltzell  
Test Technician/Engineer



Signature

May 27, 2008  
Date Of Test



## 12 FCC Part 2.1047(a): Modulation Characteristics – Audio Low Pass Filter


### 12.1 Test Procedure

ANSI/TIA/EIA-603-2002, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

### 12.2 Test Data

Plot 12.1: Modulation Characteristics – Audio Low Pass Filter

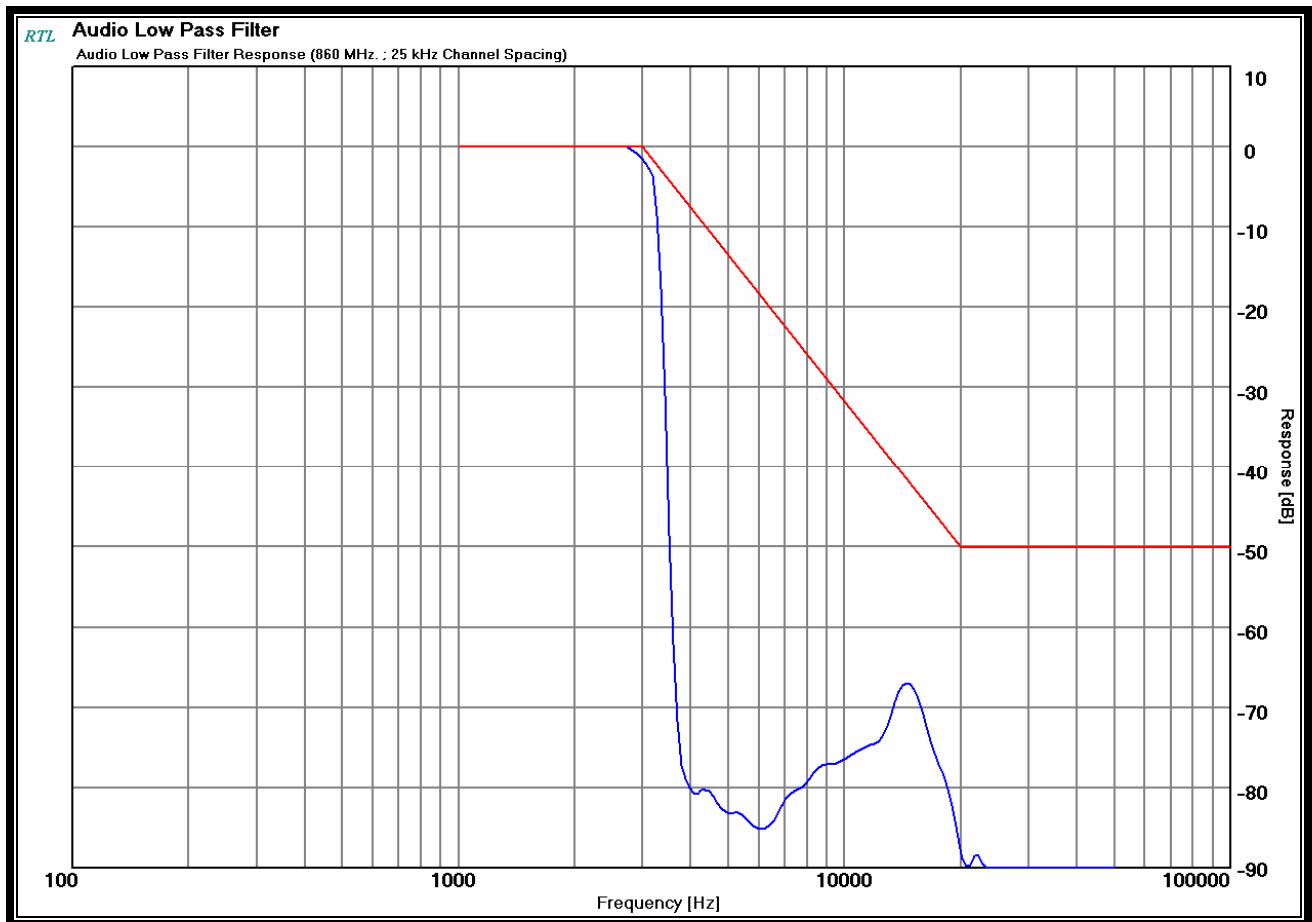


**Table 12-1: Test Equipment Used For Testing Audio Low Pass Filter Response**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	12/12/08
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	08/21/08
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892	10/17/08

**Test Personnel:**

---

Daniel Baltzell Test Technician/Engineer	 Signature	May 27, 2008 Date Of Test
---	---	------------------------------

### 13 FCC Rules and Regulations Part 2.1047(b): Modulation Characteristics - Modulation Limiting


#### 13.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.3


The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level (0 dB) as a reference, the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.

#### 13.2 Test Data


Plot 13.1: Modulation Characteristics – Modulation Limiting; Positive Peak; Wideband

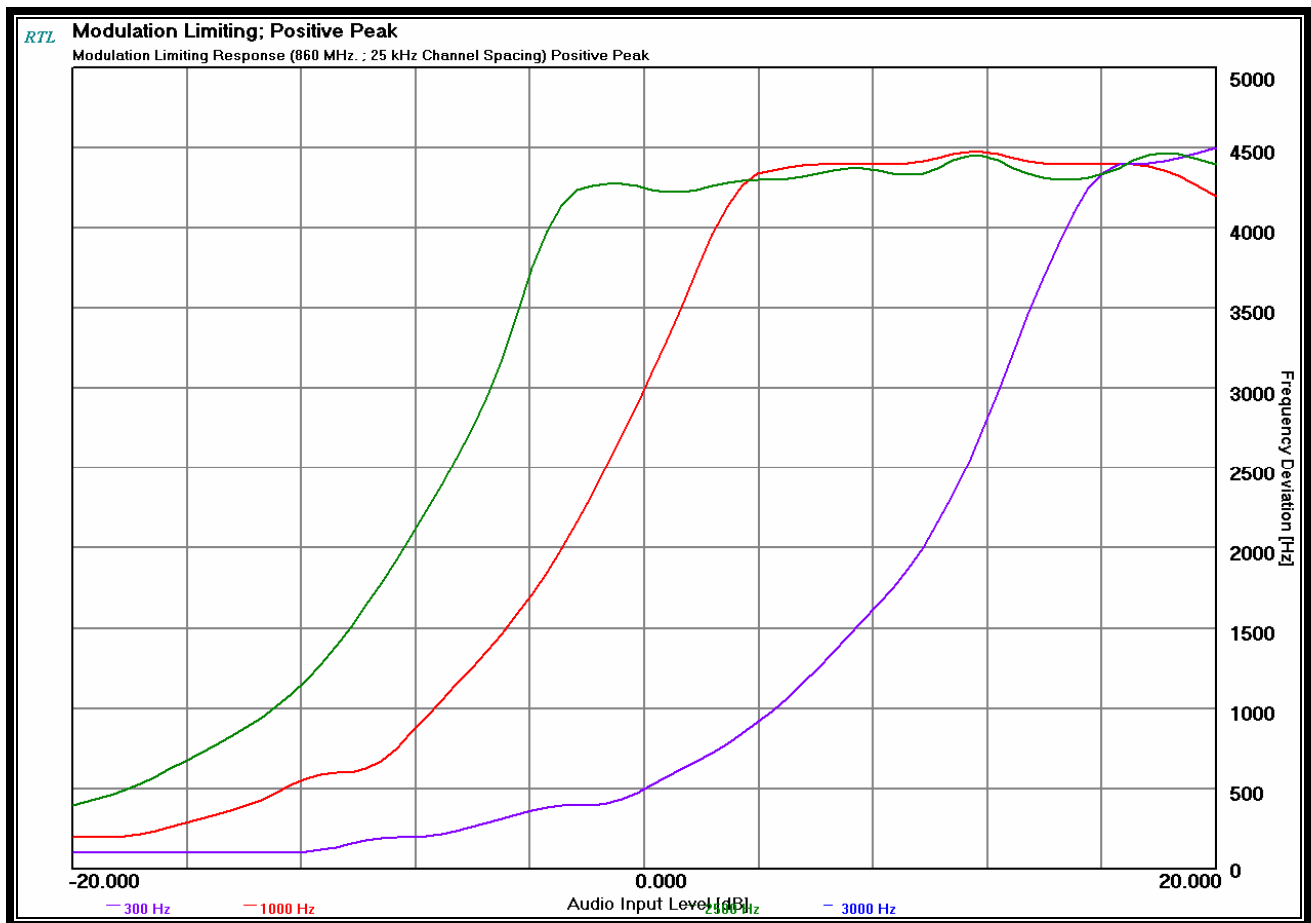


**Plot 13.2: Modulation Characteristics – Modulation Limiting; Negative Peak; Wideband**

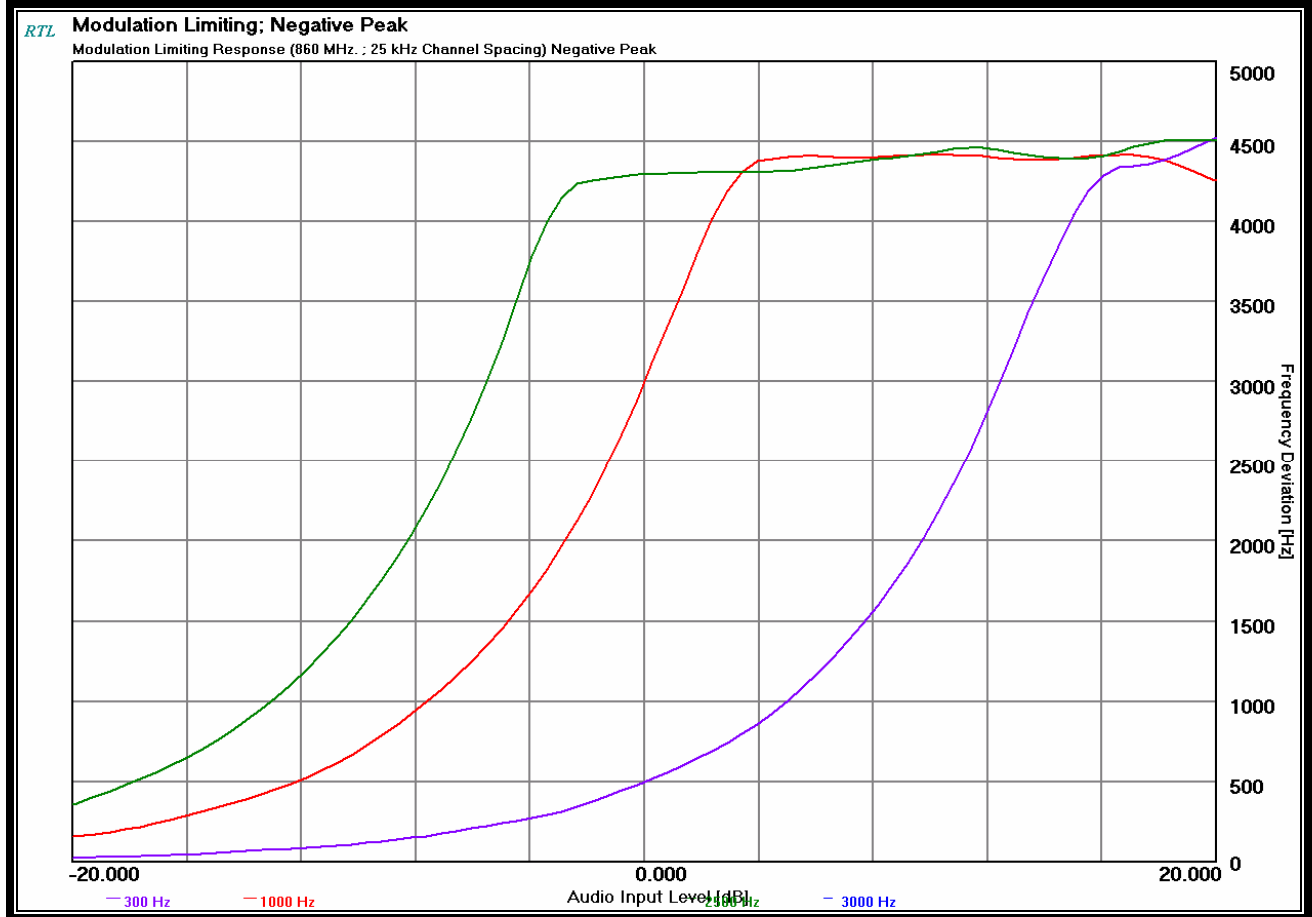

**Plot 13.3: Modulation Characteristics – Modulation Limiting; Positive Peak; Narrowband**

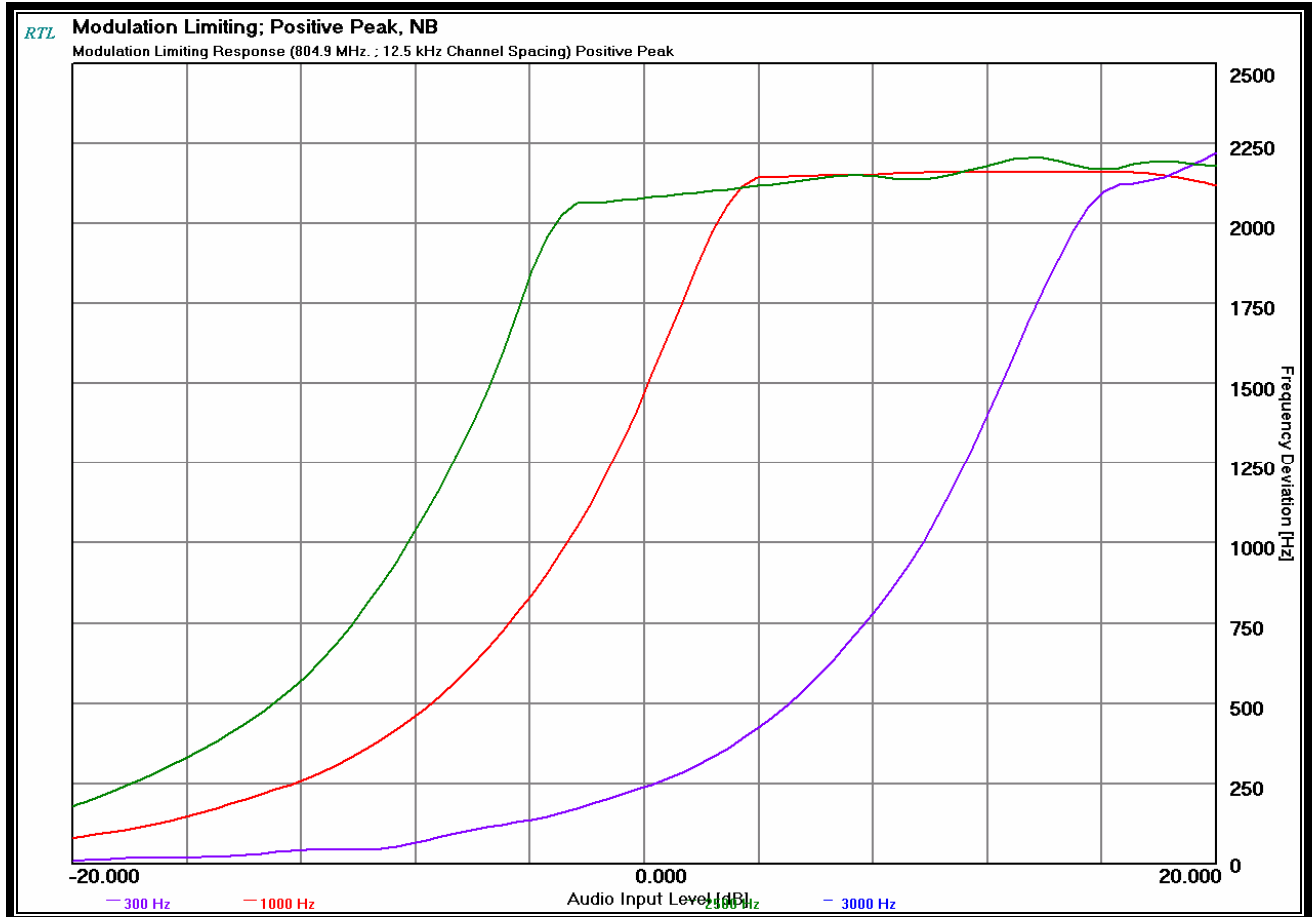

**Plot 13.4: Modulation Characteristics – Modulation Limiting; Negative Peak; Narrowband**

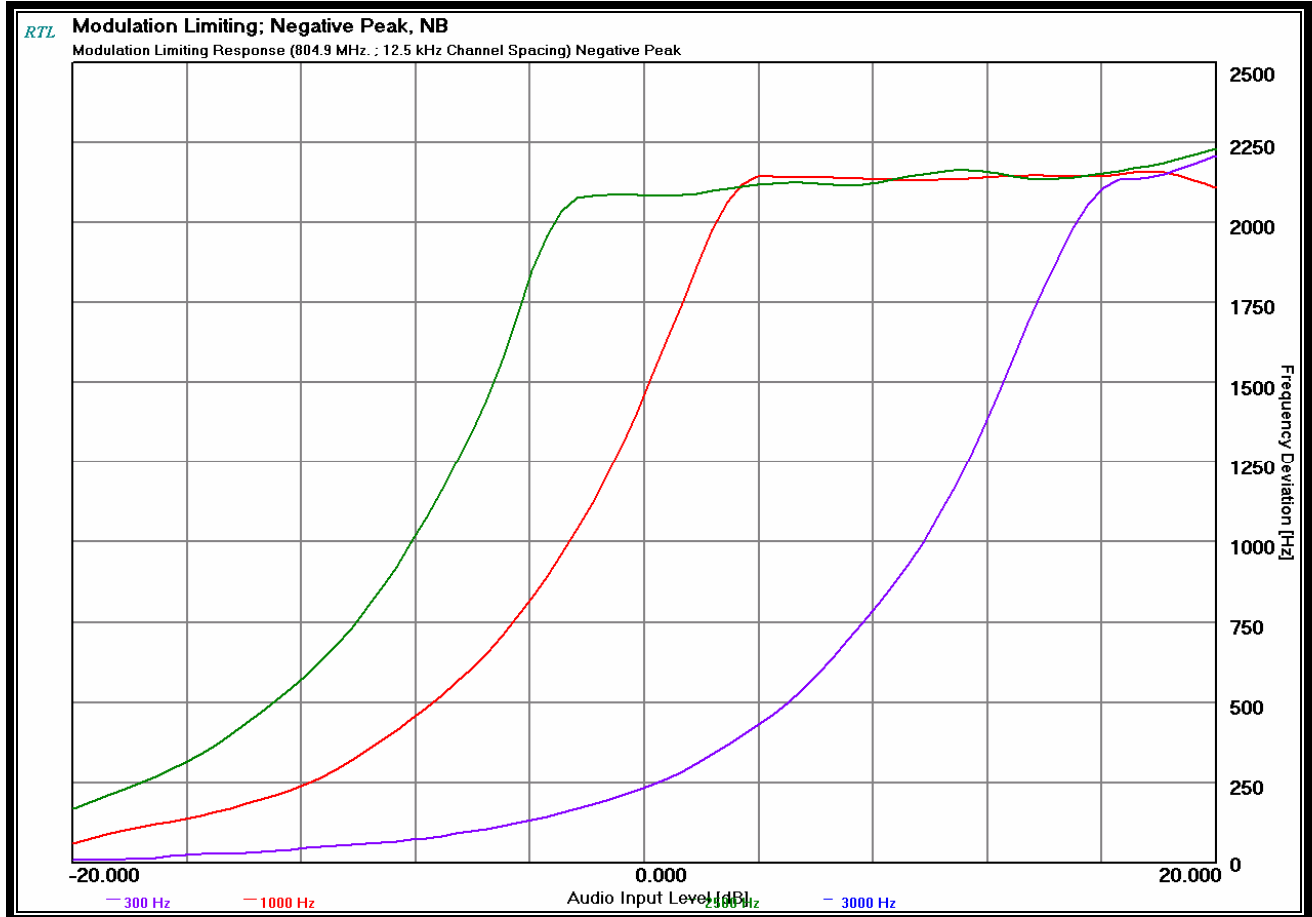


**Table 13-1: Test Equipment Used For Testing Modulation Limiting**

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	12/12/08
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	08/21/08

**Test Personnel:**

Daniel Baltzell  
Test Technician/Engineer



Signature

May 27, 2008  
Date Of Test

## 14 FCC Rules and Regulations Part 2 §2.202: Necessary Bandwidth and Emission Bandwidth

### Analog FM

#### **763-767/773-775 MHz Talkaround; 794-797/803-805 MHz Trunked/Conventional**

##### Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (default)

$B_n = 2xM+2xDK = 11.0$  kHz

Emission designator: 11K0F3E

#### **806-824 MHz Trunked/Conventional; 851-869 MHz Talkaround**

##### Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 5.0

Constant factor (K): 1 (default)

$B_n = 2xM+2xDK = 16.0$  kHz

Emission designator: 16K0F3E

#### **806-824 MHz Trunked/Conventional; 851-869 MHz Talkaround on NPSPAC Channels**

##### Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 4.0

Constant factor (K): 1 (default)

$B_n = 2xM+2xDK = 14.0$  kHz

Emission designator: 14K0F3E

### OTP Modulation

#### **794-797/803-805 MHz Trunked**

##### Calculation:

Data rate in bps (R) = 19,200

Peak deviation of carrier (D) = 3,750 Hz

Number of state in each symbol (S) = 4

K = 0.334

$B_n = [R/\log_2(4) + 2(D)(K)] = 12.1$  kHz

Emission designator: 12K1F9W

#### **806-809, 809-821, 821-824 MHz SMR/NPSPAC Trunked**

##### Calculation:

Data rate in bps (R) = 19,200

Peak deviation of carrier (D) = 3750 Hz

Number of state in each symbol (S) = 4

K = 0.334

$B_n = [R/\log_2(4) + 2(D)(K)] = 12.1$  kHz

Emission designator: 12K1F9W



## 2-Level Voice/Data

### **806-809, 821-824 NPSPAC Trunked/Conventional; 851-854, 866-869 MHz NPSPAC Talkaround**

#### Calculation:

Data rate in bps (R) = 9,600

Peak deviation of carrier (D) = 2,400 Hz

$2D/R = 0.5$

$B_n = (3.86 \cdot D) + (0.027 \cdot R) = 11,856 \text{ kHz}$

Emission designator: 11K9F1D, 11K9F1E

### **806-809, 809-821, 821-824 SMR Trunked/Conventional; 851-854, 854-866, 866-869 MHz SMR**

#### Talkaround

#### Calculation:

Data rate in bps (R) = 9,600

Peak deviation of carrier (D) = 3,000 Hz

$2D/R = 0.625$

$B_n = (3.86 \cdot D) + (0.027 \cdot R) = 14,172 \text{ kHz}$

Emission designator: 14K2F1D, 14K2F1E

## P25 Voice/Data

### **763-767/773-776 Talkaround; 794-797/803-805 MHz Trunked/Conventional**

#### Calculation:

Data rate in bps (R) = 9,600

Peak deviation of carrier (D) = 1,800 Hz

Number of state in each symbol (S) = 4

$B_n = [R/\log_2(4) + 2(D)(1)] = 8,400 \text{ kHz}$

Emission designator: 8K4F1D, 8K4F1E

### **806-824, 851-869 MHz Trunked or Conventional, Talkaround**

#### Calculation:

Data rate in bps (R) = 9,600

Peak deviation of carrier (D) = 1,800 Hz

Number of state in each symbol (S) = 4

$B_n = [R/\log_2(4) + 2(D)(1)] = 8,400 \text{ kHz}$

Emission designator: 8K4F1D, 8K4F1E

## 15 Conclusion

The data in this measurement report shows that the **M/A-COM, Inc. Model M7300 700/800 MHz Mobile Radio, FCC ID: OWDTR-0051-E, IC: 3636B-0051**, complies with all the applicable requirements of Parts 90, 15 and 2 of the FCC Rules, and Industry Canada RSS-119, Issue 9, 2007.