




**Plot 8-70: Occupied Bandwidth – 470 MHz; (2-level FSK 9600; WB) EDACS; Mask C**

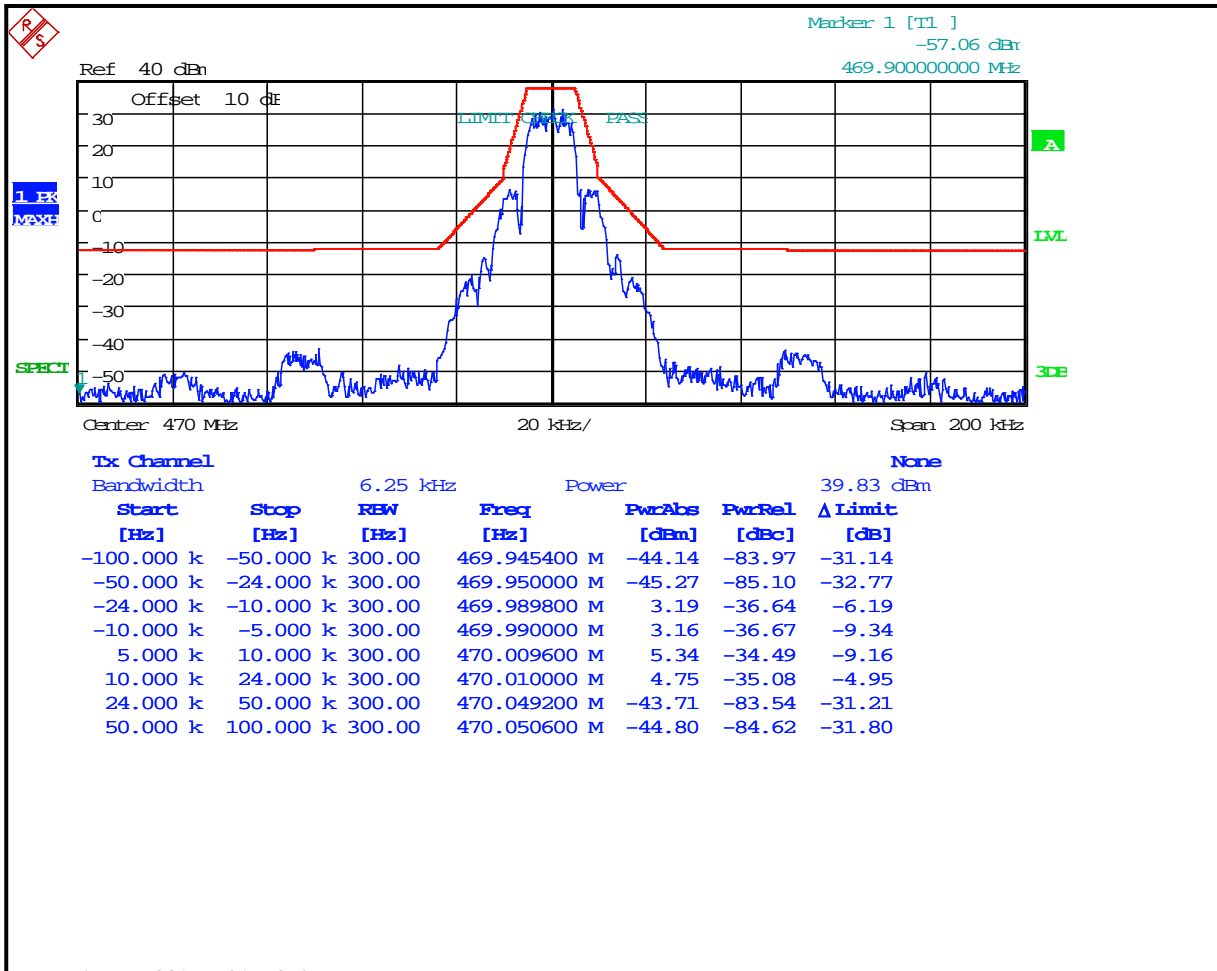


**Plot 8-71: Occupied Bandwidth – 430 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D**

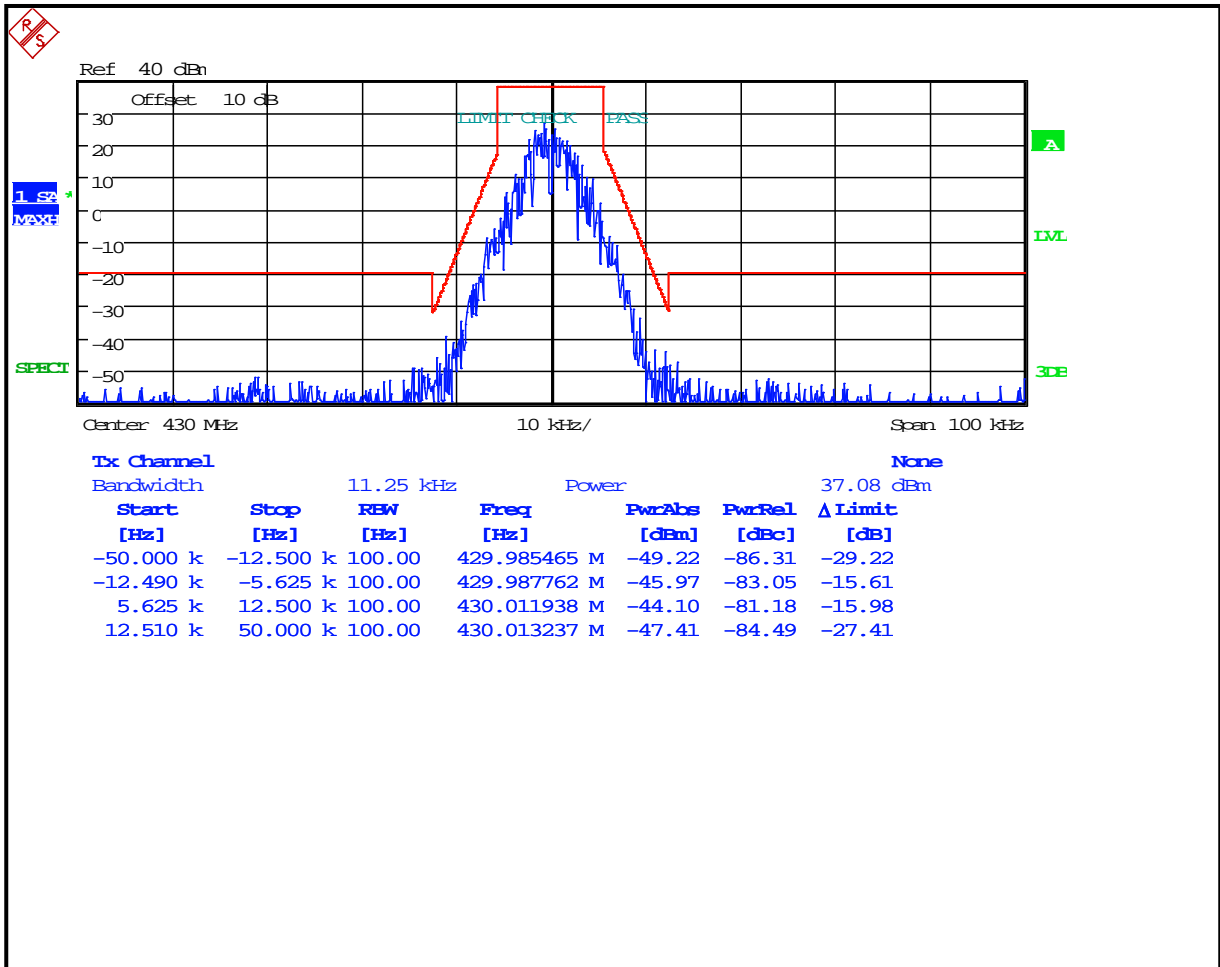


**Plot 8-72: Occupied Bandwidth – 450 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D**

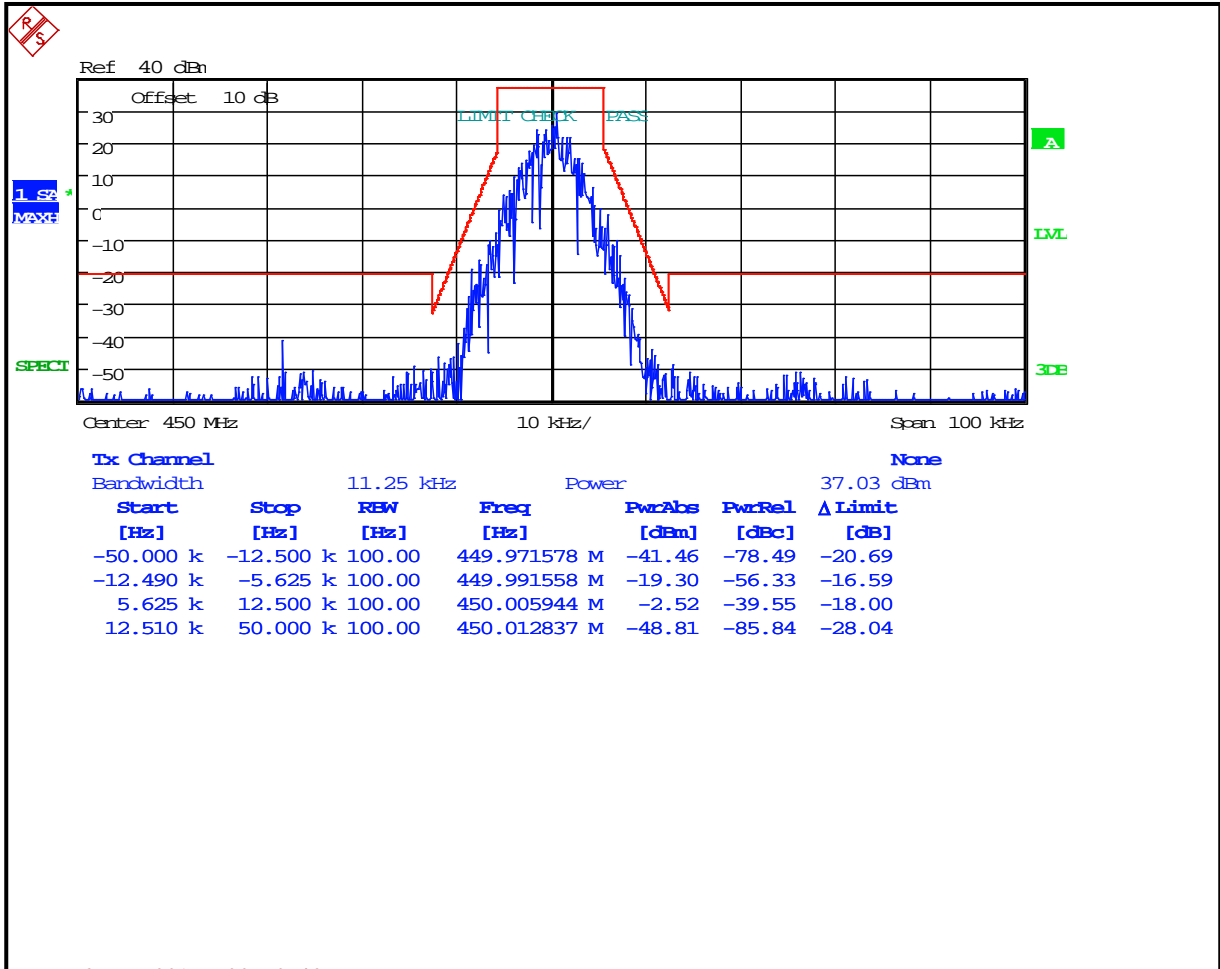


**Plot 8-73: Occupied Bandwidth – 454 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D**

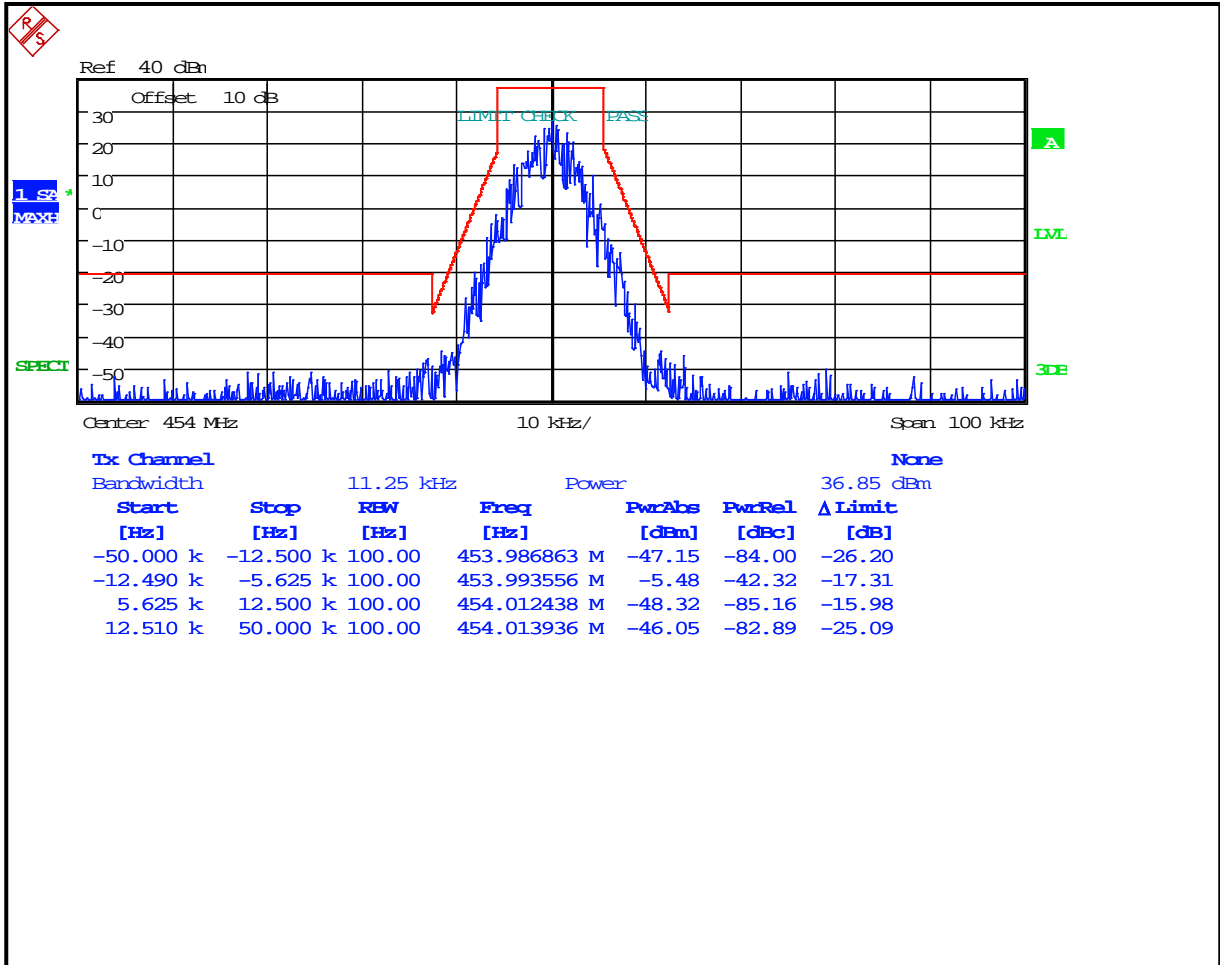


**Plot 8-74: Occupied Bandwidth – 456 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D**

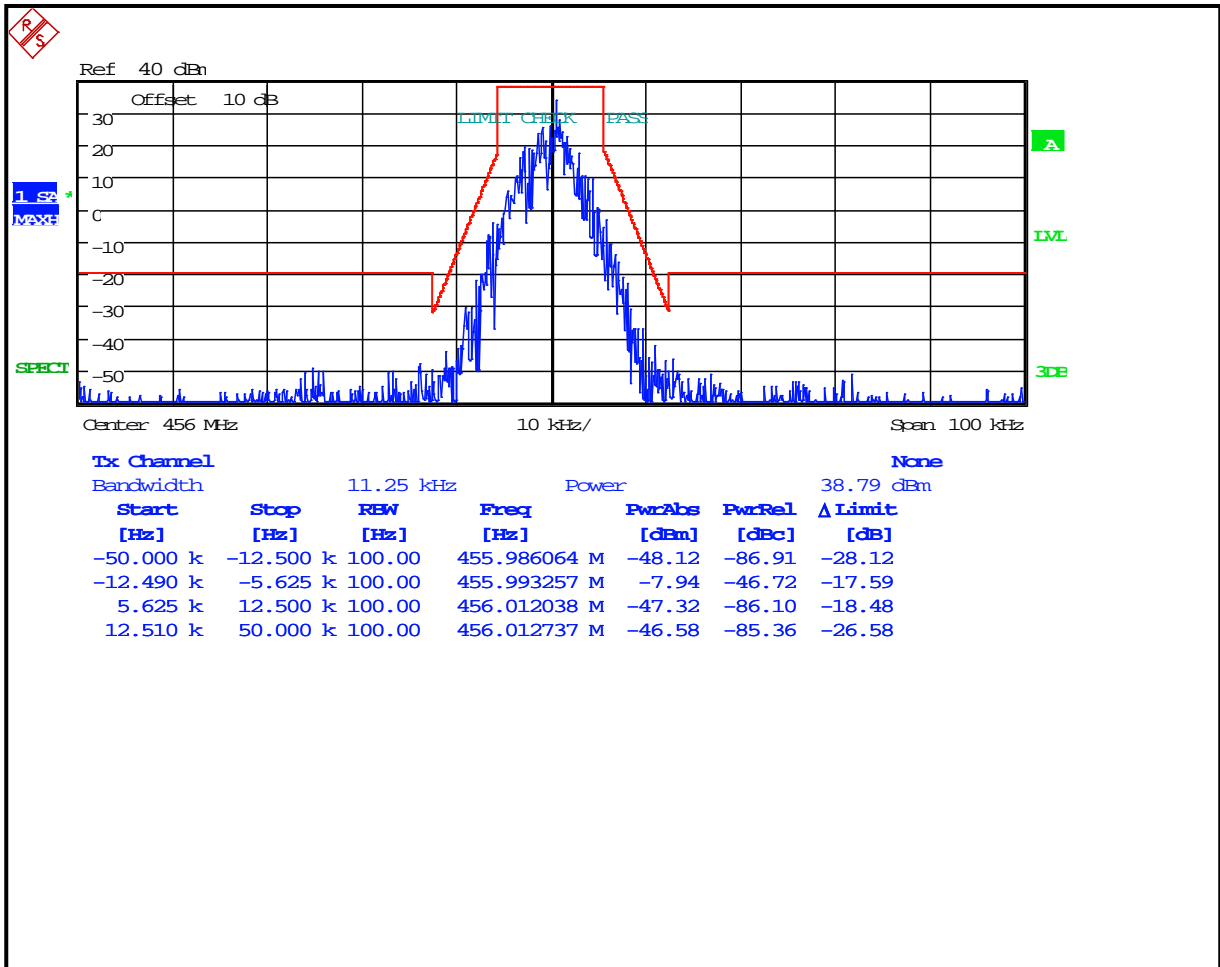


**Plot 8-75: Occupied Bandwidth – 459.025 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D**

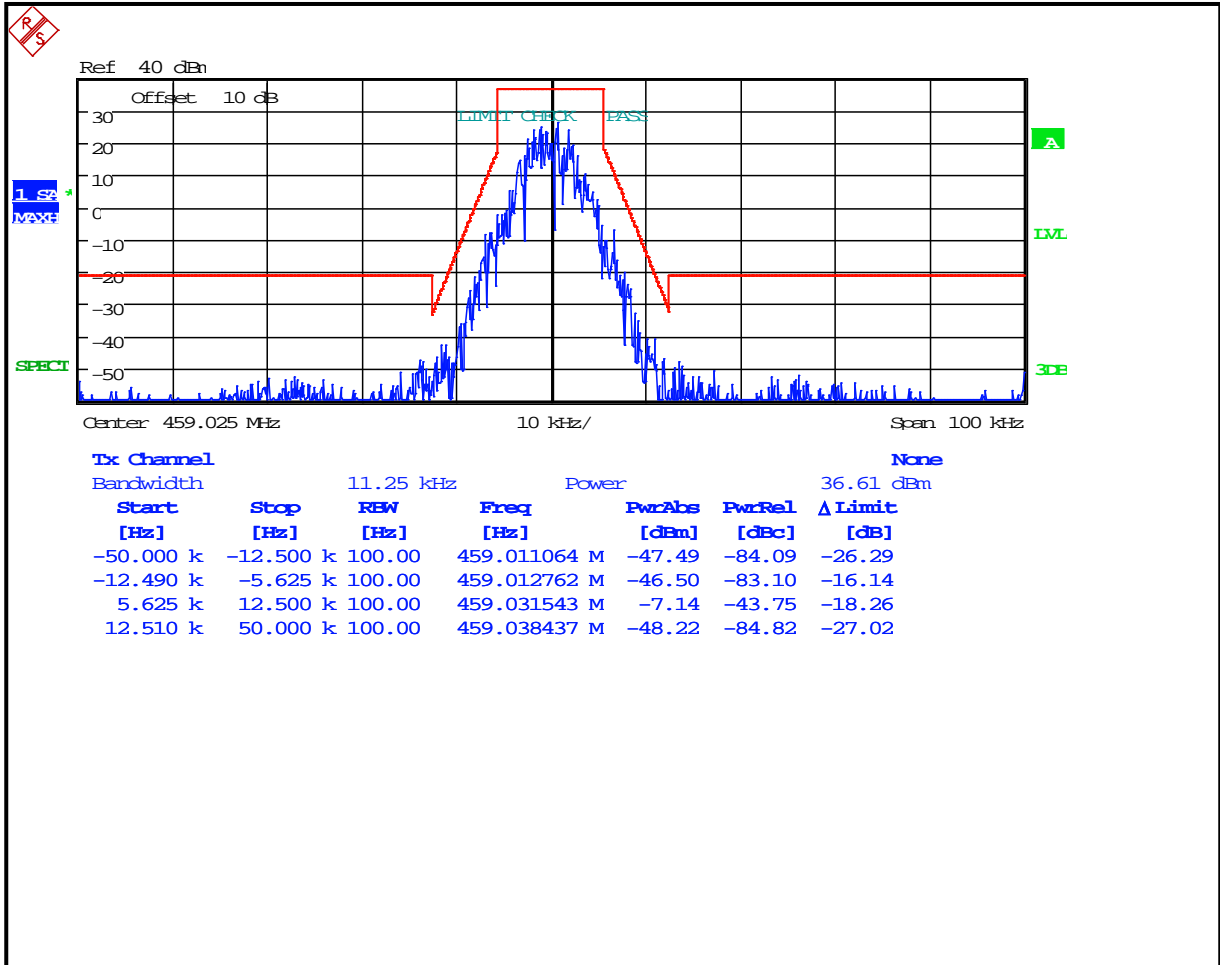

**Plot 8-76: Occupied Bandwidth – 459.975MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D**

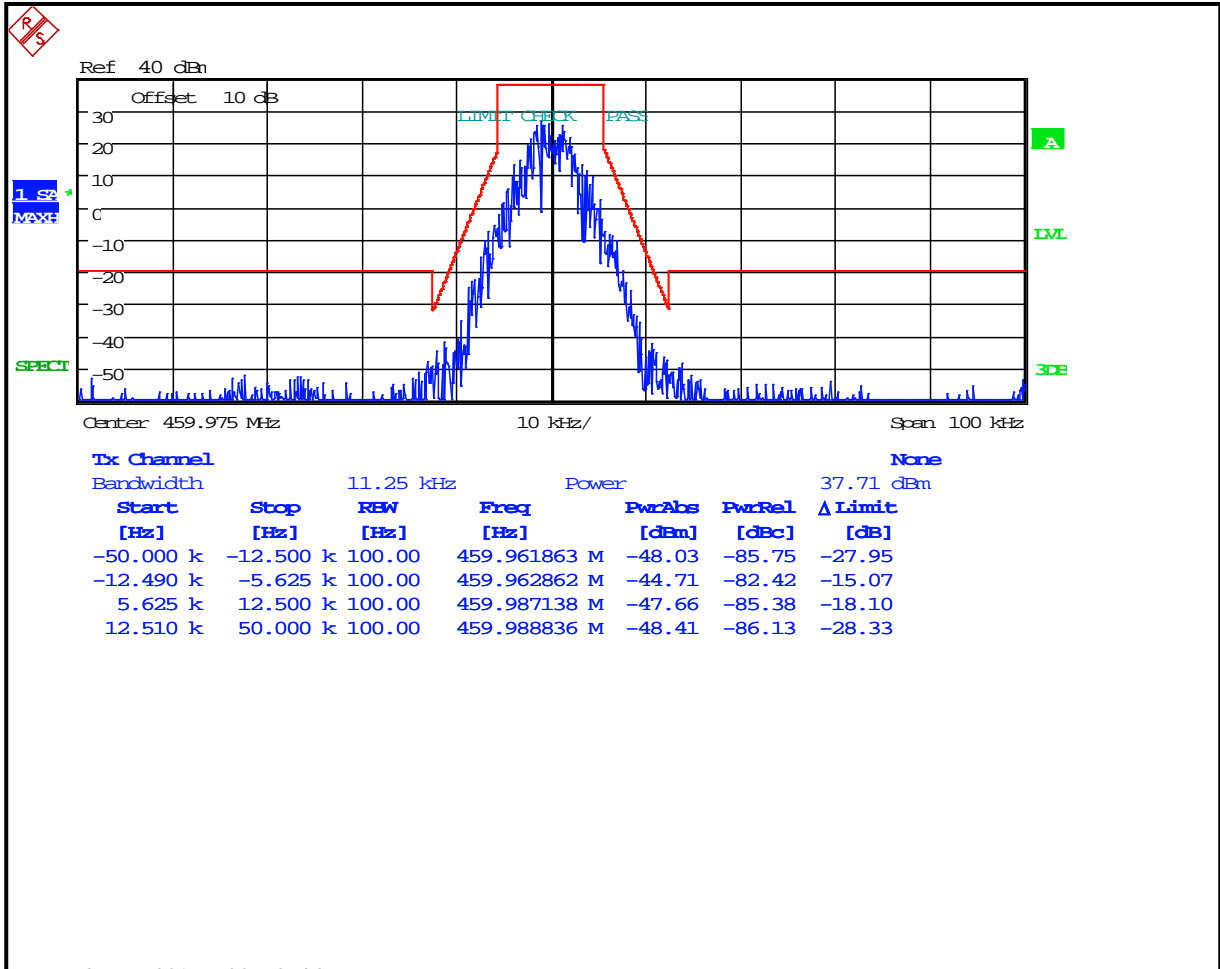


**Plot 8-77: Occupied Bandwidth – 470 MHz; (4-level FSK Data/Voice; NB) OpenSky; Mask D**

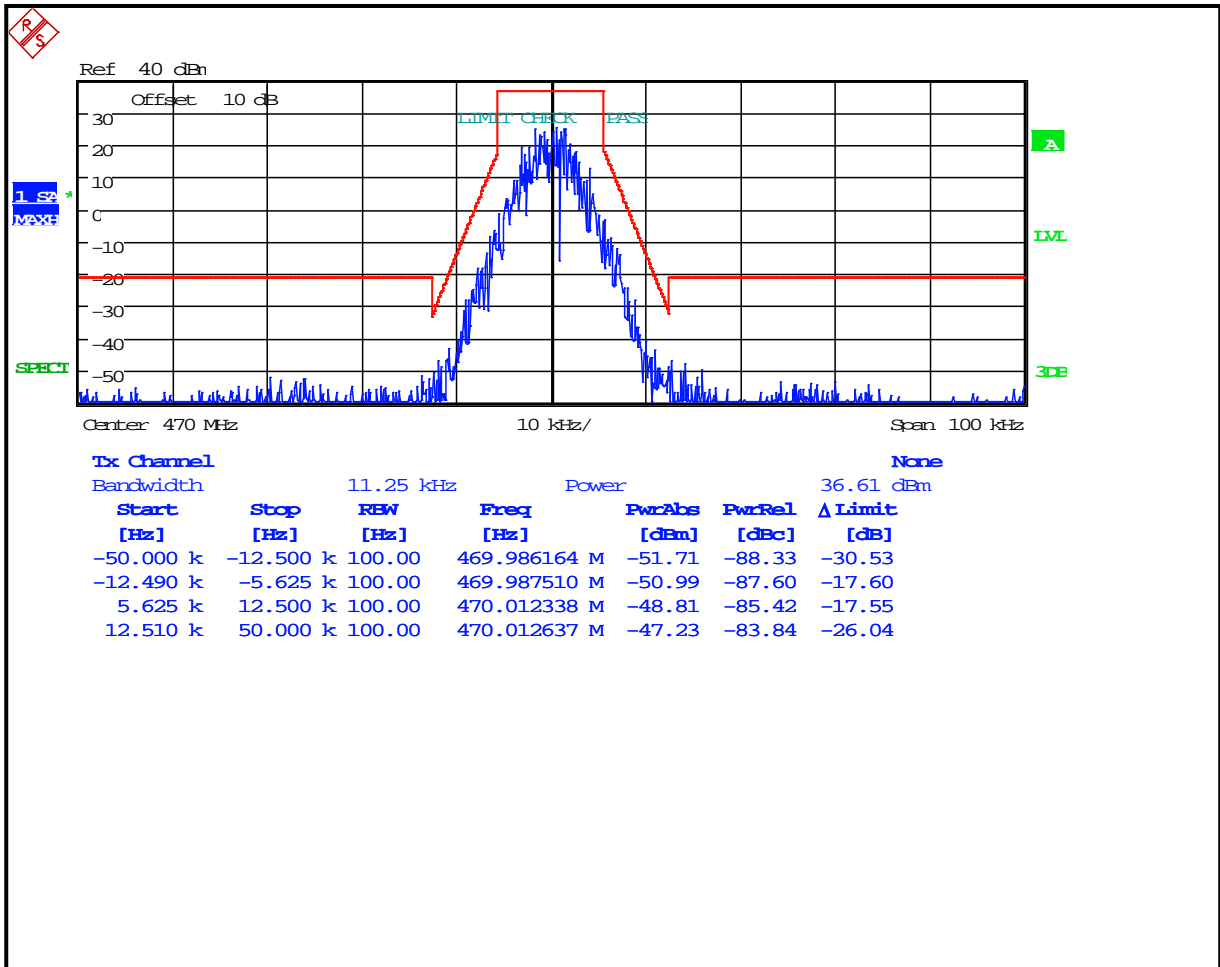





**Plot 8-78: Occupied Bandwidth – 815 MHz; Narrowband Analog; Mask D**

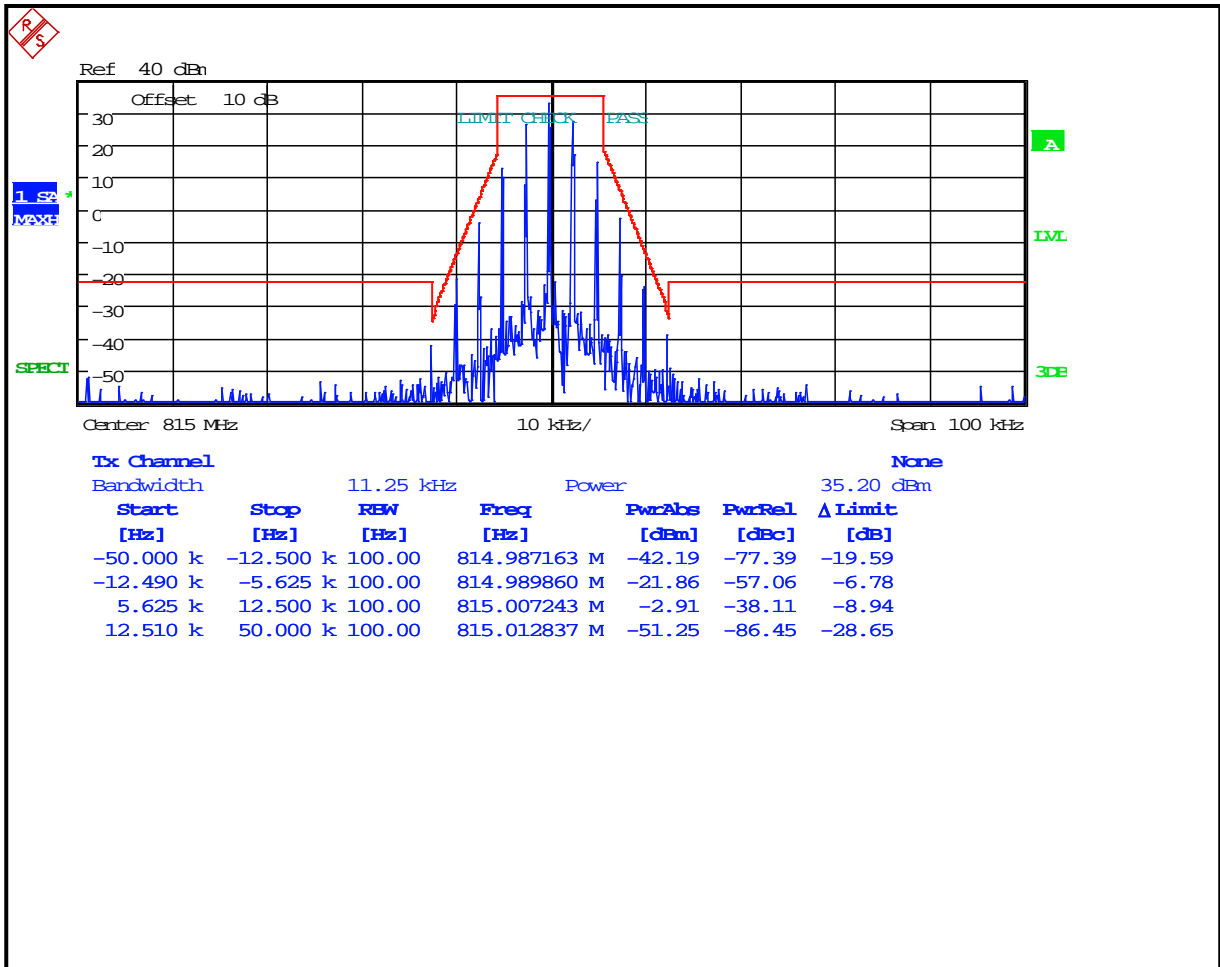


**Plot 8-79: Occupied Bandwidth – 815 MHz; Narrowband Analog; Mask B**

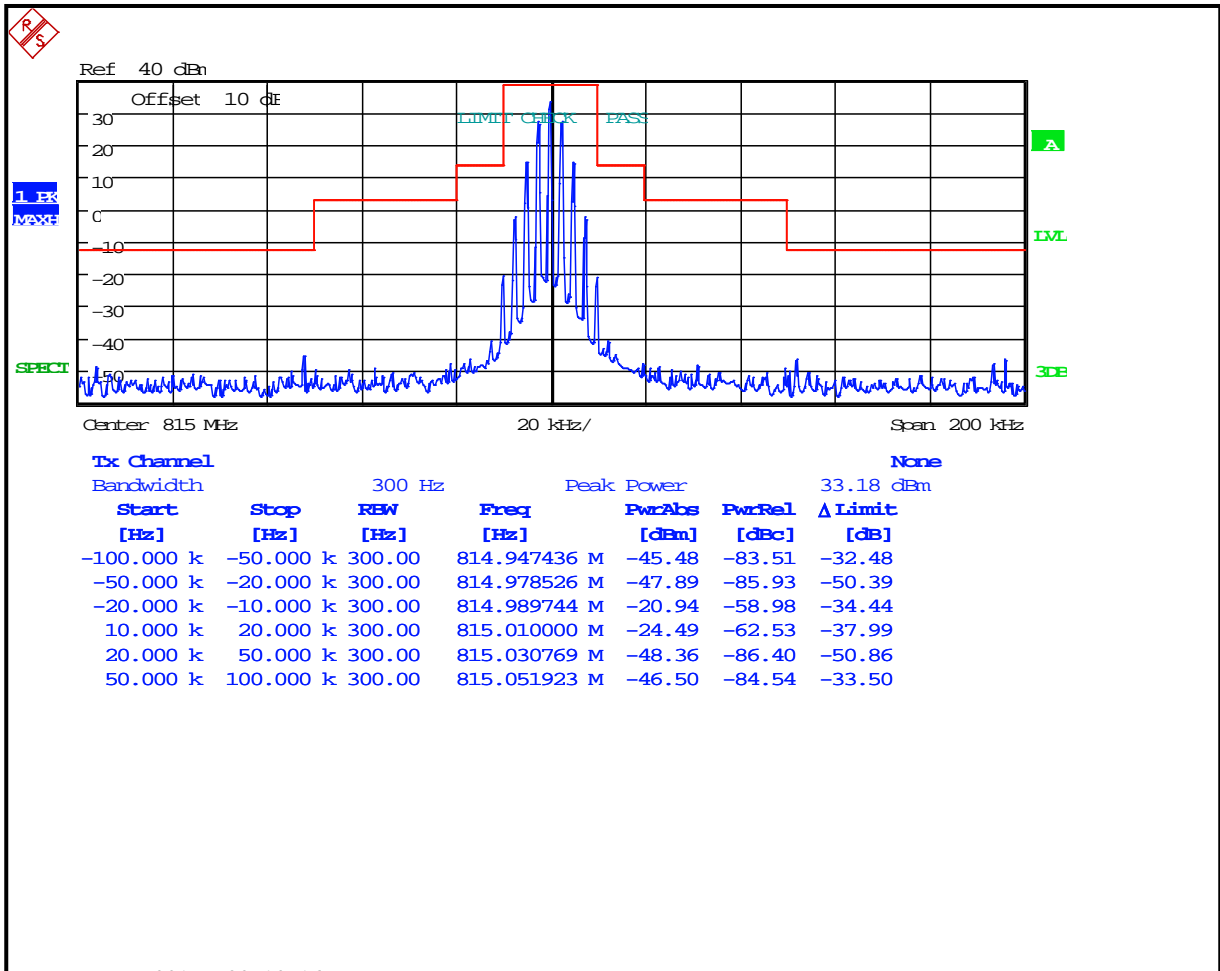


**Plot 8-80: Occupied Bandwidth – 860 MHz; Narrowband Analog; Mask D**

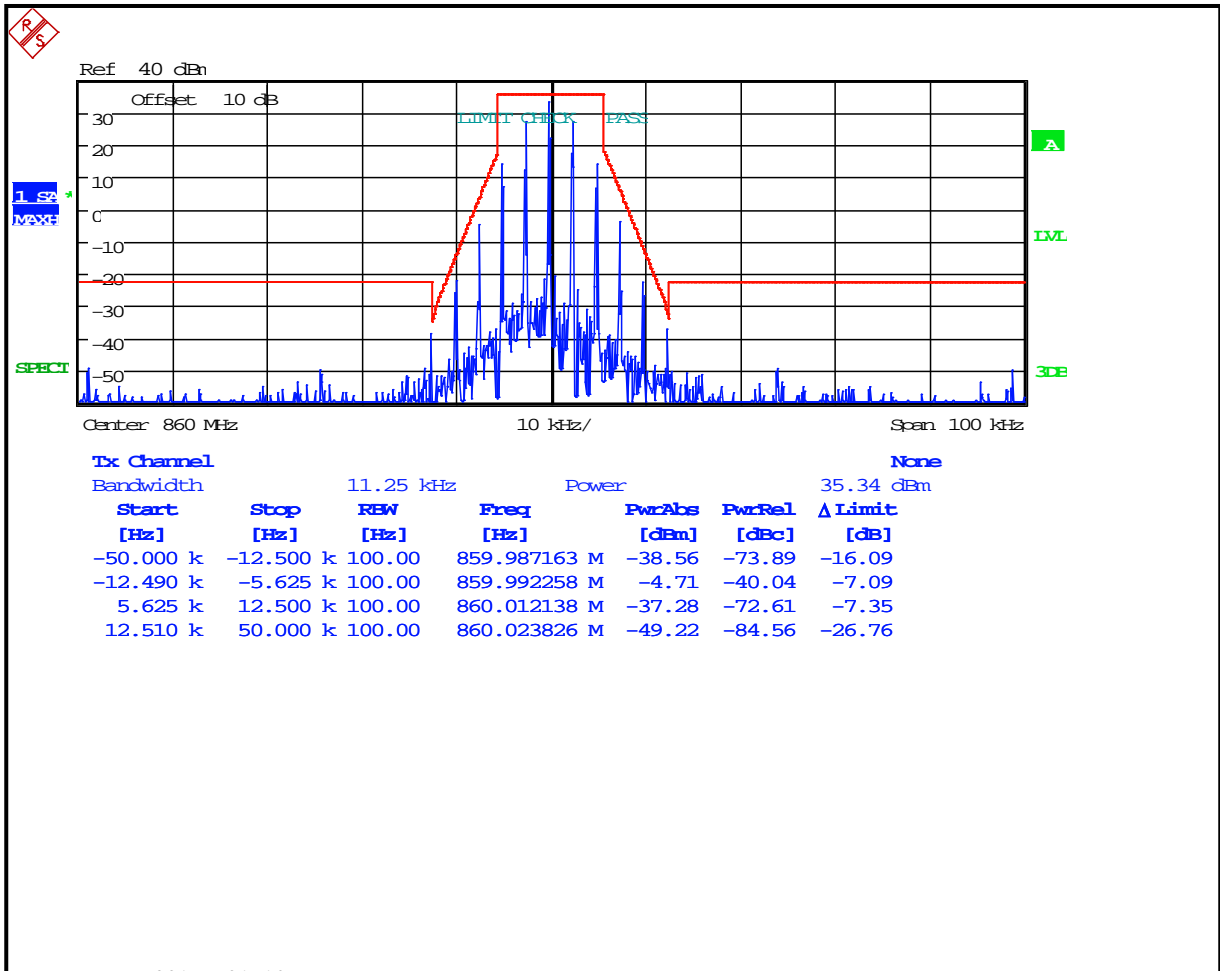


**Plot 8-81: Occupied Bandwidth – 860 MHz; Narrowband Analog; Mask B**

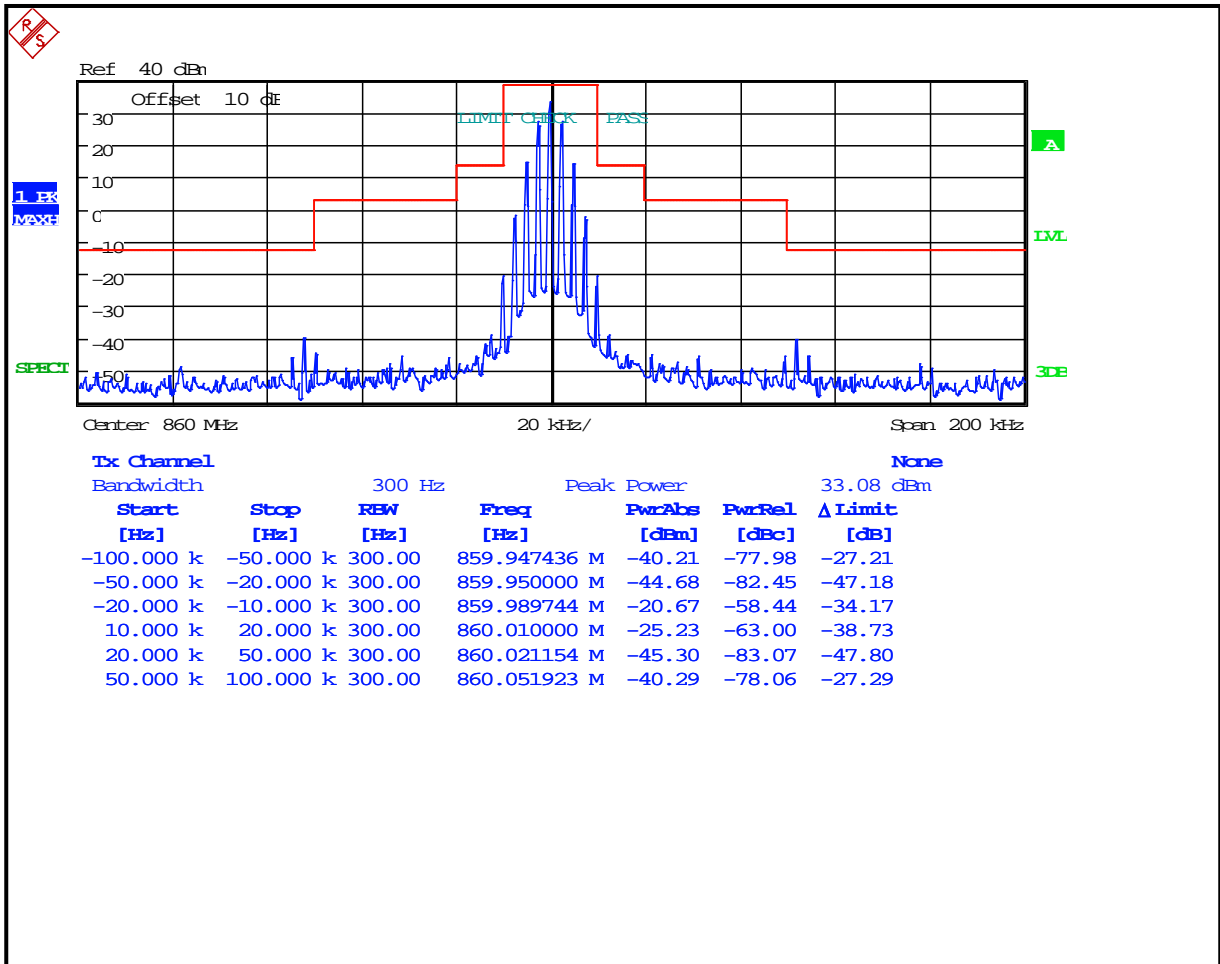


**Plot 8-82: Occupied Bandwidth – 815 MHz; Wideband Analog; Mask B**

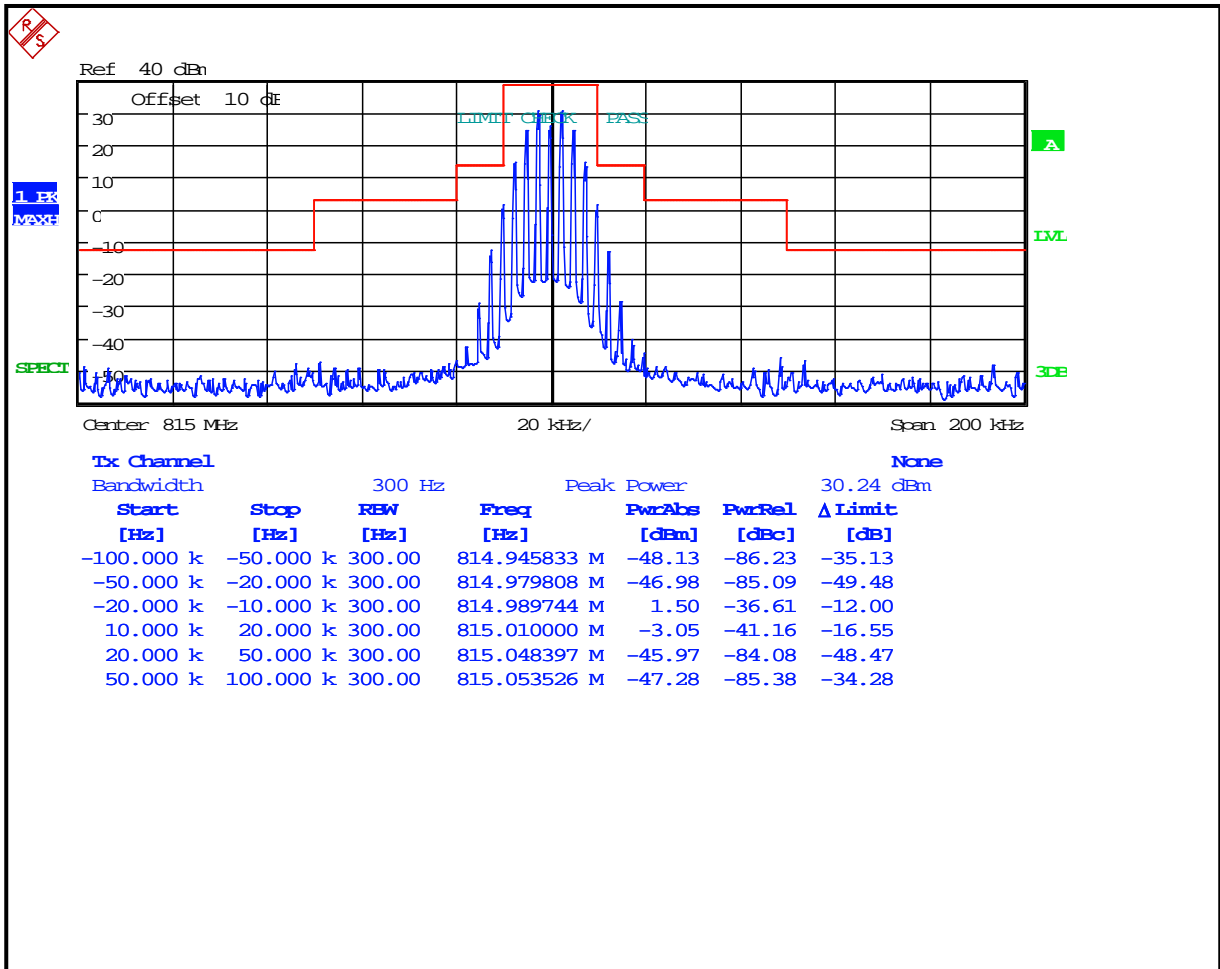


**Plot 8-83: Occupied Bandwidth – 860 MHz; Wideband Analog; Mask B**

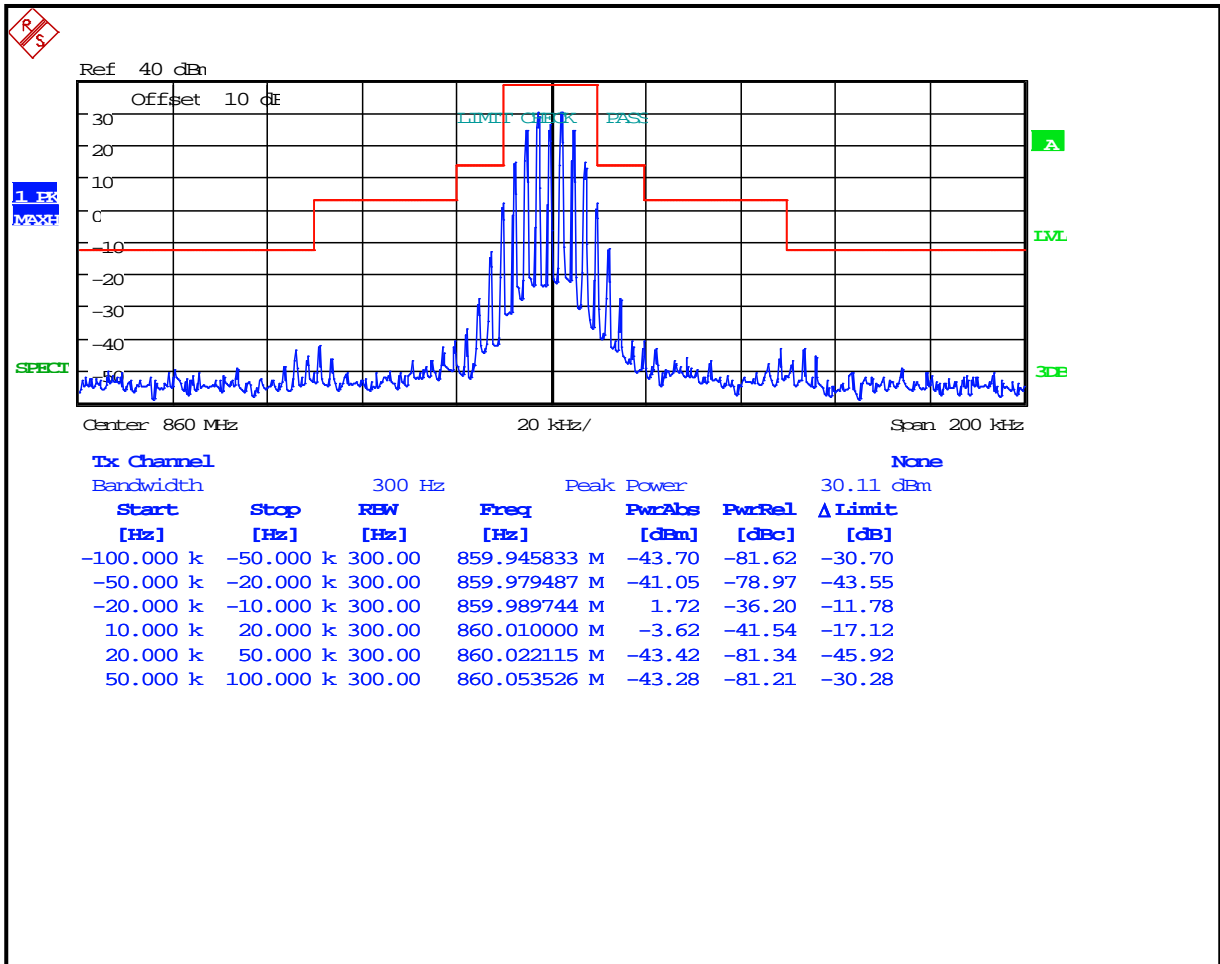

**Plot 8-84: Occupied Bandwidth – 806 MHz; NPSPAC; Mask B**

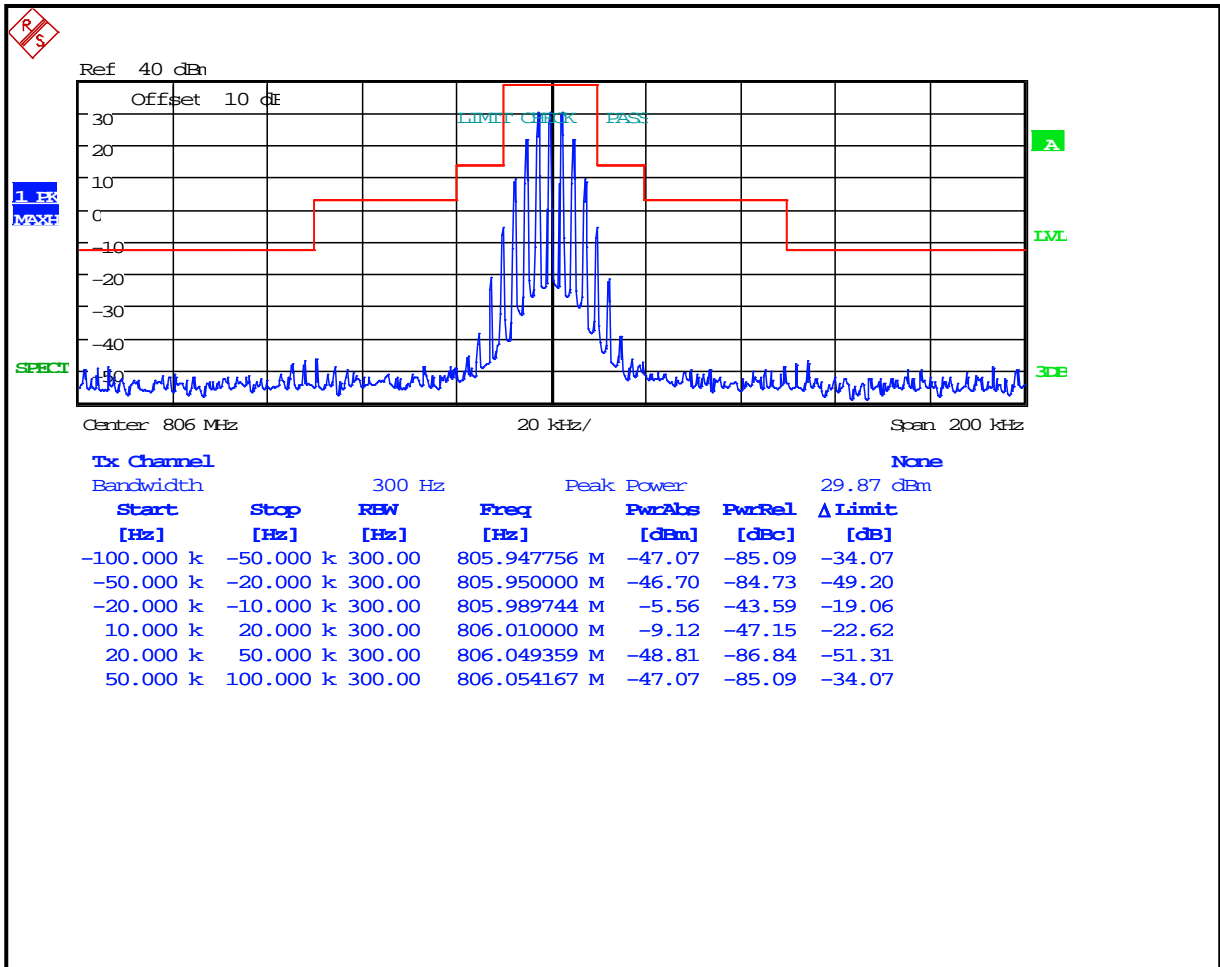


**Plot 8-85: Occupied Bandwidth – 816 MHz; NPSPAC; Mask B**

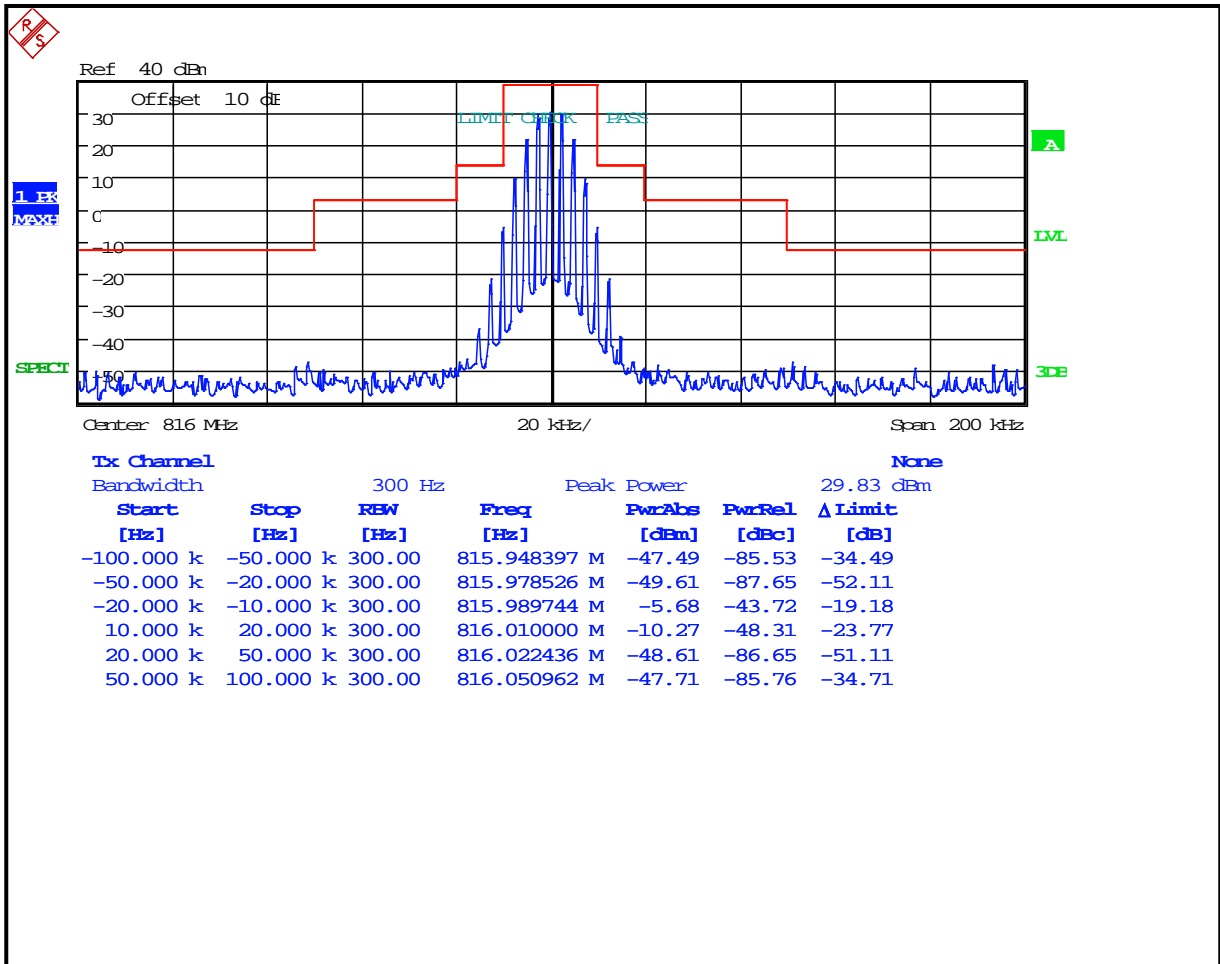





**Plot 8-86: Occupied Bandwidth – 851 MHz; NPSPAC; Mask B**

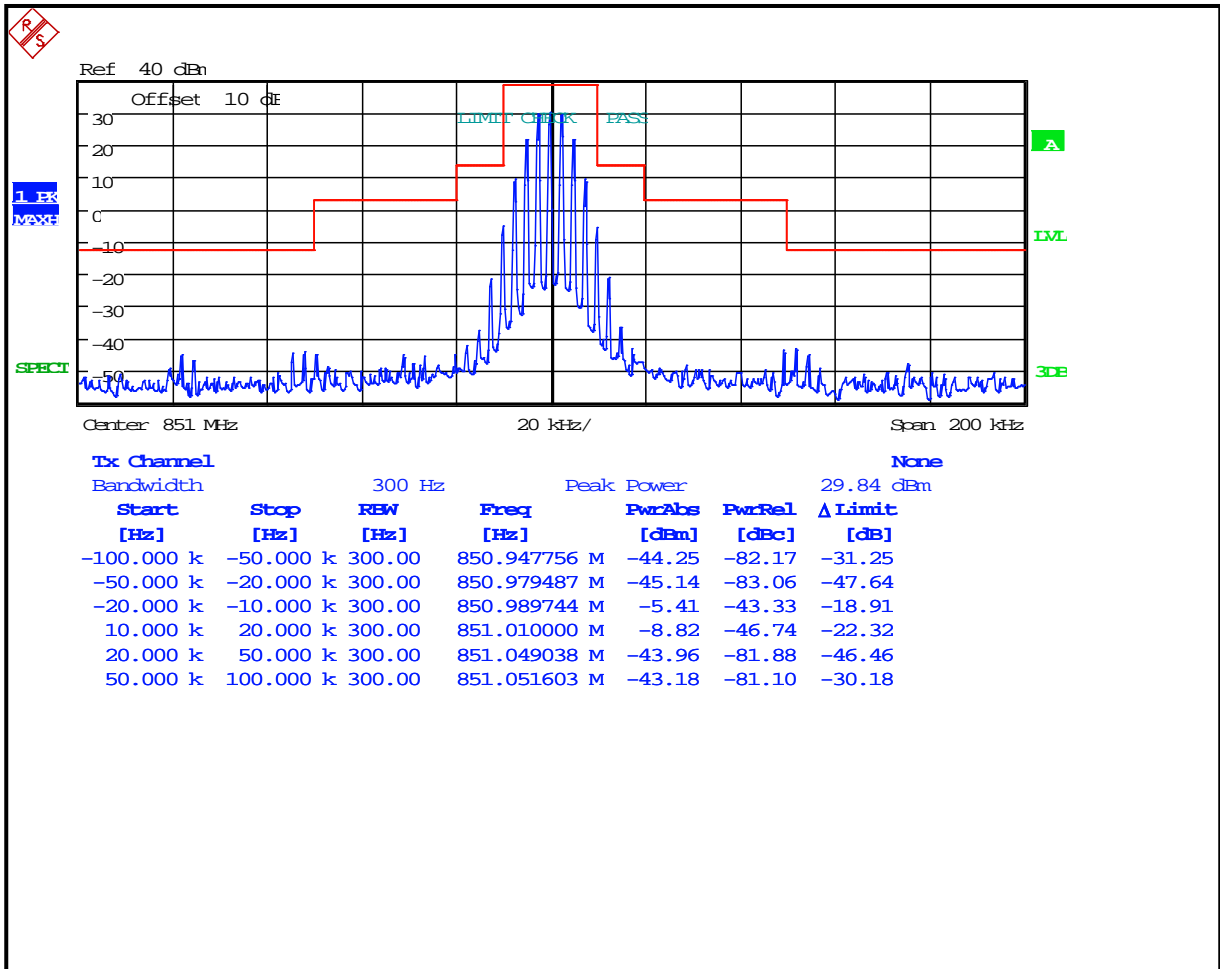


**Plot 8-87: Occupied Bandwidth – 861 MHz; NPSPAC; Mask B**

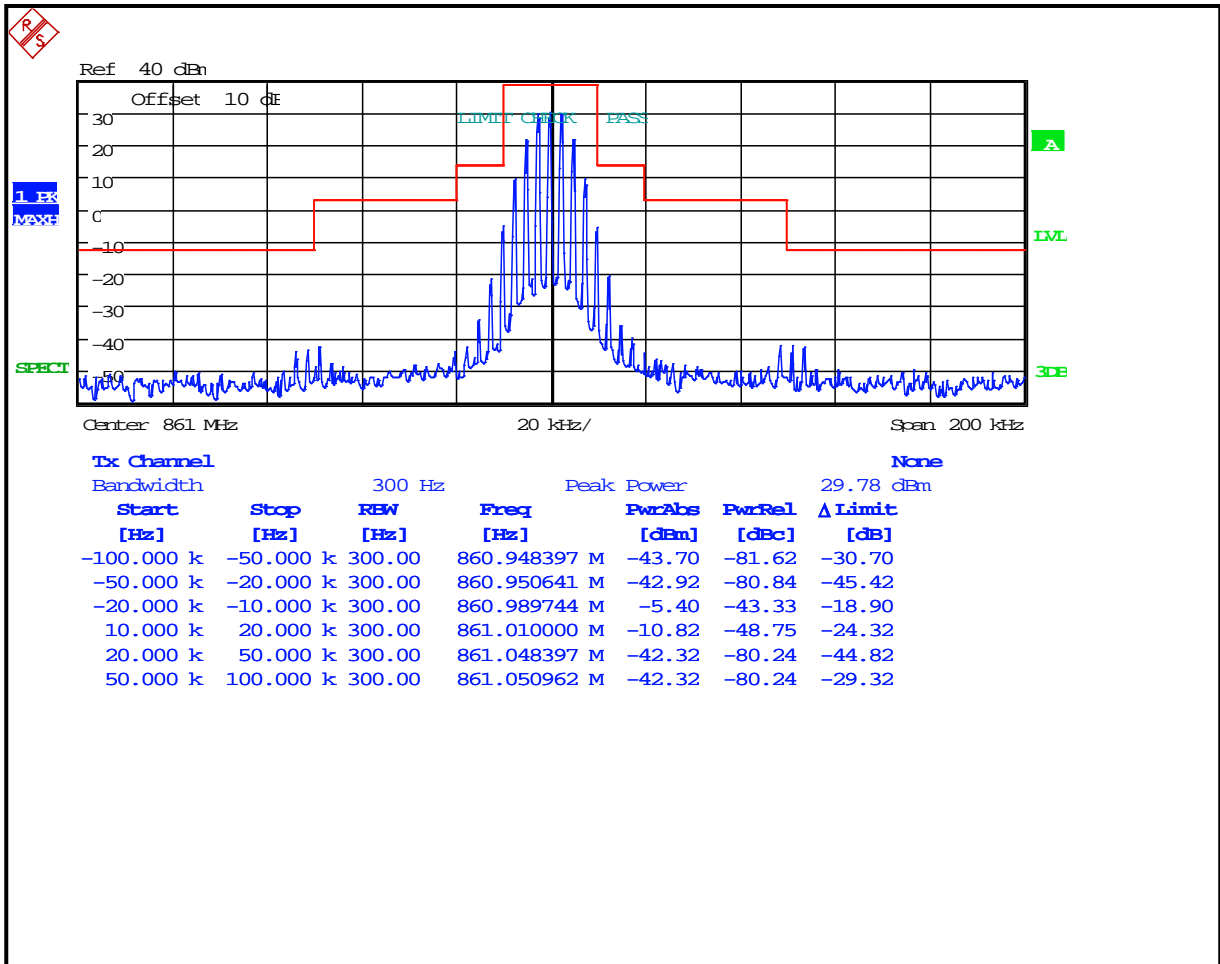


**Plot 8-88: Occupied Bandwidth – 806 MHz; P25 RND; Mask H**

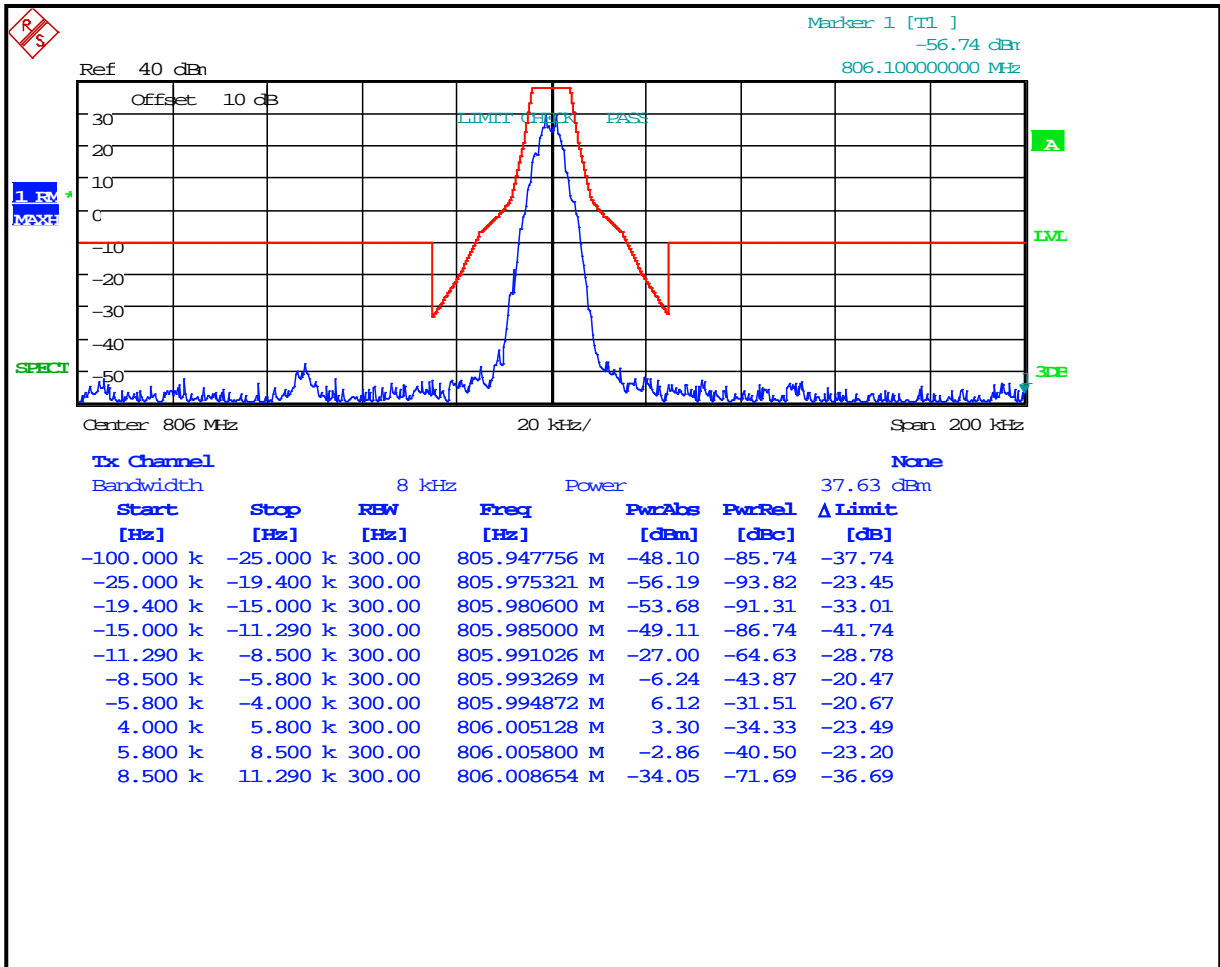


**Plot 8-89: Occupied Bandwidth – 815 MHz; P25 RND; Mask G**

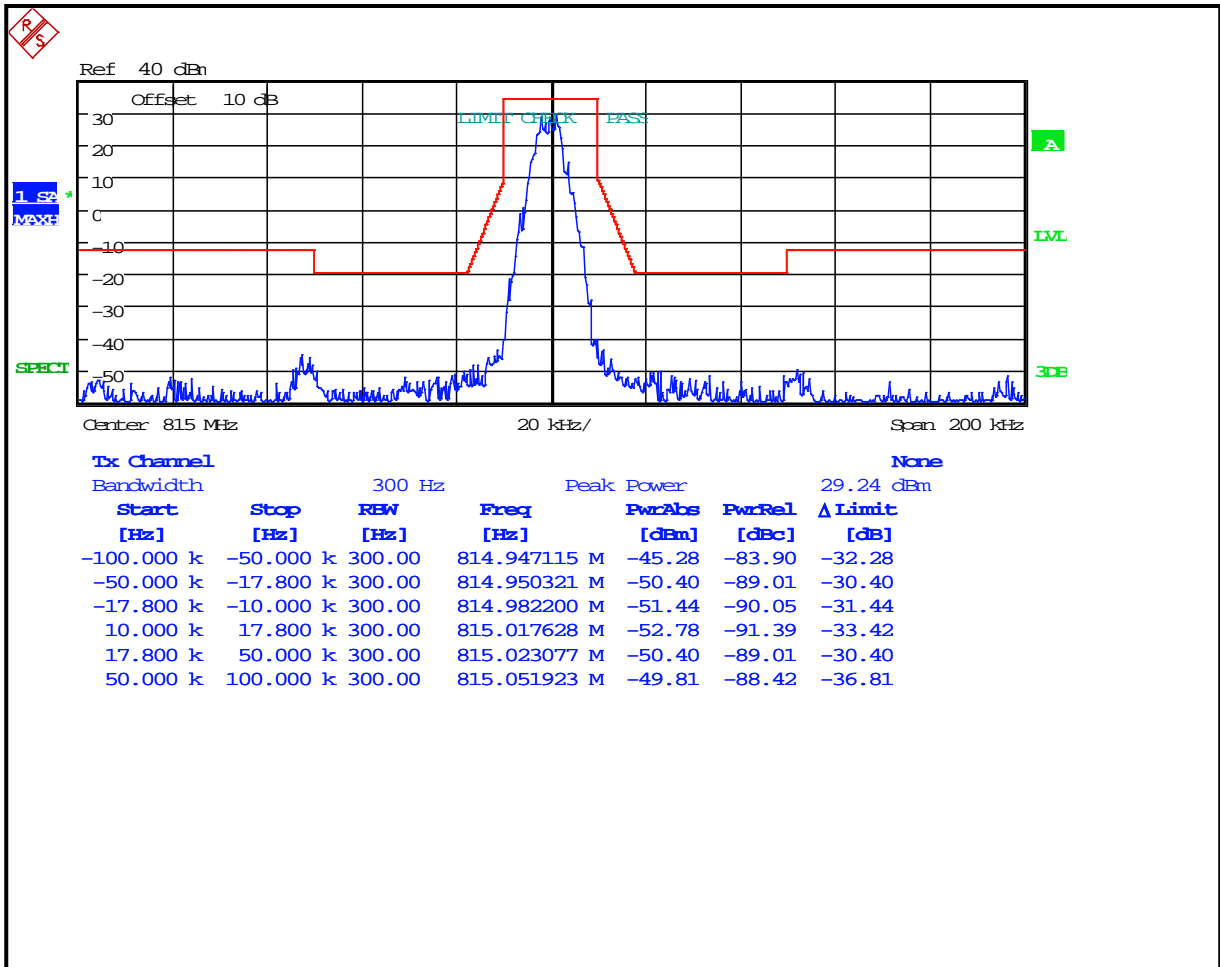


**Plot 8-90: Occupied Bandwidth – 854 MHz; P25 RND; Mask H**

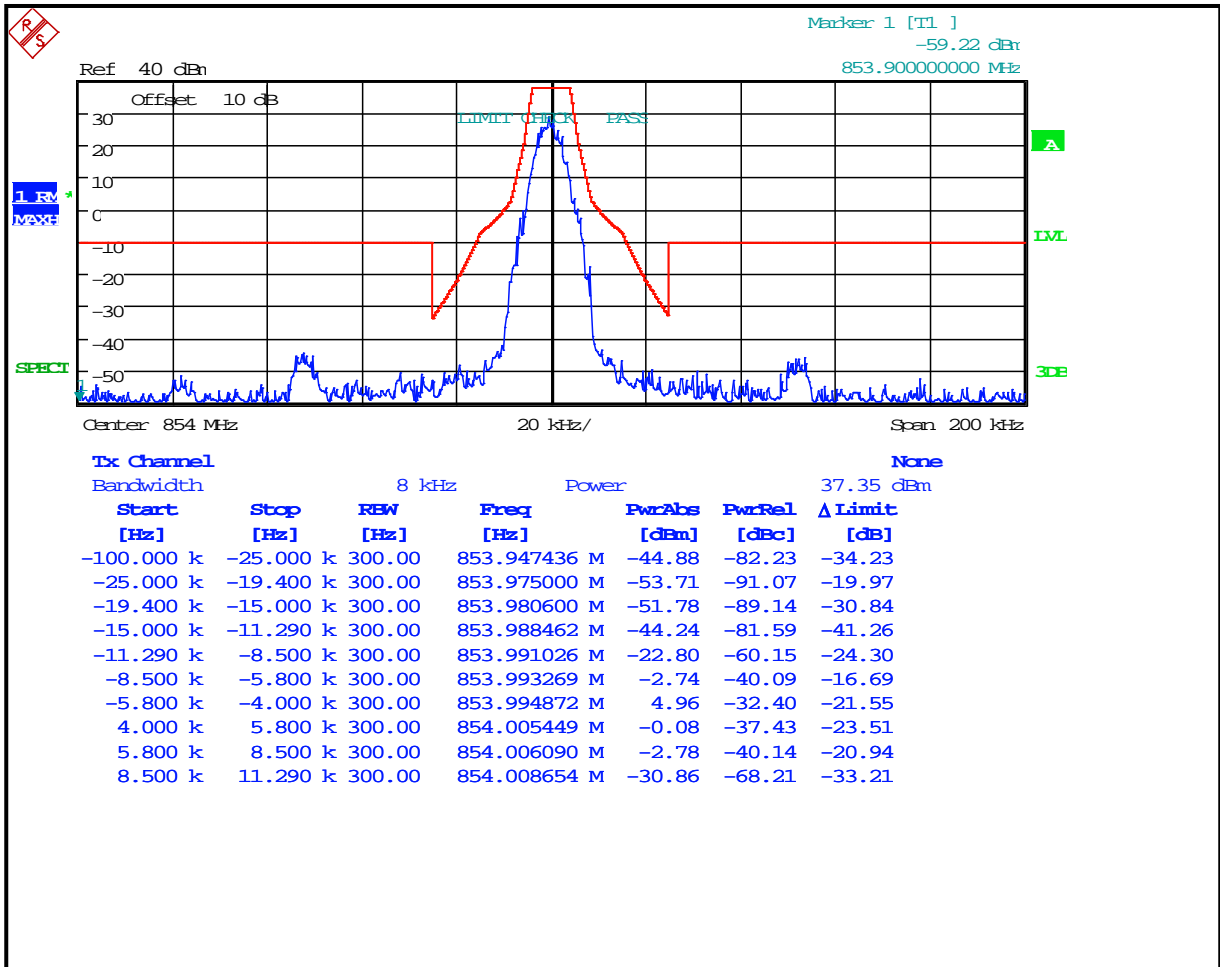


**Plot 8-91: Occupied Bandwidth – 860 MHz; P25 RND; Mask G**

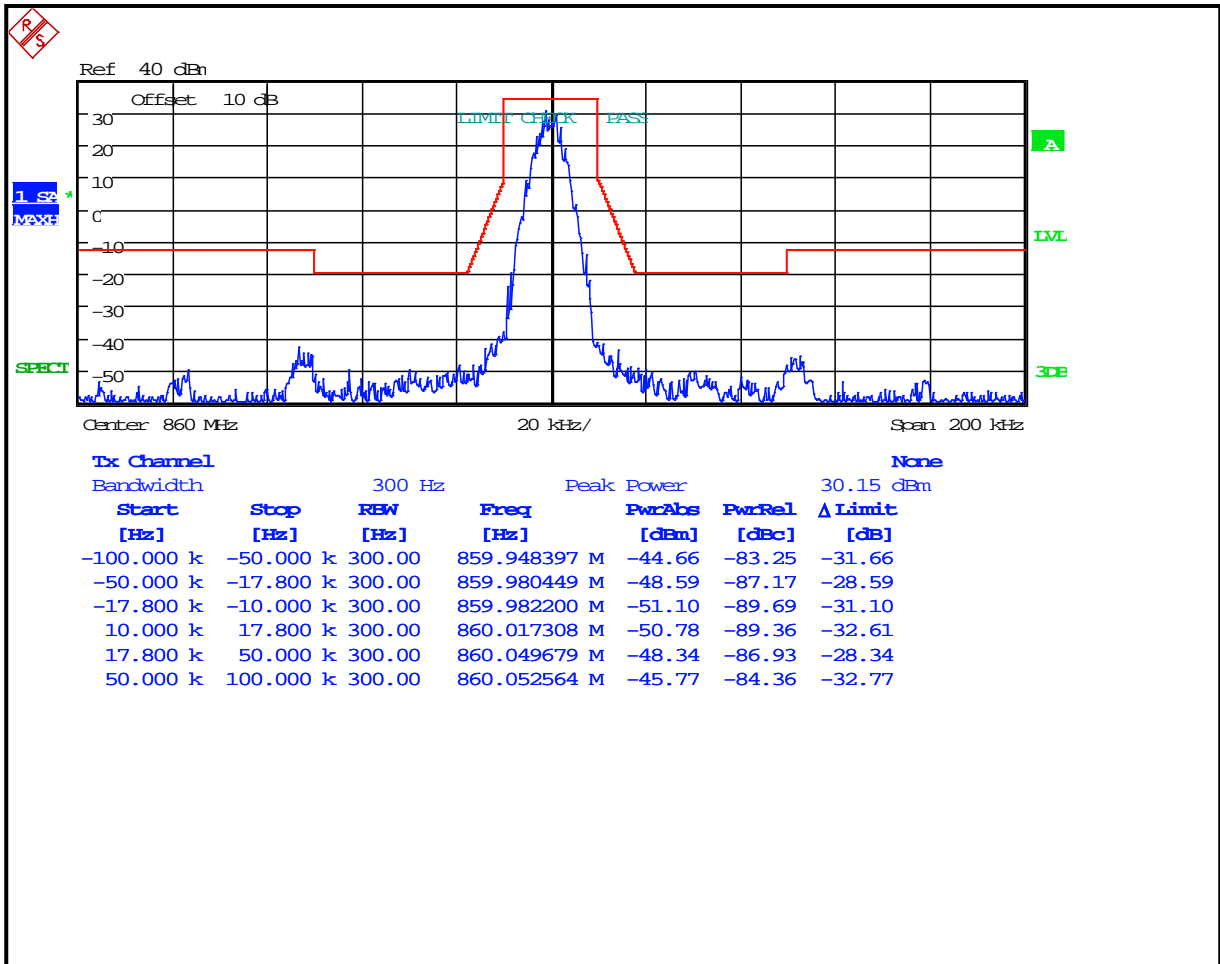

**Plot 8-92: Occupied Bandwidth – 806 MHz; CPM TDMA; Mask H**

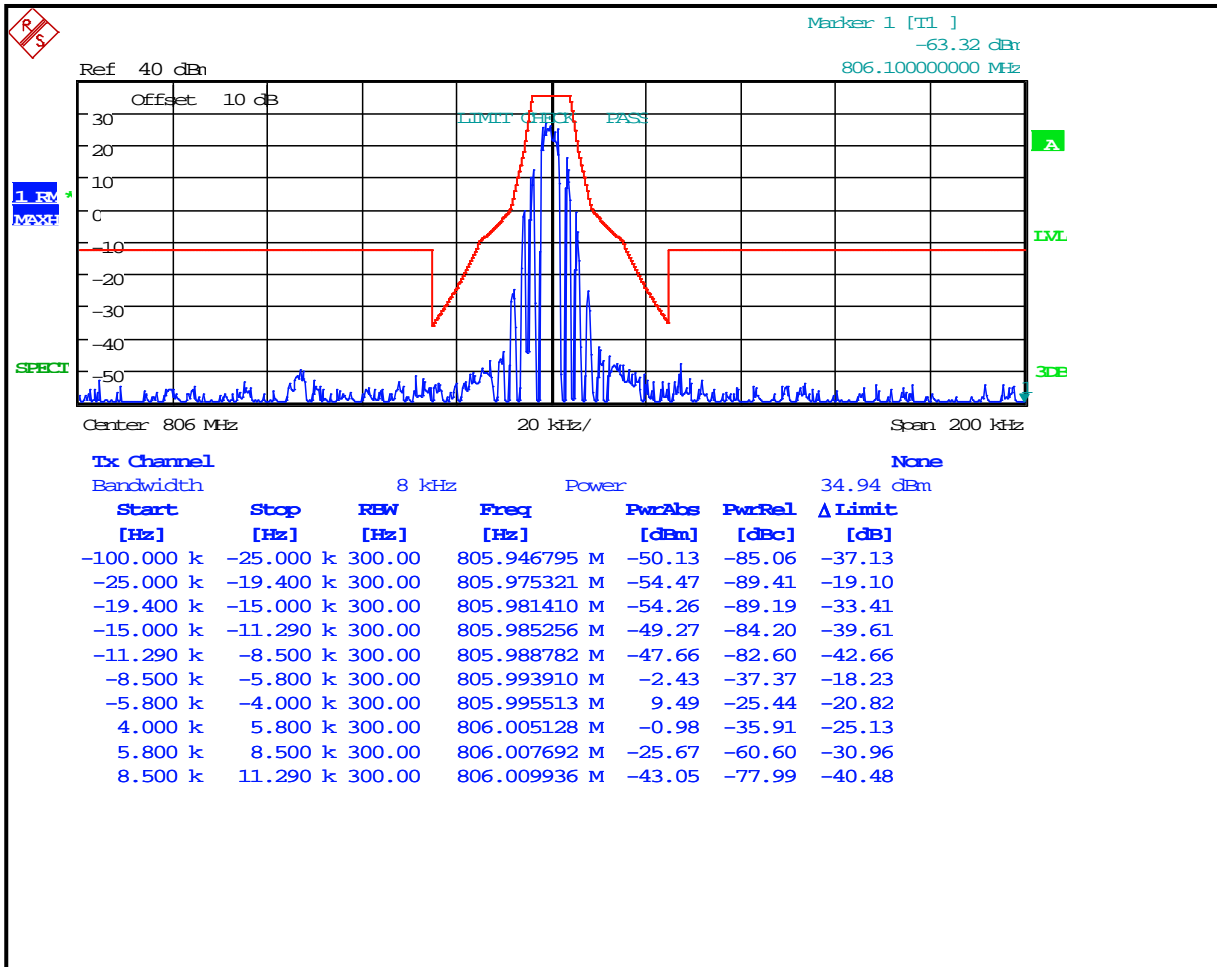


**Plot 8-93: Occupied Bandwidth – 815 MHz; CPM TDMA; Mask G**

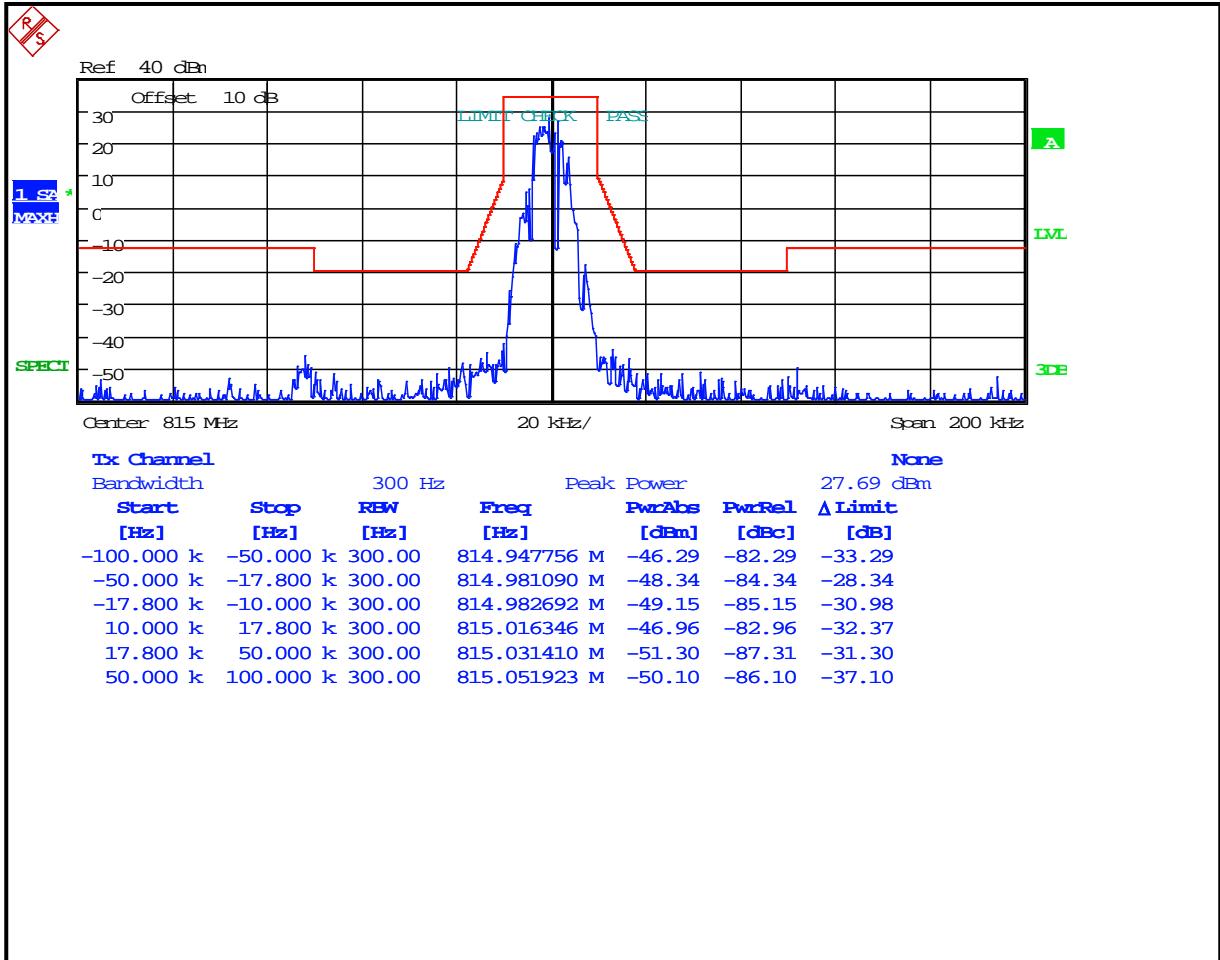





**Plot 8-94: Occupied Bandwidth – 854 MHz; CPM TDMA; Mask H**

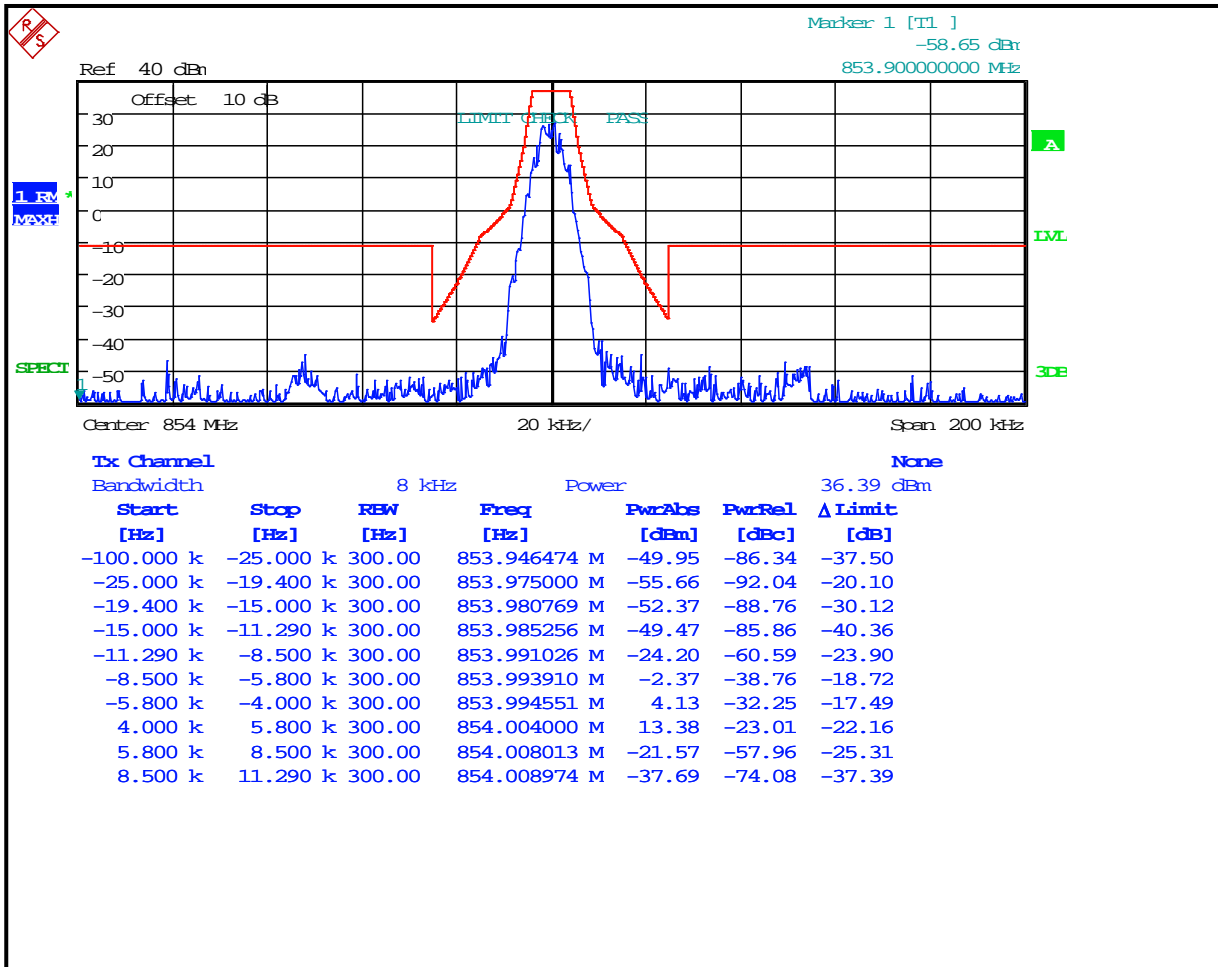


**Plot 8-95: Occupied Bandwidth – 860 MHz; CPM TDMA; Mask G**

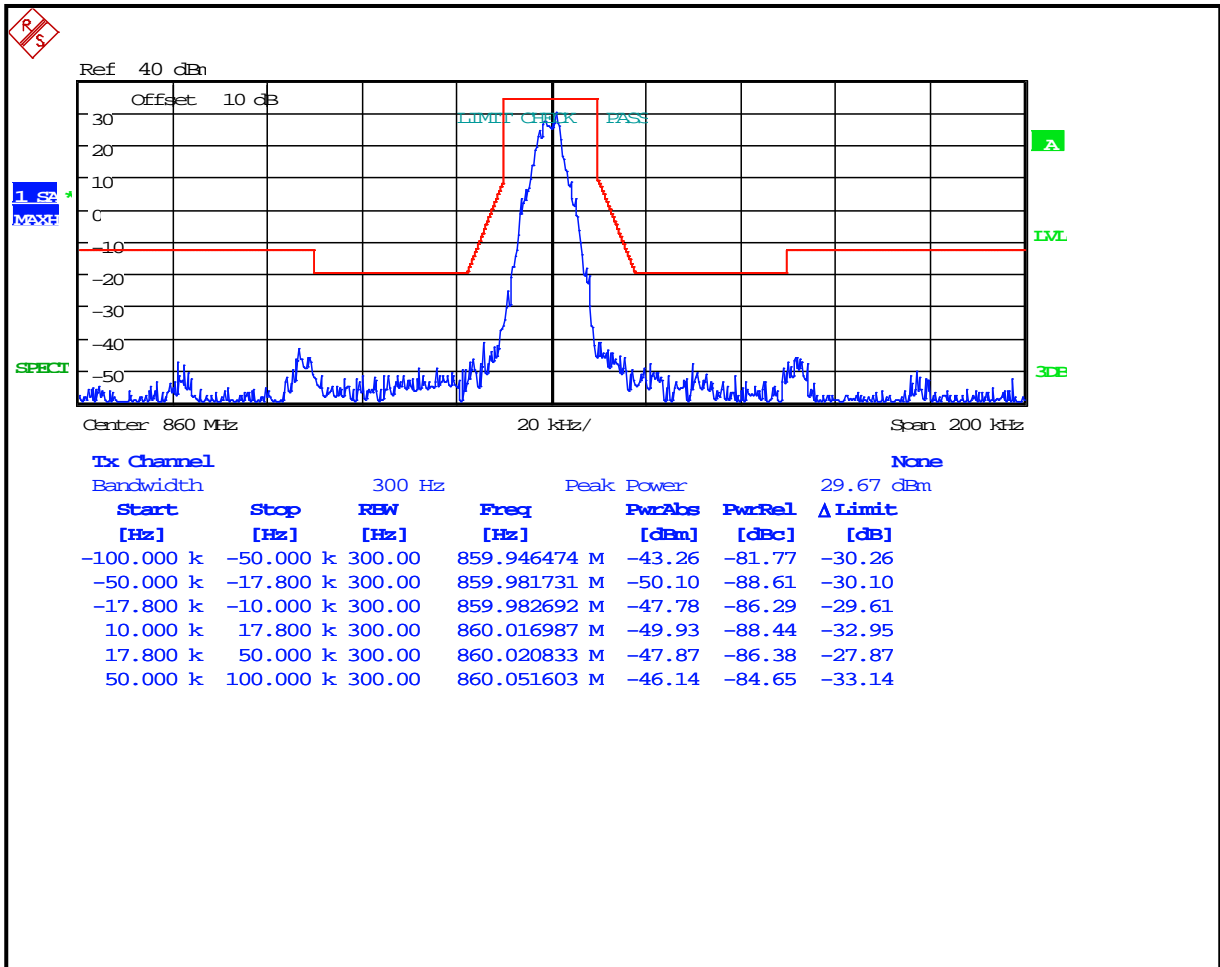


**Plot 8-96: Occupied Bandwidth – 815 MHz; 4-level FSK Data/Voice; NB OpenSky; Mask G**

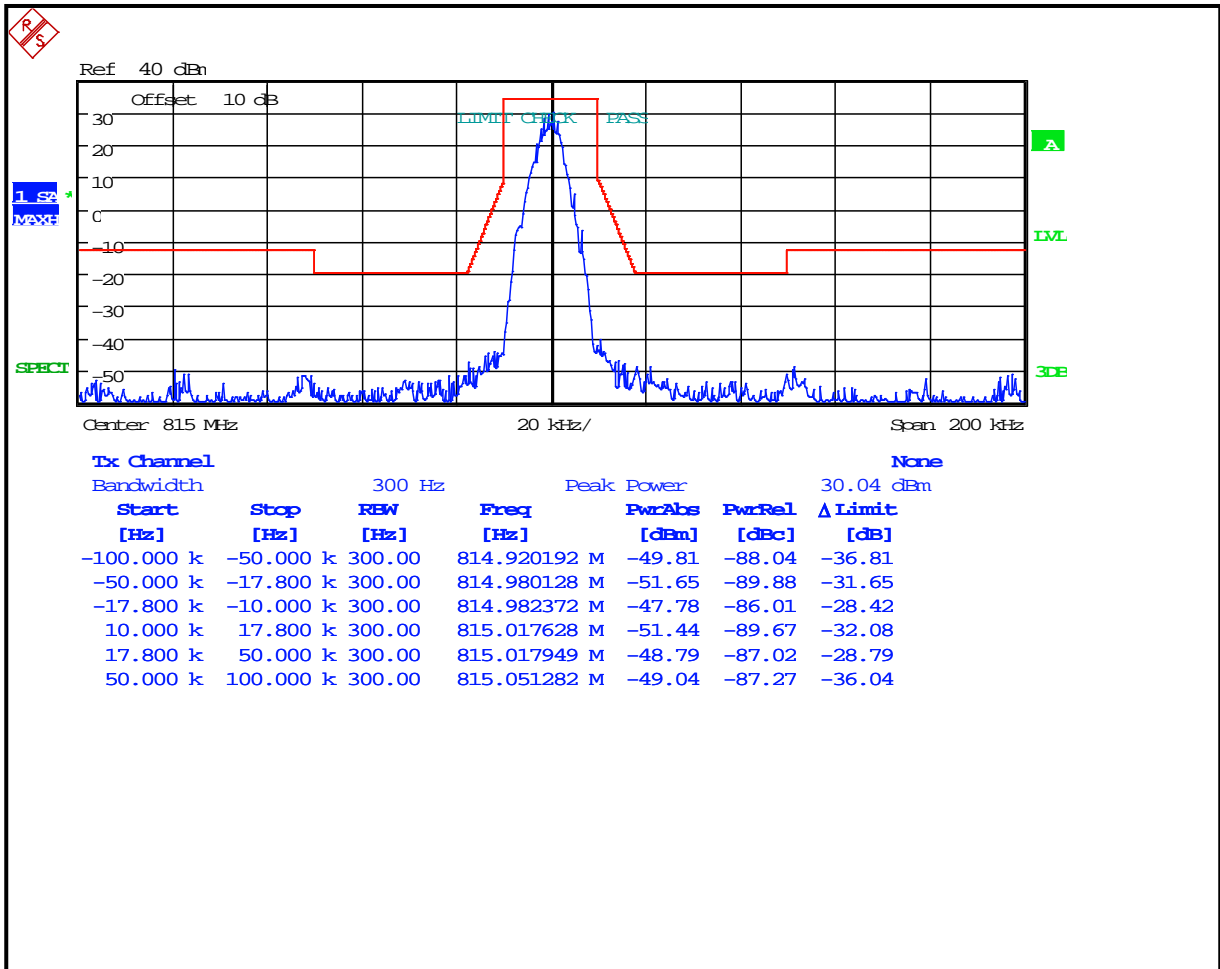


**Plot 8-97: Occupied Bandwidth – 860 MHz; 4-level FSK Data/Voice; NB OpenSky; Mask G**

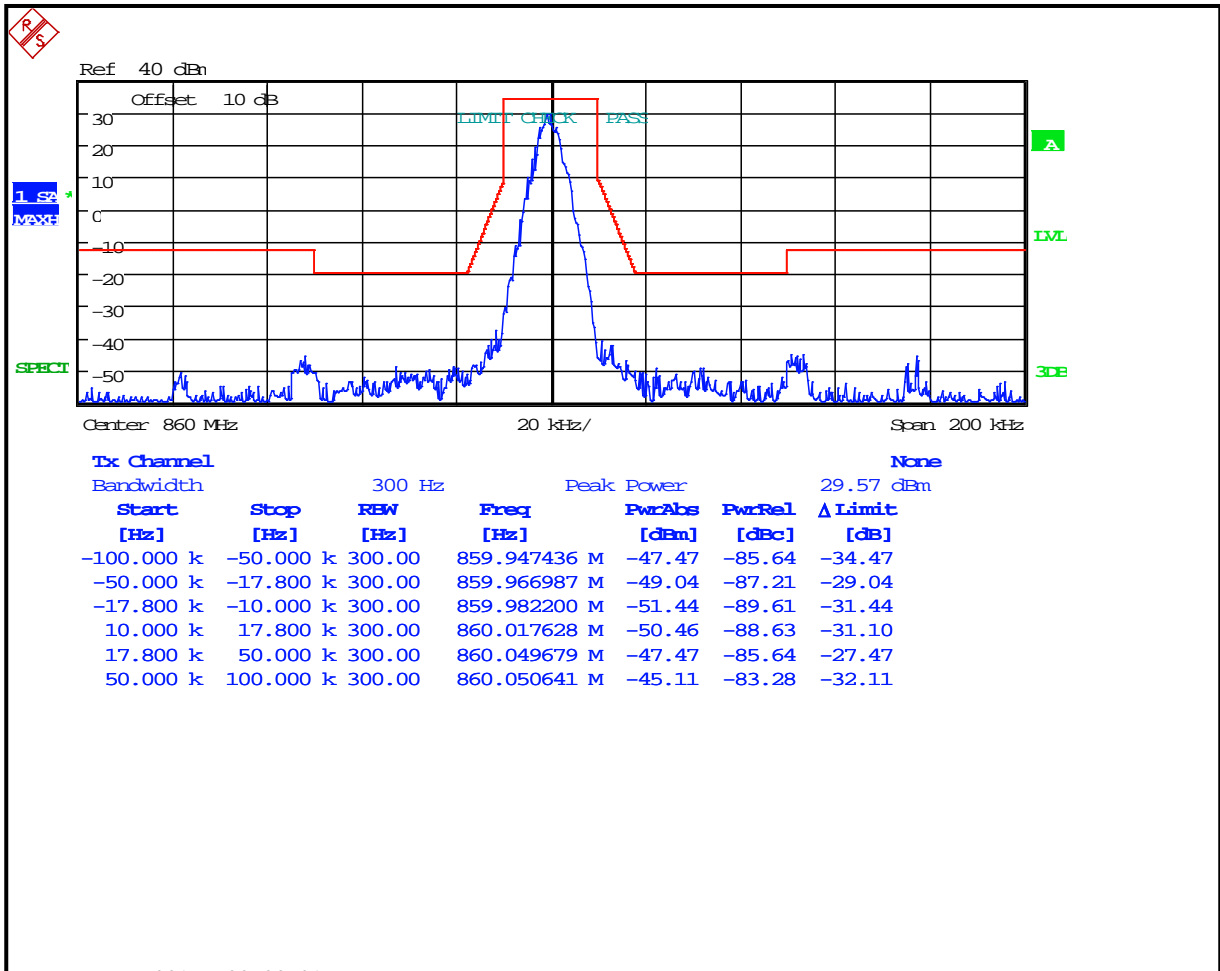


**Plot 8-98: Occupied Bandwidth – 815 MHz; 2-level FSK 9600; NB EDACS; Mask G**

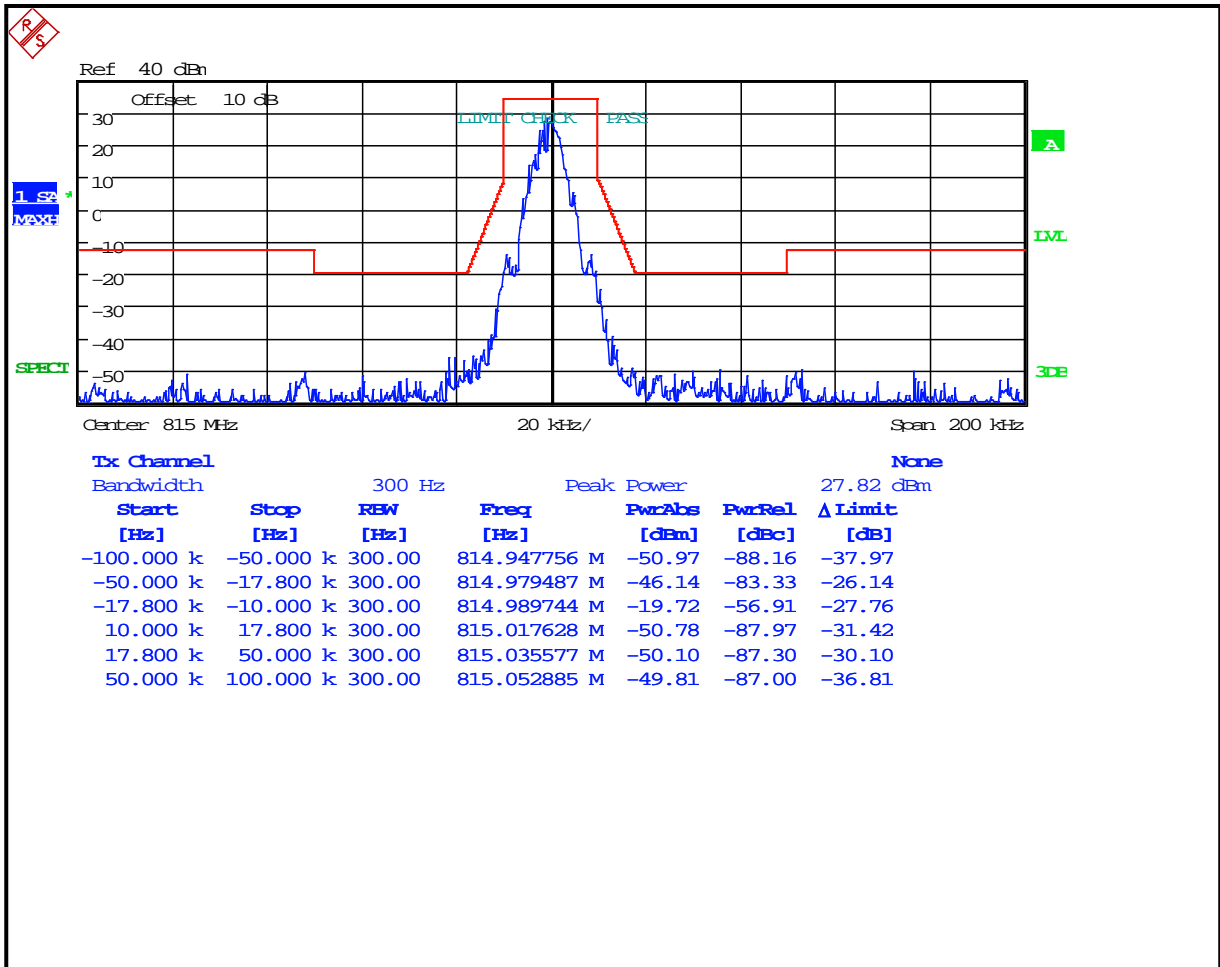


**Plot 8-99: Occupied Bandwidth – 860 MHz; 2-level FSK 9600; NB EDACS; Mask G**

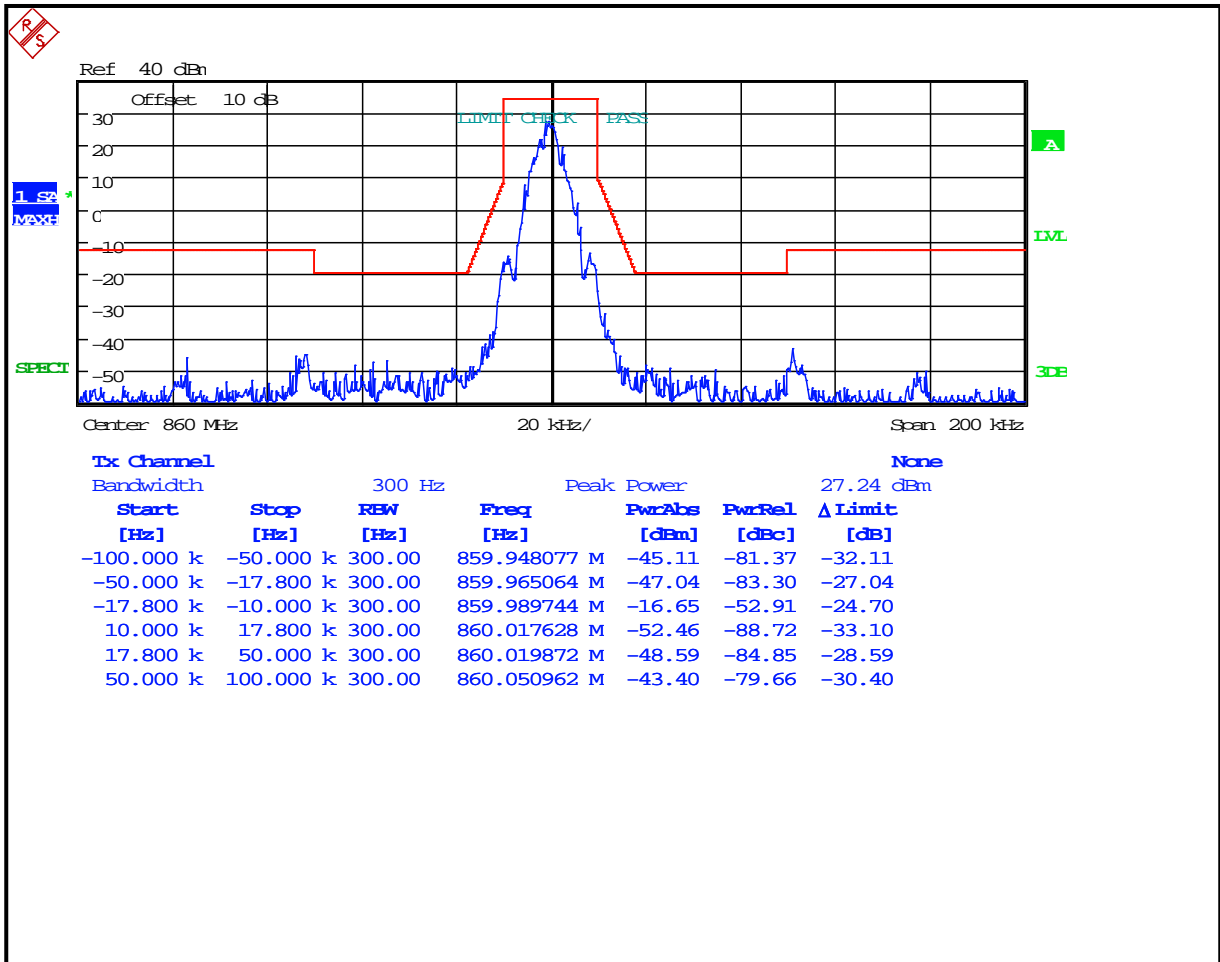

**Plot 8-100: Occupied Bandwidth – 815 MHz; 2-level FSK 9600; WB EDACS; Mask G**

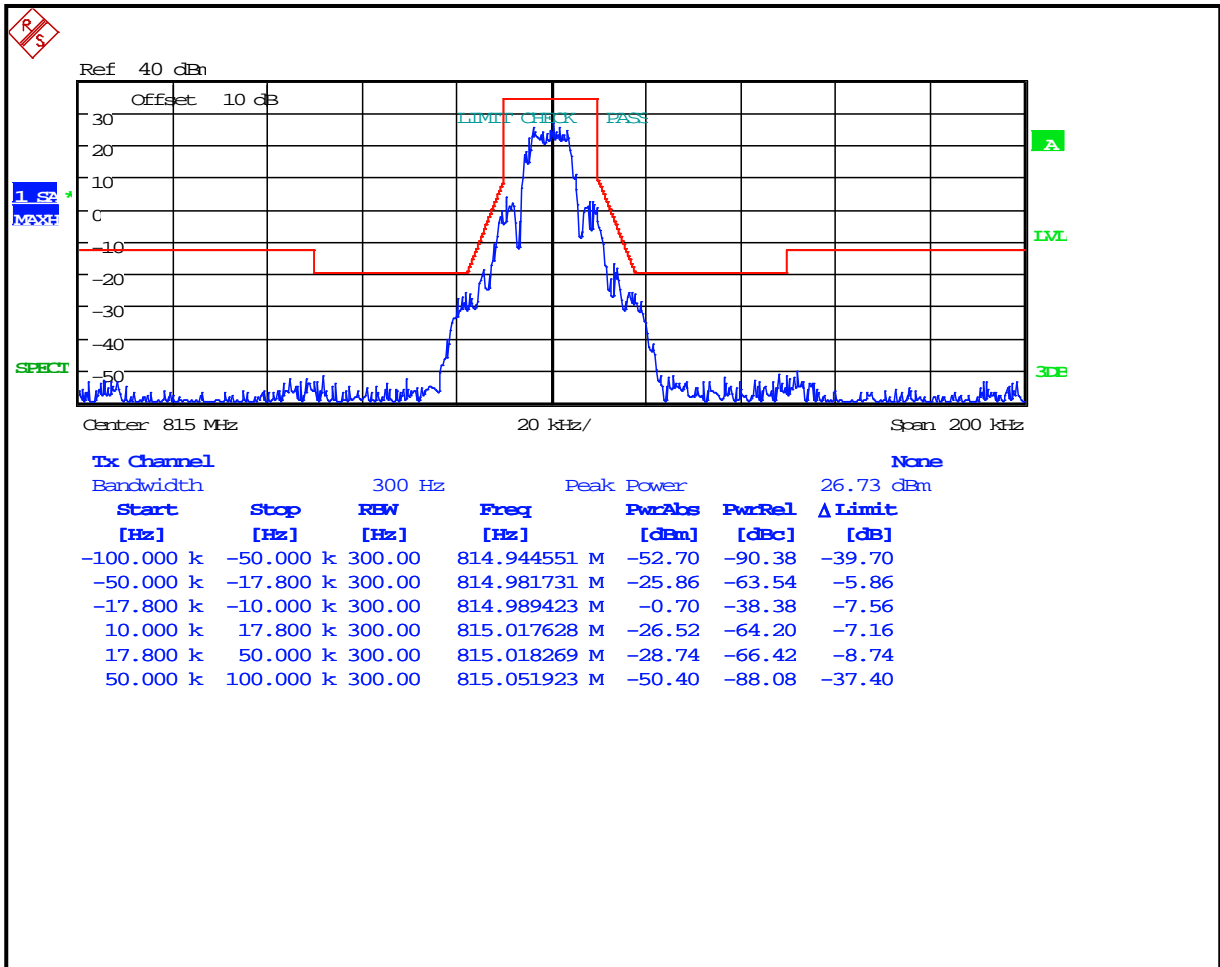


**Plot 8-101: Occupied Bandwidth – 860 MHz; 2-level FSK 9600; WB EDACS; Mask G**

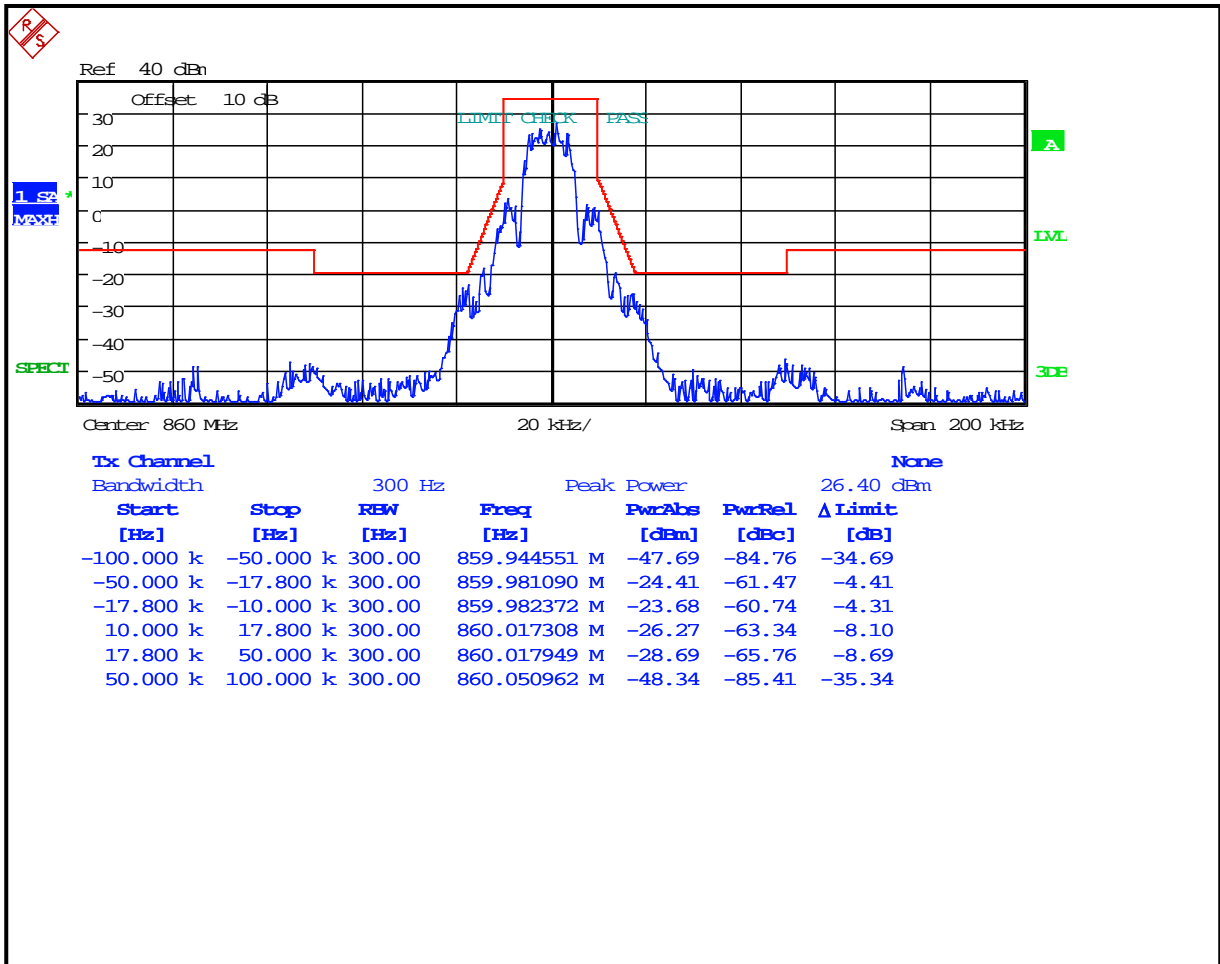





**Plot 8-102: Occupied Bandwidth – 806 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask H**

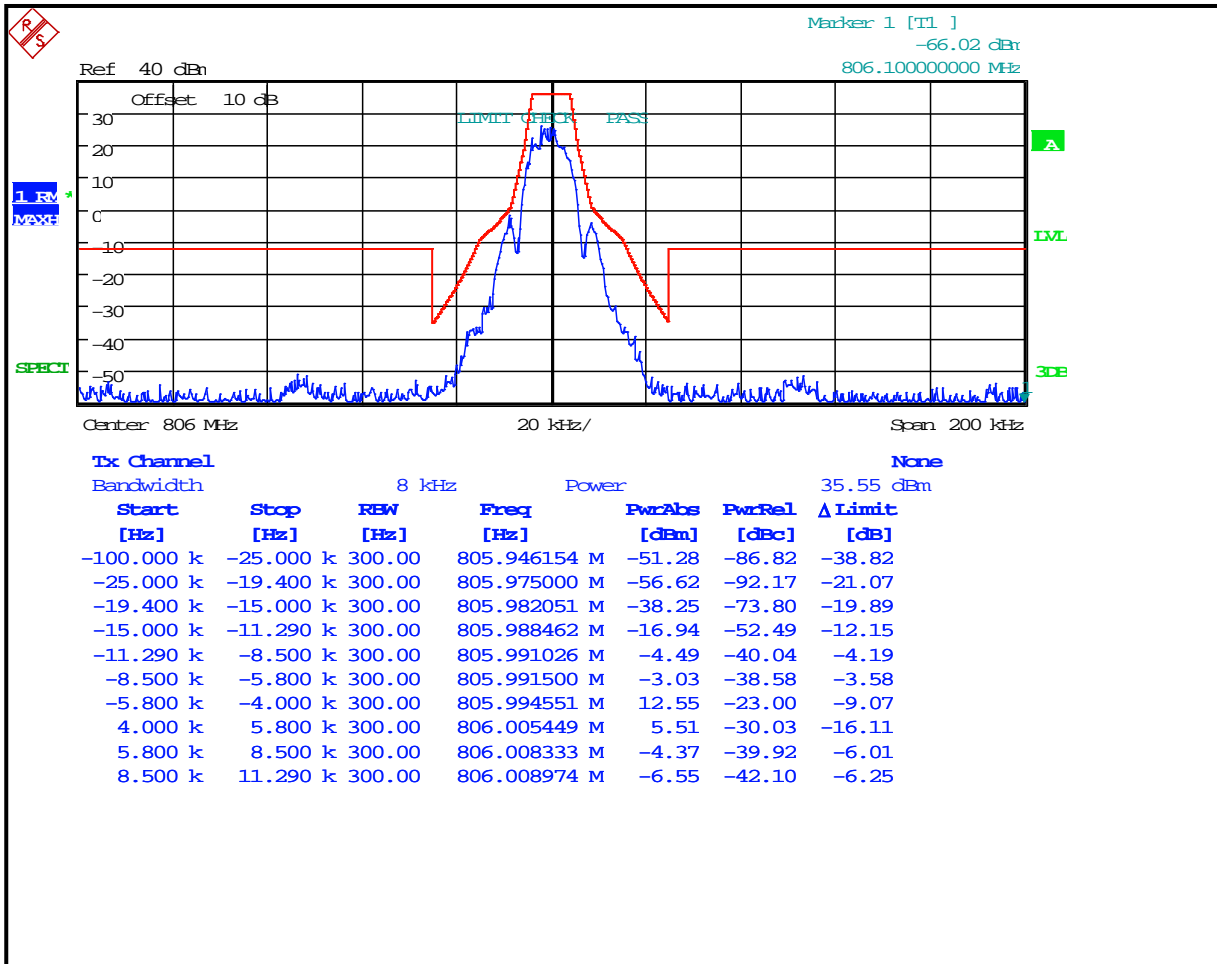


**Plot 8-103: Occupied Bandwidth – 815 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask G**

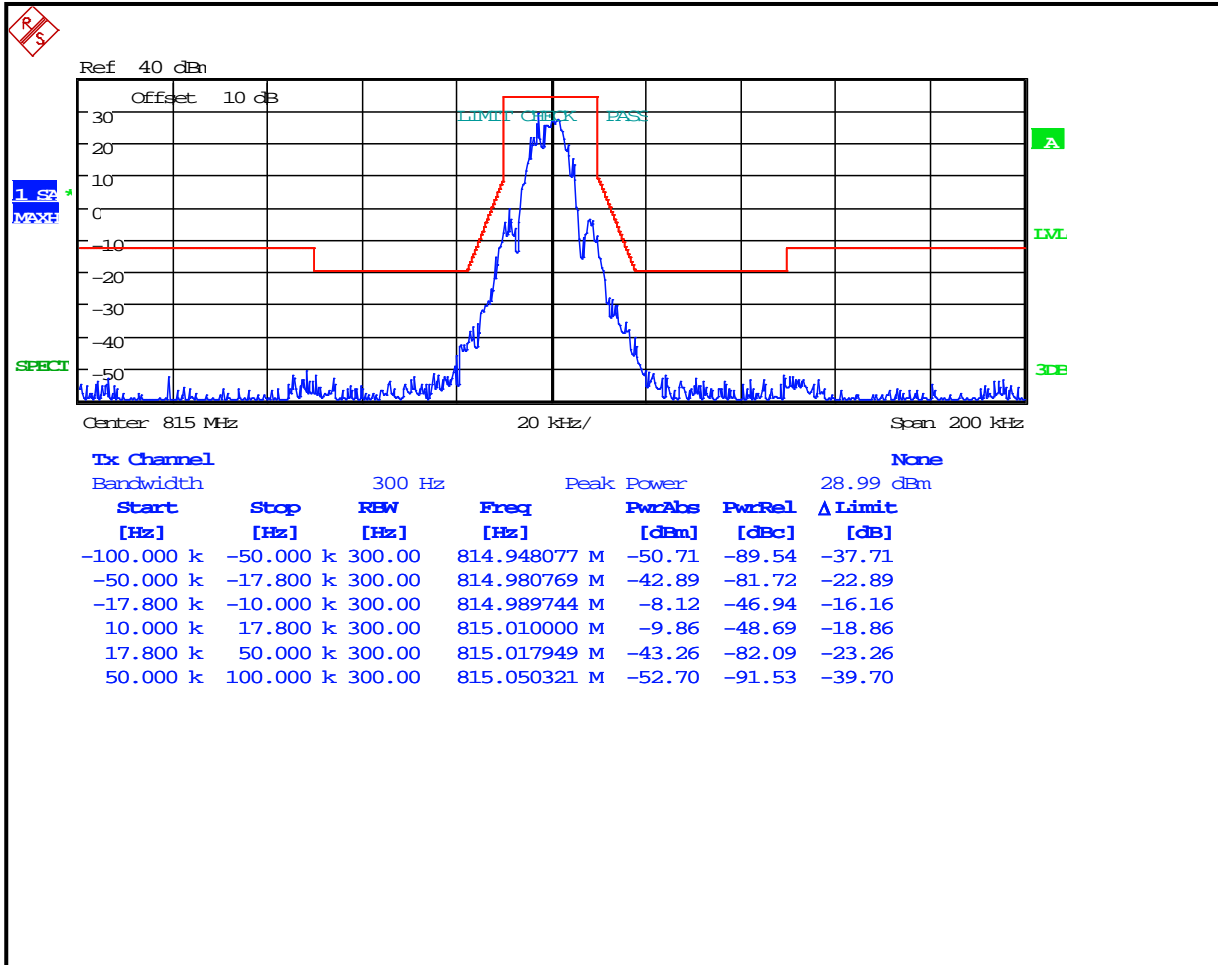


**Plot 8-104: Occupied Bandwidth – 851 MHz; 4-level FSK Data/Voice; NB NPSPAC EDACS; Mask H**

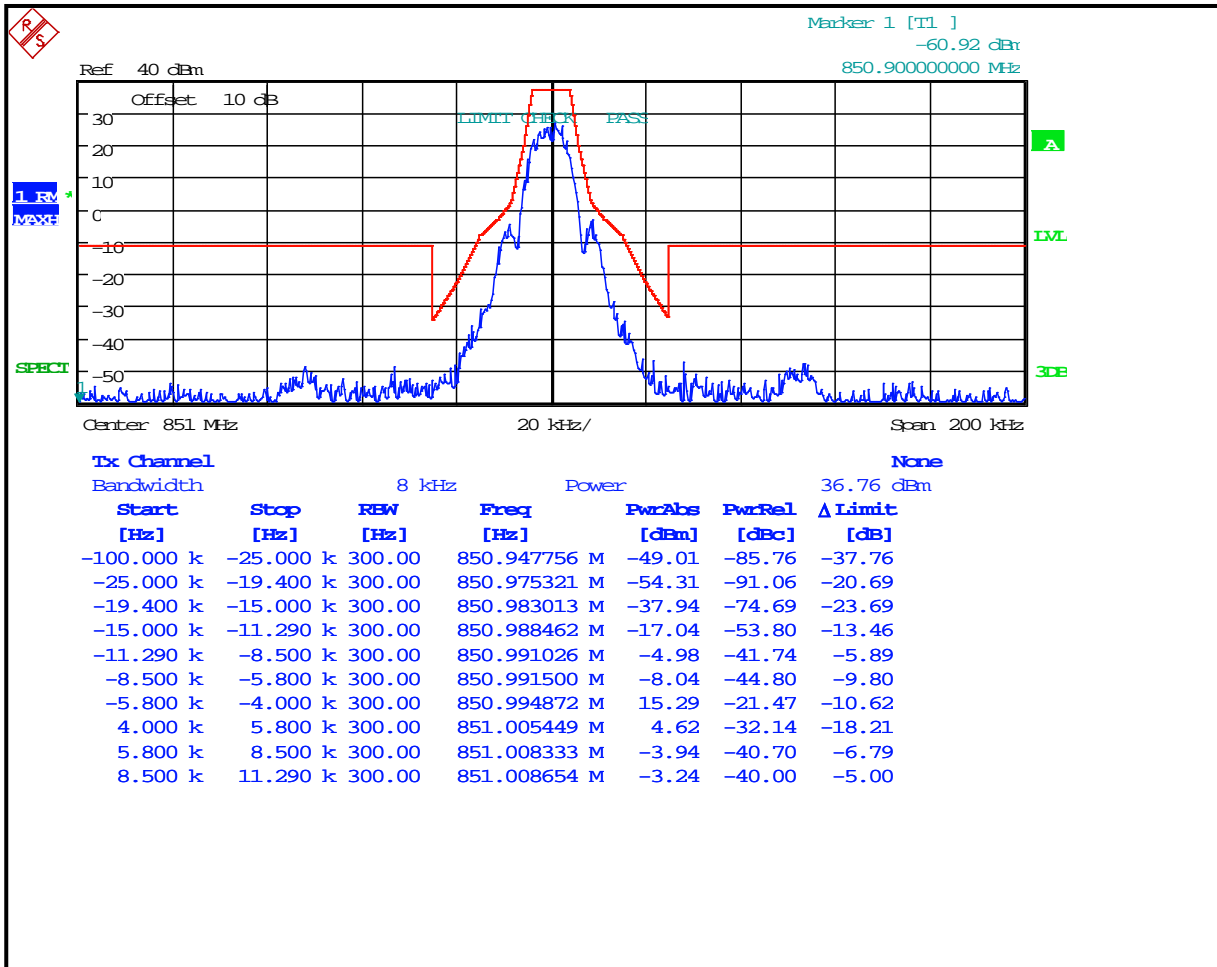


**Plot 8-105: Occupied Bandwidth – 806 MHz; 4-level FSK Data/Voice; NPSPAC OpenSky; Mask H**

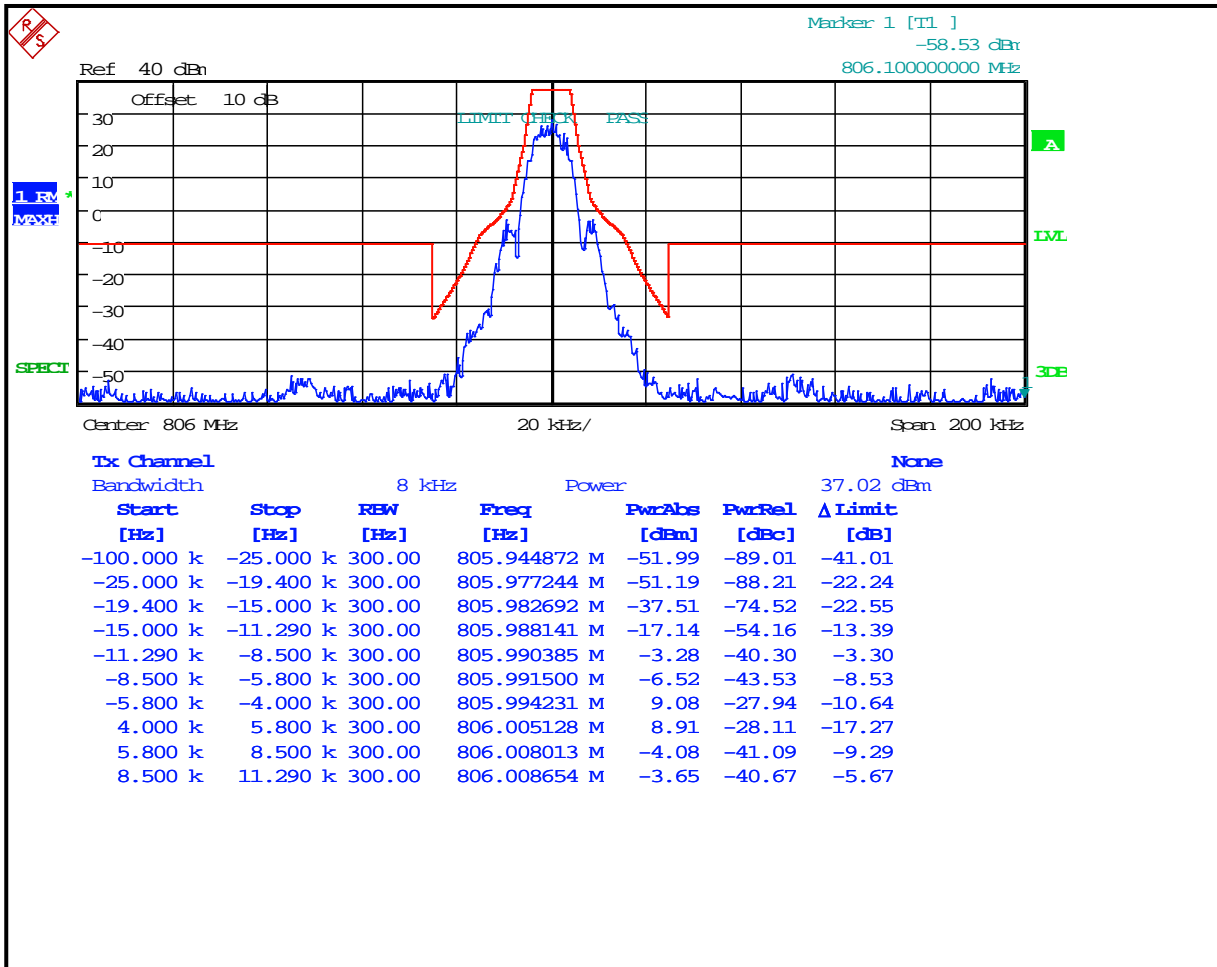


**Plot 8-106: Occupied Bandwidth – 851 MHz; 4-level FSK Data/Voice; NPSPAC OpenSky; Mask H**

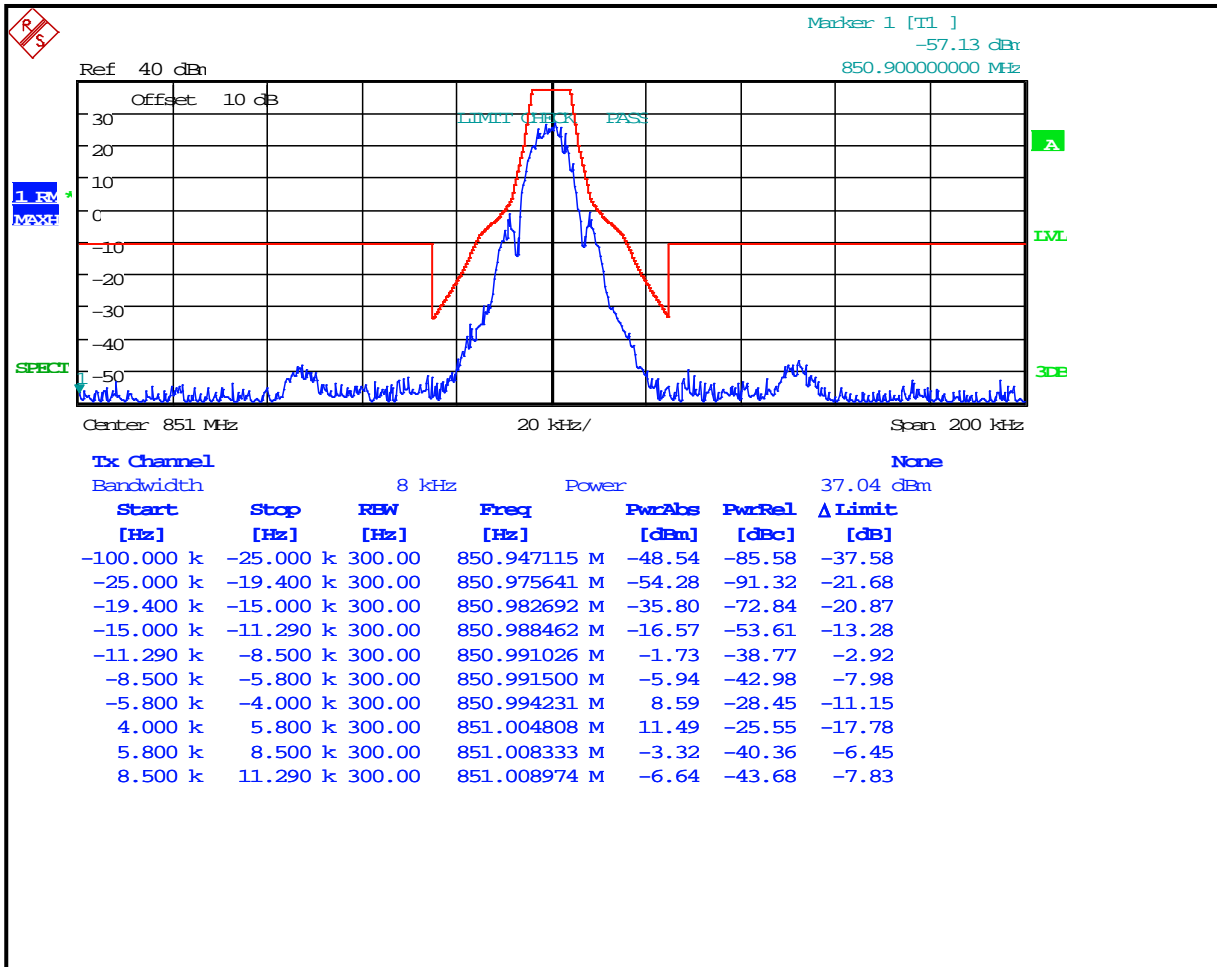

**Plot 8-107: Occupied Bandwidth – 815 MHz; 4-level FSK Data/Voice; SMR OpenSky; Mask G**

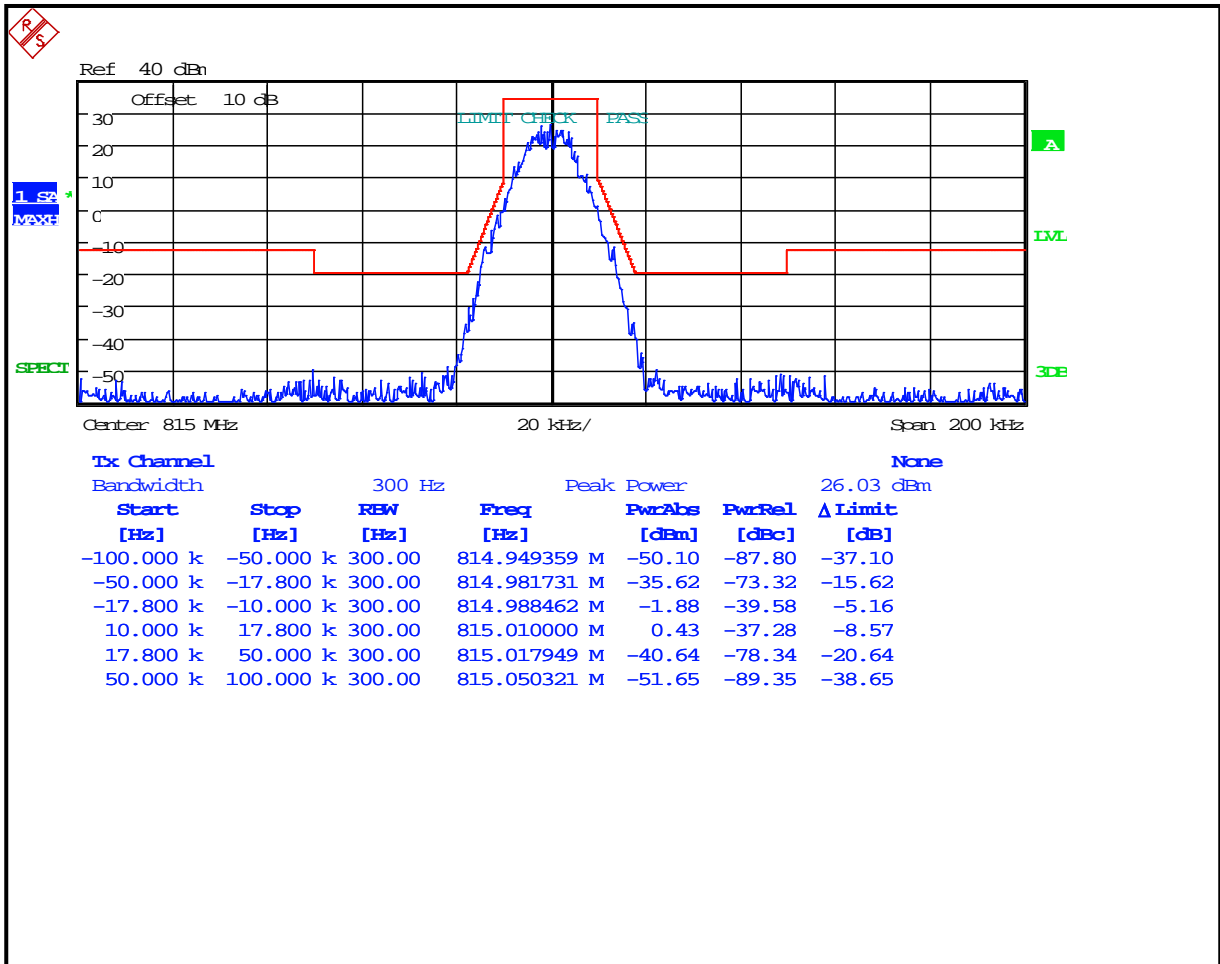

**Plot 8-108: Occupied Bandwidth – 860 MHz; 4-level FSK Data/Voice; SMR OpenSky; Mask G**

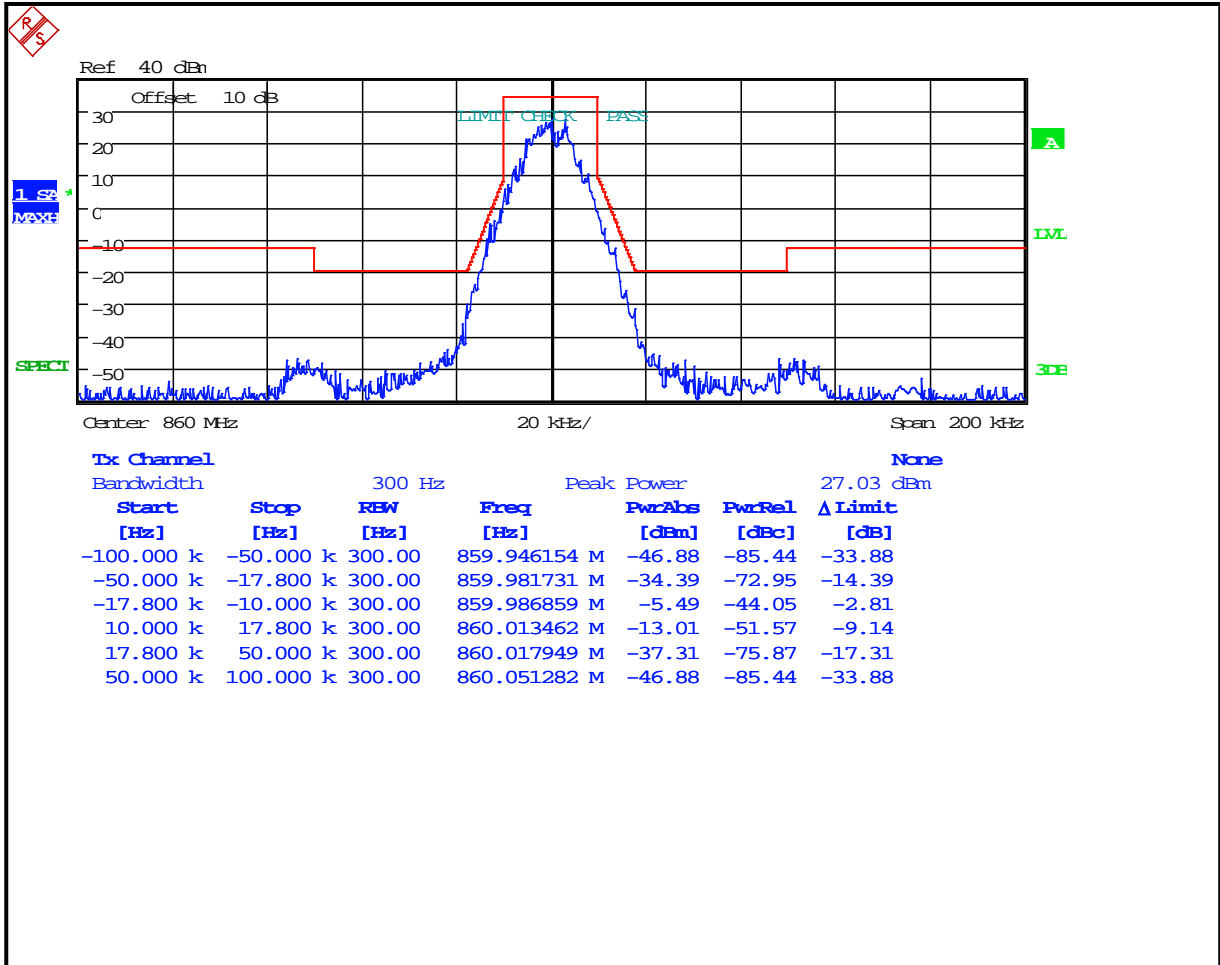

**Table 8-1: Test Equipment Used For Testing Occupied Bandwidth**

| RTL Asset # | Manufacturer          | Model    | Part Type                         | Serial Number | Calibration Due Date |
|-------------|-----------------------|----------|-----------------------------------|---------------|----------------------|
| 901581      | Rohde & Schwarz       | FSU      | Spectrum Analyzer                 | 1166.1660.50  | 3/22/18              |
| 900948      | Weinschel Corporation | 47-10-43 | Attenuator DC-18 GHz<br>10 dB 50W | BH1487        | 9/1/18               |
| 901057      | Hewlett Packard       | 3336B    | Synthesizer/<br>Level Generator   | 2514A02585    | 4/13/18              |

**Test Personnel:**

---

|                 |  |               |
|-----------------|--|---------------|
| Daniel Baltzell |  | May 25, 2017  |
| Test Engineer   | Signature  | Date of Tests |



**9 FCC §2.1055: Frequency Stability; §22.355: Frequency Tolerance; §74.464; Frequency Tolerance; §80.209: Frequency Stability; §90.213, §90.539: Frequency Stability; RSS-119 5.3 Transmitter Frequency Stability**

**9.1 Test Procedure**

ANSI C63.26 5.6

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +55°C.

The temperature was initially set to -30°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

§80.209: 10 ppm. 400-466 MHz 5 ppm

§90.213: Mobile stations over 2 W operating power - 1.5 ppm.

**§90.213 Frequency Stability**

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

| MINIMUM FREQUENCY STABILITY<br>[Parts per million (ppm)] |                         |                           |                              |
|--|-------------------------|---------------------------|------------------------------|
| Frequency range (MHz)                                    | Fixed and base stations | Mobile stations           |                              |
|  |                         | Over 2 watts output power | 2 watts or less output power |
| Below 25 .....   | <sup>1,2,3</sup> 100    | 100                       | 200                          |
| 25-50 .....  | 20                      | 20                        | 50                           |
| 72-76 .....  | 5                       | .....                     | 50                           |
| 150-174 .....  | <sup>5,11</sup> 5       | <sup>6</sup> 5            | <sup>4,6</sup> 50            |
| 216-220 .....  | 1.0                     | .....                     | 1.0                          |
| 220-222 <sup>12</sup> .....                              | 0.1                     | 1.5                       | 1.5                          |
| 421-512 .....  | <sup>7,11,14</sup> 2.5  | <sup>8</sup> 5            | <sup>8</sup> 5               |
| 806-809 .....  | <sup>14</sup> 1.0       | 1.5                       | 1.5                          |
| 809-824 .....  | <sup>14</sup> 1.5       | 2.5                       | 2.5                          |
| 851-854 .....  | 1.0                     | 1.5                       | 1.5                          |
| 854-869 .....  | 1.5                     | 2.5                       | 2.5                          |
| 896-901 .....  | <sup>14</sup> 0.1       | 1.5                       | 1.5                          |
| 902-928 .....  | 2.5                     | 2.5                       | 2.5                          |
| 902-928 <sup>13</sup> .....                              | 2.5                     | 2.5                       | 2.5                          |
| 929-930 .....  | 1.5                     | .....                     | .....                        |
| 935-940 .....  | 0.1                     | 1.5                       | 1.5                          |
| 1427-1435 .....  | <sup>9</sup> 300        | 300                       | 300                          |
| Above 2450 <sup>10</sup> .....                           | .....                   | .....                     | .....                        |

**§90.539 Frequency Stability**

Transmitters designed to operate in 769–774.9875 MHz and 799–805.9875 MHz frequency bands must meet the frequency stability requirements in this section.

- (a) Mobile, portable and control transmitters must normally use automatic frequency control (AFC) to lock on to the base station signal.
- (b) The frequency stability of base transmitters operating in the narrowband segment must be 100 parts per billion or better.
- (c) The frequency stability of mobile, portable, and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).
- (d) The frequency stability of base transmitters operating in the wideband segment must be 1 part per million or better.
- (e) The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

The EUT was tested while the AFC was not locked, therefore, the limit is 1.5 ppm. The worst-case deviation was found to be 0.9 ppm.

**9.2 Test Data**

**Table 9-1: Temperature Frequency Stability – 162 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 161.999938              | -0.38 |
| -20              | 161.999959              | -0.25 |
| -10              | 161.999847              | -0.94 |
| 0                | 161.999894              | -0.65 |
| 10               | 162.000020              | 0.12  |
| 20 (reference)   | 162.000000              | 0.00  |
| 30               | 161.999999              | -0.01 |
| 40               | 161.999865              | -0.84 |
| 50               | 161.999963              | -0.23 |
| 55               | 161.999948              | -0.32 |

**Table 9-2: Temperature Frequency Stability – 418 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 417.999949              | -0.12 |
| -20              | 418.000049              | 0.12  |
| -10              | 417.999966              | -0.08 |
| 0                | 418.000115              | 0.27  |
| 10               | 418.000130              | 0.31  |
| 20 (reference)   | 418.000000              | 0.00  |
| 30               | 417.999947              | -0.13 |
| 40               | 418.000027              | 0.06  |
| 50               | 417.999959              | -0.10 |
| 55               | 417.999956              | -0.11 |

**Table 9-3: Temperature Frequency Stability – 470 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 469.999808              | -0.41 |
| -20              | 469.999781              | -0.47 |
| -10              | 469.999875              | -0.27 |
| 0                | 469.999785              | -0.46 |
| 10               | 469.999840              | -0.34 |
| 20 (reference)   | 470.000000              | 0.00  |
| 30               | 469.999848              | -0.32 |
| 40               | 469.999830              | -0.36 |
| 50               | 469.999715              | -0.61 |
| 55               | 469.999895              | -0.22 |

**Table 9-4: Temperature Frequency Stability – 768 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 768.000061              | 0.08  |
| -20              | 767.999903              | -0.13 |
| -10              | 768.000055              | 0.07  |
| 0                | 768.000075              | 0.10  |
| 10               | 768.000178              | 0.23  |
| 20 (reference)   | 768.000000              | 0.00  |
| 30               | 767.999906              | -0.12 |
| 40               | 768.000137              | 0.18  |
| 50               | 767.999932              | -0.09 |
| 60               | 767.999896              | -0.14 |

**Table 9-5: Temperature Frequency Stability – 798 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 798.000098              | 0.12  |
| -20              | 798.000026              | 0.03  |
| -10              | 798.000039              | 0.05  |
| 0                | 798.000085              | 0.11  |
| 10               | 798.000023              | 0.03  |
| 20 (reference)   | 798.000000              | 0.00  |
| 30               | 798.000013              | 0.02  |
| 40               | 798.000040              | 0.05  |
| 50               | 798.000030              | 0.04  |
| 55               | 797.999944              | -0.07 |

**Table 9-6: Temperature Frequency Stability – 815 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 815.000000              | 0.00  |
| -20              | 815.000020              | 0.02  |
| -10              | 815.000141              | 0.17  |
| 0                | 815.000122              | 0.15  |
| 10               | 815.000032              | 0.04  |
| 20 (reference)   | 815.000000              | 0.00  |
| 30               | 815.000039              | 0.05  |
| 40               | 814.999865              | -0.17 |
| 50               | 815.000010              | 0.01  |
| 55               | 815.000015              | 0.02  |

**Table 9-7: Temperature Frequency Stability – 860 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 860.000059              | 0.07  |
| -20              | 859.999882              | -0.14 |
| -10              | 859.999955              | -0.05 |
| 0                | 859.999949              | -0.06 |
| 10               | 860.000023              | 0.03  |
| 20 (reference)   | 860.000000              | 0.00  |
| 30               | 859.999932              | -0.08 |
| 40               | 859.999836              | -0.19 |
| 50               | 859.999929              | -0.08 |
| 55               | 859.999876              | -0.14 |

Result: The EUT is compliant.

**9.2.1 Frequency Stability/Voltage Variation**

**Table 9-8: Frequency Stability/Voltage Variation – 162 MHz**

| Voltage (VDC)            | Measured Frequency (Hz) | ppm   |
|--------------------------|-------------------------|-------|
| 5.75 (Battery End Point) | 161.999852              | -0.91 |
| 6.375                    | 161.999875              | -0.77 |
| 7.5                      | 162.000000              | 0.00  |
| 8.625                    | 161.999986              | -0.08 |

**Table 9-9: Frequency Stability/Voltage Variation – 418 MHz**

| Voltage (VDC)            | Measured Frequency (Hz) | ppm   |
|--------------------------|-------------------------|-------|
| 6.09 (Battery End Point) | 418.000030              | 0.07  |
| 6.375                    | 418.000013              | 0.03  |
| 7.5                      | 418.000000              | 0.00  |
| 8.625                    | 417.999963              | -0.09 |

**Table 9-10: Frequency Stability/Voltage Variation – 470 MHz**

| Voltage (VDC)            | Measured Frequency (Hz) | ppm   |
|--------------------------|-------------------------|-------|
| 6.01 (Battery End Point) | 469.999715              | -0.61 |
| 6.375                    | 469.999809              | -0.41 |
| 7.5                      | 470.000000              | 0.00  |
| 8.625                    | 469.999960              | -0.08 |

**Table 9-11: Frequency Stability/Voltage Variation – 768 MHz**

| Voltage (VDC)            | Measured Frequency (Hz) | ppm  |
|--------------------------|-------------------------|------|
| 5.59 (Battery End Point) | 768.000050              | 0.06 |
| 6.375                    | 768.000094              | 0.12 |
| 7.5                      | 768.000000              | 0.00 |
| 8.625                    | 768.000105              | 0.14 |

**Table 9-12: Frequency Stability/Voltage Variation – 798 MHz**

| Voltage (VDC)            | Measured Frequency (Hz) | ppm  |
|--------------------------|-------------------------|------|
| 5.87 (Battery End Point) | 798.000148              | 0.19 |
| 6.375                    | 798.000050              | 0.06 |
| 7.5                      | 798.000000              | 0.00 |
| 8.625                    | 798.000043              | 0.05 |

**Table 9-13: Frequency Stability/Voltage Variation – 815 MHz**

| Voltage (VDC)            | Measured Frequency (Hz) | ppm   |
|--------------------------|-------------------------|-------|
| 5.87 (Battery End Point) | 814.999924              | -0.09 |
| 6.375                    | 815.000137              | 0.17  |
| 7.5                      | 815.000000              | 0.00  |
| 8.625                    | 814.999960              | -0.05 |

**Table 9-14: Frequency Stability/Voltage Variation – 860 MHz**

| Voltage (VDC)            | Measured Frequency (Hz) | ppm   |
|--------------------------|-------------------------|-------|
| 5.85 (Battery End Point) | 860.000005              | 0.01  |
| 6.375                    | 860.000028              | 0.03  |
| 7.5                      | 860.000000              | 0.00  |
| 8.625                    | 859.999972              | -0.03 |

**Table 9-15: Test Equipment Used For Testing Frequency Stability**

| RTL Asset # | Manufacturer             | Model    | Part Type                         | Serial Number | Calibration Due Date |
|-------------|--------------------------|----------|-----------------------------------|---------------|----------------------|
| 900946      | Tenney Engineering, Inc. | TH65     | Temperature Chamber with Humidity | 11380         | 3/26/18              |
| 901300      | Agilent Technologies     | 53131A   | Frequency Counter                 | MY40001345    | 4/26/18              |
| 901338      | Weinschel Corp           | 46-40-34 | 40 dB Attenuator; 25 W            | BM0556        | 9/1/18               |
| 901350      | Meterman                 | 33XR     | Digital Multimeter                | N/A           | 4/26/19              |

**Test Personnel:**

Daniel W. Baltzell  
 EMC Test Engineer



Signature

May 10, 2017  
 Date of Test

## **10 FCC §2.1047(a)(b): Modulation Characteristics; §74.463: Modulation Requirements; §80.213: Modulation Requirements; RSS-119 5.2: Types of Modulation**

### **§80.213 Modulation requirements.**

(a)(2) When phase or frequency modulation is used in the 156–162 MHz band, the peak modulation must be maintained between 75 and 100 percent. A frequency deviation of  $\pm 5$  kHz is defined as 100 percent peak modulation.

(b) Radiotelephone transmitters using A3E, F3E and G3E emission must have a modulation limiter to prevent any modulation over 100 percent. This requirement does not apply to survival craft transmitters, to transmitters that do not require a license, or to transmitters whose output power does not exceed 3 watts.

(d) Ship and coast station transmitters operating in the 156–162 MHz and 216–220 MHz bands must be capable of proper operation with a frequency deviation that does not exceed  $\pm 5$  kHz when using any emission authorized by §80.207.

(e) Coast station transmitters operating in the 156–162 MHz band must be equipped with an audio low-pass filter. The filter must be installed between the modulation limiter and the modulated radio frequency stage. At frequencies between 3 kHz and 20 kHz it must have an attenuation greater than at 1 kHz by at least  $60 \log_{10}(f/3)$  dB where “f” is the audio frequency in kilohertz. At frequencies above 20 kHz the attenuation must be at least 50 dB greater than at 1 kHz.

### **10.1 Test Procedures**

#### **10.1.1 Audio Frequency Response**

ANSI C63.26 5.3.3

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

Audio Frequency Response =  $20 \text{ LOG} (\text{DEVfreq}/\text{DEVref})$

#### **10.1.2 Audio Low Pass Filter Response**

ANSI C63.26 5.3

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

#### **10.1.3 Modulation Limiting**


ANSI C63.26 5.3.2

The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level (0 dB) as a reference, the audio input level was varied from the reference  $\pm 20$  dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.

## 10.2 Test Data


### 10.2.1 Audio Frequency Response

Plot 10-1: Modulation Characteristics - Audio Frequency Response - 136 MHz

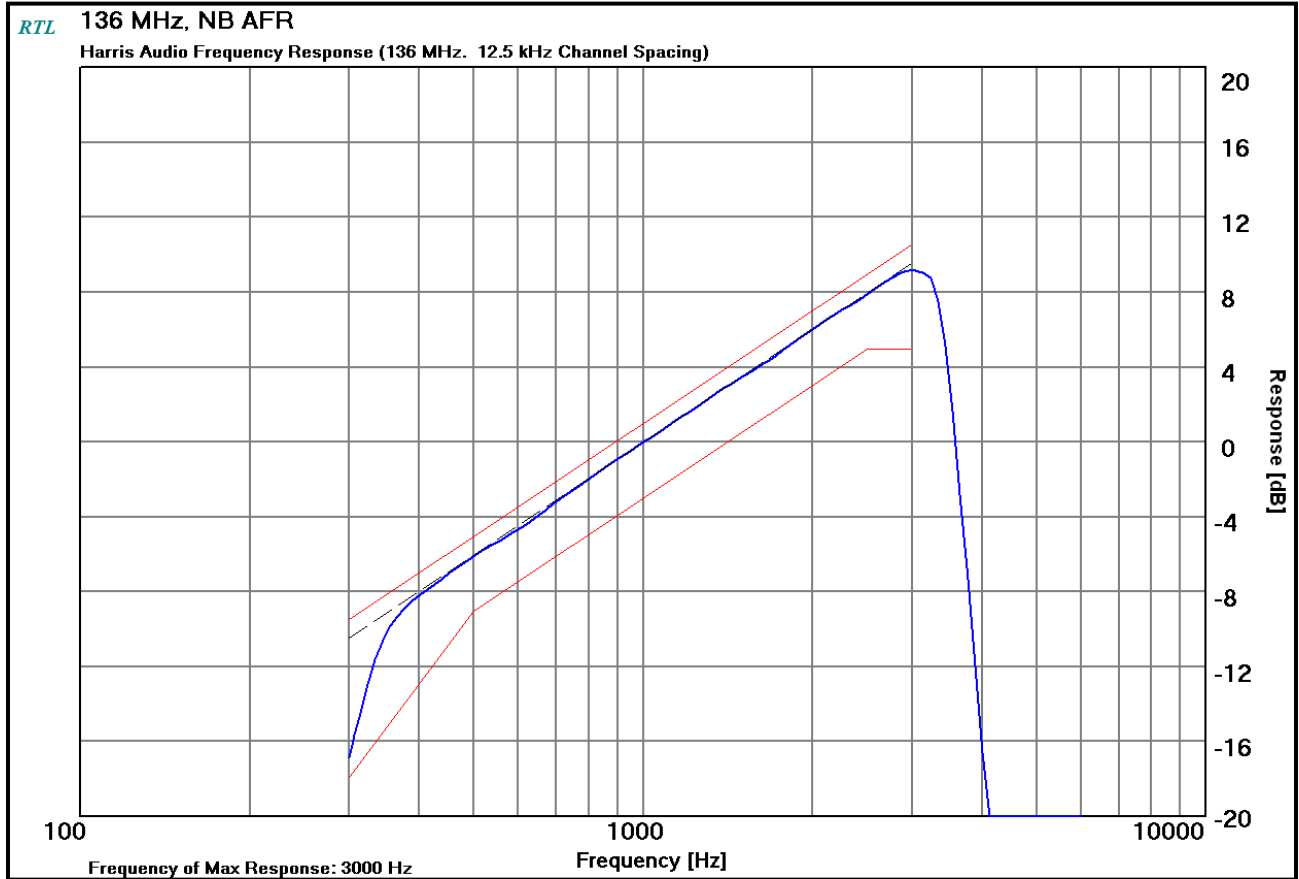





**Plot 10-2: Modulation Characteristics - Audio Frequency Response - 418 MHz**

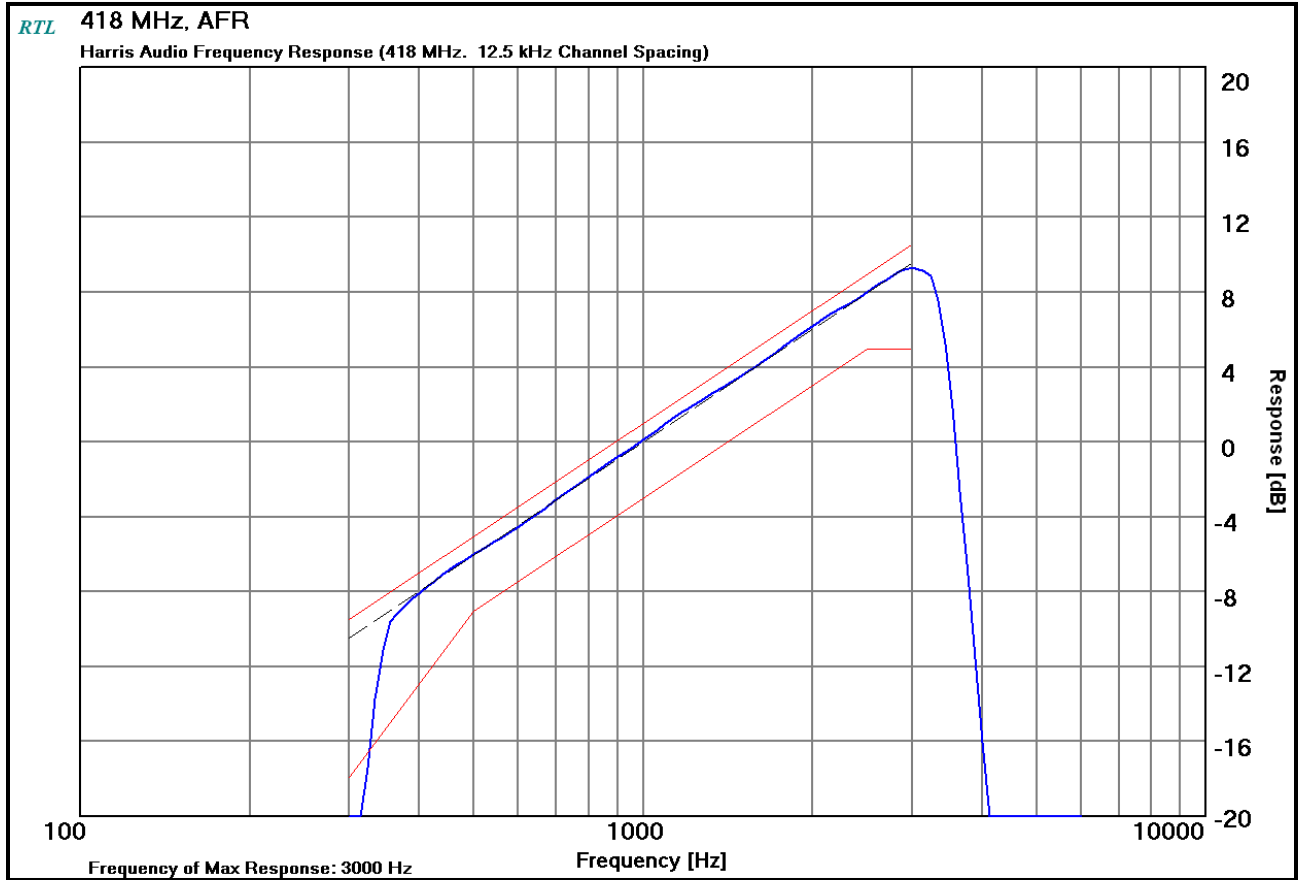


**Plot 10-3: Modulation Characteristics - Audio Frequency Response - 470 MHz**

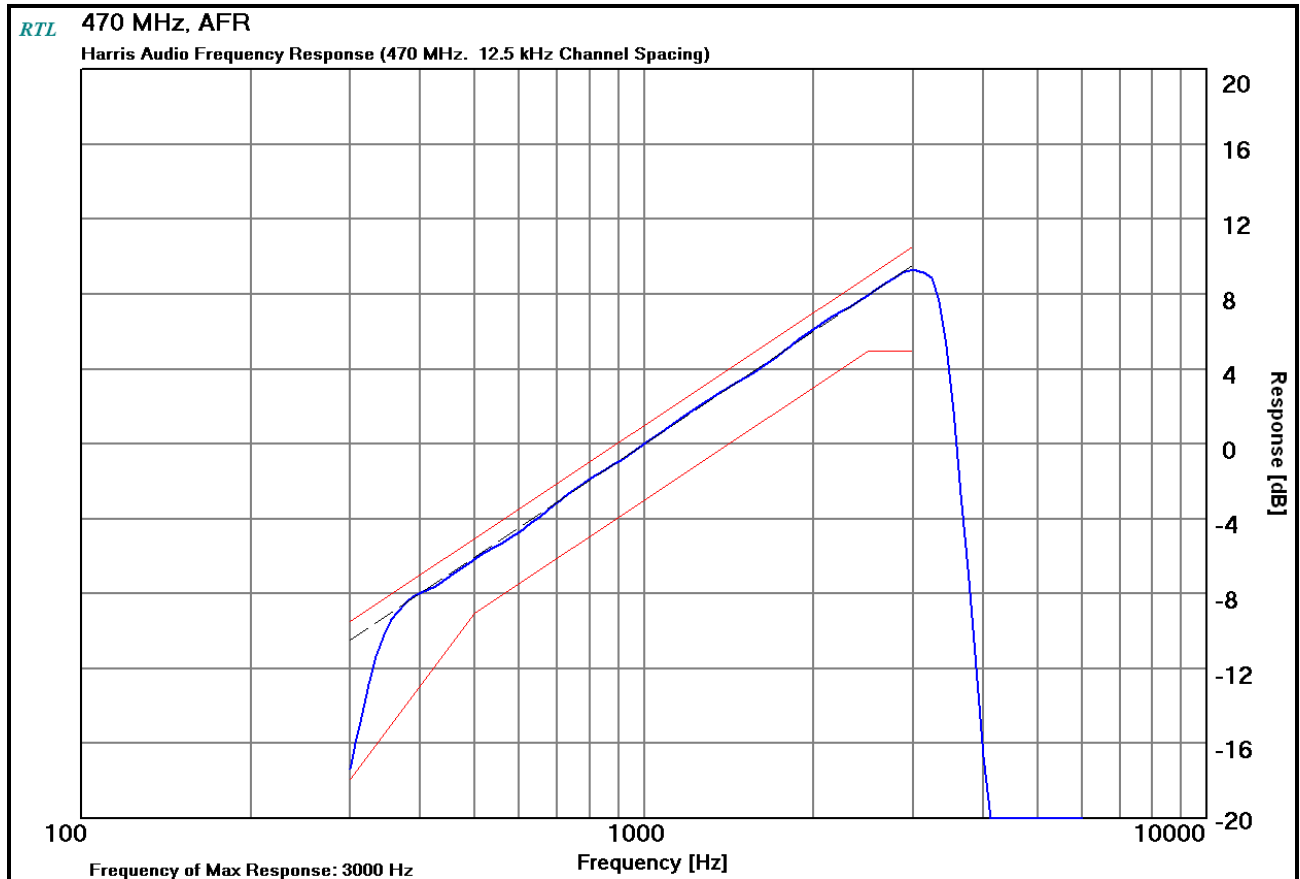


**Plot 10-4: Modulation Characteristics - Audio Frequency Response - 768 MHz**

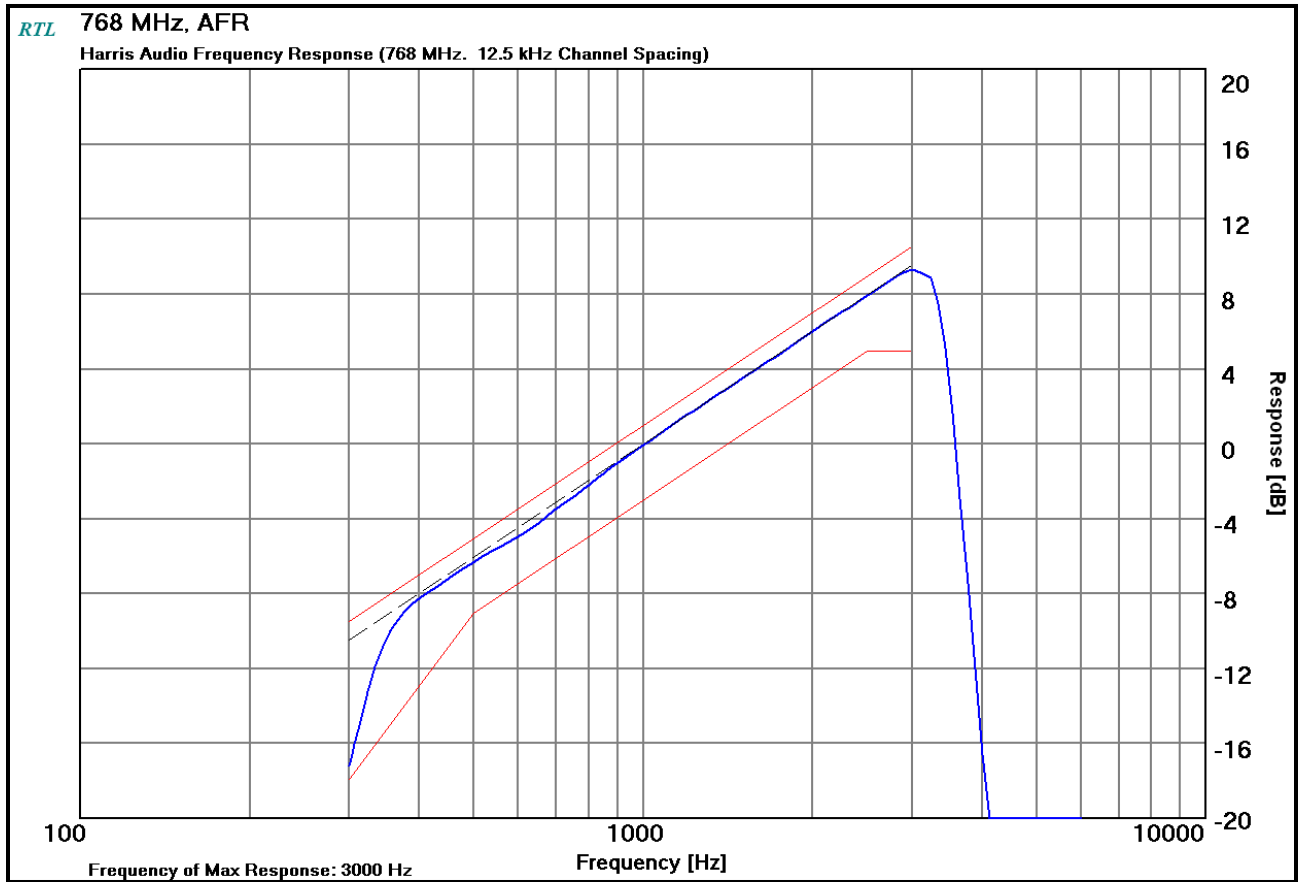


**Plot 10-5: Modulation Characteristics - Audio Frequency Response - 798 MHz**

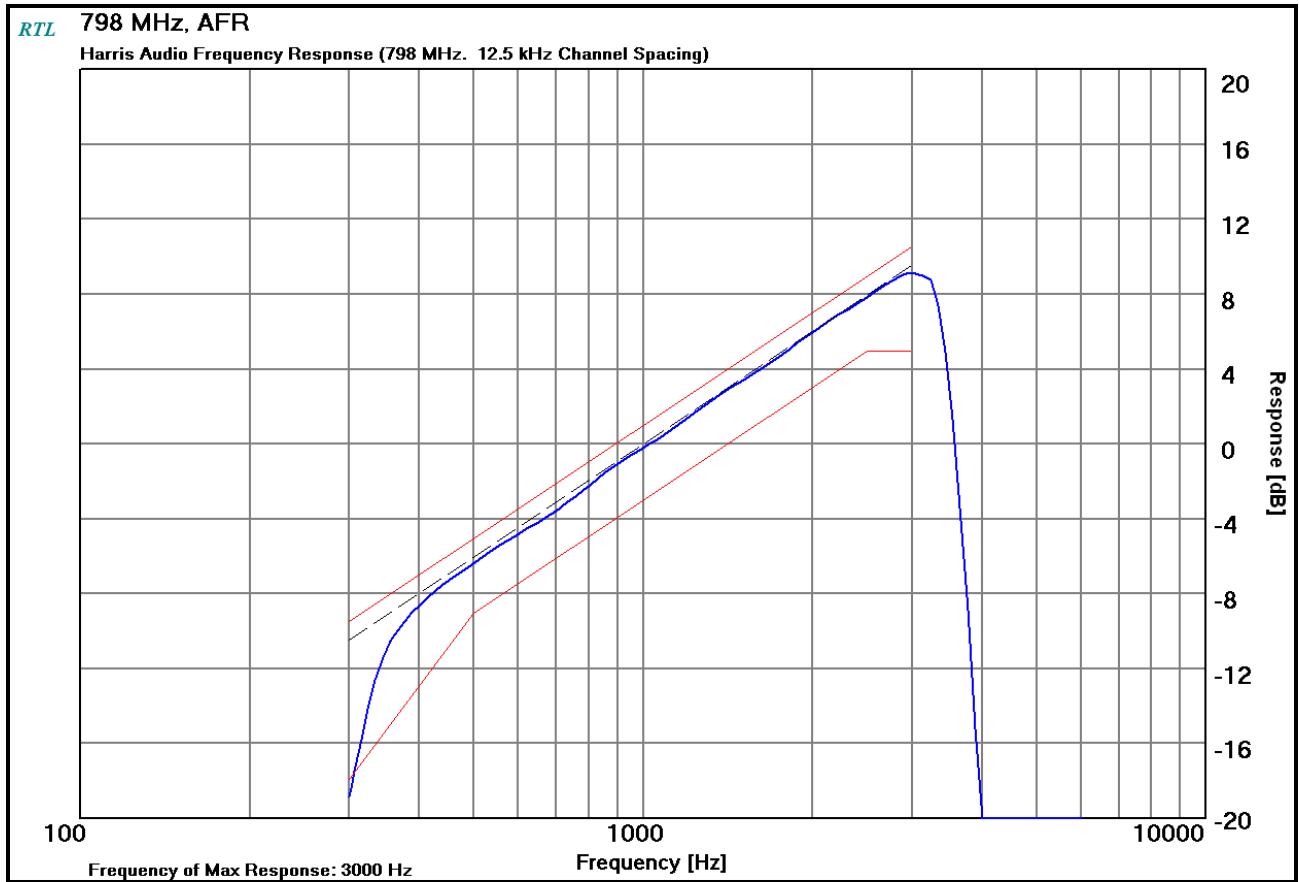

**Plot 10-6: Modulation Characteristics - Audio Frequency Response - 815 MHz**

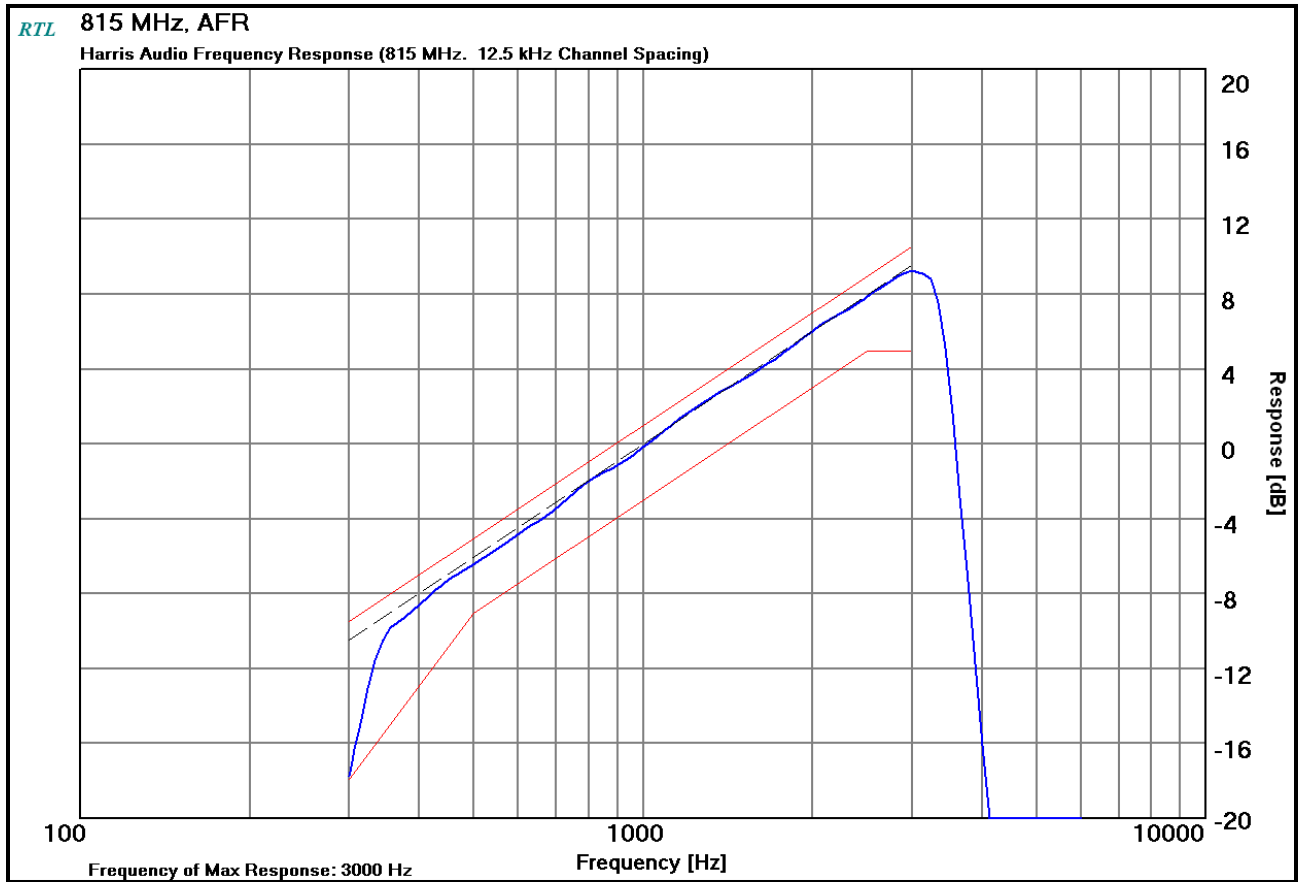


**Plot 10-7: Modulation Characteristics - Audio Frequency Response - 860 MHz**

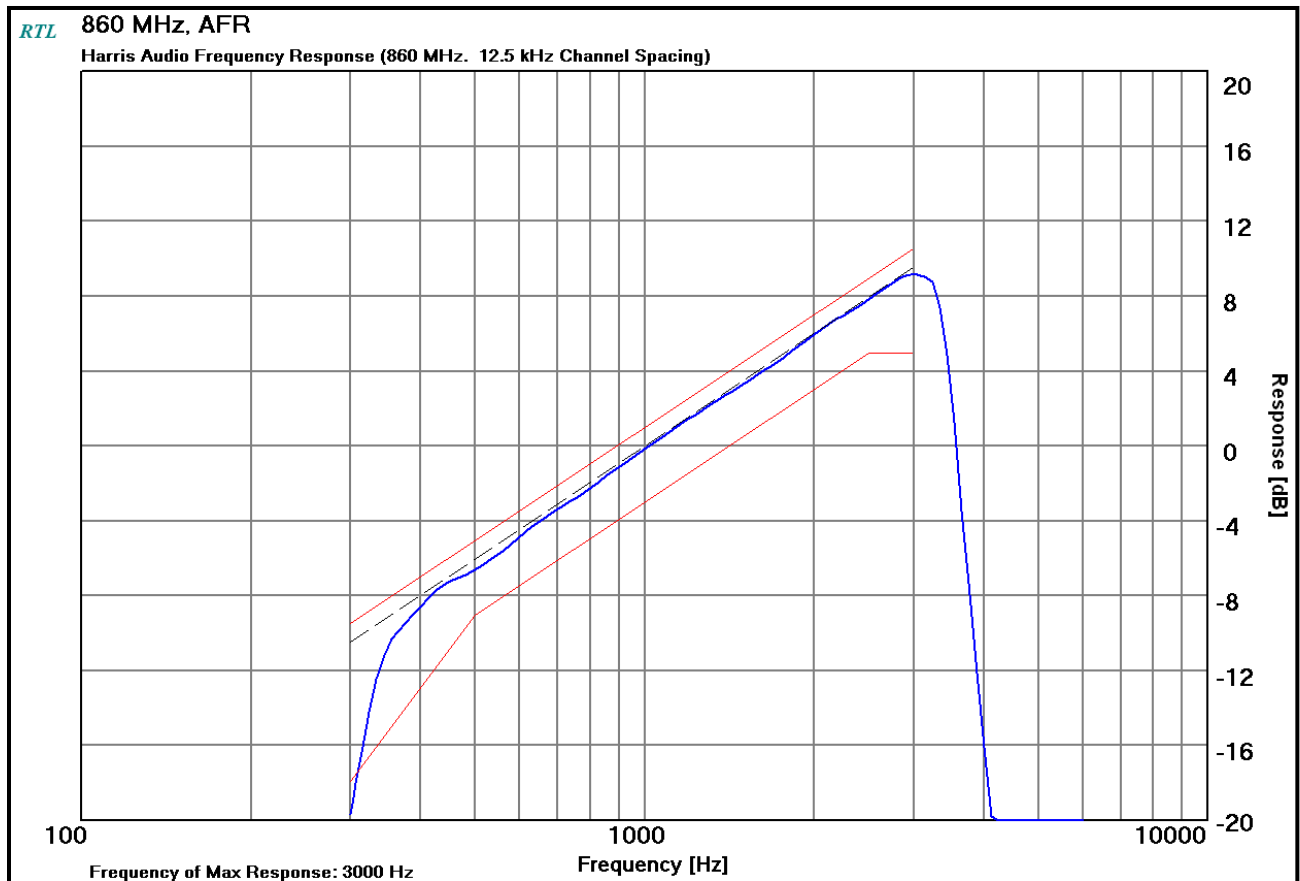


### 10.2.2 Audio Low Pass Filter Response

Plot 10-8: Modulation Characteristics – Audio Low Pass Filter - 162 MHz (WB)

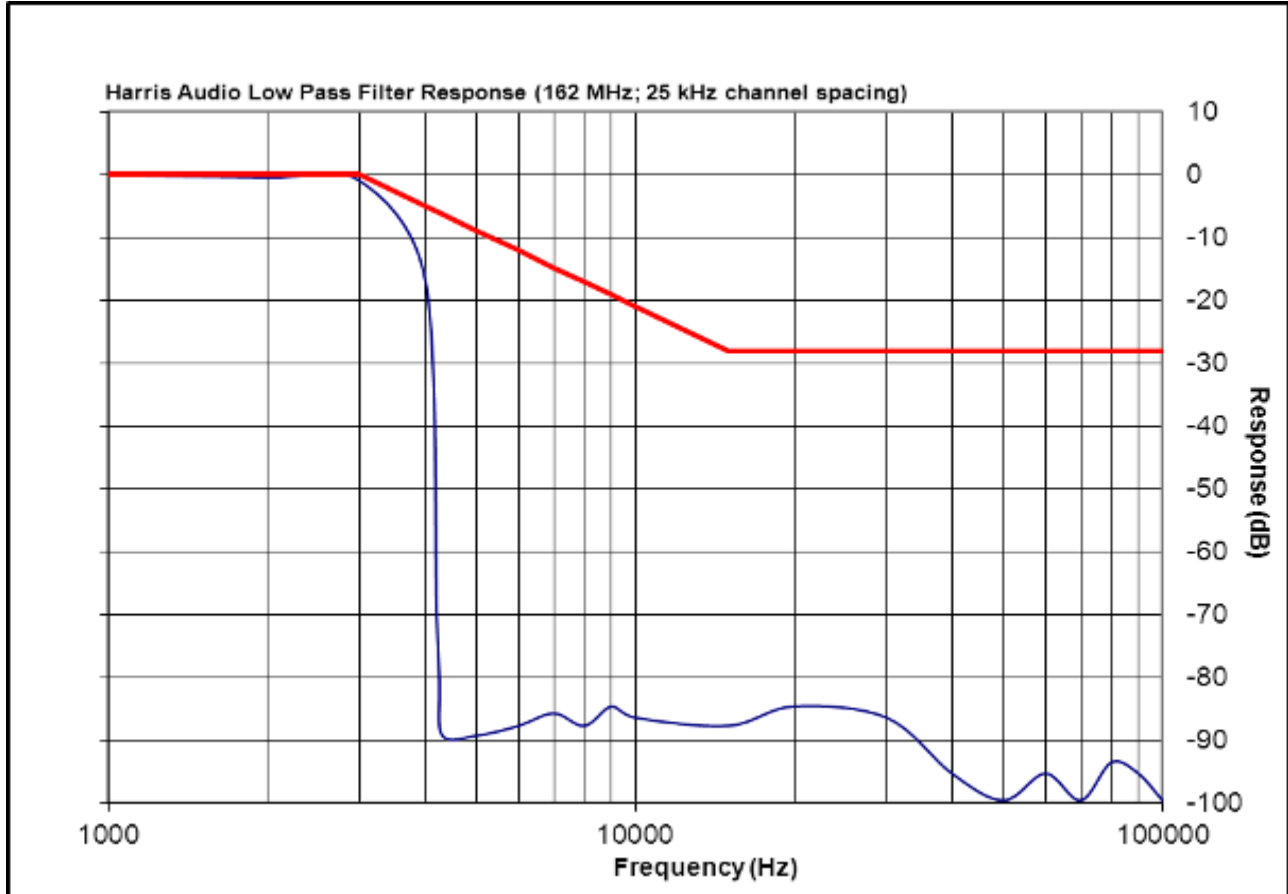


**Plot 10-9: Modulation Characteristics – Audio Low Pass Filter - 162 MHz (NB)**

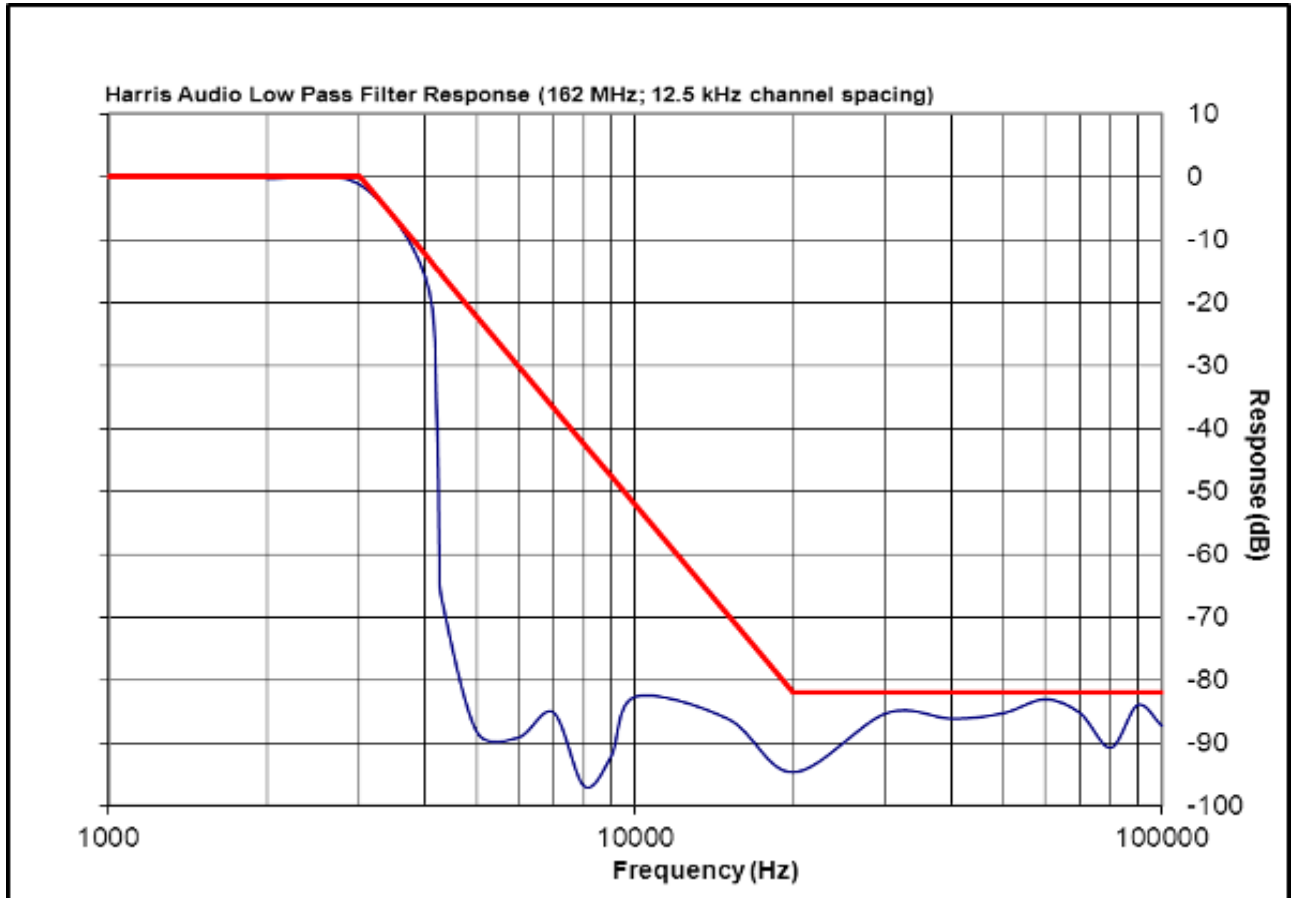





**Plot 10-10: Modulation Characteristics – Audio Low Pass Filter - 418 MHz (WB)**

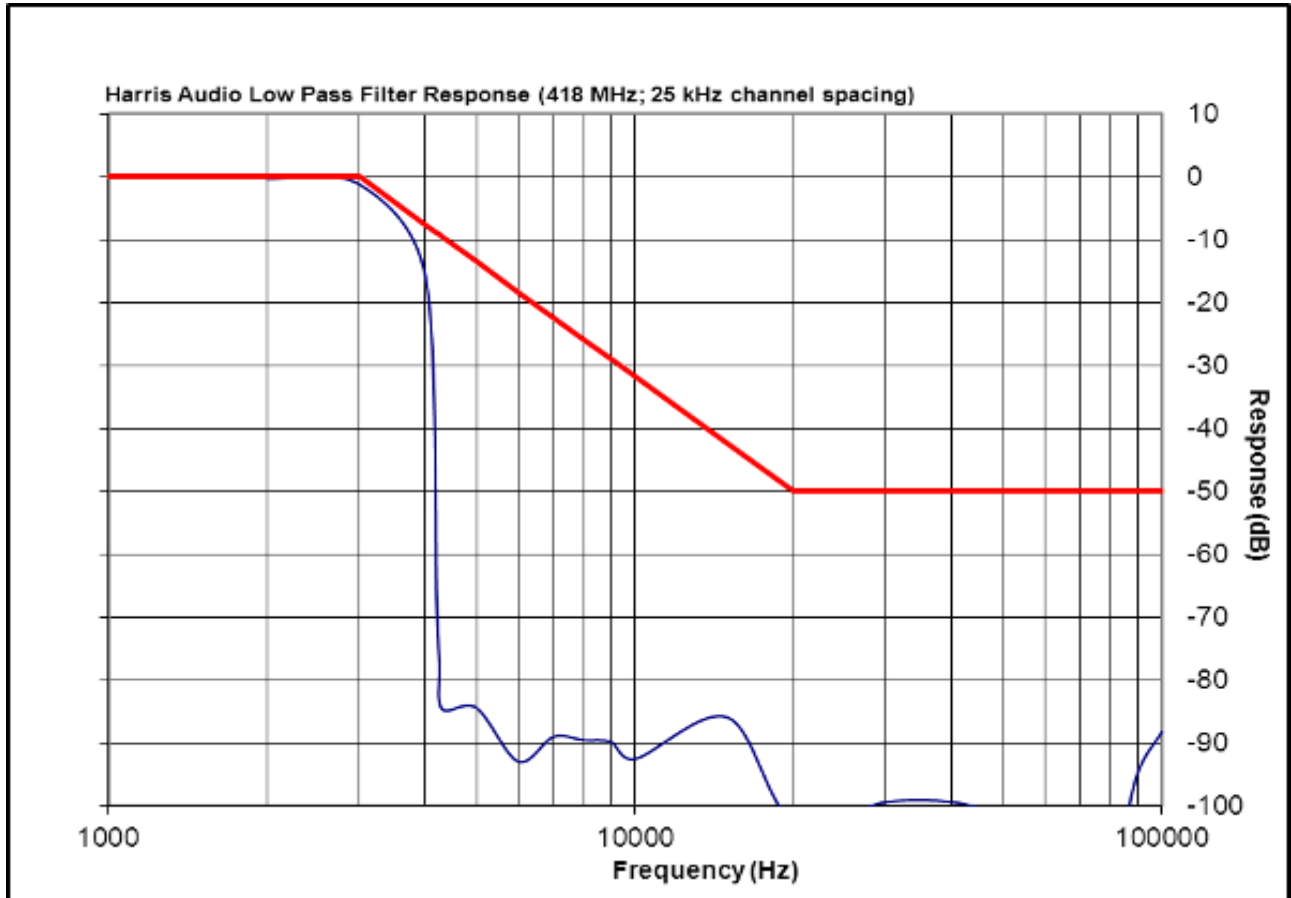


**Plot 10-11: Modulation Characteristics – Audio Low Pass Filter - 418 MHz (NB)**

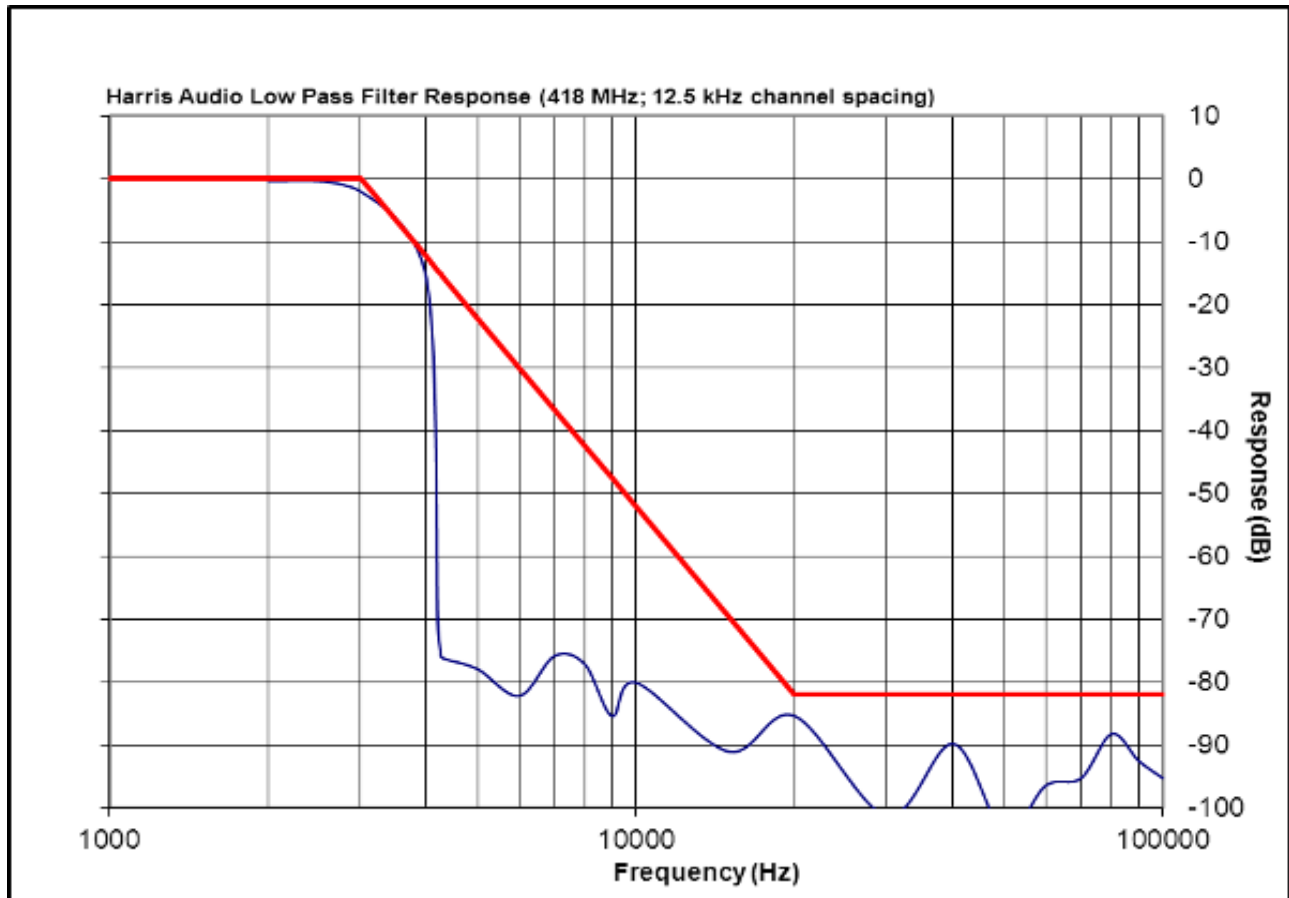


**Plot 10-12: Modulation Characteristics – Audio Low Pass Filter - 470 MHz (WB)**

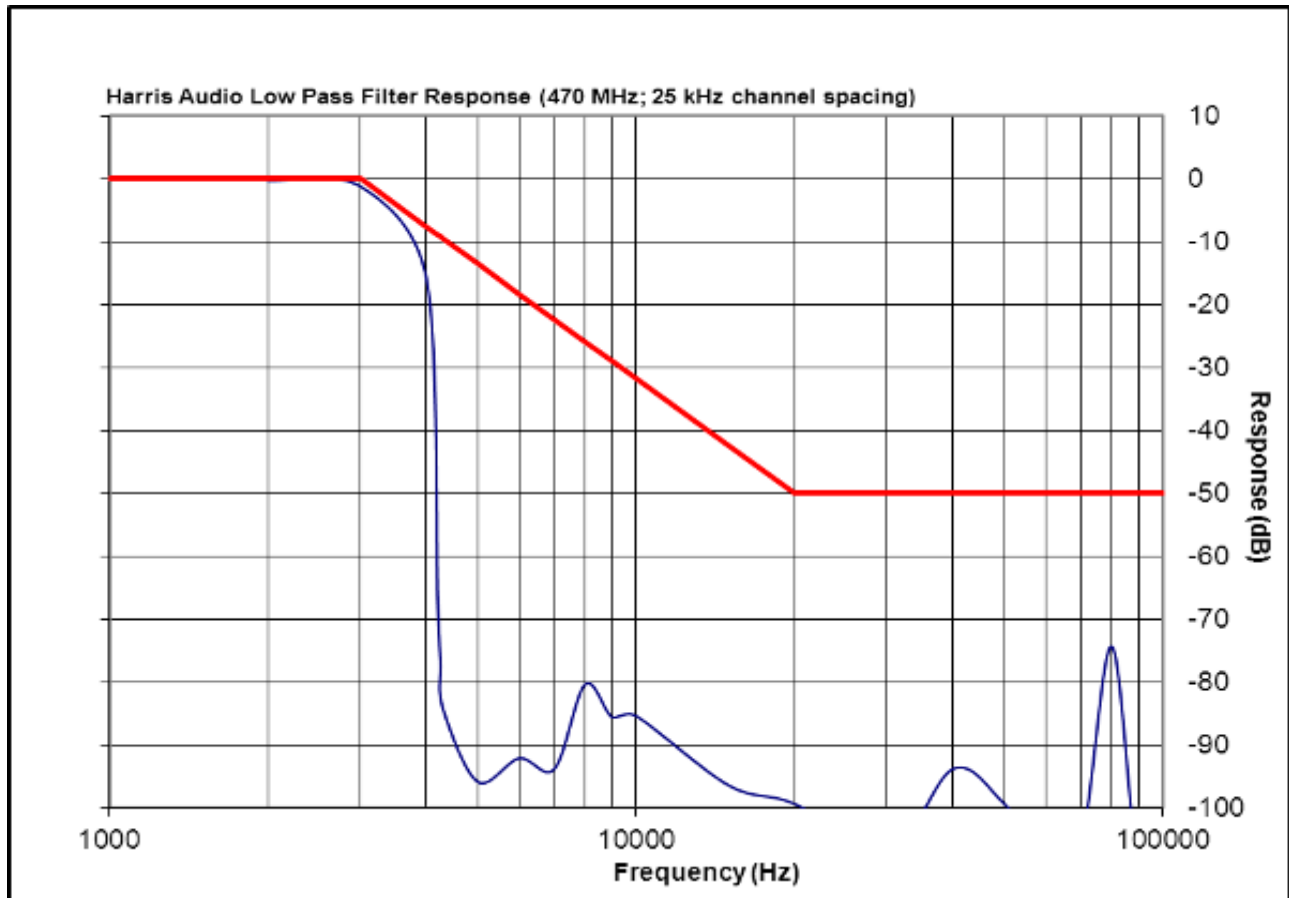


**Plot 10-13: Modulation Characteristics – Audio Low Pass Filter - 470 MHz (NB)**

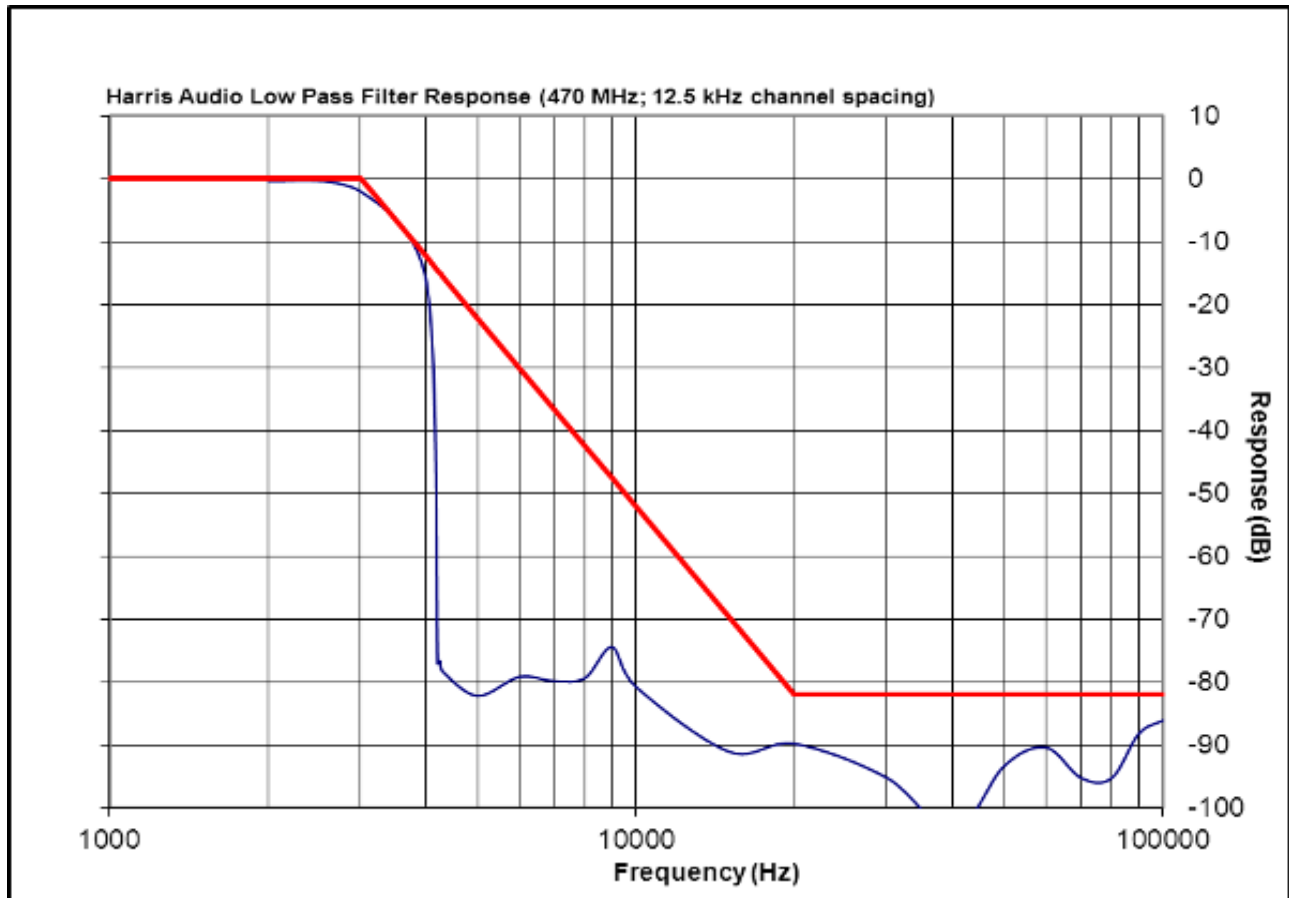


**Plot 10-14: Modulation Characteristics – Audio Low Pass Filter – 768 MHz**

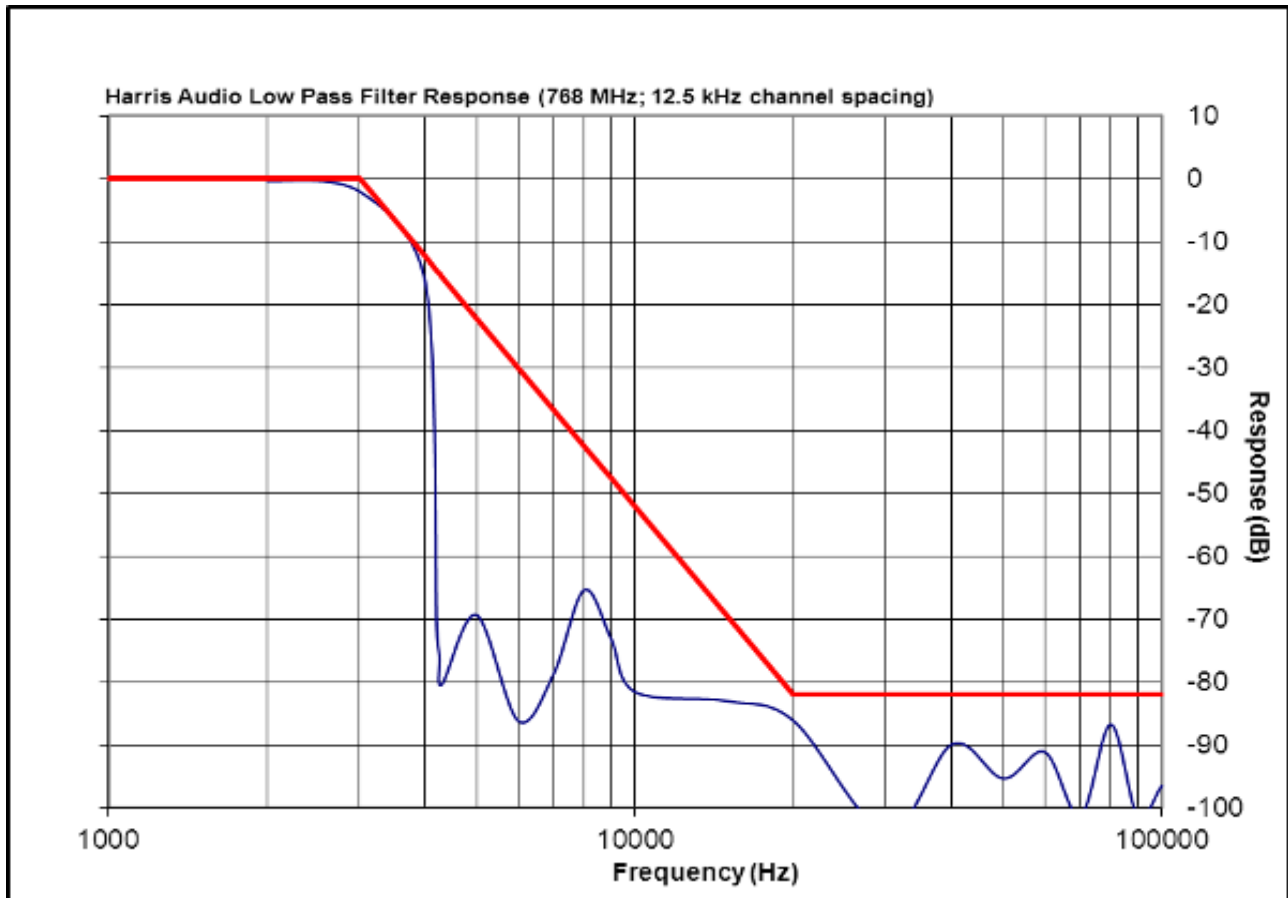


**Plot 10-15: Modulation Characteristics – Audio Low Pass Filter - 798 MHz**

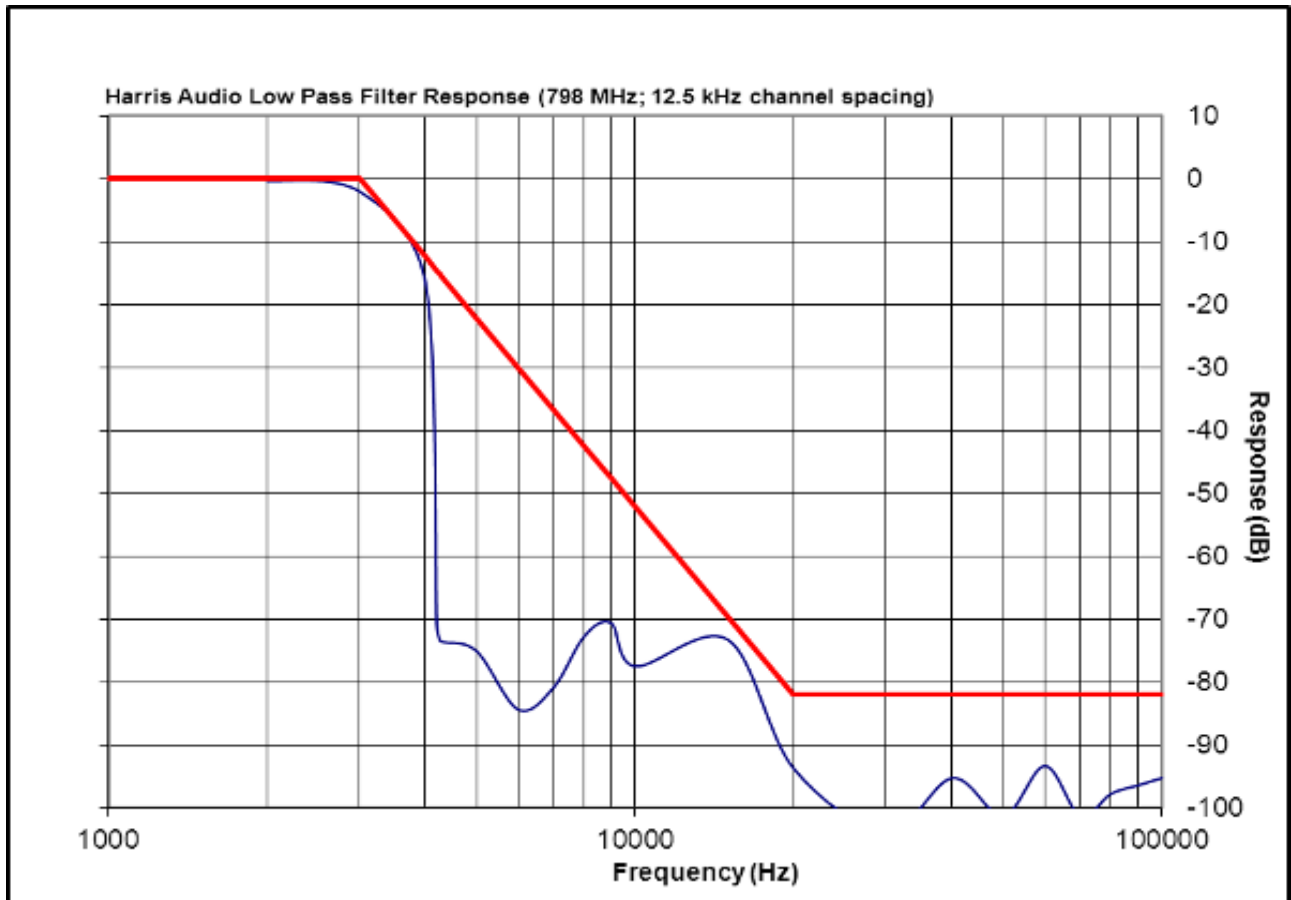

**Plot 10-16: Modulation Characteristics – Audio Low Pass Filter - 815 MHz**

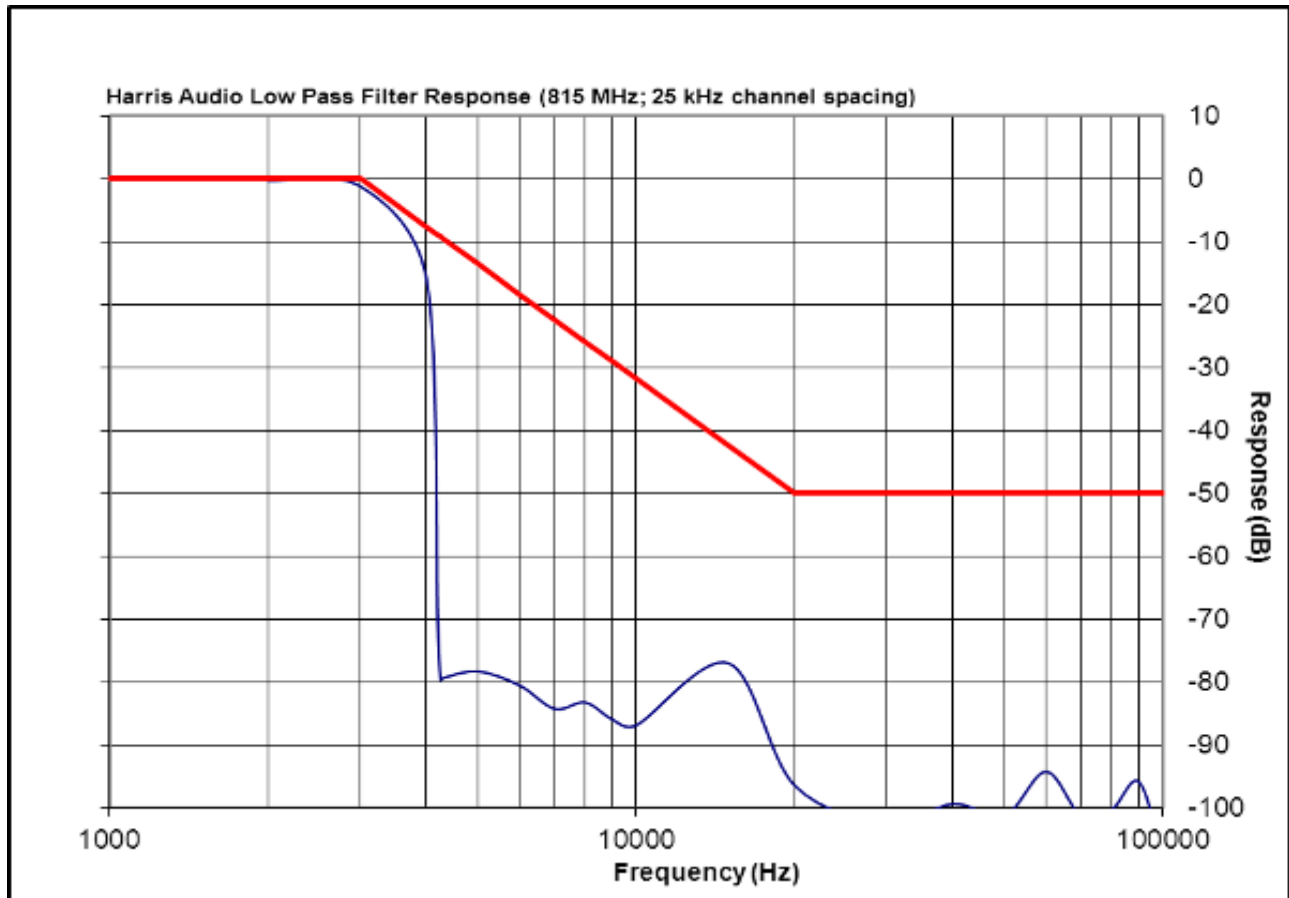


**Plot 10-17: Modulation Characteristics – Audio Low Pass Filter - 860 MHz**

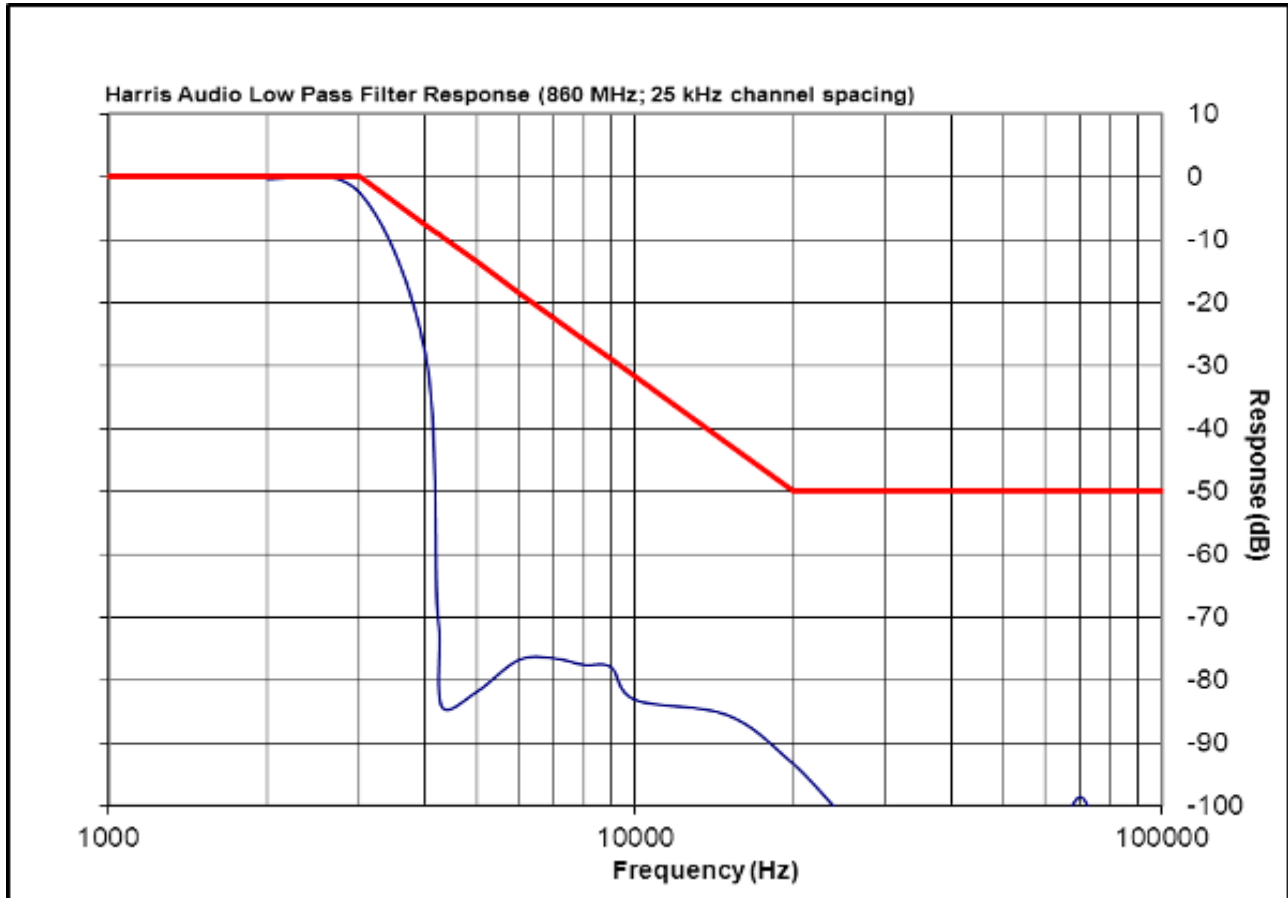




### 10.2.3 Modulation Limiting


Plot 10-18: Modulation Characteristics – Modulation Limiting - 136 MHz; Positive Peak; NB

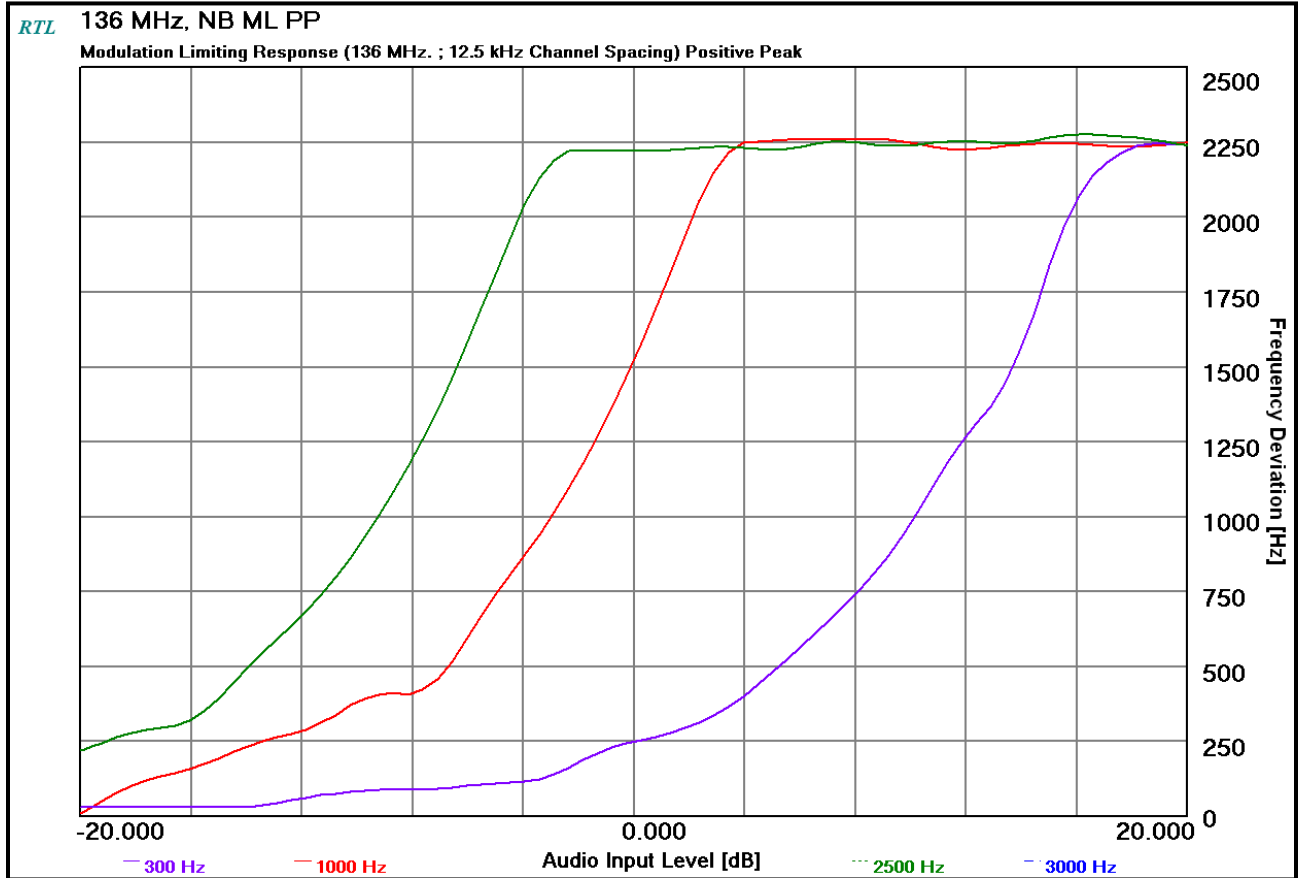


**Plot 10-19: Modulation Characteristics – Modulation Limiting - 136 MHz; Negative Peak; NB**

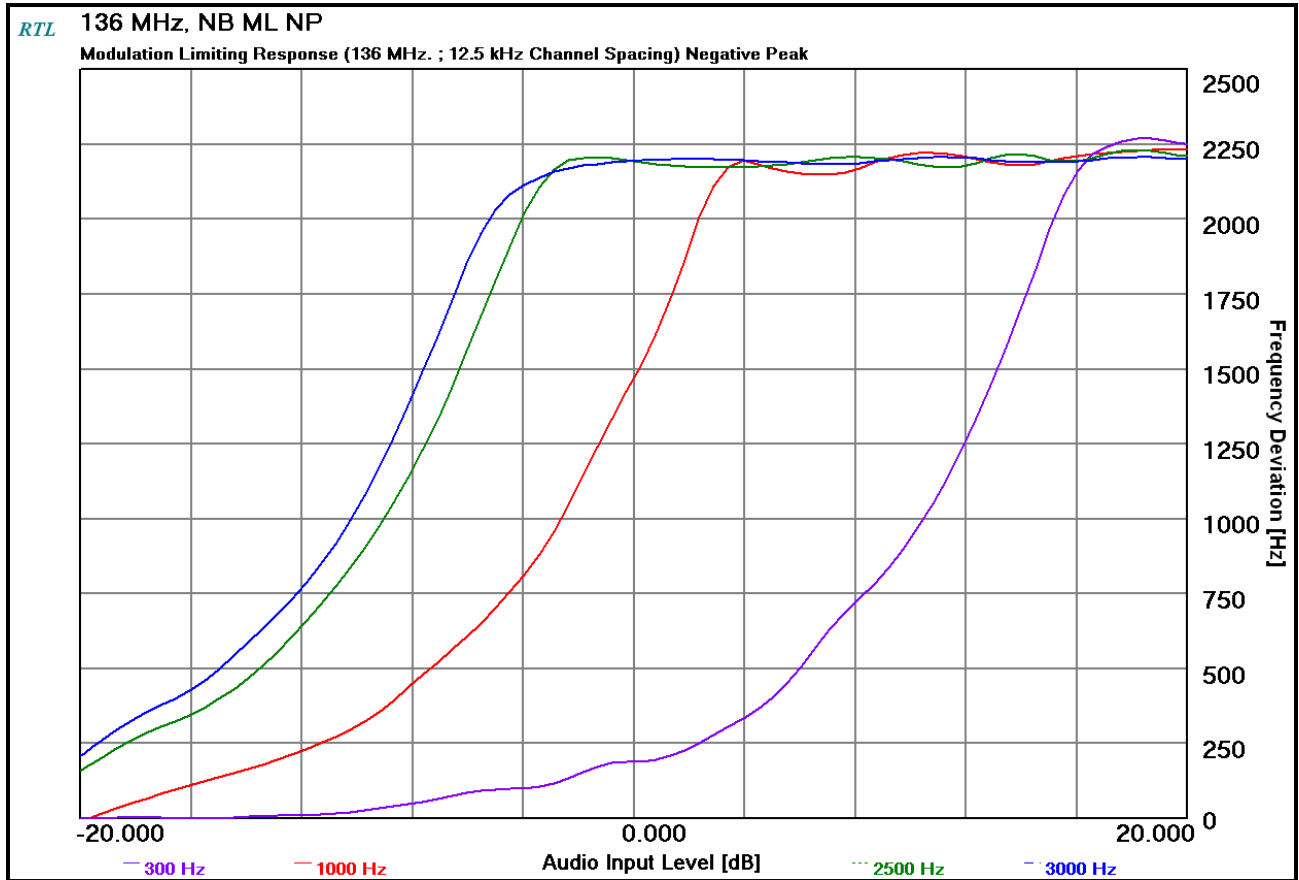


**Plot 10-20: Modulation Characteristics – Modulation Limiting - 136 MHz; Positive Peak; WB**

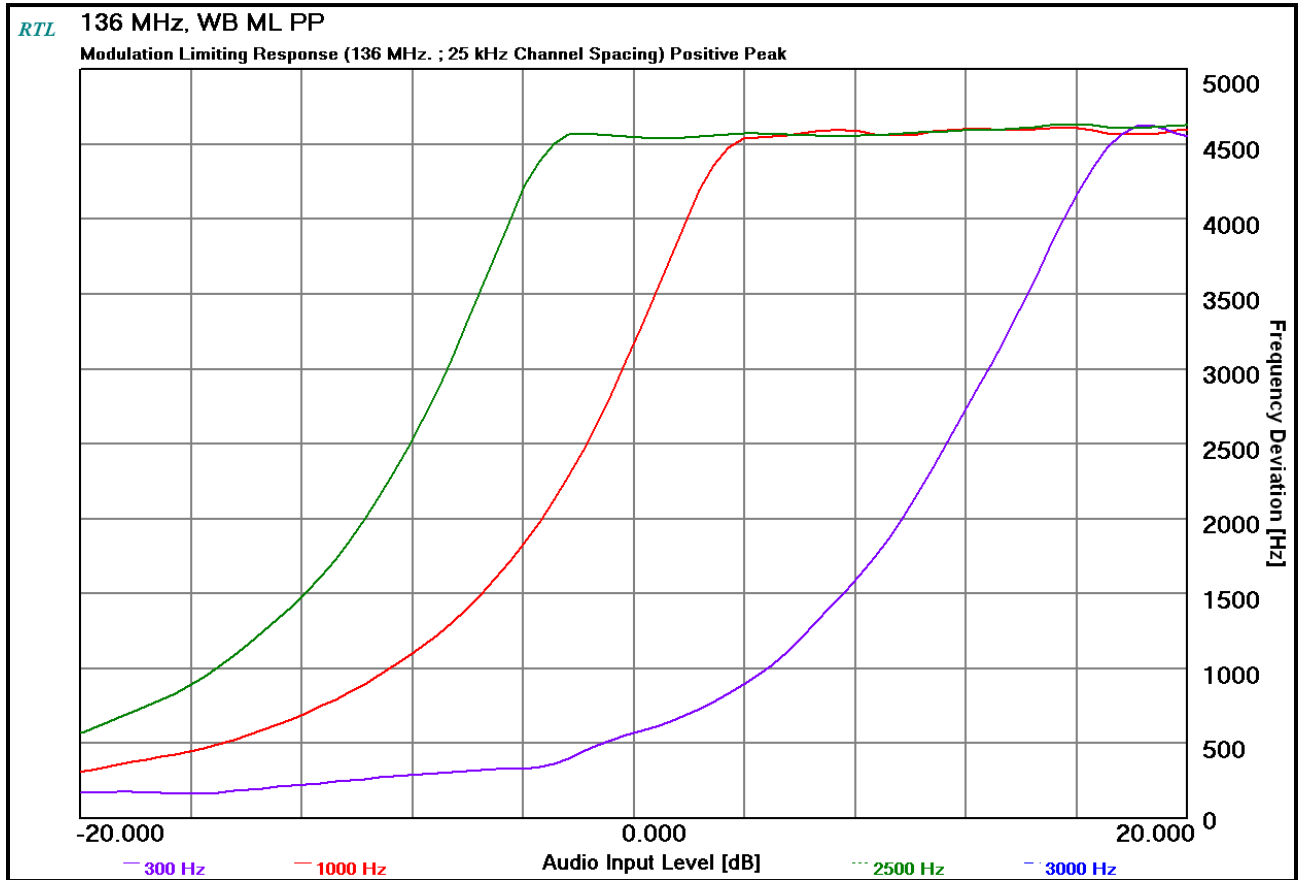


**Plot 10-21: Modulation Characteristics – Modulation Limiting - 136 MHz; Negative Peak; WB**

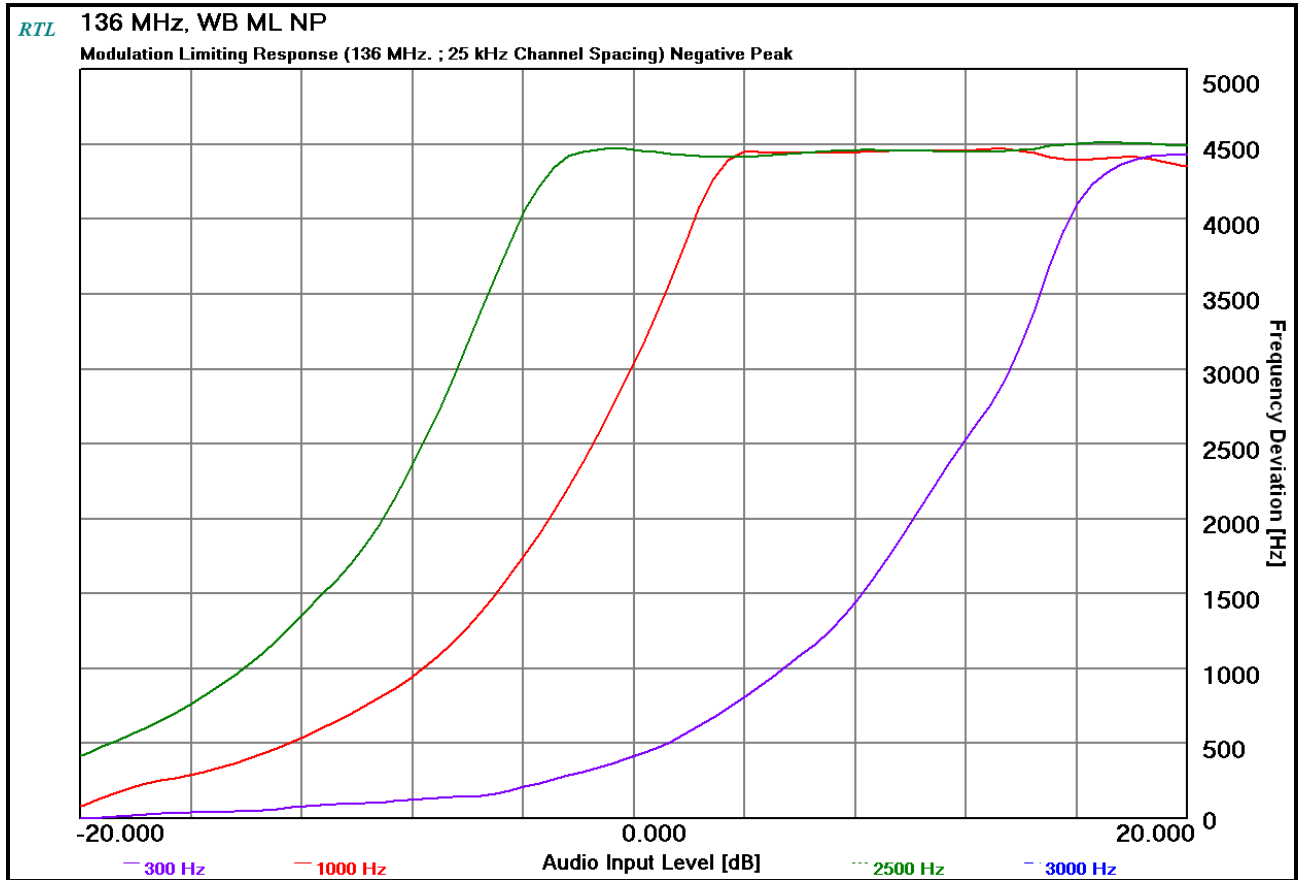


**Plot 10-22: Modulation Characteristics – Modulation Limiting - 162 MHz; Positive Peak; NB**

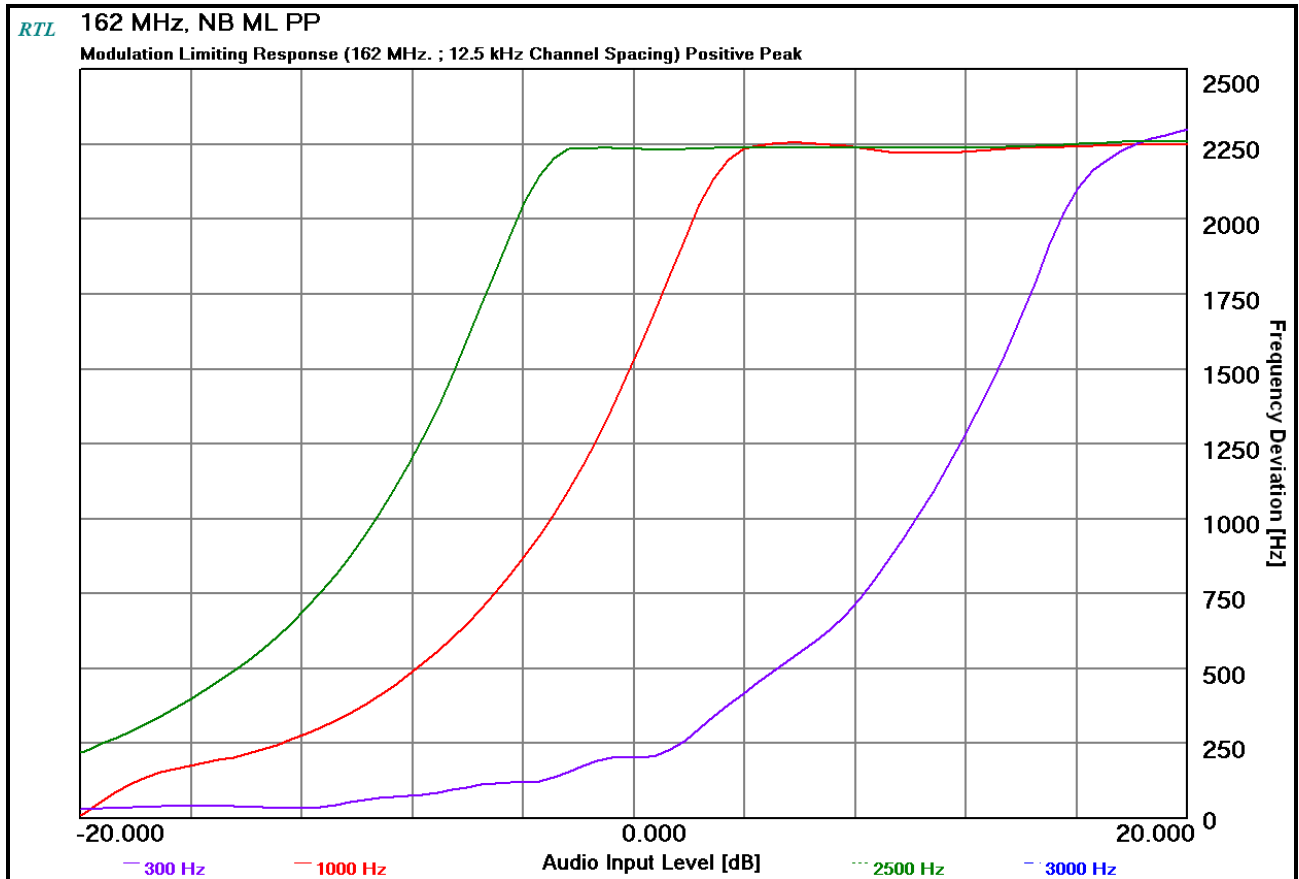


**Plot 10-23: Modulation Characteristics – Modulation Limiting - 162 MHz; Negative Peak; NB**

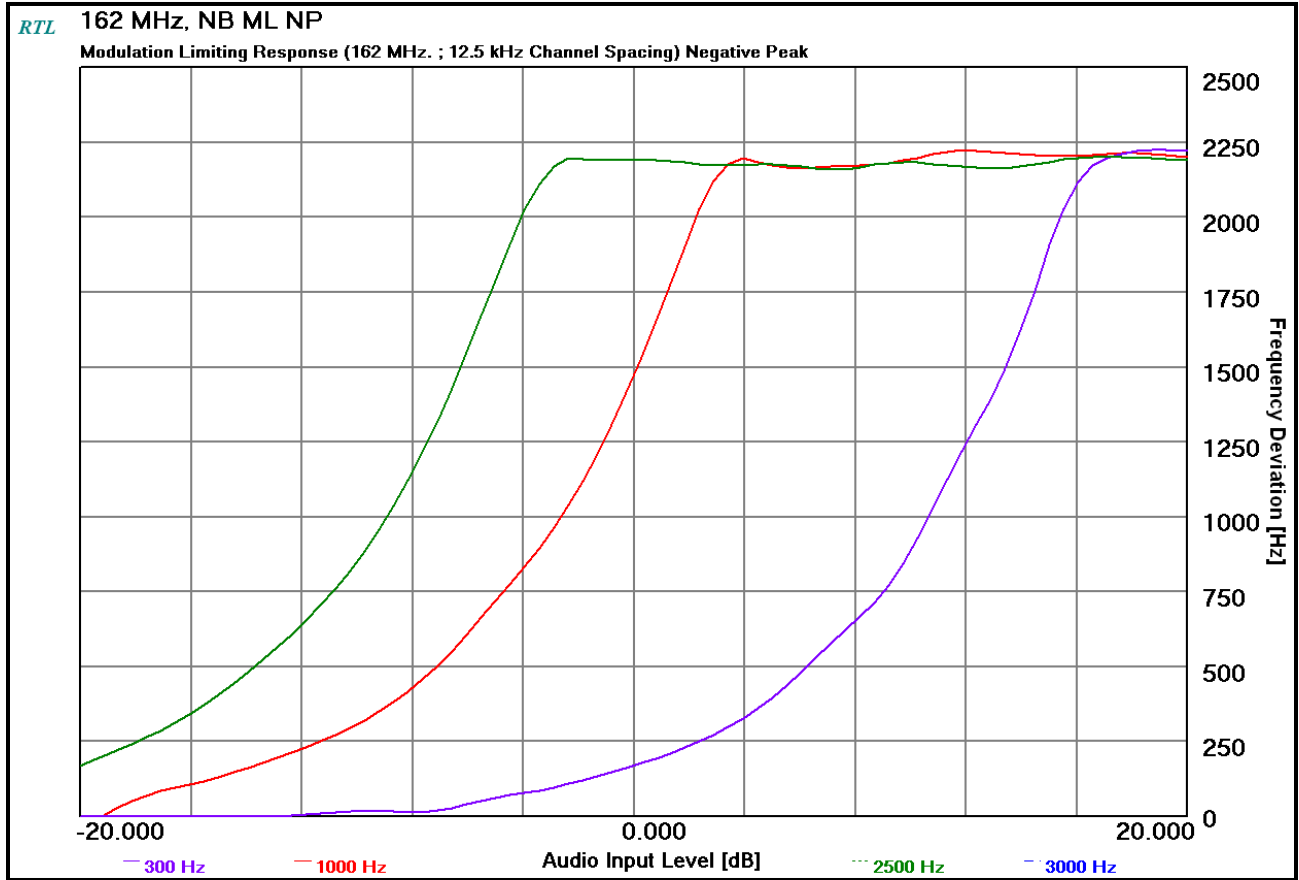

**Plot 10-24: Modulation Characteristics – Modulation Limiting - 162 MHz; Positive Peak; WB**

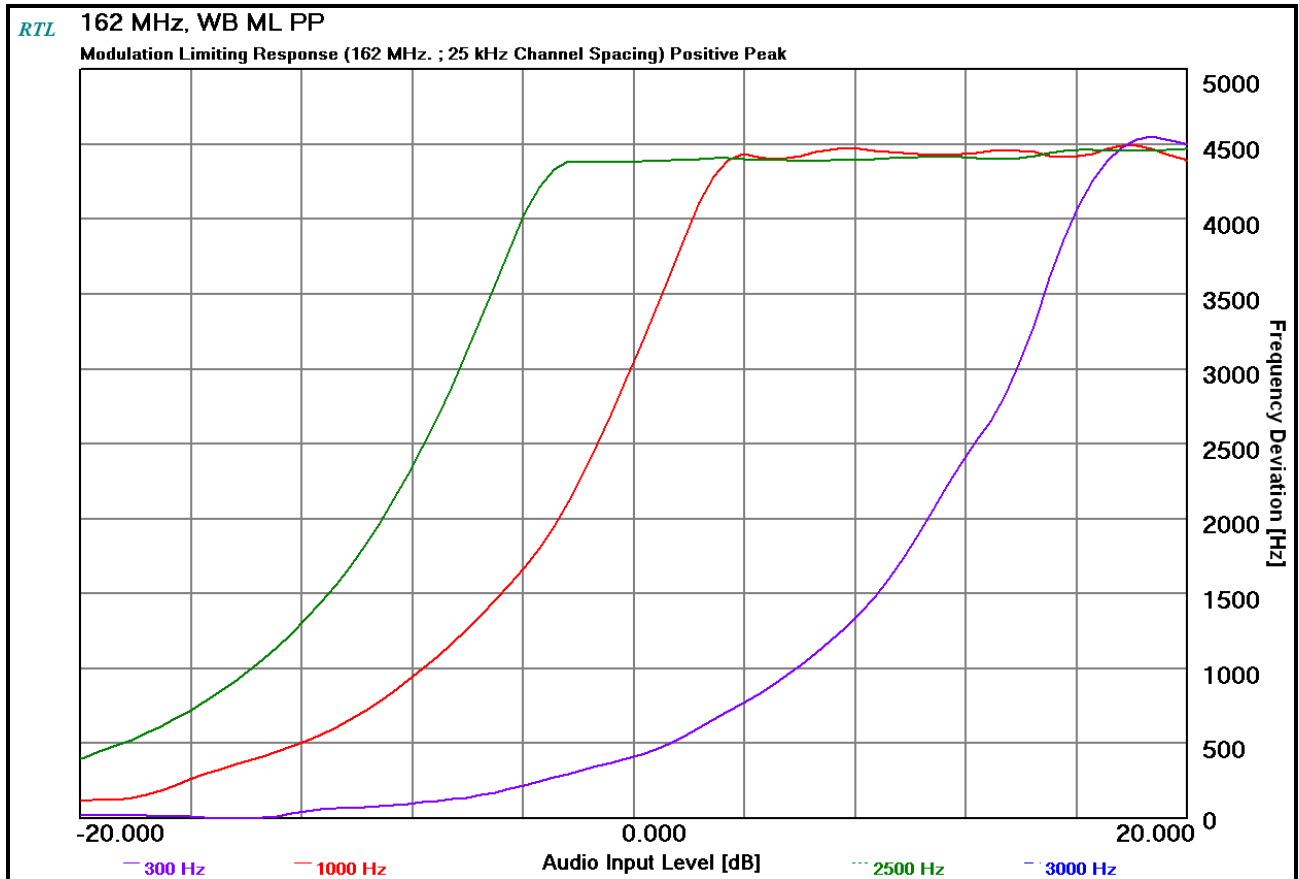


**Plot 10-25: Modulation Characteristics – Modulation Limiting - 162 MHz; Negative Peak; WB**

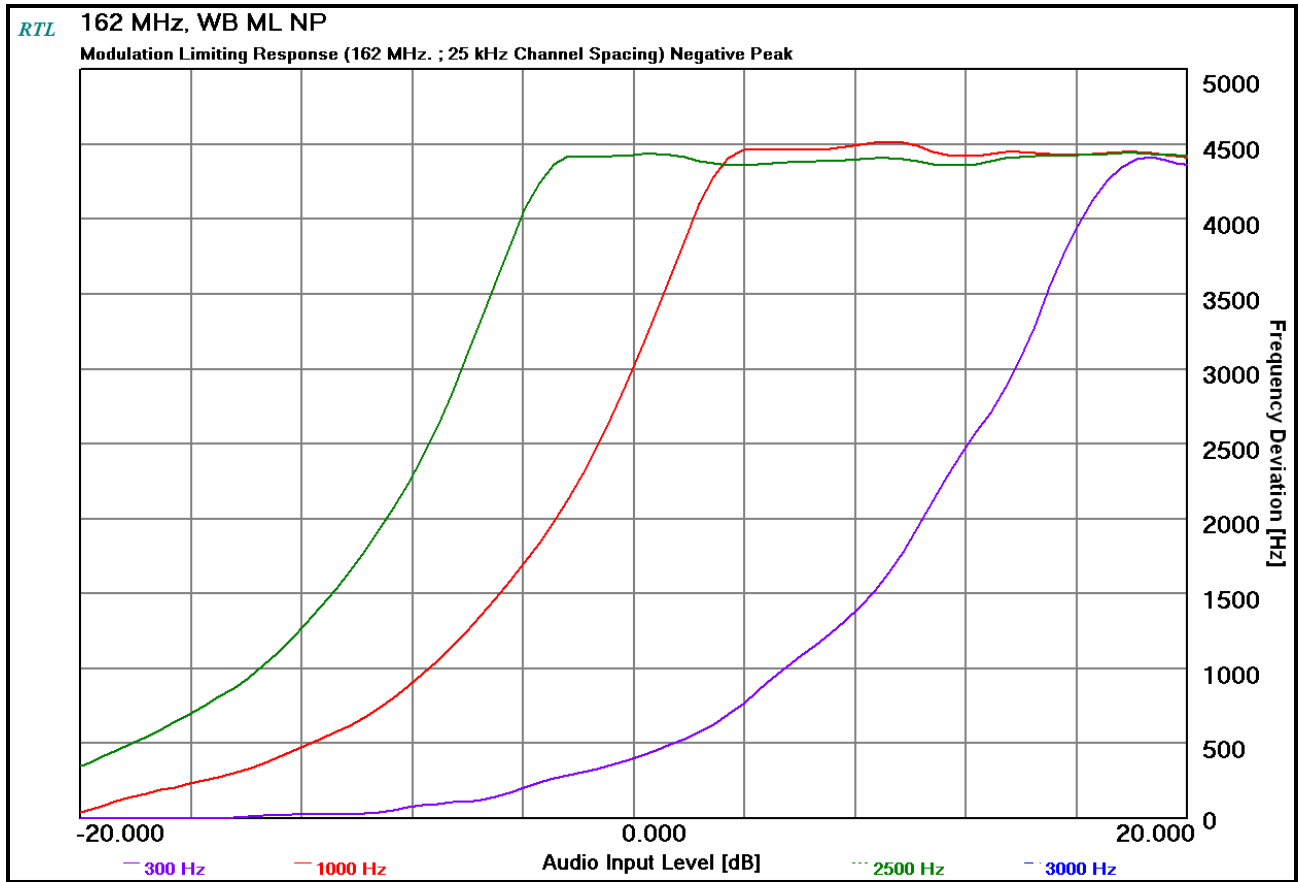





**Plot 10-26: Modulation Characteristics – Modulation Limiting - 418 MHz; Positive Peak; NB**

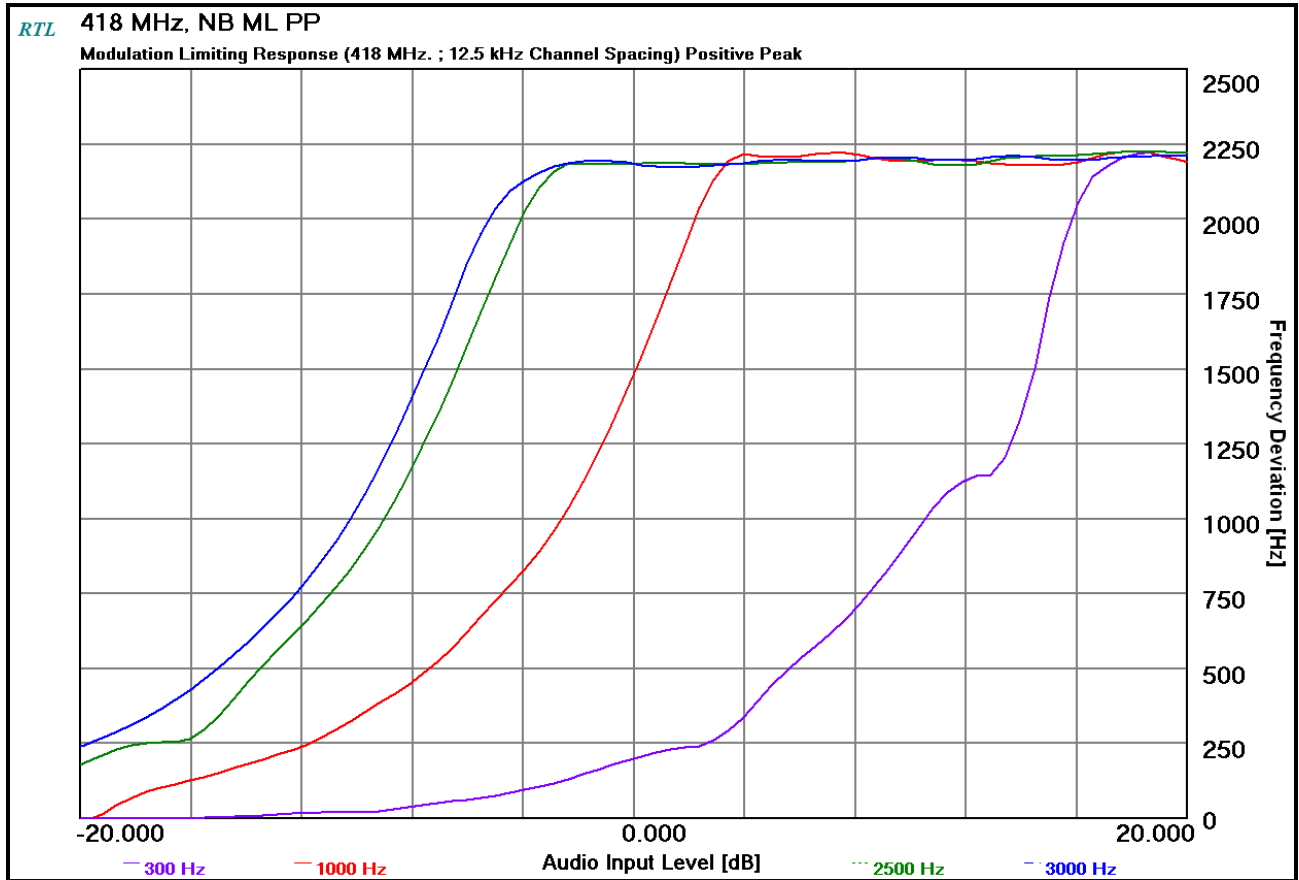


**Plot 10-27: Modulation Characteristics – Modulation Limiting - 418 MHz; Negative Peak; NB**

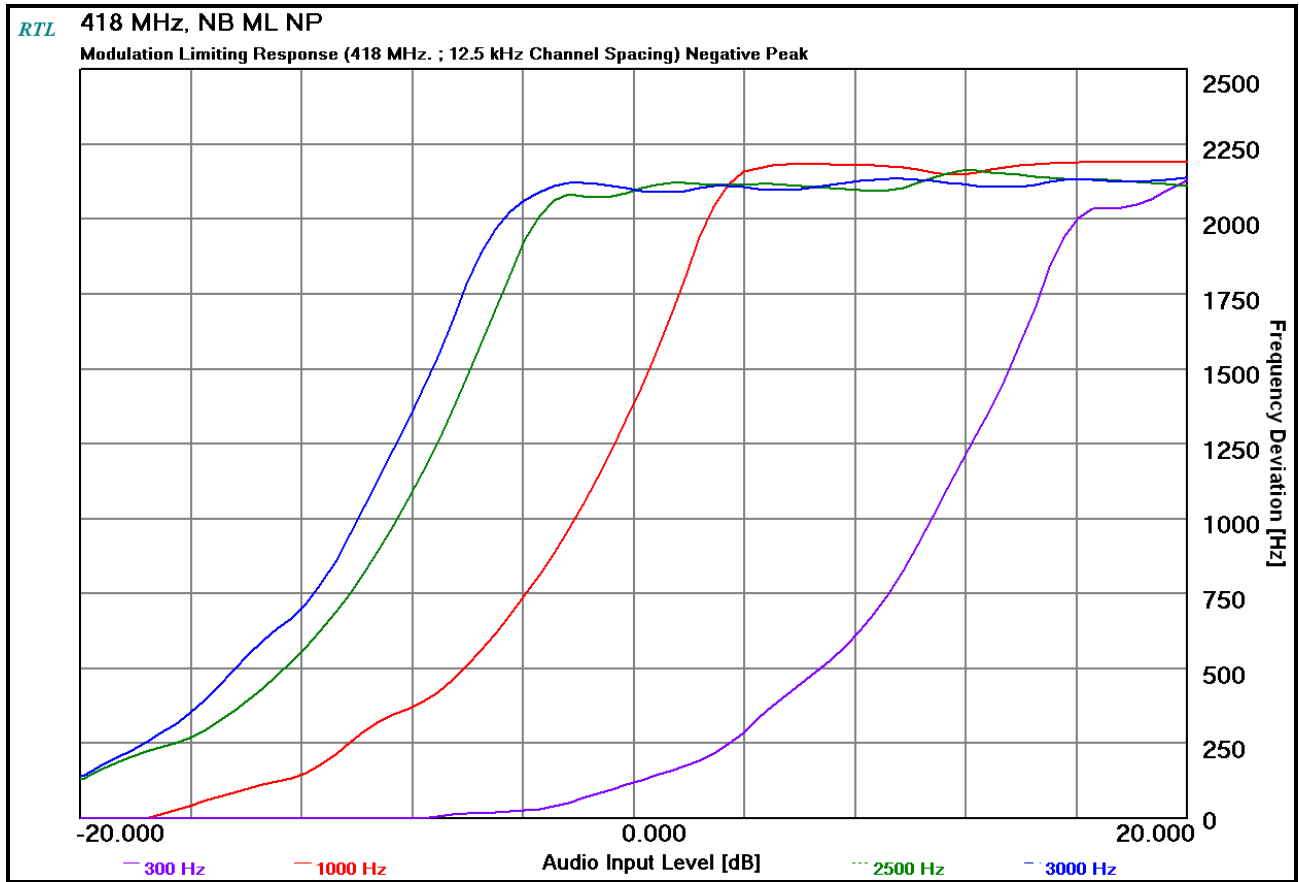


**Plot 10-28: Modulation Characteristics – Modulation Limiting - 418 MHz; Positive Peak; WB**

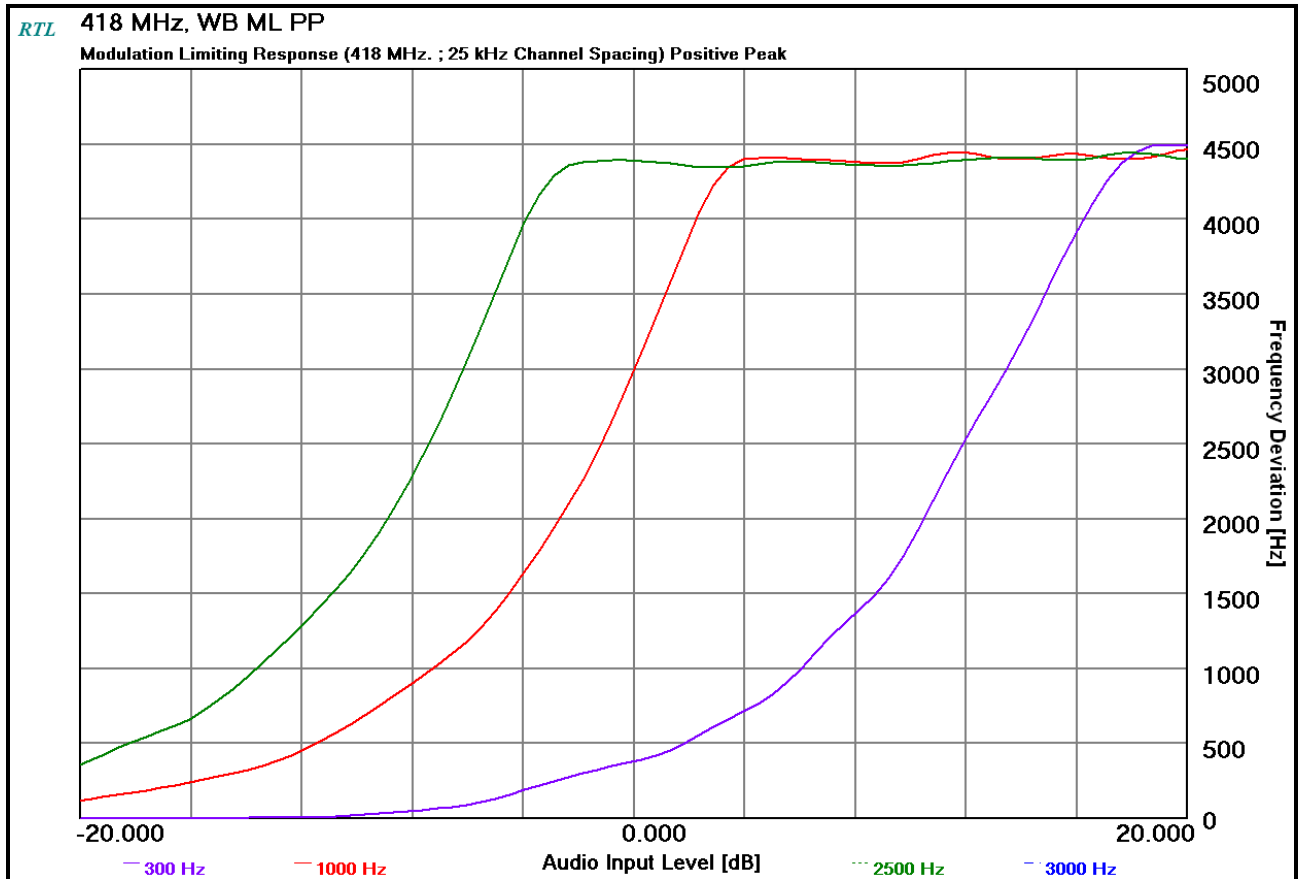


**Plot 10-29: Modulation Characteristics – Modulation Limiting - 418 MHz; Negative Peak; WB**

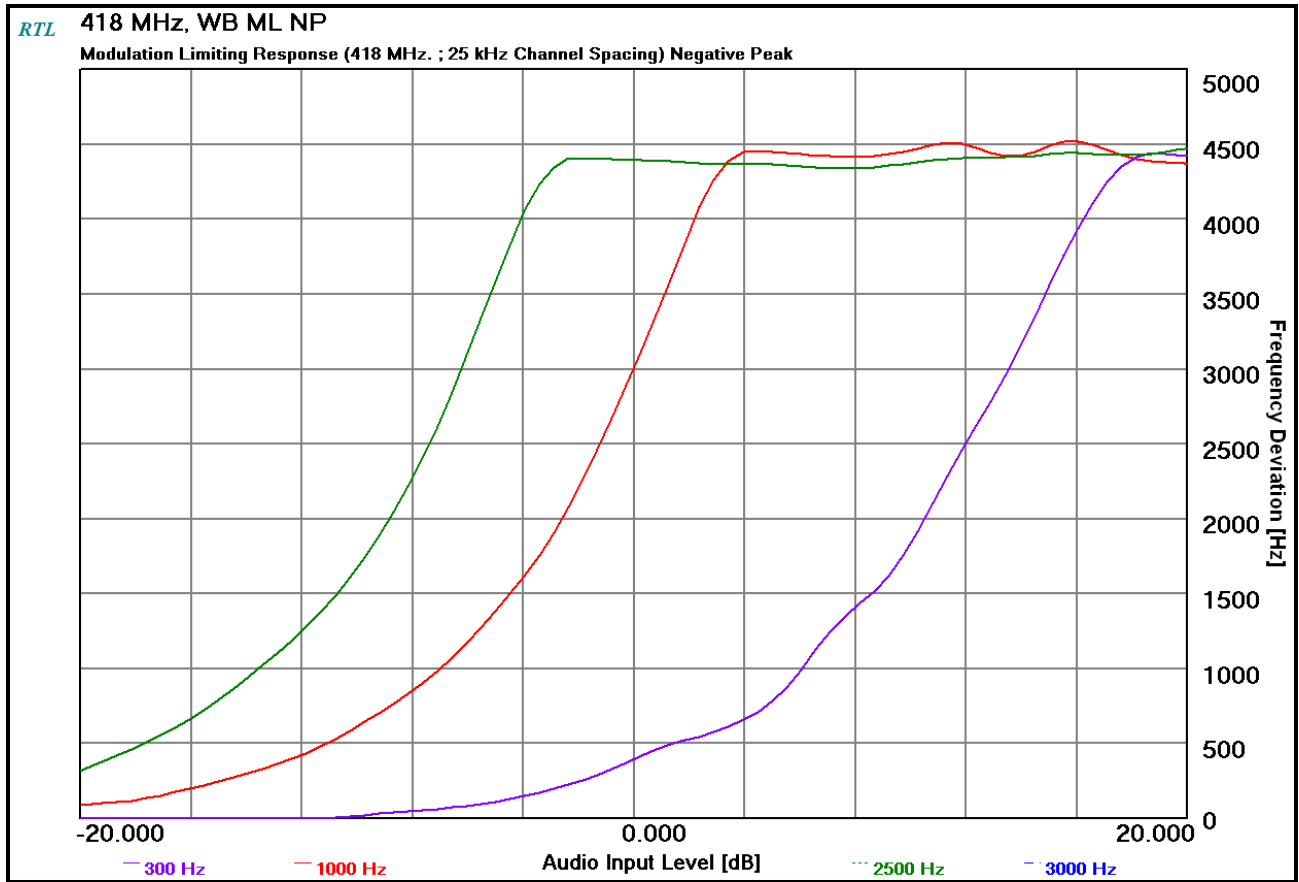


**Plot 10-30: Modulation Characteristics – Modulation Limiting - 470 MHz; Positive Peak; NB**

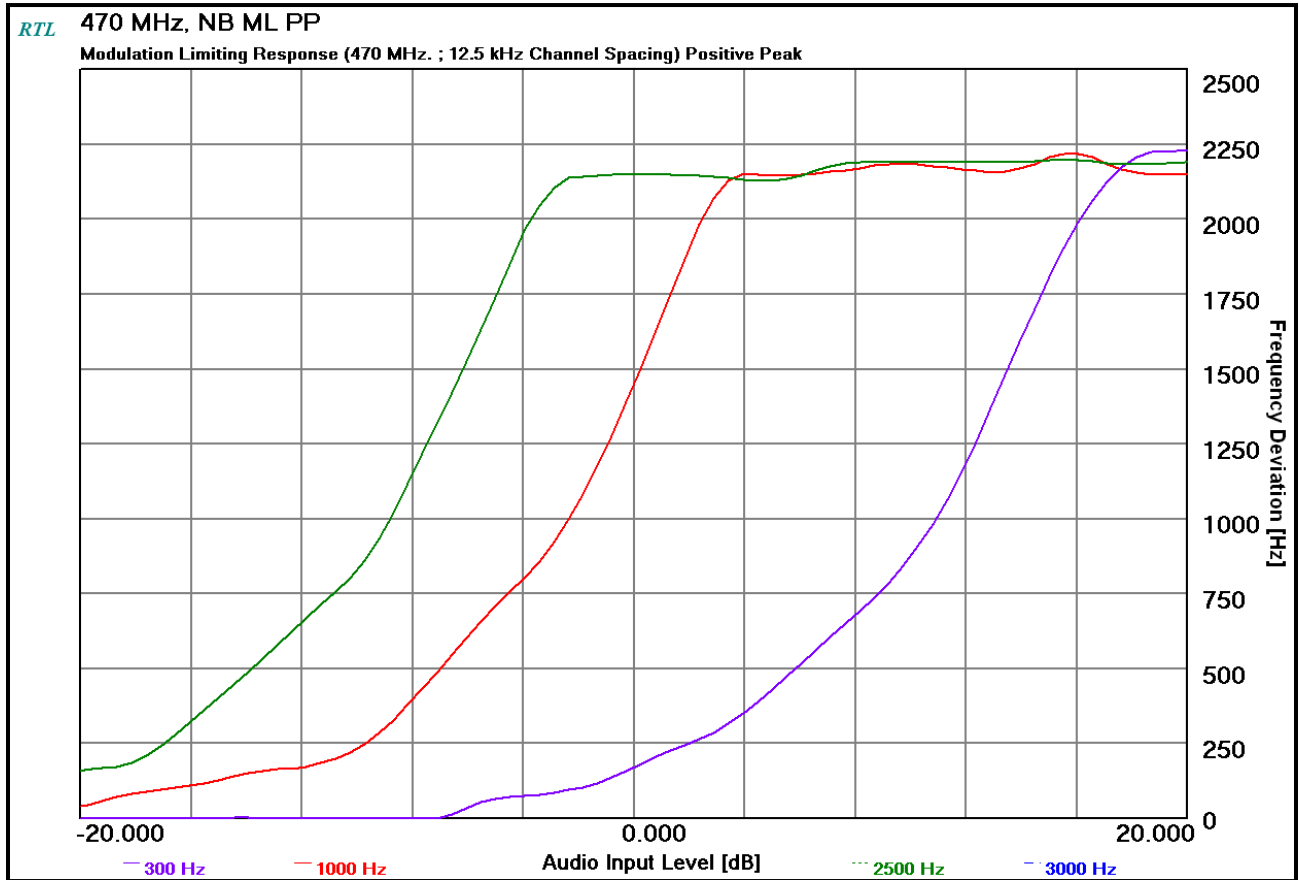


**Plot 10-31: Modulation Characteristics – Modulation Limiting - 470 MHz; Negative Peak; NB**

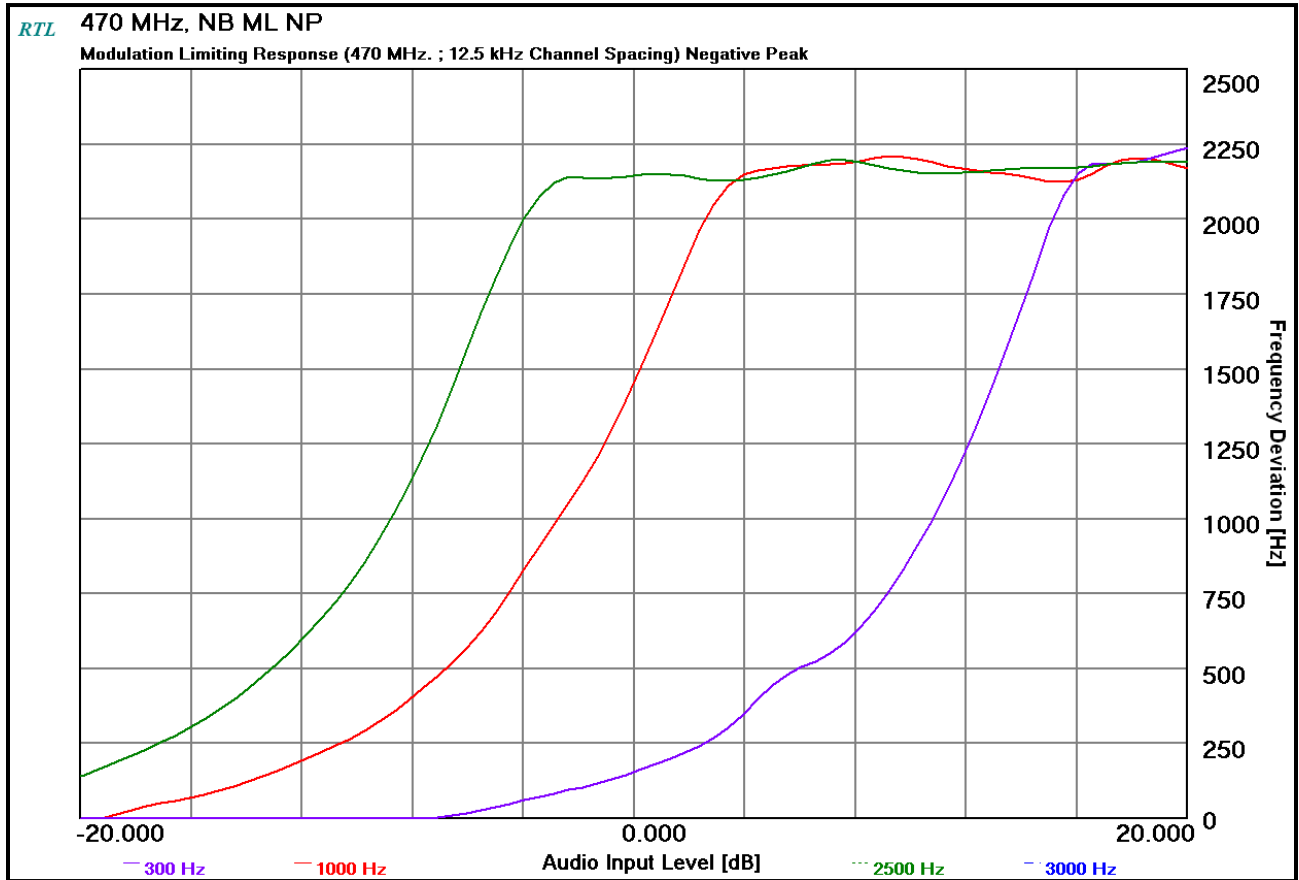

**Plot 10-32: Modulation Characteristics – Modulation Limiting - 470 MHz; Positive Peak; WB**

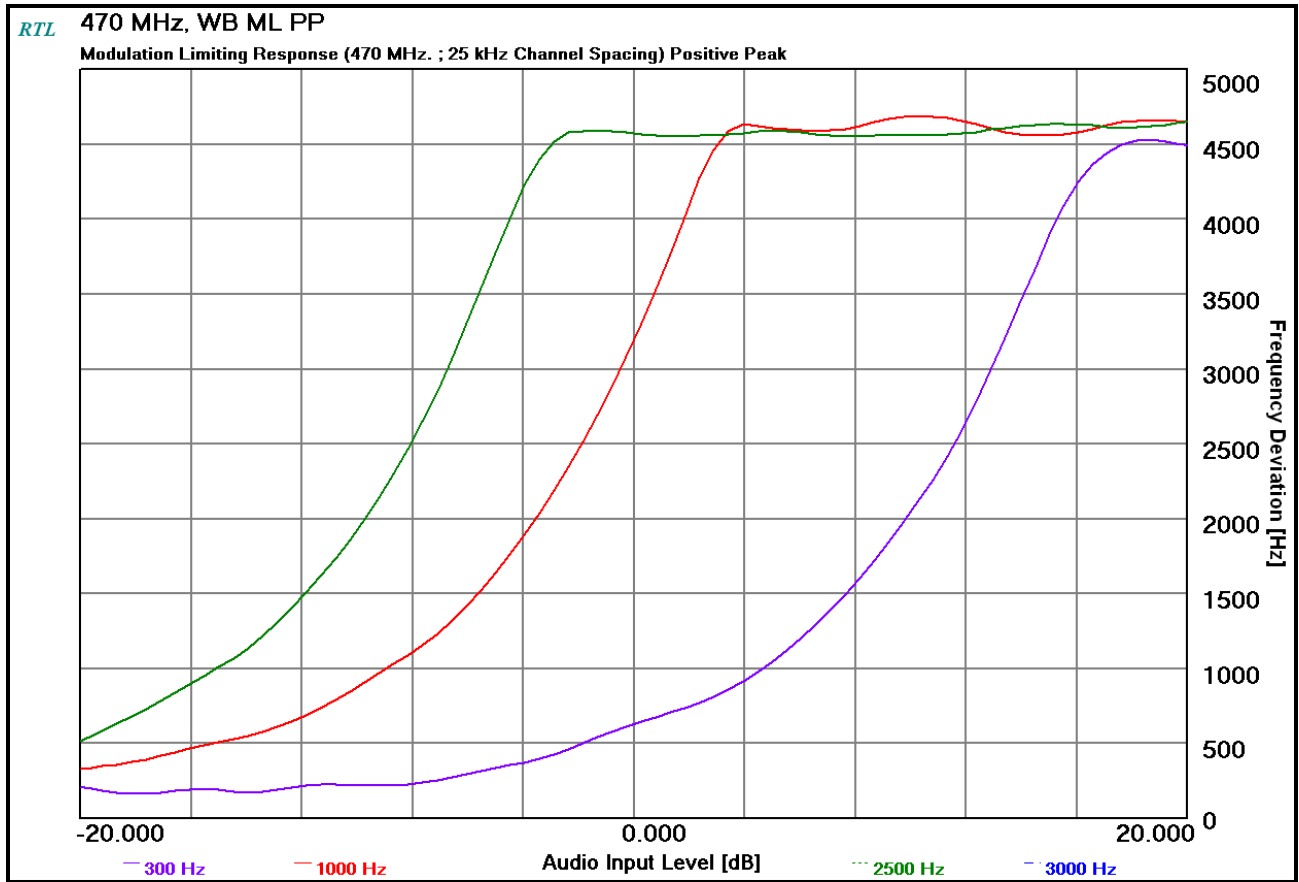


**Plot 10-33: Modulation Characteristics – Modulation Limiting - 470 MHz; Negative Peak; WB**

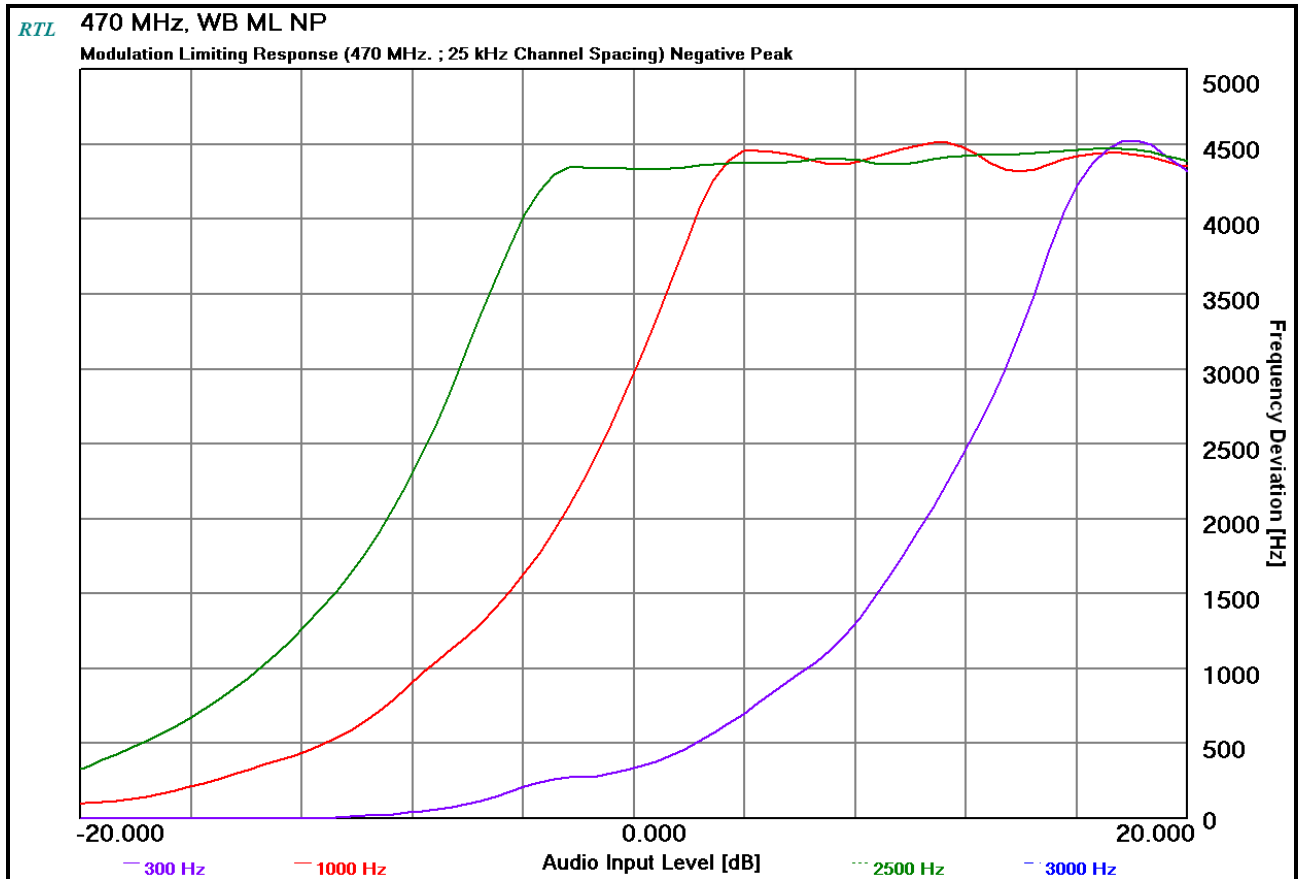





**Plot 10-34: Modulation Characteristics – Modulation Limiting - 768 MHz; Positive Peak; NB**

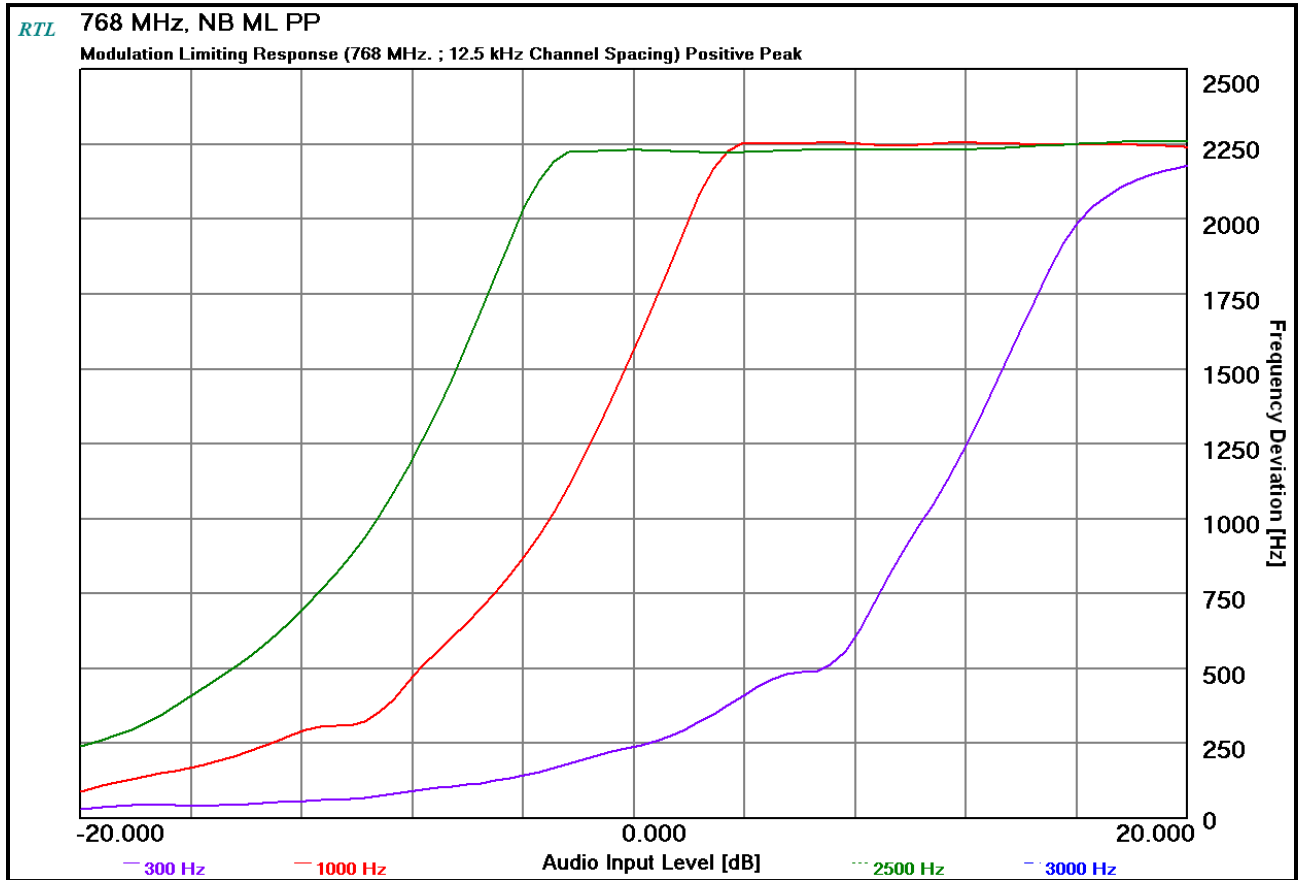


**Plot 10-35: Modulation Characteristics – Modulation Limiting - 768 MHz; Negative Peak; NB**

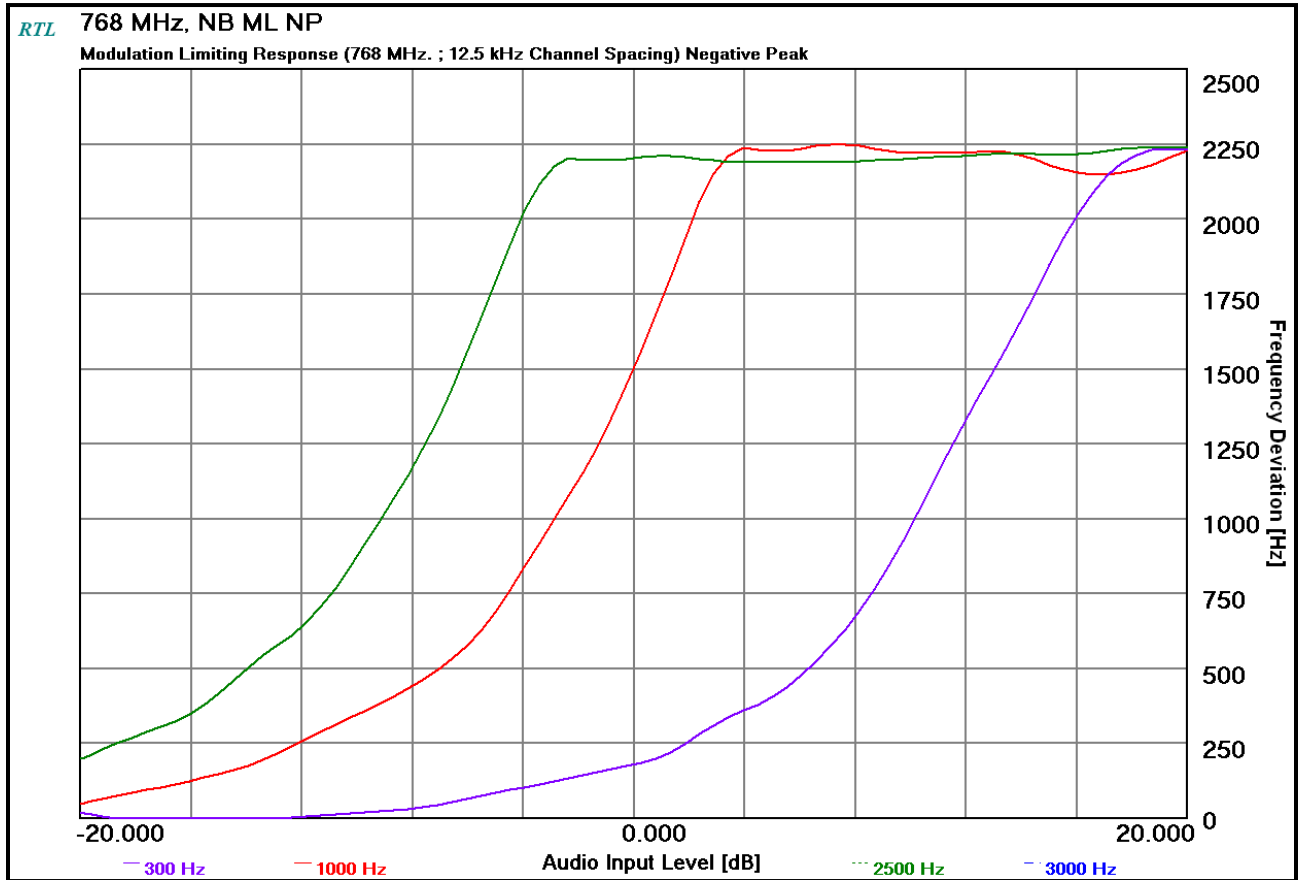


**Plot 10-36: Modulation Characteristics – Modulation Limiting - 798 MHz; Positive Peak; NB**

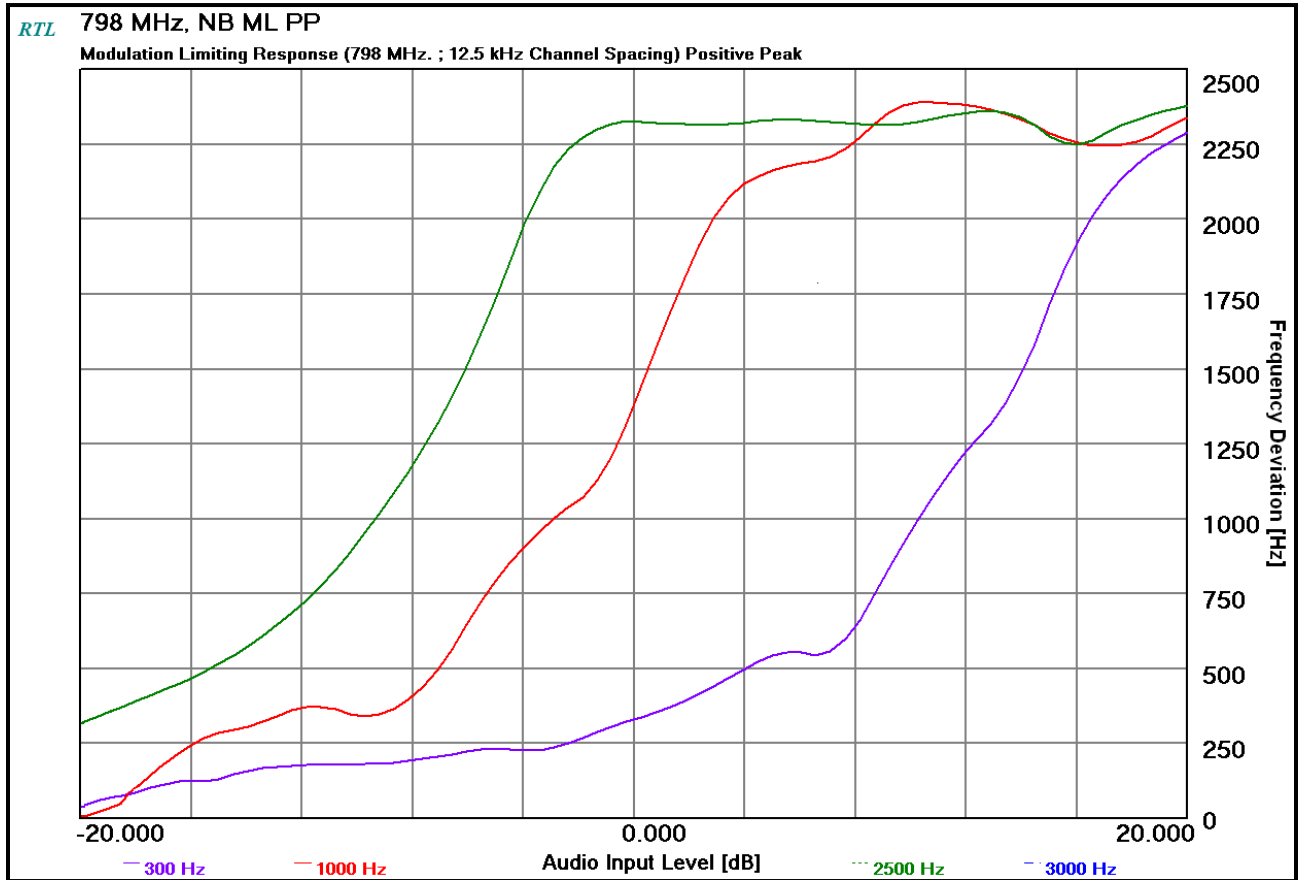


**Plot 10-37: Modulation Characteristics – Modulation Limiting - 798 MHz; Negative Peak; NB**

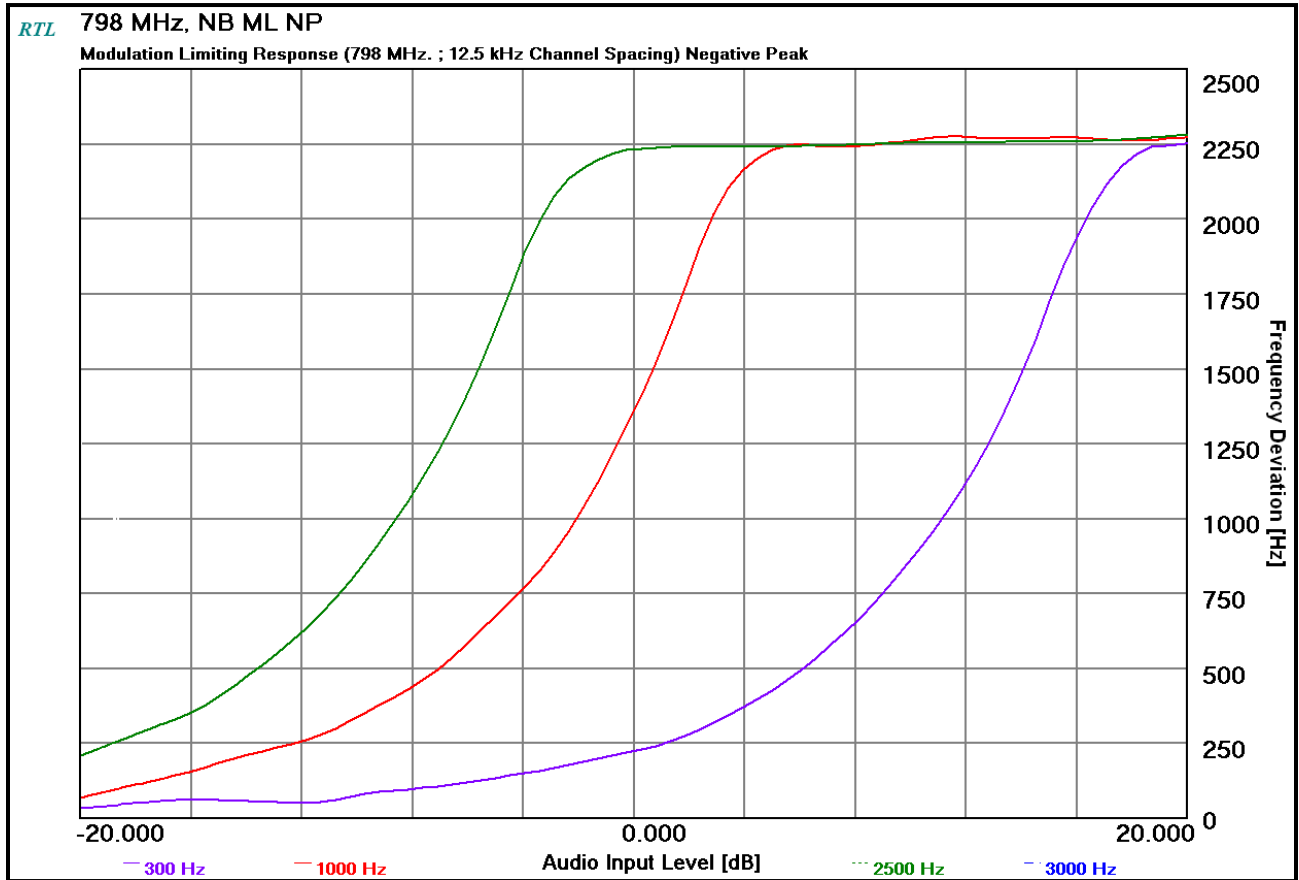


**Plot 10-38: Modulation Characteristics – Modulation Limiting - 815 MHz; Positive Peak; NB**

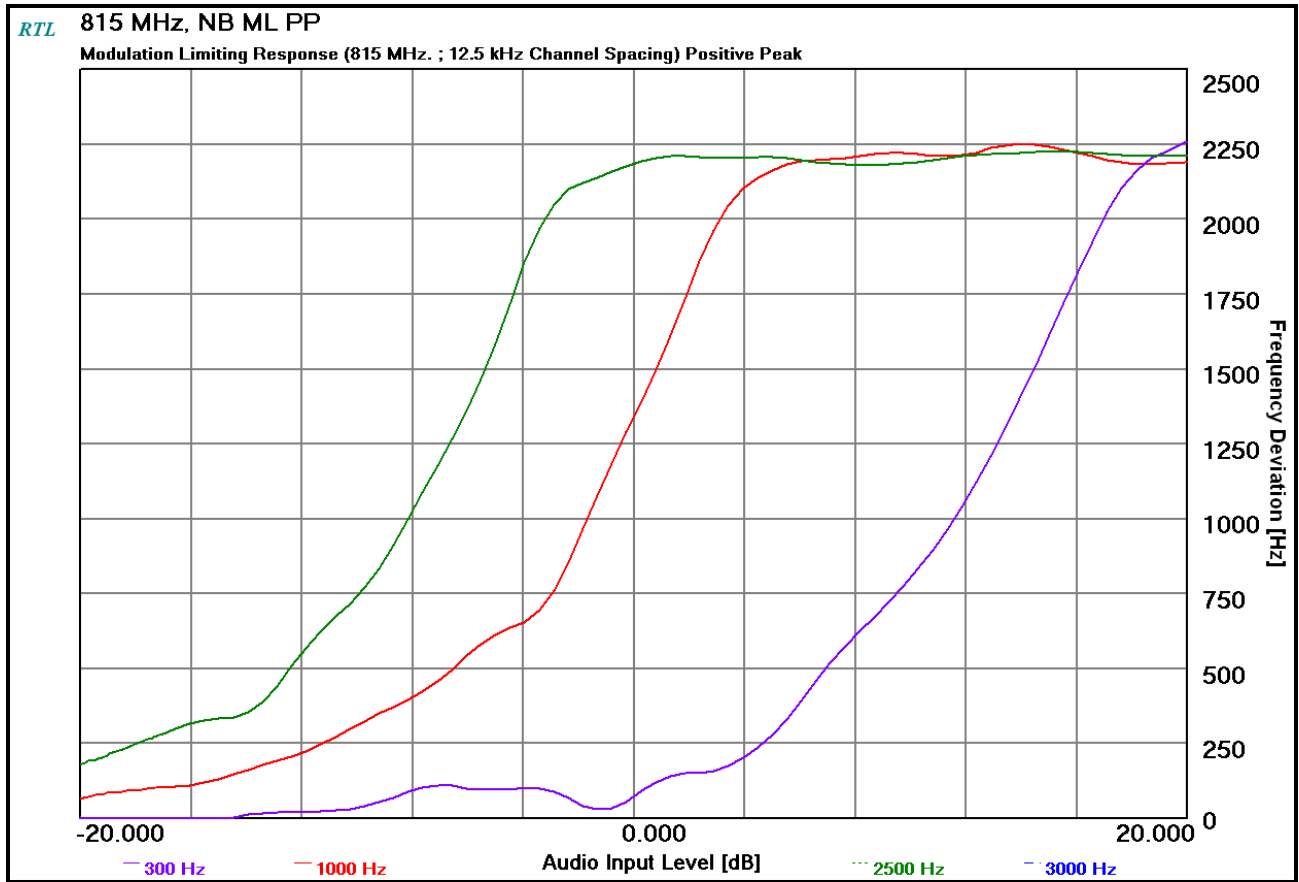


**Plot 10-39: Modulation Characteristics – Modulation Limiting - 815 MHz; Negative Peak; NB**

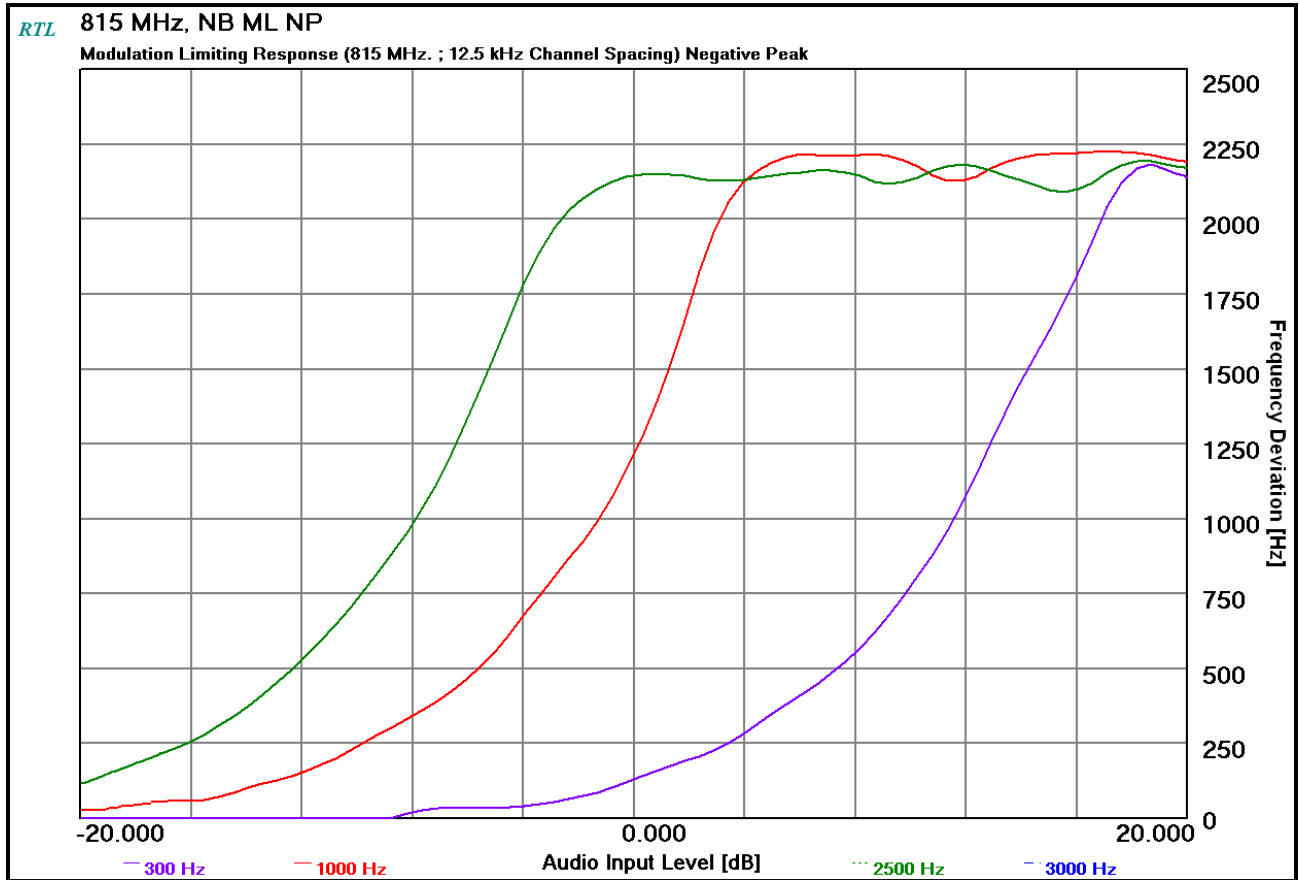

**Plot 10-40: Modulation Characteristics – Modulation Limiting - 815 MHz; Positive Peak; WB**

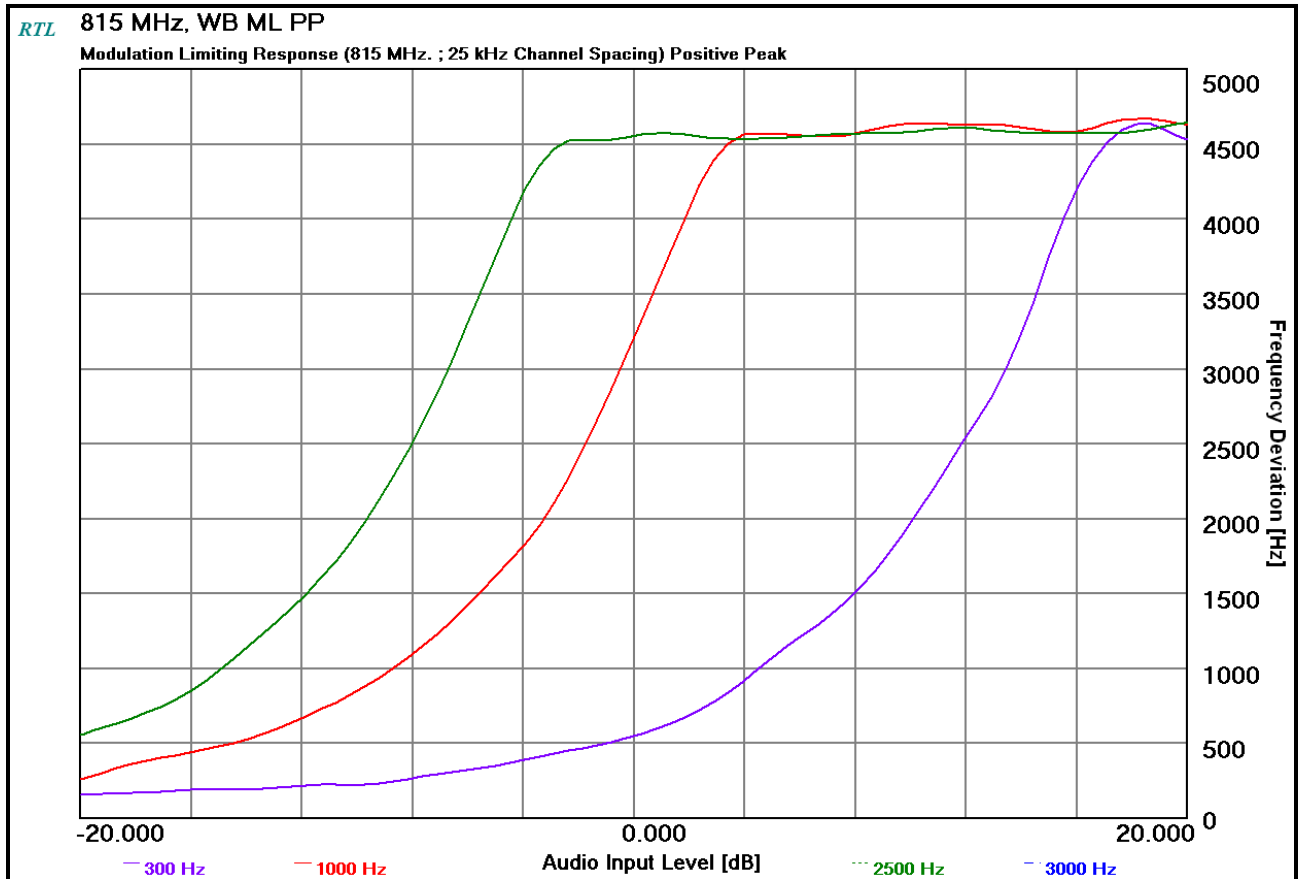


**Plot 10-41: Modulation Characteristics – Modulation Limiting - 815 MHz; Negative Peak; WB**

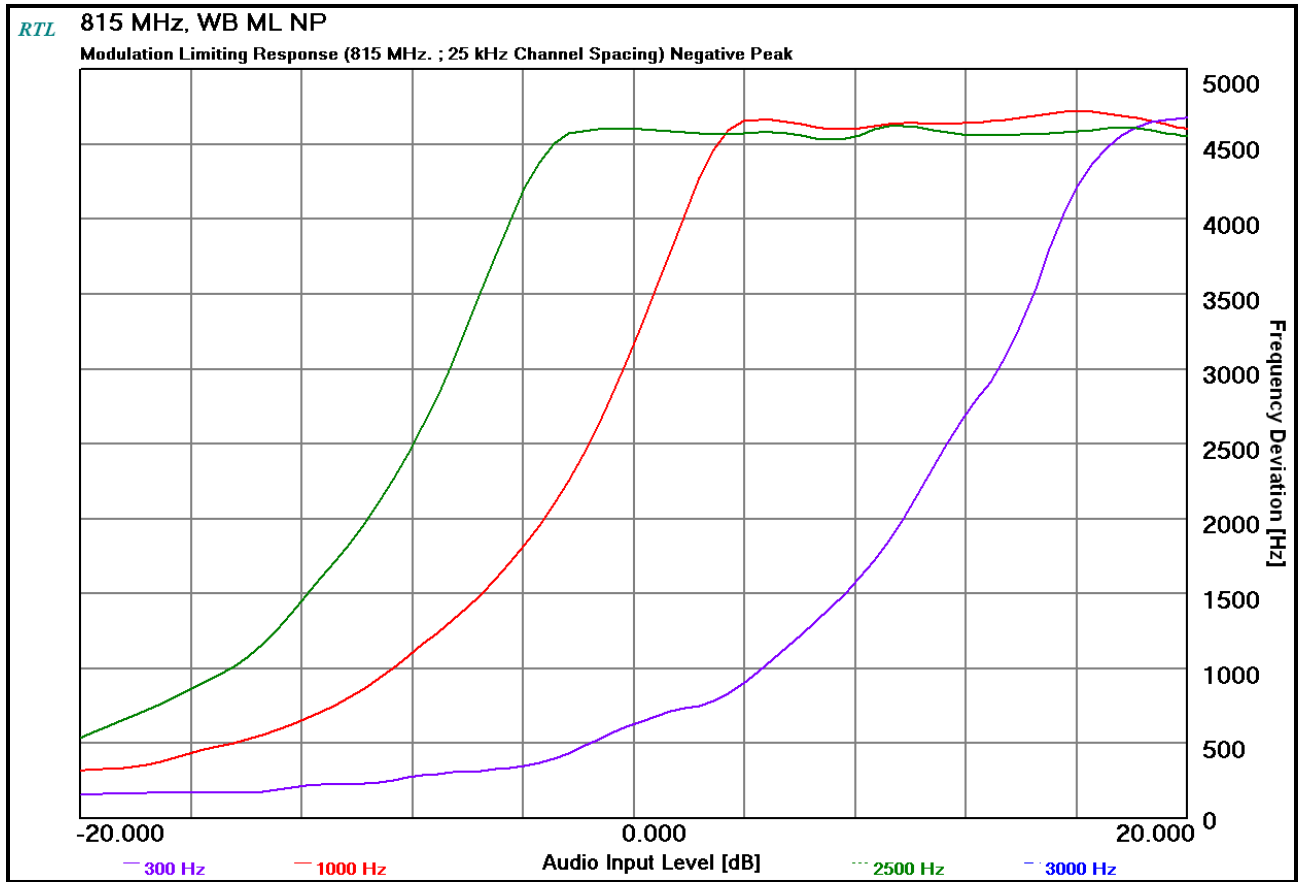





**Plot 10-42: Modulation Characteristics – Modulation Limiting - 816 MHz; Positive Peak; NPSPAC**

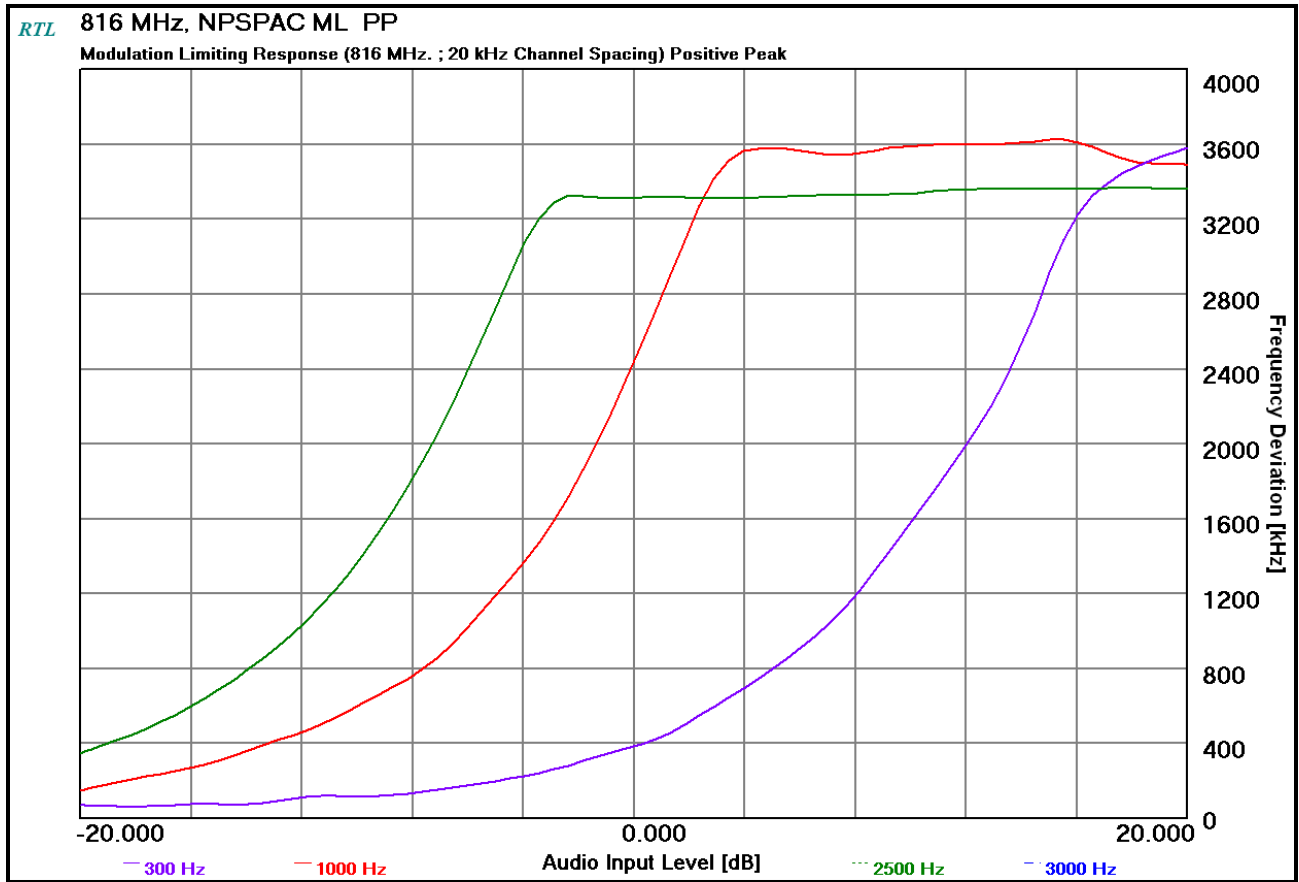


**Plot 10-43: Modulation Characteristics – Modulation Limiting - 816 MHz; Negative Peak; NPSPAC**

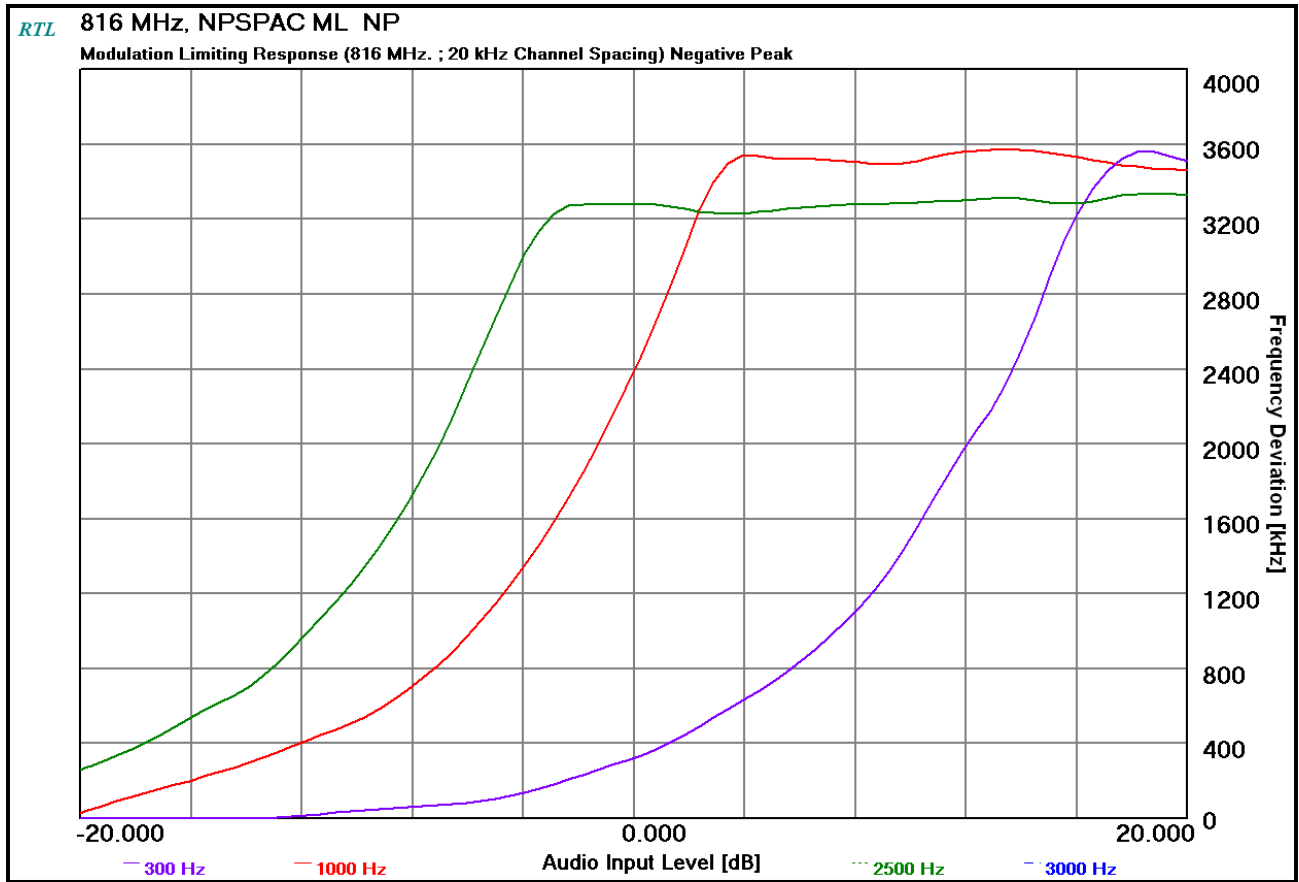


**Plot 10-44: Modulation Characteristics – Modulation Limiting - 860 MHz; Positive Peak; NB**

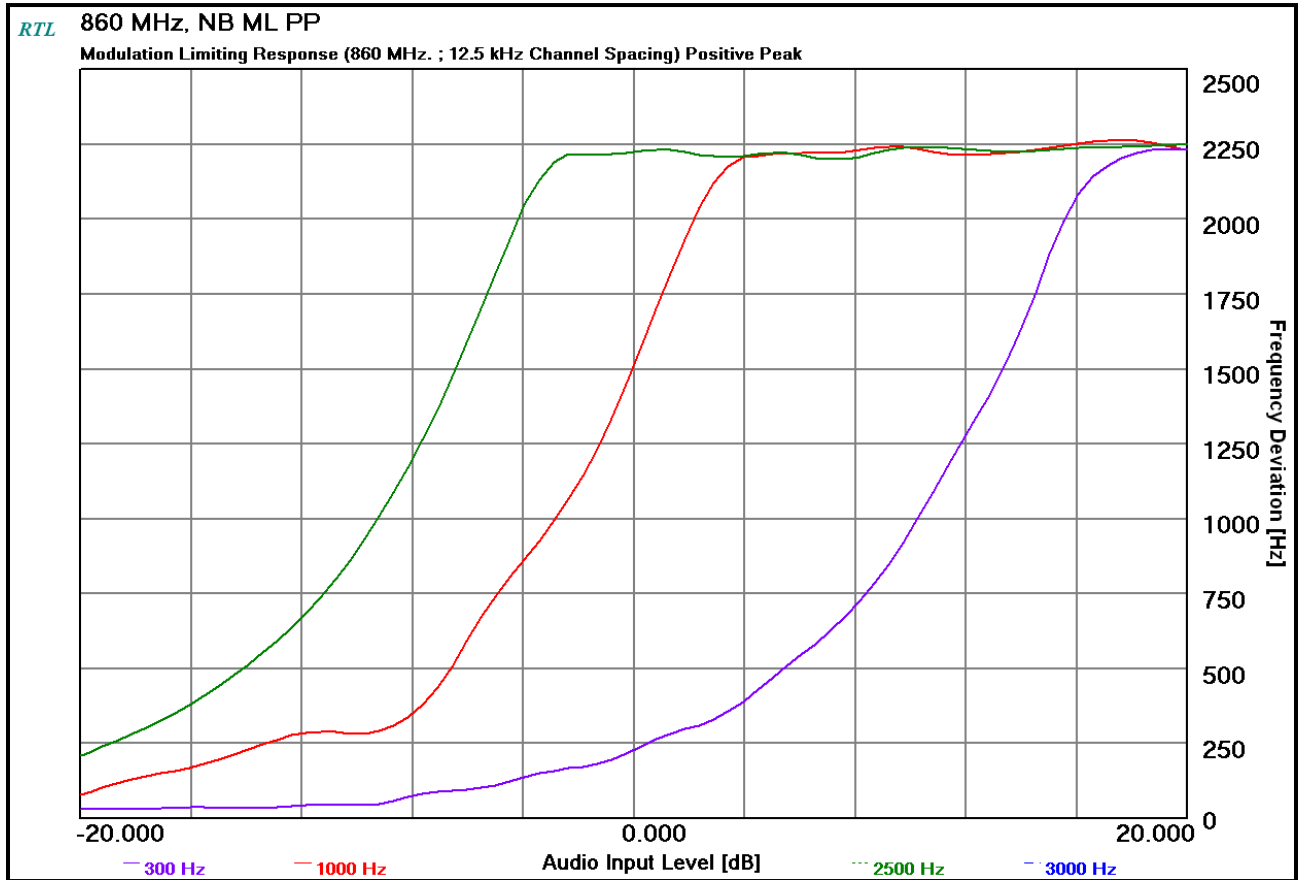


**Plot 10-45: Modulation Characteristics – Modulation Limiting - 860 MHz; Negative Peak; NB**

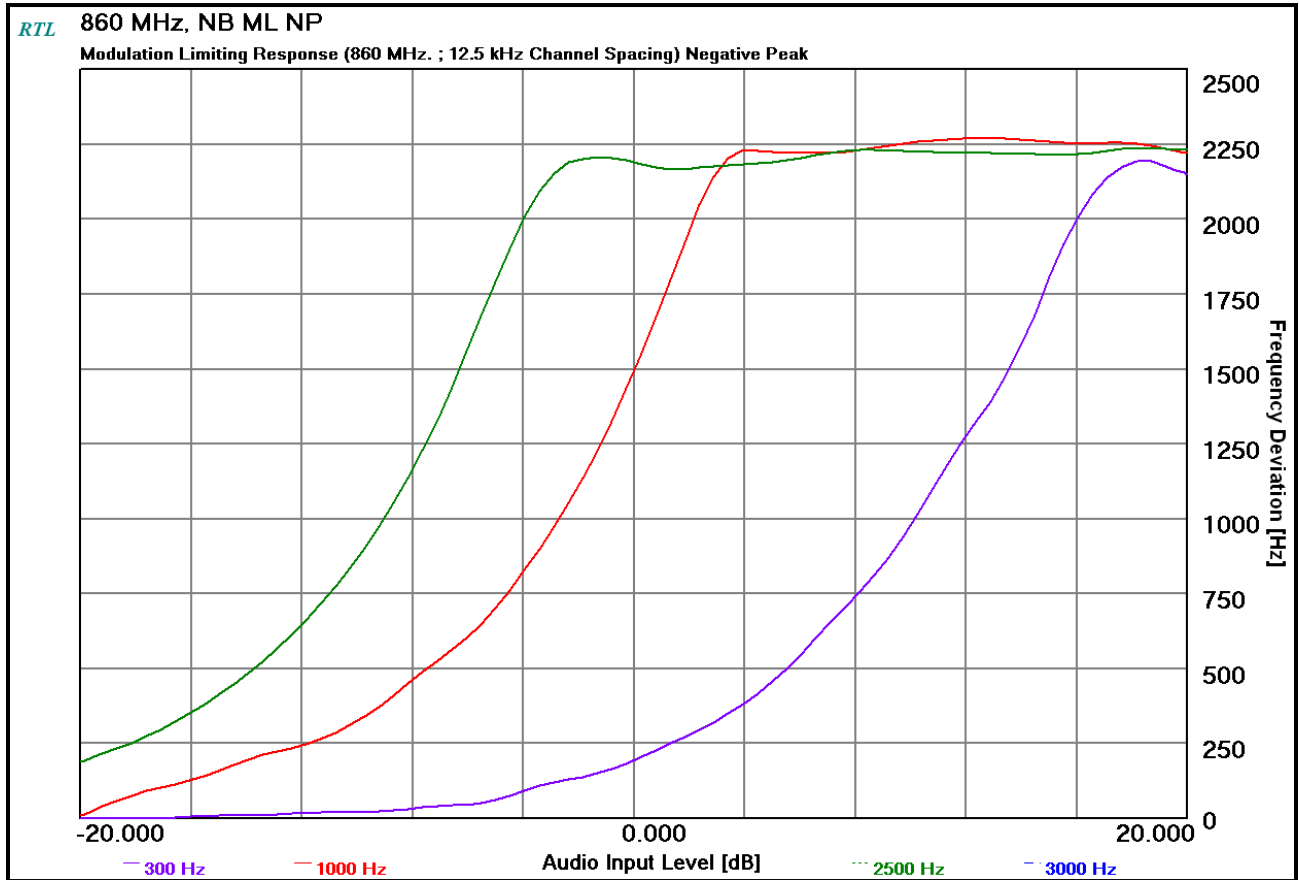


**Plot 10-46: Modulation Characteristics – Modulation Limiting - 860 MHz; Positive Peak; WB**

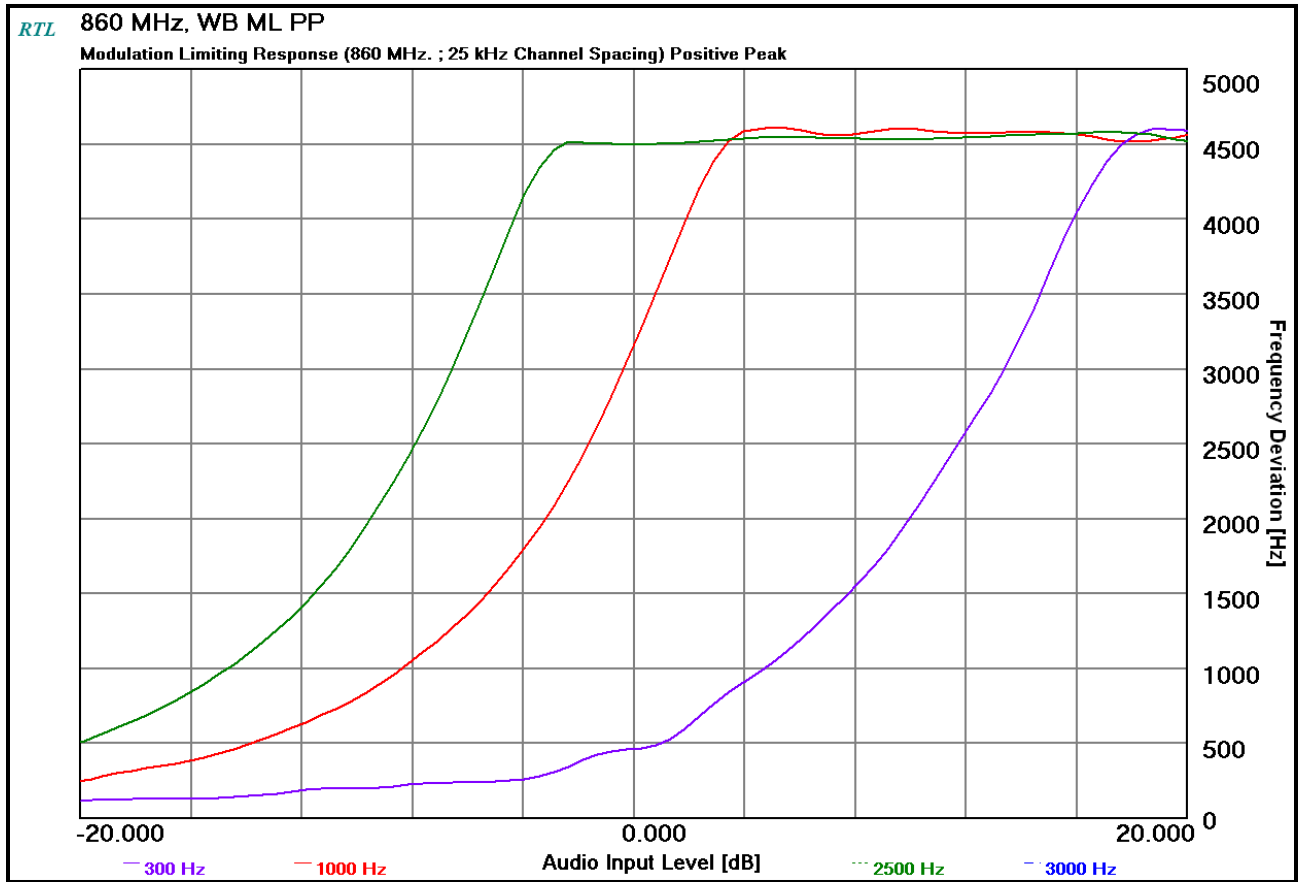


**Plot 10-47: Modulation Characteristics – Modulation Limiting - 860 MHz; Negative Peak; WB**

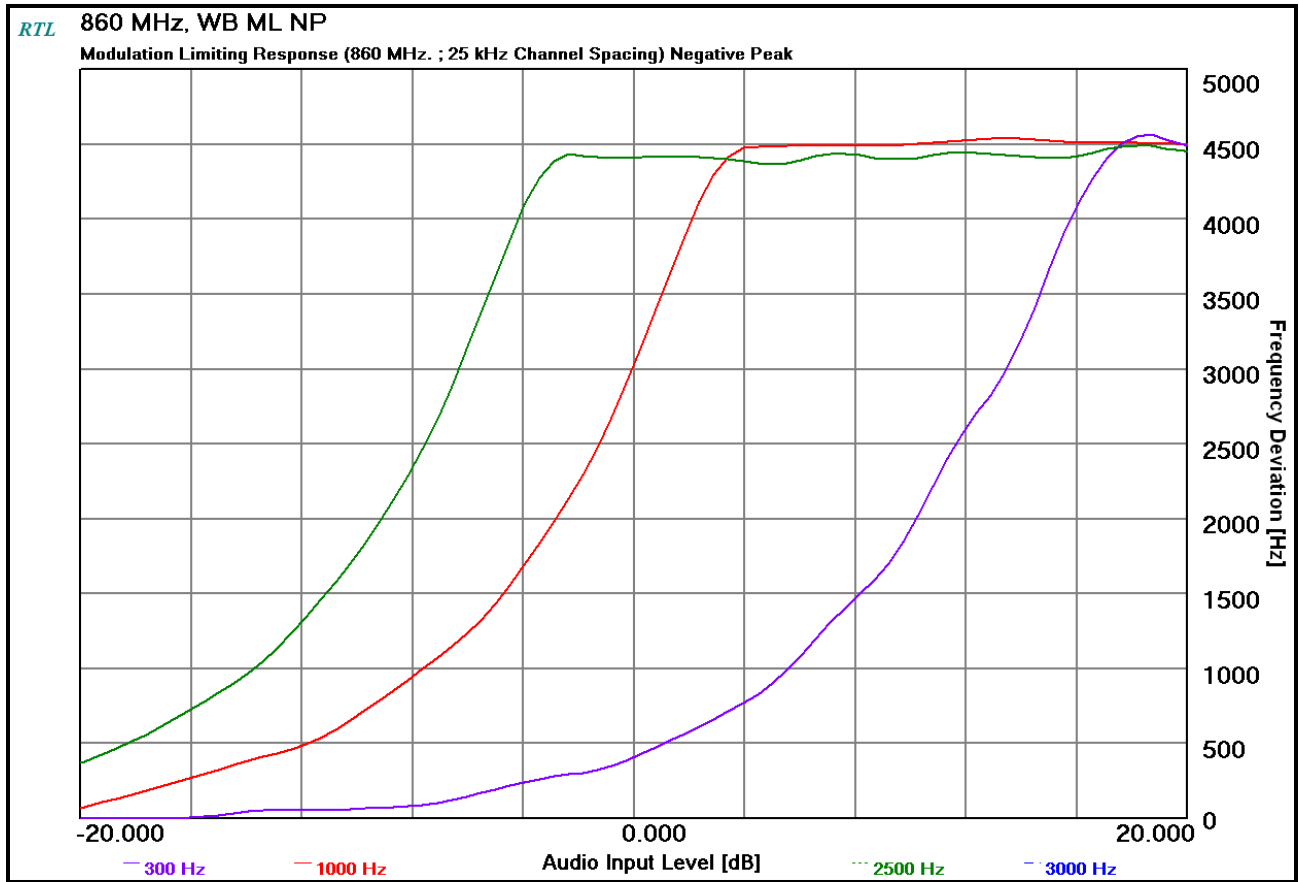

**Plot 10-48: Modulation Characteristics – Modulation Limiting - 861 MHz; Positive Peak; NPSPAC**

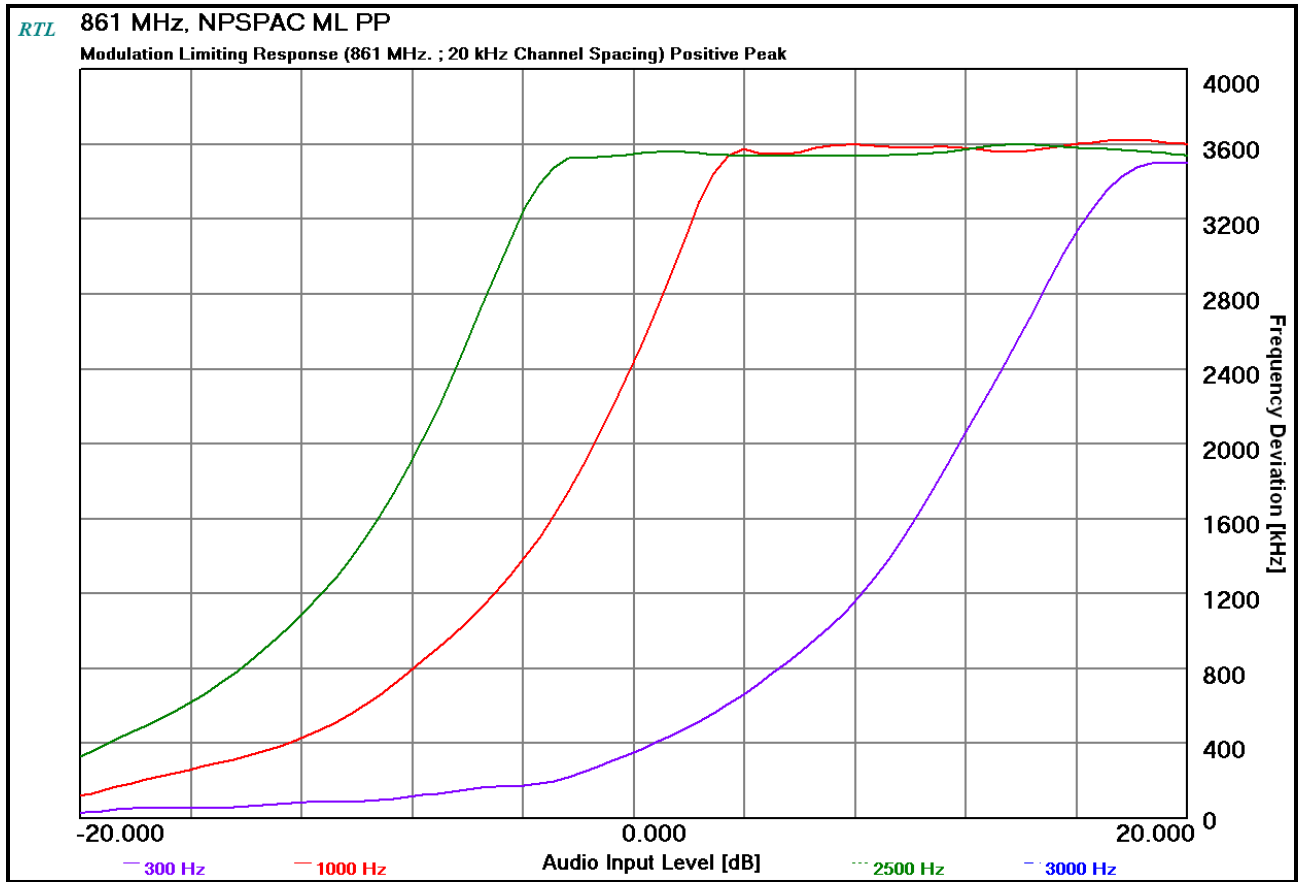

**Plot 10-49: Modulation Characteristics – Modulation Limiting - 861 MHz; Negative Peak; NPSPAC**

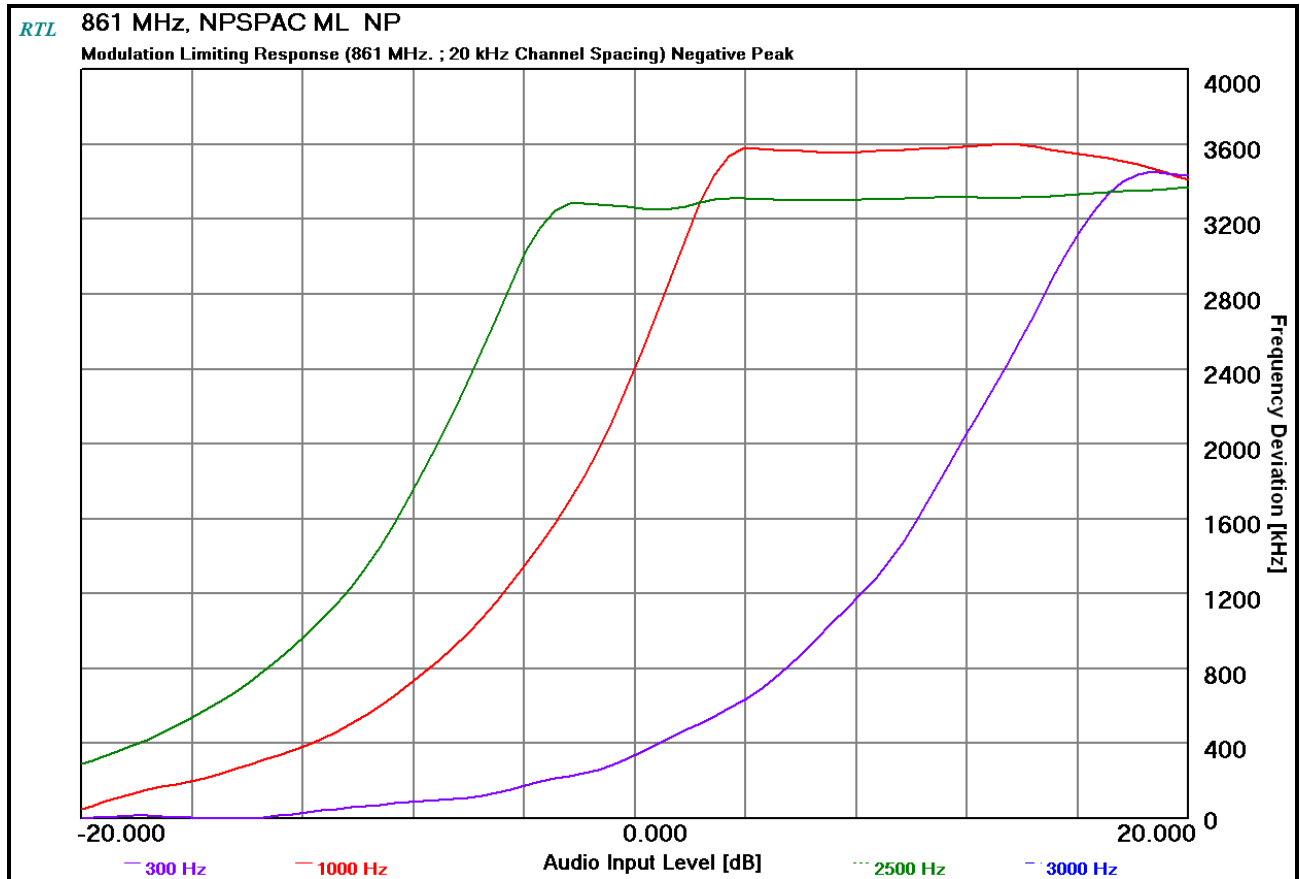

**Table 10-1: Test Equipment Used For Modulation Requirements**

| RTL Asset # | Manufacturer             | Model    | Part Type                               | Serial Number | Calibration Due Date |
|-------------|--------------------------|----------|---|---------------|----------------------|
| 901057      | Hewlett Packard          | 3336B    | Synthesizer/<br>Level Generator         | 2514A02585    | 4/13/18              |
| 901118      | Hewlett Packard          | HP8901B  | Modulation Analyzer<br>150 kHz-1300 MHz | N/A           | 4/14/18              |
| 901581      | Rohde &<br>Schwarz       | FSU      | Spectrum Analyzer                       | 1166.1660.50  | 3/22/18              |
| 900948      | Weinschel<br>Corporation | 47-10-43 | Attenuator DC-18 GHz<br>10 dB 50W       | BH1487        | 9/1/18               |

**Test Personnel:**

Daniel W. Baltzell  
 EMC Test Engineer

Signature


May 17-25, 2017  
 Dates of Tests



**11 FCC §74.462(c): Authorized Bandwidth and Emissions; §90.214: Transient Frequency Response; RSS-119 5.9: Transient Frequency Behavior**

**11.1 Test Procedure**

ANSI C63-26 6.5.2.2

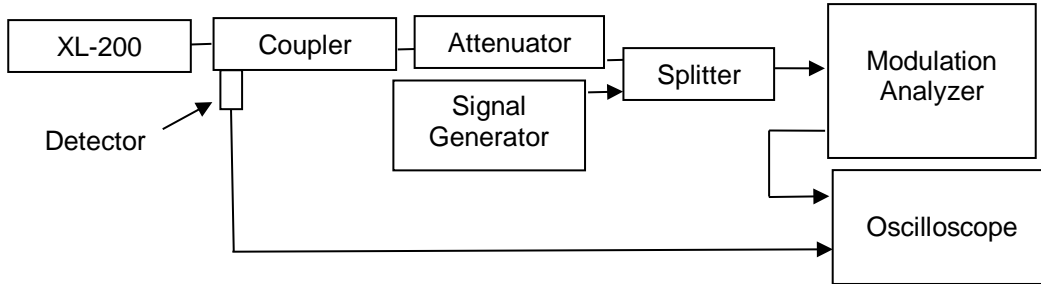

**§90.214 Transient Frequency Behavior**

Transmitters designed to operate in the 150–174 MHz and 421–512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time intervals <sup>1,2</sup>   | Maximum frequency difference <sup>3</sup> | All equipment  |                |
|---|---|----------------|----------------|
|   |   | 150 to 174 MHz | 421 to 512 MHz |
| Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels   |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ±12.5 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ±6.25 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ±3.125 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |

<sup>1</sup> t<sub>on</sub> is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub> is the time period immediately following t<sub>on</sub>.

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.

t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.


<sup>2</sup> During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.


<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

## 11.2 Test Data


Plot 11-1: Transient Frequency Behavior – 150 MHz; High Power; Narrowband; Carrier ON Time

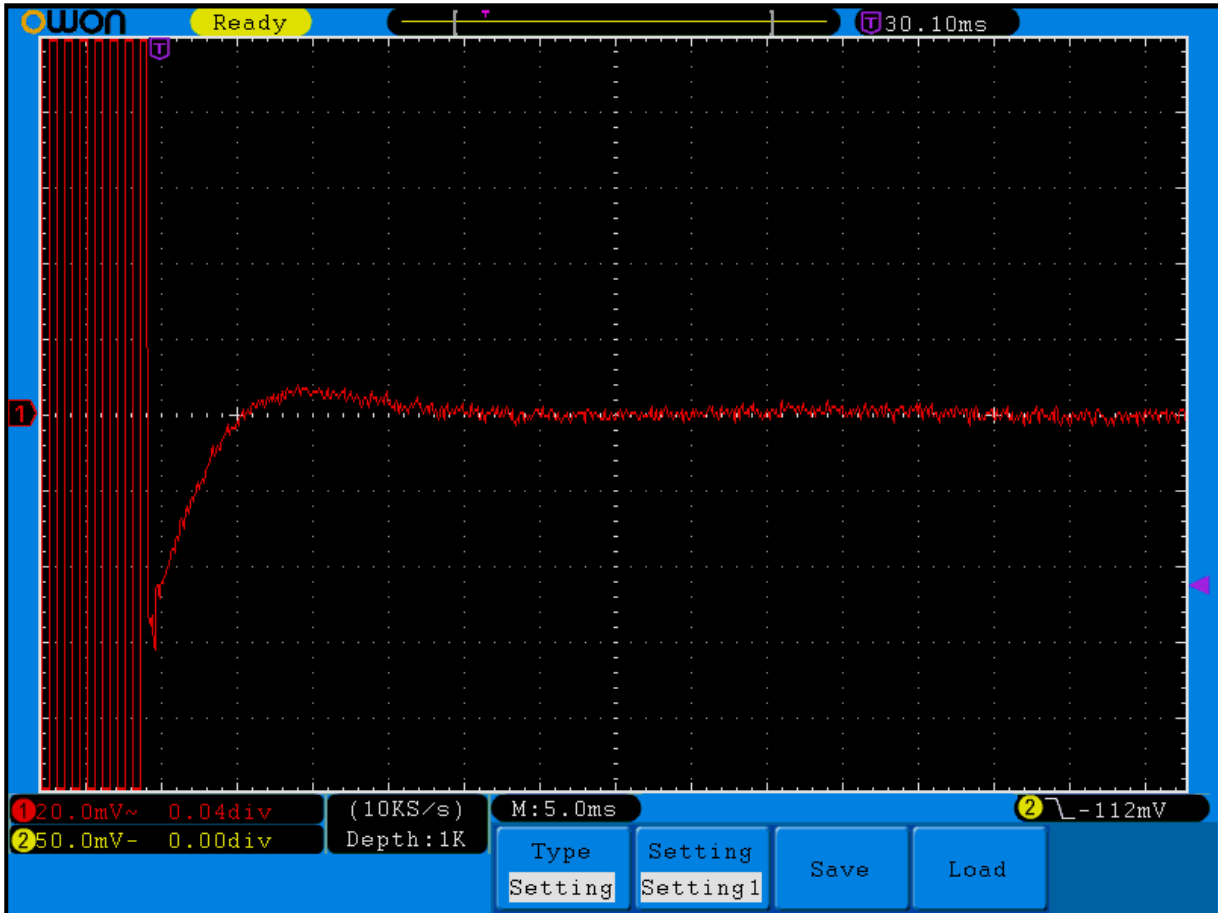


**Plot 11-2: Transient Frequency Behavior – 162 MHz; High Power; Narrowband; Carrier OFF Time**

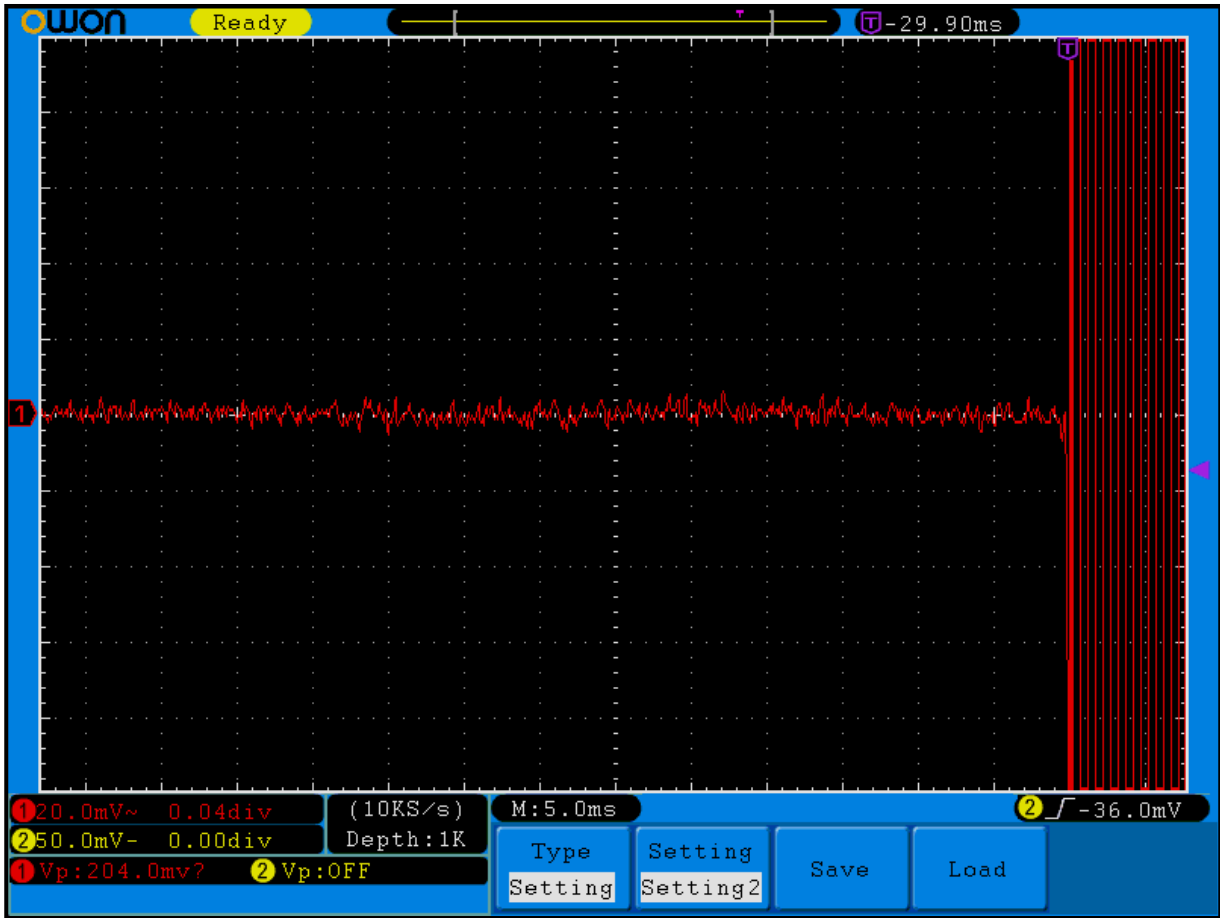


Plot 11-3: Transient Frequency Behavior – 174 MHz; High Power; Wideband; Carrier ON Time

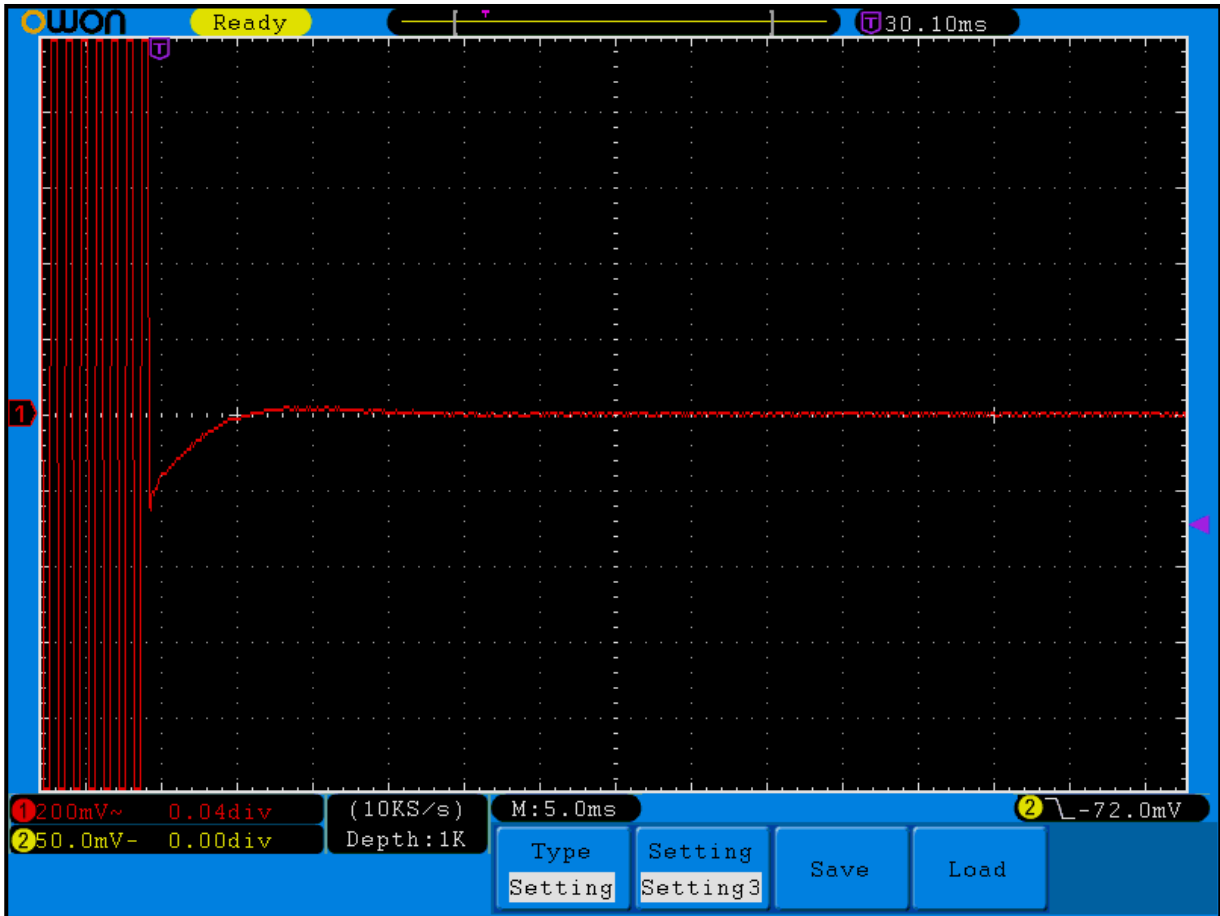


**Plot 11-4: Transient Frequency Behavior – 174 MHz; High Power; Wideband; Carrier OFF Time**

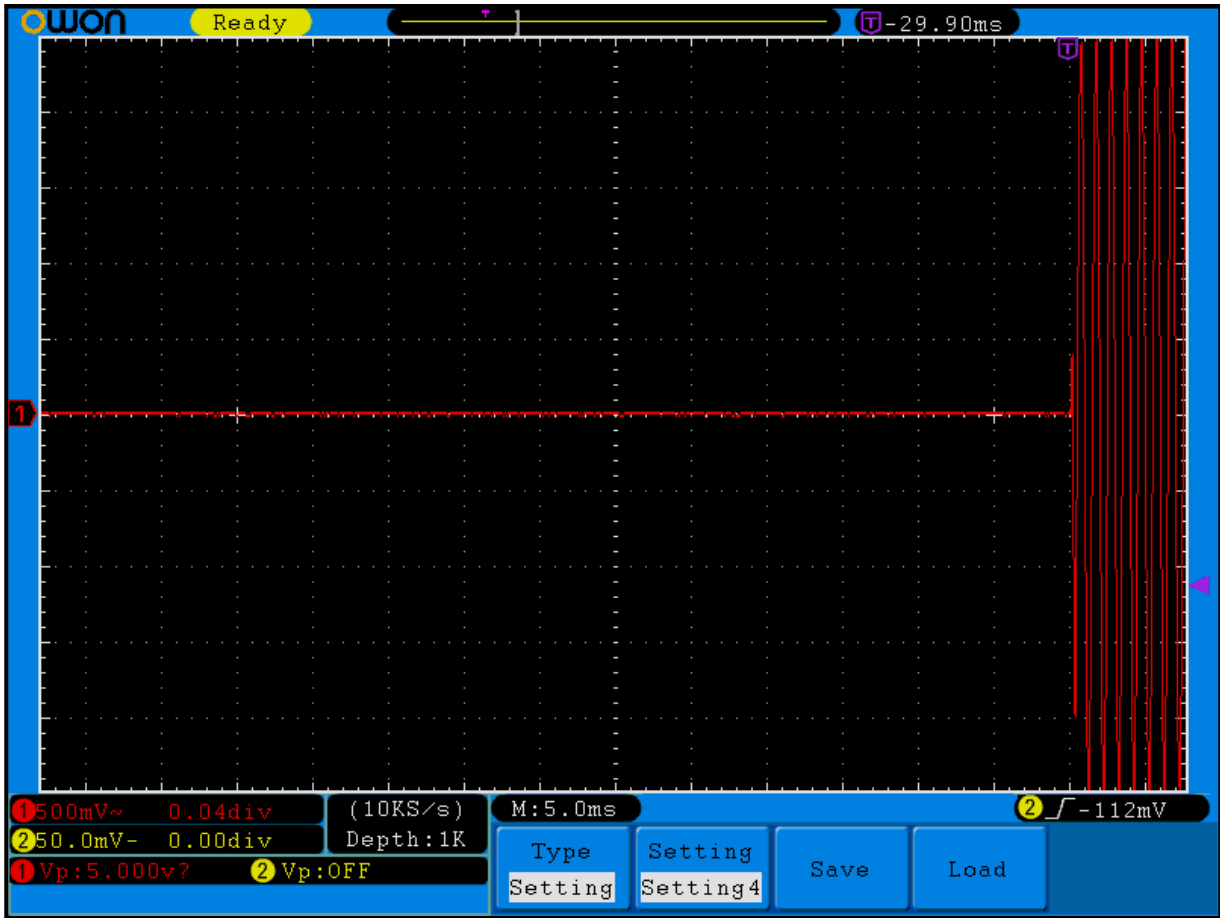


Plot 11-5: Transient Frequency Behavior – 430 MHz; High Power; Narrowband; Carrier ON Time

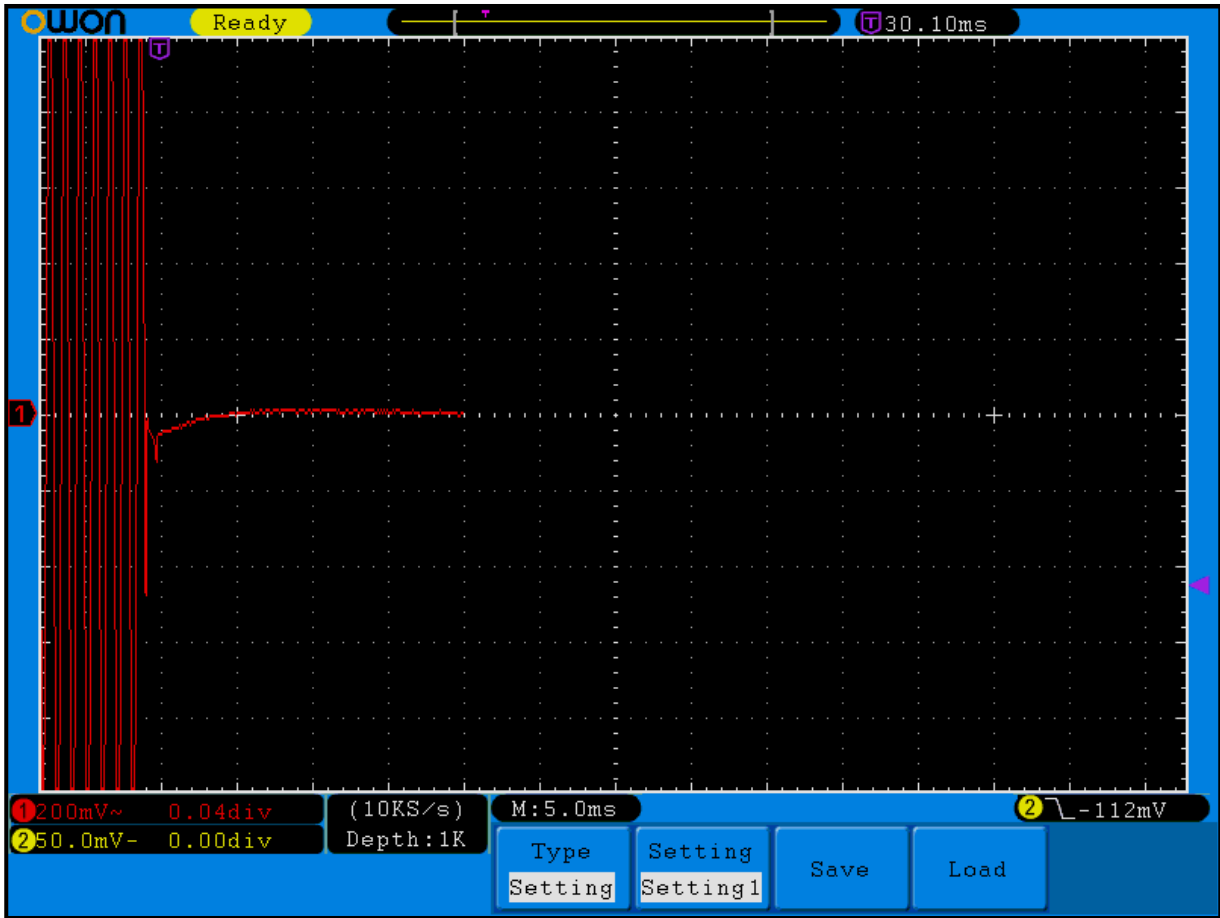

**Plot 11-6: Transient Frequency Behavior – 430 MHz; High Power; Narrowband; Carrier OFF Time**

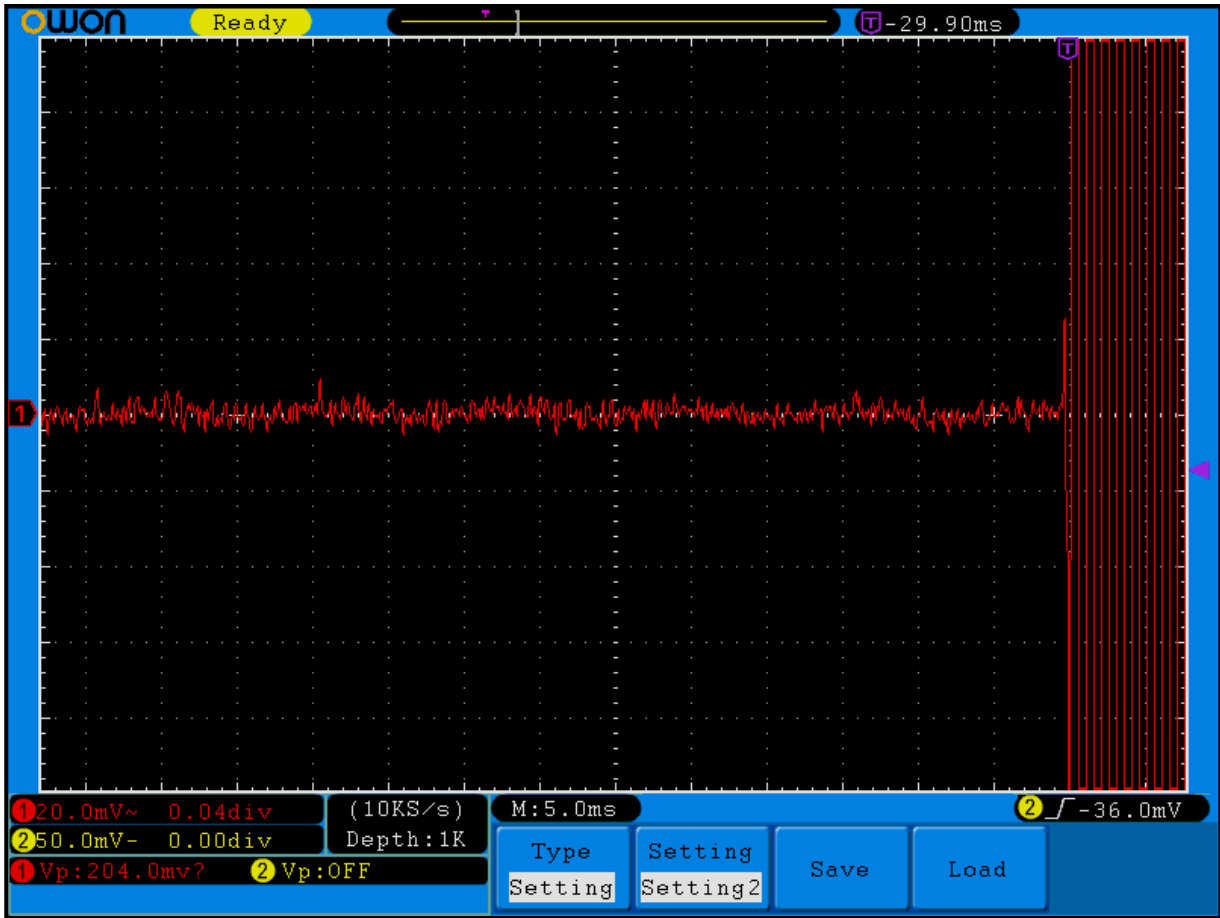


**Plot 11-7: Transient Frequency Behavior – 512 MHz; High Power; Wideband; Carrier ON Time**

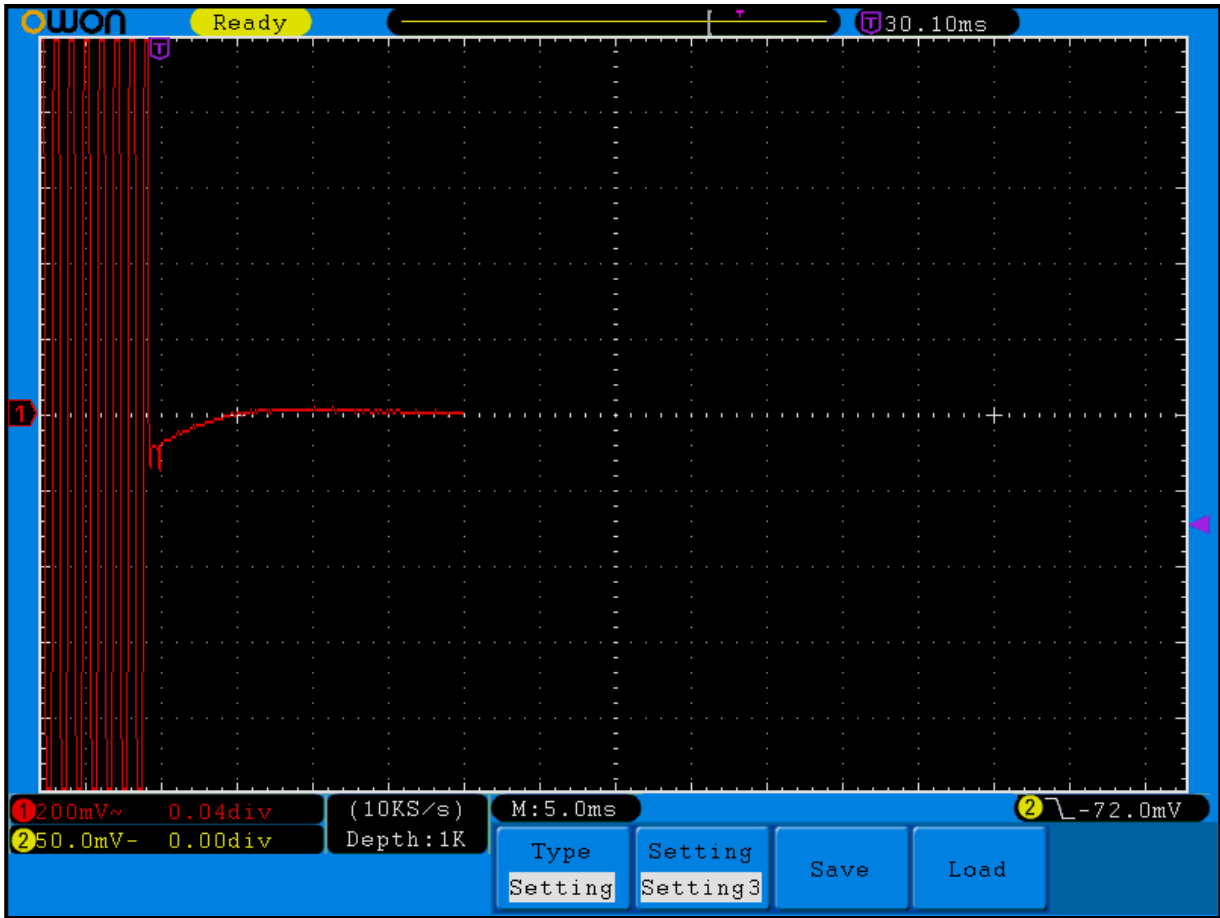



**Plot 11-8: Transient Frequency Behavior – 512 MHz; High Power; Wideband; Carrier OFF Time**

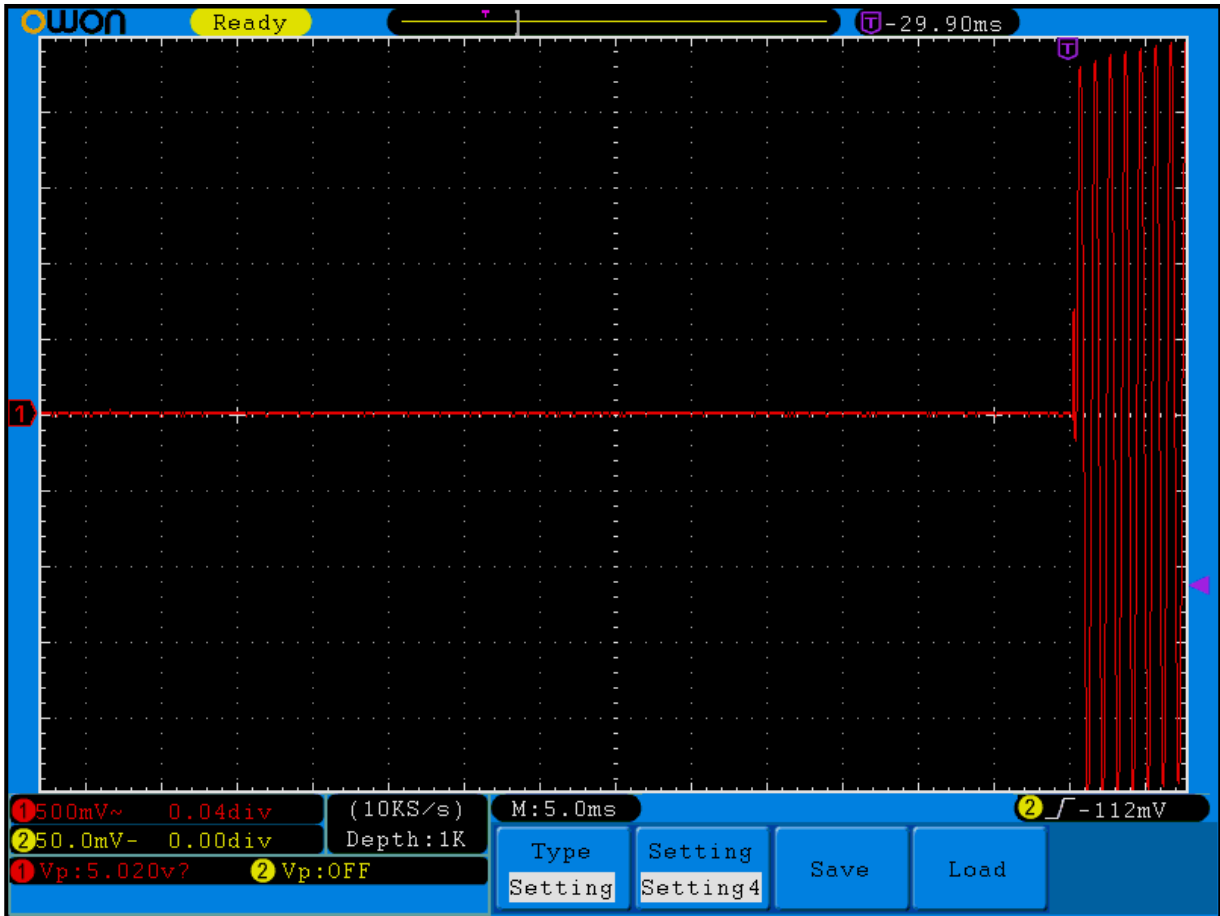

**Table 11-1: Test Equipment Used For Testing Transient Frequency Behavior**

| RTL Asset # | Manufacturer          | Model        | Part Type  | Serial Number  | Calibration Due Date |
|-------------|-----------------------|--------------|--|----------------|----------------------|
| 901582      | Rohde & Schwarz       | 1167.0000.02 | Signal Generator                                   | 101903         | 3/20/18              |
| 901118      | Hewlett Packard       | HP8901B      | Modulation Analyzer<br>150 kHz-1300 MHz            | N/A            | 4/14/18              |
| 901651      | OWON                  | SmartDS7102V | Oscilloscope                                       | SDS71021434850 | 10/20/17             |
| 901463      | Werlatone Inc.        | C1795        | Directional Coupler,<br>100W, 40 dB,<br>1-1000 MHz | 4067           | 9/30/17              |
| 901263      | Agilent               | .01-12 GHz   | SMA Detector                                       | 2936A05505     | Not<br>Required      |
| 900948      | Weinschel Corporation | 47-10-43     | Attenuator DC-18<br>GHz 10 dB 50W                  | BH1487         | 9/1/18               |
| 901511      | Pasternack            | PE 2003      | Power Divider,<br>10 MHz - 1 GHz                   | NA             | Not<br>Required      |

**Test Personnel:**

Daniel W. Baltzell  
 Test Engineer



Signature

May 17, 2017  
 Date of Tests

## 12 FCC §2.202: Necessary Bandwidth and Emission Bandwidth

Type of Emissions: F3E, F1D, F1E

### Voice – 25 kHz channel separation

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2xM+2xDK = 16.0$  kHz

Emission designator: 16K0F3E

### Voice – 20 kHz channel separation (NPSPAC)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 4

Constant factor (K): 1 (assumed)

$B_n = 2xM+2xDK = 14.0$  kHz

Emission designator: 14K0F3E

### Voice – 12.5 kHz channel separation

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2xM+2xDK = 11.0$  kHz

Emission designator: 11K0F3E

### P25 – Phase 1 Data/Voice

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = [9600/\log_2(4) + 2 (1800) (1) = 8.400$  kHz

Emission designator: 8K40F1D, 8K40F1E

### P25 Phase 2 Data/Voice (H-CPM TDMA)

Calculation:

Data rate in bps (R) = 12000

Peak deviation of carrier (D) = 1050

$B_n = [12000/\log_2(4) + 2 (1050) (1) = 8.1$  kHz

Emission designator: 8K10DXW

### (2-level FSK 9600; NB NPSPAC) EDACS

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 4.0

Constant factor (K): 1 (default)

$B_n = 2xM+2xDK = 14.0$  kHz

Emission designator: 14K0F1D/E

**(2-level FSK 4800; XNB) EDACS**

Calculation:

Max modulation (M) in kHz: 3.0  
Max deviation (D) in kHz: 4.0  
Constant factor (K): 1 (default)  
 $B_n = 2xM+2xDK = 14.0$  kHz  
Emission designator: 7K10F1D/E

**(2-level FSK 9600; NB) OpenSky**

Calculation:

Max modulation (M) in kHz: 3.0  
Max deviation (D) in kHz: 4.0  
Constant factor (K): 1 (default)  
 $B_n = 2xM+2xDK = 14.0$  kHz  
Emission designator: 8K40F9W

**(2-level FSK 9600; NB) EDACS**

Calculation:

Max modulation (M) in kHz: 3.0  
Max deviation (D) in kHz: 4.0  
Constant factor (K): 1 (default)  
 $B_n = 2xM+2xDK = 14.0$  kHz  
Emission designator: 11K7F1D/E

**(4-level FSK Data/Voice; NPSPAC) OpenSky**

Calculation:

Max modulation (M) in kHz: 3.0  
Max deviation (D) in kHz: 4.0  
Constant factor (K): 1 (default)  
 $B_n = 2xM+2xDK = 14.0$  kHz  
Emission designator: 12K1F9W

**(4-level FSK Data/Voice; SMR) OpenSky**

Calculation:

Max modulation (M) in kHz: 3.0  
Max deviation (D) in kHz: 4.0  
Constant factor (K): 1 (default)  
 $B_n = 2xM+2xDK = 14.0$  kHz  
Emission designator: 15K4F9W

**(2-level FSK 9600; WB) EDACS**

Calculation:

Max modulation (M) in kHz: 3.0  
Max deviation (D) in kHz: 4.0  
Constant factor (K): 1 (default)  
 $B_n = 2xM+2xDK = 14.0$  kHz  
Emission designator: 16K0F1D/E

Rhein Tech Laboratories, Inc.  
360 Herndon Parkway  
Suite 1400  
Herndon, VA20170  
<http://www.rheintech.com>

Client: Harris Corporation  
Model: XL-200P C1D1 Rebanded  
ID's: OWDTR-0144-E/3636B-0144  
Standards: FCC §22, 74, 80, 90/IC RSS-119  
Report #: 2017006TNF

### 13 Conclusion

The data in this measurement report shows that the **Harris Corporation Model XL-200P C1D1 Rebanded, FCC ID: OWDTR-0144-E, IC: 3636B-0144**, complies with the applicable requirements of FCC Parts 2, 22, 74, 80, and 90 and IC RSS-119.