



Engineering Solutions & Electromagnetic Compatibility Services

FCC & IC Certification Report

**Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501**

**MASTR V 800 MHz Base Station Transceiver
FCC ID: OWDTR-0158-E
IC: 3636B-0158**

January 3, 2018

Standards Referenced for this Report	
Part 2: 2016	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2016	Private Land Mobile Radio Services
RSS-119 Issue 12 2015	Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz
RSS-Gen Issue 4 2014	General Requirements for Compliance of Radio Apparatus
ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Frequency Range (MHz)	Rated Conducted Output Power (W)	Frequency Tolerance (ppm)	Transmit Mode	Emission Designator
851 - 869	100	0.06	C4FM Data/Voice	8K00F1D/E
851 - 869	100	0.06	WCQPSK	9K70D1W
851 - 869	100	0.06	HDQPSK	9K80D7W

Report Prepared By: Daniel W. Baltzell

Document Number: 2017206TNF

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	Test Result Summary	5
2	General Information.....	5
2.1	Test Facility.....	5
2.2	Related Submittal(s)/Grant(s).....	5
2.3	Grant Notes	5
2.4	Tested System Details	6
3	FCC Part 2.1033(C)(8): Voltages and Currents through the Final Amplifying Stage.....	7
4	FCC Part 2.1046(a): RF Power Output: Conducted; Part 90.205(k) Power and Antenna Height Limits; Part 90.635 Limitations on Power and Antenna Height; RSS-119 5.4 and RSS-Gen 6.12: Transmitter Output Power	7
4.1	Test Procedure	7
4.2	Test Data.....	7
5	FCC Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations; RSS-Gen 6.13: Transmitter Unwanted Emissions	8
5.1	Test Procedure	8
5.2	Test Data.....	8
6	FCC Part 2.1053(a): Field Strength of Spurious Radiation; RSS-Gen 6.13: Transmitter Unwanted Emissions	21
6.1	Test Procedure	21
6.2	Test Data.....	21
7	FCC Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210: Emission Masks; RSS-119 5.5: Channel Bandwidth, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks; RSS-119 5.8: Transmitter Unwanted Emissions; RSS-Gen 6.6: Occupied Bandwidth.....	25
7.1	Test Procedure	25
7.2	Test Data.....	26
8	FCC Part 2.1055: Frequency Stability; Part 90.213: Frequency Stability; RSS-119 5.3 and RSS-Gen 6.11: Transmitter Frequency Stability.....	75
8.1	Test Procedure	75
8.2	Test Data.....	76
8.2.1	Temperature Frequency Stability	76
8.2.2	Frequency Stability/Voltage Variation.....	76
9	FCC Part 2.202: Necessary Bandwidth and Emission Bandwidth	78
10	Conclusion	78

Table of Figures

Figure 2-1:	Configuration of Tested System	6
-------------	--------------------------------------	---

Table of Tables

Table 2-1:	Equipment Under Test (EUT)	6
Table 4-1:	RF Conducted Output Power – Measured	7
Table 4-2:	Test Equipment Used For Testing RF Power Output – Conducted	7
Table 5-1:	Test Equipment Used For Testing Antenna Port Spurious Emissions	20
Table 6-1:	Field Strength of Spurious Radiation – 851.0125 MHz	21
Table 6-2:	Field Strength of Spurious Radiation – 860.0125 MHz	22
Table 6-3:	Field Strength of Spurious Radiation – 865.3375 MHz	22
Table 6-4:	Field Strength of Spurious Radiation – 868.9875 MHz	23
Table 6-5:	Test Equipment Used For Testing Field Strength of Spurious Radiation	23
Table 7-1:	Test Equipment Used For Testing Occupied Bandwidth	74
Table 8-1:	Temperature Frequency Stability – 851.0125 MHz	76
Table 8-2:	Temperature Frequency Stability – 865.3375 MHz	76
Table 8-3:	Frequency Stability/Voltage Variation – 851.0125 MHz	76
Table 8-4:	Frequency Stability/Voltage Variation – 865.3375 MHz	76
Table 8-5:	Test Equipment Used For Testing Frequency Stability	77

Table of Plots

Plot 5-1:	Conducted Antenna Spurious Emissions – 851.0125 MHz; C4FM	8
Plot 5-2:	Conducted Antenna Spurious Emissions – 851.0125 MHz; WCQPSK	9
Plot 5-3:	Conducted Antenna Spurious Emissions – 851.0125 MHz; HDQPSK	10
Plot 5-4:	Conducted Antenna Spurious Emissions – 860.0125 MHz; C4FM	11
Plot 5-5:	Conducted Antenna Spurious Emissions – 860.0125 MHz; WCQPSK	12
Plot 5-6:	Conducted Antenna Spurious Emissions – 860.0125 MHz; HDQPSK	13
Plot 5-7:	Conducted Antenna Spurious Emissions – 865.3375 MHz; C4FM	14
Plot 5-8:	Conducted Antenna Spurious Emissions – 865.3375 MHz; WCQPSK	15
Plot 5-9:	Conducted Antenna Spurious Emissions – 865.3375 MHz; HDQPSK	16
Plot 5-10:	Conducted Antenna Spurious Emissions – 868.9875 MHz; C4FM	17
Plot 5-11:	Conducted Antenna Spurious Emissions – 868.9875 MHz; WCQPSK	18
Plot 5-12:	Conducted Antenna Spurious Emissions – 868.9875 MHz; HDQPSK	19
Plot 7-1:	Occupied Bandwidth – 851.0125 MHz; C4FM; Mask H	26
Plot 7-2:	Occupied Bandwidth – 860.0125 MHz; C4FM; Mask G	27
Plot 7-3:	Occupied Bandwidth – 865.3375 MHz; C4FM; Mask G	28
Plot 7-4:	Occupied Bandwidth – 868.9875 MHz; C4FM; Mask G	29
Plot 7-5:	Occupied Bandwidth – 851.0125 MHz; WCQPSK; Mask H	30
Plot 7-6:	Occupied Bandwidth – 860.0125 MHz; WCQPSK; Mask G	31
Plot 7-7:	Occupied Bandwidth – 865.3375 MHz; WCQPSK; Mask G	32
Plot 7-8:	Occupied Bandwidth – 868.9875 MHz; WCQPSK; Mask G	33
Plot 7-9:	Occupied Bandwidth – 851.0125 MHz; HDQPSK; Mask H	34
Plot 7-10:	Occupied Bandwidth – 860.0125 MHz; HDQPSK; Mask G	35
Plot 7-11:	Occupied Bandwidth – 865.3375 MHz; HDQPSK; Mask G	36
Plot 7-12:	Occupied Bandwidth – 868.9875 MHz; HDQPSK; Mask G	37
Plot 7-13:	Occupied Bandwidth – 851.0125 MHz; C4FM; Mask D	38
Plot 7-14:	Occupied Bandwidth – 860.0125 MHz; C4FM; Mask D	39
Plot 7-15:	Occupied Bandwidth – 865.3375 MHz; C4FM; Mask D	40
Plot 7-16:	Occupied Bandwidth – 868.9875 MHz; C4FM; Mask D	41
Plot 7-17:	Occupied Bandwidth – 851.0125 MHz; WCQPSK; Mask D	42
Plot 7-18:	Occupied Bandwidth – 860.0125 MHz; WCQPSK; Mask D	43
Plot 7-19:	Occupied Bandwidth – 865.3375 MHz; WCQPSK; Mask D	44

Plot 7-20: Occupied Bandwidth – 868.9875 MHz; WCQPSK; Mask D	45
Plot 7-21: Occupied Bandwidth – 851.0125 MHz; HDQPSK; Mask D	46
Plot 7-22: Occupied Bandwidth – 860.0125 MHz; HDQPSK; Mask D	47
Plot 7-23: Occupied Bandwidth – 865.3375 MHz; HDQPSK; Mask D	48
Plot 7-24: Occupied Bandwidth – 868.9875 MHz; HDQPSK; Mask D	49
Plot 7-25: Occupied Bandwidth – 851.0125 MHz; C4FM; 99% BW.....	50
Plot 7-26: Occupied Bandwidth – 851.0125 MHz; WCQPSK; 99% BW.....	51
Plot 7-27: Occupied Bandwidth – 851.0125 MHz; HDQPSK; 99% BW	52
Plot 7-28: Occupied Bandwidth – 860.0125 MHz; C4FM; 99% BW.....	53
Plot 7-29: Occupied Bandwidth – 860.0125 MHz; WCQPSK; 99% BW.....	54
Plot 7-30: Occupied Bandwidth – 860.0125 MHz; HDQPSK; 99% BW	55
Plot 7-31: Occupied Bandwidth – 865.3375 MHz; C4FM; 99% BW.....	56
Plot 7-32: Occupied Bandwidth – 865.3375 MHz; WCQPSK; 99% BW.....	57
Plot 7-33: Occupied Bandwidth – 865.3375 MHz; HDQPSK; 99% BW	58
Plot 7-34: Occupied Bandwidth – 868.9875 MHz; C4FM; 99% BW.....	59
Plot 7-35: Occupied Bandwidth – 868.9875 MHz; WCQPSK; 99% BW.....	60
Plot 7-36: Occupied Bandwidth – 868.9875 MHz; HDQPSK; 99% BW	61
Plot 7-37: Occupied Bandwidth – 851.0125 MHz; C4FM; 20 dB BW.....	62
Plot 7-38: Occupied Bandwidth – 851.0125 MHz; WCQPSK; 20 dB BW.....	63
Plot 7-39: Occupied Bandwidth – 851.0125 MHz; HDQPSK; 20 dB BW	64
Plot 7-40: Occupied Bandwidth – 860. 0125 MHz; C4FM; 20 dB BW.....	65
Plot 7-41: Occupied Bandwidth – 860. 0125 MHz; WCQPSK; 20 dB BW.....	66
Plot 7-42: Occupied Bandwidth – 860. 0125 MHz; HDQPSK; 20 dB BW	67
Plot 7-43: Occupied Bandwidth – 865.3375 MHz; C4FM; 20 dB BW.....	68
Plot 7-44: Occupied Bandwidth – 865.3375 MHz; WCQPSK; 20 dB BW.....	69
Plot 7-45: Occupied Bandwidth – 865.3375 MHz; HDQPSK; 20 dB BW	70
Plot 7-46: Occupied Bandwidth – 868.9875 MHz; C4FM; 20 dB BW.....	71
Plot 7-47: Occupied Bandwidth – 868.9875 MHz; WCQPSK; 20 dB BW.....	72
Plot 7-48: Occupied Bandwidth – 868.9875 MHz; HDQPSK; 20 dB BW	73

Table of Appendixes

Appendix A: RF Exposure - FCC Part 1.1307, 1.1310, 2.1091, 2.1093; RSS-102 Issue 5.....	79
Appendix B: Agency Authorization	80
Appendix C: IC Letters.....	81
Appendix D: Canadian Representative.....	82
Appendix E: FCC & IC Confidentiality Request Letter.....	83
Appendix F: Frequency Band Attestation	84
Appendix G: ID Label & Location.....	85
Appendix H: Operational Description.....	86
Appendix I: Parts List	87
Appendix J: Test/Tune Procedure	88
Appendix K: Schematics	89
Appendix L: Block Diagrams.....	90
Appendix M: Manual.....	91
Appendix N: Test Configuration Photographs.....	92
Appendix O: External Photographs.....	96
Appendix P: Internal Photographs.....	97

Table of Photographs

Photograph 1: Radiated Emissions (Spurious/Harmonics) – Front View	92
Photograph 2: Radiated Emissions (Spurious/Harmonics) – Back View.....	93
Photograph 3: Radiated Emissions (Spurious/Harmonics) – Front View (Below 1 GHz).....	94
Photograph 4: Radiated Emissions (Spurious/Harmonics) – Back View (Below 1 GHz)	95

1 Test Result Summary

Test	FCC Reference	IC Reference	Result
RF Power Output	2.1046(a), Part 90.205(k), 90.635	RSS-119 5.4 RSS-Gen 6.12	Complies
Spurious Emissions at Antenna Terminals	2.1051, 90.210	RSS-Gen 6.13	Complies
Field Strength of Spurious Radiation	2.1053(a), 90.210	RSS-Gen 6.13	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 90.210	RSS-119 5.5, 5.8 RSS-Gen 6.6	Complies
Frequency Stability vs. Temperature and Voltage	2.1055, 90.213	RSS-119 5.3 RSS-Gen 6.11	Complies

2 General Information

The following Certification Report is prepared on behalf of Harris Corporation in accordance with the Federal Communications Commission and Industry Canada rules and regulations. The Equipment Under Test (EUT) was the MASTR V Base Station Transceiver; FCC ID: OWDTR-0158-E, IC: 3636B-0158.

The radio is subject to FCC DoC. DoC testing was performed and the data is contained in a separate DoC report.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2, 90 and Industry Canada RSS-119. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

This is a new FCC and IC certification application. There are 4 models as indicated in Table 2-1.

2.3 Grant Notes

The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed. Output power is conducted. The antenna(s) used for this transmitter must be fixed-mounted on outdoor permanent structures. RF exposure compliance at the time of licensing, as required by the responsible FCC Bureau(s) including antenna co-location requirements if §1.1307(b)(3).

2.4 Tested System Details


The test sample was received on November 20, 2017. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The device was programmed for multiple modes of operation and modulation types.

Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	FCC ID	RTL Bar Code
MASTR V STATION, P25T, 800 MHz, 799-817 MHz RX	Harris Corporation	MASV-800M1-A	OWDTR-0158-E	22517
MASTR V STATION, P25C, 800 MHz, 799-817 MHz RX	Harris Corporation	SV-8CXMV-A	OWDTR-0158-E	22517
MASTR V STATION, P25T, 800 MHz, 806-824 MHz RX	Harris Corporation	MASV-STXMV-A	OWDTR-0158-E	22517
MASTR V STATION, P25C, 800 MHz, 806-824 MHz RX	Harris Corporation	SV-SCXMV-A	OWDTR-0158-E	22517

Figure 2-1: Configuration of Tested System

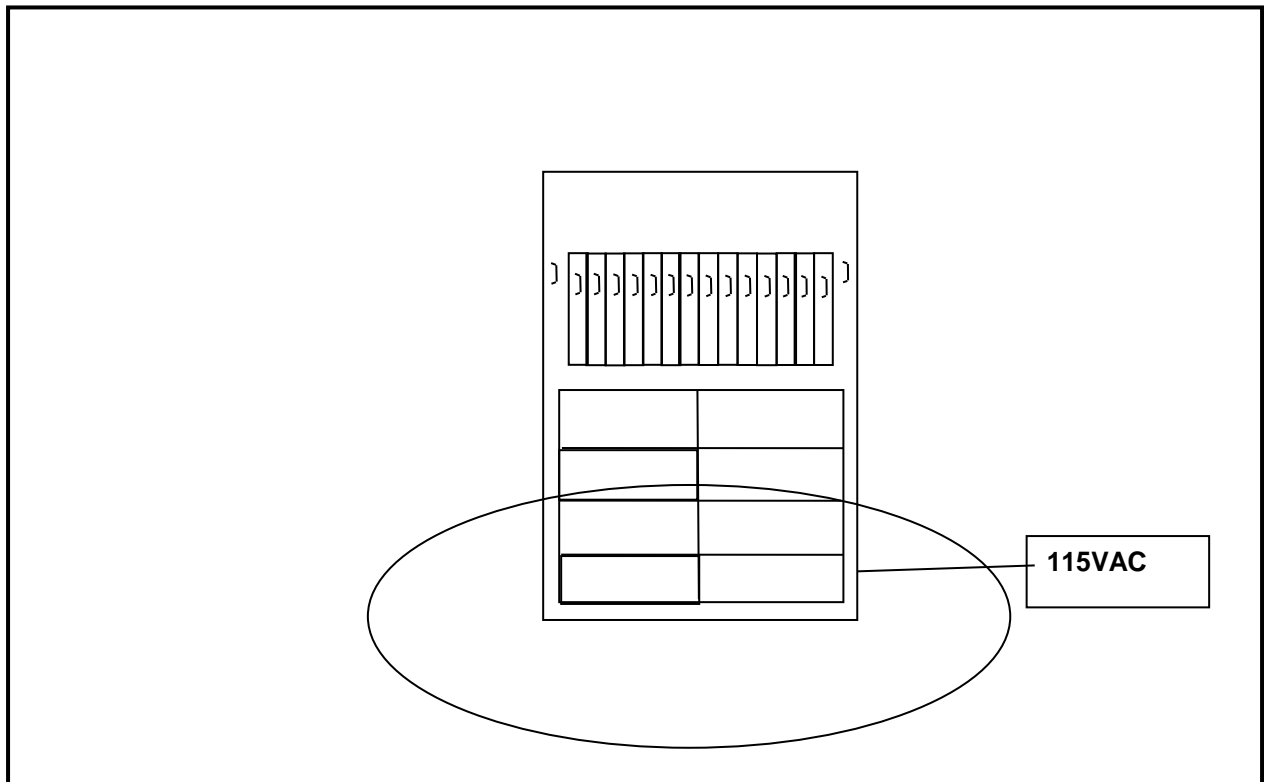

3 FCC Part 2.1033(C)(8): Voltages and Currents through the Final Amplifying Stage

48V / 7000mA

4 FCC Part 2.1046(a): RF Power Output: Conducted; Part 90.205(k) Power and Antenna Height Limits; Part 90.635 Limitations on Power and Antenna Height; RSS-119 5.4 and RSS-Gen 6.12: Transmitter Output Power

4.1 Test Procedure

ANSI 63.26, section 5.2

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

Manufacturer's rated power: 100 W

4.2 Test Data

Table 4-1: RF Conducted Output Power – Measured

Frequency (MHz)	C4FM (dBm)	WCQPSK (dBm)	HDQPSK (dBm)
851.0125	50.04	50.05	50.08
860.0125	49.97	50.04	50.02
868.9875	50.04	50.04	50.01
865.3375	50.01	50.06	50.05

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 dB

Notes: Data presented is for analog mode. All other modes were investigated and found to have equivalent power within measurement tolerances.

Table 4-2: Test Equipment Used For Testing RF Power Output – Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
901291	Pasternack	PE7031-20	300W Attenuator, DC - 1 GHz, 20 dB	NA	8/24/18
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	9/1/18
901235	IW Microwave Products	KPS-1503-360-KPS	High Frequency RF Cables	36"	8/21/18

Test Personnel:

Daniel W. Baltzell
 EMC Test Engineer



Signature

November 22, 2017
 Date of Test

5 FCC Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations; RSS-Gen 6.13: Transmitter Unwanted Emissions

5.1 Test Procedure

ANSI 63.26, section 5.2

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.

5.2 Test Data


Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc

Limits: 50 + 10 LOG P(W)) narrowband limit


The following frequencies (in MHz) were investigated: 851.0125, 860.0125 , 937.3375, and 865.3375

All modes were investigated and 868.9875 MHz is presented as worst case.


Plot 5-1: Conducted Antenna Spurious Emissions – 851.0125 MHz; C4FM

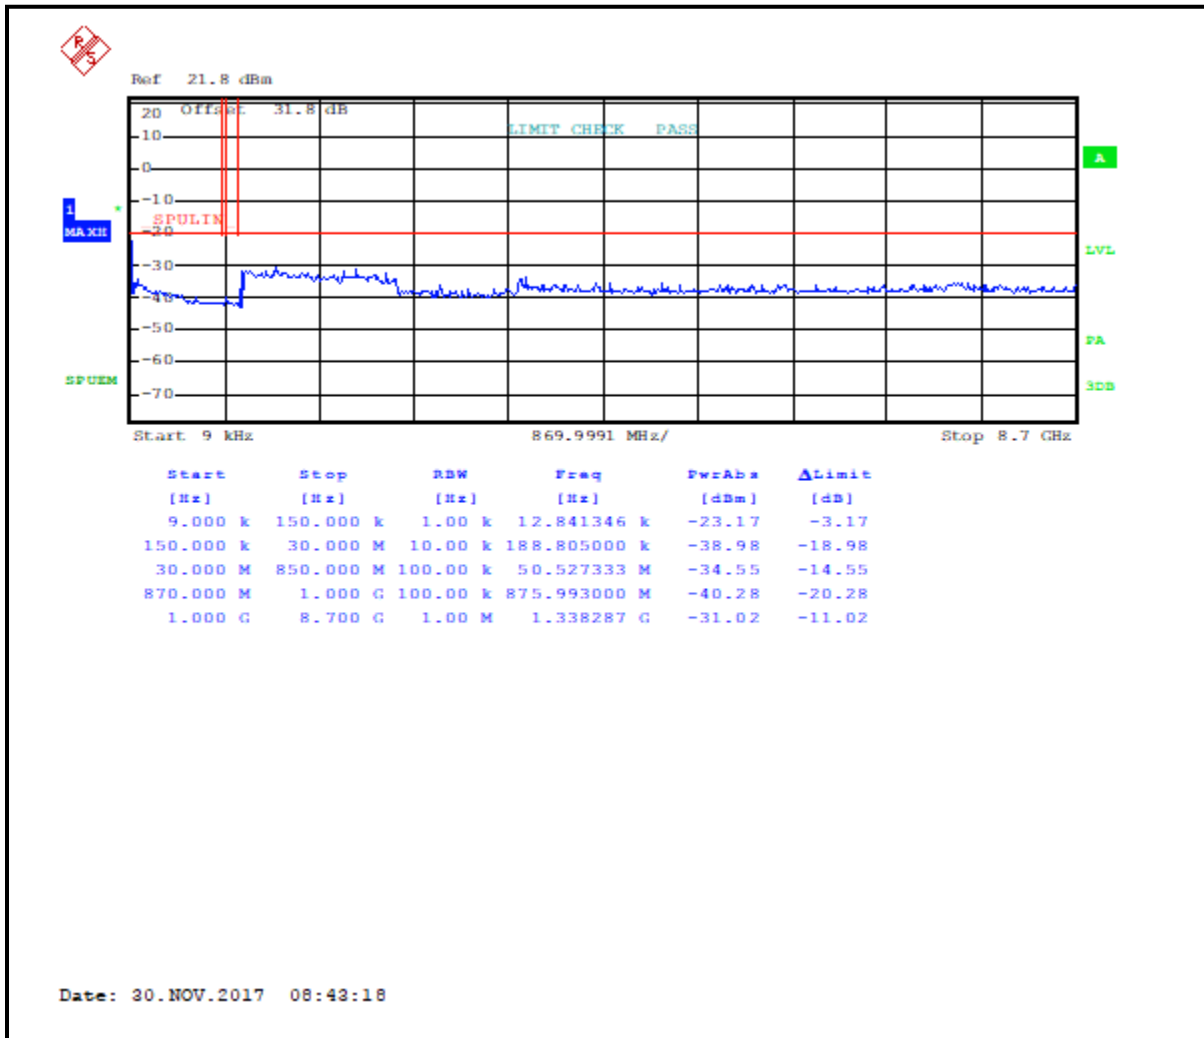


Plot 5-2: Conducted Antenna Spurious Emissions – 851.0125 MHz; WCQPSK

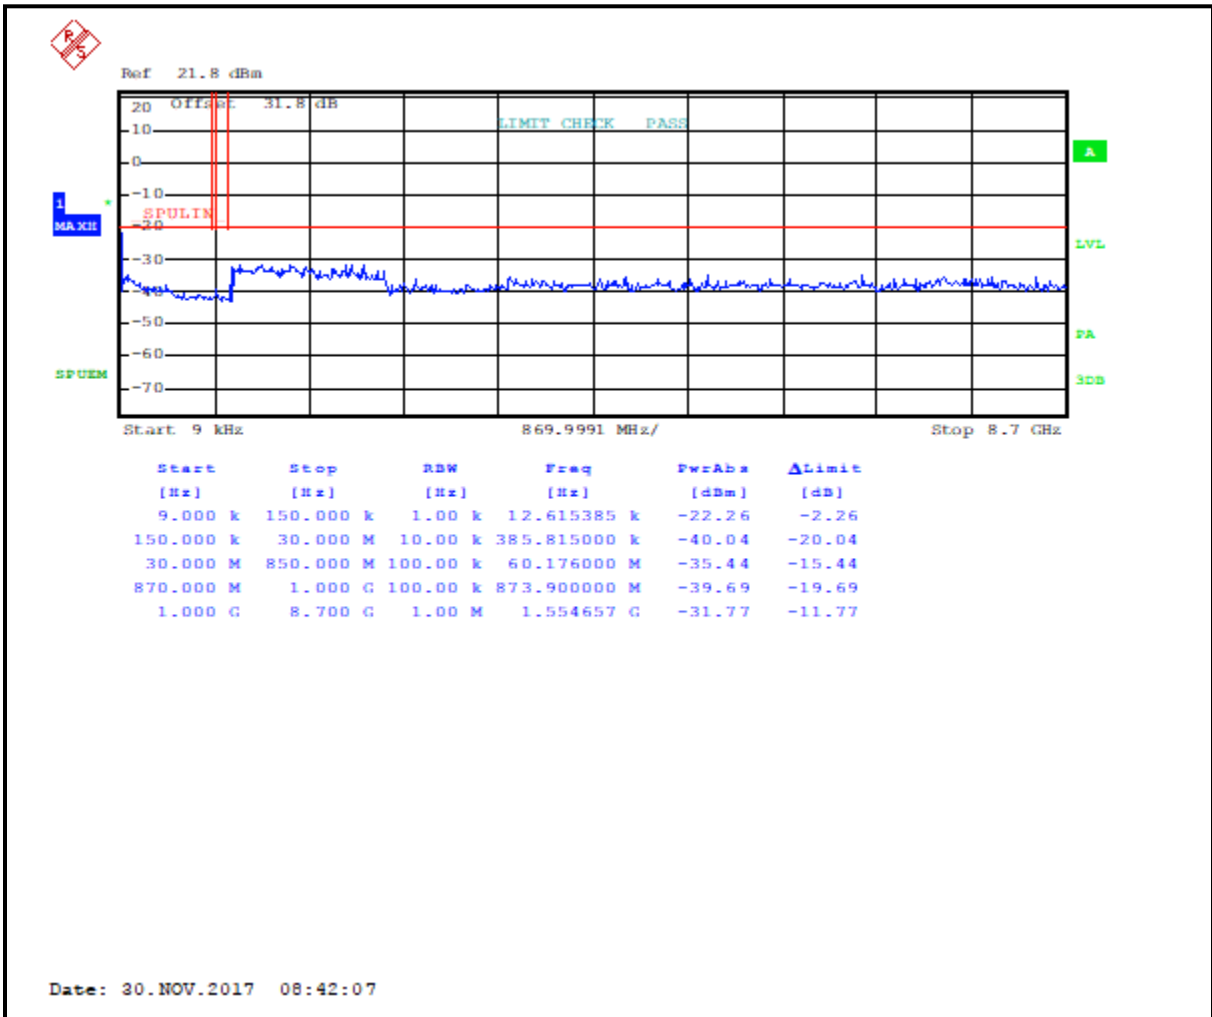


Plot 5-3: Conducted Antenna Spurious Emissions – 851.0125 MHz; HDQPSK

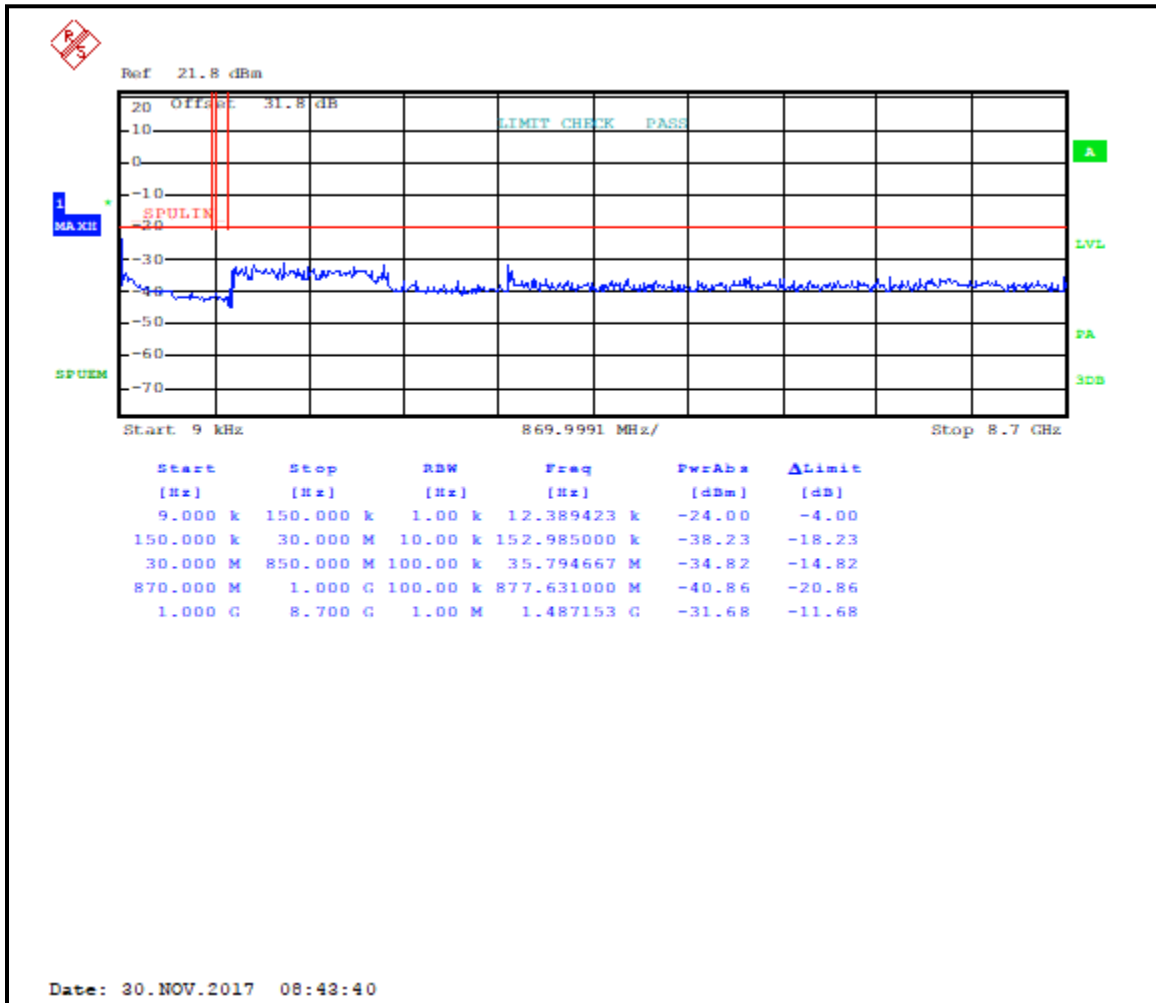


Plot 5-4: Conducted Antenna Spurious Emissions – 860.0125 MHz; C4FM

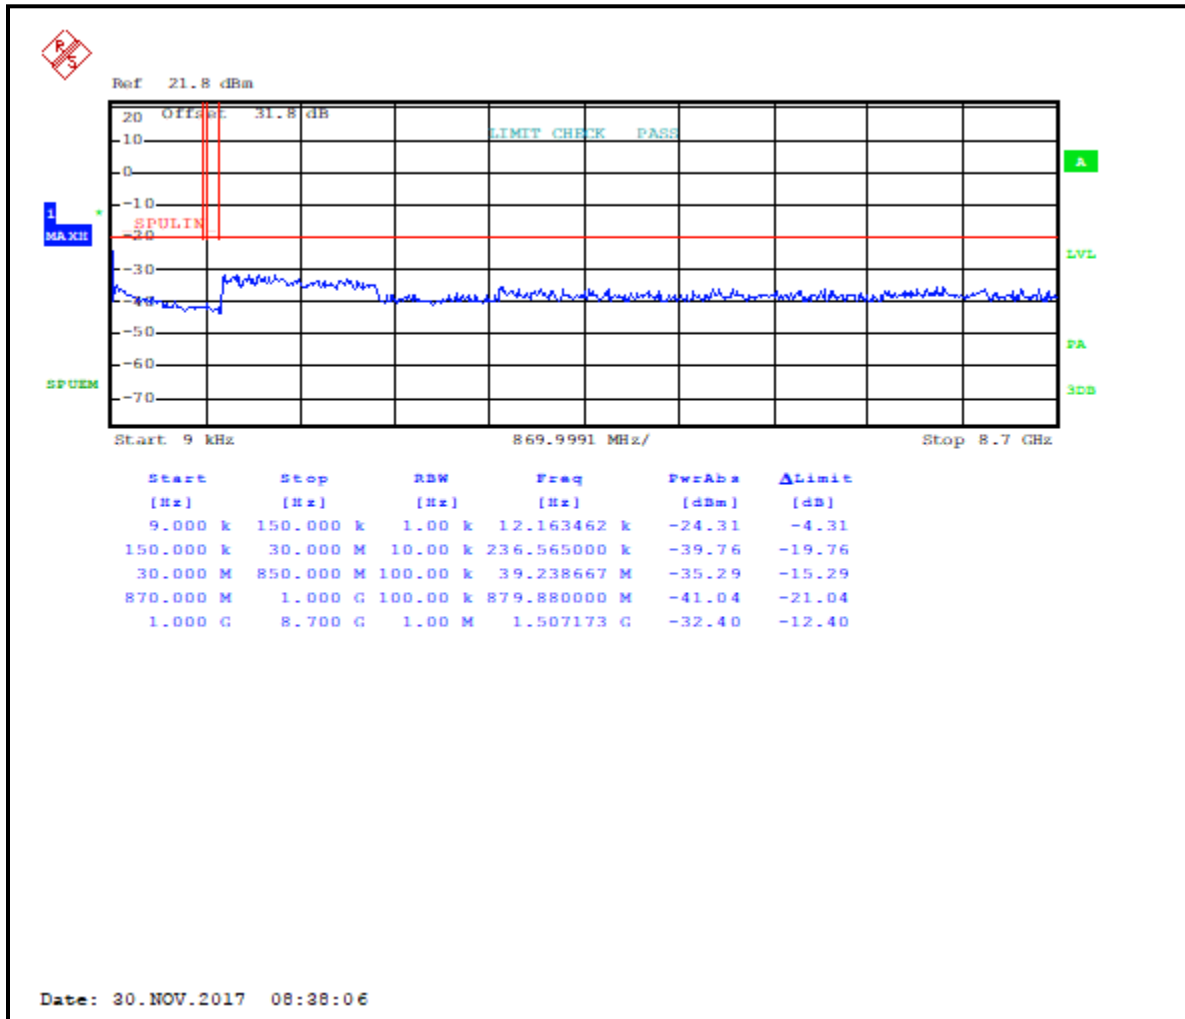


Plot 5-5: Conducted Antenna Spurious Emissions – 860.0125 MHz; WCQPSK

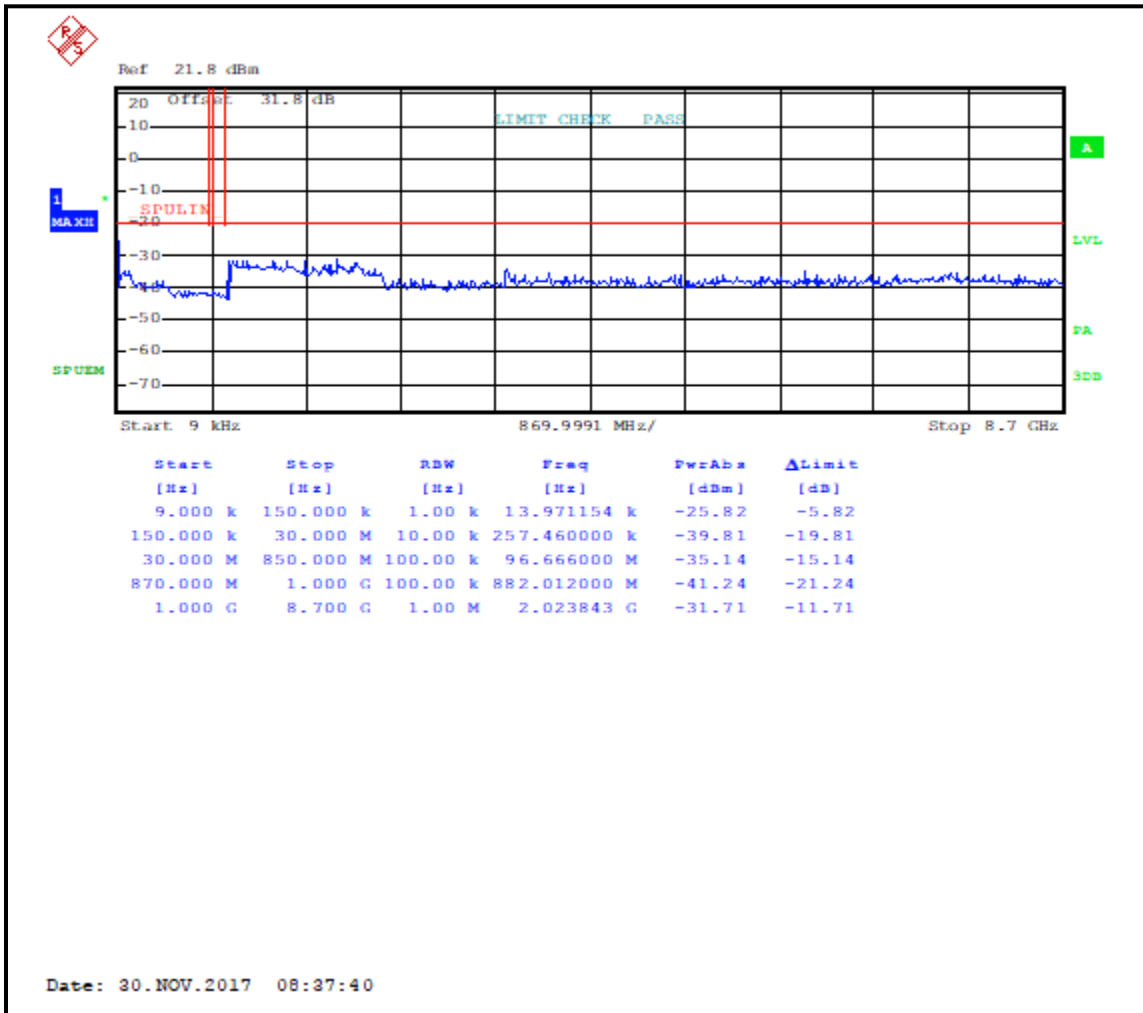


Plot 5-6: Conducted Antenna Spurious Emissions – 860.0125 MHz; HDQPSK

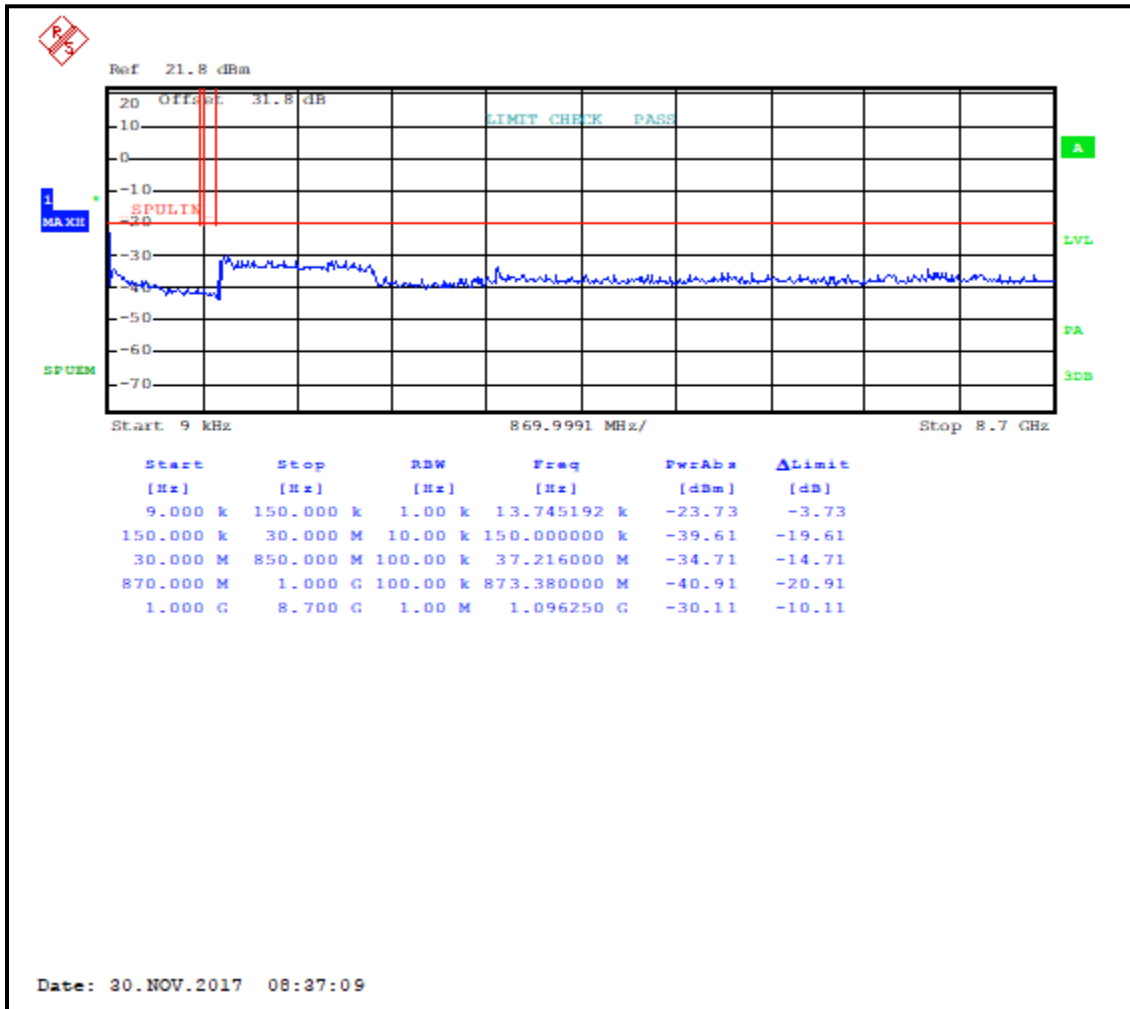


Plot 5-7: Conducted Antenna Spurious Emissions – 865.3375 MHz; C4FM

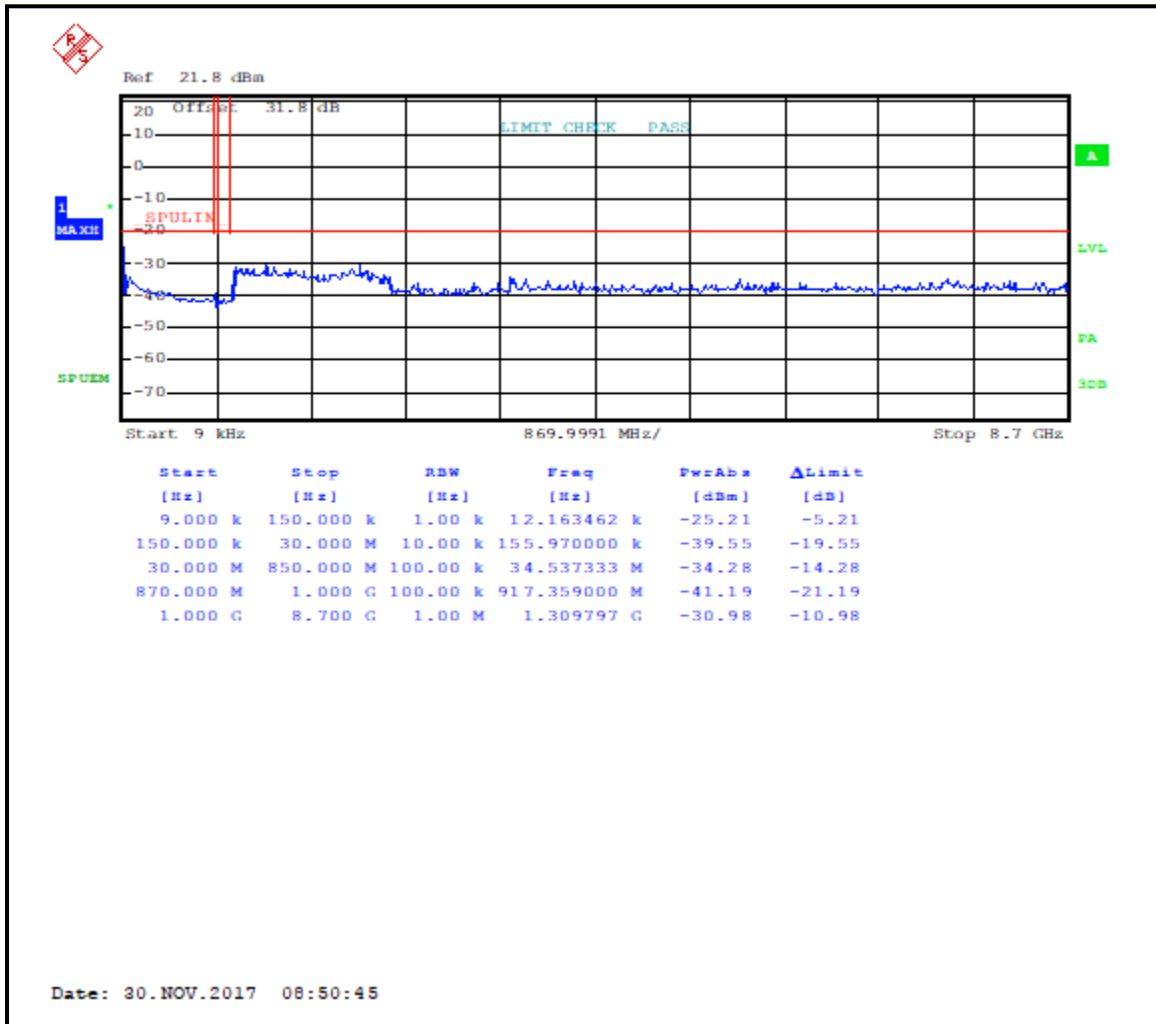


Plot 5-8: Conducted Antenna Spurious Emissions – 865.3375 MHz; WCQPSK

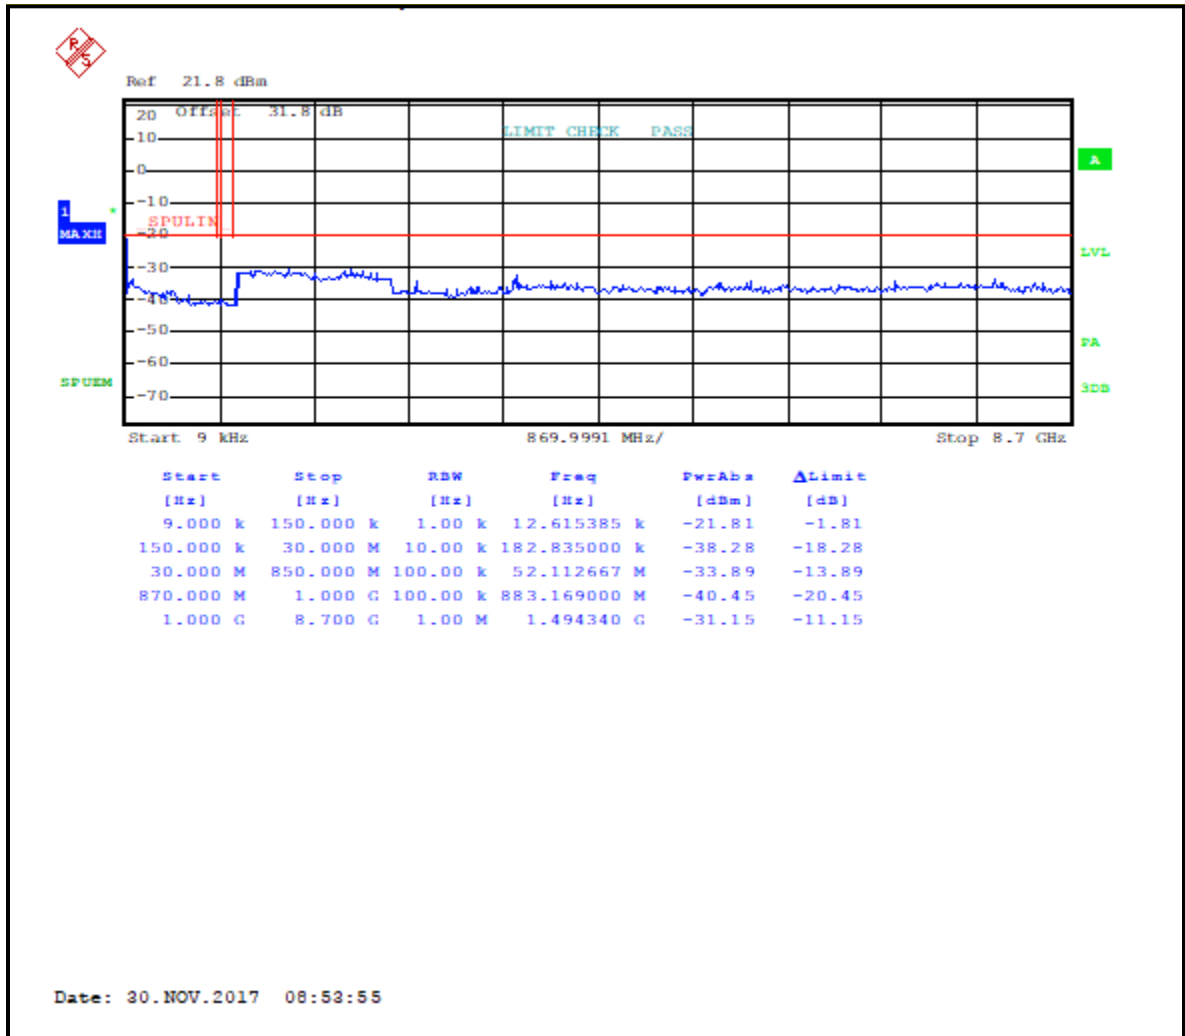


Plot 5-9: Conducted Antenna Spurious Emissions – 865.3375 MHz; HDQPSK

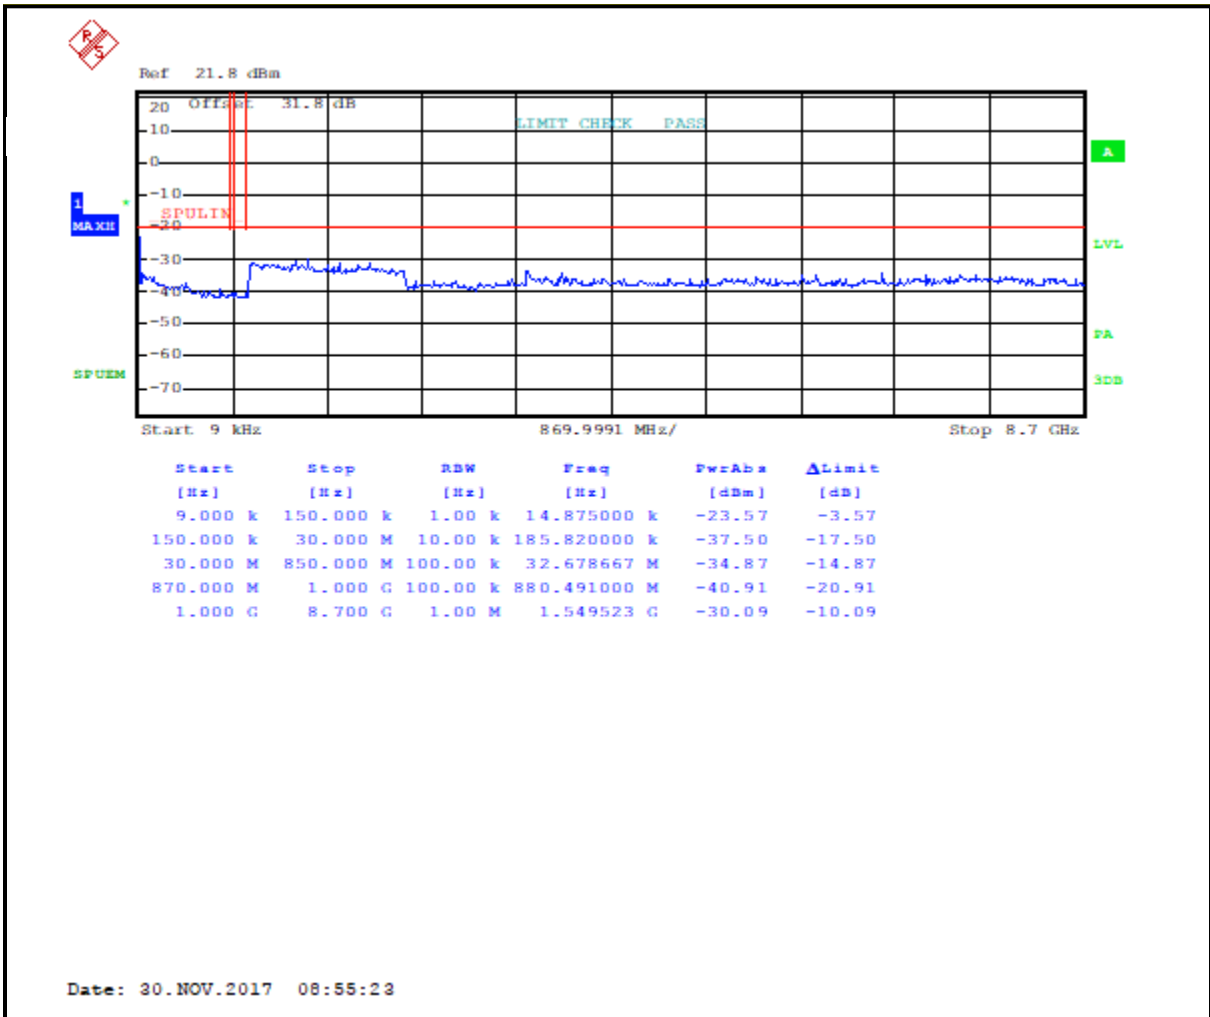


Plot 5-10: Conducted Antenna Spurious Emissions – 868.9875 MHz; C4FM

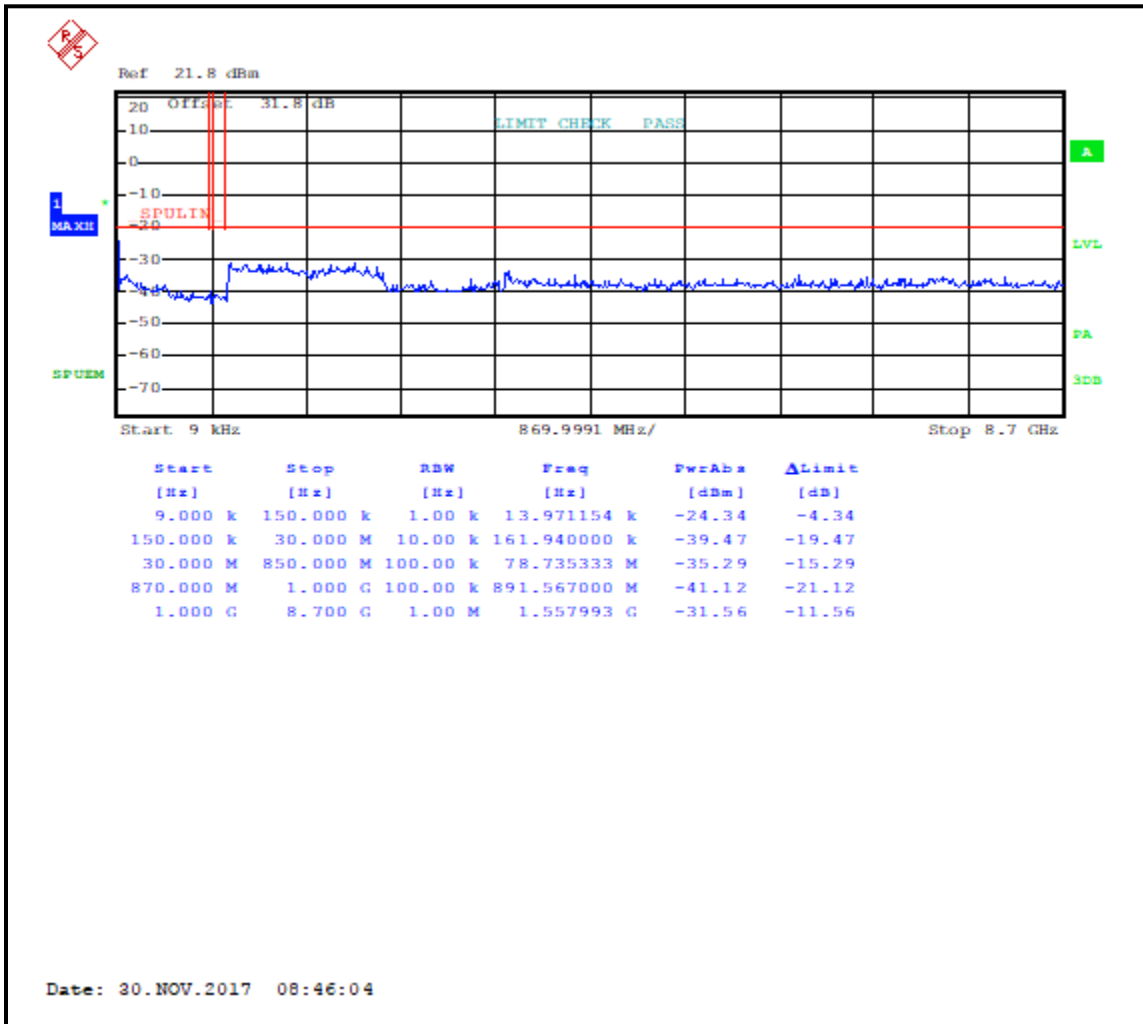

Plot 5-11: Conducted Antenna Spurious Emissions – 868.9875 MHz; WCQPSK

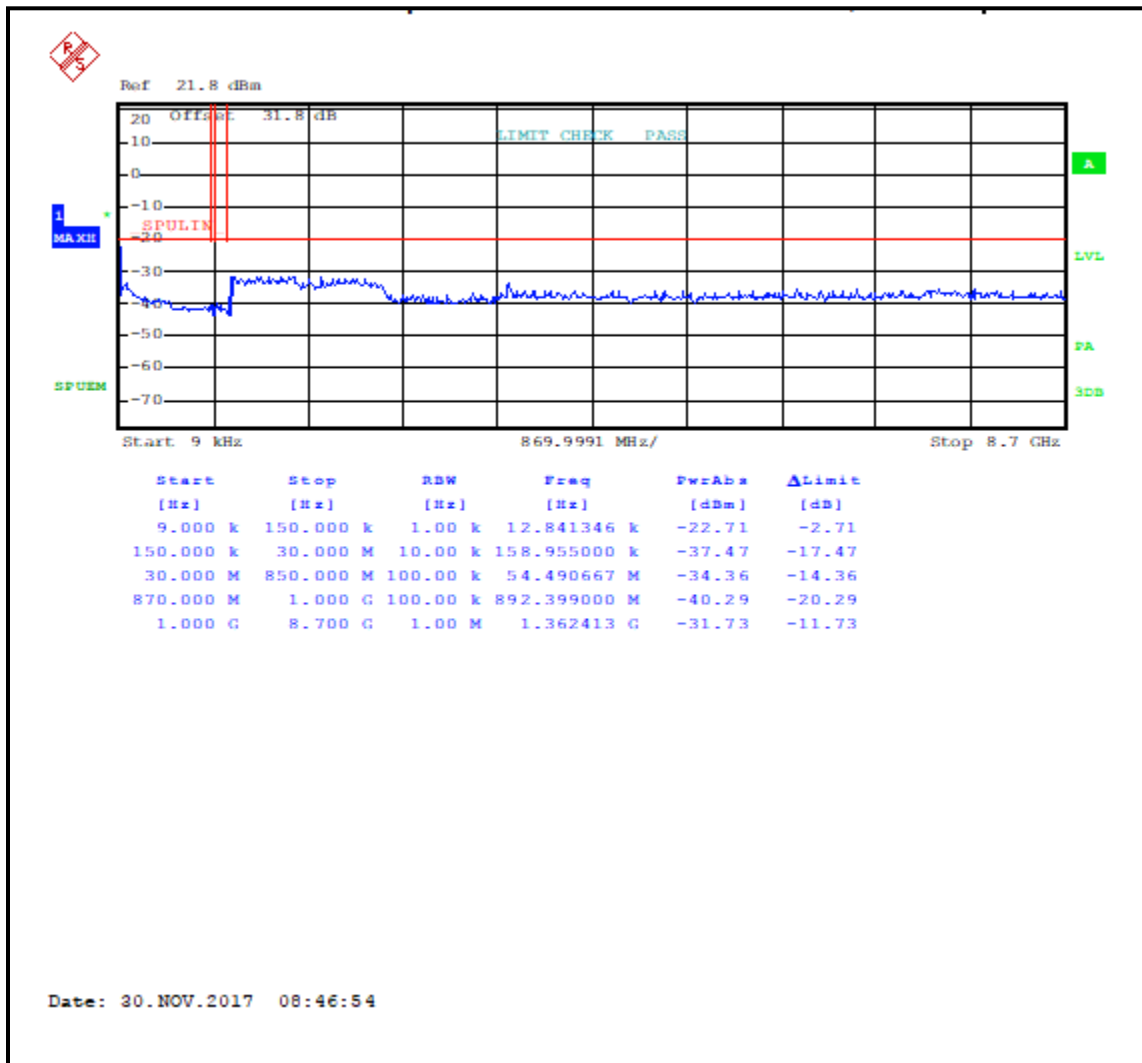

Plot 5-12: Conducted Antenna Spurious Emissions – 868.9875 MHz; HDQPSK

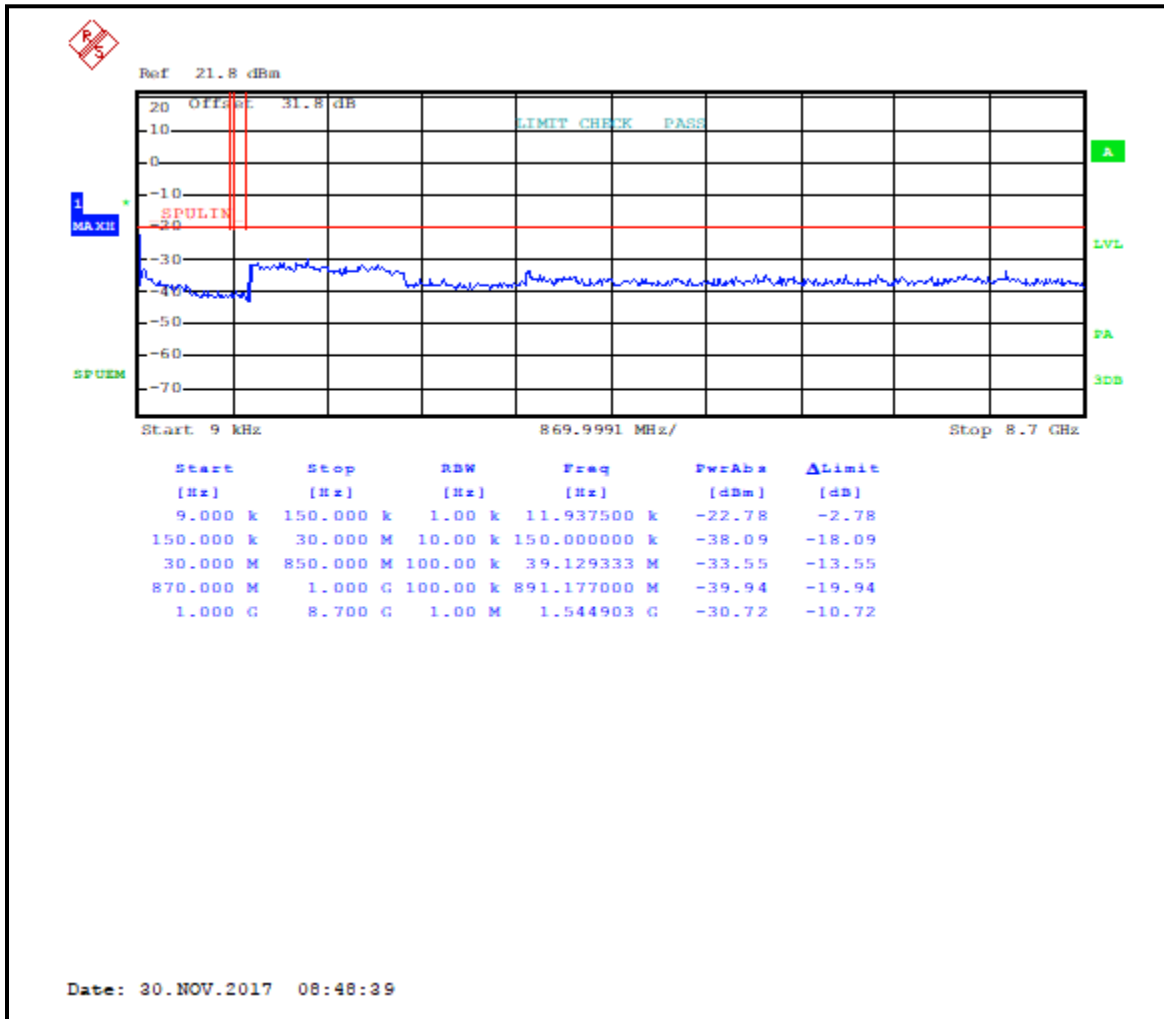

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 dB

Table 5-1: Test Equipment Used For Testing Antenna Port Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
901291	Pasternack	PE7031-20	300W Attenuator, DC - 1 GHz, 20 dB	NA	8/24/18
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	9/1/18
901235	IW Microwave Products	KPS-1503-360-KPS	High Frequency RF Cables	36"	8/21/18
901128	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	8/21/18

Test Personnel:

Daniel W. Baltzell EMC Test Engineer	 Signature	November 30, 2017 Dates of Test
---	--	------------------------------------

6 FCC Part 2.1053(a): Field Strength of Spurious Radiation; RSS-Gen 6.13: Transmitter Unwanted Emissions

6.1 Test Procedure

ANSI 63.26, section 5.5.

The device uses digital modulation modulated to its maximum extent using a pseudo-random data sequence.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna (dBi) was added to achieve the EIRP level, then converted from the corrected signal generator level (dBm) to dBc, and compared to the limit.

6.2 Test Data

Table 6-1: Field Strength of Spurious Radiation – 851.0125 MHz

Conducted Power 50 dBm; 100 W; Limit=50+10LogP=70 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1702.0250	38.6	-33.9	0.4	7.1	77.2	-7.2
2553.0375	11.2	-65.0	0.6	9.0	106.6	-36.6
3404.0500	15.4	-59.2	0.7	9.4	100.6	-30.6
4255.0625	0.6	-70.8	0.9	11.9	109.7	-39.7
5106.0750	2.8	-69.4	1.0	12.2	108.2	-38.2
5957.0875	-2.3	-73.6	1.1	15.0	109.7	-39.7
6808.1000	-7.3	-77.3	1.3	14.5	114.1	-44.1
7659.1125	-4.7	-73.5	1.4	13.6	111.3	-41.3
8510.1250	-7.8	-68.9	1.5	14.3	106.1	-36.1

Table 6-2: Field Strength of Spurious Radiation – 860.0125 MHz

Conducted Power 50 dBm; 100 W; Limit=50+10LogP=70 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1720.0250	41.1	-31.5	0.4	7.2	74.7	-4.7
2580.0375	17.8	-58.4	0.6	9.0	100.0	-30.0
3440.0500	23.2	-52.7	0.7	9.4	94.1	-24.1
4300.0625	4.1	-67.3	0.9	12.3	105.9	-35.9
5160.0750	8.1	-64.0	1.0	12.0	103.0	-33.0
6020.0875	3.3	-67.9	1.1	14.4	104.6	-34.6
6880.1000	-5.8	-75.7	1.3	14.5	112.5	-42.5
7740.1125	-0.9	-69.7	1.4	13.9	107.2	-37.2
8600.1250	-8.3	-69.6	1.5	14.9	106.3	-36.3

Table 6-3: Field Strength of Spurious Radiation – 865.3375 MHz

Conducted Power 50 dBm; 100 W; Limit=50+10LogP=70 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1730.6750	24.2	-50.1	0.4	7.3	93.3	-23.3
2596.0125	17.1	-55.3	0.6	9.0	96.8	-26.8
3461.3500	20.7	-55.5	0.7	9.4	96.9	-26.9
4326.6875	6.4	-68.1	0.9	12.3	106.7	-36.7
5192.0250	6.4	-65.1	1.0	11.9	104.2	-34.2
6057.3625	2.0	-70.1	1.2	14.1	107.1	-37.1
6922.7000	-7.2	-78.4	1.3	14.5	115.1	-45.1
7788.0375	3.1	-66.8	1.4	14.0	104.2	-34.2
8653.3750	-7.2	-75.9	1.5	14.6	112.8	-42.8

Table 6-4: Field Strength of Spurious Radiation – 868.9875 MHz
Conducted Power 50 dBm; 100 W; Limit=50+10LogP=70 dBc

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss to Transmit Antenna (dB)	Substitution Antenna Gain (dBi)	Corrected Signal Generator Level (dBc)	Margin (dB)
1737.9750	28.5	-43.6	0.4	7.3	86.7	-16.7
2606.9625	21.9	-54.2	0.6	9.1	95.7	-25.7
3475.9500	21.0	-54.8	0.7	9.4	96.2	-26.2
4344.9375	4.4	-67.1	0.9	12.3	105.7	-35.7
5213.9250	6.2	-65.9	1.0	11.9	105.0	-35.0
6082.9125	11.0	-60.1	1.2	13.9	97.3	-27.3
6951.9000	-5.9	-75.8	1.3	14.6	112.5	-42.5
7820.8875	-2.8	-71.5	1.4	14.0	108.9	-38.9
8689.8750	-8.7	-70.3	1.5	14.5	107.4	-37.4

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±4.6 dB

Table 6-5: Test Equipment Used For Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900878	Rhein Tech Laboratories	AM3-1197-0005	3 meter antenna mast, polarizing	OATS1	N/A
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/18/18
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/18/18
901242	Rhein Tech Laboratories	WRT-000-0003	Wood rotating table	N/A	N/A
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	6/11/18
900321	EMCO	3161-03	Horn Antenna (4.0 - 8.2 GHz)	9508-1020	4/9/18
900323	EMCO	3160-07	Horn Antenna (8.2 - 12.4 GHz)	9605-1054	4/9/18
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	4/9/18
901582	Rohde & Schwarz	1167.0000.02	Signal Generator	101903	3/20/18
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
901128	Par Electronics	806-902 (25W)	UHF Notch Filter	N/A	8/21/18
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridged Guide Antenna (1 - 18 GHz)	2310	2/4/19

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: MASTR V 800 MHz Base Station
ID's: OWDTR-0158-E/3636B-0158
Standards: FCC Part 90/RSS-119
Report #: 2017206

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

November 30, 2017
Date of Test

7 FCC Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210: Emission Masks; RSS-119 5.5: Channel Bandwidth, Authorized Bandwidth, Occupied Bandwidth and Spectrum Masks; RSS-119 5.8: Transmitter Unwanted Emissions; RSS-Gen 6.6: Occupied Bandwidth

Occupied Bandwidth - Compliance with the Emission Masks

7.1 Test Procedure

ANSI 63.26, section 5.4.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence.


Part 90.210 Authorized Bandwidth

Applicable Emission Masks		
Frequency Band (MHz)	Mask for Equipment With Audio Low Pass Filter	Mask for Equipment Without Audio Low Pass Filter
Below 25 ¹	A or B.....	A or C
25–50.....	B.....	C
72–76.....	B.....	C
150–174 ²	B, D, or E.....	C, D, or E
150 Paging-only	B.....	C
220–222	F.....	F
421–512 ²	B, D, or E.....	C, D, or E
450 Paging-only	B.....	G
806–809/851–854	B.....	H
809–824/854–869 ^{3 5}	B.....	G
896–901/935–940	I.....	J
902–928	K.....	K
929–930	B.....	G
4940–4990 MHz	L or M.....	L or M
5850–5925 ⁴	B.....	C
All other bands	B.....	C


¹ Equipment using single sideband J3E emission must meet the requirements of Emission Mask A. Equipment using other emissions must meet the requirements of Emission Mask B or C, as applicable.
² Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.
³ Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of §90.691.
⁴ DSRCS Roadside Unit equipment in the 5850–5925 MHz band is governed under subpart M of this part.
⁵ Equipment may alternatively meet the Adjacent Channel Power limits of §90.221.

7.2 Test Data


Plot 7-1: Occupied Bandwidth – 851.0125 MHz; C4FM; Mask H

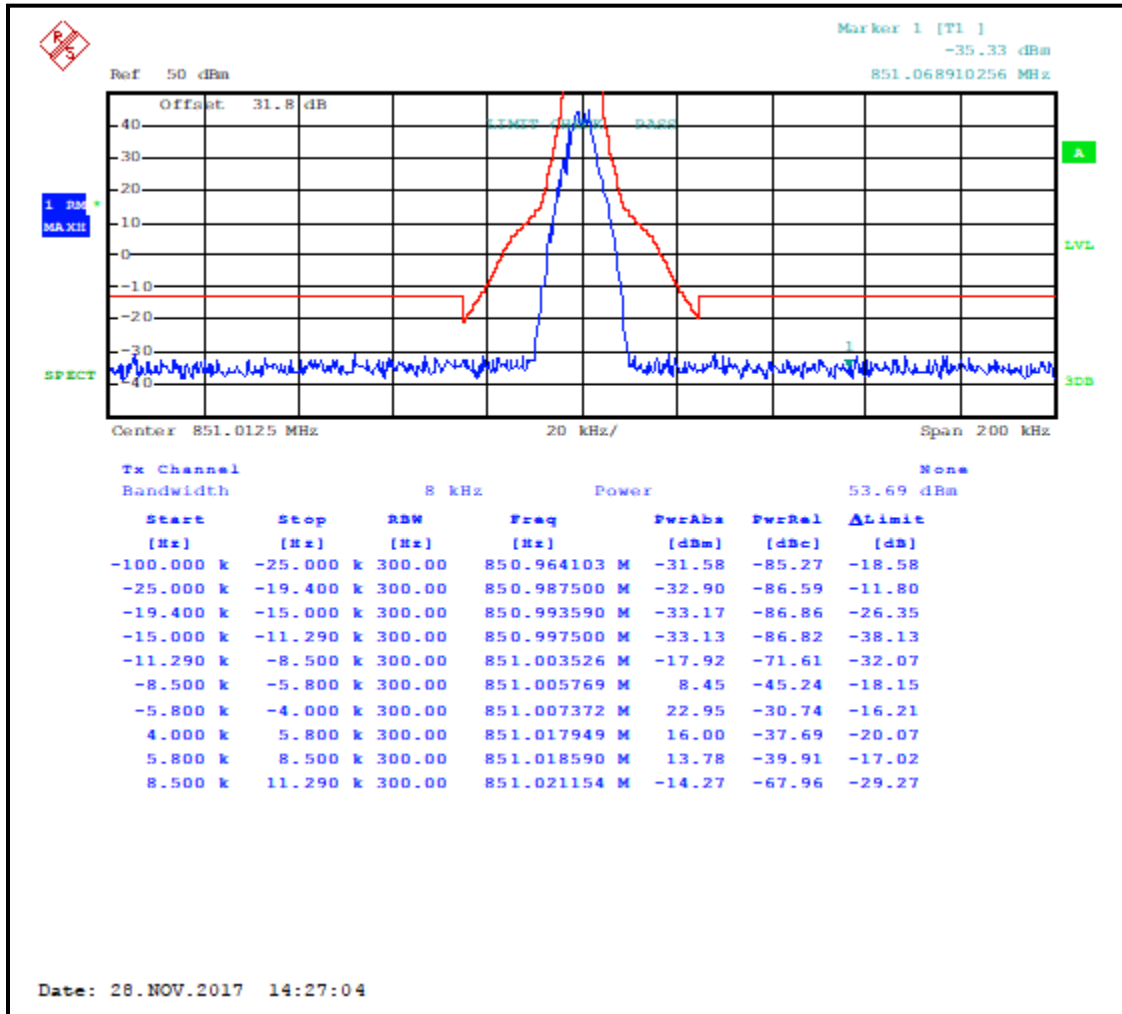


Plot 7-2: Occupied Bandwidth – 860.0125 MHz; C4FM; Mask G

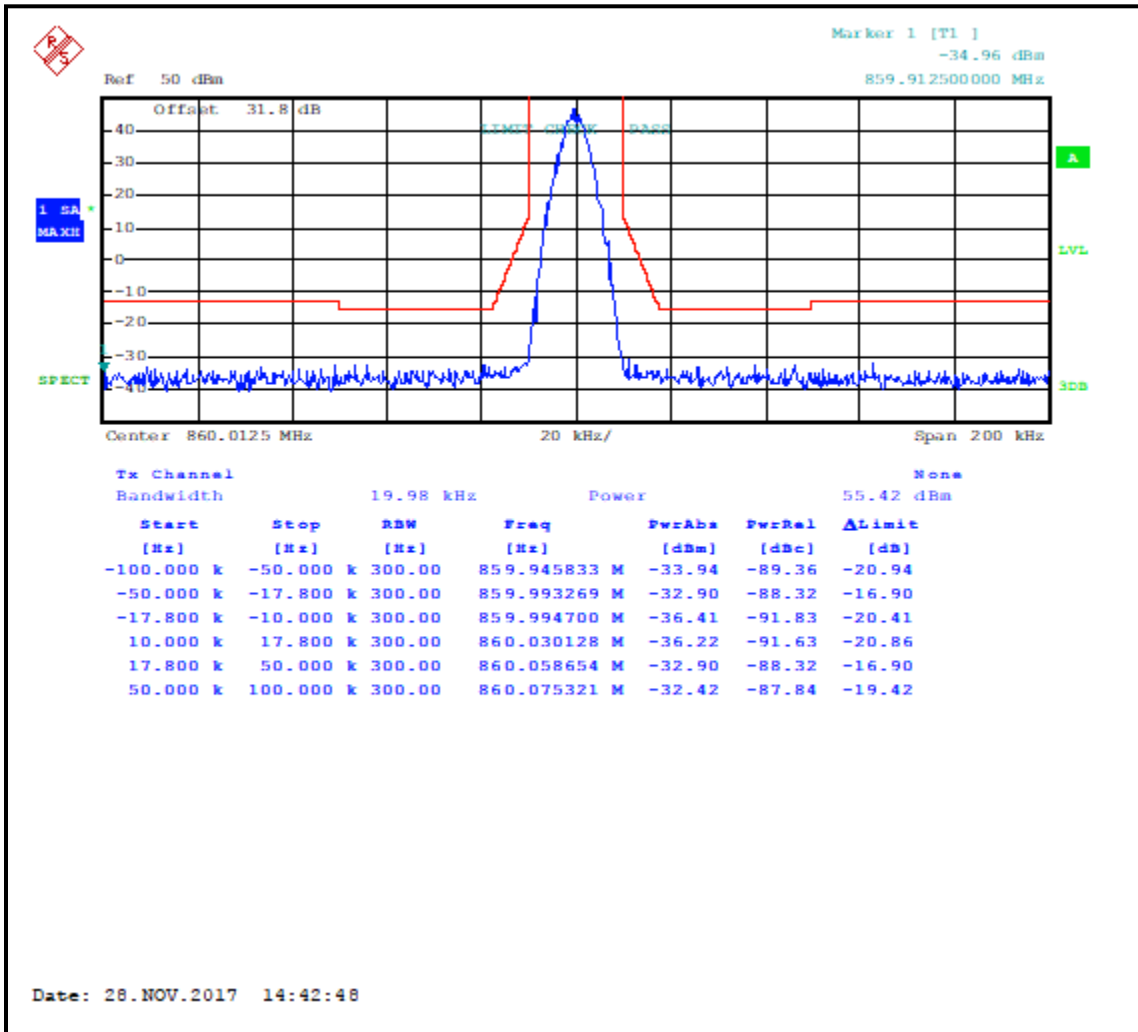


Plot 7-3: Occupied Bandwidth – 865.3375 MHz; C4FM; Mask G

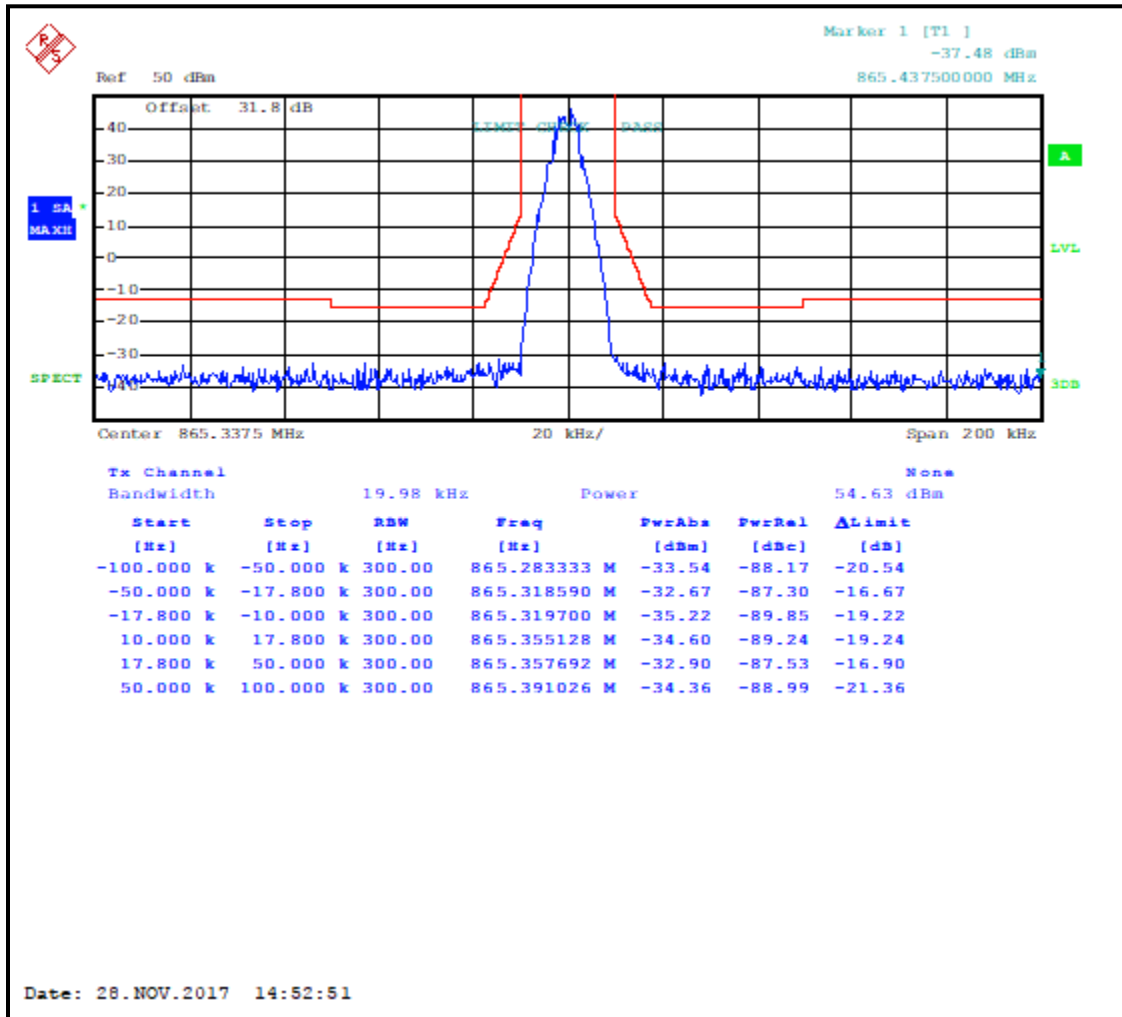


Plot 7-4: Occupied Bandwidth – 868.9875 MHz; C4FM; Mask G

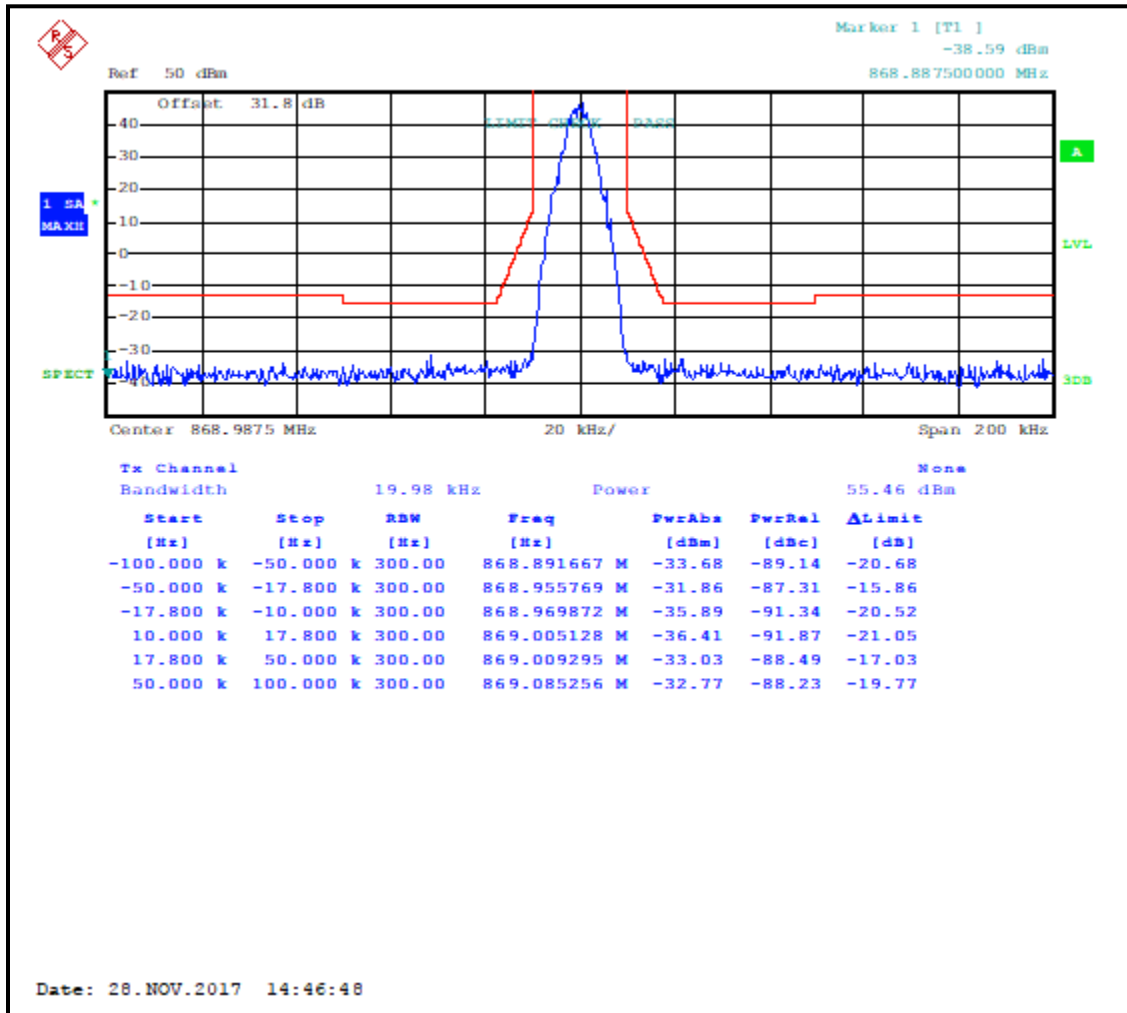


Plot 7-5: Occupied Bandwidth – 851.0125 MHz; WCQPSK; Mask H

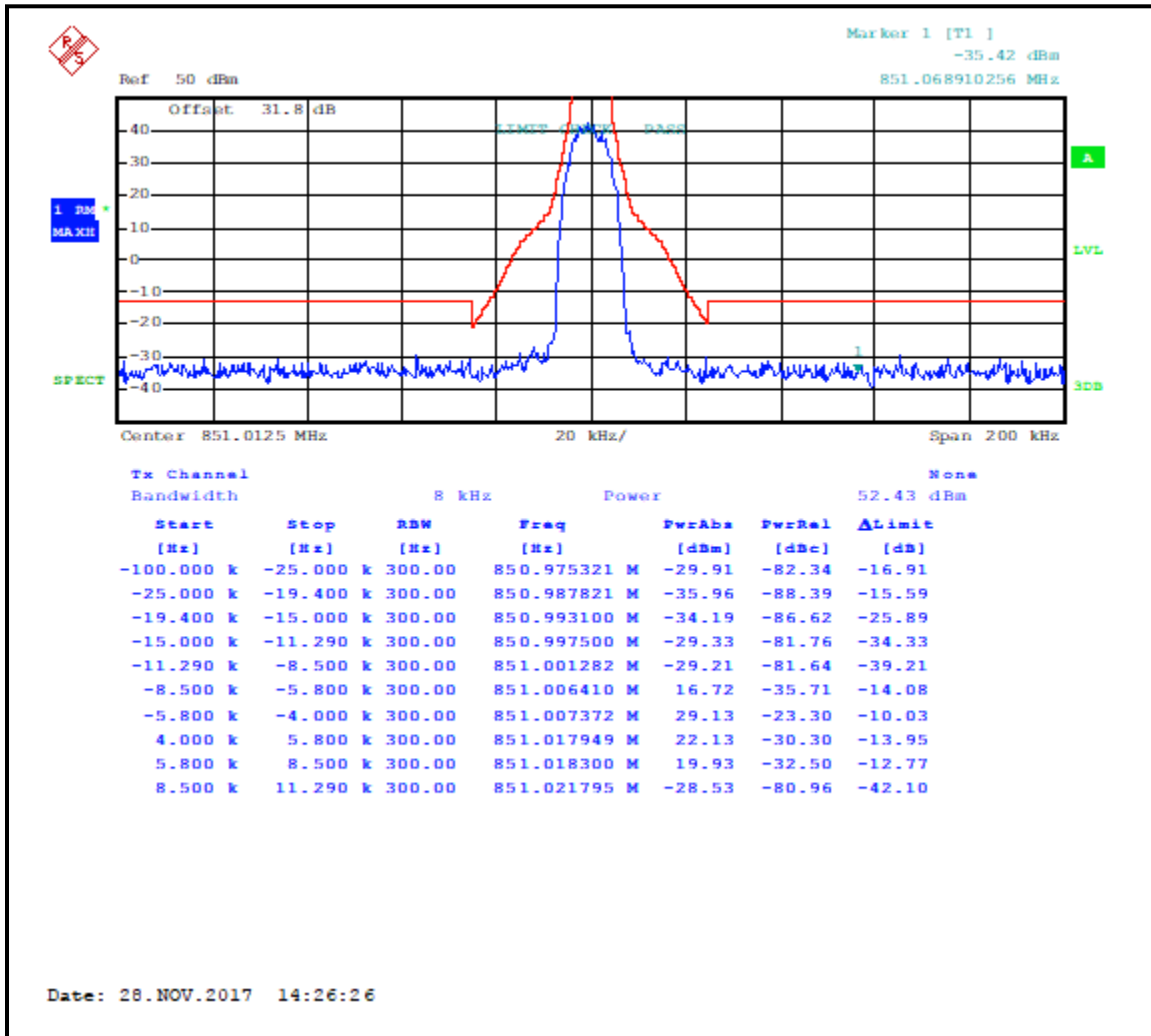


Plot 7-6: Occupied Bandwidth – 860.0125 MHz; WCQPSK; Mask G

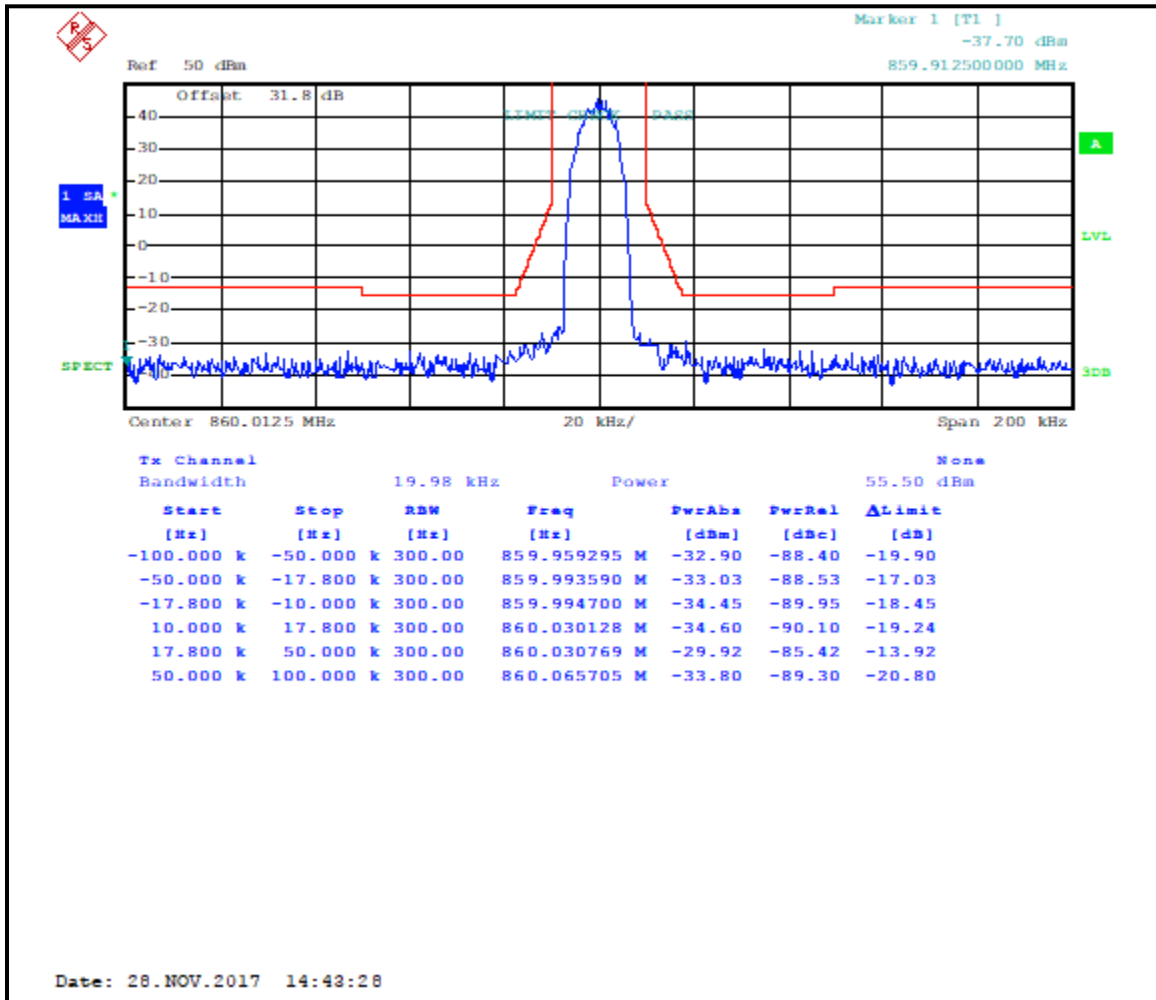


Plot 7-7: Occupied Bandwidth – 865.3375 MHz; WCQPSK; Mask G

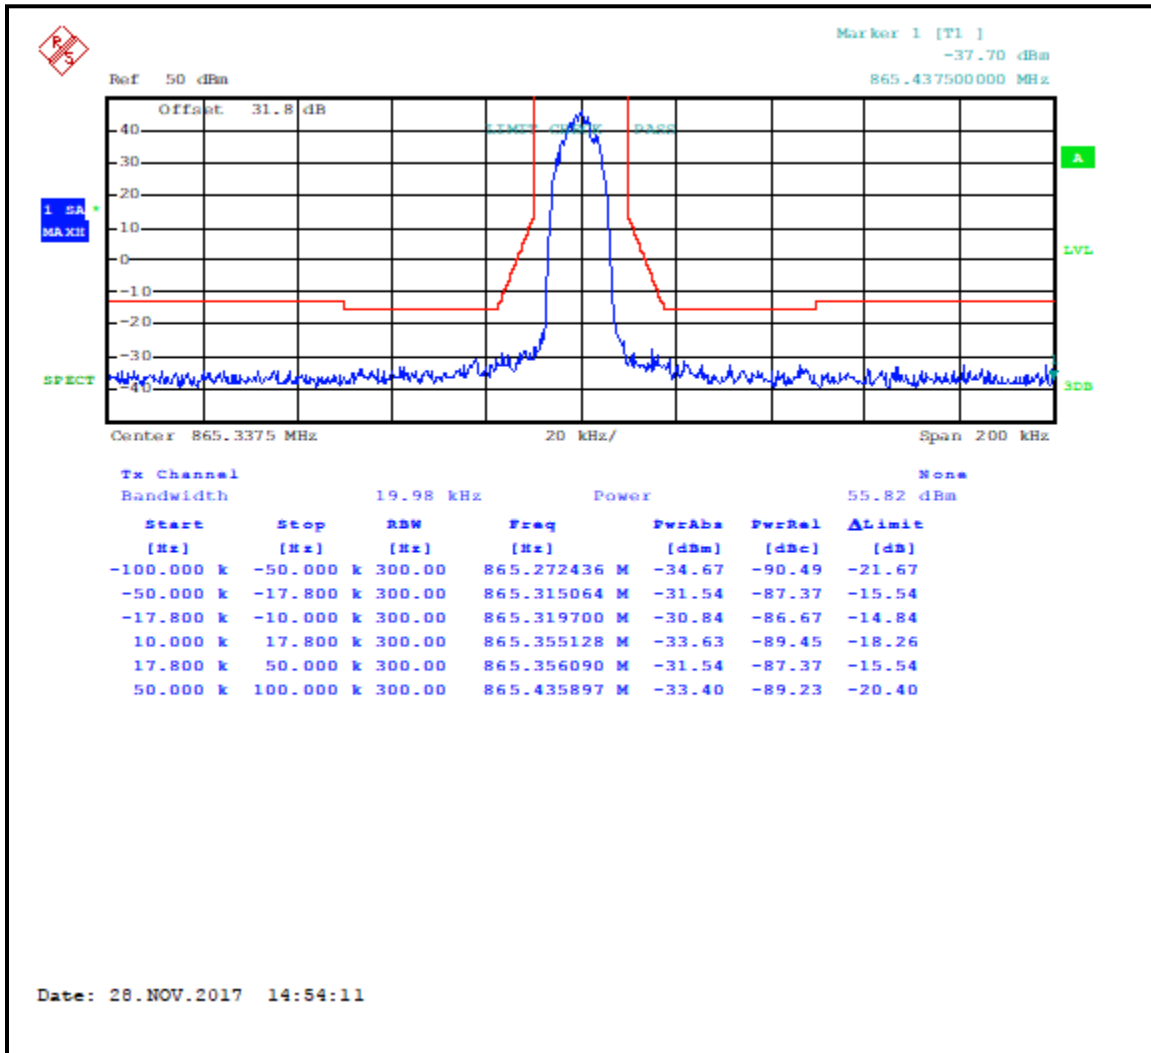


Plot 7-8: Occupied Bandwidth – 868.9875 MHz; WCQPSK; Mask G

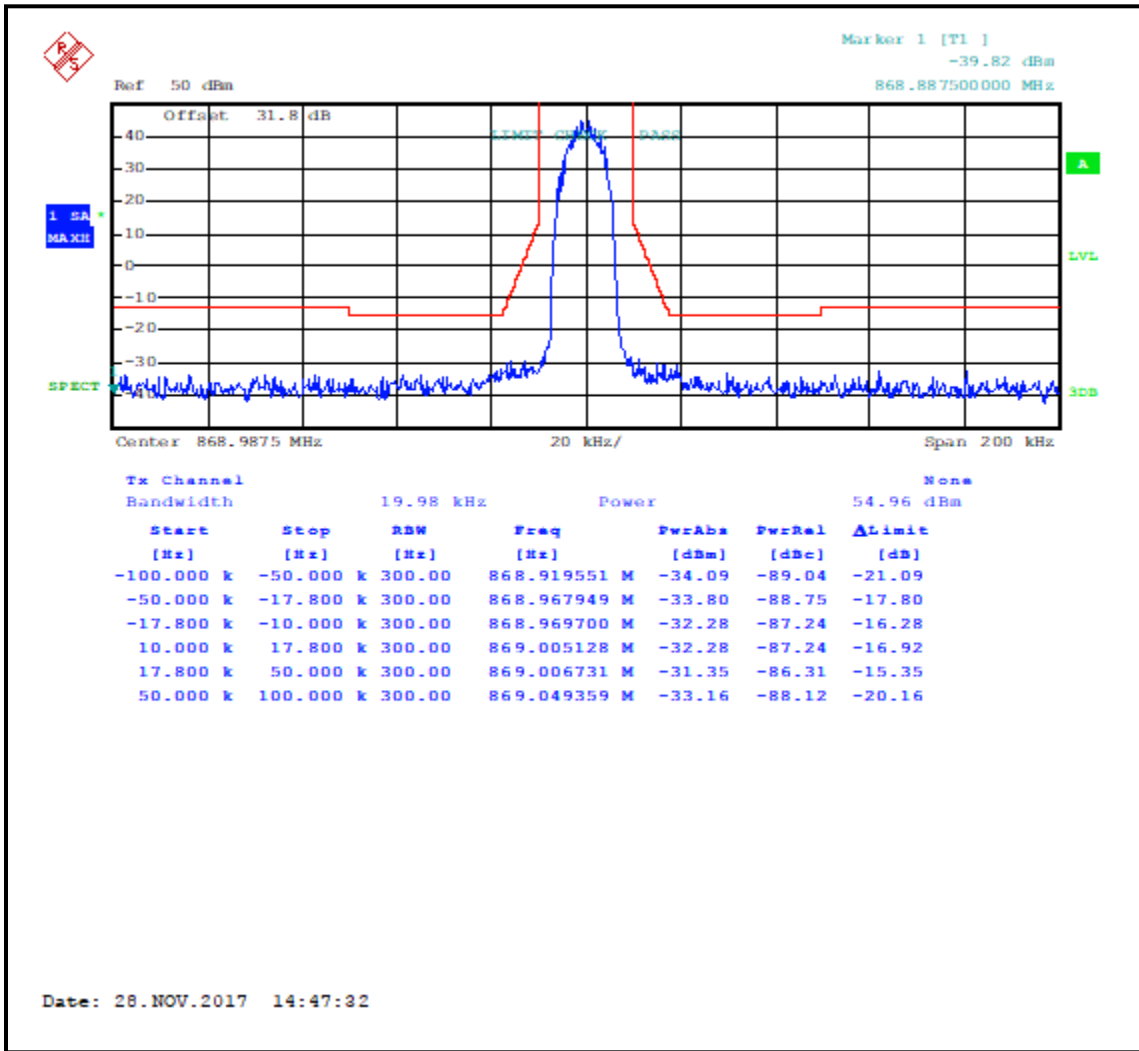


Plot 7-9: Occupied Bandwidth – 851.0125 MHz; HDQPSK; Mask H

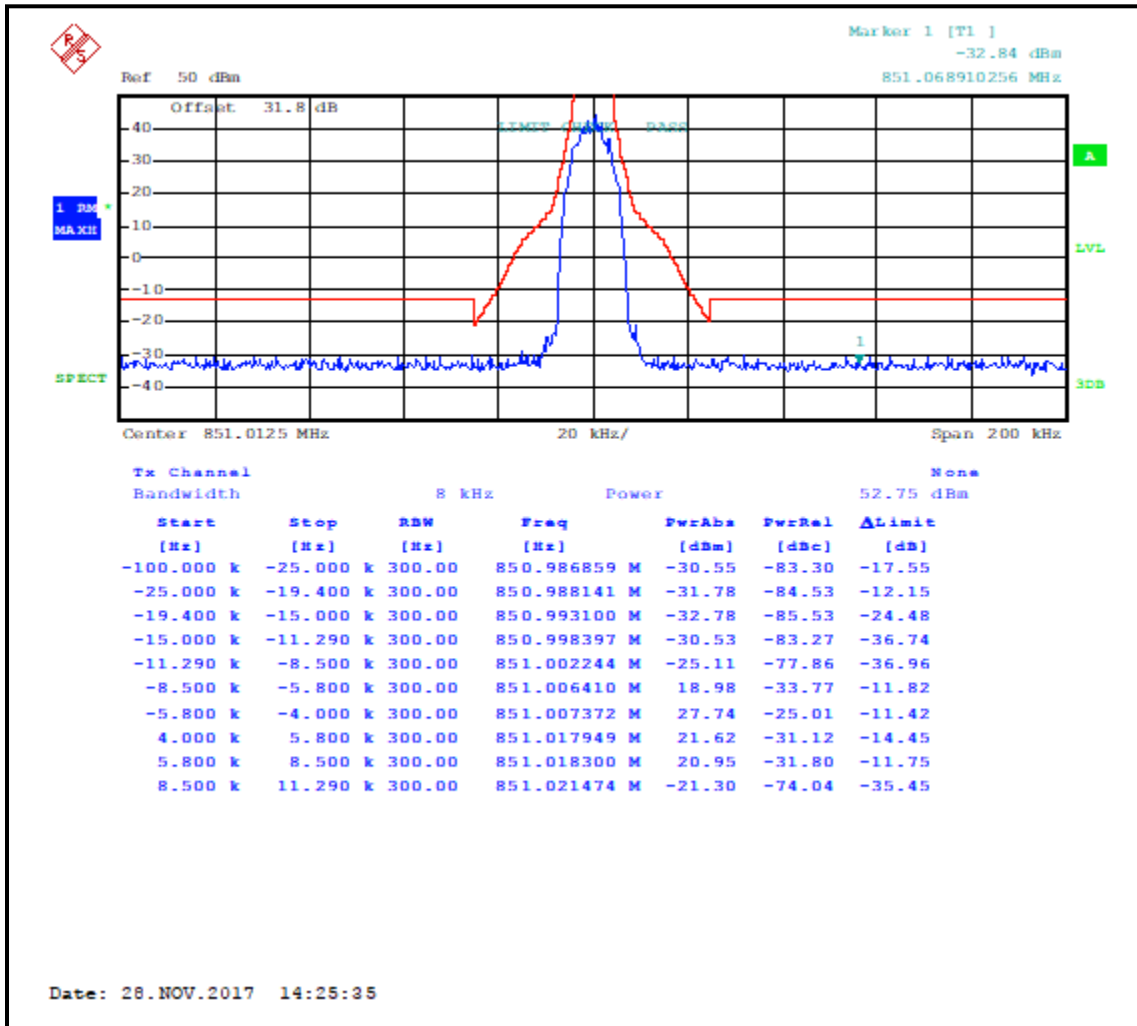


Plot 7-10: Occupied Bandwidth – 860.0125 MHz; HDQPSK; Mask G

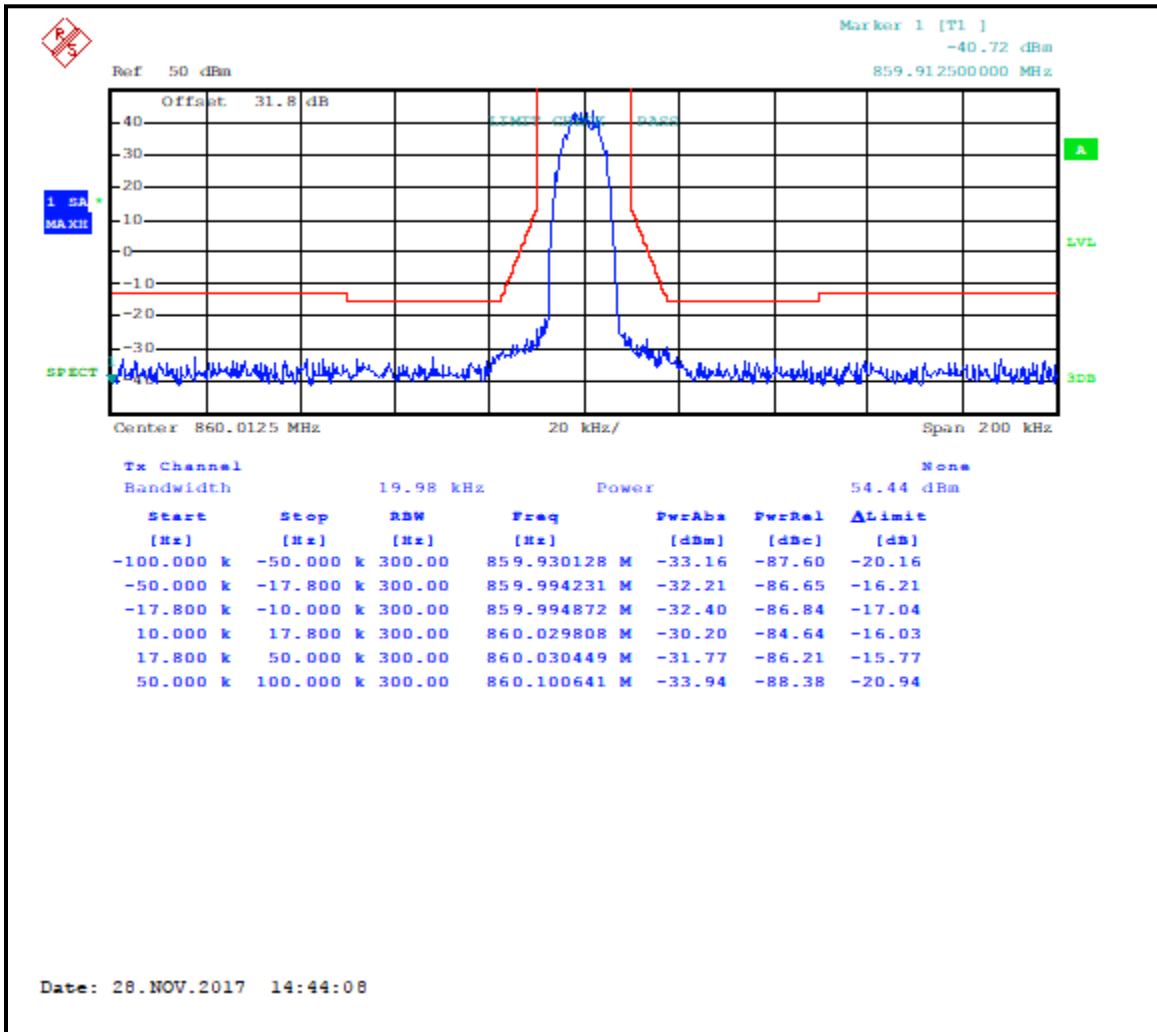


Plot 7-11: Occupied Bandwidth – 865.3375 MHz; HDQPSK; Mask G

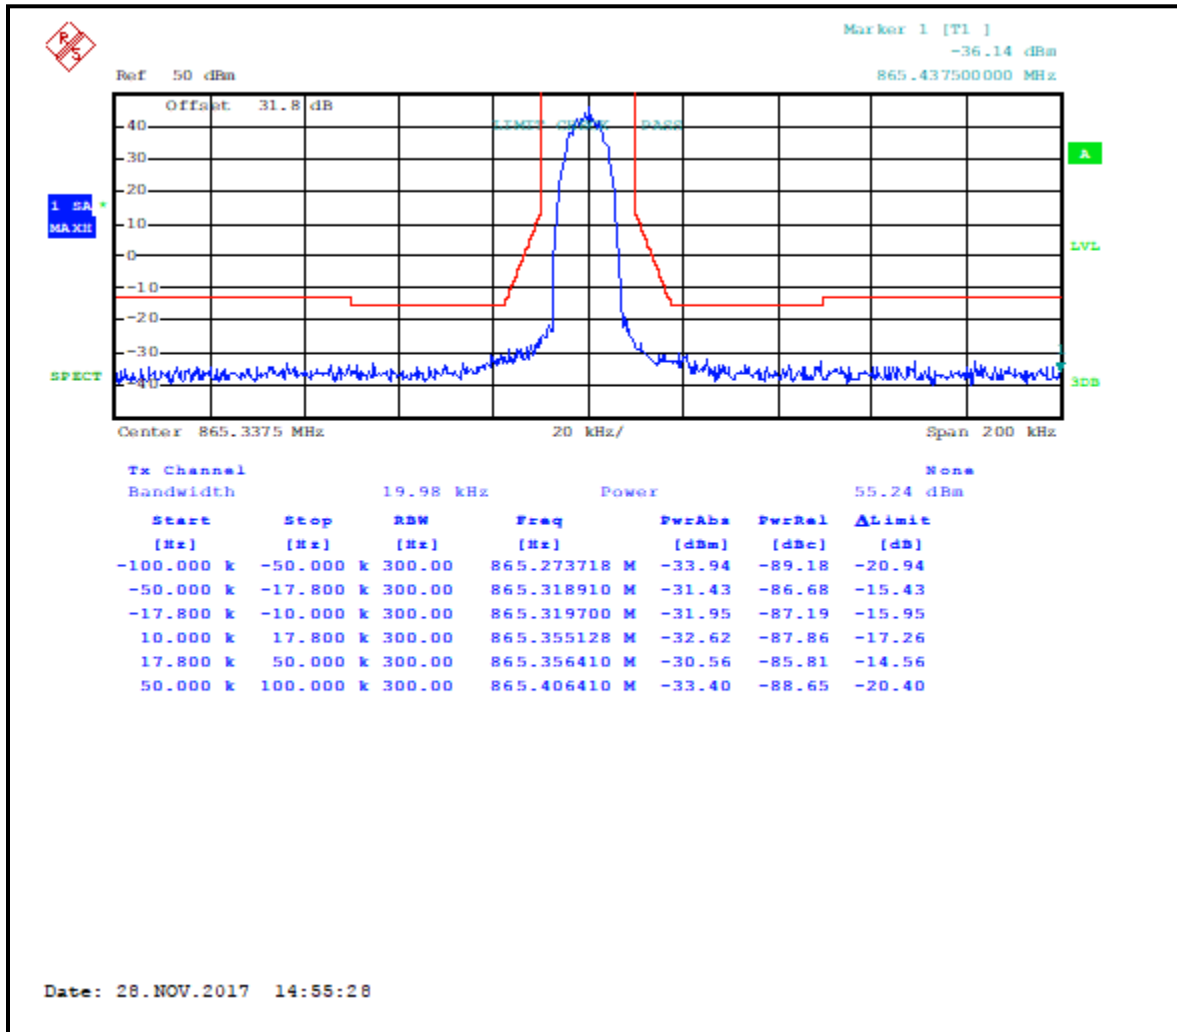


Plot 7-12: Occupied Bandwidth – 868.9875 MHz; HDQPSK; Mask G

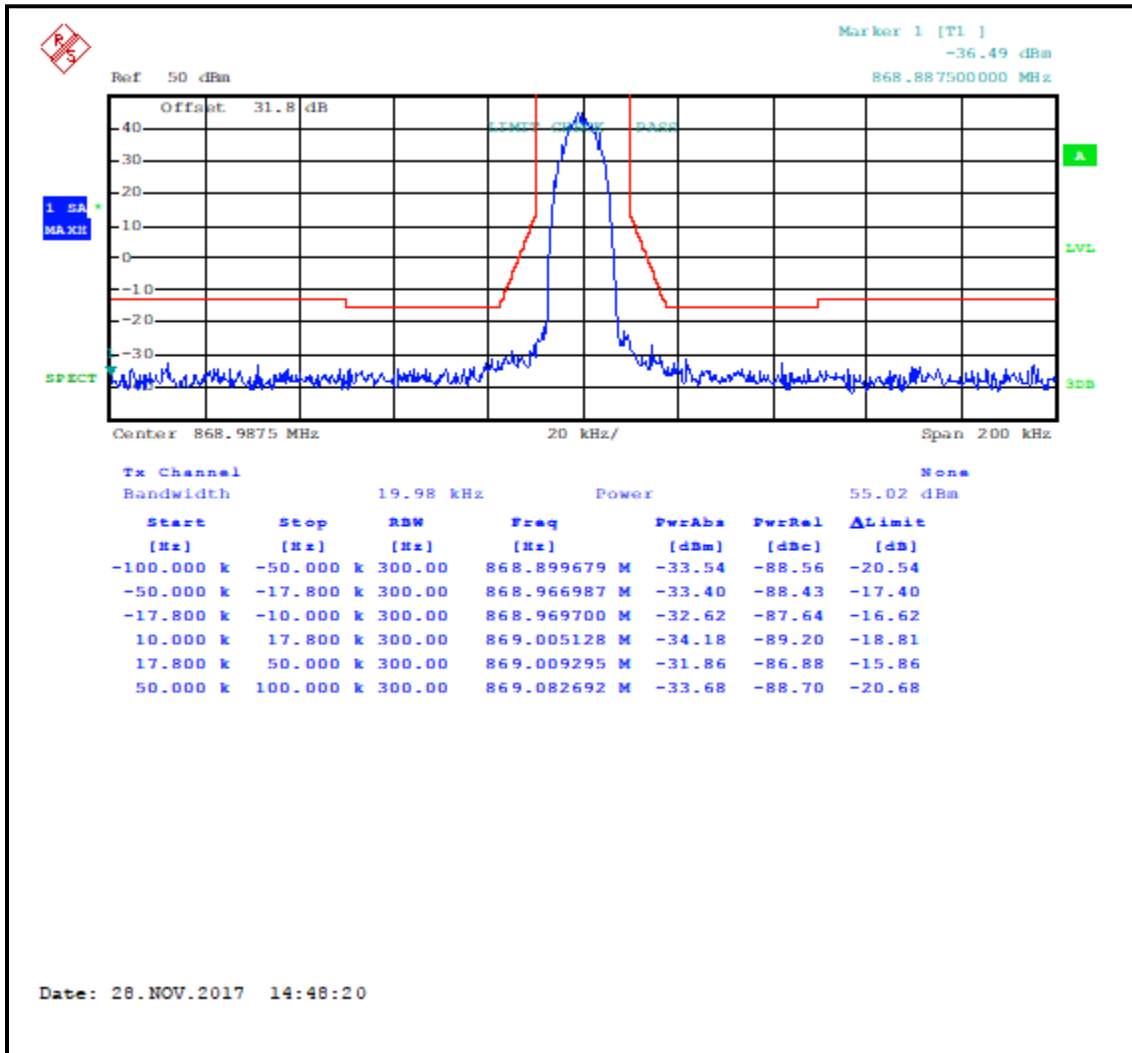


Plot 7-13: Occupied Bandwidth – 851.0125 MHz; C4FM; Mask D

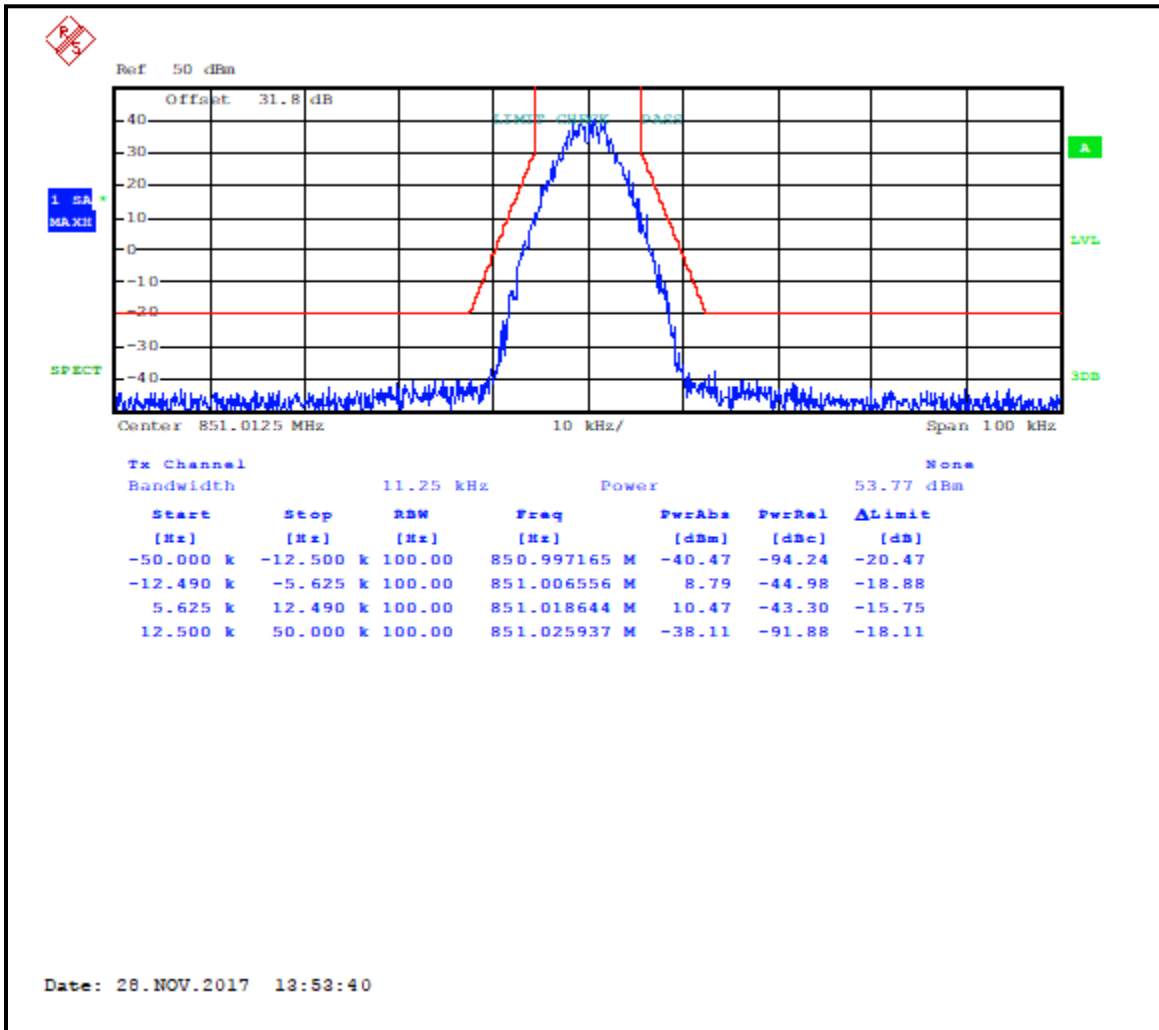


Plot 7-14: Occupied Bandwidth – 860.0125 MHz; C4FM; Mask D

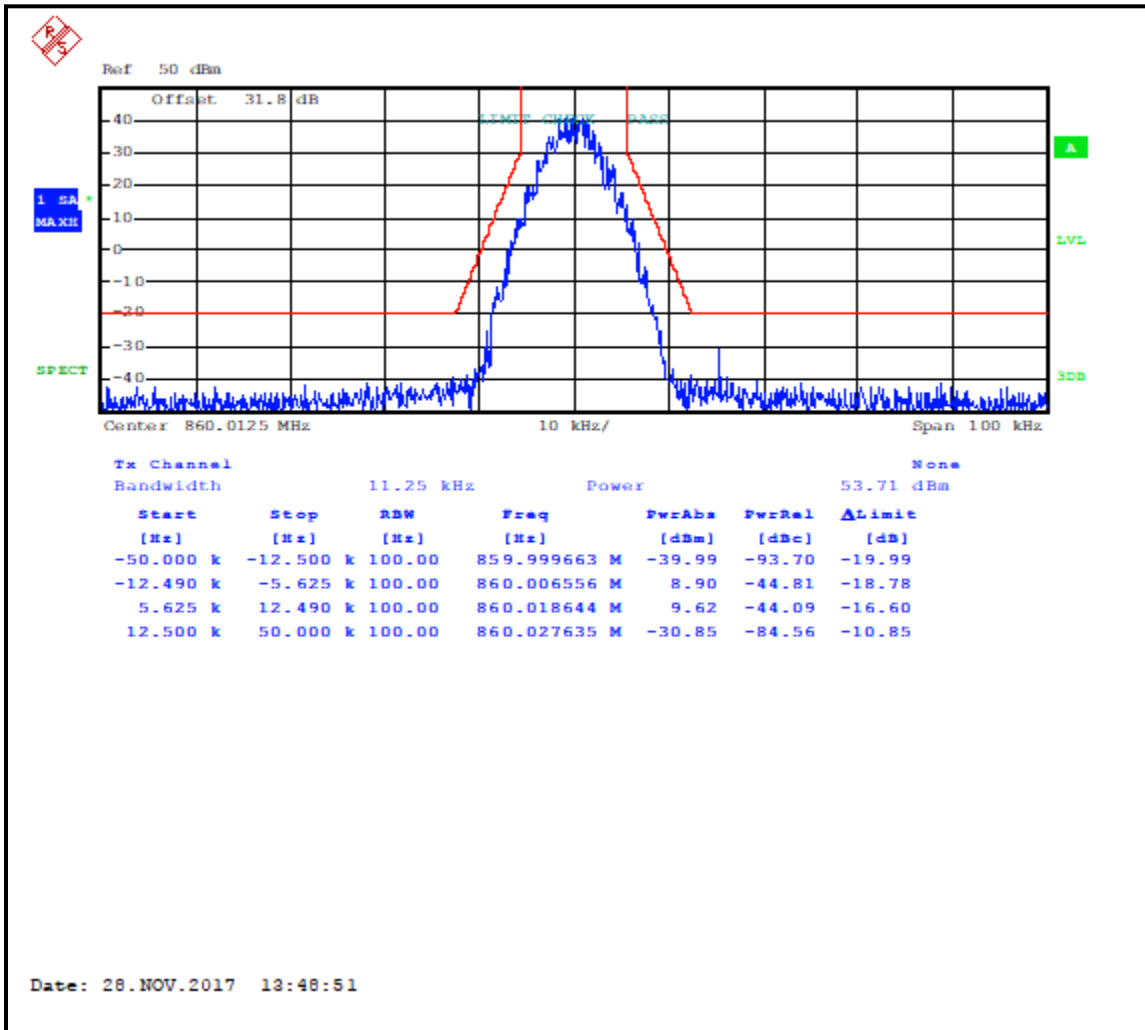


Plot 7-15: Occupied Bandwidth – 865.3375 MHz; C4FM; Mask D

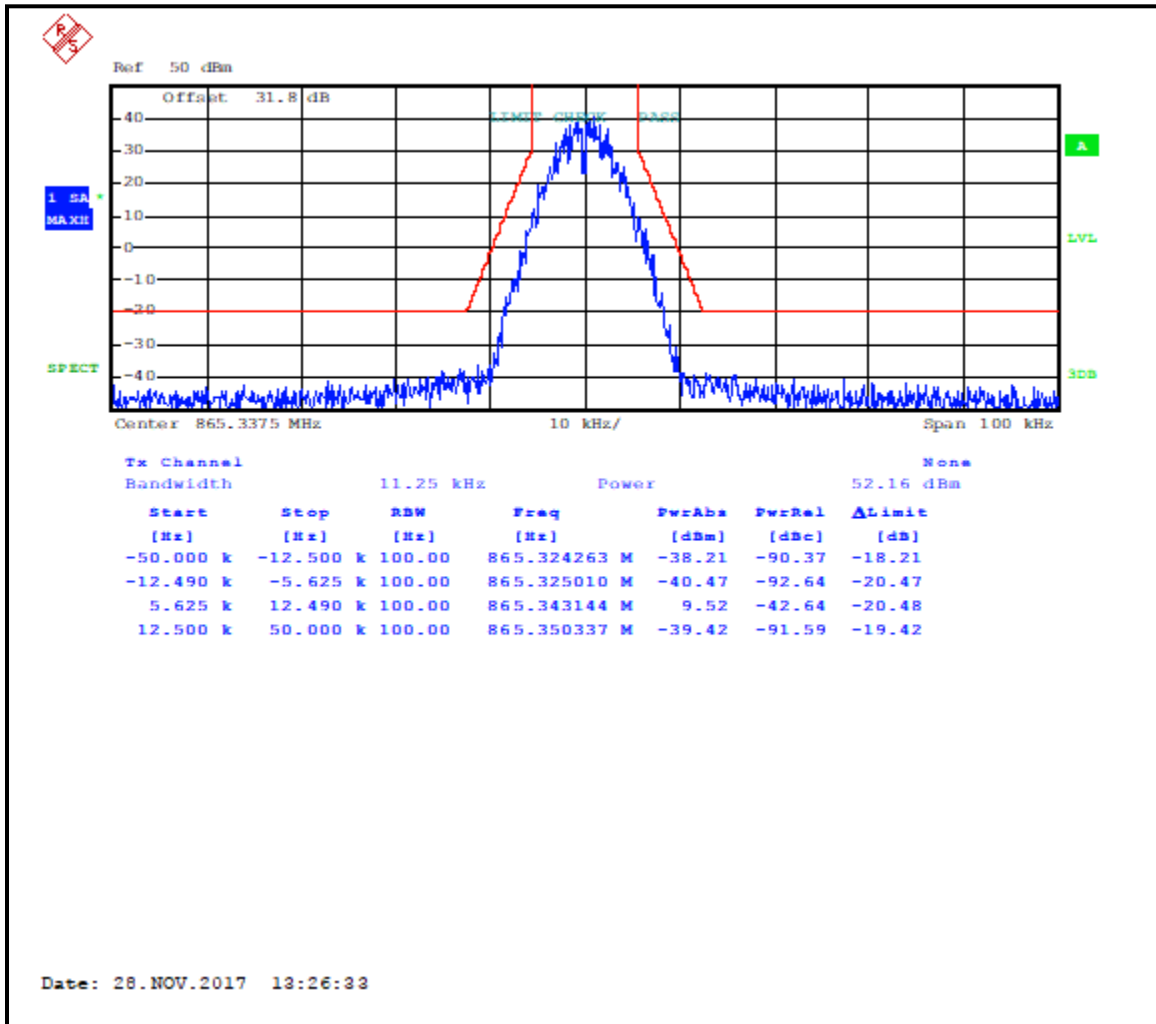


Plot 7-16: Occupied Bandwidth – 868.9875 MHz; C4FM; Mask D

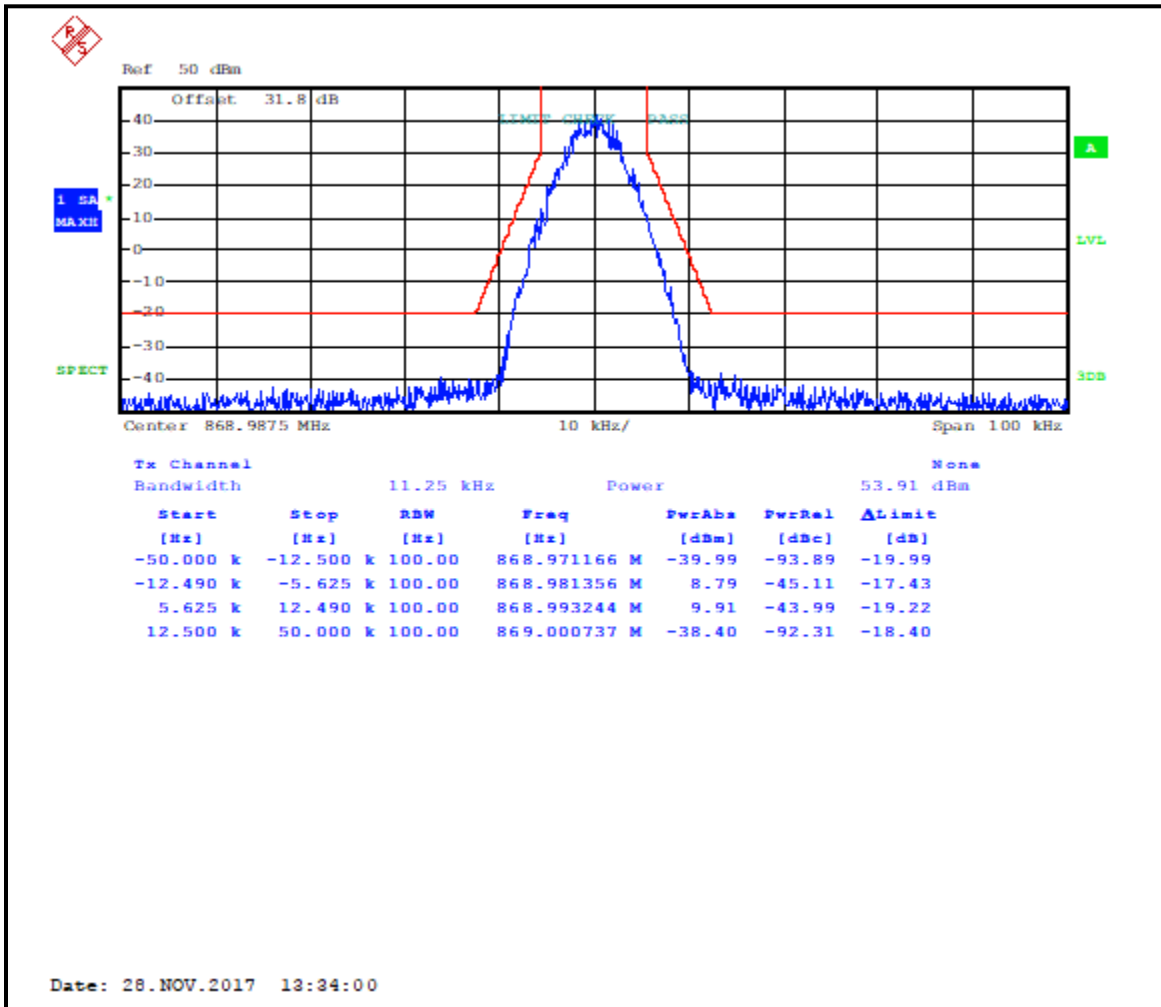


Plot 7-17: Occupied Bandwidth – 851.0125 MHz; WCQPSK; Mask D

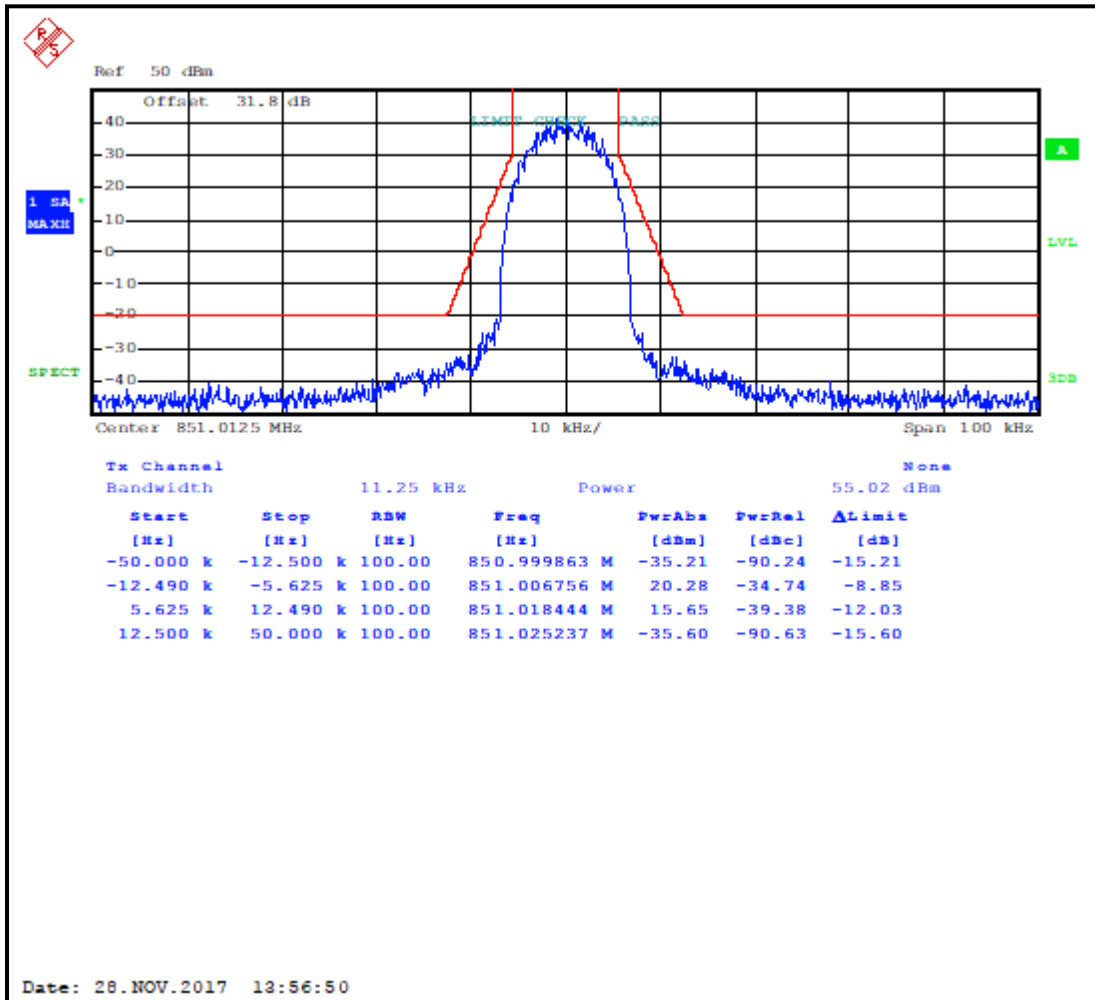


Plot 7-18: Occupied Bandwidth – 860.0125 MHz; WCQPSK; Mask D

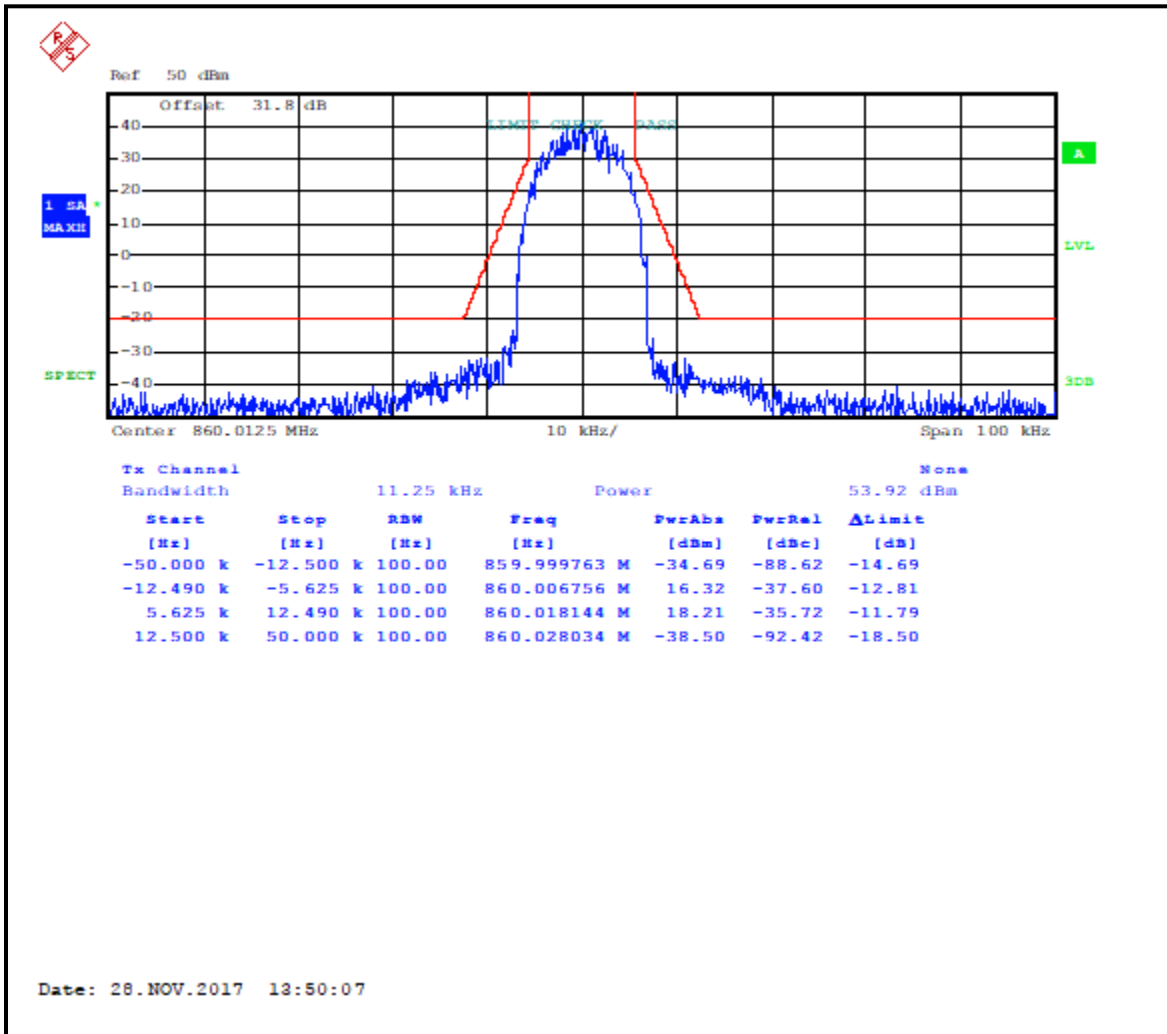


Plot 7-19: Occupied Bandwidth – 865.3375 MHz; WCQPSK; Mask D

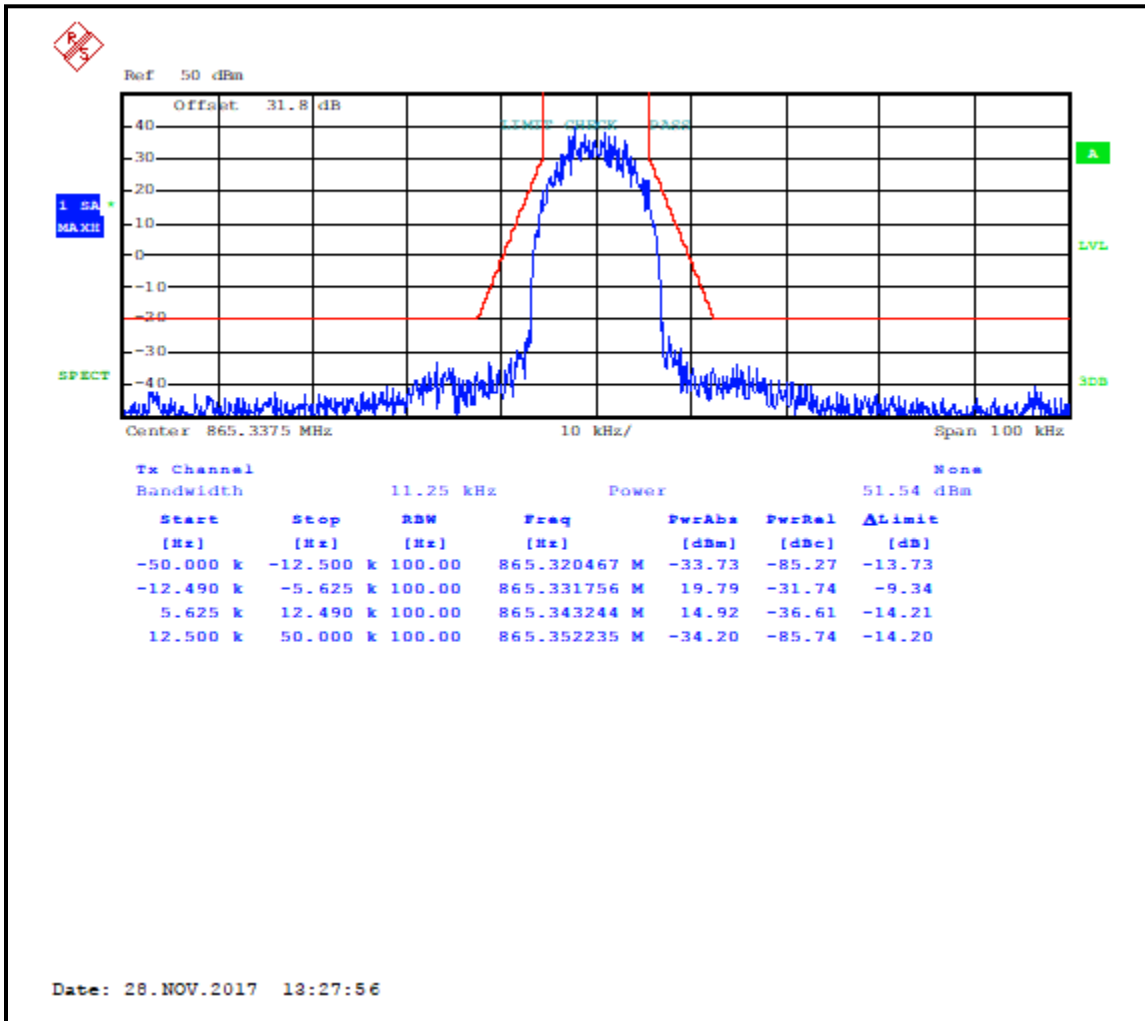


Plot 7-20: Occupied Bandwidth – 868.9875 MHz; WCQPSK; Mask D

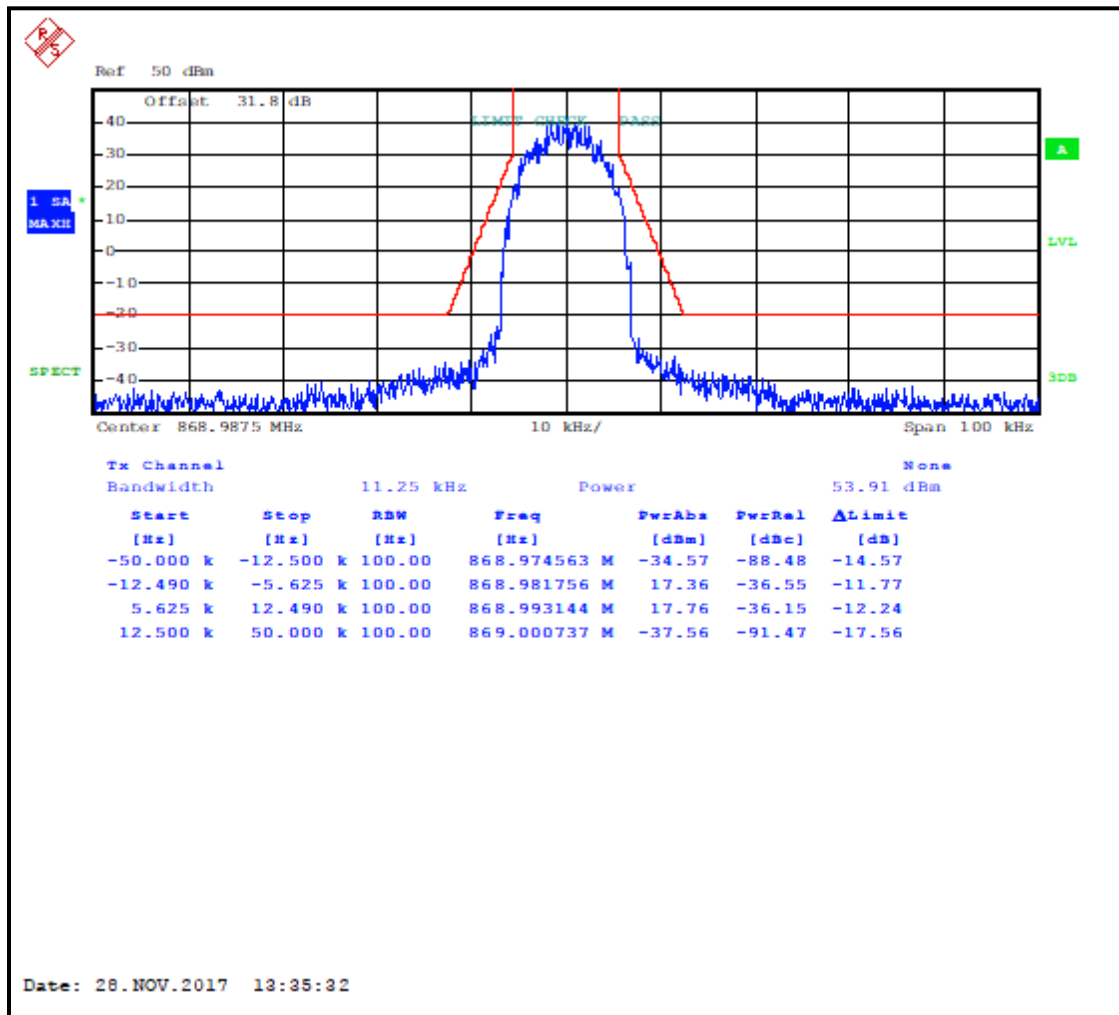


Plot 7-21: Occupied Bandwidth – 851.0125 MHz; HDQPSK; Mask D

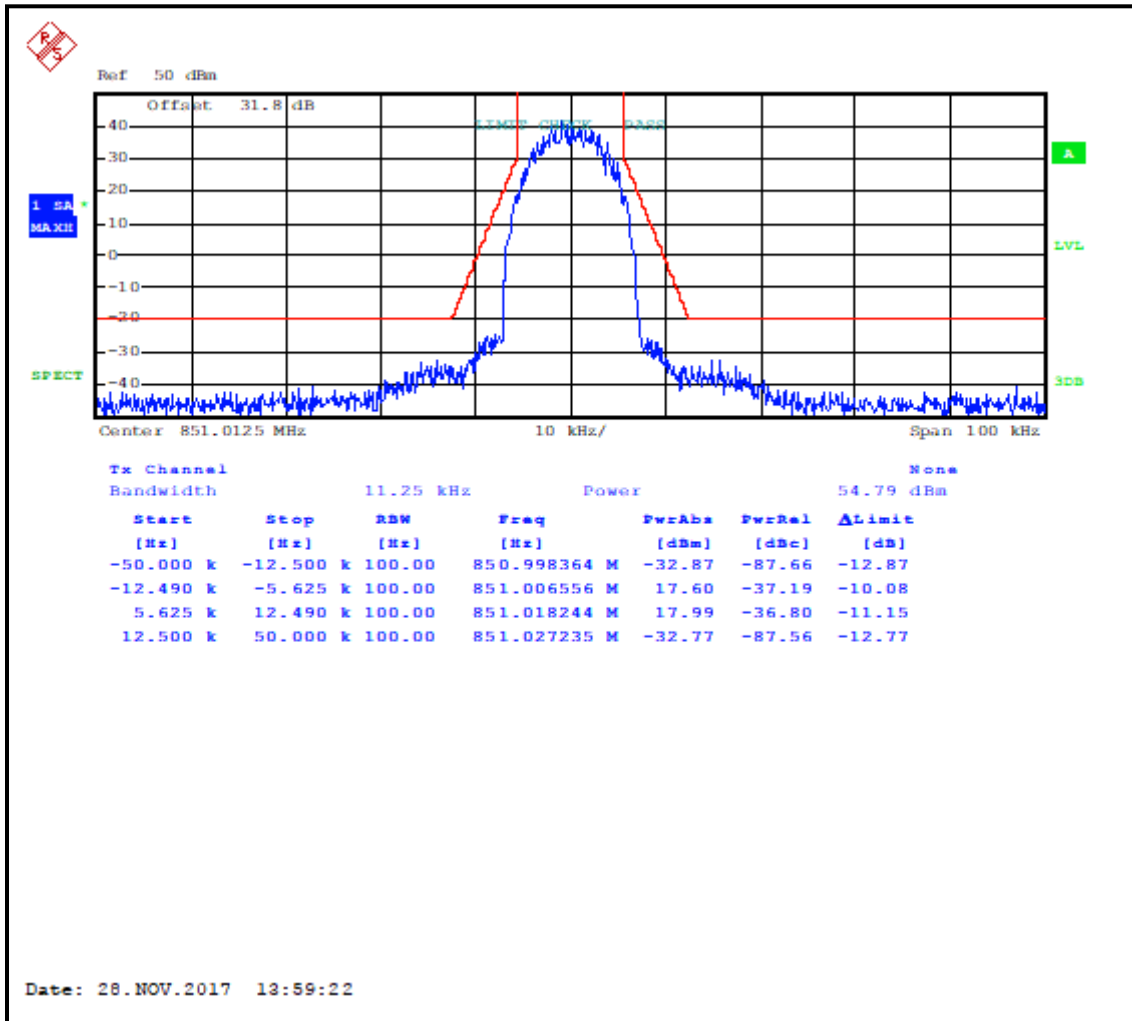


Plot 7-22: Occupied Bandwidth – 860.0125 MHz; HDQPSK; Mask D

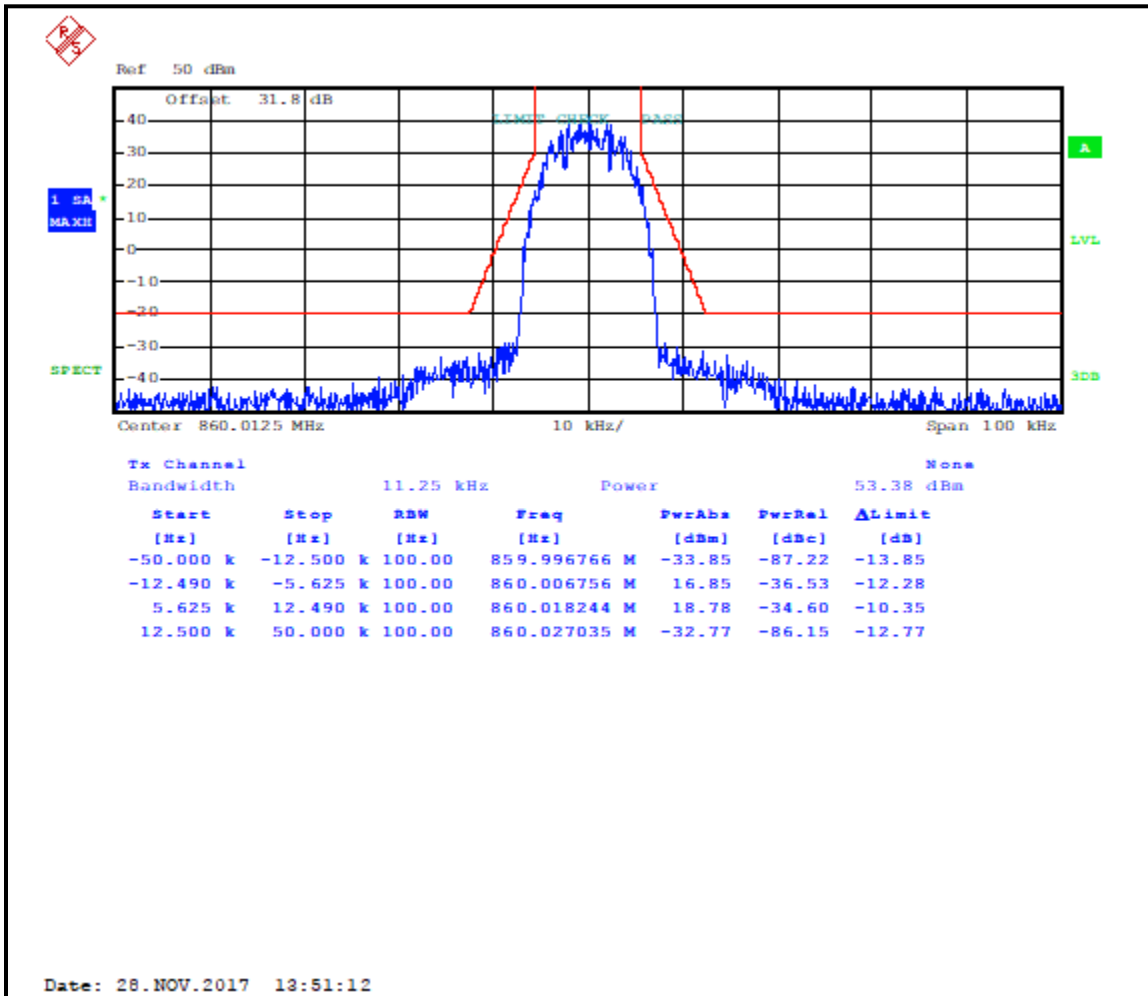


Plot 7-23: Occupied Bandwidth – 865.3375 MHz; HDQPSK; Mask D

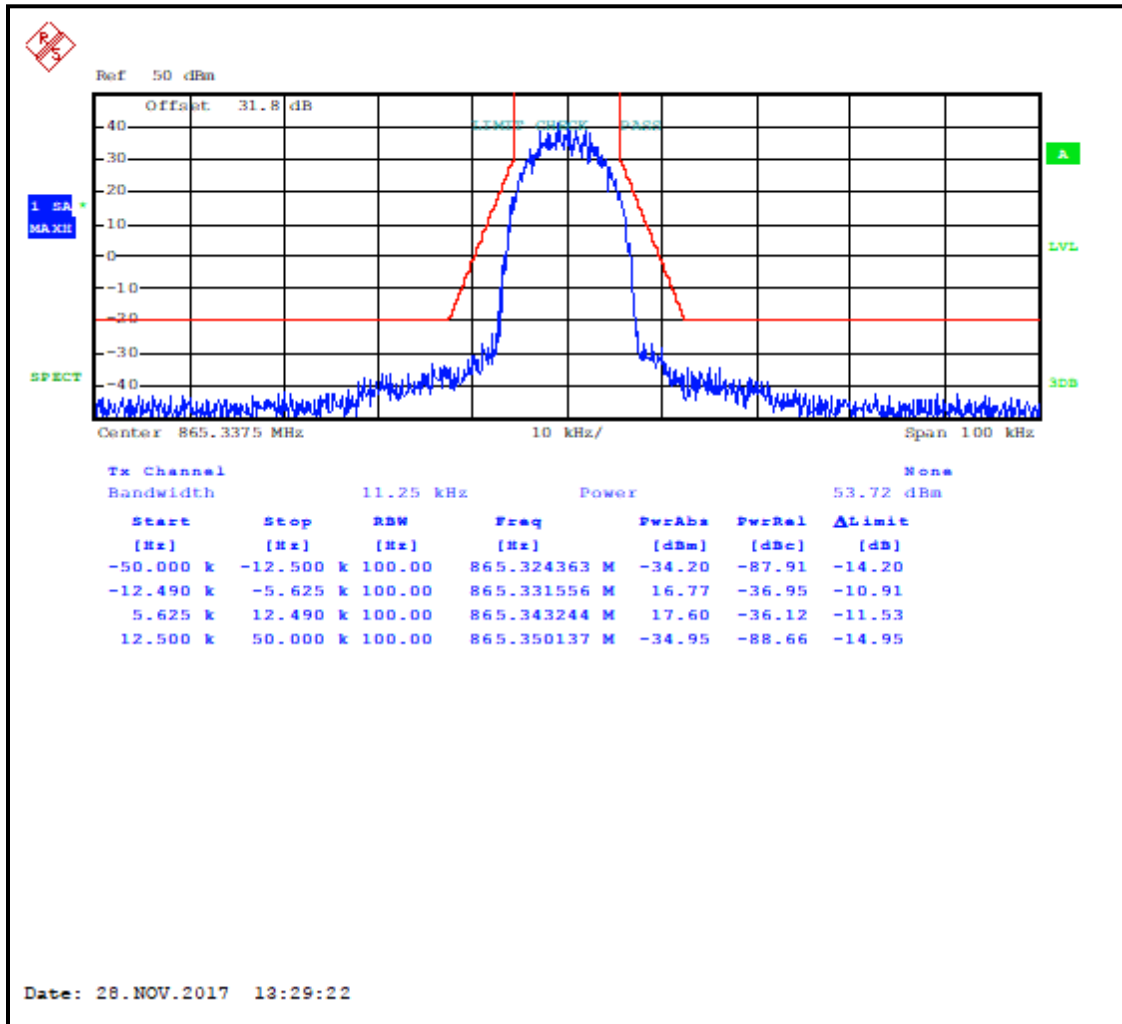


Plot 7-24: Occupied Bandwidth – 868.9875 MHz; HDQPSK; Mask D

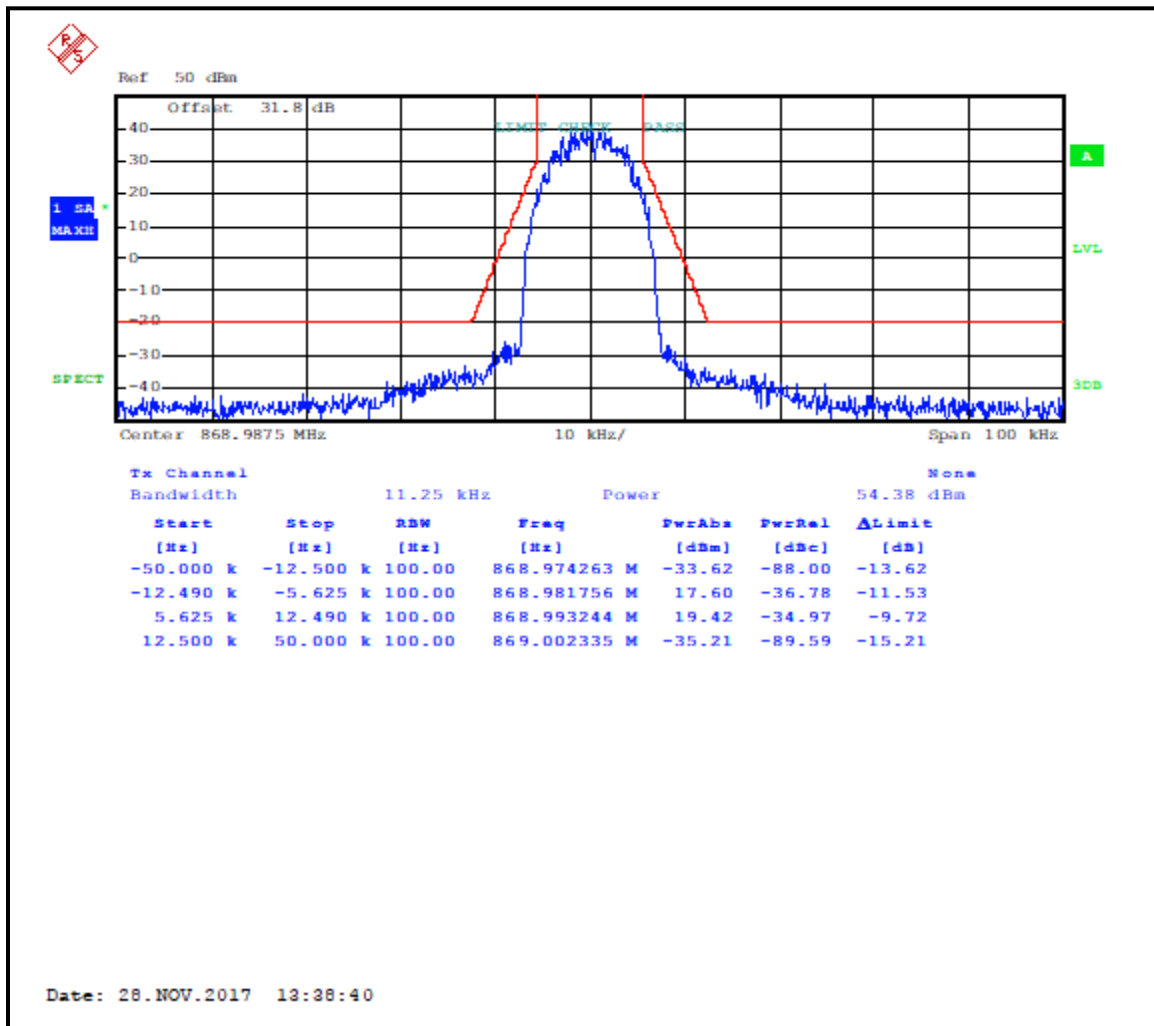


Plot 7-25: Occupied Bandwidth – 851.0125 MHz; C4FM; 99% BW

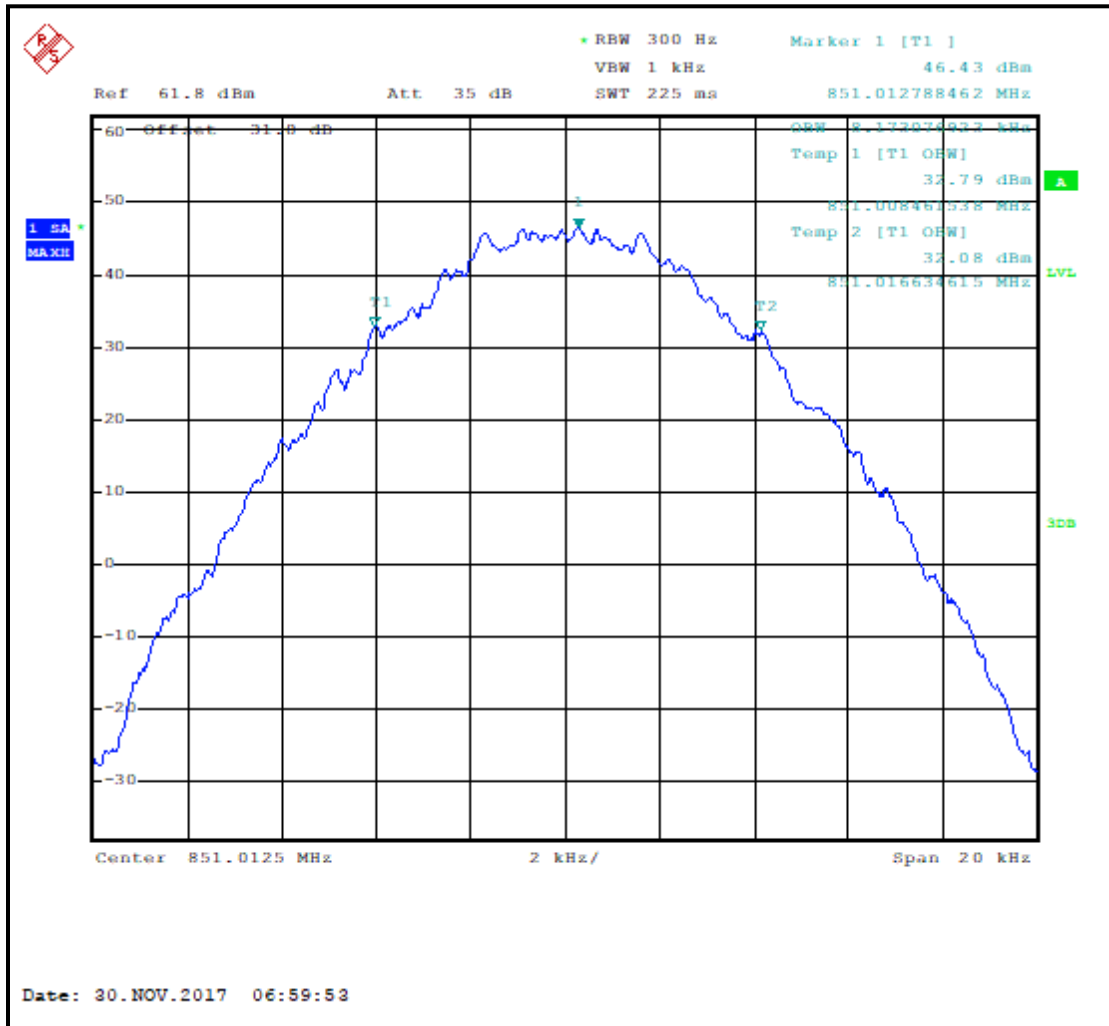


Plot 7-26: Occupied Bandwidth – 851.0125 MHz; WCQPSK; 99% BW

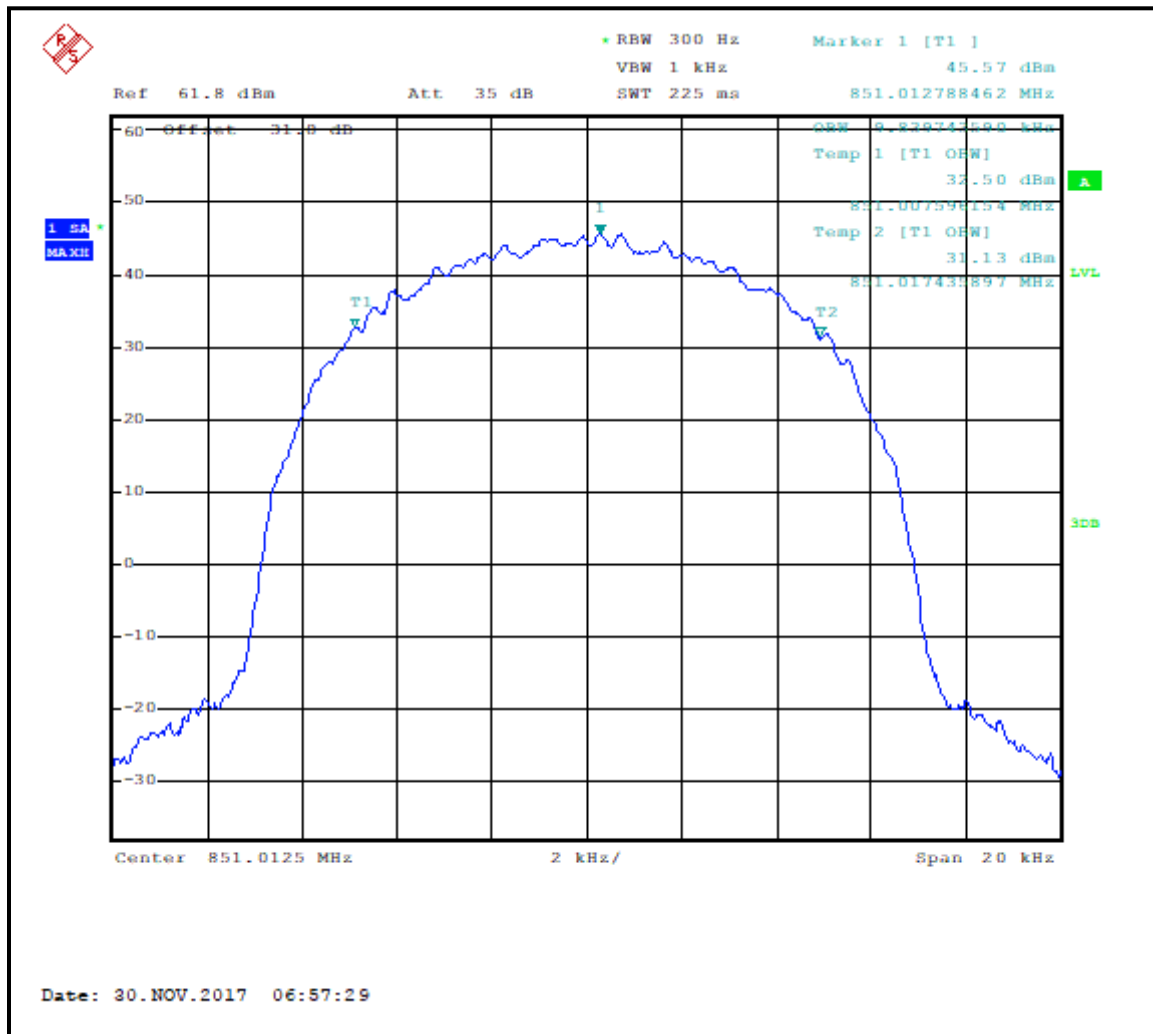


Plot 7-27: Occupied Bandwidth – 851.0125 MHz; HDQPSK; 99% BW

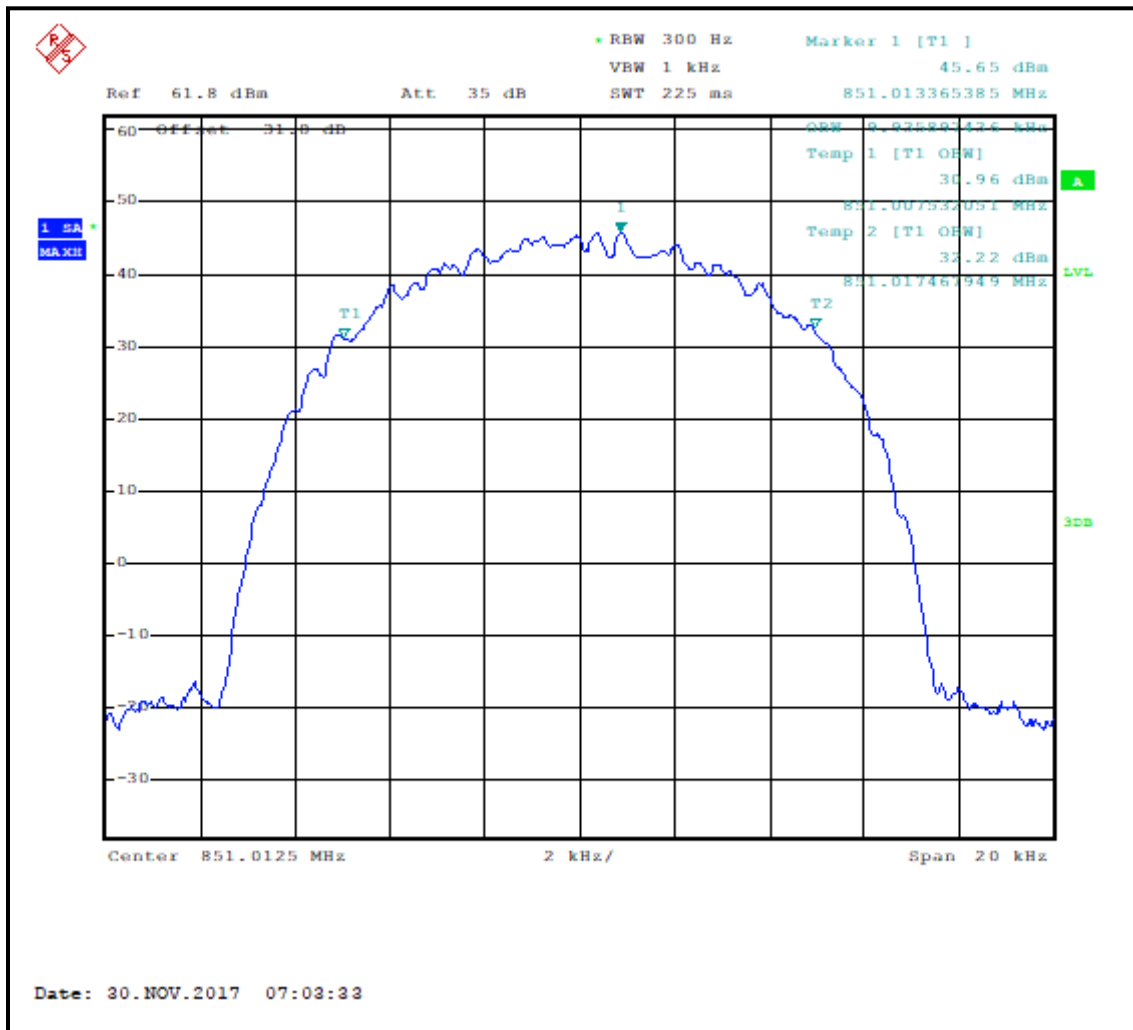


Plot 7-28: Occupied Bandwidth – 860.0125 MHz; C4FM; 99% BW

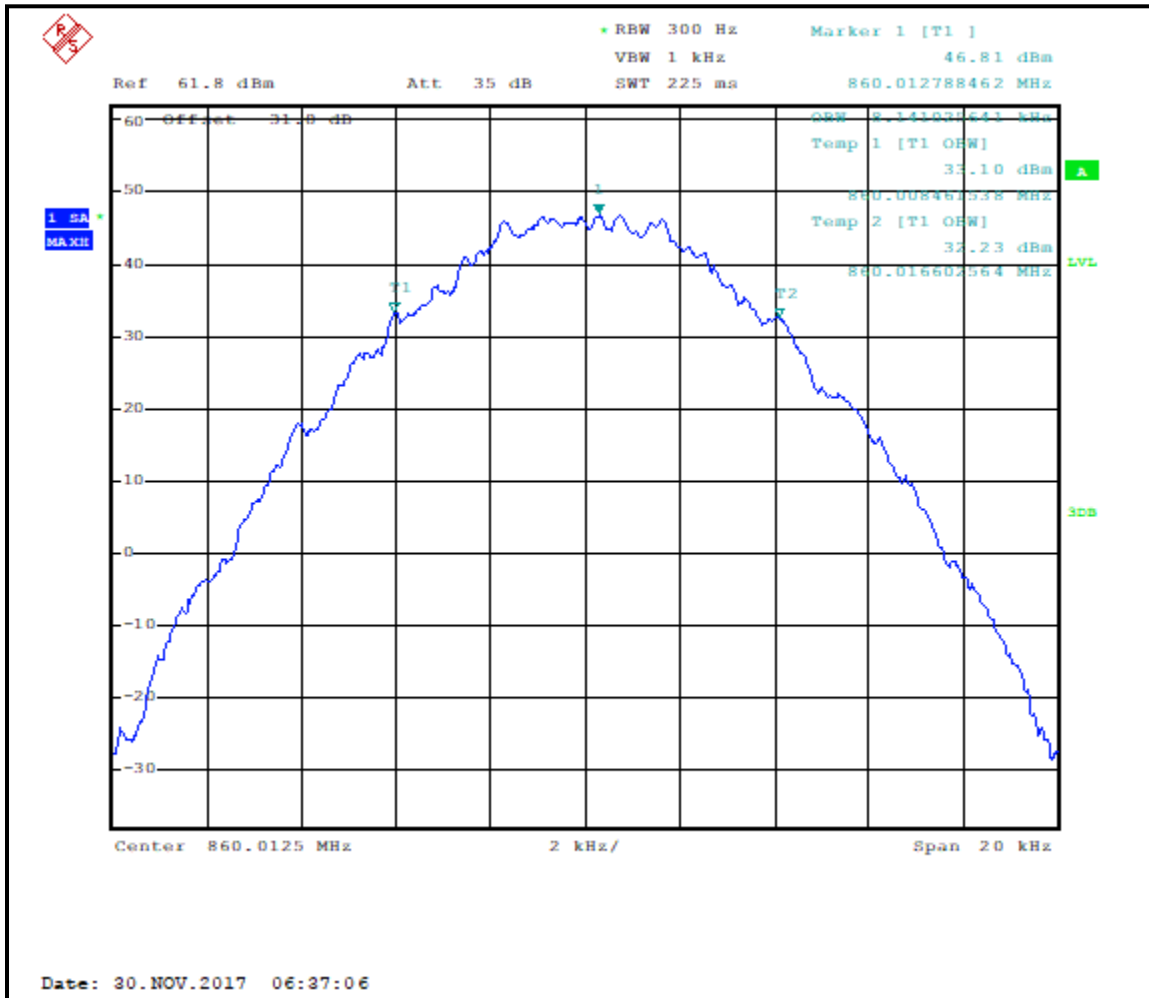


Plot 7-29: Occupied Bandwidth – 860.0125 MHz; WCQPSK; 99% BW

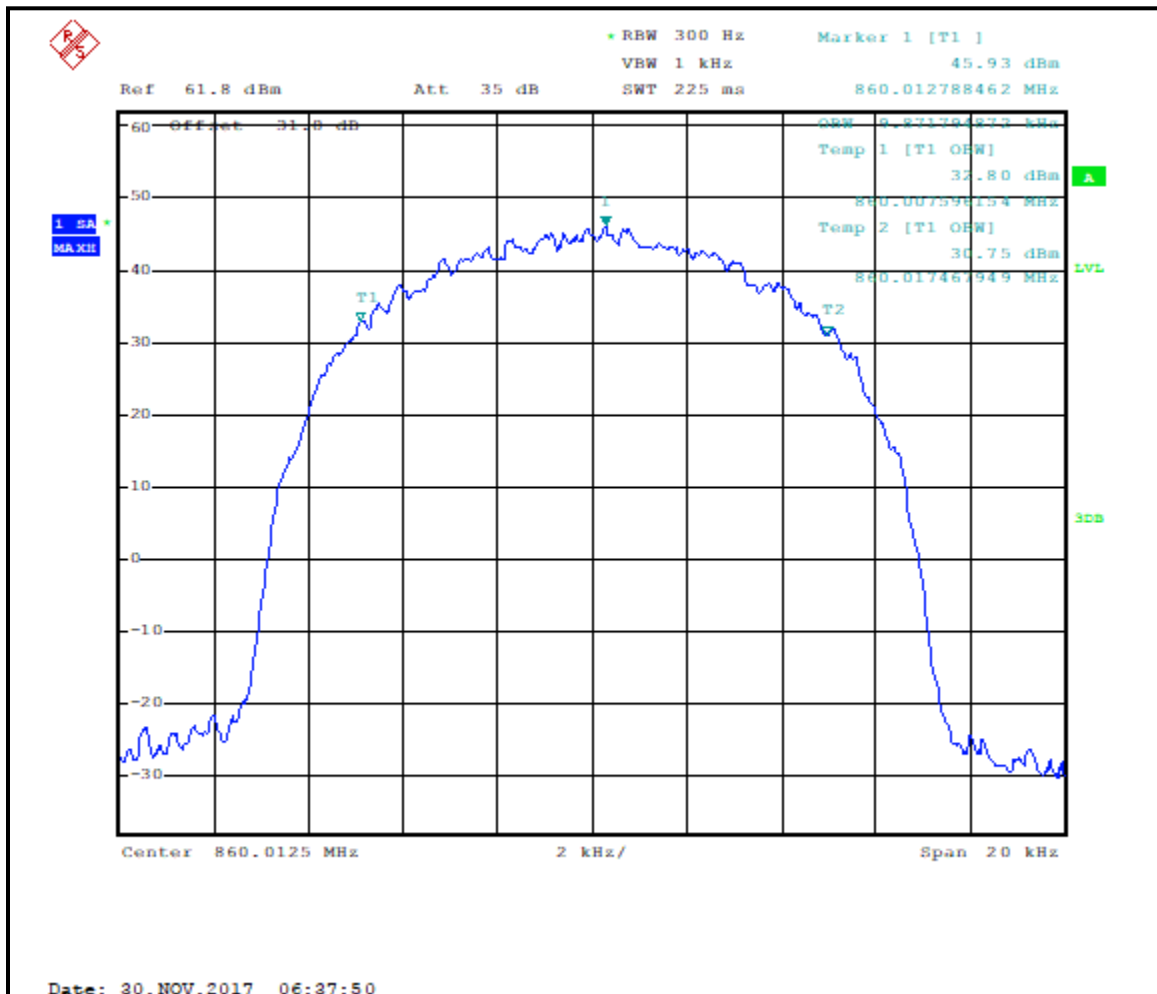


Plot 7-30: Occupied Bandwidth – 860.0125 MHz; HDQPSK; 99% BW

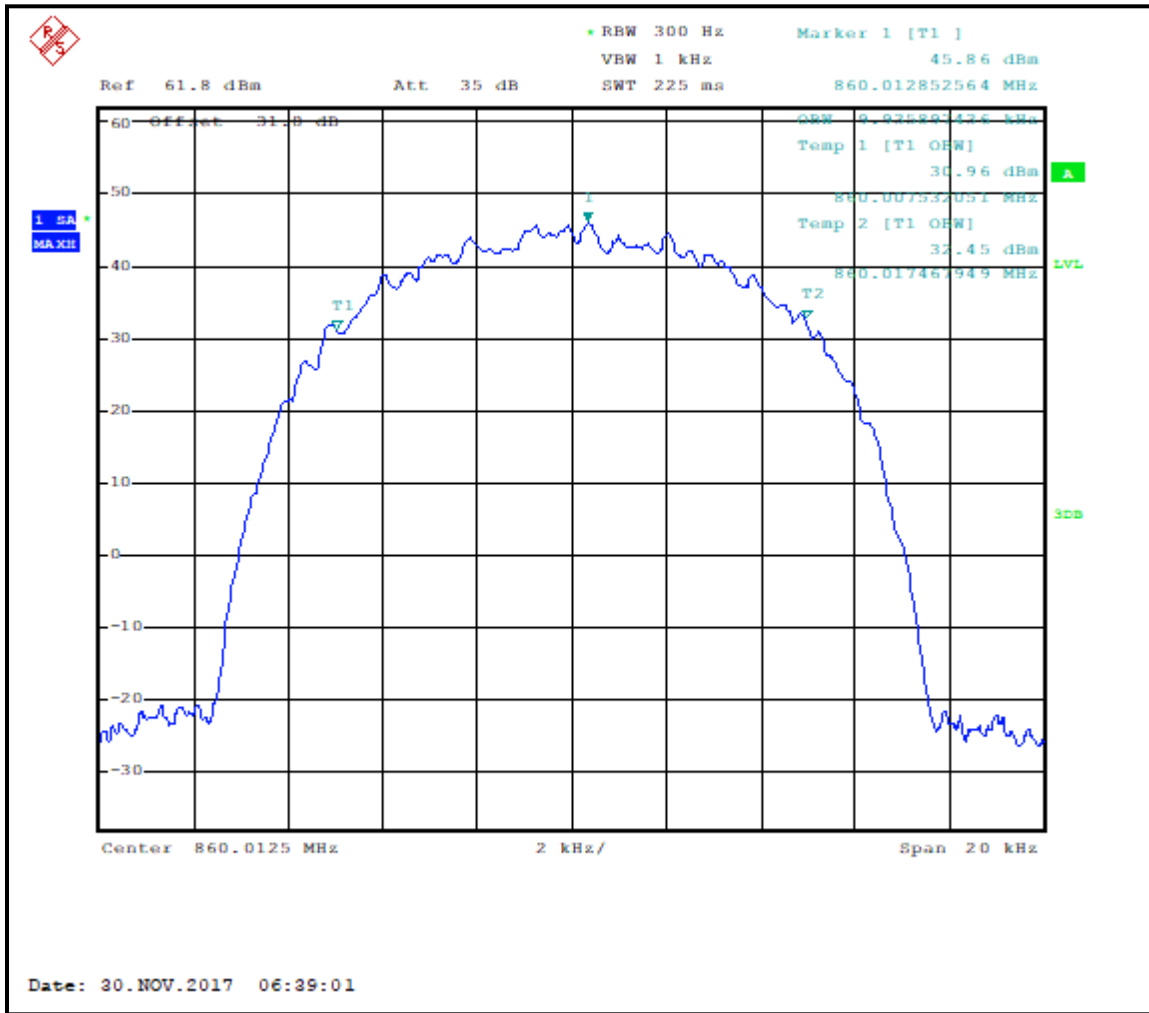


Plot 7-31: Occupied Bandwidth – 865.3375 MHz; C4FM; 99% BW

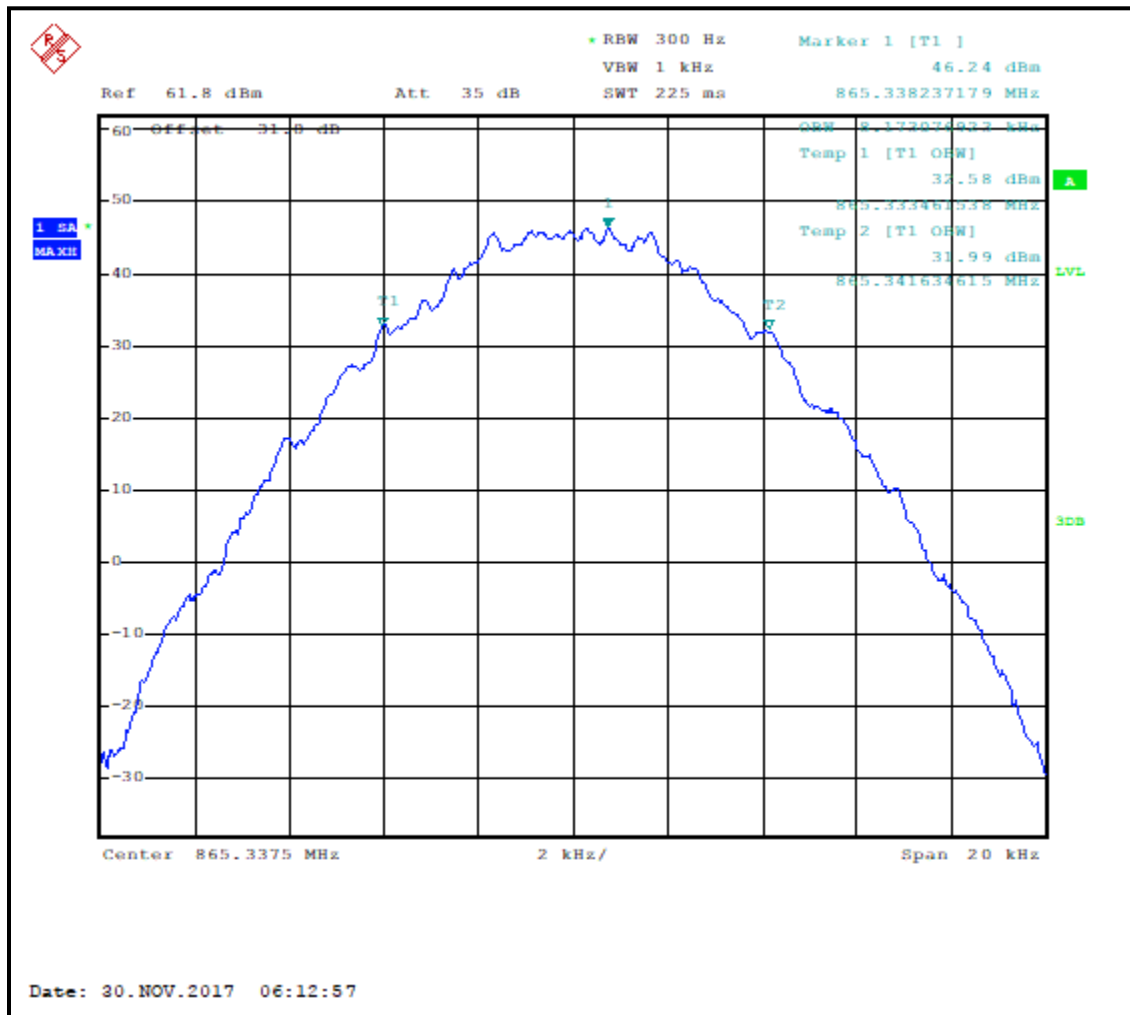


Plot 7-32: Occupied Bandwidth – 865.3375 MHz; WCQPSK; 99% BW

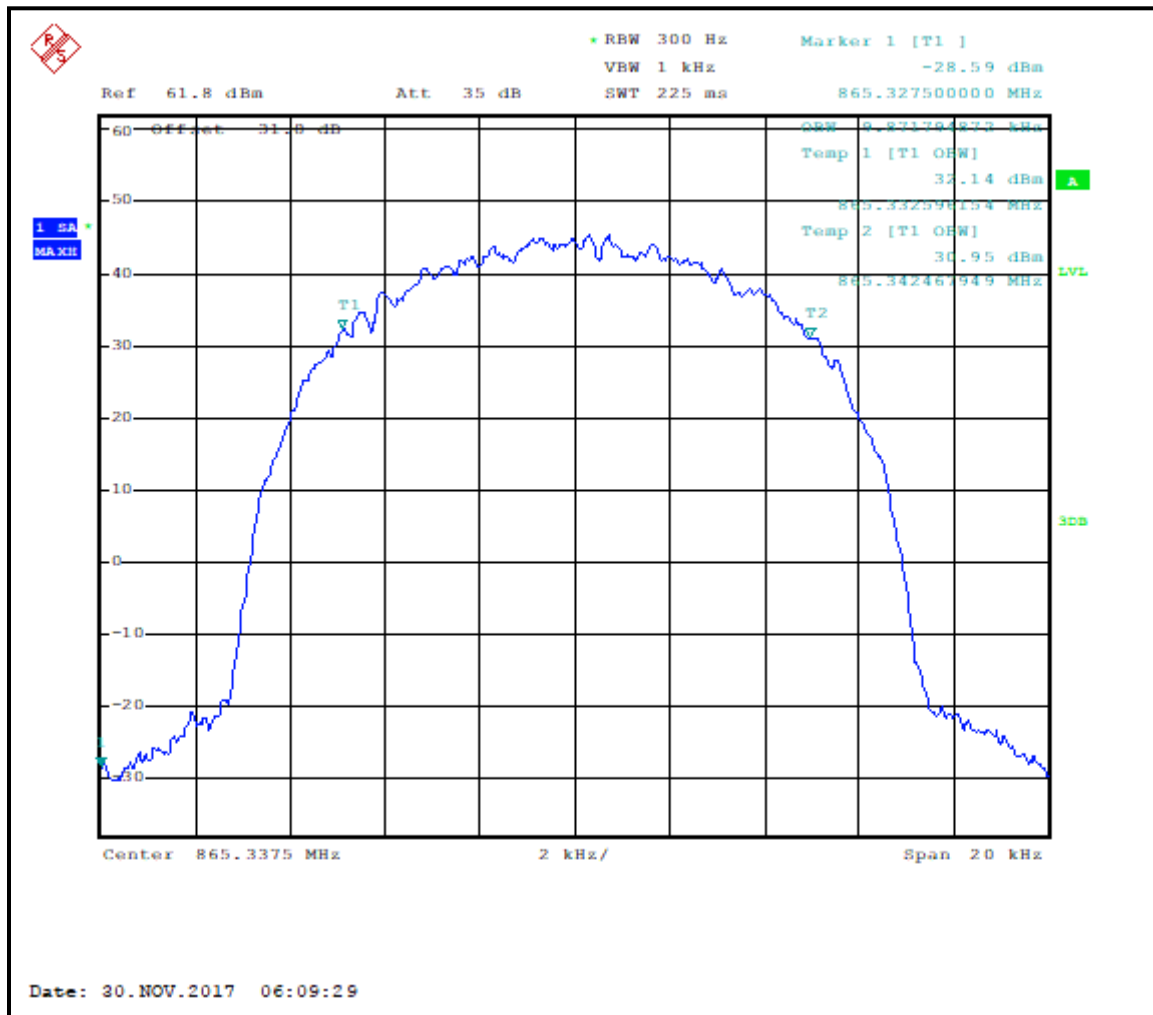


Plot 7-33: Occupied Bandwidth – 865.3375 MHz; HDQPSK; 99% BW

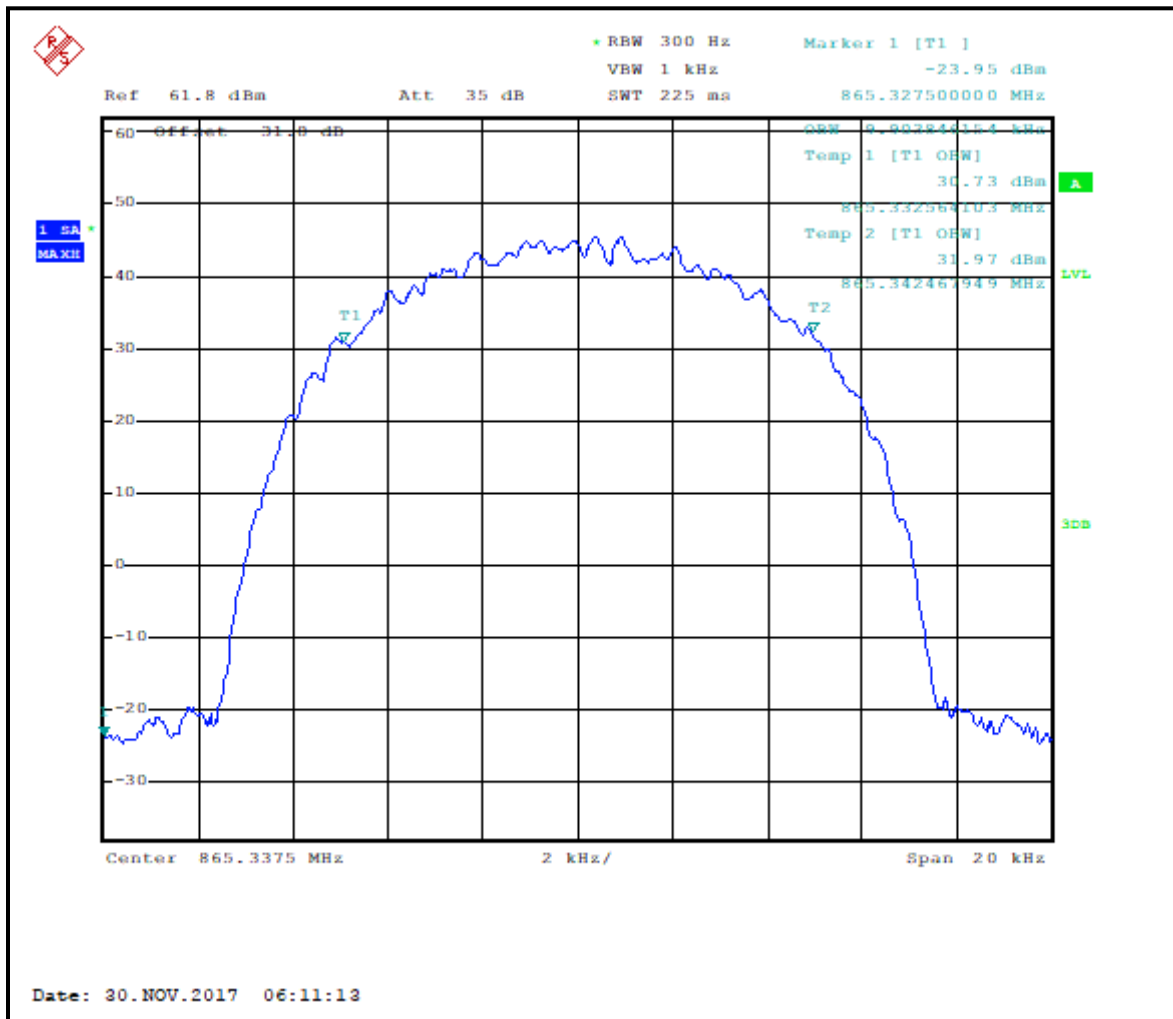


Plot 7-34: Occupied Bandwidth – 868.9875 MHz; C4FM; 99% BW

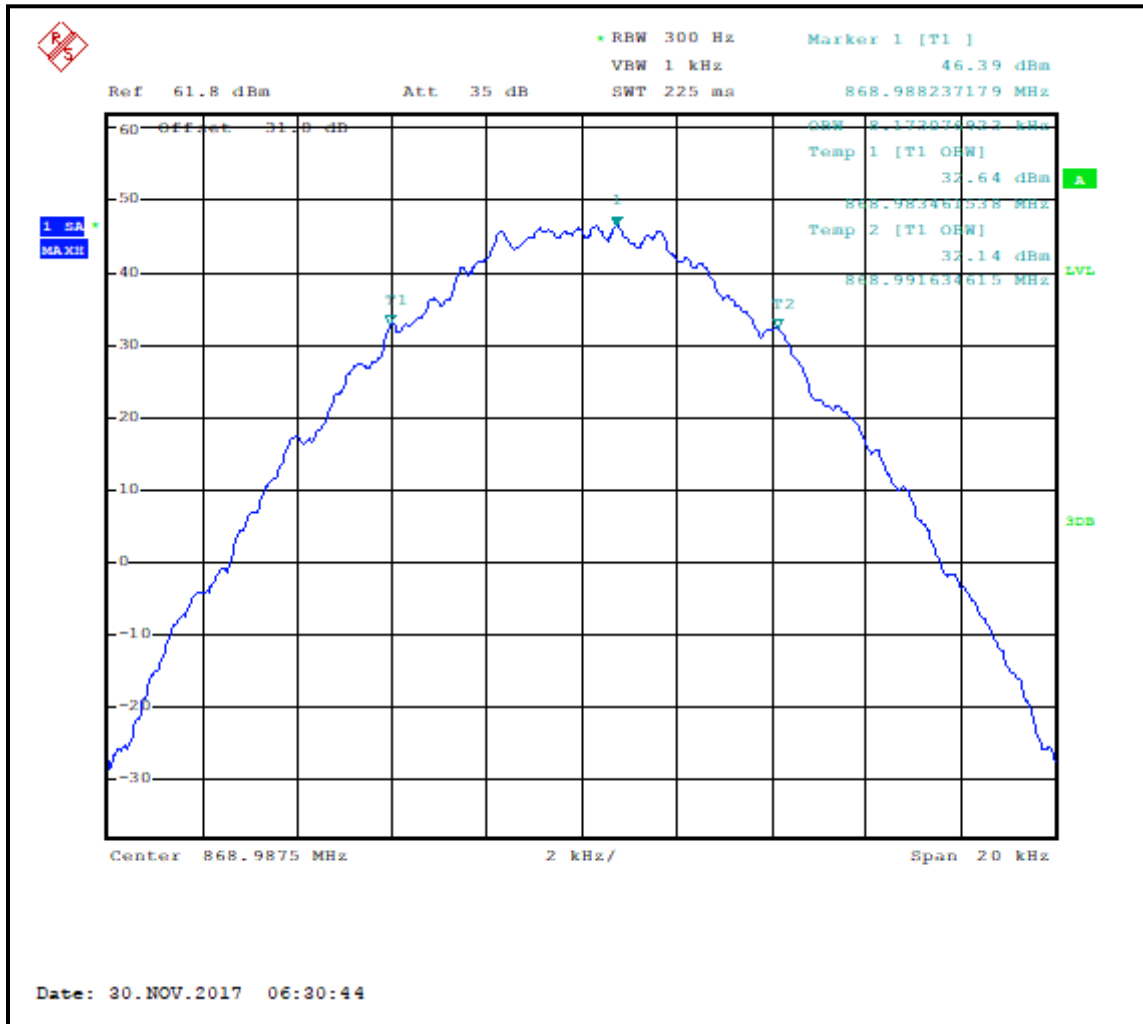


Plot 7-35: Occupied Bandwidth – 868.9875 MHz; WCQPSK; 99% BW

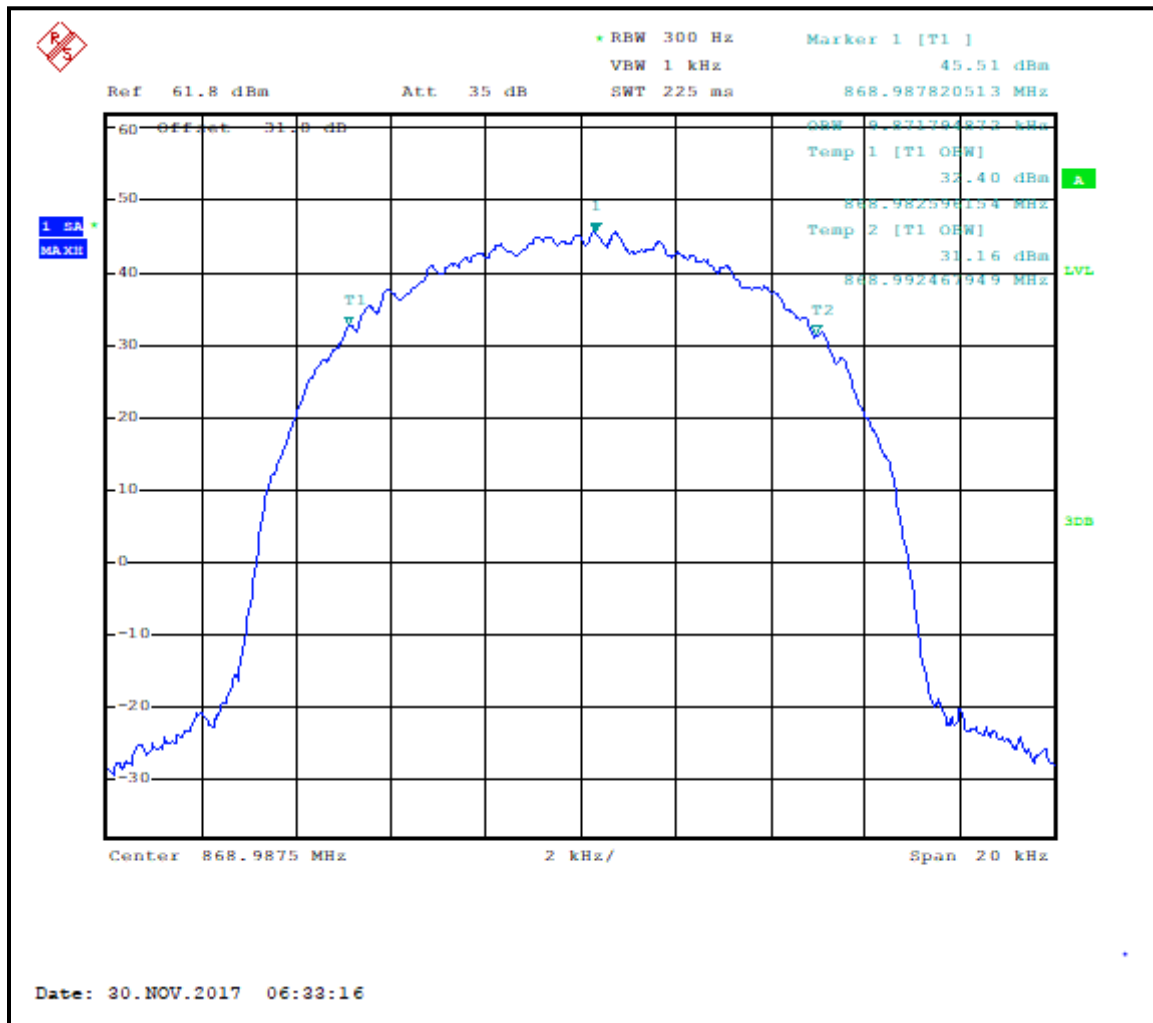


Plot 7-36: Occupied Bandwidth – 868.9875 MHz; HDQPSK; 99% BW

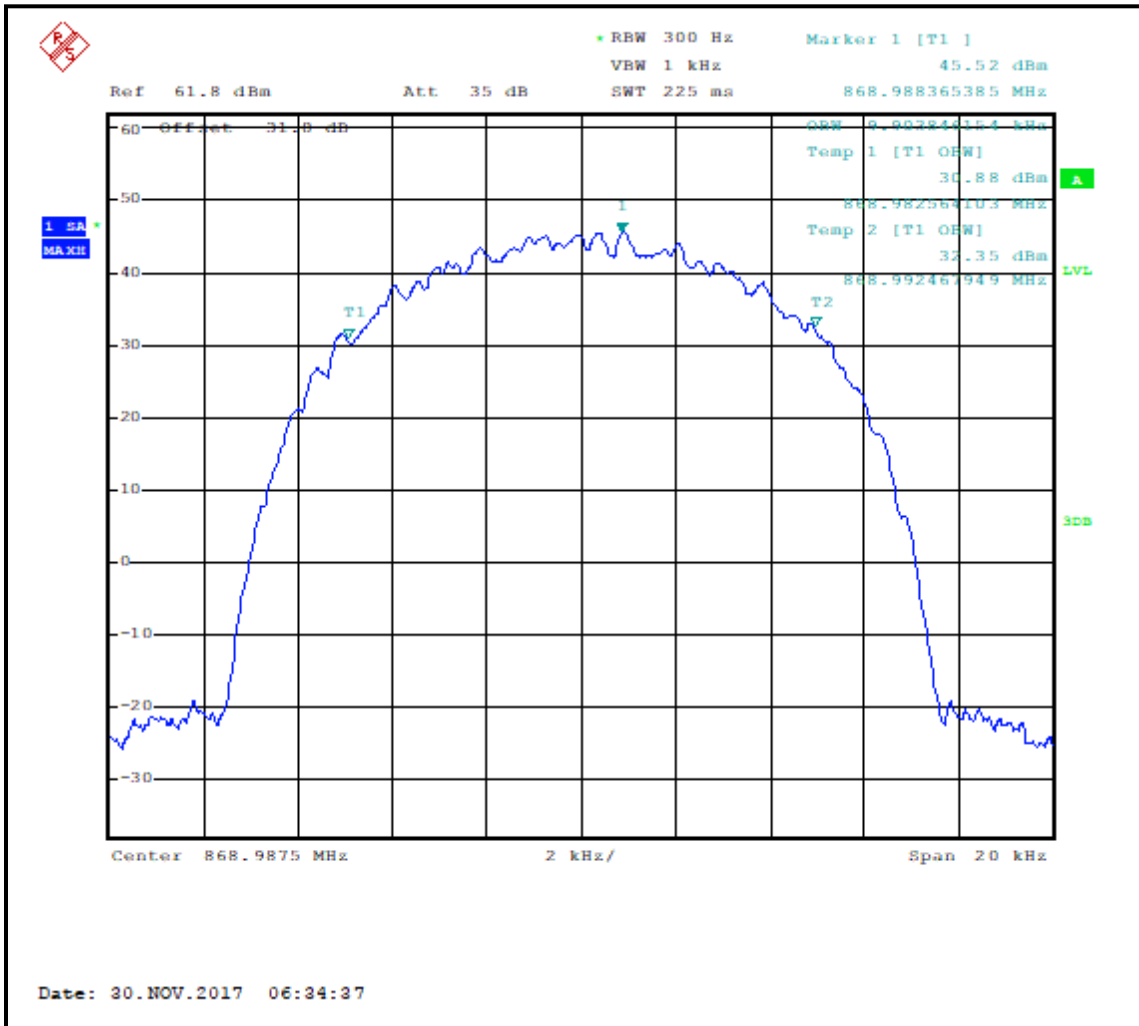


Plot 7-37: Occupied Bandwidth – 851.0125 MHz; C4FM; 20 dB BW

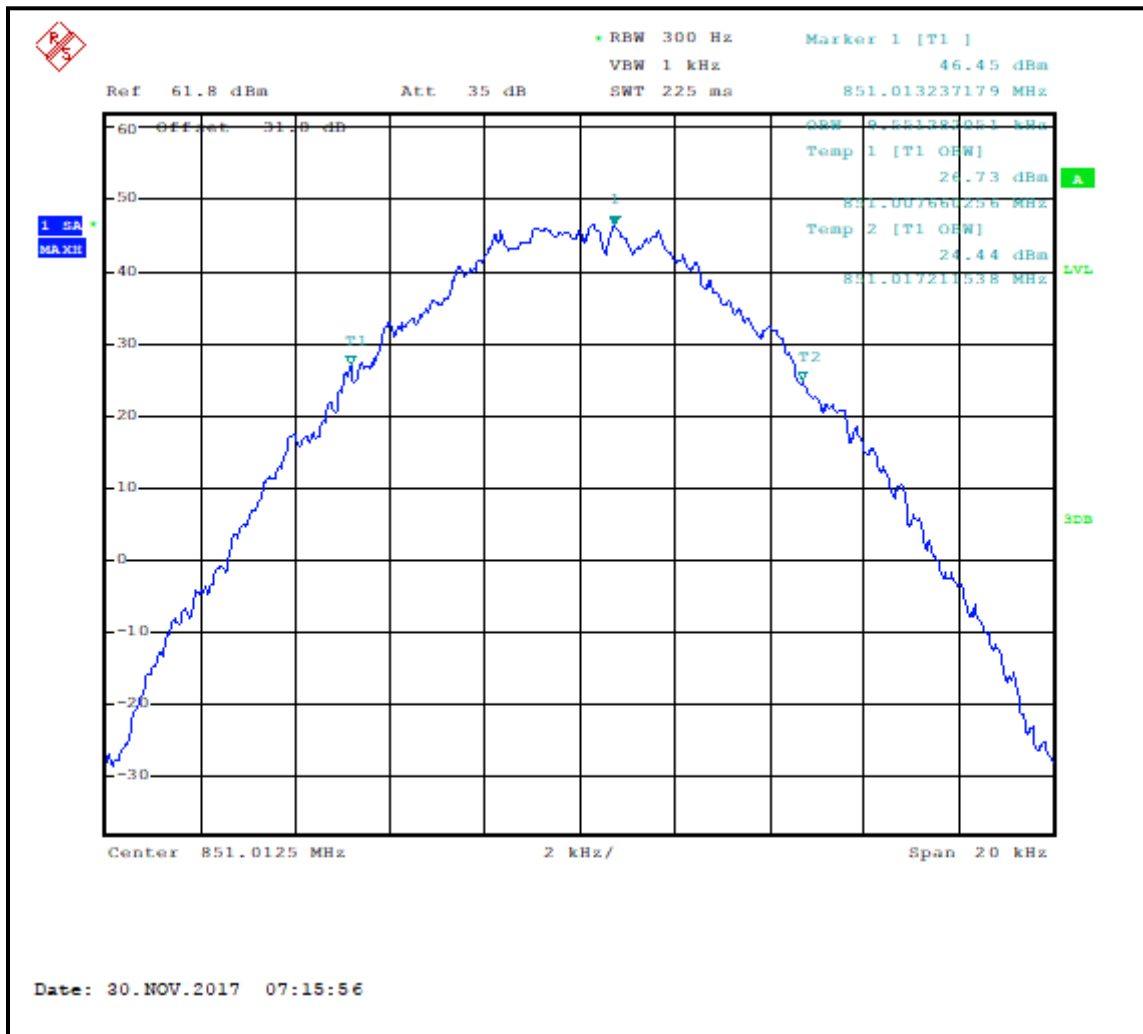


Plot 7-38: Occupied Bandwidth – 851.0125 MHz; WCQPSK; 20 dB BW

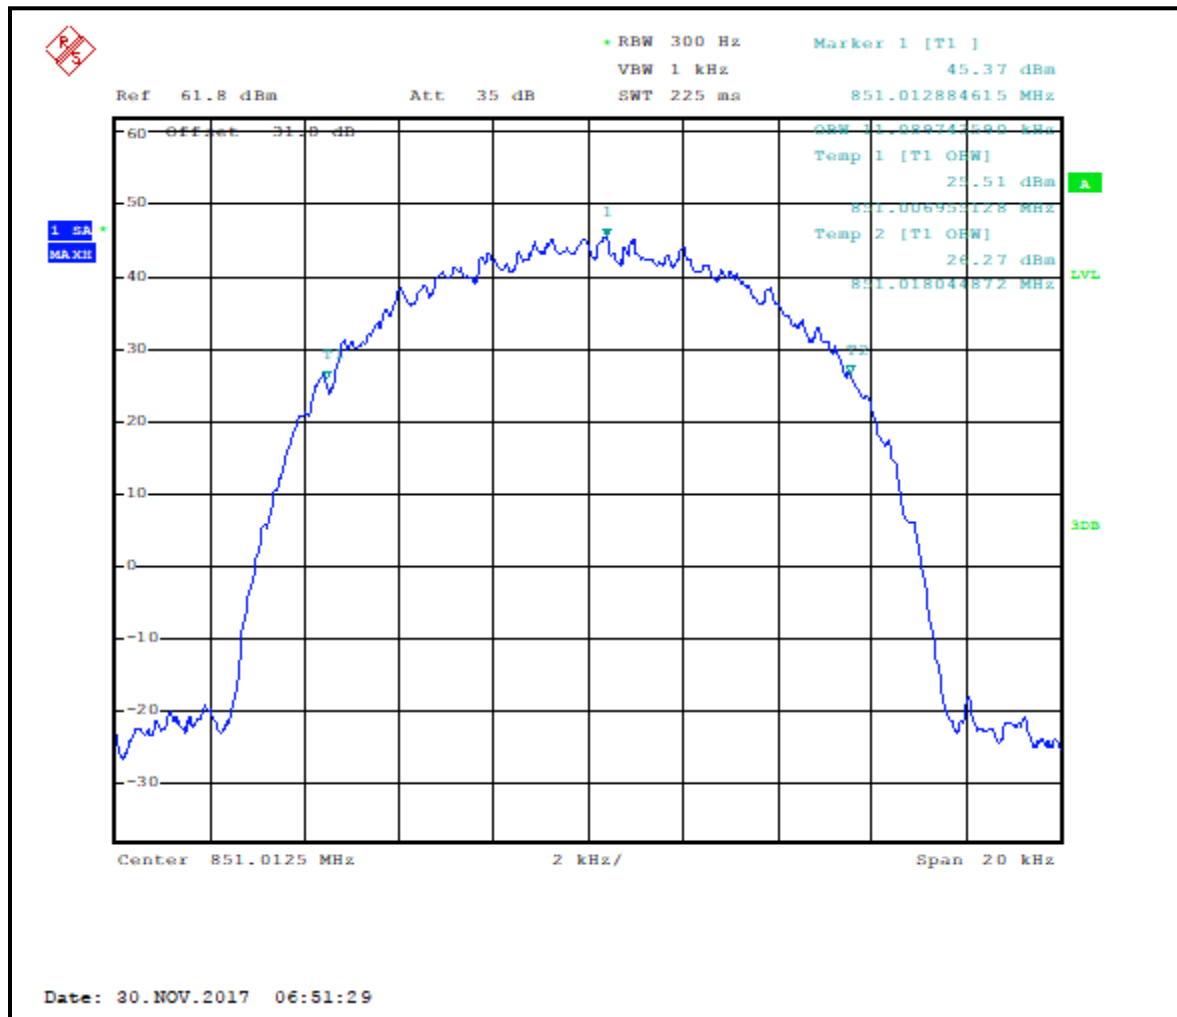


Plot 7-39: Occupied Bandwidth – 851.0125 MHz; HDQPSK; 20 dB BW

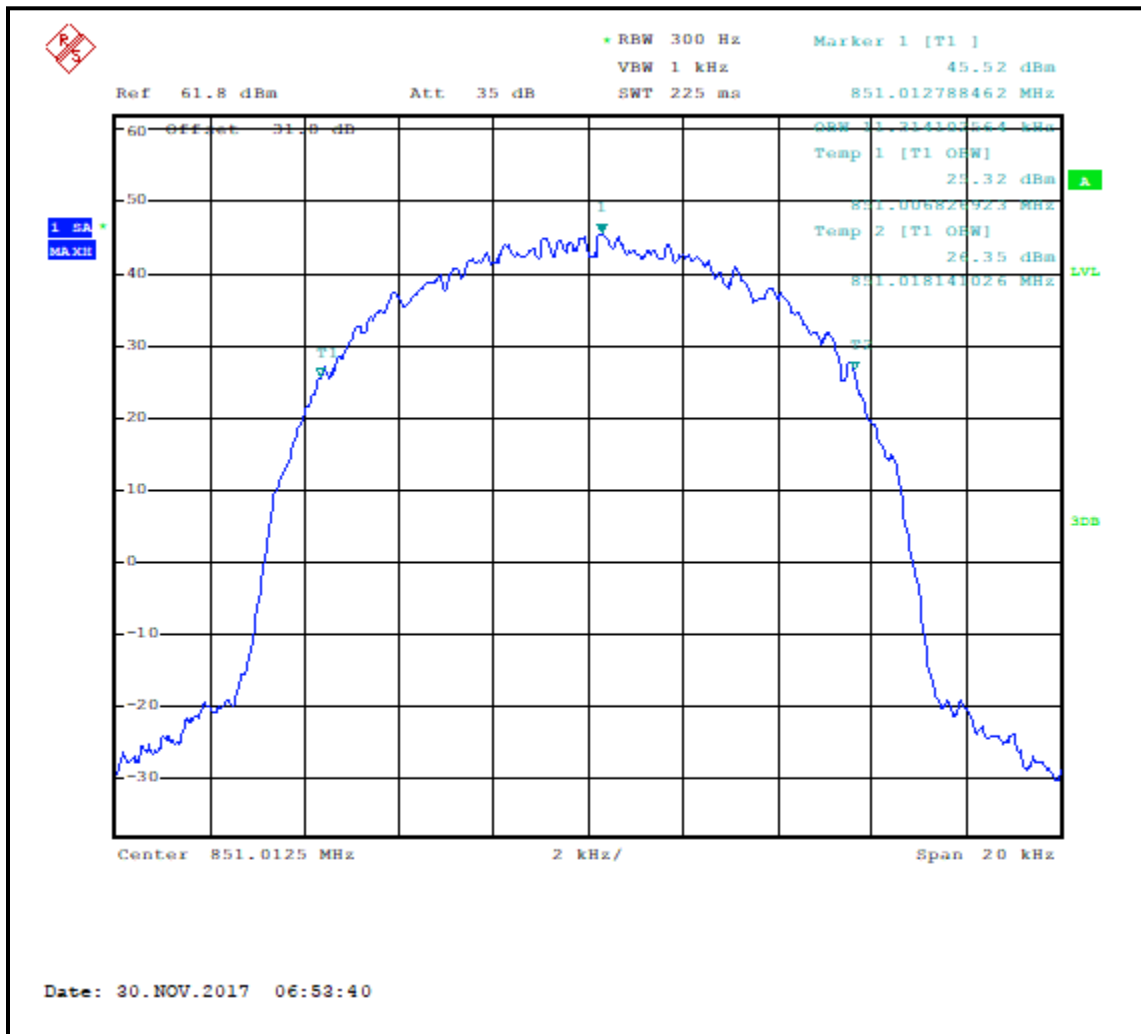


Plot 7-40: Occupied Bandwidth – 860.0125 MHz; C4FM; 20 dB BW

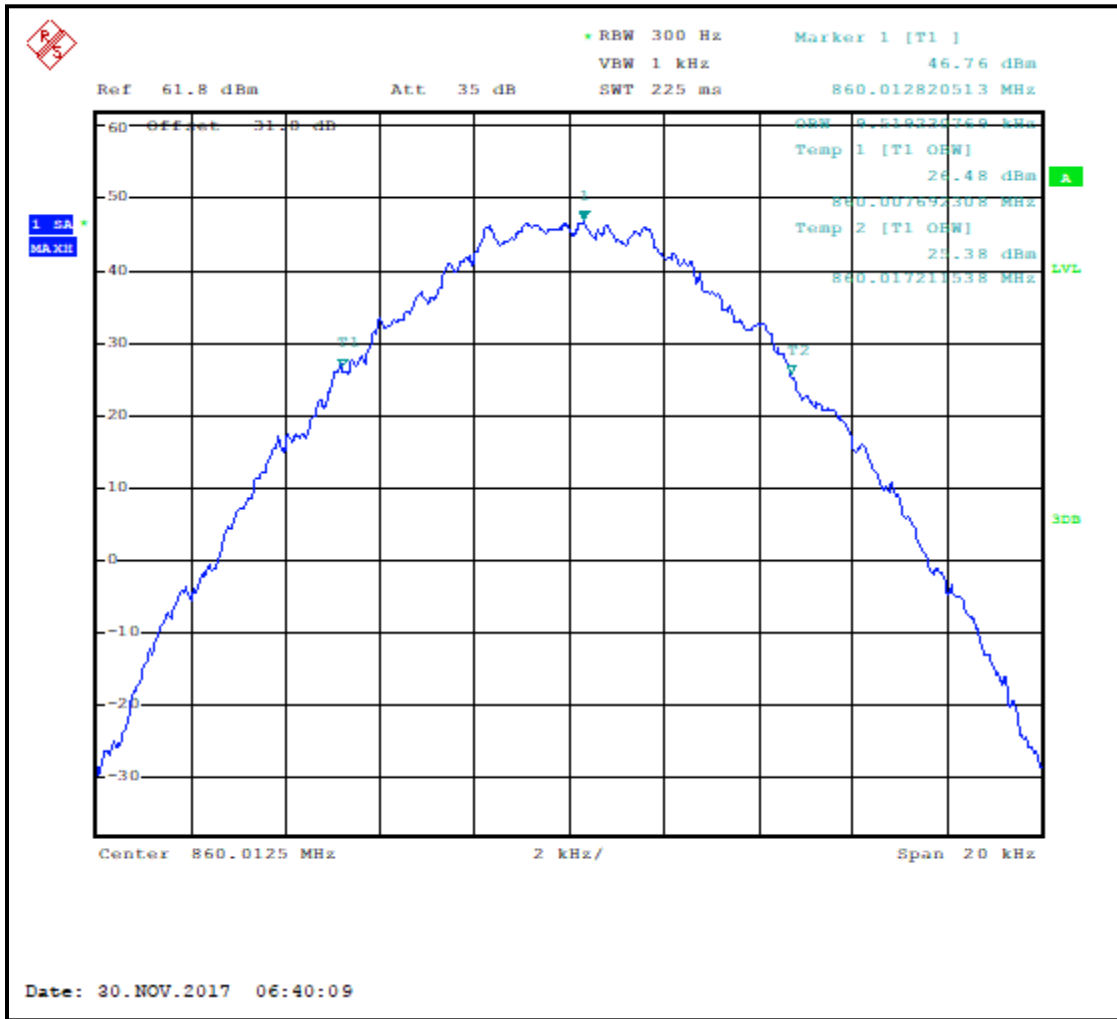


Plot 7-41: Occupied Bandwidth – 860. 0125 MHz; WCQPSK; 20 dB BW

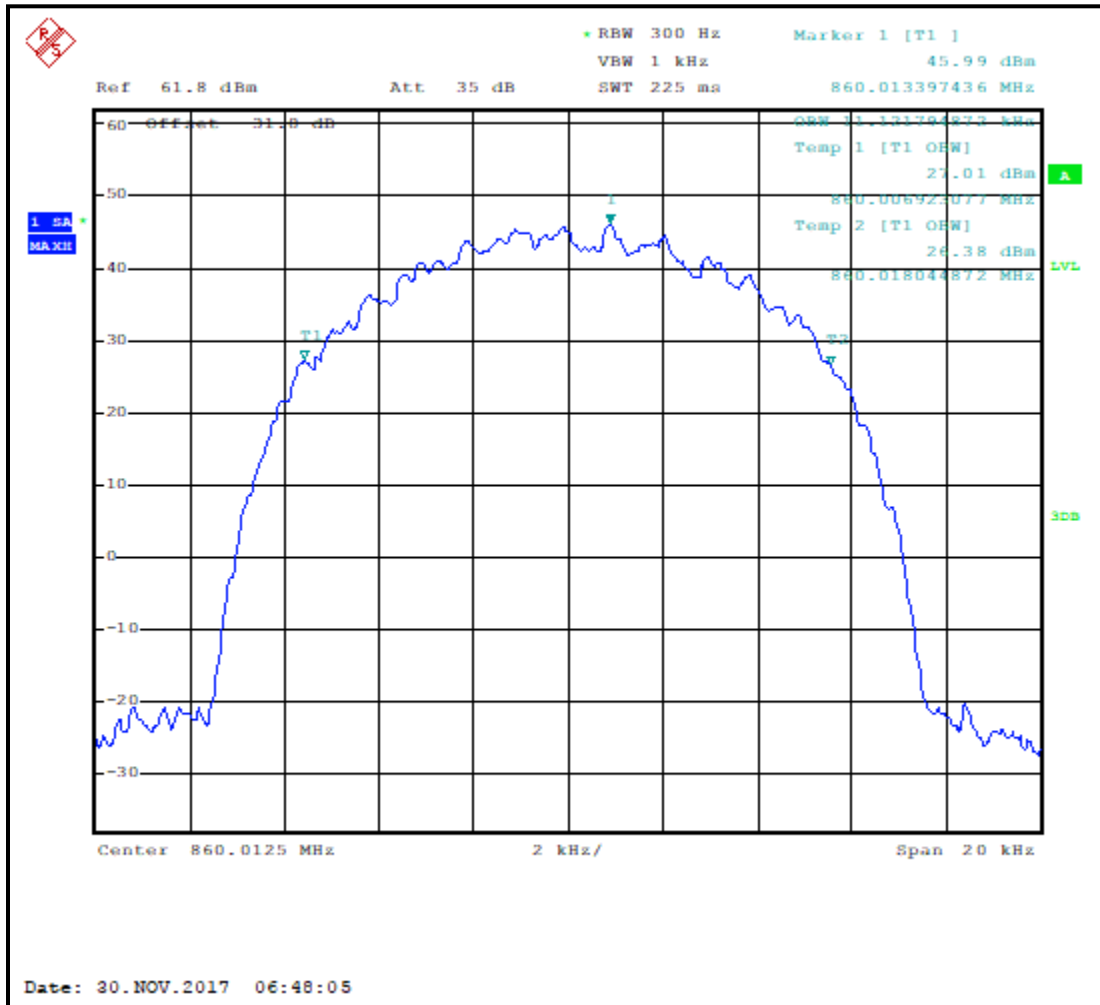


Plot 7-42: Occupied Bandwidth – 860. 0125 MHz; HDQPSK; 20 dB BW

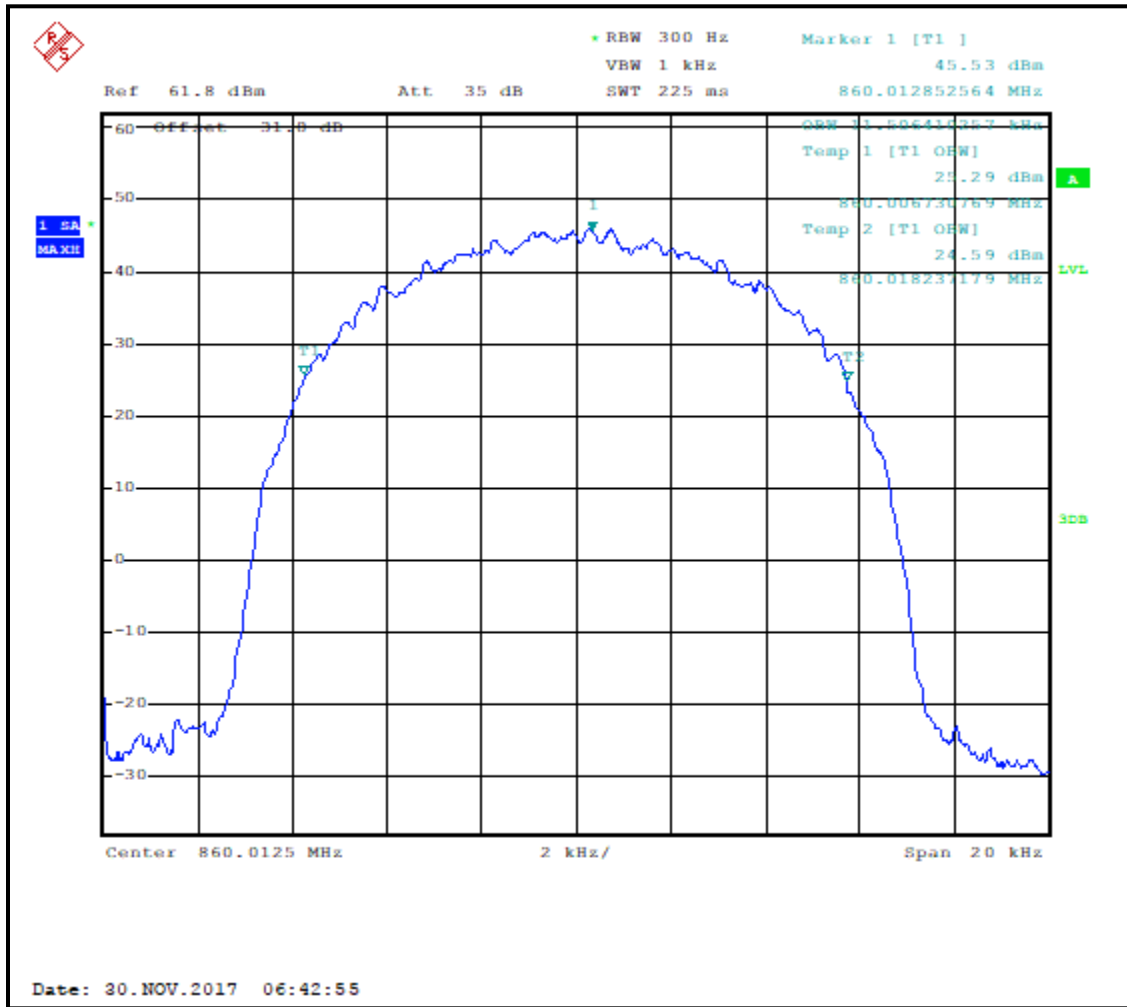


Plot 7-43: Occupied Bandwidth – 865.3375 MHz; C4FM; 20 dB BW

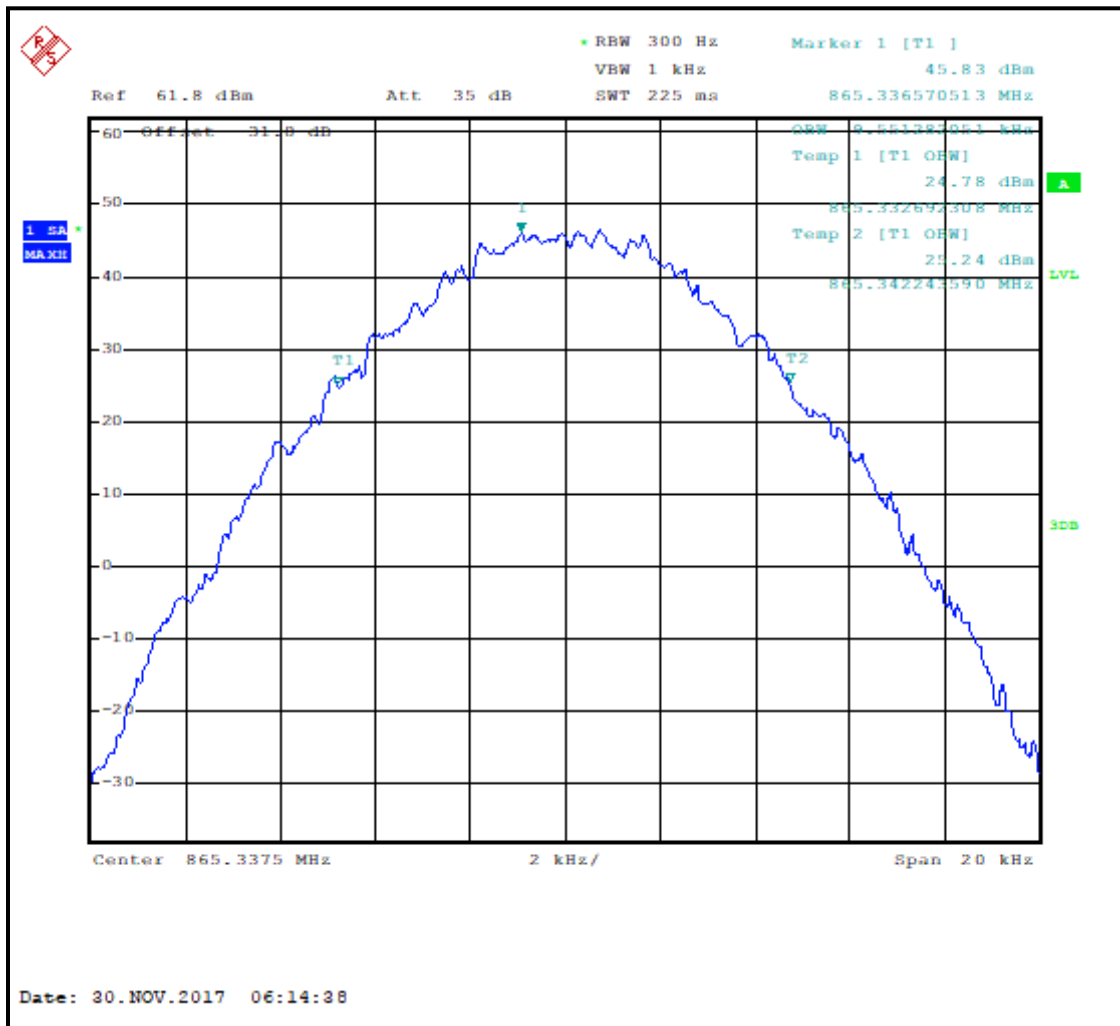


Plot 7-44: Occupied Bandwidth – 865.3375 MHz; WCQPSK; 20 dB BW

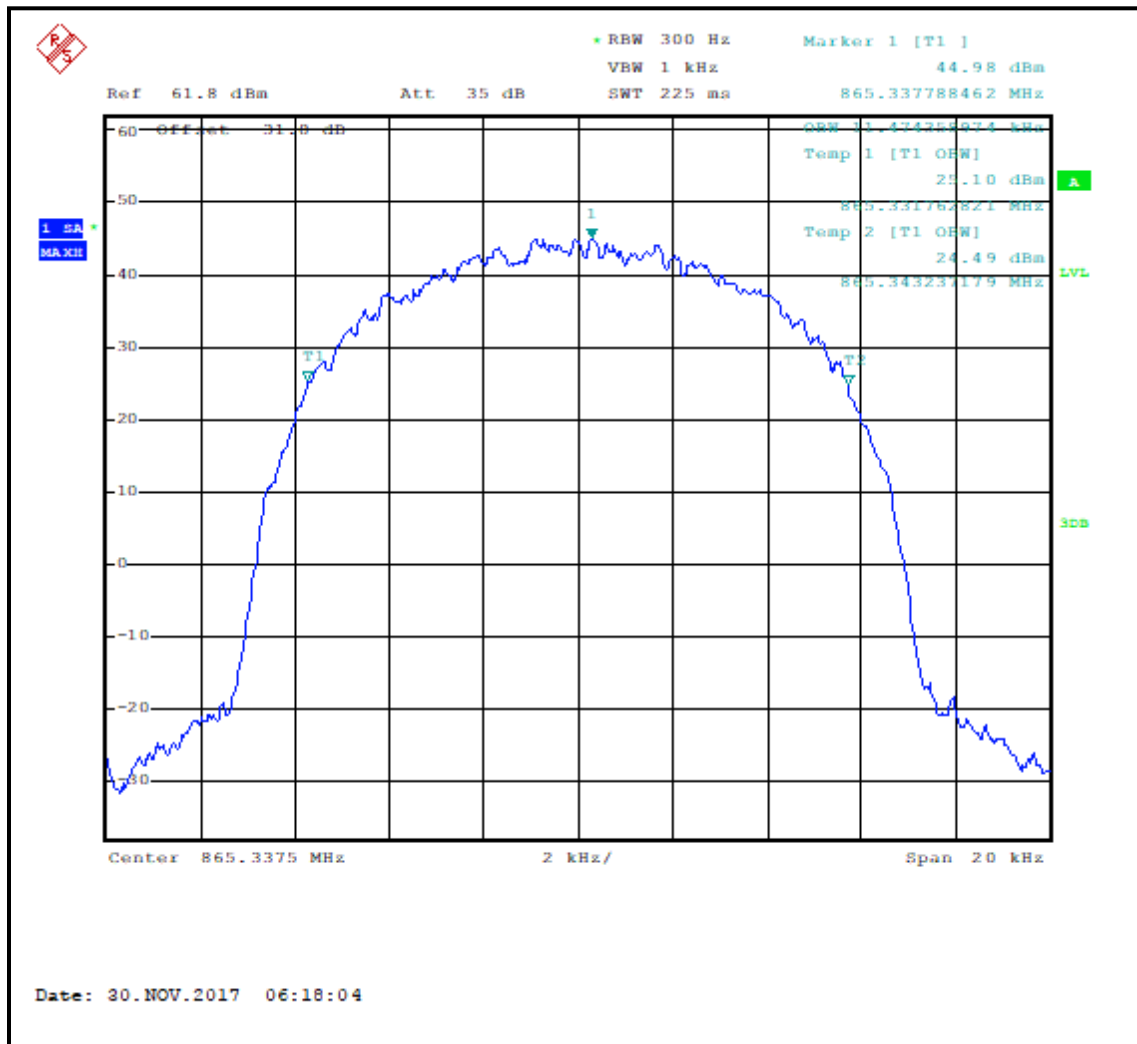


Plot 7-45: Occupied Bandwidth – 865.3375 MHz; HDQPSK; 20 dB BW

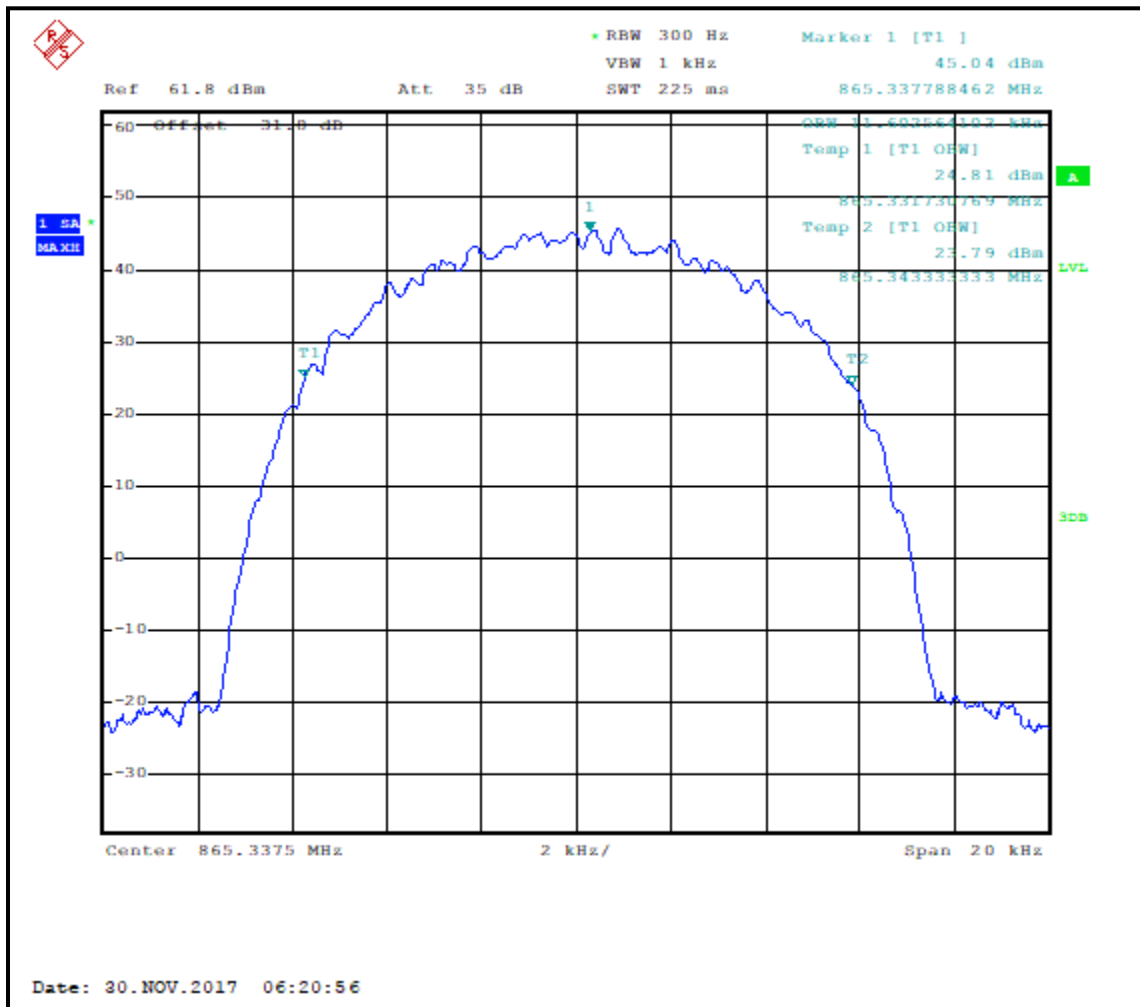


Plot 7-46: Occupied Bandwidth – 868.9875 MHz; C4FM; 20 dB BW

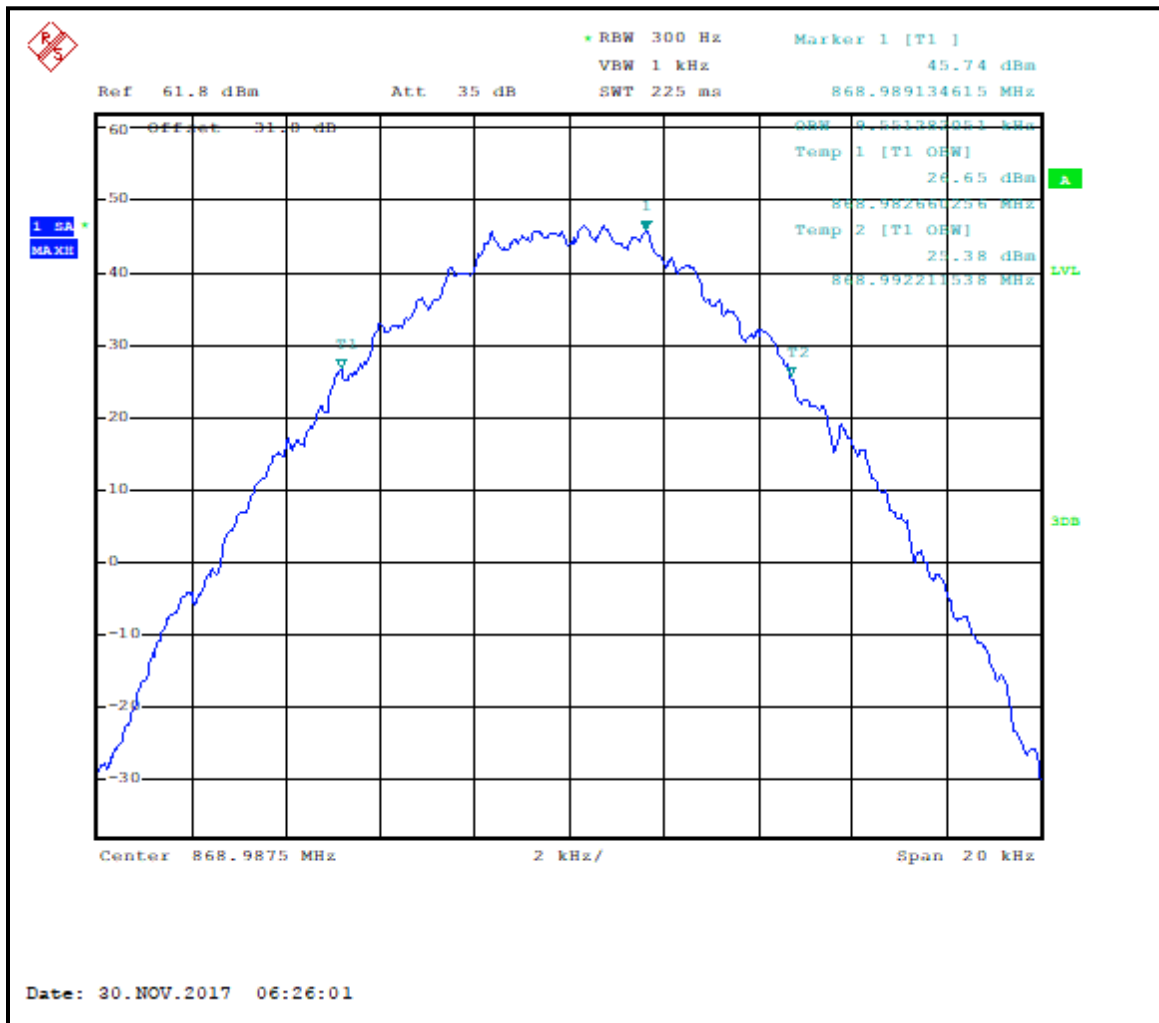

Plot 7-47: Occupied Bandwidth – 868.9875 MHz; WCQPSK; 20 dB BW

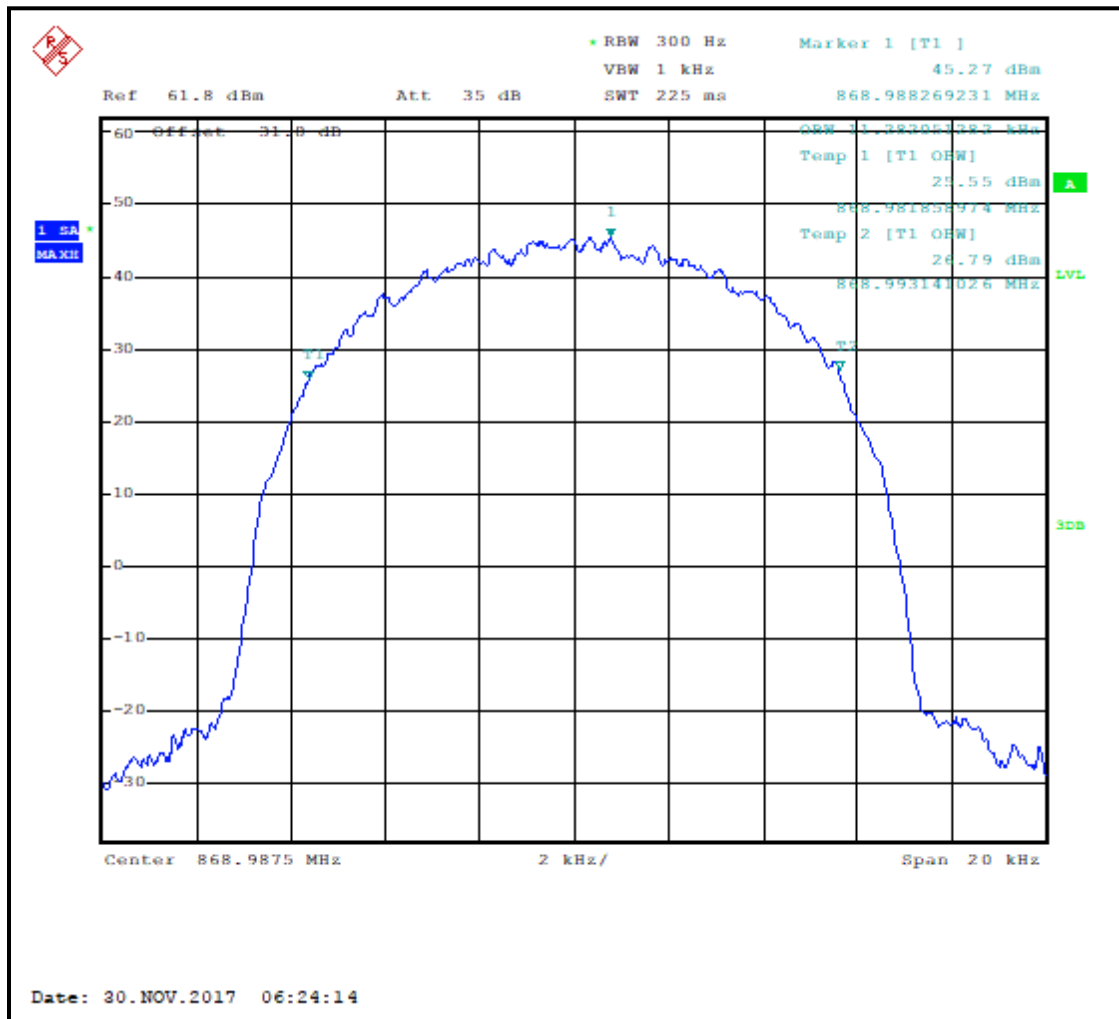

Plot 7-48: Occupied Bandwidth – 868.9875 MHz; HDQPSK; 20 dB BW

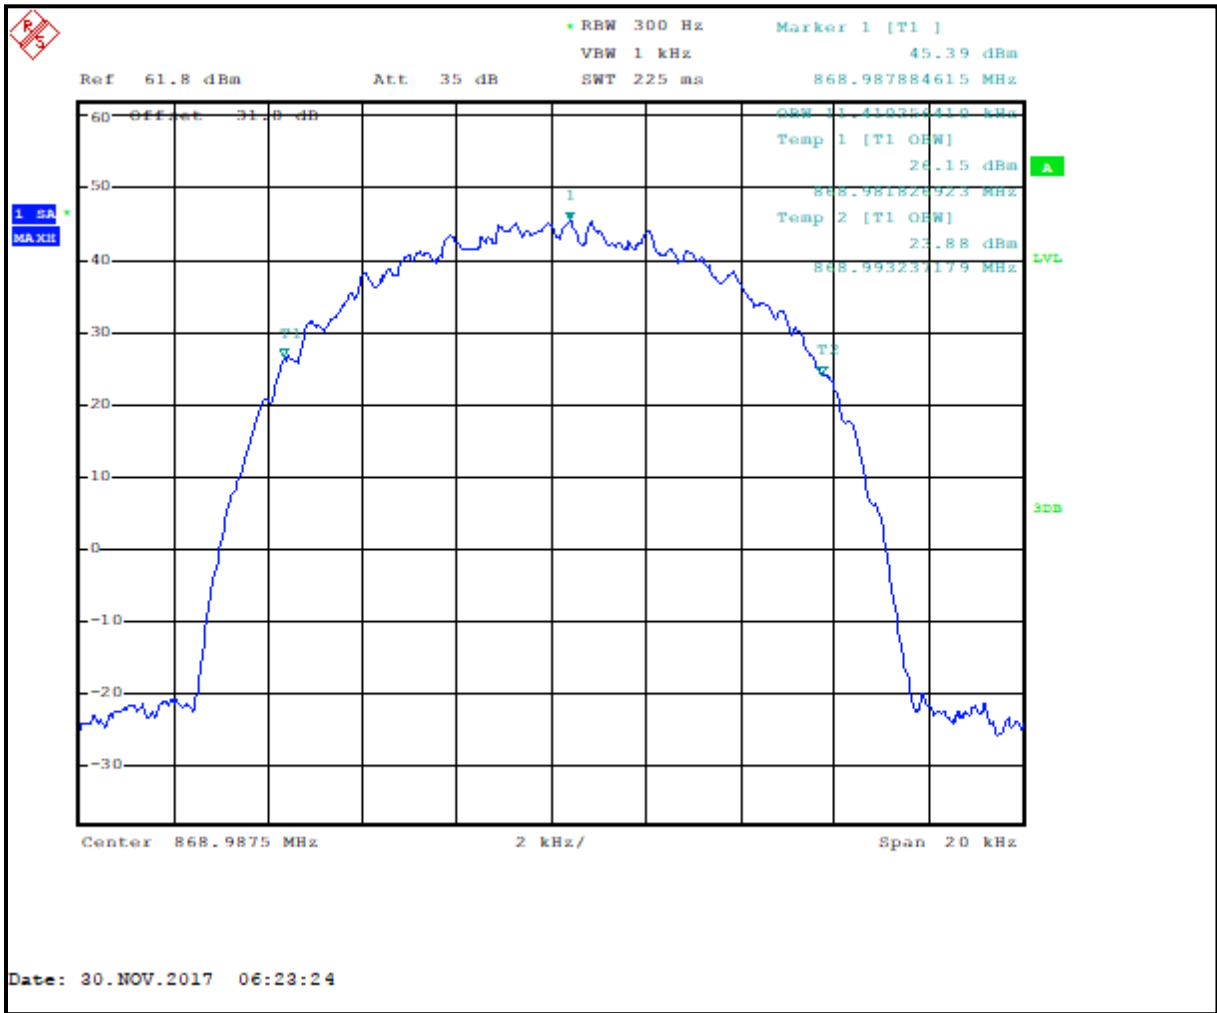

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ± 0.5 Hz

Table 7-1: Test Equipment Used For Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
901291	Pasternack	PE7031-20	300W Attenuator, DC - 1 GHz, 20 dB	NA	8/24/18
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	9/1/18
901235	IW Microwave Products	KPS-1503-360-KPS	High Frequency RF Cables	36"	8/21/18

Test Personnel:

Daniel W. Baltzell EMC Test Engineer	 Signature	November 28-30, 2017 Dates of Test
---	--	---------------------------------------

8 FCC Part 2.1055: Frequency Stability; Part 90.213: Frequency Stability; RSS-119 5.3 and RSS-Gen 6.11: Transmitter Frequency Stability

8.1 Test Procedure

ANSI 63.26, section 5.6.

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +55°C.

The temperature was initially set to -30°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the supply voltage to the EUT was varied +/-15% nominal input voltage.

Part 90.213: Base stations within 851-869 MHz – 0.1 ppm

Part 90.213 Frequency Stability

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

MINIMUM FREQUENCY STABILITY [Parts per million (ppm)]			
Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25–50	20	20	50
72–76	5	50
150–174	^{5,11} 5	⁶ 5	^{4,6} 50
216–220	1.0	1.0
220–222 ¹²	0.1	1.5	1.5
421–512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806–809	¹⁴ 1.0	1.5	1.5
809–824	¹⁴ 1.5	2.5	2.5
851–854	1.0	1.5	1.5
854–869	1.5	2.5	2.5
896–901	¹⁴ 0.1	1.5	1.5
902–928	2.5	2.5	2.5
902–928 ¹³	2.5	2.5	2.5
929–930	1.5
935–940	0.1	1.5	1.5
1427–1435	⁹ 300	300	300
Above 2450 ¹⁰

8.2 Test Data

8.2.1 Temperature Frequency Stability

Table 8-1: Temperature Frequency Stability – 851.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	851.012509	0.01
-20	851.012521	0.02
-10	851.012504	0.00
0	851.012516	0.02
10	851.012505	0.01
20 (reference)	851.012500	0.00
30	851.012497	0.00
40	851.012487	-0.02
50	851.012481	-0.02
60	851.012465	-0.04

Table 8-2: Temperature Frequency Stability – 865.3375 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	865.337511	0.01
-20	865.337524	0.03
-10	865.337507	0.01
0	865.337518	0.02
10	865.337508	0.01
20 (reference)	865.337500	0.00
30	865.337498	0.00
40	865.337489	-0.01
50	865.337481	-0.02
60	865.337467	-0.04

8.2.2 Frequency Stability/Voltage Variation

Table 8-3: Frequency Stability/Voltage Variation – 851.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
97.75	851.012501	0.00
115 (reference)	851.012500	0.00
132.25	851.012502	0.00

Table 8-4: Frequency Stability/Voltage Variation – 865.3375 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
97.75	865.337516	0.02
115 (reference)	865.337500	0.00
132.25	865.337500	0.00

Results: The EUT is compliant.

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 Hz

Table 8-5: Test Equipment Used For Testing Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901350	Meterman	33XR	Multimeter	040402802	4/26/19
901672	Rohde & Schwarz	FSEM30	Spectrum Analyzer	FSEM30	4/17/19
900946	Tenney Engineering, Inc	TH65	Temperature Chamber with Humidity	11380	3/26/18
901291	Pasternack	PE7031-20	300W Attenuator, DC - 1 GHz, 20 dB	NA	8/24/18
900948	Weinschel Corporation	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	9/1/18
901235	IW Microwave Products	KPS-1503-360-KPS	High Frequency RF Cables	36"	8/21/18
9015	IW Microwave Products	KPS-1503-360-KPS	High Frequency RF Cables	36"	8/18/18

Test Personnel:

Daniel W. Baltzell EMC Test Engineer	 Signature	November 27, 2017 Date of Test
---	---	-----------------------------------

9 FCC Part 2.202: Necessary Bandwidth and Emission Bandwidth

P25 Phase 1 (C4FM)

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = [9600/\log_2(4) + 2 (1800) (0.89)] = 8.0 \text{ kHz}$

Emission designator: 8K00F1D, 8K00F1E

P25 Linear Simulcast (WCQPSK)

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = [9600/\log_2(4) + 2 (1800) (1.362)] = 9.7 \text{ kHz}$

Emission designator: 9K70D1W

P25 Phase 2 (HDQPSK)

Calculation:

Data rate in bps (R) = 12000

Peak deviation of carrier (D) = 2250

$B_n = [12000/\log_2(4) + 2 (2250) (0.841)] = 9.8 \text{ kHz}$

Emission designator: 9K80D7W

10 Conclusion

The data in this measurement report shows that the Harris Corporation MASTR V 800 MHz Base Station, FCC ID: OWDTR-0158-E, IC: 3636B-0158, complies with the applicable requirements of FCC Parts 2 and 90 of the FCC Rules and Industry Canada RSS-119.