



Engineering Solutions & Electromagnetic Compatibility Services

**Certification Application Report
FCC Part 15.407 & ISED RSS-247**

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689 0368 360 Herndon Parkway www.rheintech.com Suite 1400 Herndon, VA 20170		Applicant: Harris Corporation 221 Jefferson Ridge Parkway Lynchburg, VA 24501 USA	
FCC ID/IC	OWDTR-0162-E/ 3636B-0162	Test Report Date	February 18, 2021
Platform	N/A	RTL Work Order #	2020127
Model Model #/HVIN	XL-95P XL-x5-7/8	RTL Quote Number	QRTL20-127A
American National Standard Institute	ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices		
FCC Classification	NII-Unlicensed National Information Infrastructure TX		
FCC Rule Part(s)	FCC Rules Part 15.407: Unlicensed National Information Infrastructure Devices - General Technical Requirements (10/01/19)		
ISED Standards	RSS-247 Issue 2: Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices RSS-Gen Issue 5 Amendment 1: General Requirements for Compliance of Radio Apparatus		
Digital Interface Information	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power (W) Conducted	Frequency Tolerance	Emission Designator
5180 – 5240	0.015	N/A	20M1G7D
5745 – 5825	0.003	N/A	19M9G7D

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, ANSI C63.10, and ISED RSS-247 and RSS-Gen.

Signature: 

Date: February 18, 2021

Typed/Printed Name: Desmond A. Fraser

Position: President

*These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB.
Refer to certificate and scope of accreditation AT-1445.
This report replaces R1.2.*

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. The test results relate only to the item(s) tested.

Table of Contents

1	General Information.....	5
1.1	Scope	5
1.2	Description of EUT	5
1.3	Test Facility.....	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Modifications	5
2	Test Information	6
2.1	Description of Test Modes	6
2.2	Exercising the EUT.....	6
2.3	Test Result Summary.....	6
2.4	Tested System Details.....	7
2.5	Configuration of Tested System.....	7
3	Peak Output Power – FCC 15.407(a)(1) & (a)(3); RSS-247 6.2, RSS-Gen 6.12	8
3.1	Power Output Test Procedure	8
3.2	Power Output Test Results.....	8
4	Compliance with the Band Edge – FCC 15.407(b)(7); RSS-247 6.2	9
4.1	Band Edge Test Procedure	9
4.2	Restricted Band Edge Test Results	9
4.1	Band Edge Plots	10
5	Antenna Conducted Spurious Emissions – FCC 15.407(b)(6); RSS-247 6.2	18
5.1	Antenna Conducted Spurious Emissions Test Procedures.....	18
5.2	Antenna Conducted Spurious Emissions Test Results.....	18
6	Bandwidths – FCC 15.407(a) and (e); RSS-247 6.2; RSS-Gen 6.7	19
6.1	Bandwidth Test Procedure	19
6.2	Modulated Bandwidth Test Results.....	19
6.3	Bandwidth Plots – U-NII1.....	20
6.4	Bandwidth Plots – U-NII3.....	23
7	Power Spectral Density – FCC 15.407(a)(1) & (a)(3); RSS-247 6.2.....	26
7.1	Power Spectral Density Test Procedure.....	26
7.2	Power Spectral Density Test Results.....	26
7.3	Power Spectral Density Plots – U-NII1.....	27
7.4	Power Spectral Density Plots – U-NII3.....	30
8	Frequency Stability – FCC 15.407(g); RSS-Gen 6.11.....	33
8.1	Frequency Stability Test Procedure	33
8.2	Frequency Stability Test Result	33
9	AC Conducted Emissions – FCC 15.207; RSS-Gen 8.8.....	35
9.1	Conducted Emissions Test Procedure	35
9.2	Conducted Emissions Limits.....	35
9.3	Conducted Emissions Test Results	36
10	Radiated Emissions – FCC 15.209; RSS-247 6.2; RSS-Gen 6.13/7.1	48
10.1	Limits of Radiated Emissions Measurement.....	48
10.2	Radiated Emissions Measurement Test Procedure.....	48
10.3	Radiated Emissions Test Results	49
11	Conclusion	52

Figure Index

Figure 2-1: Configuration of System Under Test7

Table Index

Table 2-1: Channels Tested for Wi-Fi 802.11a.....6
 Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.407); RSS-247, RSS-Gen6
 Table 2-3: Equipment Under Test (EUT).....7
 Table 2-4: Support Equipment.....7
 Table 2-5: Auxiliary Equipment.....7
 Table 3-1: Power Output Test Equipment.....8
 Table 3-2: Power Output Test Data – U-NII1 – 802.11a (9.0 Mbps).....8
 Table 3-3: Power Output Test Data – U-NII3 – 802.11a (48.0 Mbps).....8
 Table 4-1: Band Edge Test Equipment.....9
 Table 5-1: Antenna Conducted Spurious Emissions Test Equipment18
 Table 6-1: Bandwidth Test Equipment.....19
 Table 6-2: Modulated Bandwidth Test Data – U-NII1 – 802.11a (9.0 Mbps)19
 Table 6-3: Modulated Bandwidth Test Data – U-NII3 – 802.11a (9.0 Mbps)19
 Table 7-1: Power Spectral Density Test Equipment26
 Table 7-2: Power Spectral Density Test Data – U-NII1 – 802.11a (9.0 Mbps), FCC.....26
 Table 7-3: Power Spectral Density Test Data – U-NII1 – 802.11a (9.0 Mbps), ISED.....26
 Table 7-4: Power Spectral Density Test Data – U-NII3 – 802.11a (48.0 Mbps).....26
 Table 8-1: Frequency Stability Test Equipment.....33
 Table 8-2: Frequency Stability at Extreme Temperatures – U-NII133
 Table 8-3: Frequency Stability at Extreme Voltage Levels – U-NII1.....33
 Table 8-4: Frequency Stability at Extreme Temperatures – U-NII3.....33
 Table 8-5: Frequency Stability at Extreme Voltage Levels – U-NII3.....33
 Table 9-1: Conducted Emissions Limits per FCC Part 15.20735
 Table 9-2: Conducted Emissions Test Equipment.....35
 Table 9-3: Conducted Emissions Test Result, AC, Neutral, U-NII1, 5180 MHz.....36
 Table 9-4: Conducted Emissions Test Result, AC, Line, U-NII1, 5180 MHz.....37
 Table 9-5: Conducted Emissions Test Result, AC, Neutral, U-NII1, 5200 MHz.....38
 Table 9-6: Conducted Emissions Test Result, AC, Line, U-NII1, 5200 MHz.....39
 Table 9-7: Conducted Emissions Test Result, AC, Neutral, U-NII1, 5240 MHz.....40
 Table 9-8: Conducted Emissions Test Result, AC, Line, U-NII1, 5240 MHz.....41
 Table 9-9: Conducted Emissions Test Result, AC, Neutral, U-NII3, 5745 MHz.....42
 Table 9-10: Conducted Emissions Test Result, AC, Line, U-NII3, 5745 MHz.....43
 Table 9-11: Conducted Emissions Test Result, AC, Neutral, U-NII3, 5785 MHz.....44
 Table 9-12: Conducted Emissions Test Result, AC, Line, U-NII3, 5785 MHz.....45
 Table 9-13: Conducted Emissions Test Result, AC, Neutral, U-NII3, 5825 MHz.....46
 Table 9-14: Conducted Emissions Test Result, AC, Line, U-NII3, 5825 MHz.....47
 Table 10-1: Radiated Emissions Test Equipment.....49
 Table 10-2: Radiated Emissions Harmonics/Spurious – 5180 MHz, Restricted49
 Table 10-3: Radiated Emissions Harmonics/Spurious – 5180 MHz, Non-Restricted, Peak.....49
 Table 10-4: Radiated Emissions Harmonics/Spurious – 5200 MHz, Restricted50
 Table 10-5: Radiated Emissions Harmonics/Spurious – 5200 MHz, Non-Restricted, Peak.....50
 Table 10-6: Radiated Emissions Harmonics/Spurious – 5240 MHz, Restricted50
 Table 10-7: Radiated Emissions Harmonics/Spurious – 5240 MHz, Non-Restricted, Peak.....50
 Table 10-8: Radiated Emissions Harmonics/Spurious – 5745 MHz, Restricted51
 Table 10-9: Radiated Emissions Harmonics/Spurious – 5745 MHz, Non-Restricted, Peak.....51
 Table 10-10: Radiated Emissions Harmonics/Spurious – 5785 MHz, Restricted51
 Table 10-11: Radiated Emissions Harmonics/Spurious – 5785 MHz, Non-Restricted, Peak.....51

Table 10-12: Radiated Emissions Harmonics/Spurious – 5825 MHz, Restricted52
 Table 10-13: Radiated Emissions Harmonics/Spurious – 5825 MHz, Non-Restricted, Peak52
 Table 10-14: Unintentional Emissions Test Data.....52

Plot Index

Plot 4-1: Lower Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Average 10
 Plot 4-2: Lower Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Peak 11
 Plot 4-3: Upper Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Average 12
 Plot 4-4: Upper Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Peak 13
 Plot 4-5: Lower Band Edge – Average – U-NII3 – 802.11a (12.0 Mbps) 14
 Plot 4-6: Lower Band Edge – Peak – U-NII3 – 802.11a (12.0 Mbps) 15
 Plot 4-7: Upper Band Edge – Average – U-NII3 – 802.11a (12.0 Mbps) 16
 Plot 4-8: Upper Band Edge – Peak – U-NII3 – 802.11a (12.0 Mbps) 17
 Plot 6-1: 99% Bandwidth – 5180 MHz – 802.11a (9.0 Mbps) 20
 Plot 6-2: 99% Bandwidth – 5200 MHz – 802.11a (9.0 Mbps) 21
 Plot 6-3: 99% Bandwidth – 5240 MHz – 802.11a (9.0 Mbps) 22
 Plot 6-4: 6 dB and 99% Bandwidth – 5745 MHz – 802.11a (9.0 Mbps) 23
 Plot 6-5: 6 dB and 99% Bandwidth – 5785 MHz – 802.11a (9.0 Mbps) 24
 Plot 6-6: 6 dB and 99% Bandwidth – 5825 MHz – 802.11a (9.0 Mbps) 25
 Plot 7-1: Power Spectral Density – 5180 MHz – 802.11a (9.0 Mbps) 27
 Plot 7-2: Power Spectral Density – 5200 MHz – 802.11a (9.0 Mbps) 28
 Plot 7-3: Power Spectral Density – 5240 MHz – 802.11a (9.0 Mbps) 29
 Plot 7-4: Power Spectral Density – 5745 MHz – 802.11a (48.0 Mbps) 30
 Plot 7-5: Power Spectral Density – 5785 MHz – 802.11a (48.0 Mbps) 31
 Plot 7-6: Power Spectral Density – 5825 MHz – 802.11a (48.0 Mbps) 32
 Plot 9-1: Conducted Emissions, AC, Neutral, U-NII1, 5180 MHz 36
 Plot 9-2: Conducted Emissions, AC, Line, U-NII1, 5180 MHz 37
 Plot 9-3: Conducted Emissions, AC, Neutral, U-NII1, 5200 MHz 38
 Plot 9-4: Conducted Emissions, AC, Line, U-NII1, 5200 MHz 39
 Plot 9-5: Conducted Emissions, AC, Neutral, U-NII1, 5240 MHz 40
 Plot 9-6: Conducted Emissions, AC, Line, U-NII1, 5240 MHz 41
 Plot 9-7: Conducted Emissions, AC, Neutral, U-NII3, 5745 MHz 42
 Plot 9-8: Conducted Emissions, AC, Line, U-NII3, 5745 MHz 43
 Plot 9-9: Conducted Emissions, AC, Neutral, U-NII3, 5785 MHz 44
 Plot 9-10: Conducted Emissions, AC, Line, U-NII3, 5785 MHz 45
 Plot 9-11: Conducted Emissions, AC, Neutral, U-NII3, 5825 MHz 46
 Plot 9-12: Conducted Emissions, AC, Line, U-NII3, 5825 MHz 47

Appendix Index

Appendix A: Test Photographs 53

Photograph Index

Photograph 1: Conducted Emissions 53
 Photograph 2: Radiated Emissions Testing – Front View (Above 1 GHz) 54
 Photograph 3: Radiated Emissions Testing – Back View (Above 1 GHz) 55
 Photograph 4: Radiated Emissions Testing – Front View (Below 1 GHz) 56
 Photograph 5: Radiated Emissions Testing – Back View (Below 1 GHz) 57

1 General Information

1.1 Scope

Applicable Standards

- FCC Rules Part 15.407: Unlicensed National Information Infrastructure Devices - General Technical Requirements
- ISED RSS-247: Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
- ISED RSS-Gen Issue 5 Amendment 1: General Requirements for Compliance of Radio Apparatus

1.2 Description of EUT

Equipment Under Test	Portable Radio
Model / Model #	XL-95P 7/800 MHz Portable Land Mobile Radio
Power Supply	7.4 VDC
Modulation Type	OFDM (802.11a)
Frequency Range	5180 – 5240 MHz, 5745 – 5825 MHz

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170.

1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Harris Corporation Model XL-95P 7/800 MHz Portable Land Mobile Radio, Model #/HVIN: XL-x5-7/8, FCC ID: OWDTR-0162-E, IC: 3636B-0162.

1.5 Modifications

No modifications were required for compliance.

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested.

Table 2-1: Channels Tested for Wi-Fi 802.11a

Channel (#)	Frequency (MHz)
36 (U-NII1)	5180
40 (U-NII1)	5200
48 (U-NII1)	5240
149 (U-NII3)	5745
157 (U-NII3)	5785
165 (U-NII3)	5825

2.2 Exercising the EUT

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted; all modes were investigated and the worst-case mode was used for final testing (48.0 Mbps for U-NII1 and 12.0 Mbps for U-NII3). There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 Test Result Summary

Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.407); RSS-247, RSS-Gen

FCC	ISED	Test	Result
FCC 15.207	RSS-Gen 8.8	AC Conducted Emissions	Pass
FCC 15.209	RSS-247 6.2; RSS-Gen 6.13	Radiated Emissions	Pass
FCC 15.407(a/1/3)	RSS-247 6.2; RSS-Gen 6.12	Maximum Peak Power Output	Pass
FCC 15.407(a/1/3)	RSS-247 6.2	Power Spectral Density	Pass
FCC 15.407(g)	RSS-Gen 6.11	Frequency Stability	N/A
FCC 15.407(b)(7)	RSS-247 6.2	Band Edge Measurement	Pass
FCC 15.407(b)(6)	RSS-247 6.2	Antenna Conducted Spurious Emissions	Pass
FCC 15.407(a) and (e)	RSS-247 6.2	26 dB and 6dB Bandwidth	Pass
N/A	RSS-Gen 6.7/ TRC-43	99% Bandwidth	Pass

2.4 Tested System Details

The test samples were received on December 10, 2020. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following tables.

Table 2-3: Equipment Under Test (EUT)

Part	Manufacturer	Model/ HVIN	Serial Number	FCC ID	RTL Bar Code
Handheld Radio (Conducted)	Harris Corporation	XL-95P 7/800 MHz	A40198E2A016	OWDTR-0162-E	23756
Handheld Radio (Radiated)	Harris Corporation	XL-95P 7/800 MHz	A40198E2A015	OWDTR-0162-E	23758

Table 2-4: Support Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Laptop	ASUS	N550J	F2N0CY33003067G	N/A	N/A

Table 2-5: Auxiliary Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Handheld Mic	Harris Corporation	N/A	01HE3327	N/A	23762

2.5 Configuration of Tested System

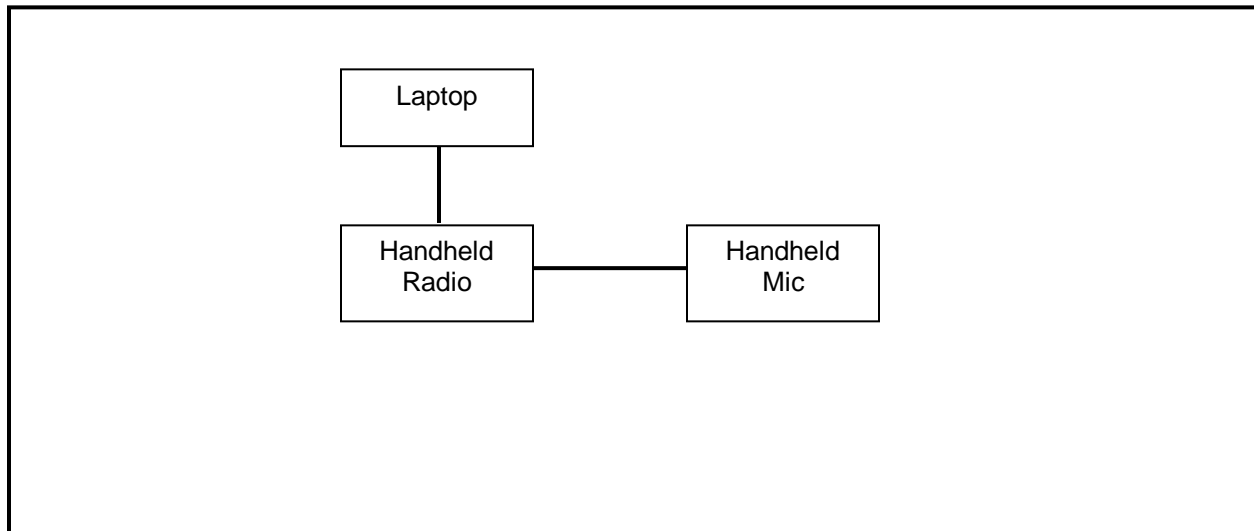


Figure 2-1: Configuration of System Under Test

3 Peak Output Power – FCC 15.407(a)(1) & (a)(3); RSS-247 6.2, RSS-Gen 6.12

3.1 Power Output Test Procedure

Measurements were obtained radiated at 3 meters with the radiated unit. The corrected dBµV/m level was then corrected back to conducted dBm with the following equation below.

Conversion of dBm to dBµV/m at 3 m:

$$\text{dB}\mu\text{V}/\text{m} = \text{dBm} + 104.7 - (20 * \text{LOG}(3\text{m})) = \text{dBm} + 95.2, \text{ or } \text{dBm} = \text{dB}\mu\text{V}/\text{m} - 95.2$$

For U-NII1, the FCC limit is 250 mW, and the RSS 247 limit is 200 mW or $10 + 10 * \text{LOG}(\text{OBW } 99\%)$. The most stringent limit shall be used.

$$10 + 10 * \text{LOG}(19.042 \text{ MHz}) = 22.8 \text{ dBm}$$

Highest conducted average power measured: 11.8 dBm = 15.1 mW for U-NII1

$P(\text{Watts}) = 10^{(\text{dBm} / 10)} / 1000$ 5.0 dBm = 3.2 mW for U-NII3

Table 3-1: Power Output Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	03/18/2021

3.2 Power Output Test Results

Table 3-2: Power Output Test Data – U-NII1 – 802.11a (9.0 Mbps)

Channel (#)	Frequency (MHz)	Conducted Avg. Power (EIRP dBm)	Limit (dBm)	Margin (dB)
36	5180	11.0	22.8	-11.8
40	5200	11.8	22.8	-11.0
48	5240	11.3	22.8	-11.5

Table 3-3: Power Output Test Data – U-NII3 – 802.11a (48.0 Mbps)

Channel (#)	Frequency (MHz)	Conducted Avg. Power (dBm)	Limit (dBm)	Margin (dB)
149	5745	5.0	30.0	-25.0
157	5785	4.3	30.0	-25.7
165	5825	4.5	30.0	-25.5

Measurement uncertainty: ±0.5 dB. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor k=2.

Results: Pass

Test Personnel:

Khue Do Test Engineer	 Signature	January 22, 2021 Date of Test
--------------------------	--	----------------------------------

4 Compliance with the Band Edge – FCC 15.407(b)(7); RSS-247 6.2

4.1 Band Edge Test Procedure

The transmitter output was connected to its appropriate antenna. 1 MHz integrated peak (100 kHz RBW/ 300 kHz VBW) and 1 MHz integrated average (100 MHz RBW/300 kHz VBW) corrected measurements were taken within the restricted band to show compliance.

Table 4-1: Band Edge Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	03/18/2021

4.2 Restricted Band Edge Test Results

Conversion of dBm to dBµV/m at 3 m:


$$\text{dB}\mu\text{V}/\text{m} = \text{dBm} + 104.7 - (20 * \text{LOG}(3\text{m})) = \text{dBm} + 95.2$$

$$54.0 \text{ dB}\mu\text{V}/\text{m} - 95.2 = -41.2 \text{ dBm for AVG}$$


$$74.0 \text{ dB}\mu\text{V}/\text{m} - 95.2 = -21.2 \text{ dBm for PK}$$

4.1 Band Edge Plots


Plot 4-1: Lower Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Average

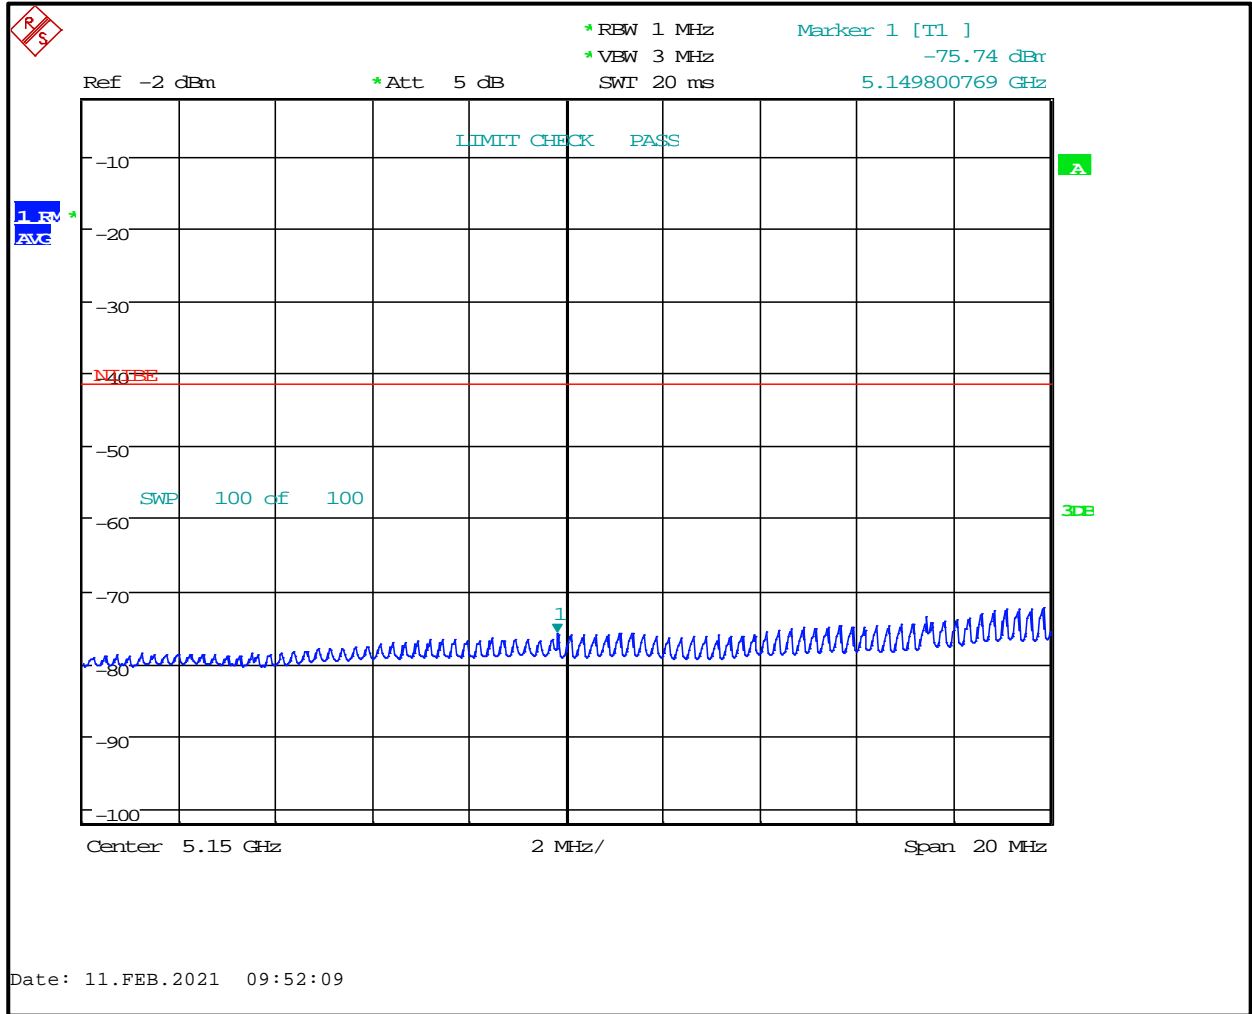


Plot 4-2: Lower Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Peak

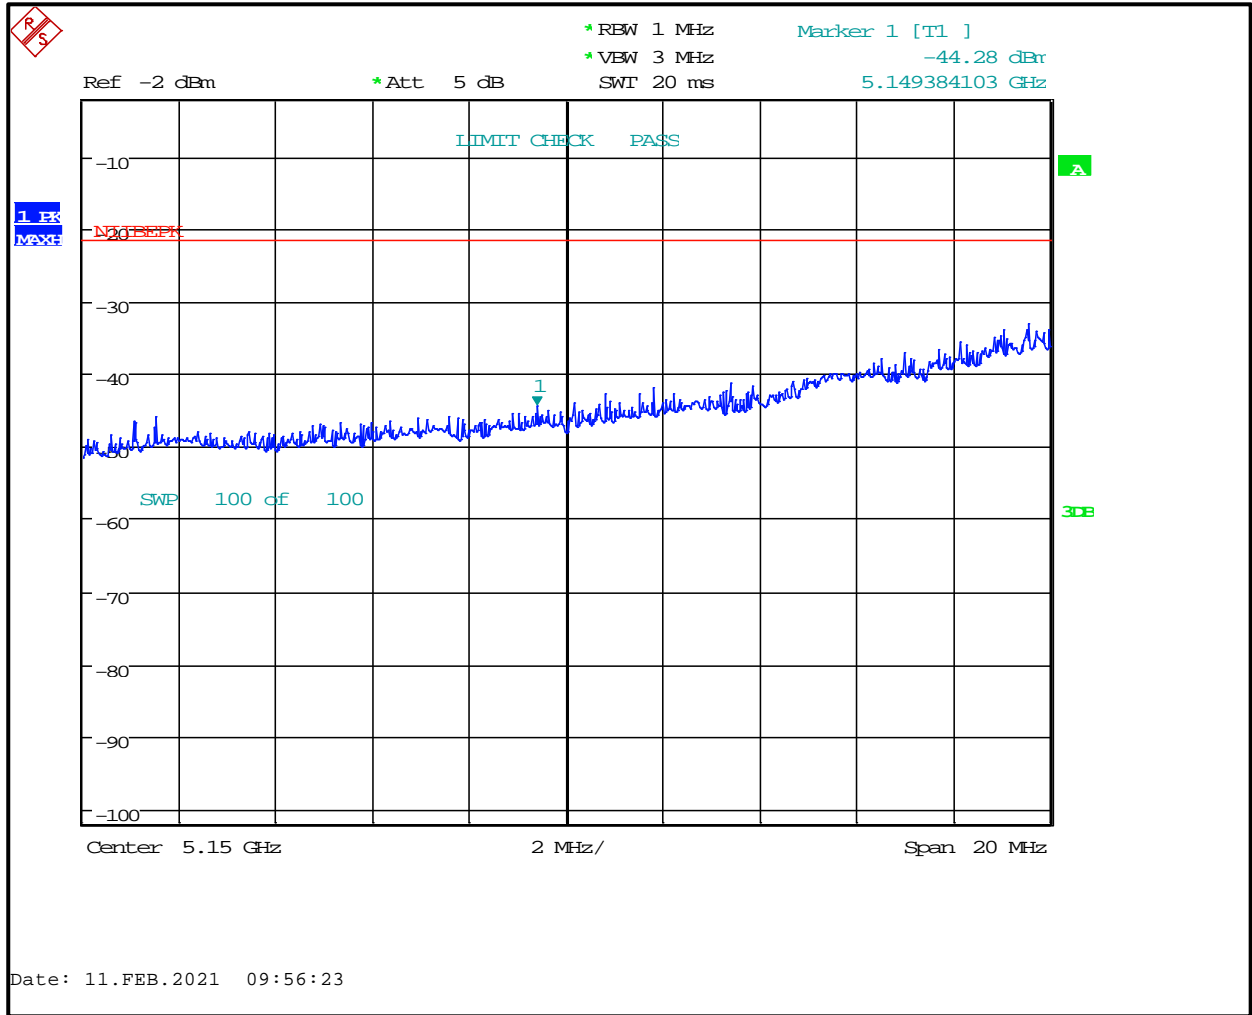


Plot 4-3: Upper Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Average

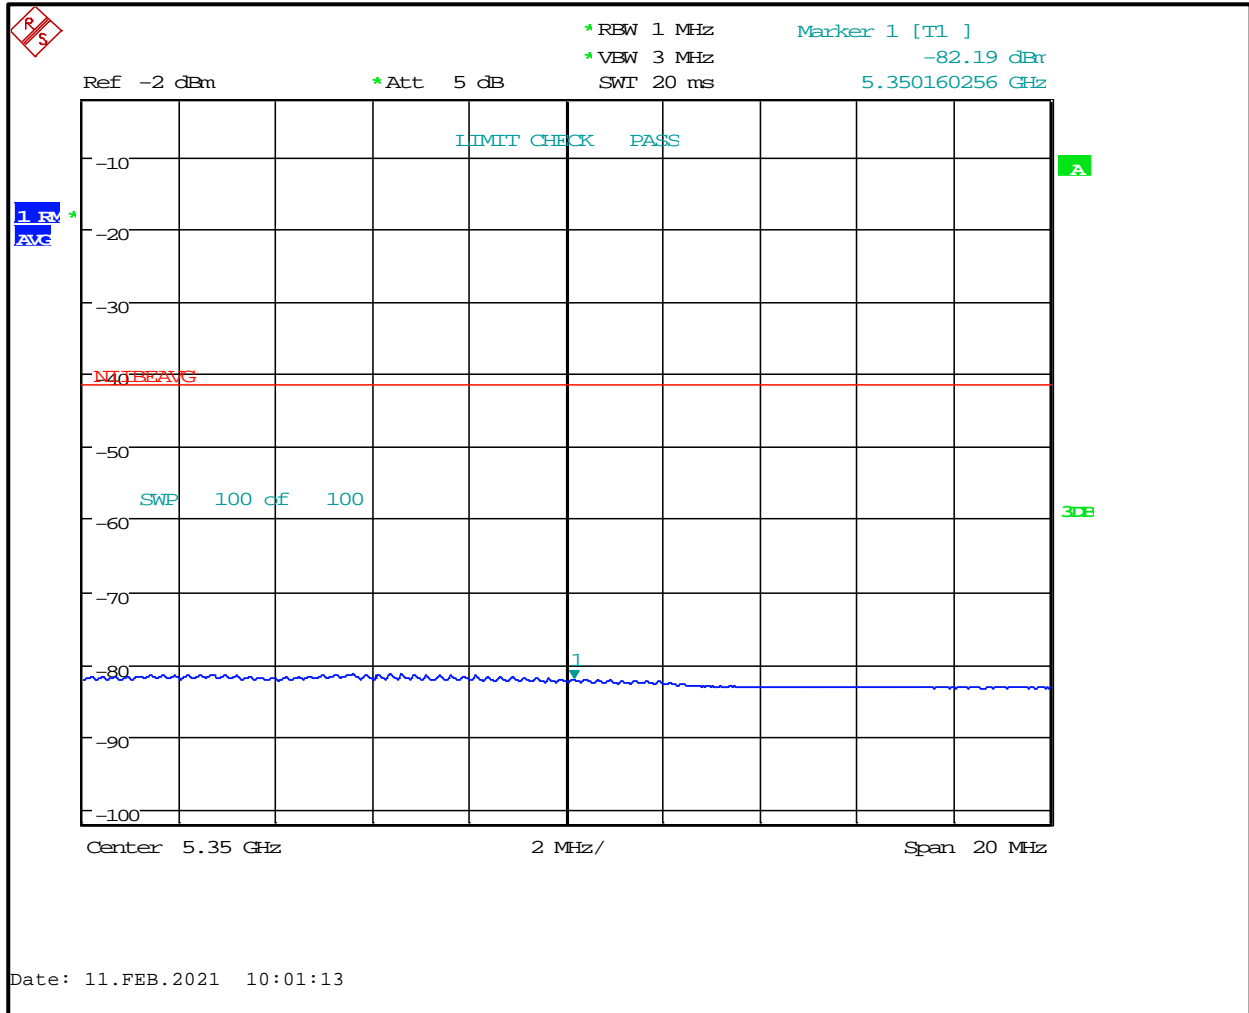


Plot 4-4: Upper Band Edge – U-NII1 – 802.11a (48.0 Mbps) – Peak

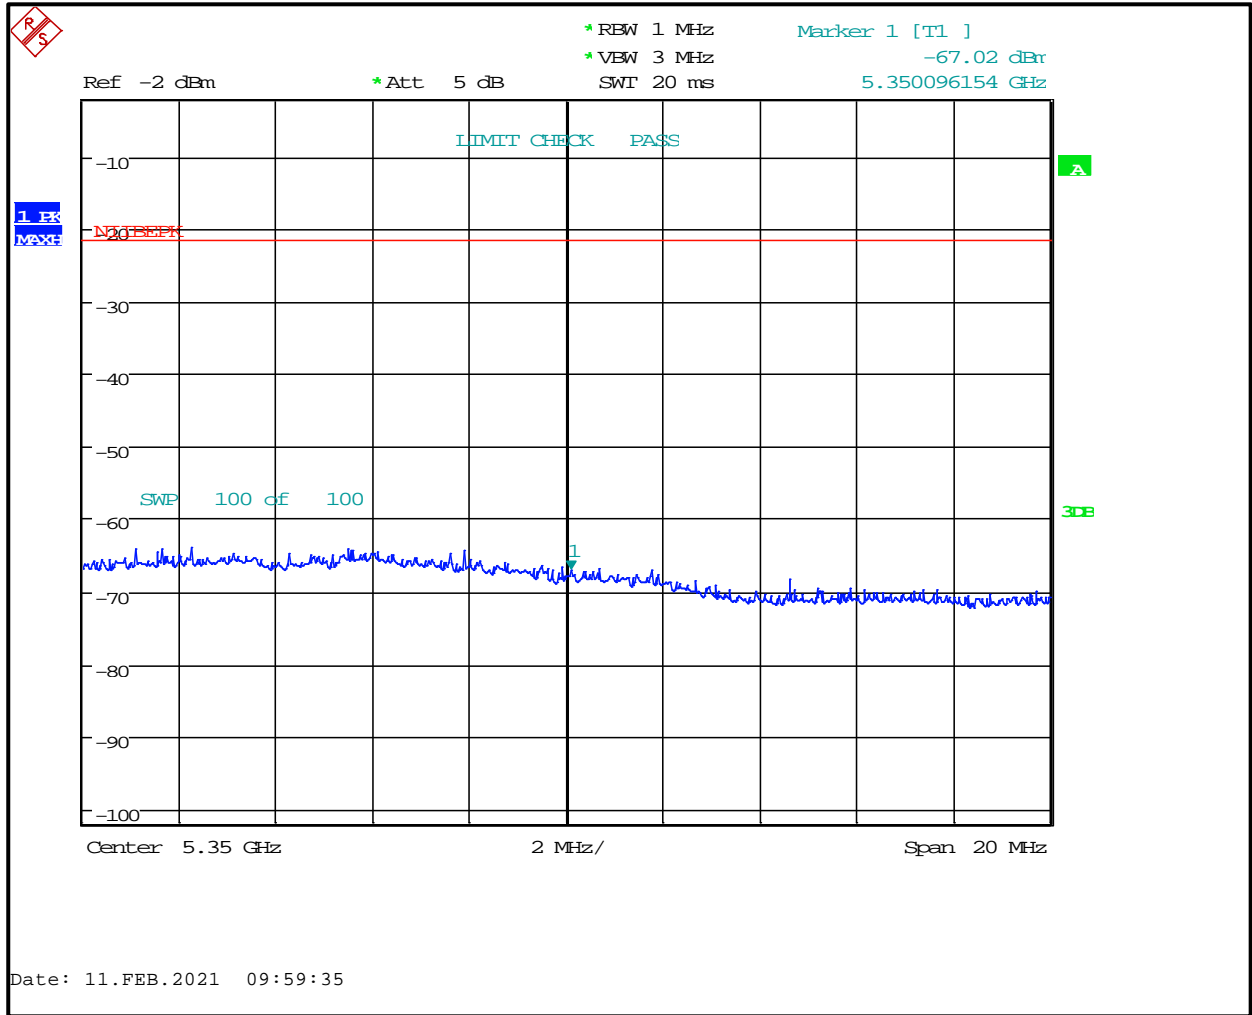


Plot 4-5: Lower Band Edge – Average – U-NII3 – 802.11a (12.0 Mbps)

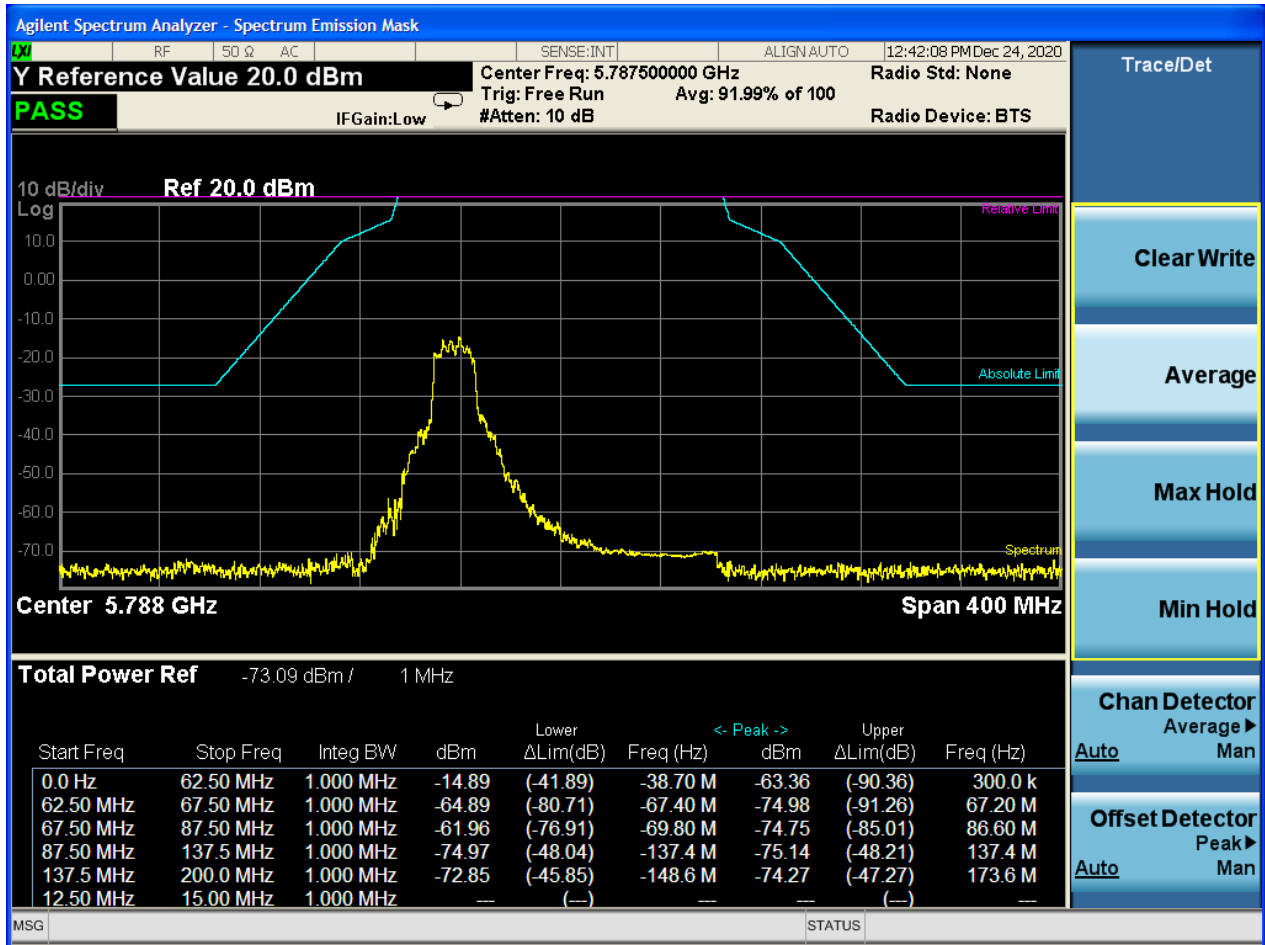


Plot 4-6: Lower Band Edge – Peak – U-NII3 – 802.11a (12.0 Mbps)

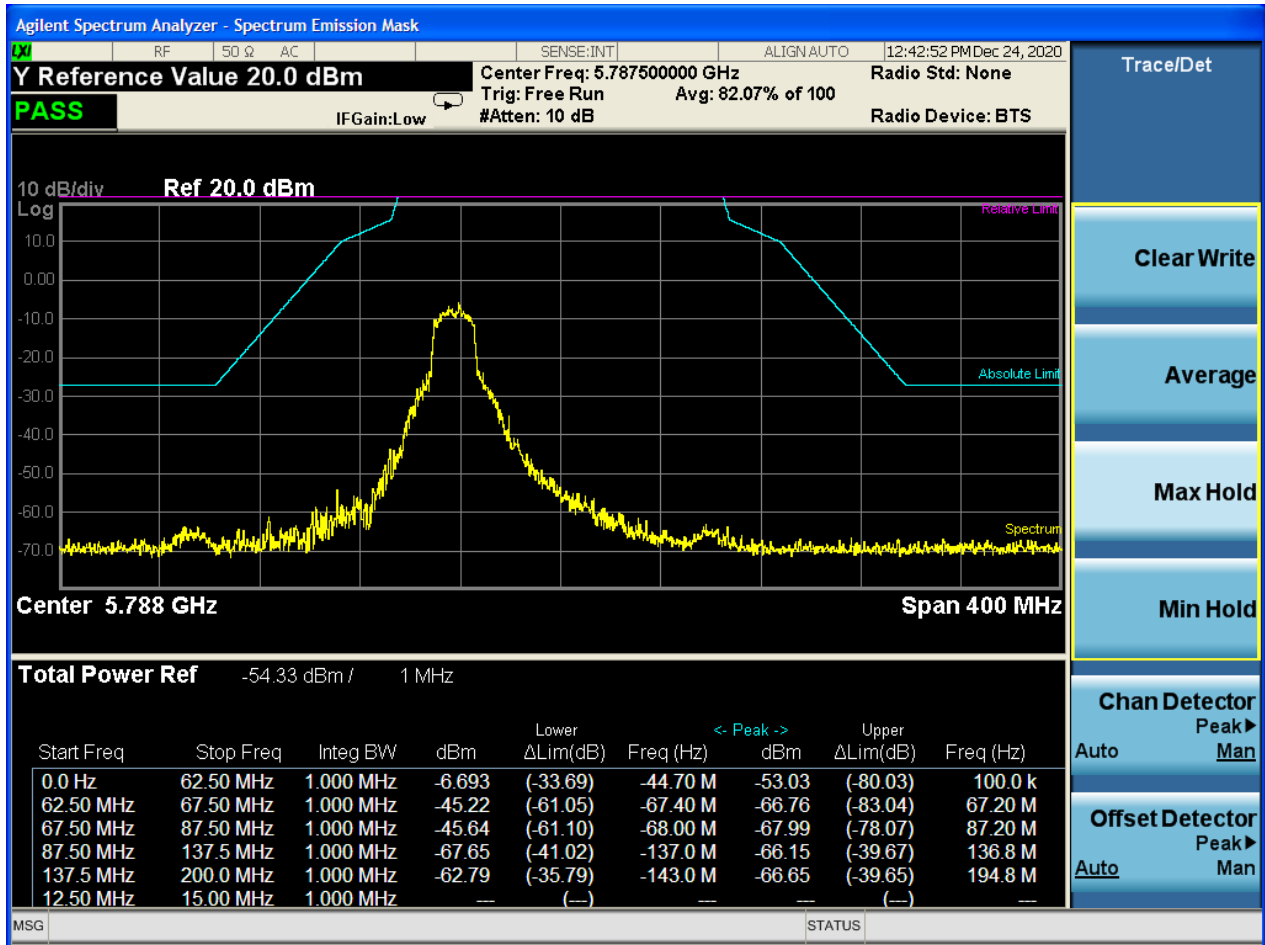

Plot 4-7: Upper Band Edge – Average – U-NII3 – 802.11a (12.0 Mbps)

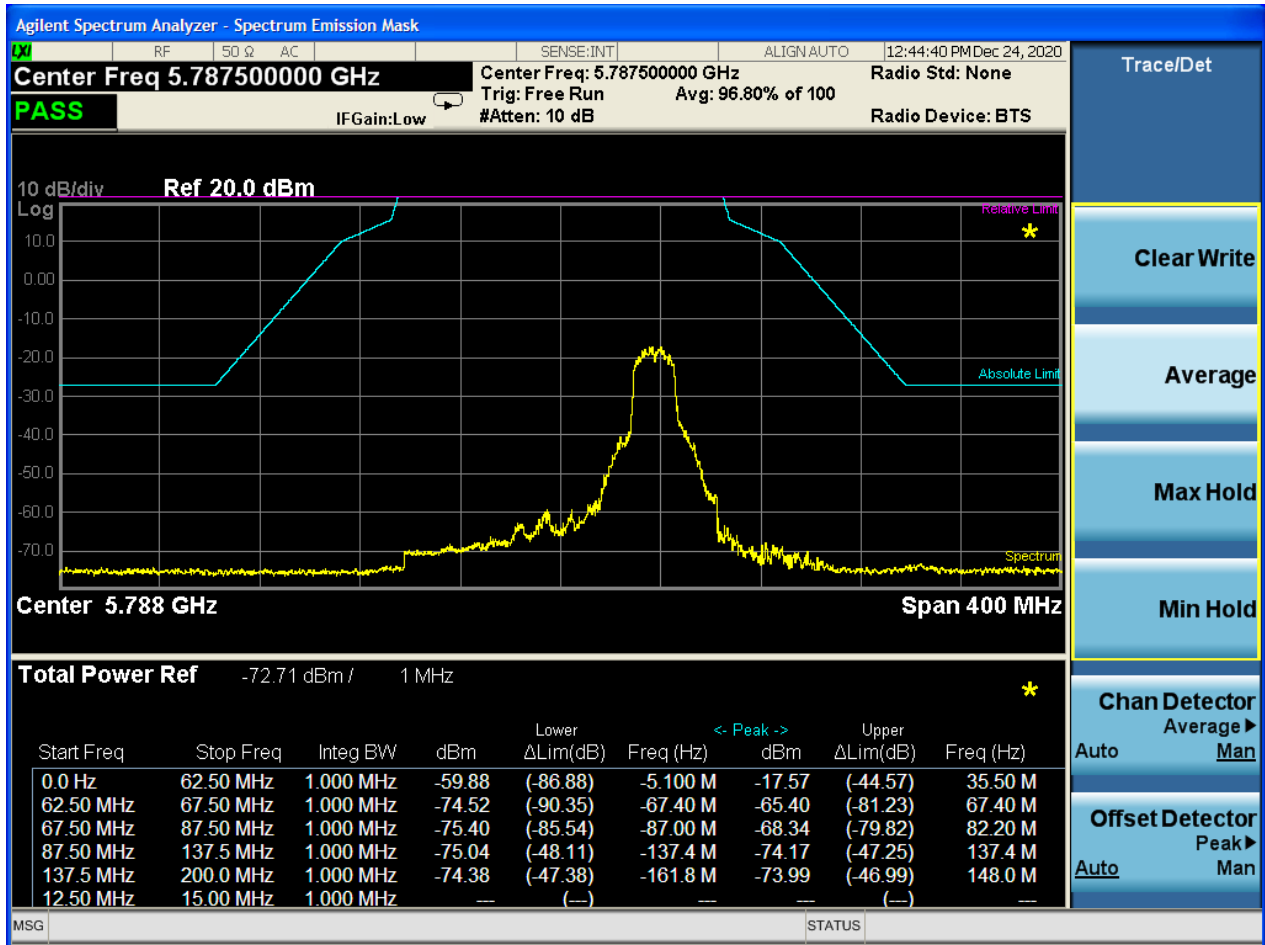

Plot 4-8: Upper Band Edge – Peak – U-NII3 – 802.11a (12.0 Mbps)

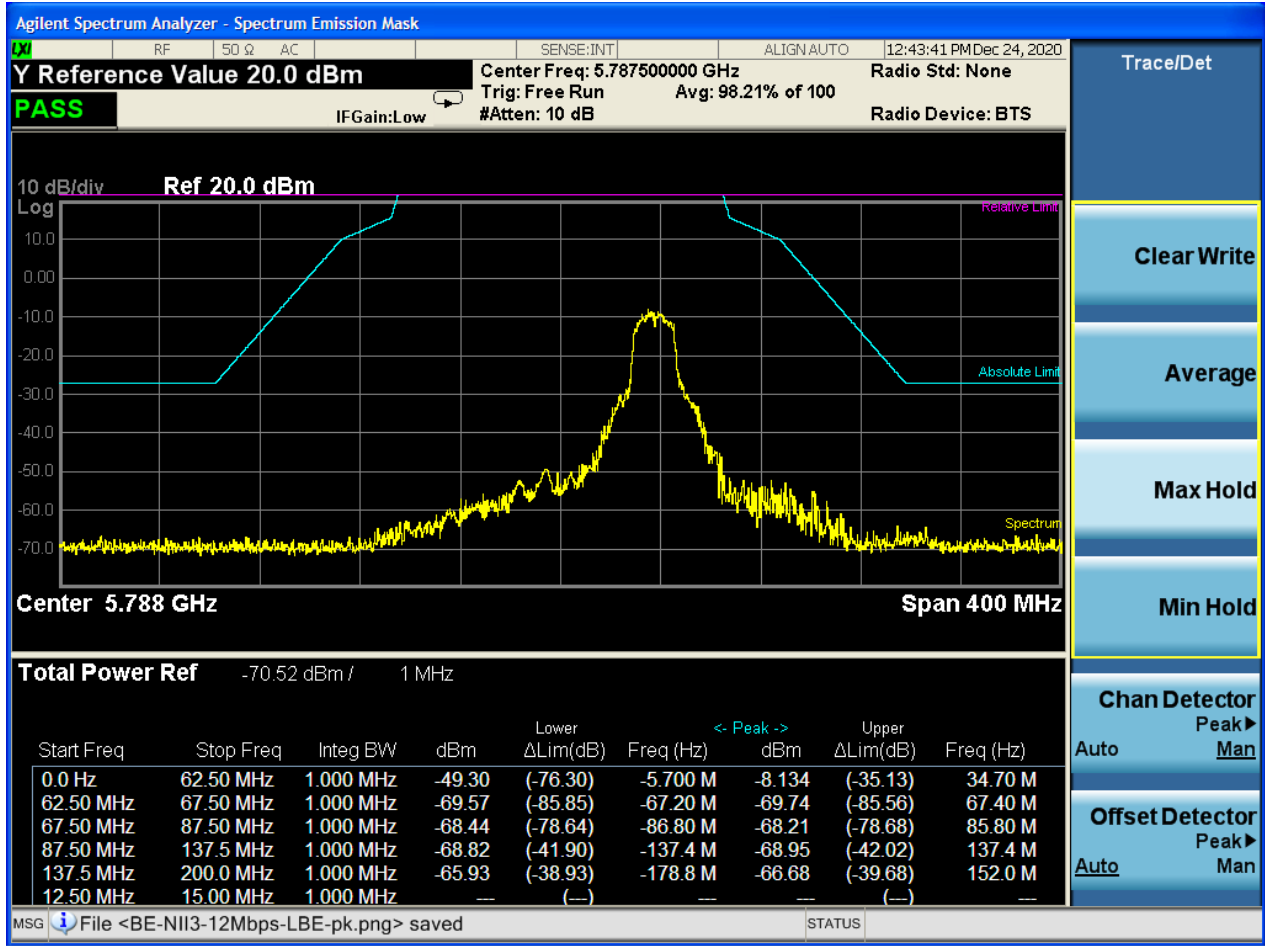

Measurement uncertainty: ±0.5 dB. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor k=2.

Results: Pass

Test Personnel:

Khue Do Test Engineer	 Signature	December 24, 2020, February 11, 2021 Dates of Test
--------------------------	--	--

5 Antenna Conducted Spurious Emissions – FCC 15.407(b)(6); RSS-247 6.2

5.1 Antenna Conducted Spurious Emissions Test Procedures

Antenna conducted spurious emissions per FCC 15.407(b)(6) were measured from the EUT antenna port using a 50-ohm spectrum analyzer with the resolution bandwidth set at 1 MHz, and the video bandwidth set at >3 x RBW.

Table 5-1: Antenna Conducted Spurious Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	03/18/2021

5.2 Antenna Conducted Spurious Emissions Test Results

No harmonics or spurs were found within 20 dB (note that we are reporting power as peak) of the carrier level from the carrier to the 10th harmonic of the carrier frequency.

Measurement uncertainty: ±0.5 dB. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor k=2.

Results: Pass

Test Personnel:

Khue Do Test Engineer	 Signature	December 15, 2020 Date of Test
--------------------------	--	-----------------------------------

6 Bandwidths – FCC 15.407(a) and (e); RSS-247 6.2; RSS-Gen 6.7

6.1 Bandwidth Test Procedure

The minimum 6 dB, 26 dB and 99% bandwidths per FCC 15.407(a) and (e), RSS-247 6.2 and RSS-Gen 6.7 were measured using a 50-ohm spectrum analyzer with the resolution bandwidth set approximately 1% of the emission bandwidth, and the video bandwidth set > RBW.

Table 6-1: Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	03/18/2021

6.2 Modulated Bandwidth Test Results

Table 6-2: Modulated Bandwidth Test Data – U-NII1 – 802.11a (9.0 Mbps)


Channel (#)	Frequency (MHz)	99% Bandwidth (MHz)
36	5180	19.042
40	5200	20.046
48	5240	19.918

Table 6-3: Modulated Bandwidth Test Data – U-NII3 – 802.11a (9.0 Mbps)


Channel (#)	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)
149	5745	16.20	19.911
157	5785	15.86	19.198
165	5825	15.61	17.520

6.3 Bandwidth Plots – U-NII1


Plot 6-1: 99% Bandwidth – 5180 MHz – 802.11a (9.0 Mbps)

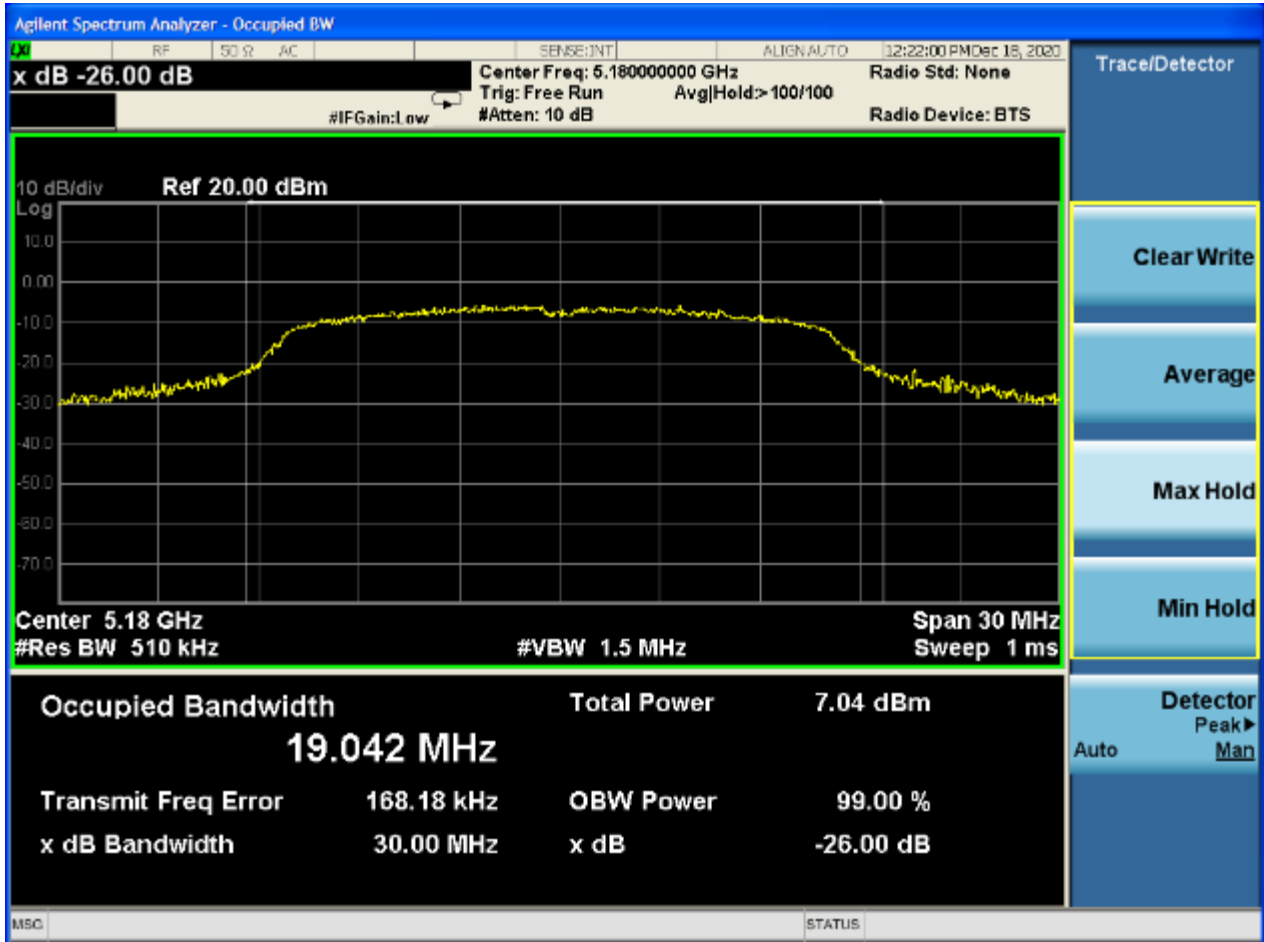

Plot 6-2: 99% Bandwidth – 5200 MHz – 802.11a (9.0 Mbps)

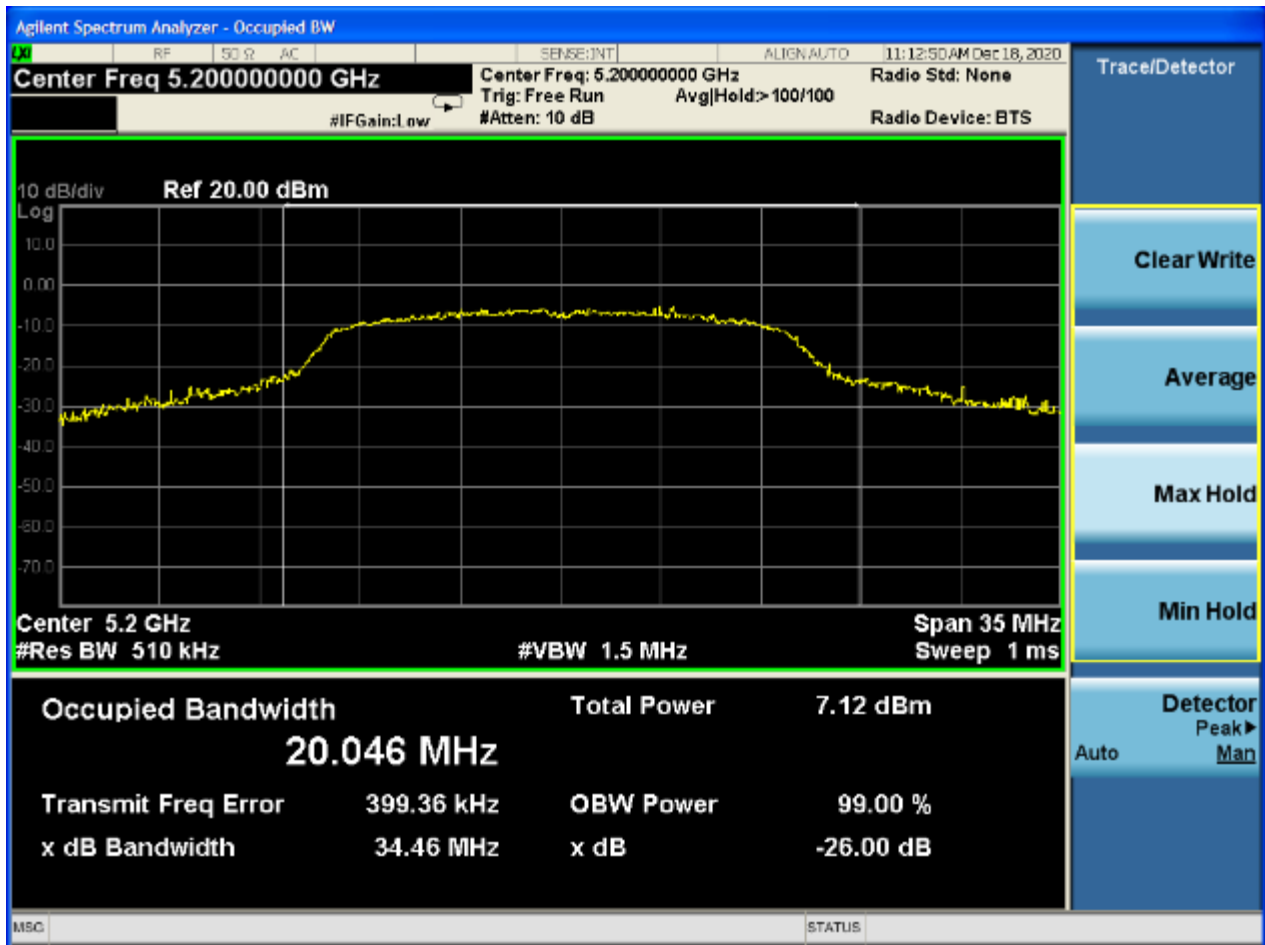


Plot 6-3: 99% Bandwidth – 5240 MHz – 802.11a (9.0 Mbps)

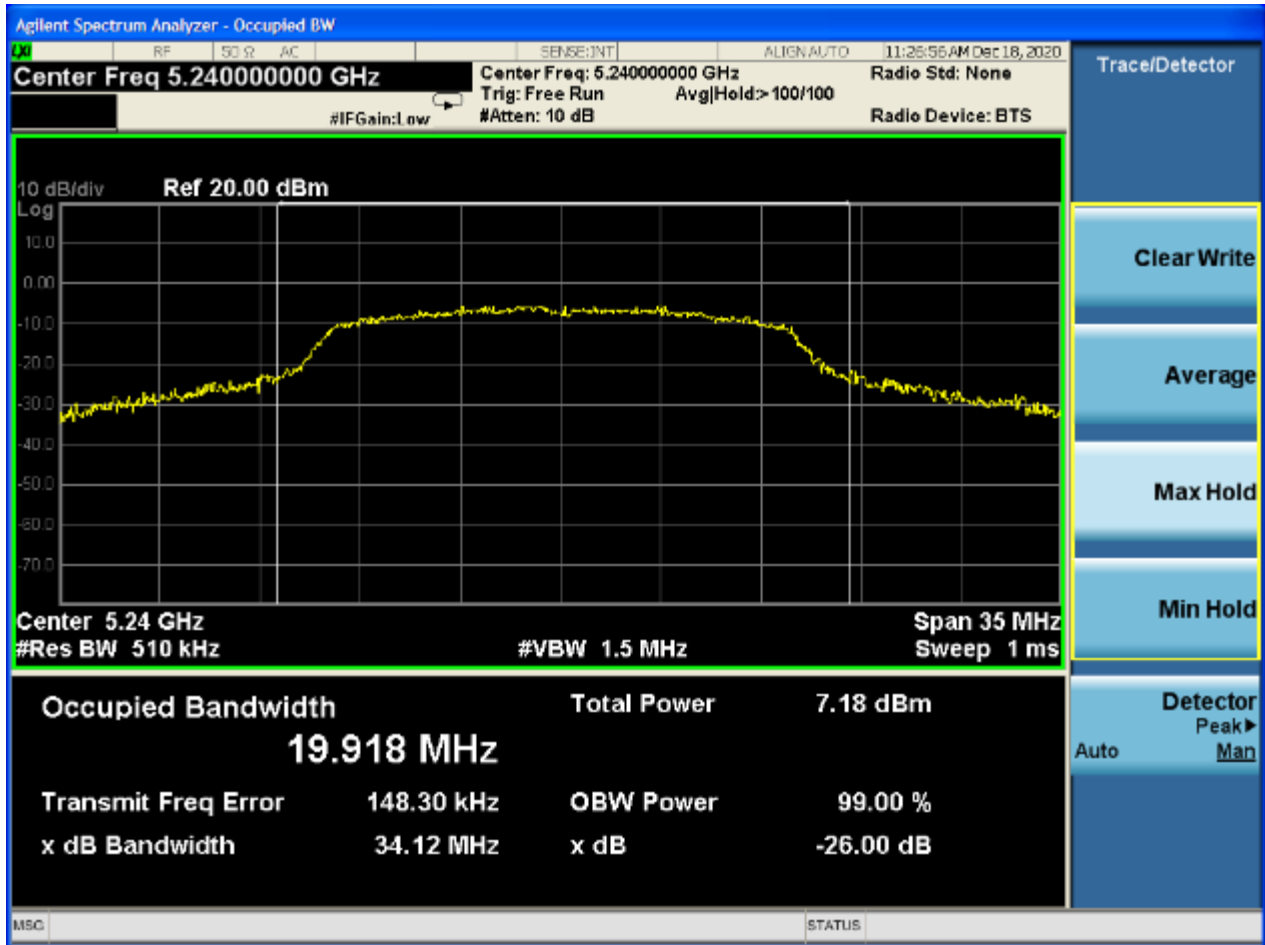


6.4 Bandwidth Plots – U-NII3


Plot 6-4: 6 dB and 99% Bandwidth – 5745 MHz – 802.11a (9.0 Mbps)

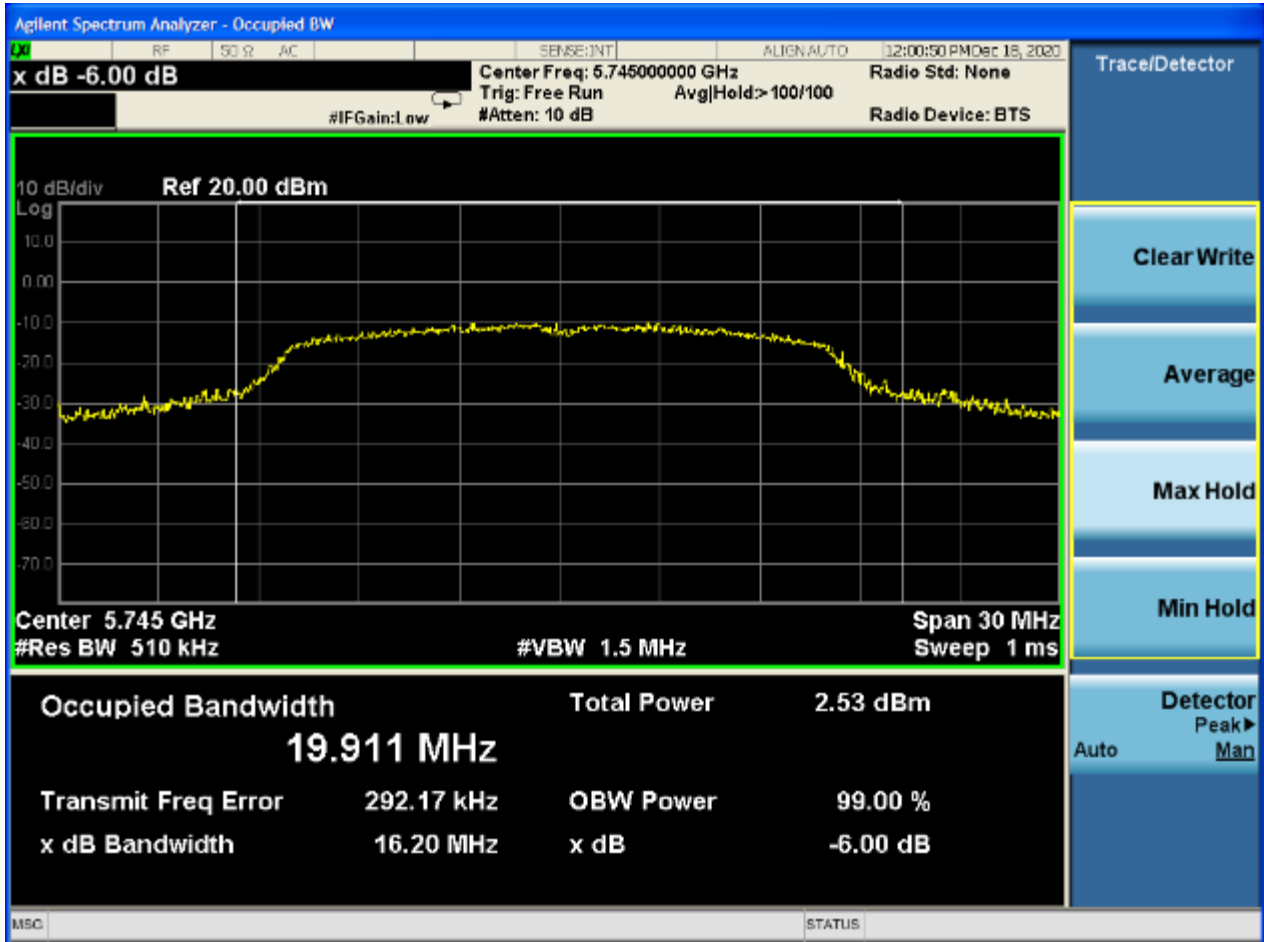

Plot 6-5: 6 dB and 99% Bandwidth – 5785 MHz – 802.11a (9.0 Mbps)

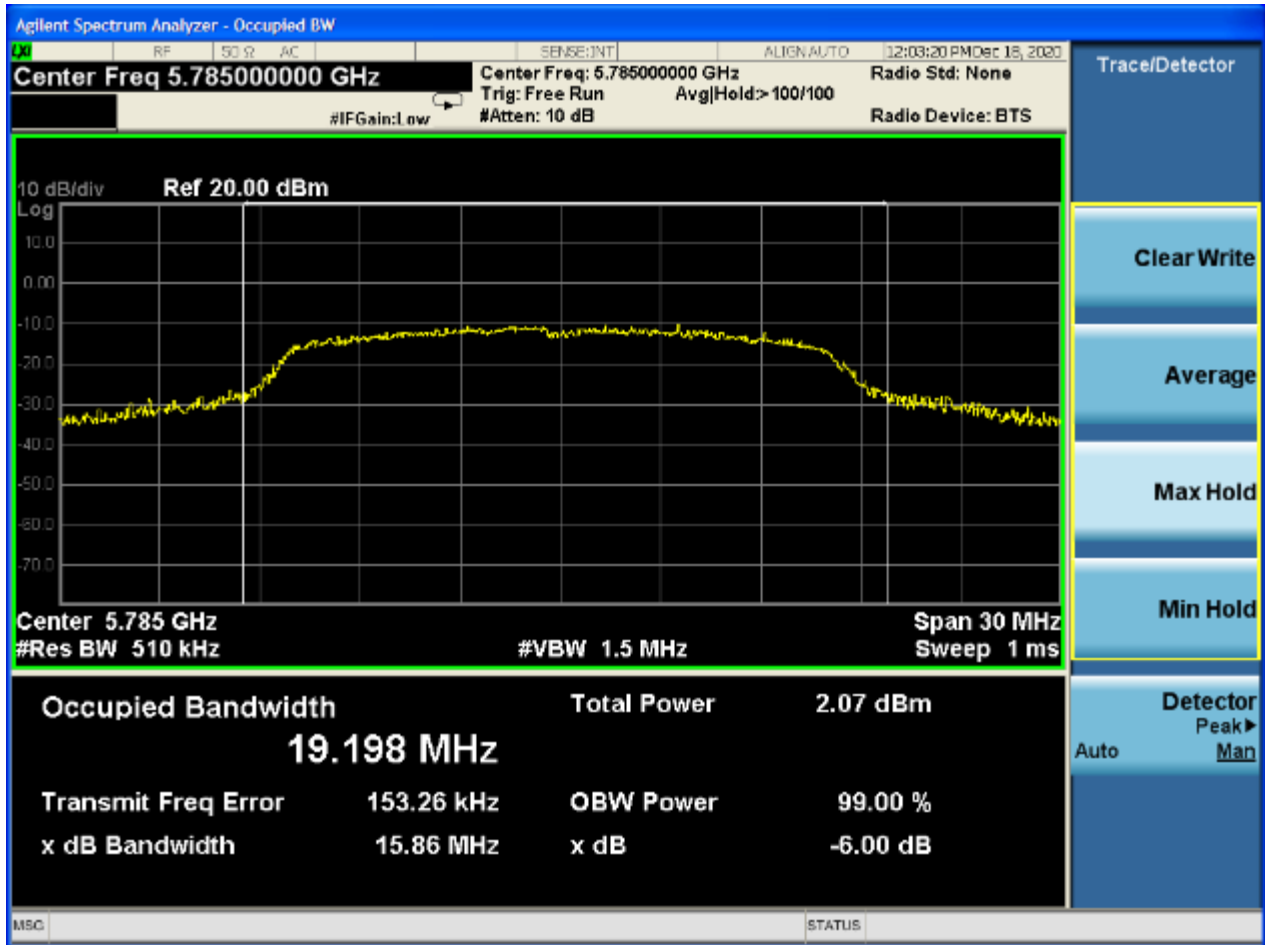

Plot 6-6: 6 dB and 99% Bandwidth – 5825 MHz – 802.11a (9.0 Mbps)

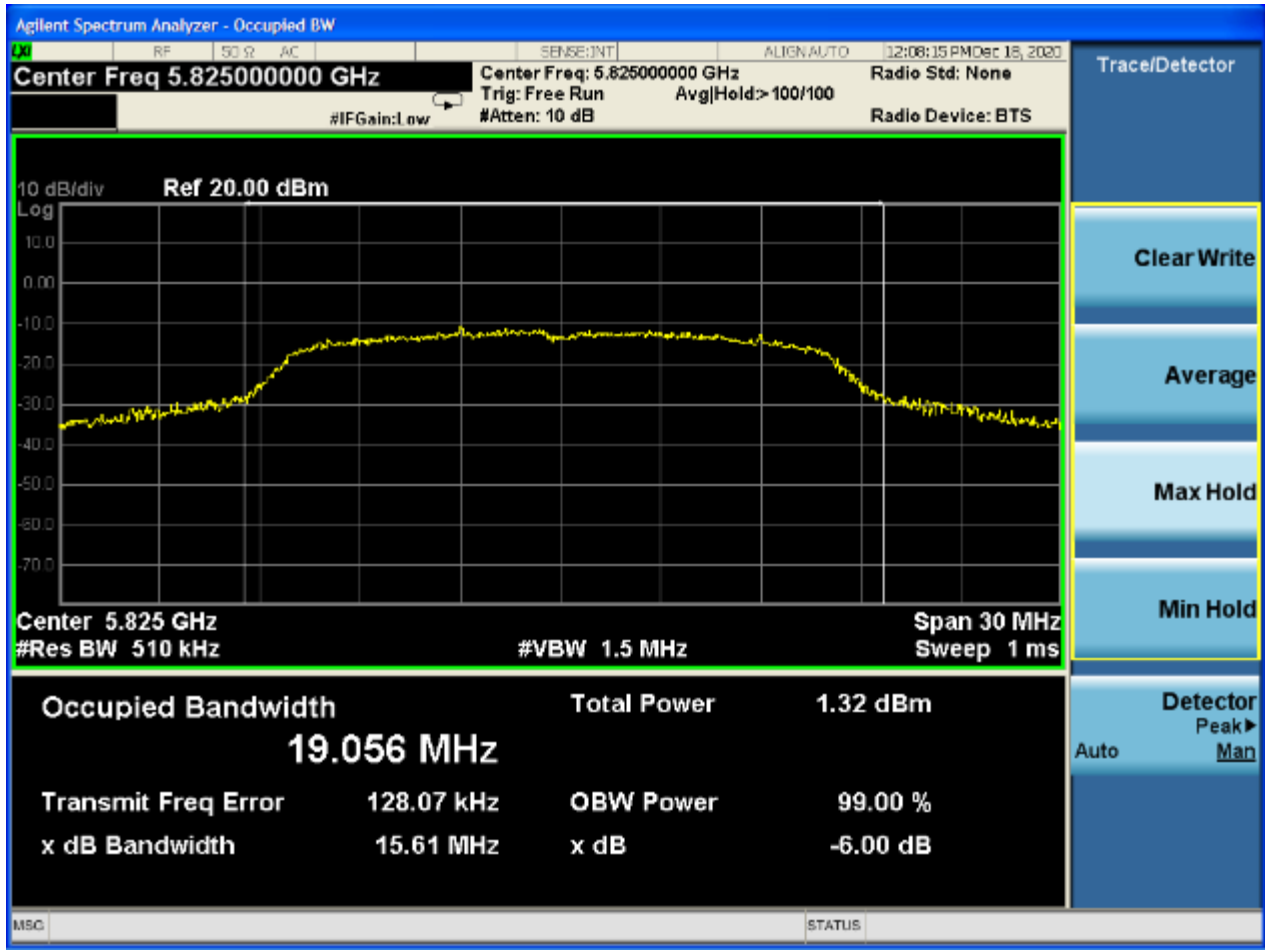

Measurement uncertainty: $\pm 1 \times 10^{-6}$ Hz. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor k=2.

Test Personnel:

Khue Do Test Engineer	 Signature	December 18, 2020 Date of Test
--------------------------	--	-----------------------------------

7 Power Spectral Density – FCC 15.407(a)(1) & (a)(3); RSS-247 6.2

7.1 Power Spectral Density Test Procedure

The power spectral density per FCC 15.407(a)(1)(3) was measured using a 50-ohm spectrum analyzer. The spectral lines were resolved for the modulated carriers. These levels are below the limits. See the power spectral density table and plots.

Table 7-1: Power Spectral Density Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rhode & Schwarz	1166.1660.50	FSU Spectrum Analyzer (20 Hz–50 GHz)	200106	04/26/2021

7.2 Power Spectral Density Test Results

Table 7-2: Power Spectral Density Test Data – U-NII1 – 802.11a (9.0 Mbps), FCC

Frequency (MHz)	PSD (dBm)	Limit (dBm/MHz)	Margin (dB)	Result (Pass / Fail)
5180	-10.7	11.0	-21.7	Pass
5200	-10.5	11.0	-21.5	Pass
5240	-9.7	11.0	-20.7	Pass

Table 7-3: Power Spectral Density Test Data – U-NII1 – 802.11a (9.0 Mbps), ISED


Frequency (MHz)	PSD (EIRP dBm)	Limit (dBm/MHz)	Margin (dB)	Result (Pass / Fail)
5180	-10.7	10.0	-20.7	Pass
5200	-10.5	10.0	-20.5	Pass
5240	-9.7	10.0	-19.7	Pass

Table 7-4: Power Spectral Density Test Data – U-NII3 – 802.11a (48.0 Mbps)


Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)	Result (Pass / Fail)
5745	-14.4	30.0	-44.4	Pass
5785	-15.5	30.0	-45.5	Pass
5825	-16.2	30.0	-46.2	Pass

7.3 Power Spectral Density Plots – U-NII1


Plot 7-1: Power Spectral Density – 5180 MHz – 802.11a (9.0 Mbps)

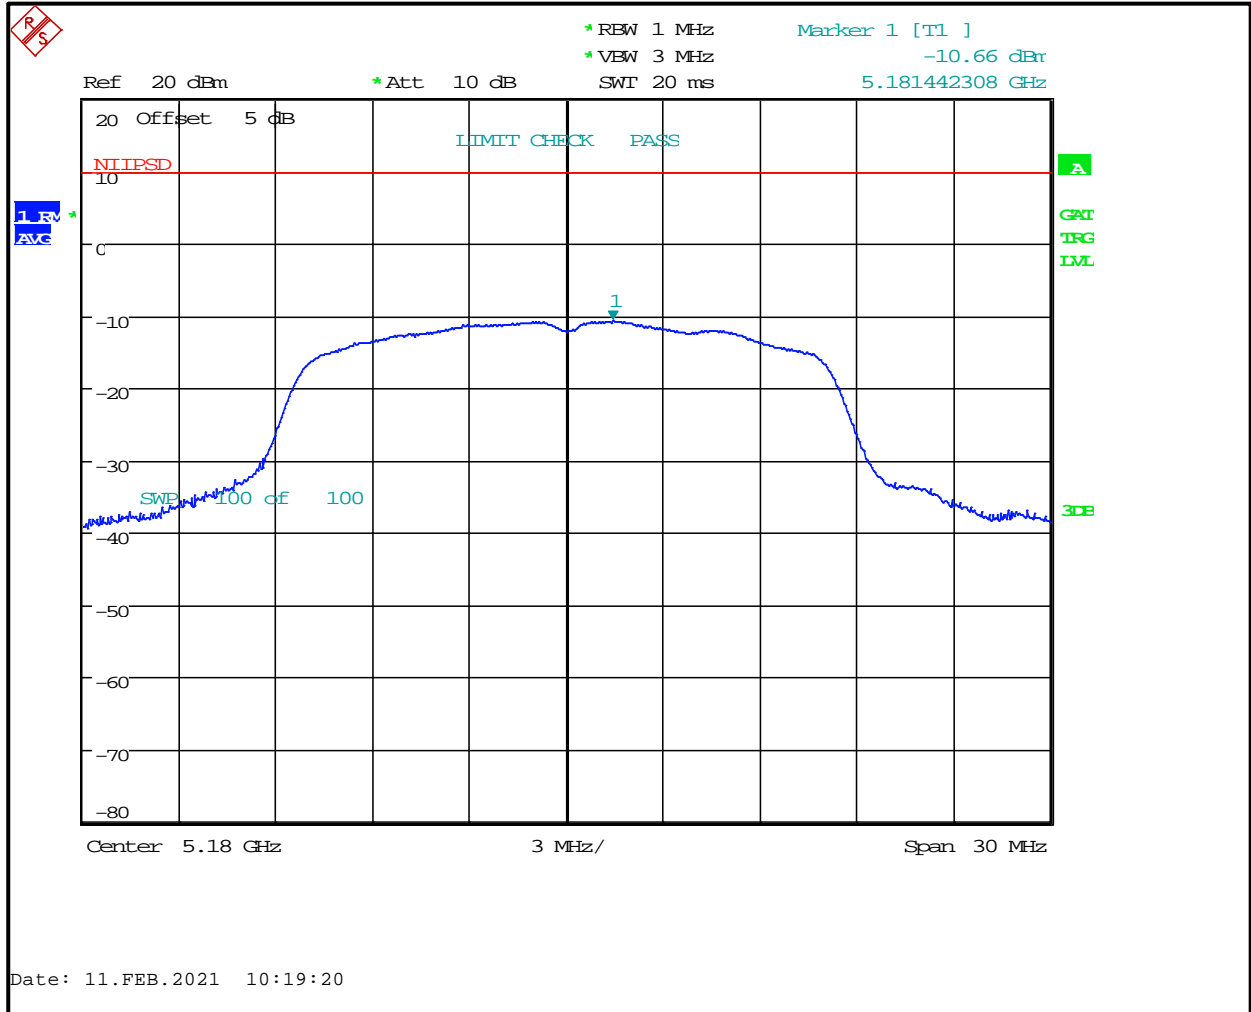

Plot 7-2: Power Spectral Density – 5200 MHz – 802.11a (9.0 Mbps)

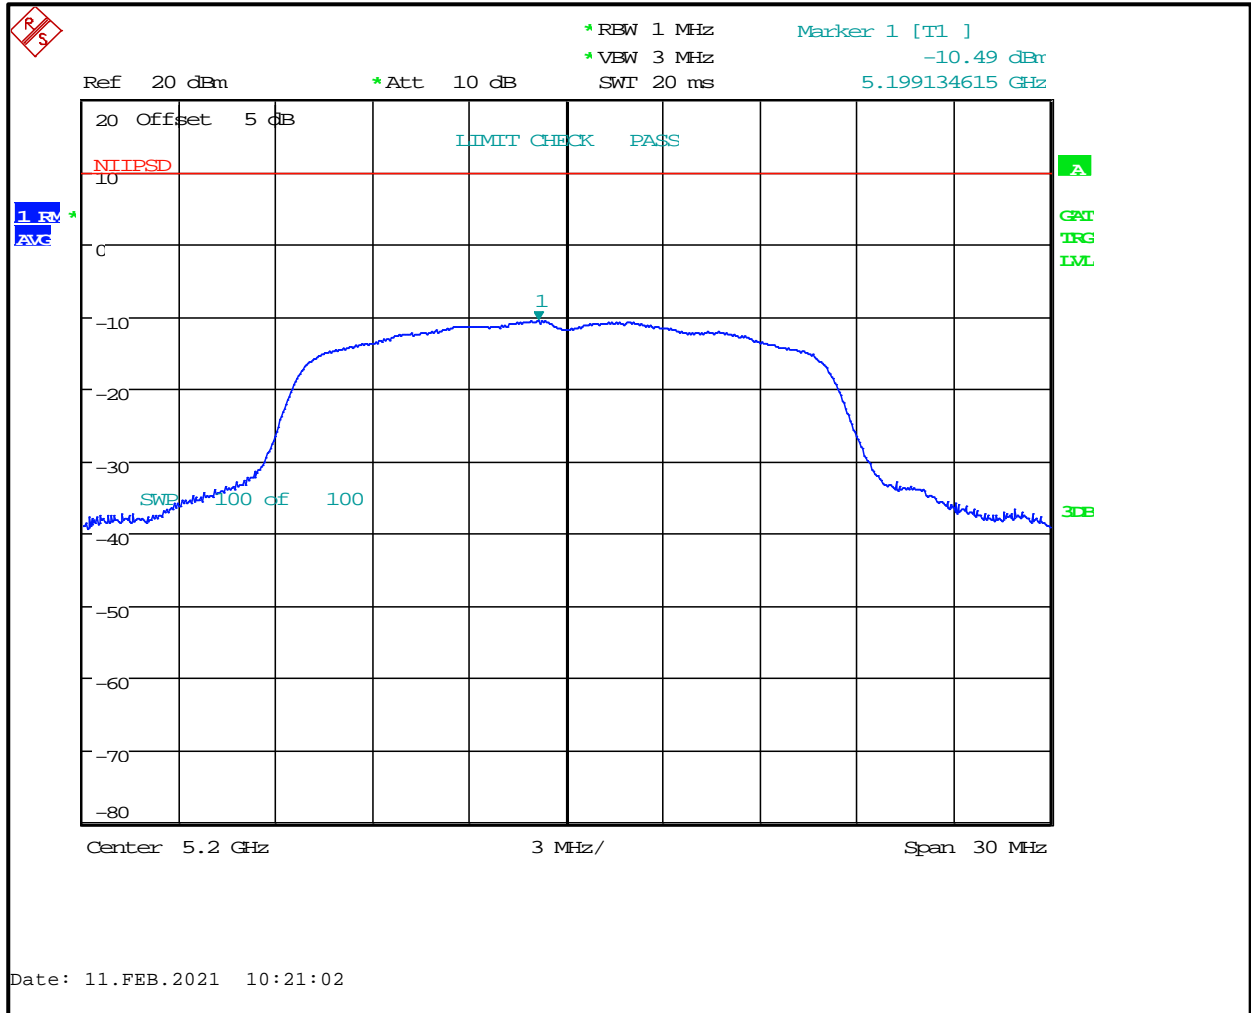


Plot 7-3: Power Spectral Density – 5240 MHz – 802.11a (9.0 Mbps)

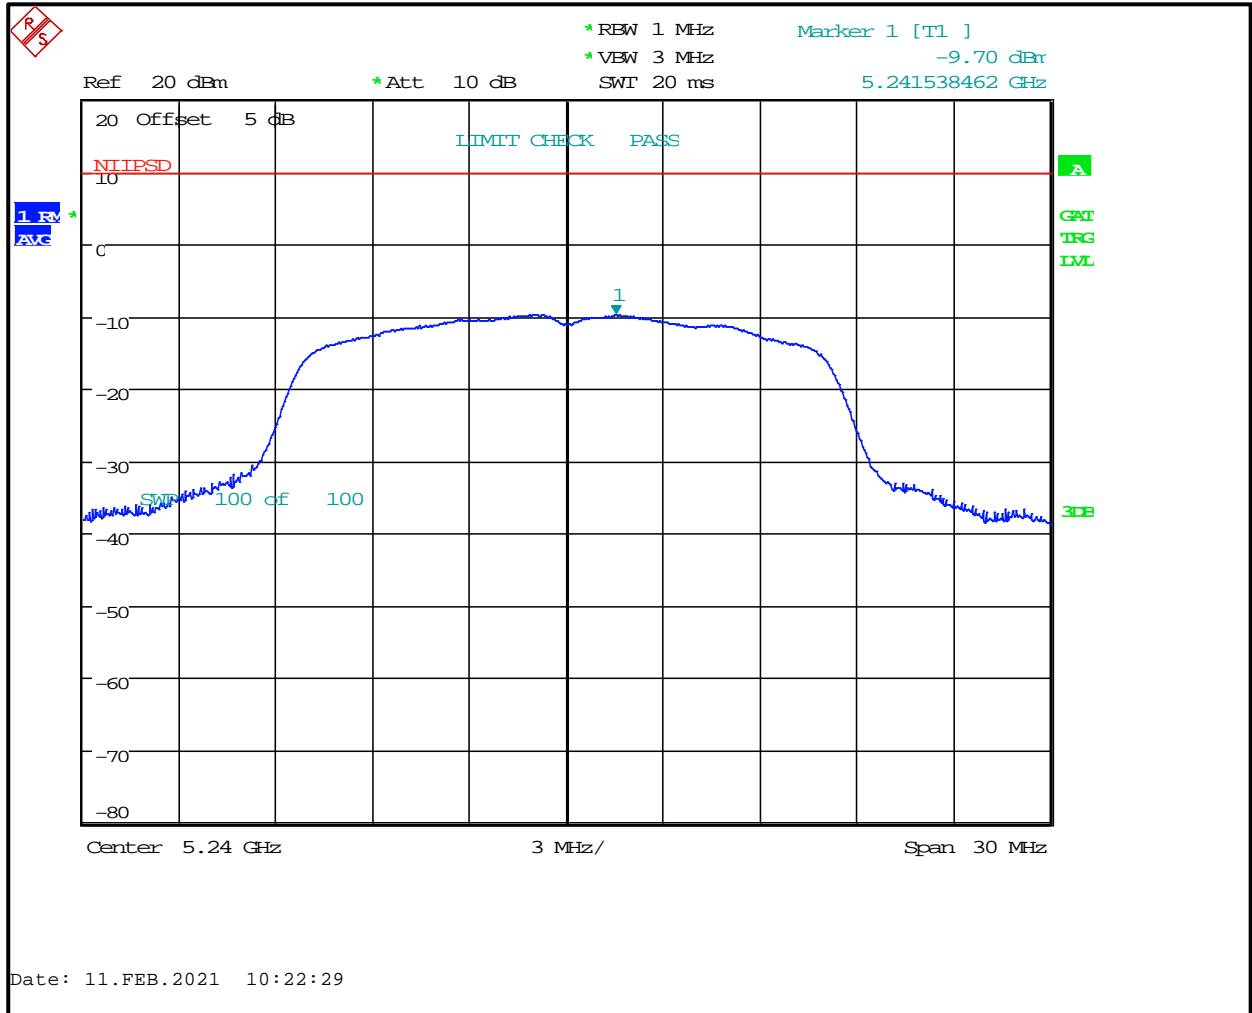


7.4 Power Spectral Density Plots – U-NII3


Plot 7-4: Power Spectral Density – 5745 MHz – 802.11a (48.0 Mbps)

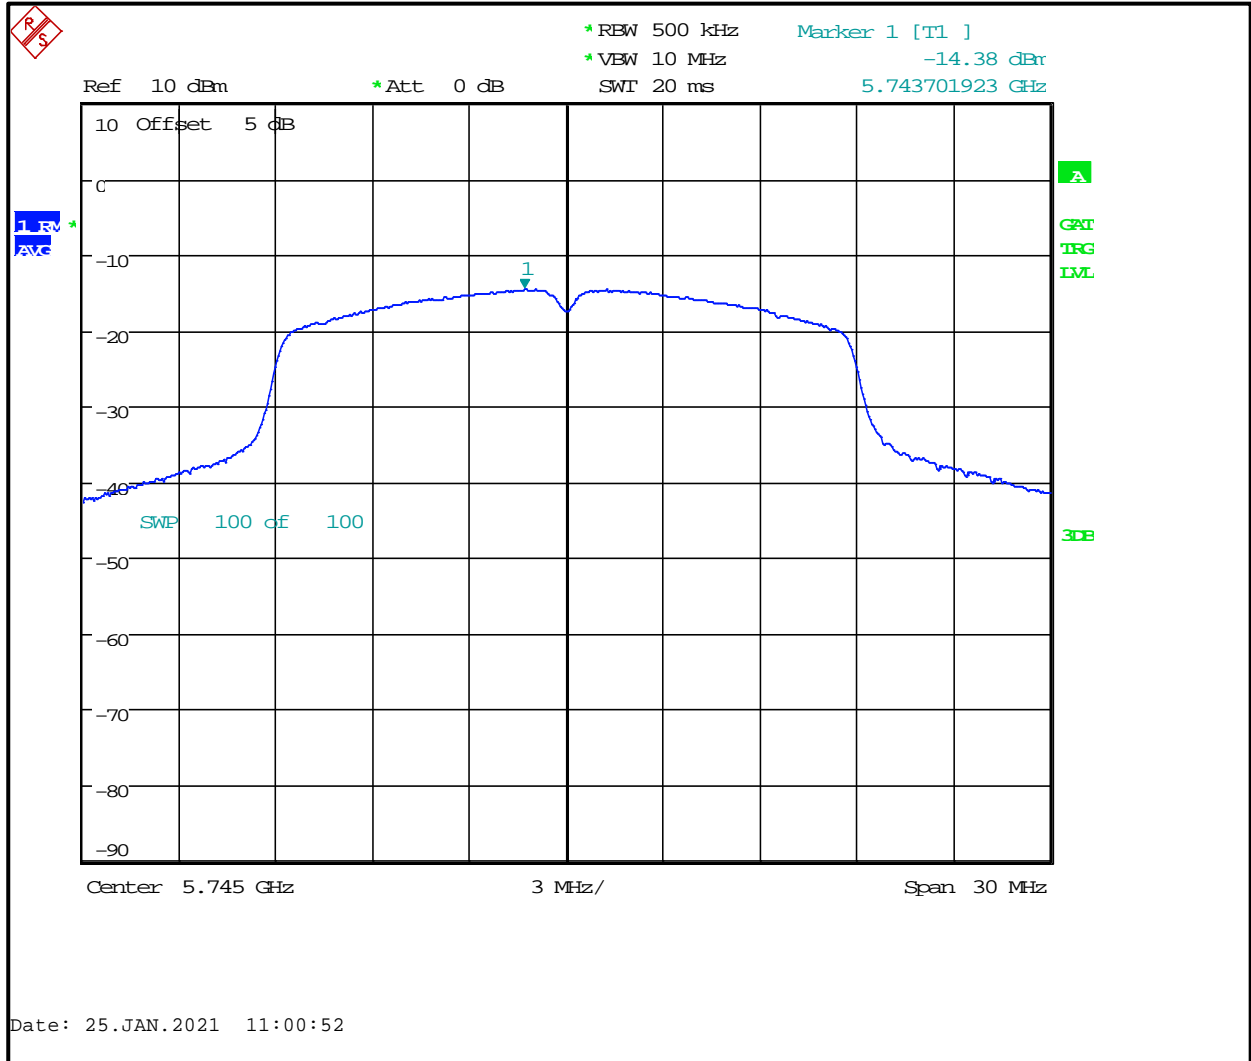

Plot 7-5: Power Spectral Density – 5785 MHz – 802.11a (48.0 Mbps)

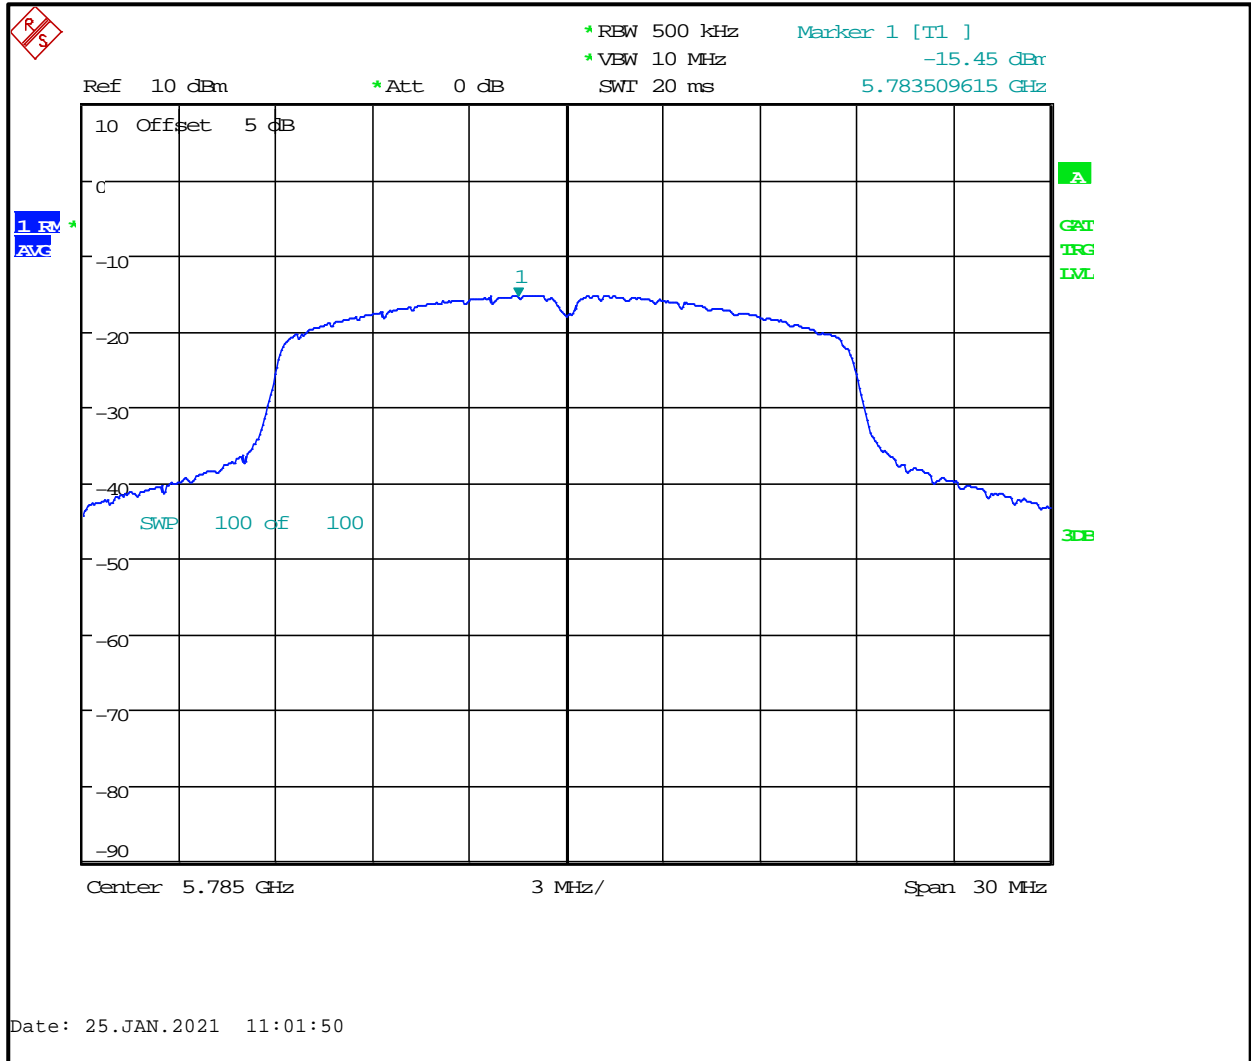

Plot 7-6: Power Spectral Density – 5825 MHz – 802.11a (48.0 Mbps)

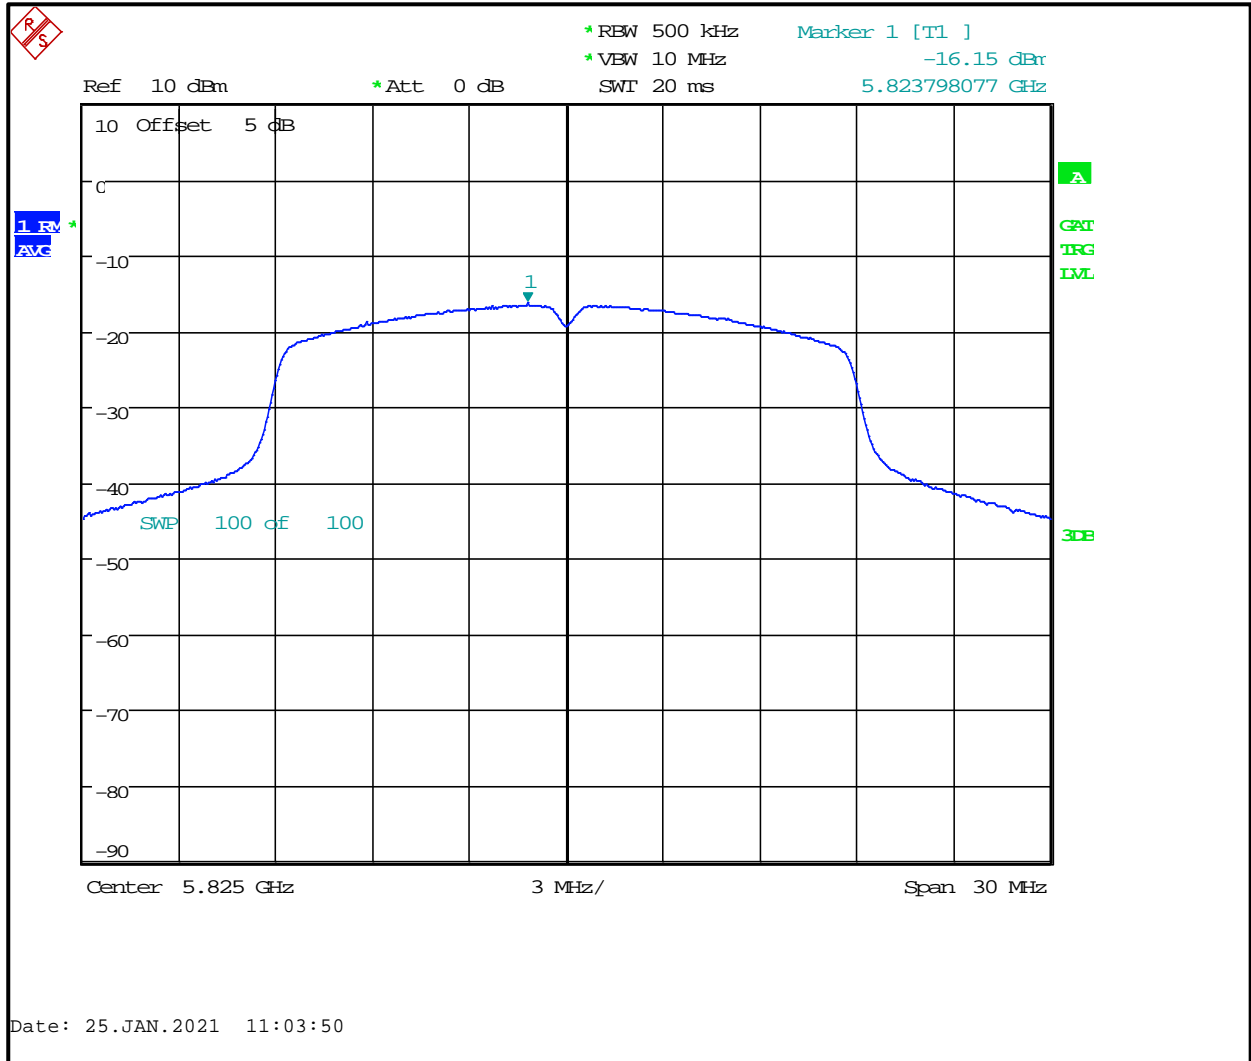

Measurement uncertainty: ± 0.5 dB. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor $k=2$.

Results: Pass

Test Personnel:

Khue Do Test Engineer	 Signature	January 25 & February 11, 2021 Dates of Test
--------------------------	--	---

8 Frequency Stability – FCC 15.407(g); RSS-Gen 6.11

8.1 Frequency Stability Test Procedure

The EUT was placed inside the temperature chamber and supplied by nominal 7.4 VDC. The EUT was connected to an analyzer which was located outside of the chamber. The temperature was set to the lowest level of -20.0°C and the EUT was allowed to stabilize with power off for a period of 1 hour. The EUT was then powered up and the frequency was measured. This was continued at +20.0°C and +50.0°C. The chamber was allowed to stabilize between measurements for approximately 30 minutes. At +20.0°C, the EUT supply voltage was adjusted to 85% (6.29 VDC) and 115% (8.51 VDC) of the nominal voltage, and the frequency was recorded.

Table 8-1: Frequency Stability Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900946	Tenney Engineering Inc.	TH65	Temperature and Humidity Chamber	11380	04/07/2022
901672	Rhode & Schwarz	FSEM30	Spectrum Analyzer	833063/13	04/25/2022

8.2 Frequency Stability Test Result

Table 8-2: Frequency Stability at Extreme Temperatures – U-NII1

Temperature (°C)	Measured Frequency (MHz)	ppm
-20.0	5200.020	3.846
+20.0 (reference)	5200.000	0.000
+50.0	5200.060	11.538

Table 8-3: Frequency Stability at Extreme Voltage Levels – U-NII1

Voltage (VDC)	Measured Frequency (MHz)	ppm
6.29	5199.983	-3.269
7.40 (reference)	5200.000	0.000
8.51	5200.005	0.962
Endpoint: 5.9	5200.005	0.962

Table 8-4: Frequency Stability at Extreme Temperatures – U-NII3

Temperature (°C)	Measured Frequency (MHz)	ppm
-20.0	5785.062	10.717
+20.0 (reference)	5784.995	-0.864
+50.0	5785.060	10.372

Table 8-5: Frequency Stability at Extreme Voltage Levels – U-NII3

Voltage (VDC)	Measured Frequency (MHz)	ppm
6.29	5784.985	-2.593
7.40 (reference)	5784.995	-0.864
8.51	5785.011	1.901
Endpoint: 5.9	5785.018	3.111

Measurement uncertainty: ±0.5 dB. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor k=2.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Harris Corporation
Model #/HVIN: XL-95P/XL-x5-7/8
Standards: FCC 15.407/ISED RSS-247
ID's: OWDTR-0162-E/3636B-0162
Report #: 2019062NII

Results: Pass

Test Personnel:

Khue Do Test Engineer	 Signature	December 28, 2020 Date of Test
--------------------------	--	-----------------------------------

9 AC Conducted Emissions – FCC 15.207; RSS-Gen 8.8

9.1 Conducted Emissions Test Procedure

The powerline conducted emissions measurement were performed in a Series 81 Type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 cm high. Power was fed to the EUT through a 50 Ω / 50 μ H Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an AC filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed AC power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers a DC power supply which powers the EUT.

The spectrum analyzer (SA) was connected to the AC line through an isolation transformer. The 50 Ω output of the LISN was connected to the SA input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the SA from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the SA operating in the CISPR quasi-peak (QPK) mode or peak (PK) mode if applicable.

The SA's 6 dB bandwidth was set to 9 kHz. Video bandwidth (VBW) filter less than 10 times the resolution bandwidth (RBW) is not used. Average (AVG) measurements are performed in linear mode using a 10 kHz RBW, 1 Hz VBW, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and recorded.

Rate 802.11a 9 Mbps was chosen for U-NII1 and 48 Mbps for U-NII3.

9.2 Conducted Emissions Limits

Table 9-1: Conducted Emissions Limits per FCC Part 15.207

Frequency (MHz)	QPK (dB μ V)	AVG (dB μ V)
0.15 – 0.50	66 – 56	56 – 46
0.5 – 5.0	56	46
5 – 30	60	50

Table 9-2: Conducted Emissions Test Equipment

RTL Barcode	Part	Manufacture	Model	Serial Number	Calibration Due Date
900339	Quasi-Peak Adapter (30 Hz–1 GHz)	Hewlett Packard	85650A	2521A00743	04/24/2021
900728	High Pass Filter	Solar Electronics Co.	Type 8130	947305	04/30/2023
900968	Spectrum Analyzer (10 kHz–1.5 GHz)	Hewlett Packard	8567A	2602A00160	04/30/2021
900970	Spectrum Analyzer Display	Hewlett Packard	85662A	2542A11239	04/30/2021
901083	Line Impedance Stabilization Network	AFJ International	LS16	16010020080	02/16/2023
N/A	Test Software	ETS Lindgren	TILE! 7	7.1.3.20	N/A

9.3 Conducted Emissions Test Results

Plot 9-1: Conducted Emissions, AC, Neutral, U-NII1, 5180 MHz

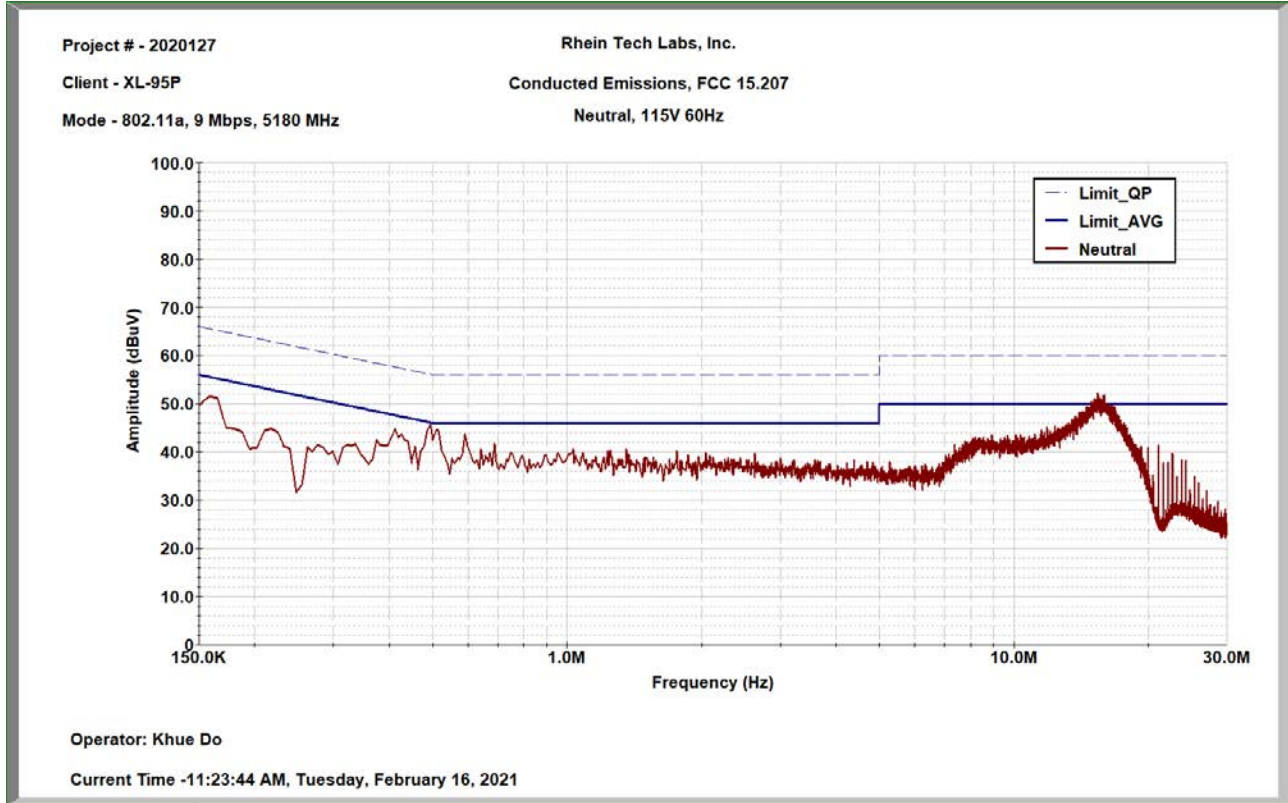


Table 9-3: Conducted Emissions Test Result, AC, Neutral, U-NII1, 5180 MHz

Frequency (MHz)	Detector Type	Emission (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
15.652	AVG	29.2	50.0	-20.8	Pass
15.652	QPK	48.4	60.0	-11.6	Pass

Plot 9-2: Conducted Emissions, AC, Line, U-NII1, 5180 MHz

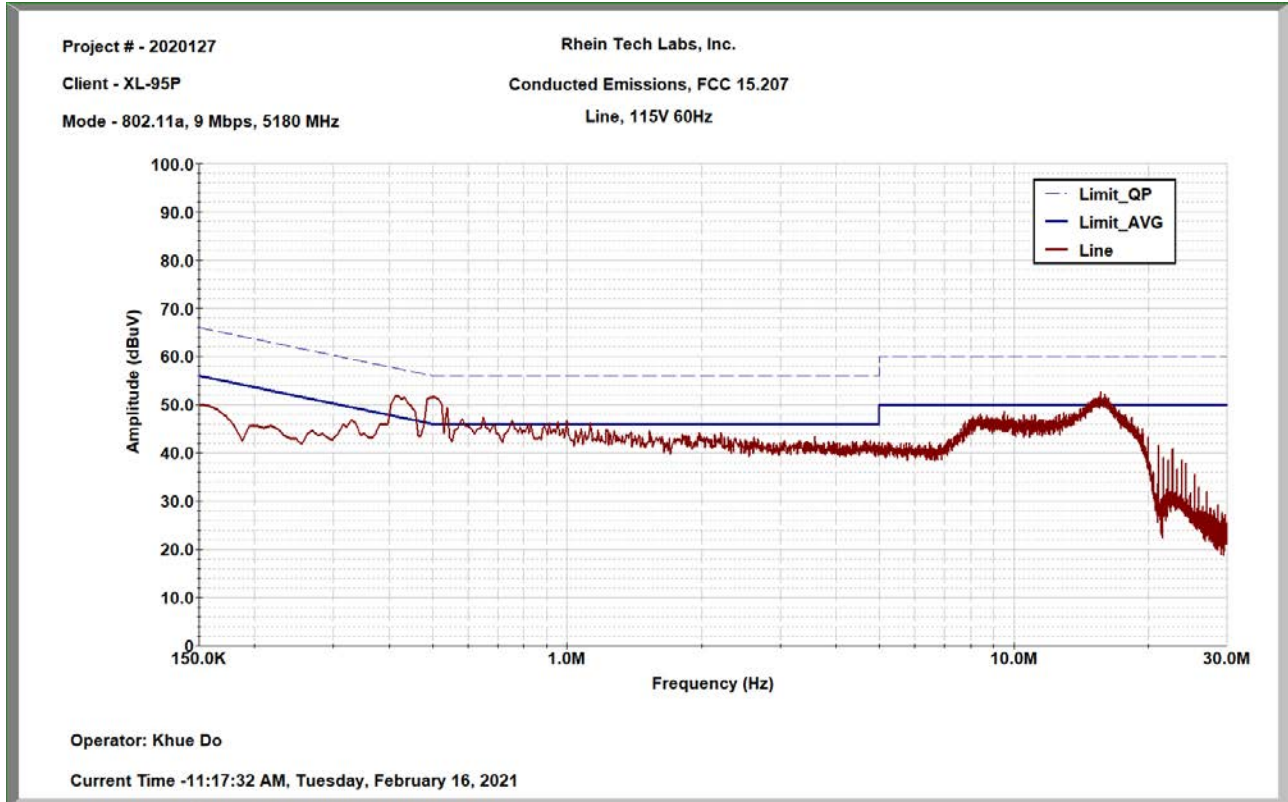


Table 9-4: Conducted Emissions Test Result, AC, Line, U-NII1, 5180 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.501	AVG	27.9	46.0	-18.1	Pass
0.501	QPK	41.1	56.0	-14.9	Pass
15.674	AVG	31.2	50.0	-18.8	Pass
15.674	QPK	48.2	60.0	-11.8	Pass

Plot 9-3: Conducted Emissions, AC, Neutral, U-NII1, 5200 MHz

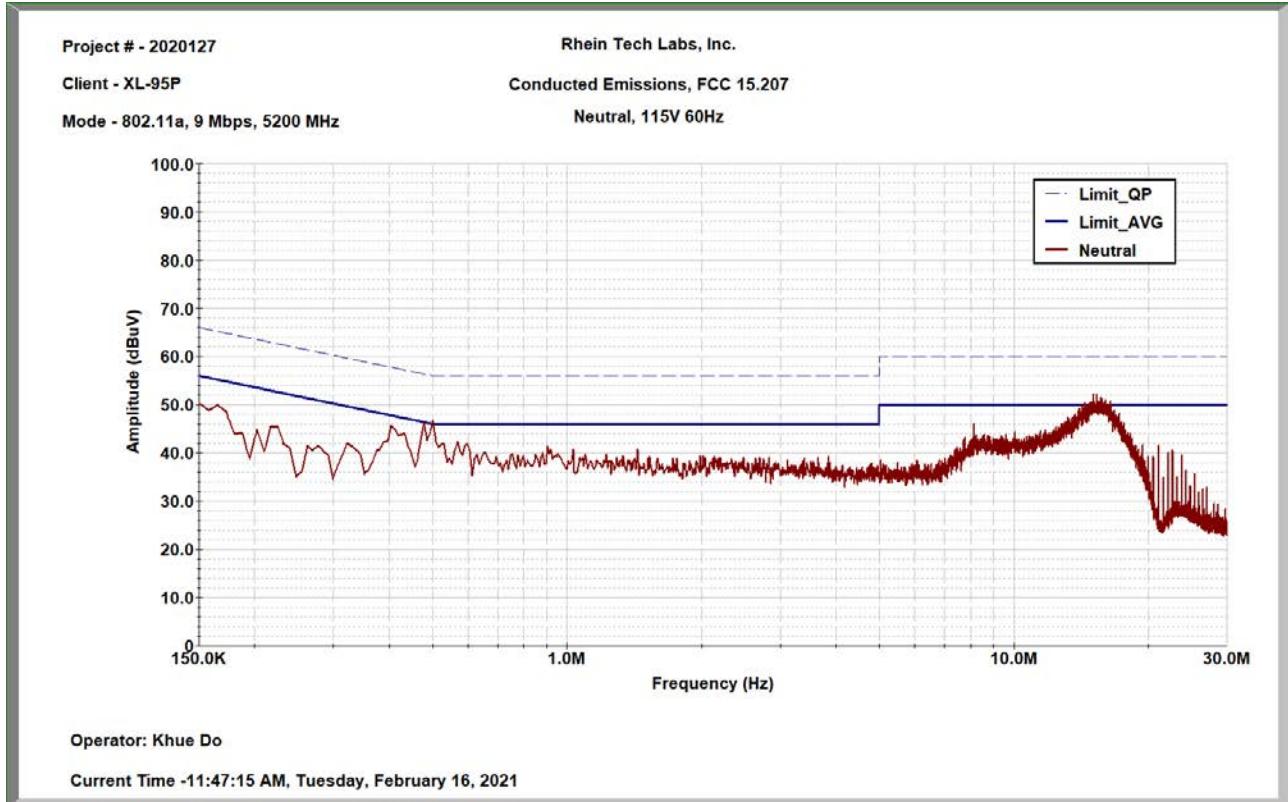


Table 9-5: Conducted Emissions Test Result, AC, Neutral, U-NII1, 5200 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
15.656	AVG	29.4	50.0	-20.6	Pass
15.656	QPK	48.4	60.0	-11.6	Pass

Plot 9-4: Conducted Emissions, AC, Line, U-NII1, 5200 MHz

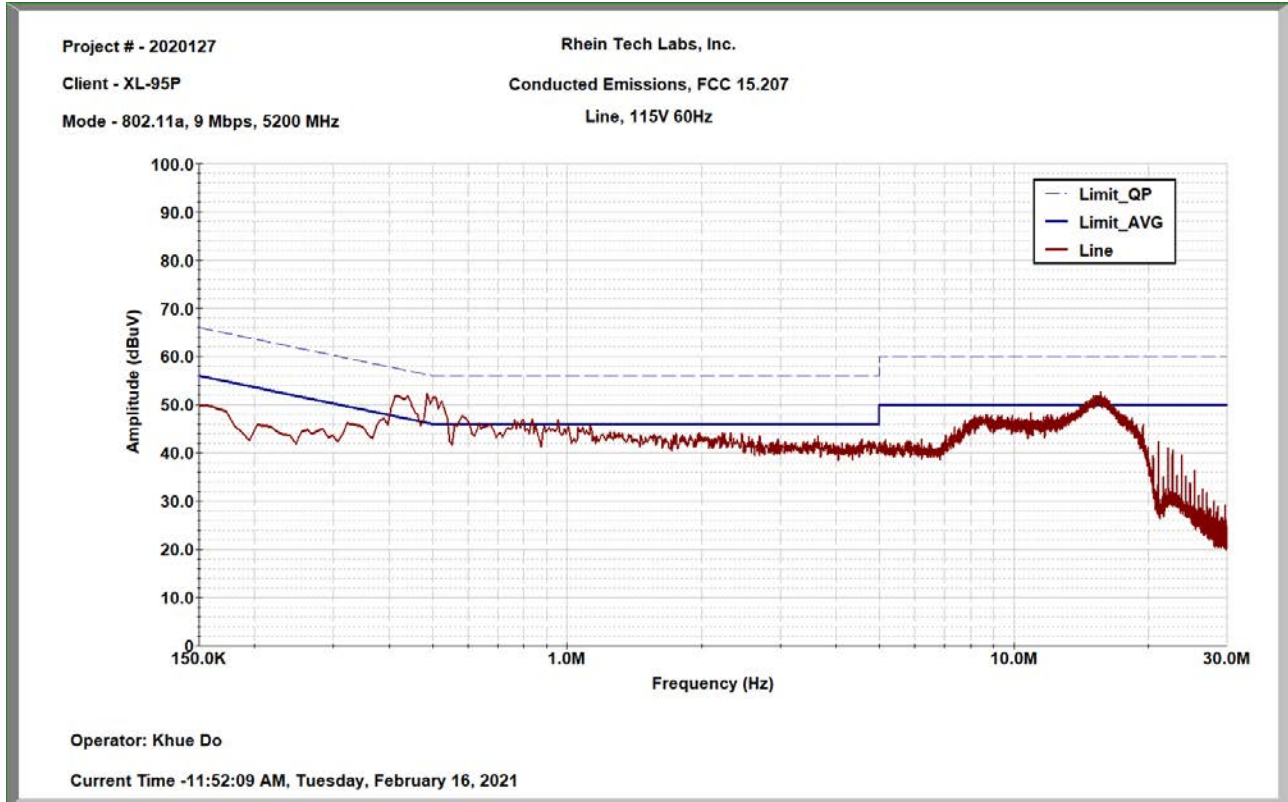


Table 9-6: Conducted Emissions Test Result, AC, Line, U-NII1, 5200 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.513	AVG	29.2	46.0	-16.8	Pass
0.513	QPK	41.1	56.0	-14.9	Pass
15.658	AVG	31.0	50.0	-19.0	Pass
15.658	QPK	47.8	60.0	-12.2	Pass

Plot 9-5: Conducted Emissions, AC, Neutral, U-NII1, 5240 MHz

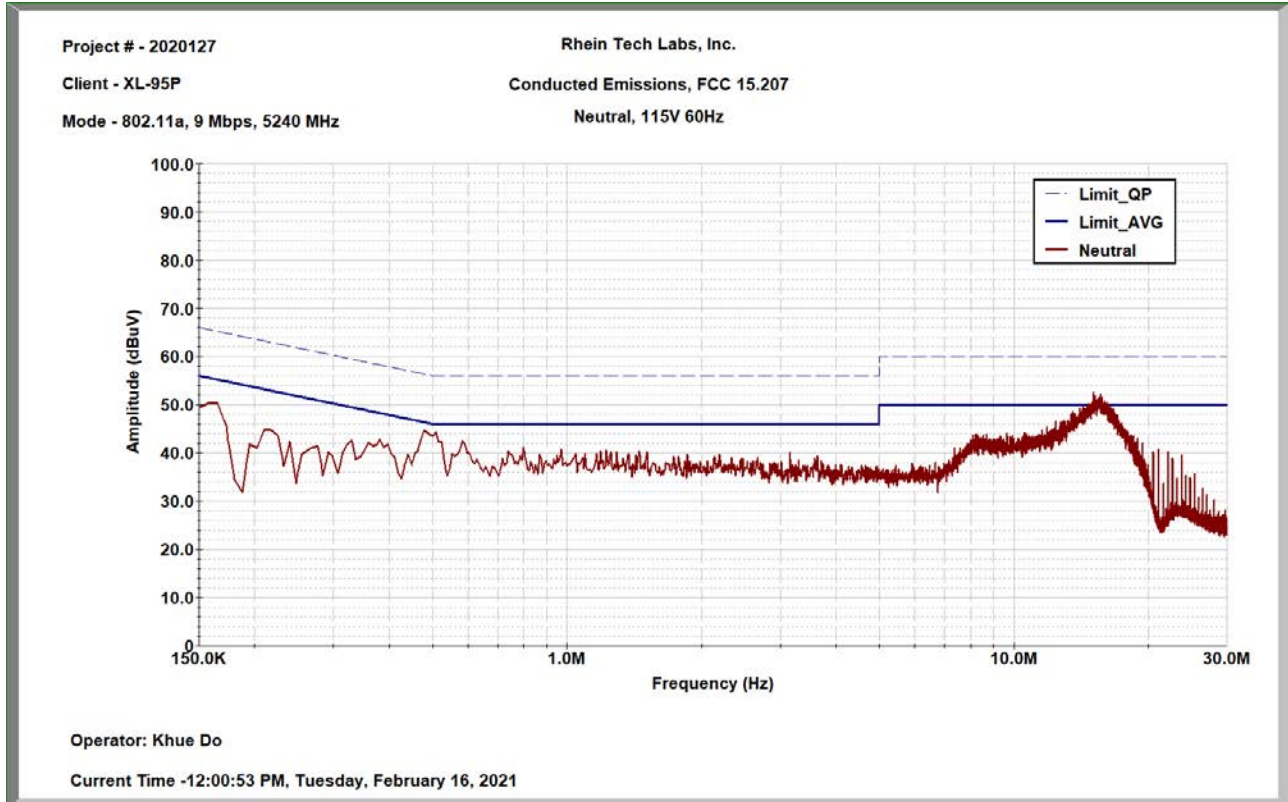


Table 9-7: Conducted Emissions Test Result, AC, Neutral, U-NII1, 5240 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
15.655	AVG	30.0	50.0	-20.0	Pass
15.655	QPK	48.8	60.0	-11.2	Pass

Plot 9-6: Conducted Emissions, AC, Line, U-NII1, 5240 MHz

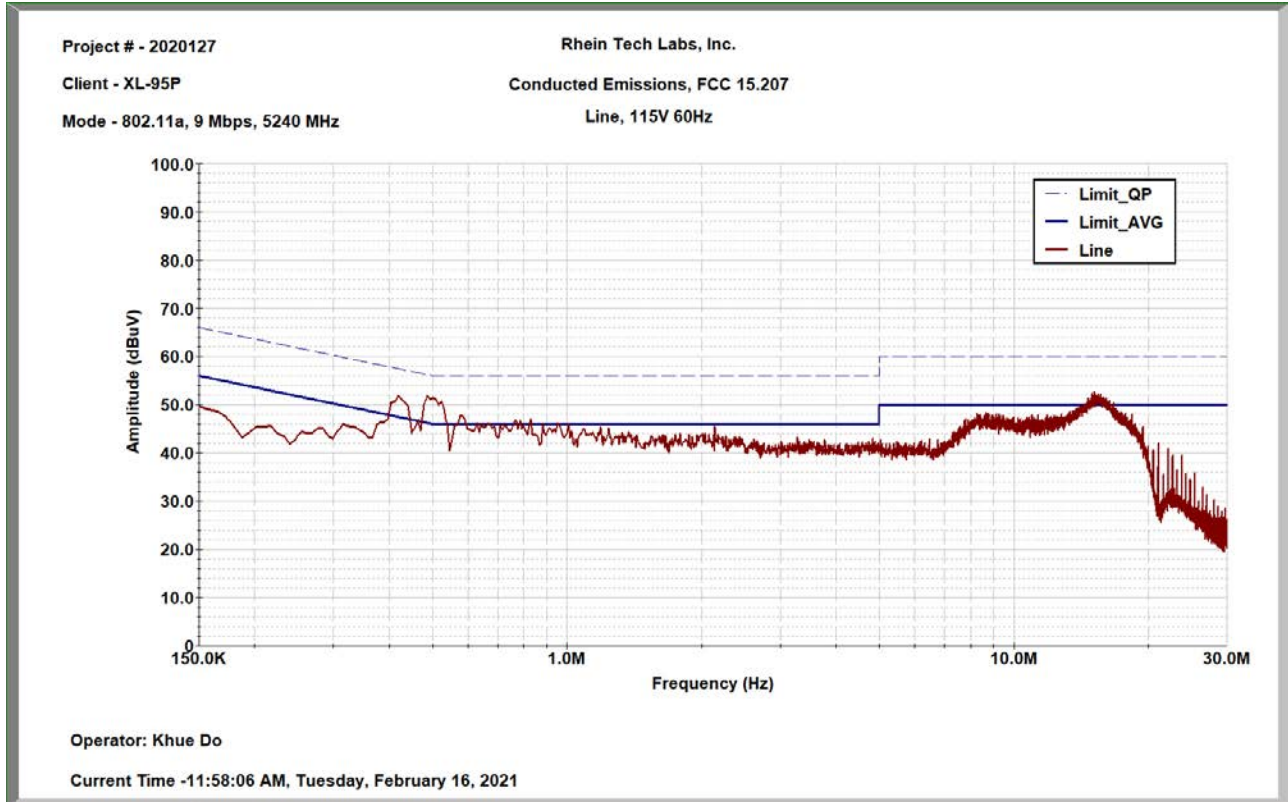


Table 9-8: Conducted Emissions Test Result, AC, Line, U-NII1, 5240 MHz

Frequency (MHz)	Detector Type	Emission (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.515	AVG	28.8	46.0	-17.2	Pass
0.515	QPK	40.8	56.0	-15.2	Pass
15.662	AVG	31.0	50.0	-19.0	Pass
15.662	QPK	48.1	60.0	-11.9	Pass

Plot 9-7: Conducted Emissions, AC, Neutral, U-NII3, 5745 MHz

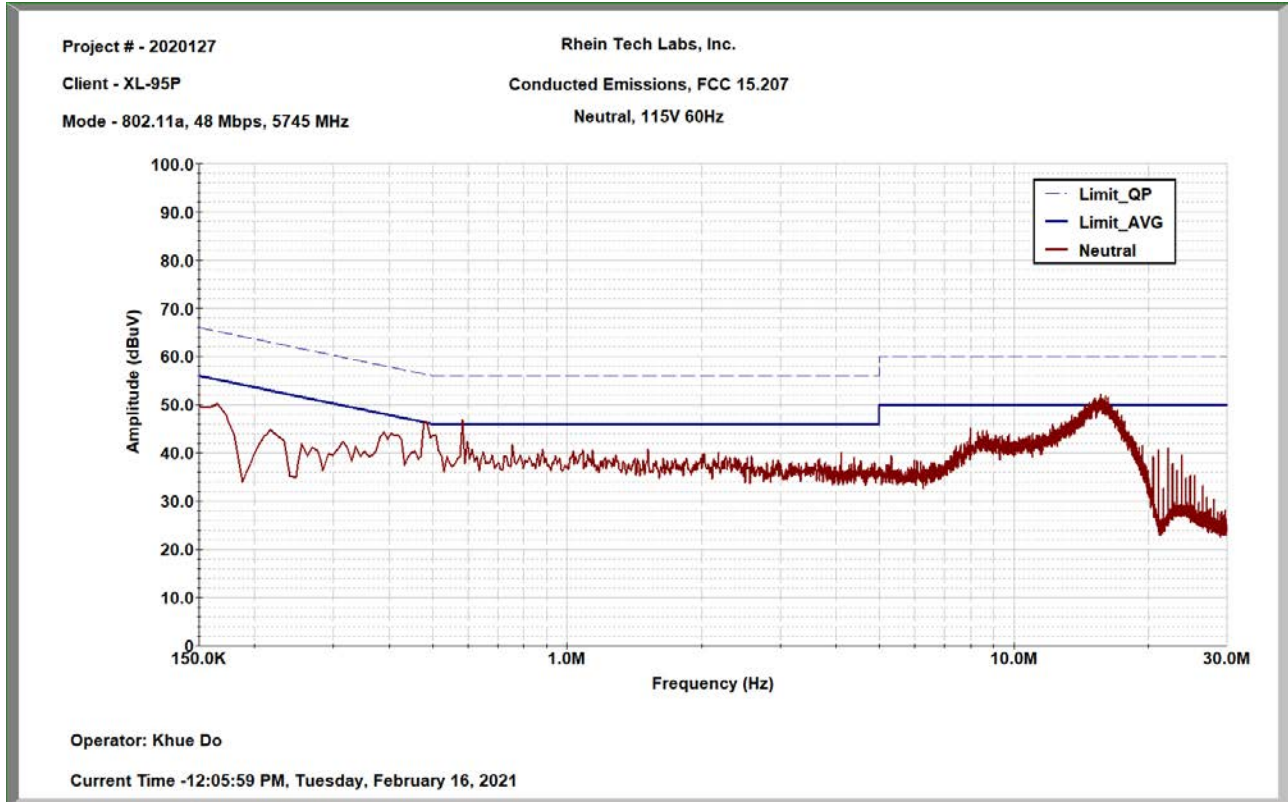


Table 9-9: Conducted Emissions Test Result, AC, Neutral, U-NII3, 5745 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
15.648	AVG	31.0	50.0	-19.0	Pass
15.648	QPK	49.3	60.0	-10.7	Pass

Plot 9-8: Conducted Emissions, AC, Line, U-NII3, 5745 MHz

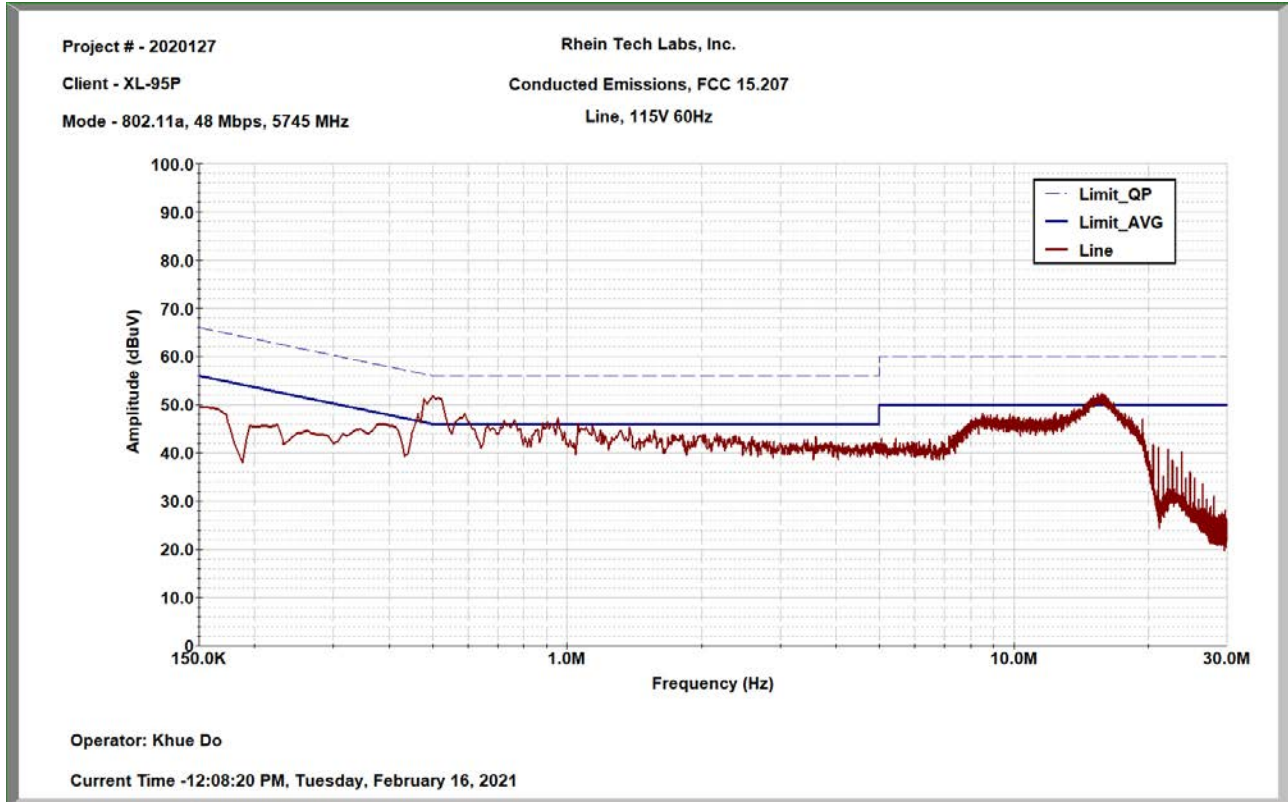


Table 9-10: Conducted Emissions Test Result, AC, Line, U-NII3, 5745 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.514	AVG	29.8	46.0	-16.2	Pass
0.514	QPK	41.3	56.0	-14.7	Pass
15.660	AVG	31.6	50.0	-18.4	Pass
15.660	QPK	49.1	60.0	-10.9	Pass

Plot 9-9: Conducted Emissions, AC, Neutral, U-NII3, 5785 MHz

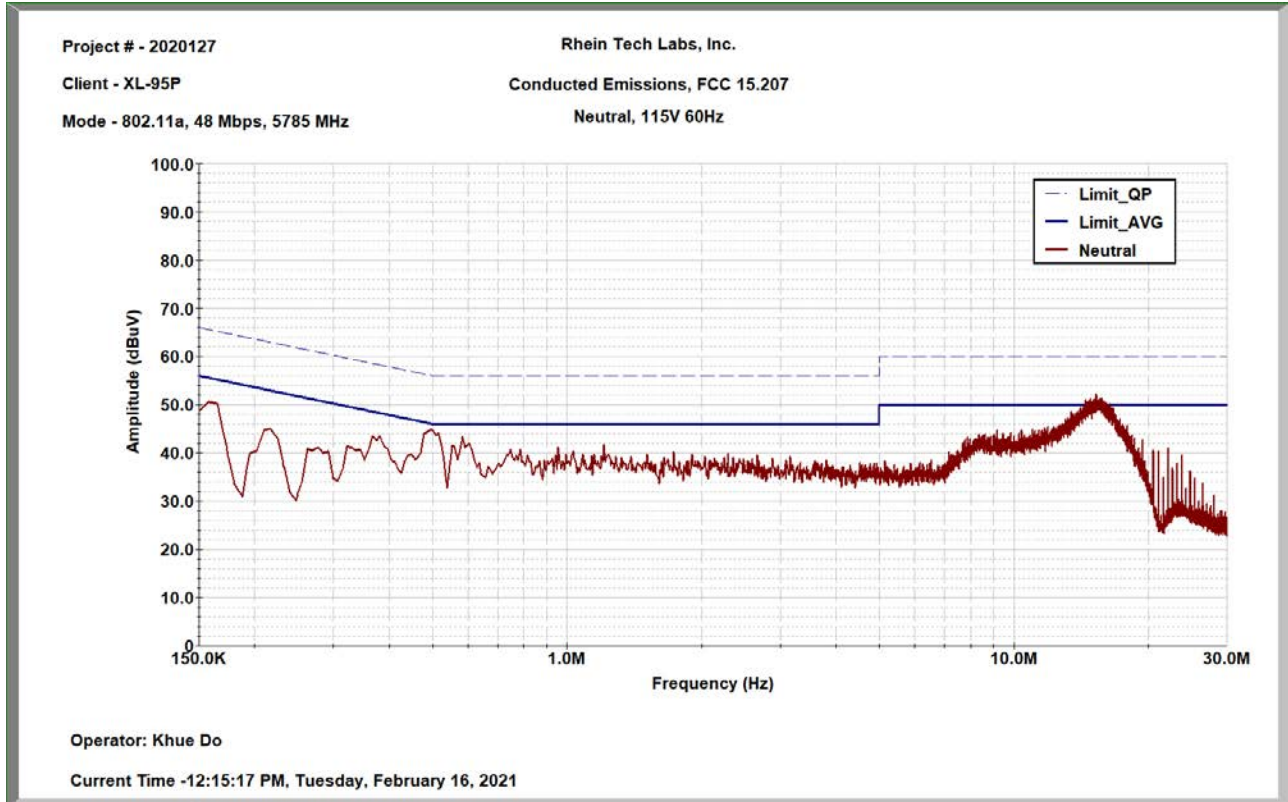


Table 9-11: Conducted Emissions Test Result, AC, Neutral, U-NII3, 5785 MHz

Frequency (MHz)	Detector Type	Emission (dBμV)	Limit (dBμV)	Margin (dB)	Result
15.672	AVG	30.7	50.0	-19.3	Pass
15.672	QPK	49.6	60.0	-10.4	Pass

Plot 9-10: Conducted Emissions, AC, Line, U-NII3, 5785 MHz

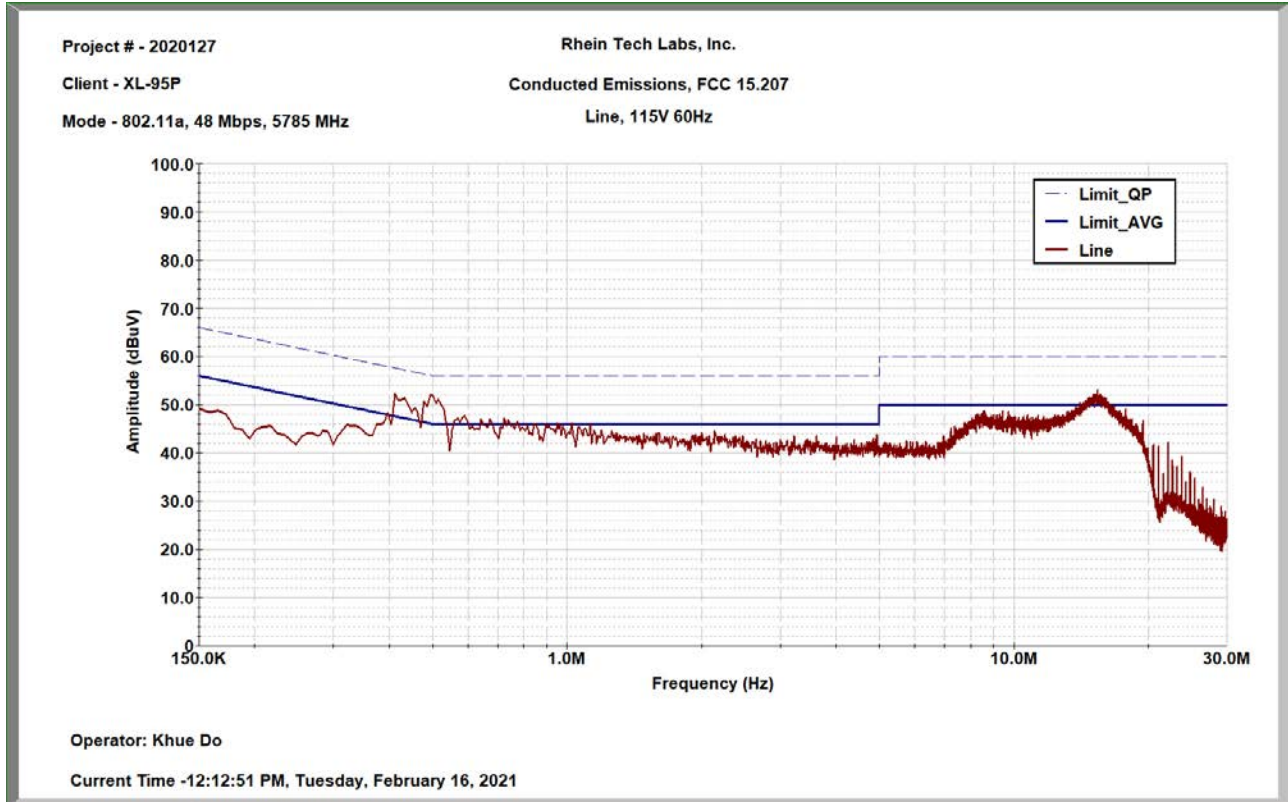


Table 9-12: Conducted Emissions Test Result, AC, Line, U-NII3, 5785 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.515	AVG	28.8	46.0	-17.2	Pass
0.515	QPK	40.8	56.0	-15.2	Pass
15.660	AVG	30.8	50.0	-19.2	Pass
15.660	QPK	47.9	60.0	-12.1	Pass

Plot 9-11: Conducted Emissions, AC, Neutral, U-NII3, 5825 MHz

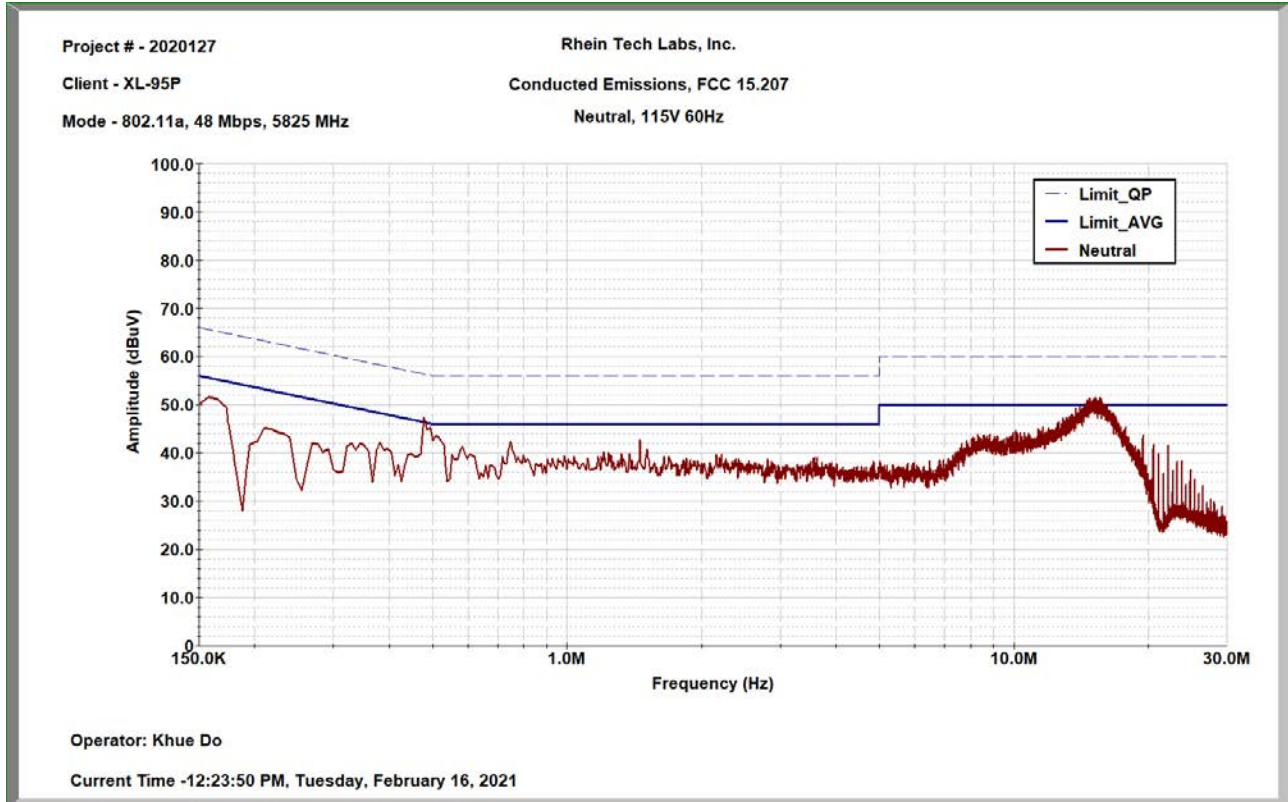


Table 9-13: Conducted Emissions Test Result, AC, Neutral, U-NII3, 5825 MHz

Frequency (MHz)	Detector Type	Emission (dBµV)	Limit (dBµV)	Margin (dB)	Result
15.597	AVG	30.1	50.0	-19.9	Pass
15.597	QPK	49.4	60.0	-10.6	Pass

Plot 9-12: Conducted Emissions, AC, Line, U-NII3, 5825 MHz

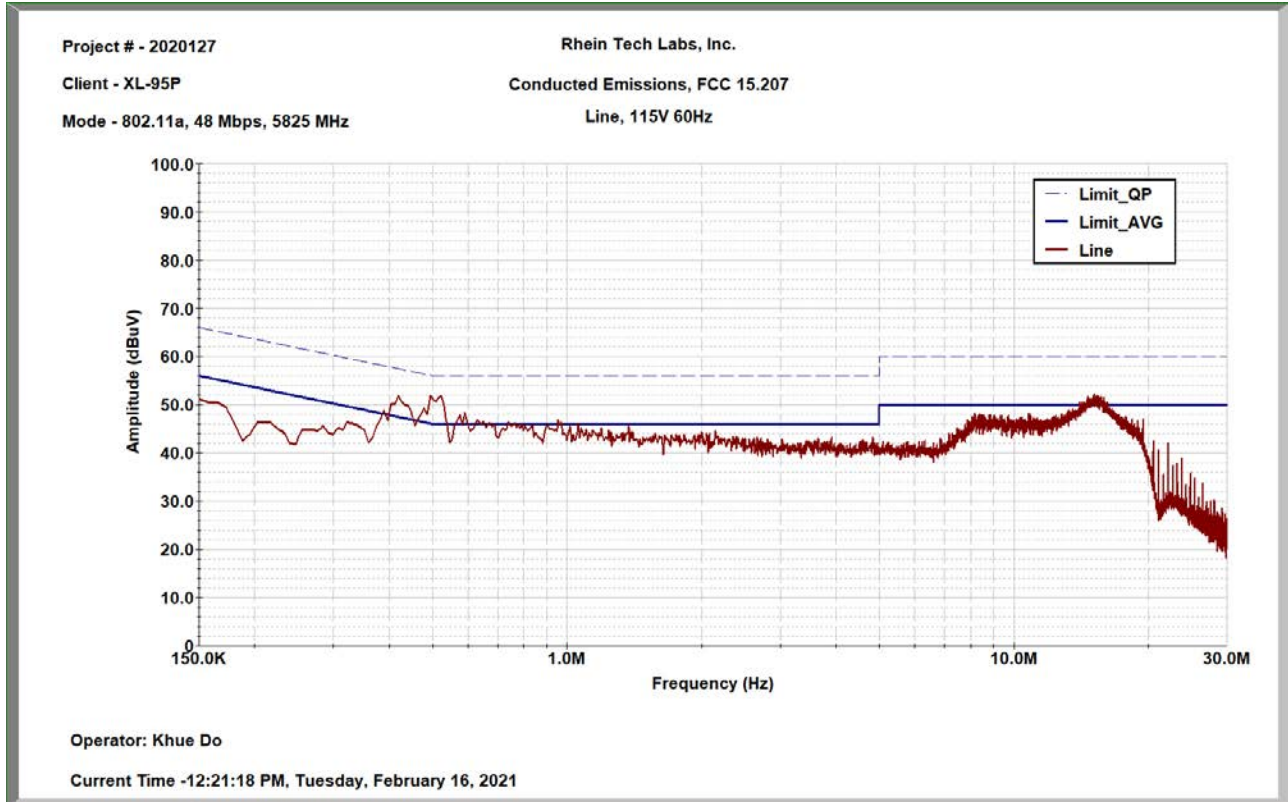


Table 9-14: Conducted Emissions Test Result, AC, Line, U-NII3, 5825 MHz

Frequency (MHz)	Detector Type	Emission (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.522	AVG	29.0	46.0	-17.0	Pass
0.522	QPK	41.4	56.0	-14.6	Pass
15.709	AVG	31.7	50.0	-18.3	Pass
15.709	QPK	49.1	60.0	-10.9	Pass

Measurement uncertainty: ±3.6 dB. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor k=2.

Results: Pass

Test Personnel:

Khue Do
 Test Engineer


 Signature

February 16, 2021
 Date of Test

10 Radiated Emissions – FCC 15.209; RSS-247 6.2; RSS-Gen 6.13/7.1

10.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

10.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (24.8 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Conversion of dBm to dBµV/m at 3 m:

$$\text{dB}\mu\text{V/m} = \text{dBm} + 104.7 - (20 * \text{LOG}(3\text{m})) = \text{dBm} + 95.2$$

Table 10-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900772	EMCO	3161-02	Horn Antenna (2.0–4.0 GHz)	9804-1044	05/17/2021
900321	EMCO	3161-03	Horn Antennas (4.0–8.2 GHz)	9508-1020	05/17/2021
900323	EMCO	3160-7	Horn Antennas (8.2–12.4 GHz)	9605-1054	05/17/2021
900356	EMCO	3160-08	Horn Antenna (12.4–18.0 GHz)	9607-1044	05/17/2021
901218	EMCO	3160-09	Horn Antenna (18.0–26.5 GHz)	960281-003	05/05/2021
901161	Advanced Technical Materials	28-25K-6	Waveguide Horn (26.5 GHz-40.0GHz)	B082304-01	04/15/2021
900791	Chase	CBL6111B	Bilog Antenna (30–2000 MHz)	N/A	10/04/2021
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	04/26/2021

10.3 Radiated Emissions Test Results

Table 10-2: Radiated Emissions Harmonics/Spurious – 5180 MHz, Restricted

Frequency (MHz)	Detector	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
15540	AVG	8.3	30.5	38.8	54.0	-15.2
15540	PK	19.0	30.5	49.5	74.0	-24.5
20720	AVG	5.6	33.8	39.4	54.0	-14.6
20720	PK	16.1	33.8	49.9	74.0	-24.1

Table 10-3: Radiated Emissions Harmonics/Spurious – 5180 MHz, Non-Restricted, Peak

Frequency (MHz)	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Converted Level (dBm)	Limit (dBm/MHz)	Margin (dB)
10360	20.4	26.4	46.8	-48.4	-27.0	-21.4
25900	16.1	34.7	50.8	-44.4	-27.0	-17.4
31080	17.5	39.8	57.3	-37.9	-27.0	-10.9

Table 10-4: Radiated Emissions Harmonics/Spurious – 5200 MHz, Restricted

Frequency (MHz)	Detector	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
15600	AVG	8.8	30.5	39.3	54.0	-14.7
15600	PK	18.5	30.5	49.0	74.0	-25.0
20800	AVG	5.1	33.7	38.8	54.0	-15.2
20800	PK	15.3	33.7	49.0	74.0	-25.0
31200	AVG	7.3	39.8	47.1	54.0	-6.9
31200	PK	18.0	39.8	57.8	74.0	-16.2

Table 10-5: Radiated Emissions Harmonics/Spurious – 5200 MHz, Non-Restricted, Peak

Frequency (MHz)	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Converted Level (dBm)	Limit (dBm/MHz)	Margin (dB)
10400	19.8	26.4	46.2	-49.0	-27.0	-22.0
26000	16.9	34.7	51.6	-43.6	-27.0	-16.6
36400	18.4	40.9	59.3	-35.9	-27.0	-8.9

Table 10-6: Radiated Emissions Harmonics/Spurious – 5240 MHz, Restricted

Frequency (MHz)	Detector	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
15720	AVG	10.0	30.5	40.5	54.0	-13.5
15720	PK	18.4	30.5	48.9	74.0	-25.1
20960	AVG	5.0	33.7	38.7	54.0	-15.3
20960	PK	15.8	33.7	49.5	74.0	-24.5
31440	AVG	7.6	39.8	47.4	54.0	-6.6
31440	PK	17.4	39.8	57.2	74.0	-16.8

Table 10-7: Radiated Emissions Harmonics/Spurious – 5240 MHz, Non-Restricted, Peak

Frequency (MHz)	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Converted Level (dBm)	Limit (dBm/MHz)	Margin (dB)
10480	17.4	26.5	43.9	-51.3	-27.0	-24.3
26200	17.0	34.8	51.8	-43.4	-27.0	-16.4
36680	18.9	40.9	59.8	-35.4	-27.0	-8.4

Table 10-8: Radiated Emissions Harmonics/Spurious – 5745 MHz, Restricted

Frequency (MHz)	Detector	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11490	AVG	10.7	26.6	37.3	54.0	-16.7
11490	PK	19.7	26.6	46.3	74.0	-27.7
17235	AVG	6.2	30.4	36.6	54.0	-17.4
17235	PK	16.7	30.4	47.1	74.0	-26.9
22980	AVG	5.8	34.2	40.0	54.0	-14.0
22980	PK	15.9	34.2	50.1	74.0	-23.9

Table 10-9: Radiated Emissions Harmonics/Spurious – 5745 MHz, Non-Restricted, Peak

Frequency (MHz)	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Converted Level (dBm)	Limit (dBm/MHz)	Margin (dB)
28725	18.0	39.4	57.4	-37.8	-27.0	-10.8
34470	17.5	40.9	58.4	-36.8	-27.0	-9.8

Table 10-10: Radiated Emissions Harmonics/Spurious – 5785 MHz, Restricted

Frequency (MHz)	Detector	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
11570	AVG	12.8	26.6	39.4	54.0	-14.6
11570	PK	19.8	26.6	46.4	74.0	-27.6
17355	AVG	7.8	30.5	38.3	54.0	-15.7
17355	PK	18.2	30.5	48.7	74.0	-25.3
23140	AVG	6.0	34.1	40.1	54.0	-13.9
23140	PK	16.3	34.1	50.4	74.0	-23.6

Table 10-11: Radiated Emissions Harmonics/Spurious – 5785 MHz, Non-Restricted, Peak

Frequency (MHz)	Raw Level (dB μ V/m)	SCF (dB)	Corrected Level (dB μ V/m)	Converted Level (dBm)	Limit (dBm/MHz)	Margin (dB)
28925	16.6	39.5	56.1	-39.1	-27.0	-12.1
34710	18.1	40.9	59.0	-36.2	-27.0	-9.2

Table 10-12: Radiated Emissions Harmonics/Spurious – 5825 MHz, Restricted

Frequency (MHz)	Detector	Raw Level (dBµV/m)	SCF (dB)	Corrected Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
11650	AVG	11.8	26.7	38.5	54.0	-15.5
11650	PK	19.7	26.7	46.4	74.0	-27.6
17475	AVG	7.8	30.5	38.3	54.0	-15.7
17475	PK	16.5	30.5	47.0	74.0	-27.0
23300	AVG	6.5	34.1	40.6	54.0	-13.4
23300	PK	16.6	34.1	50.7	74.0	-23.3

Table 10-13: Radiated Emissions Harmonics/Spurious – 5825 MHz, Non-Restricted, Peak

Frequency (MHz)	Raw Level (dBµV/m)	SCF (dB)	Corrected Level (dBµV/m)	Converted Level (dBm)	Limit (dBm/MHz)	Margin (dB)
29125	16.2	39.5	55.7	-39.5	-27.0	-12.5
34950	18.0	40.9	58.9	-36.3	-27.0	-9.3

Table 10-14: Unintentional Emissions Test Data

Temperature: 2.8°C Humidity: 76%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (°)	Antenna Height (m)	Analyzer Reading (dBµV)	Site Correction Factor (dB/m)	Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pass/Fail
133.790	QPK	V	90	1.0	38.6	-17.6	21.0	43.5	-22.5	Pass
250.000	QPK	V	180	2.0	53.7	-15.3	38.4	46.0	-7.6	Pass
350.000	QPK	V	315	2.0	45.1	-12.3	32.8	46.0	-13.2	Pass
400.000	QPK	V	180	2.0	37.3	-10.6	26.7	46.0	-19.3	Pass
461.600	QPK	H	0	2.0	35.5	-9.2	26.3	46.0	-19.7	Pass
500.000	QPK	V	180	2.5	38.1	-8.4	29.7	46.0	-16.3	Pass

Measurement uncertainty: ±4.6 dB. This measurement uncertainty is an expanded uncertainty for 95% confidence level received with a coverage factor k=2.

Results: Pass

Test Personnel:

Khue Do Test Engineer	 Signature	December 22 – 23, 2020 Dates of Test
--------------------------	--	---

11 Conclusion

The data in this NII measurement report shows that the EUT as tested, Harris Corporation XL-95P 7/800 MHz Portable Land Mobile Radio, Model #/HVIN XL-x5-7/8, FCC ID: OWDTR-0162-E, IC: 3636B-0162, complies with the applicable requirements of FCC Parts 2 and 15 and ISED RSS-247 and RSS-Gen.