




Plot 8-476: OBW 99%, 774.9875 MHz, C4FM

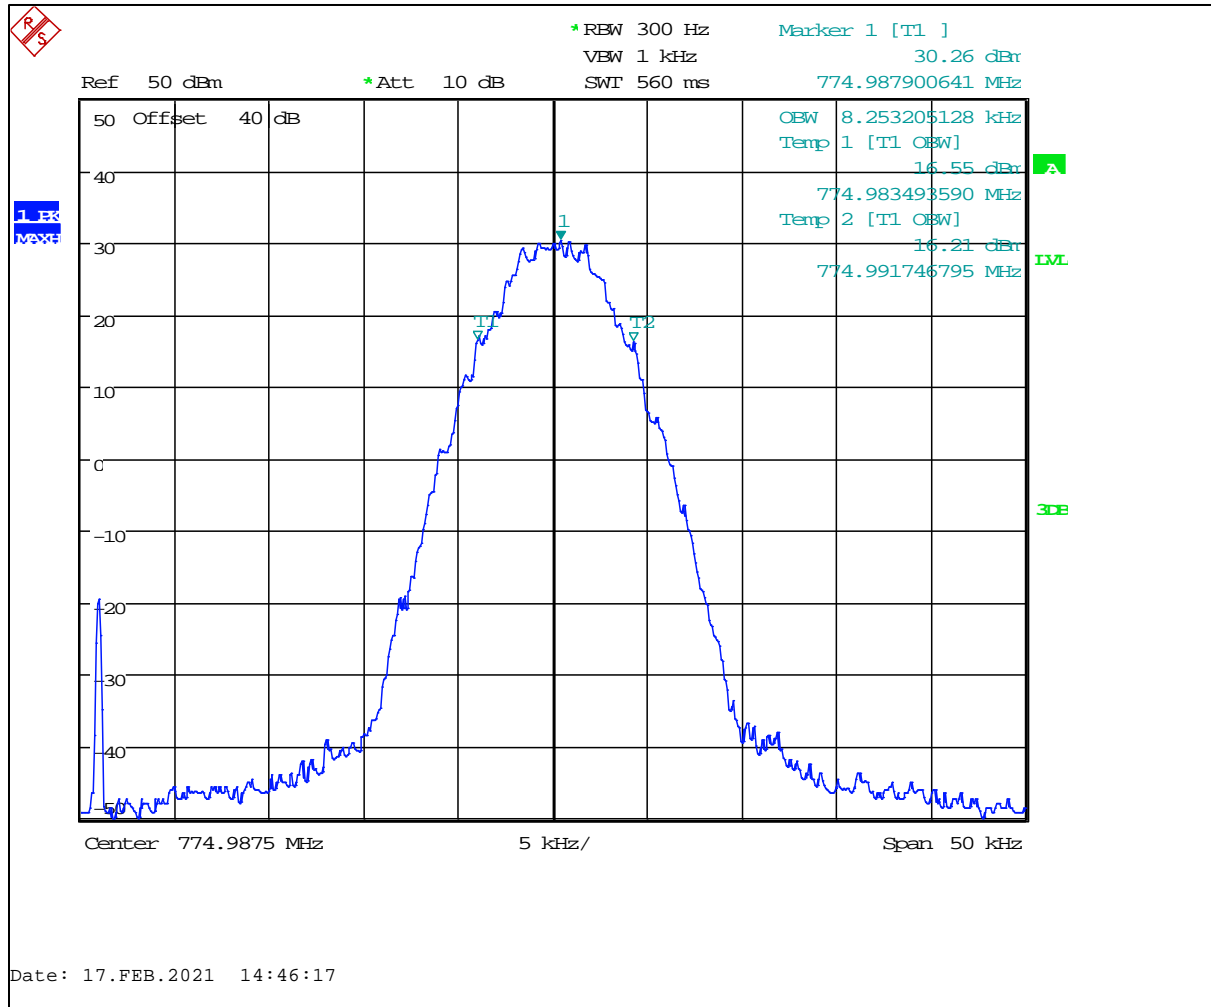


Plot 8-477: OBW 99%, 774.9875 MHz, H-CPM TDMA

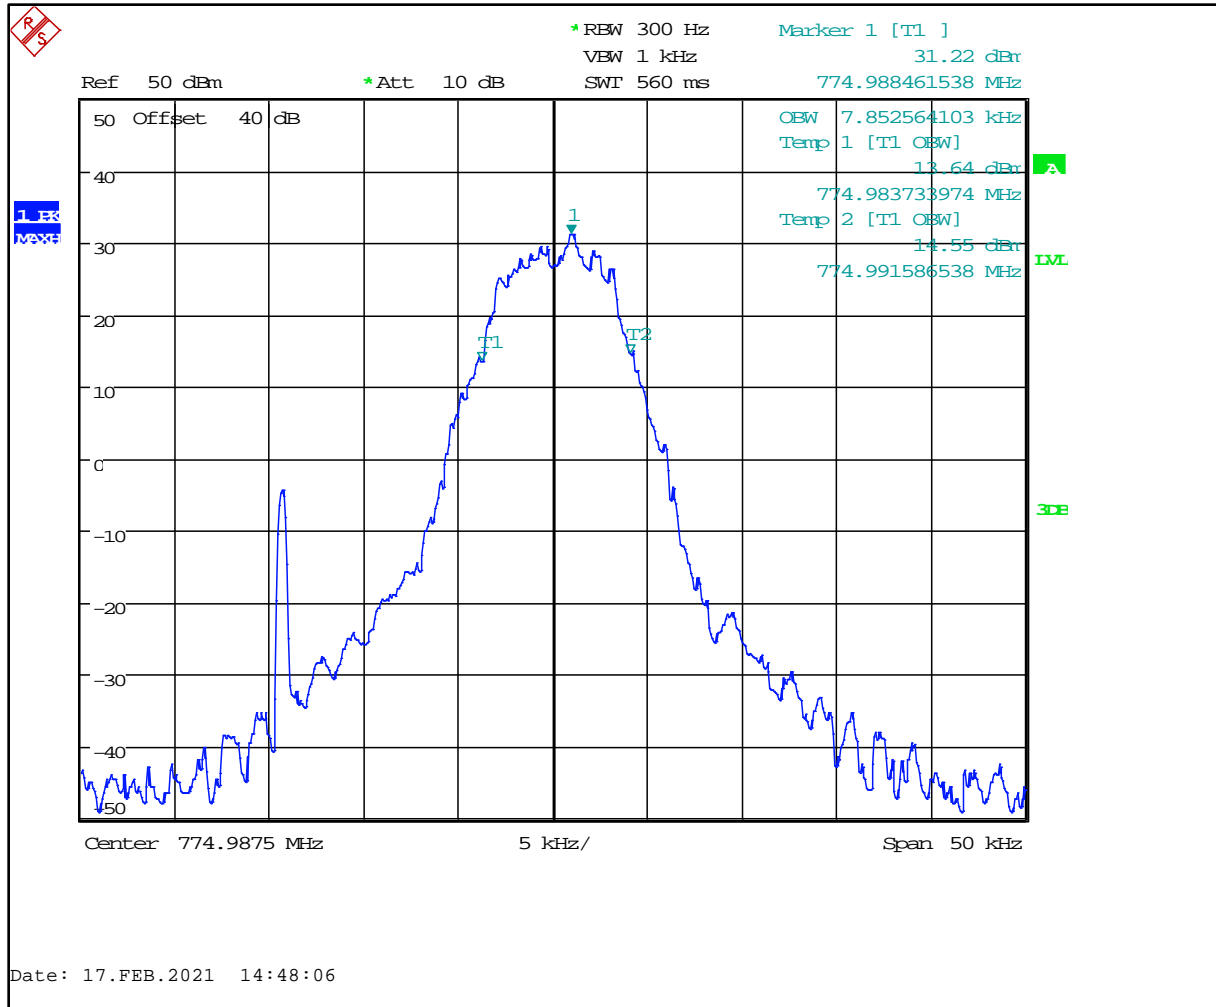

Plot 8-478: OBW 99%, 774.9875 MHz, NB 2 FSK

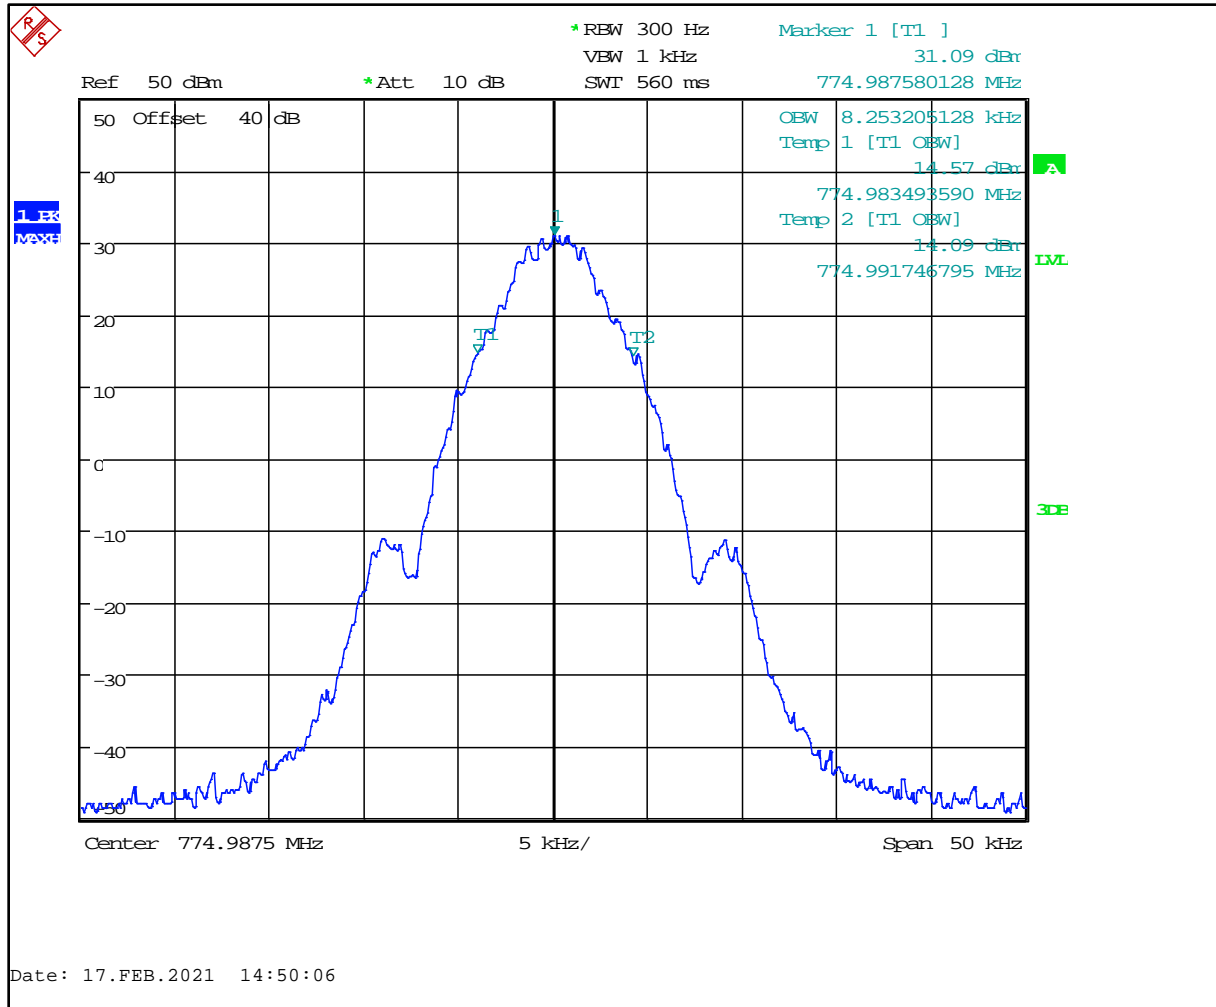


Plot 8-479: OBW 99%, 774.9875 MHz, NPSPAC 2 FSK

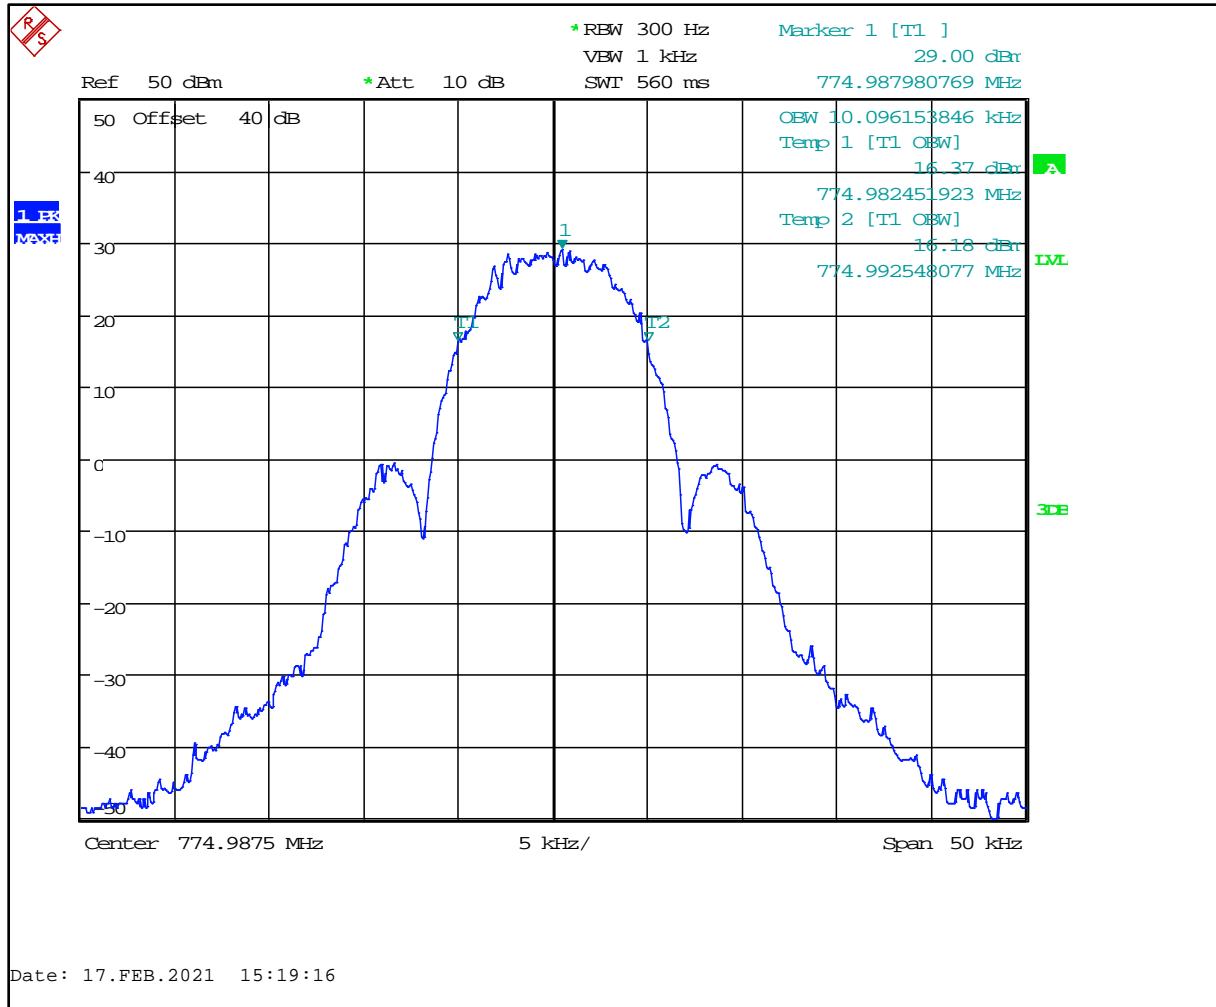

Plot 8-480: OBW 99%, 774.9875 MHz, WB 2 FSK




Plot 8-481: OBW 99%, 774.9875 MHz, HVD SMR

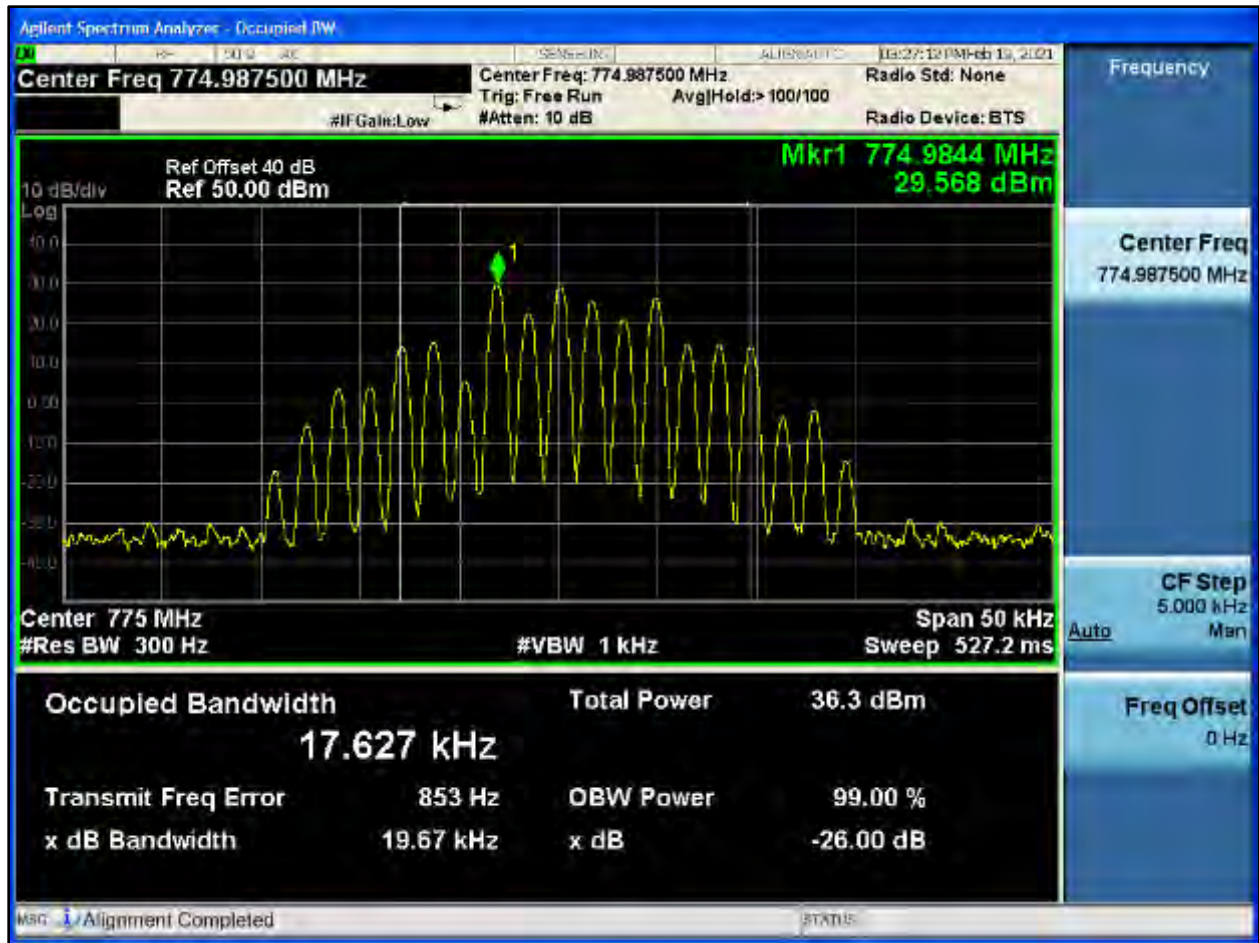


Plot 8-482: OBW 99%, 774.9875 MHz, HVD NPSPAC



Plot 8-483: OBW 99%, 775.9875 MHz, NB

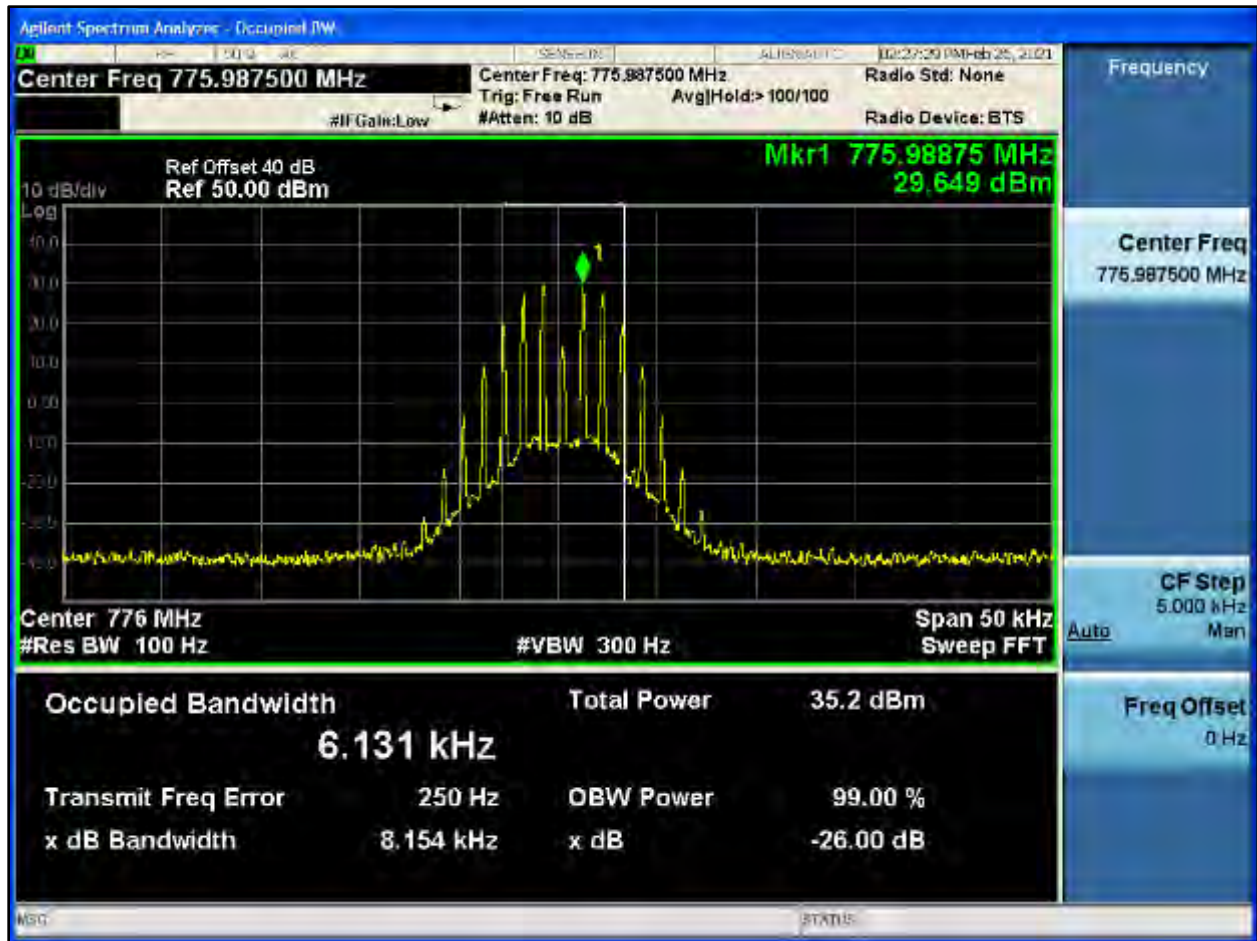


Plot 8-484: OBW 99%, 775.9875 MHz, NPSPAC

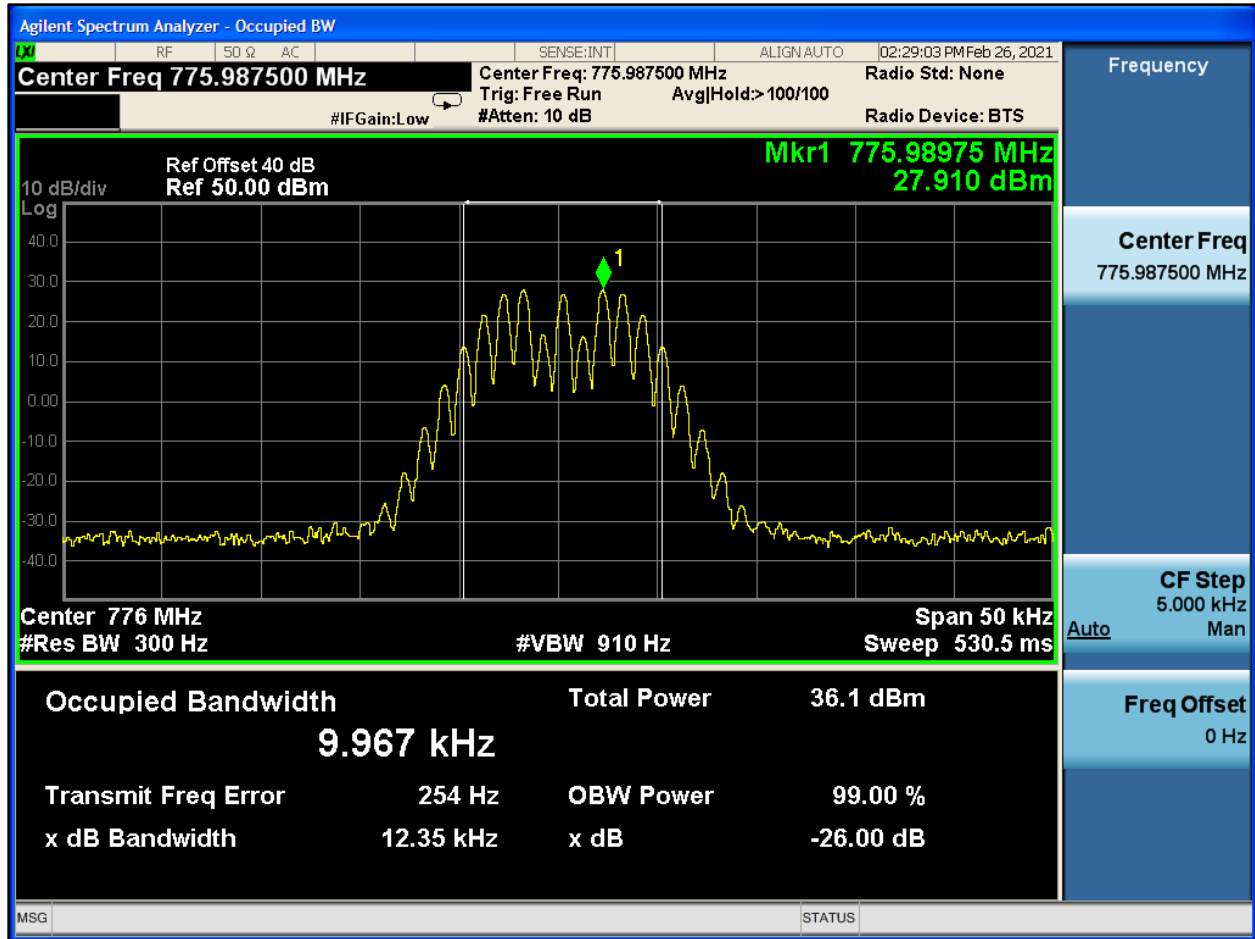

Plot 8-485: OBW 99%, 775.9875 MHz, WB



Plot 8-486: OBW 99%, 775.9875 MHz, C4FM

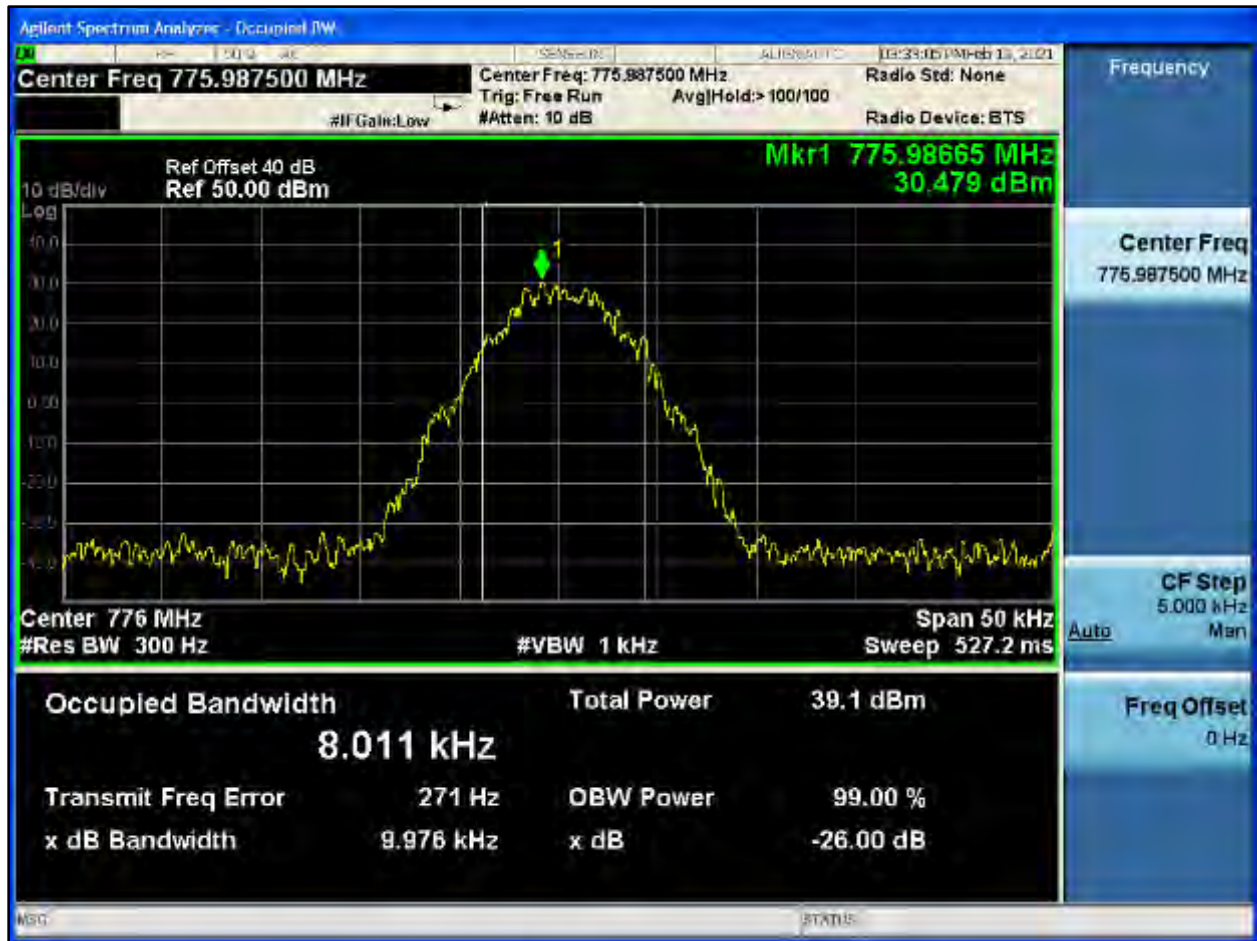


Plot 8-487: OBW 99%, 775.9875 MHz, H-CPM TDMA



Plot 8-488: OBW 99%, 775.9875 MHz, NB 2 FSK




Plot 8-489: OBW 99%, 775.9875 MHz, NPSPAC 2 FSK

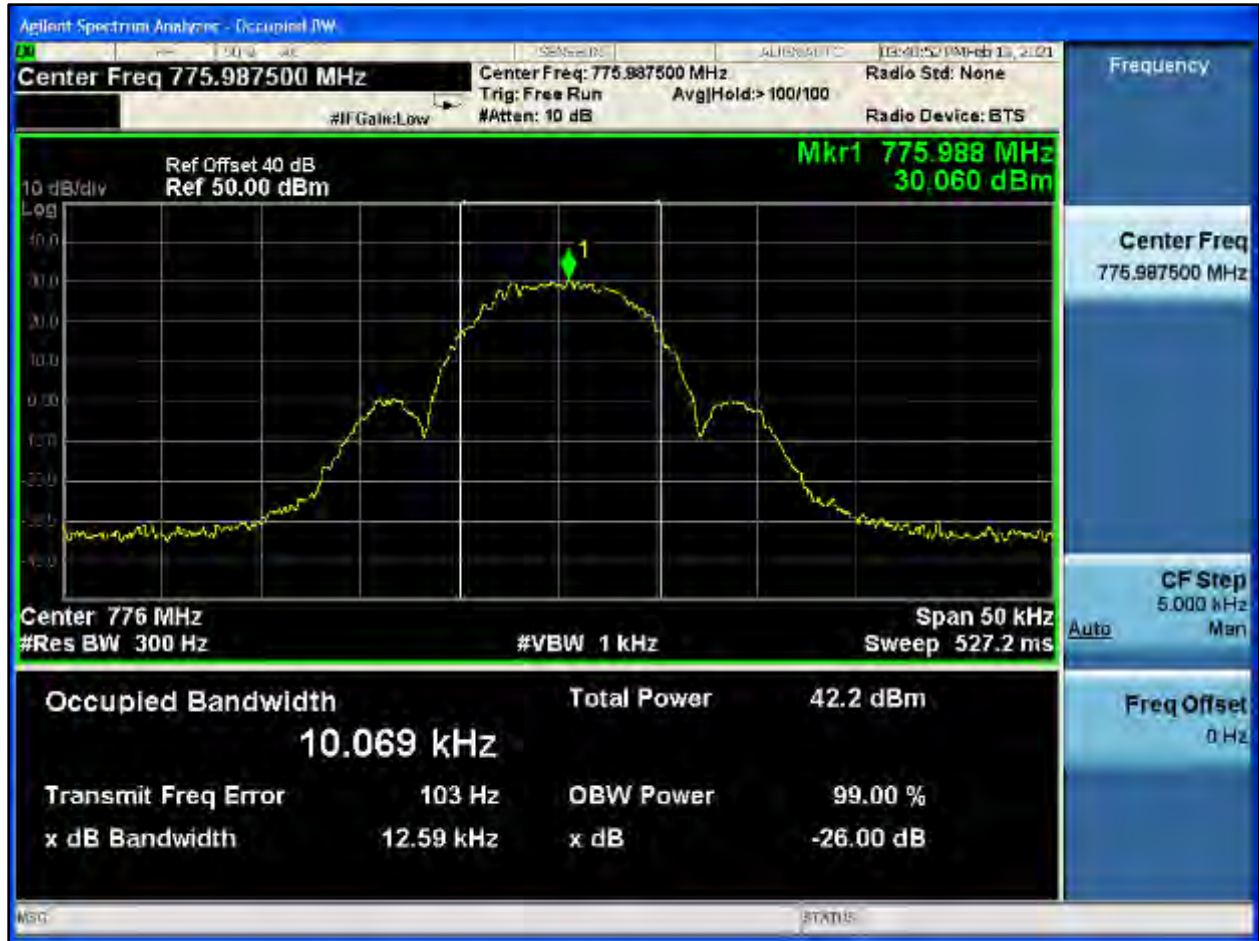


Plot 8-490: OBW 99%, 775.9875 MHz, WB 2 FSK




Plot 8-491: OBW 99%, 775.9875 MHz, HVD SMR

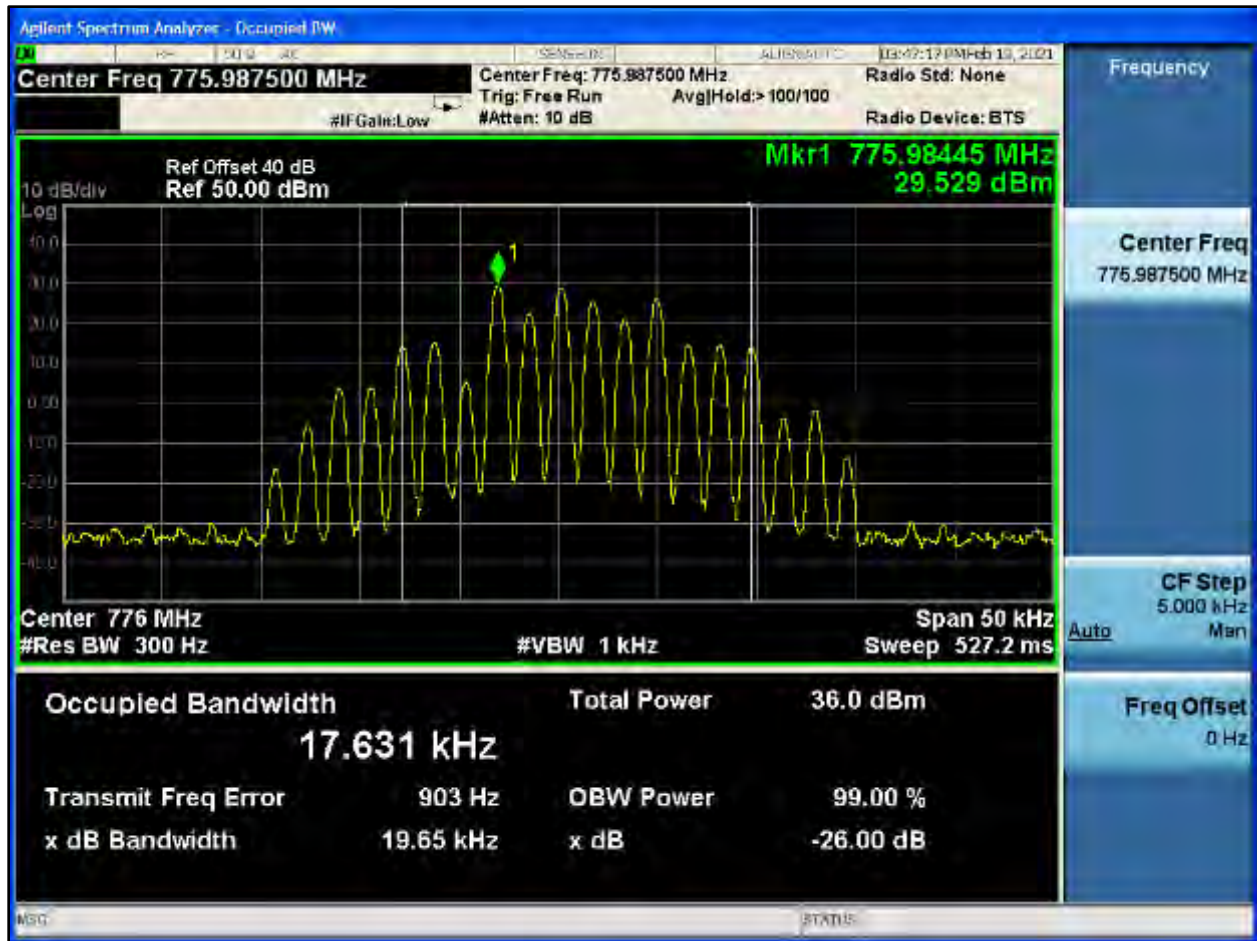


Plot 8-492: OBW 99%, 775.9875 MHz, HVD NPSPAC

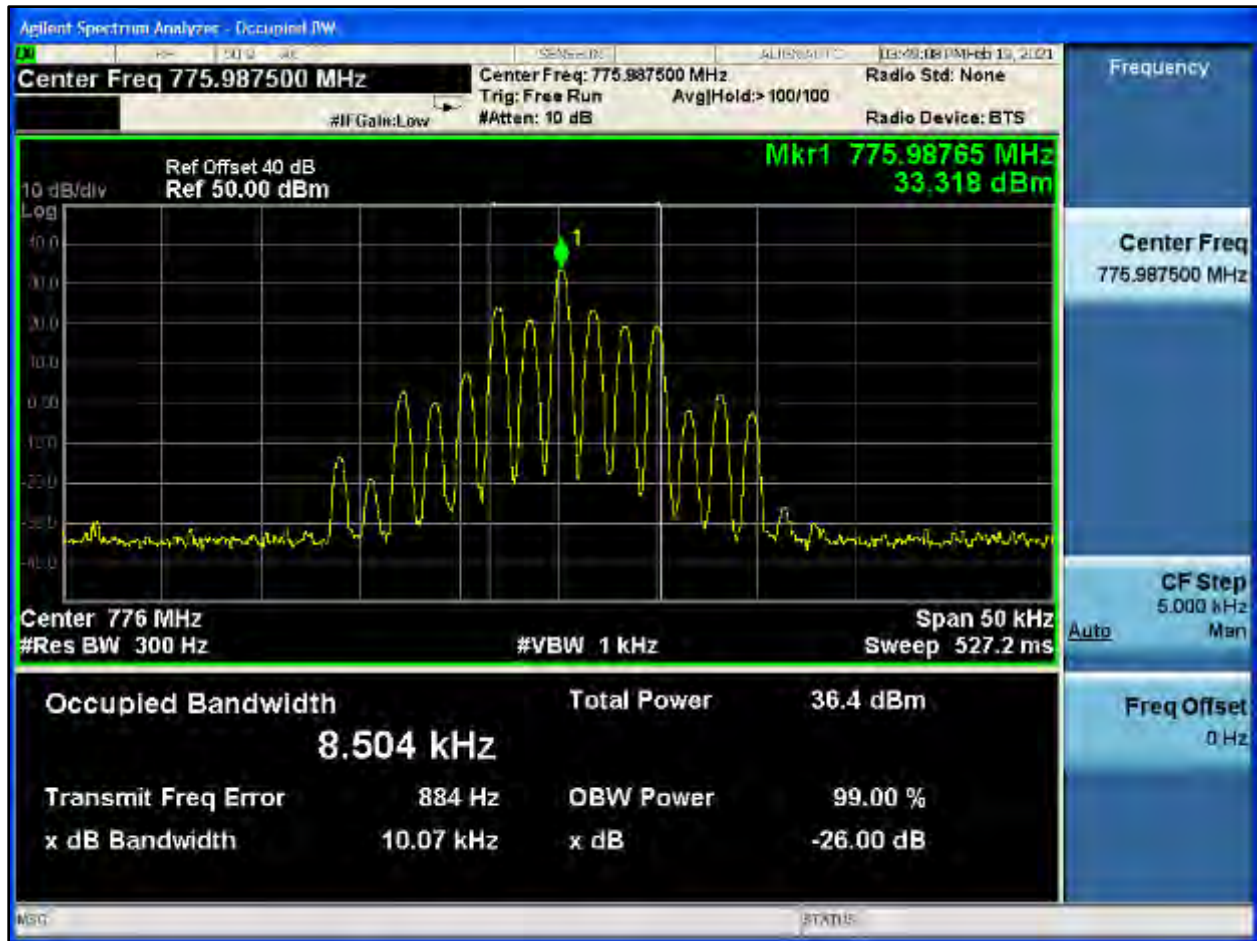

Plot 8-493: OBW 99%, 793.0125 MHz, NB

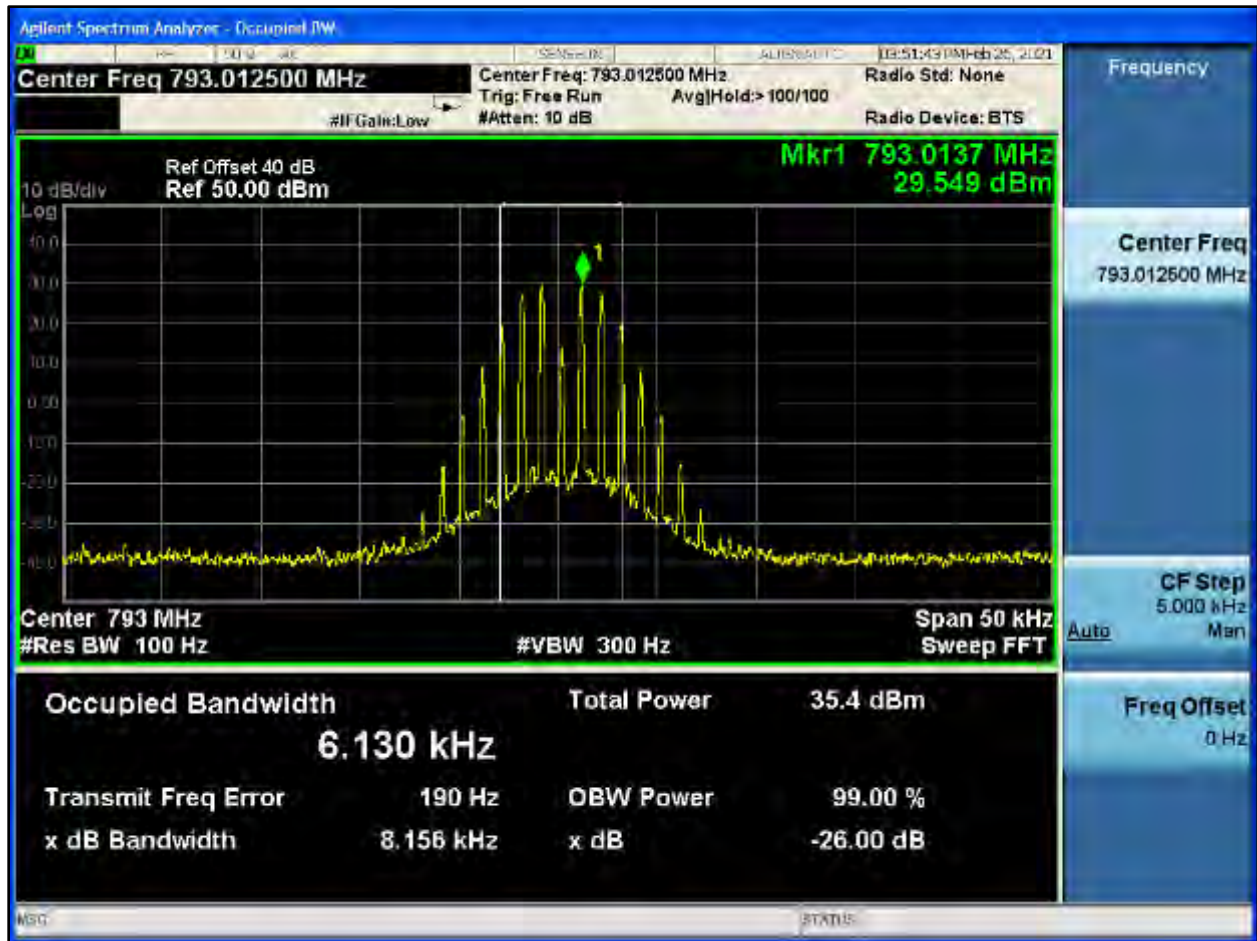


Plot 8-494: OBW 99%, 793.0125 MHz, NPSPAC

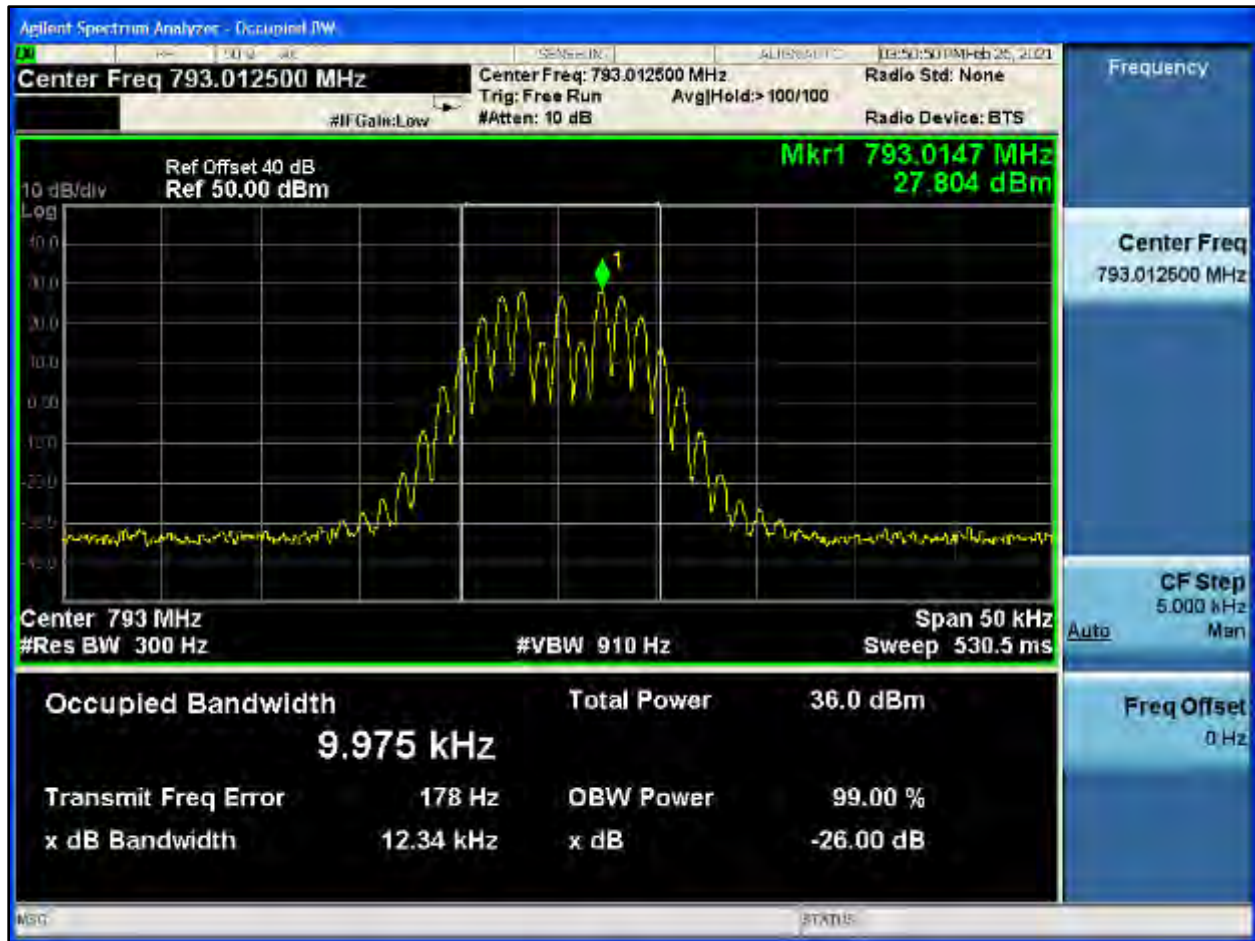


Plot 8-495: OBW 99%, 793.0125 MHz, WB



Plot 8-496: OBW 99%, 793.0125 MHz, C4FM

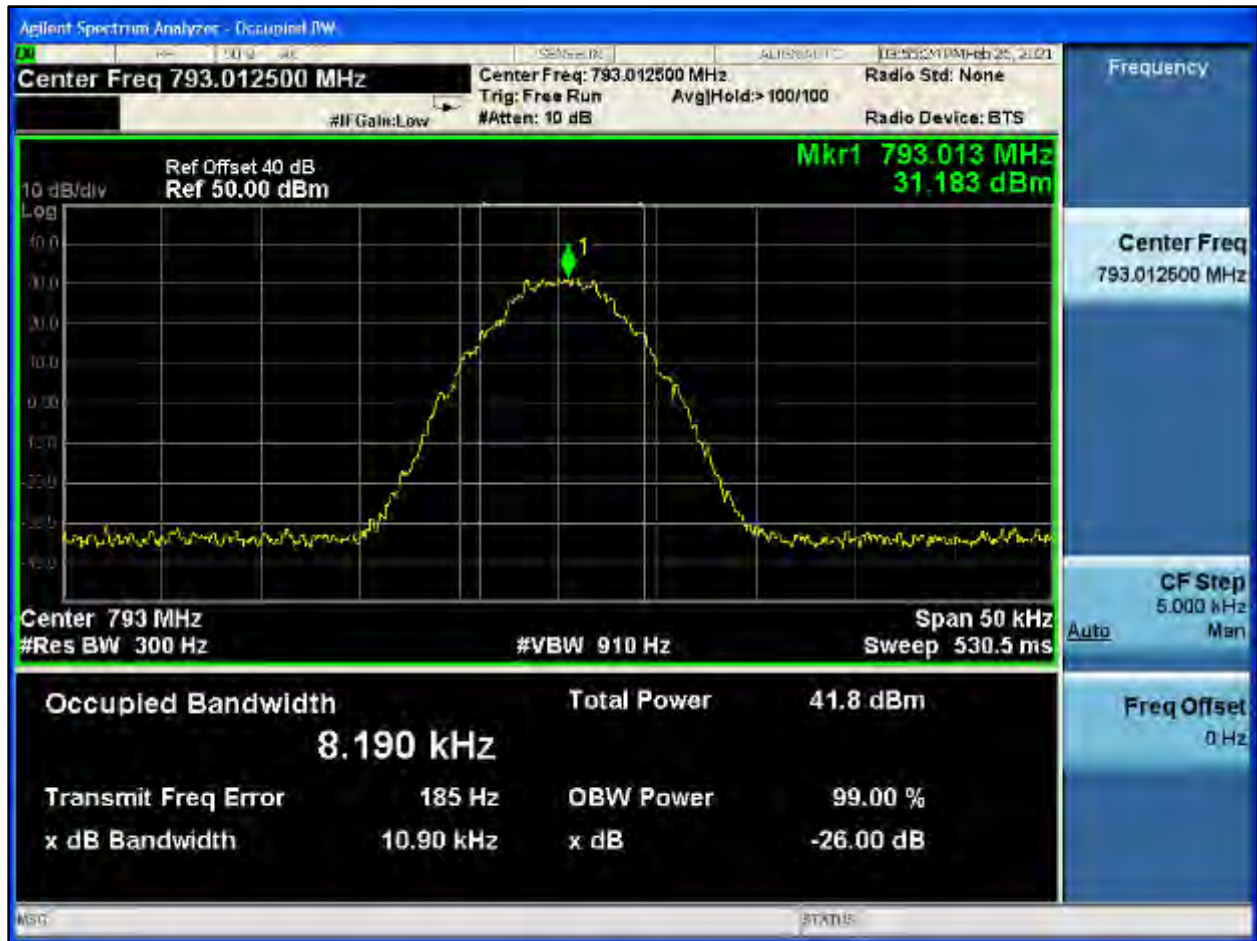

Plot 8-497: OBW 99%, 793.0125 MHz, H-CPM TDMA

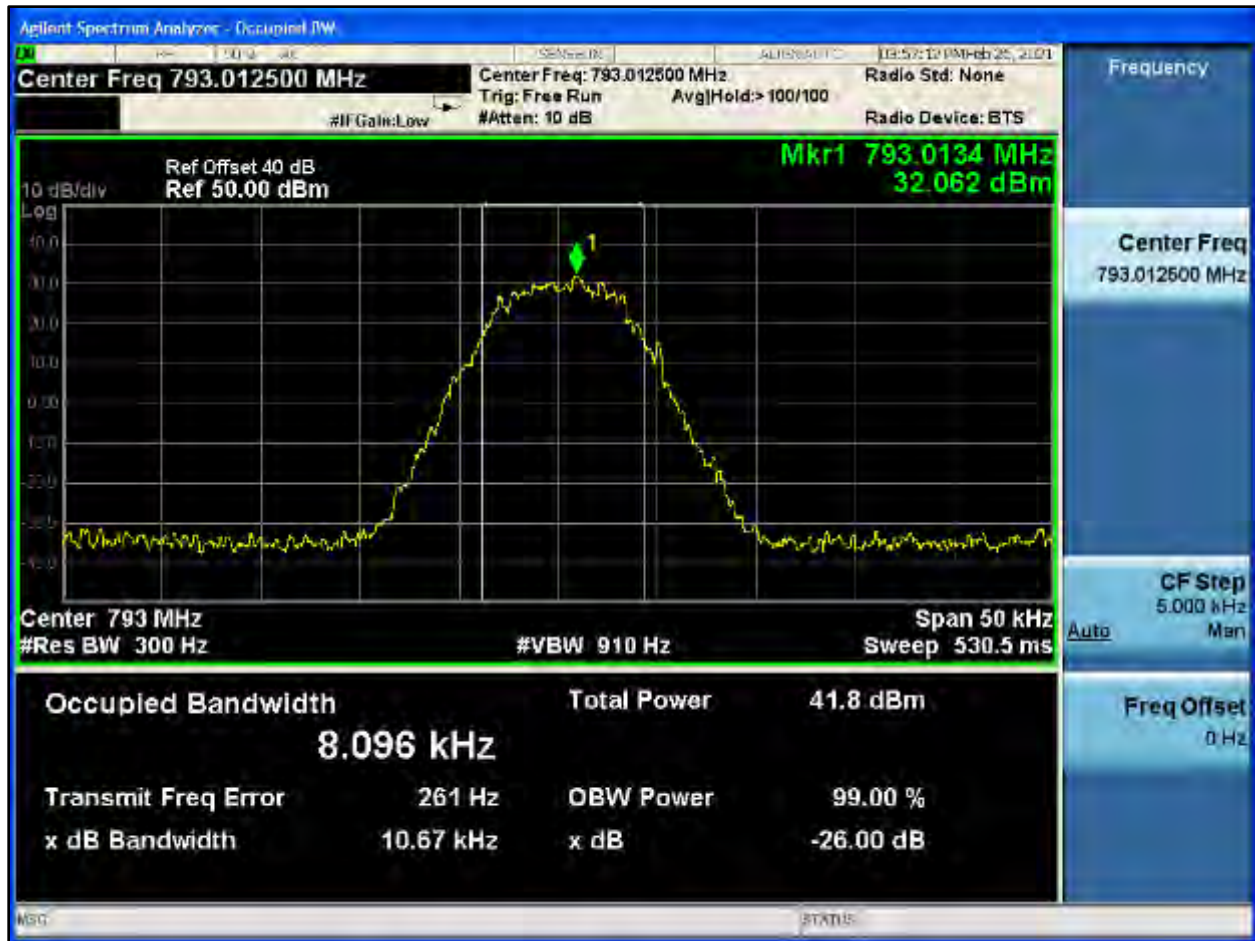

Plot 8-498: OBW 99%, 793.0125 MHz, NB 2 FSK




Plot 8-499: OBW 99%, 793.0125 MHz, NPSPAC 2 FSK




Plot 8-500: OBW 99%, 793.0125 MHz, WB 2 FSK




Plot 8-501: OBW 99%, 793.0125 MHz, HVD SMR

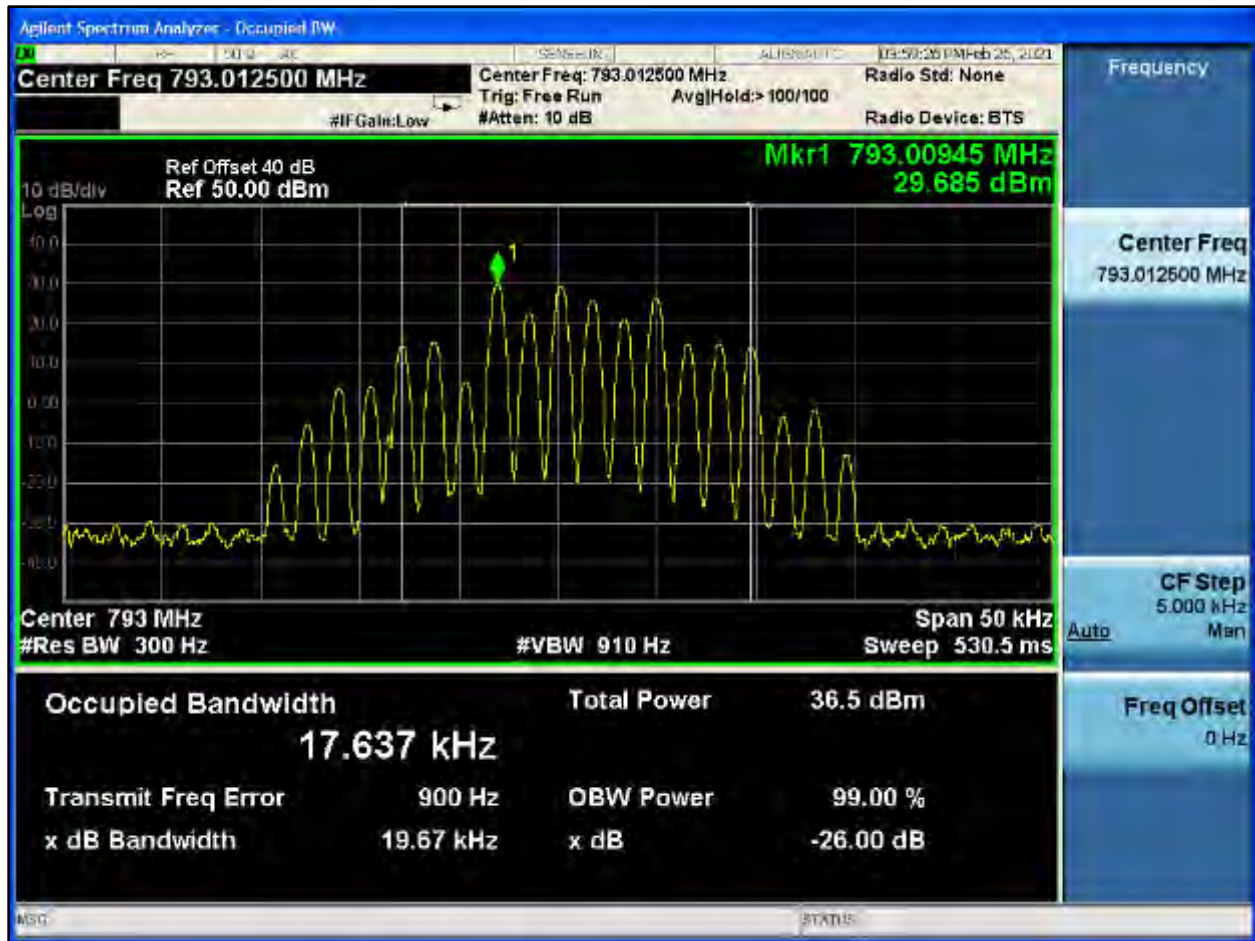


Plot 8-502: OBW 99%, 793.0125 MHz, HVD NPSPAC

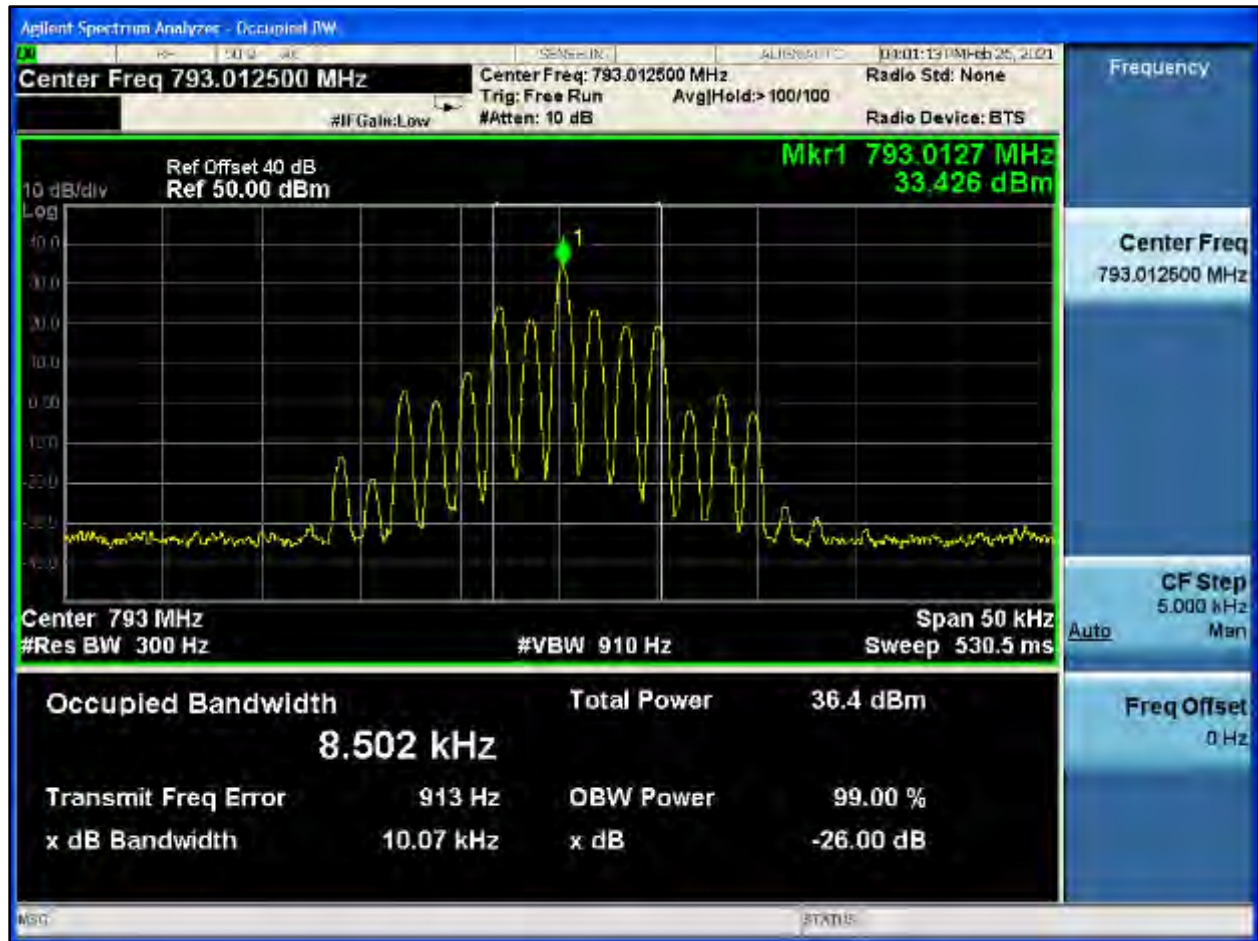

Plot 8-503: OBW 99%, 798.0125 MHz, NB

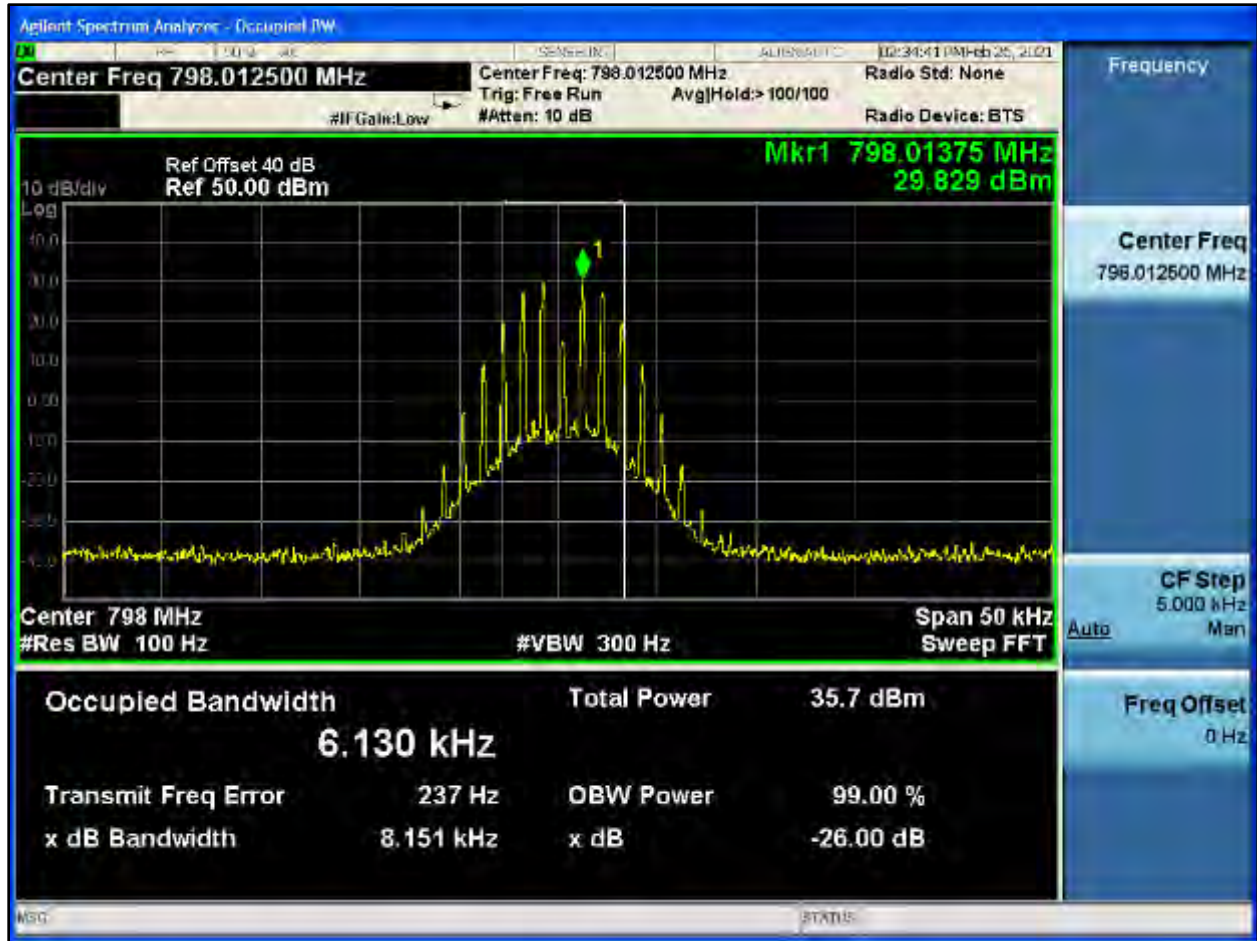


Plot 8-504: OBW 99%, 798.0125 MHz, NPSPAC

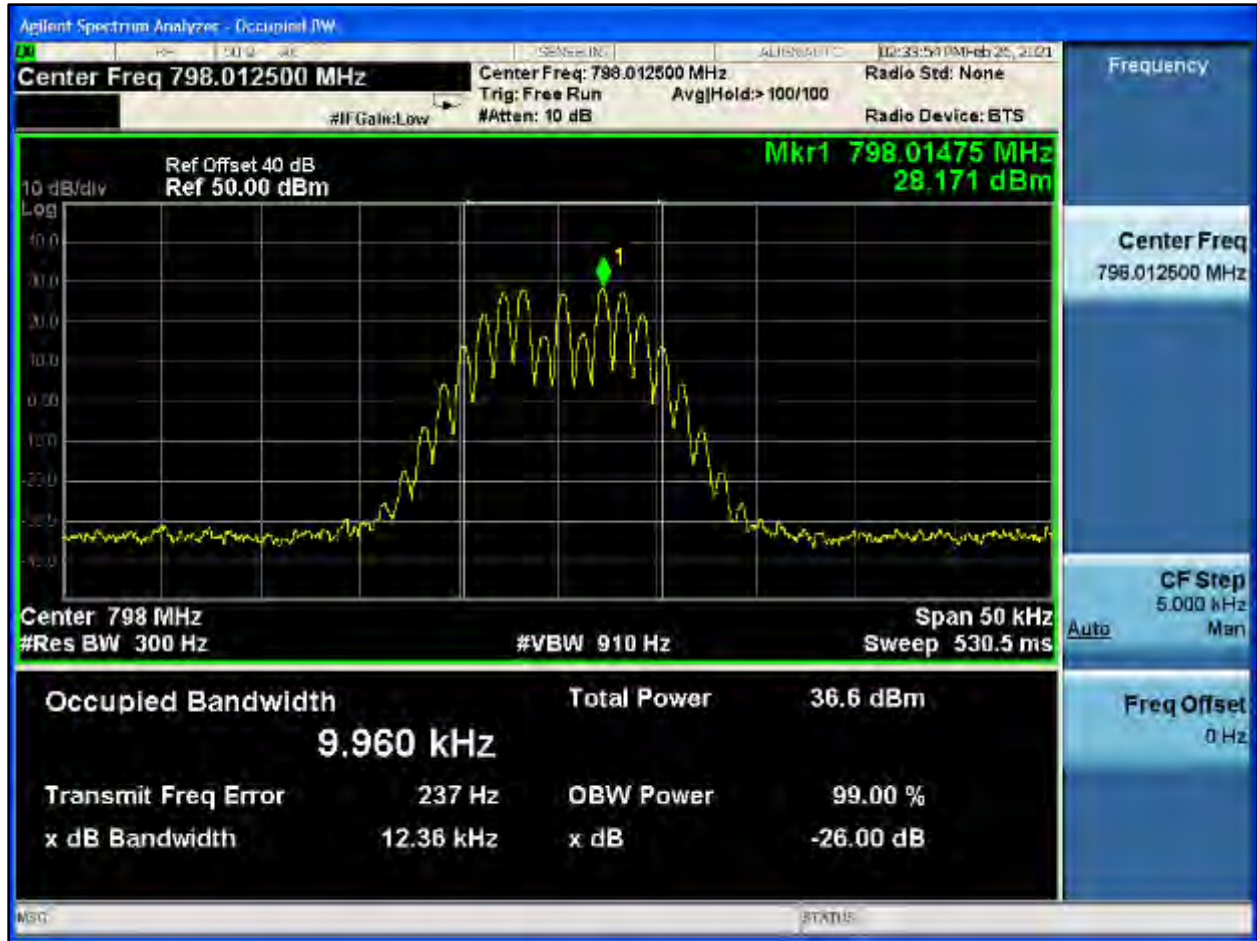


Plot 8-505: OBW 99%, 798.0125 MHz, WB




Plot 8-506: OBW 99%, 798.0125 MHz, C4FM

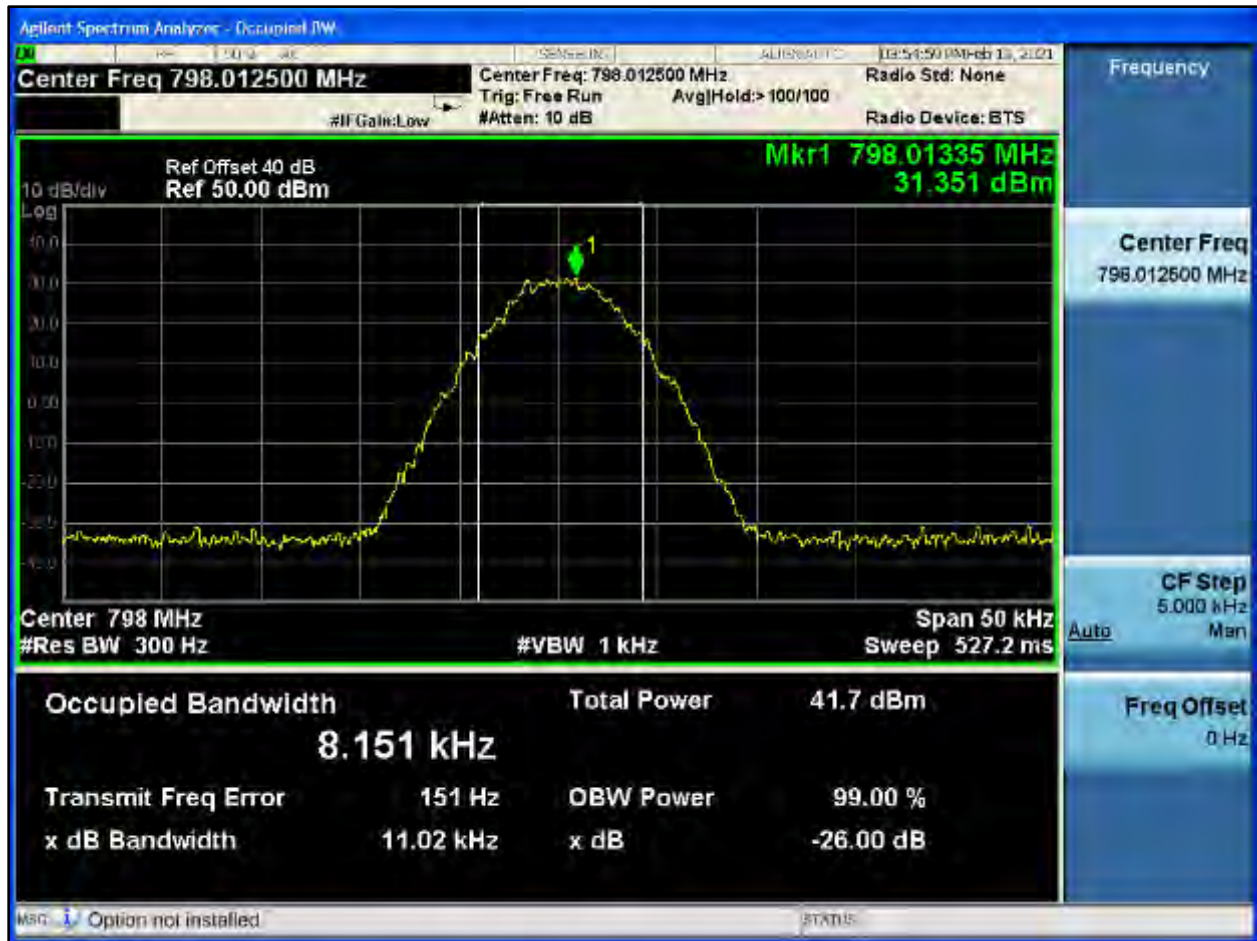

Plot 8-507: OBW 99%, 798.0125 MHz, H-CPM TDMA

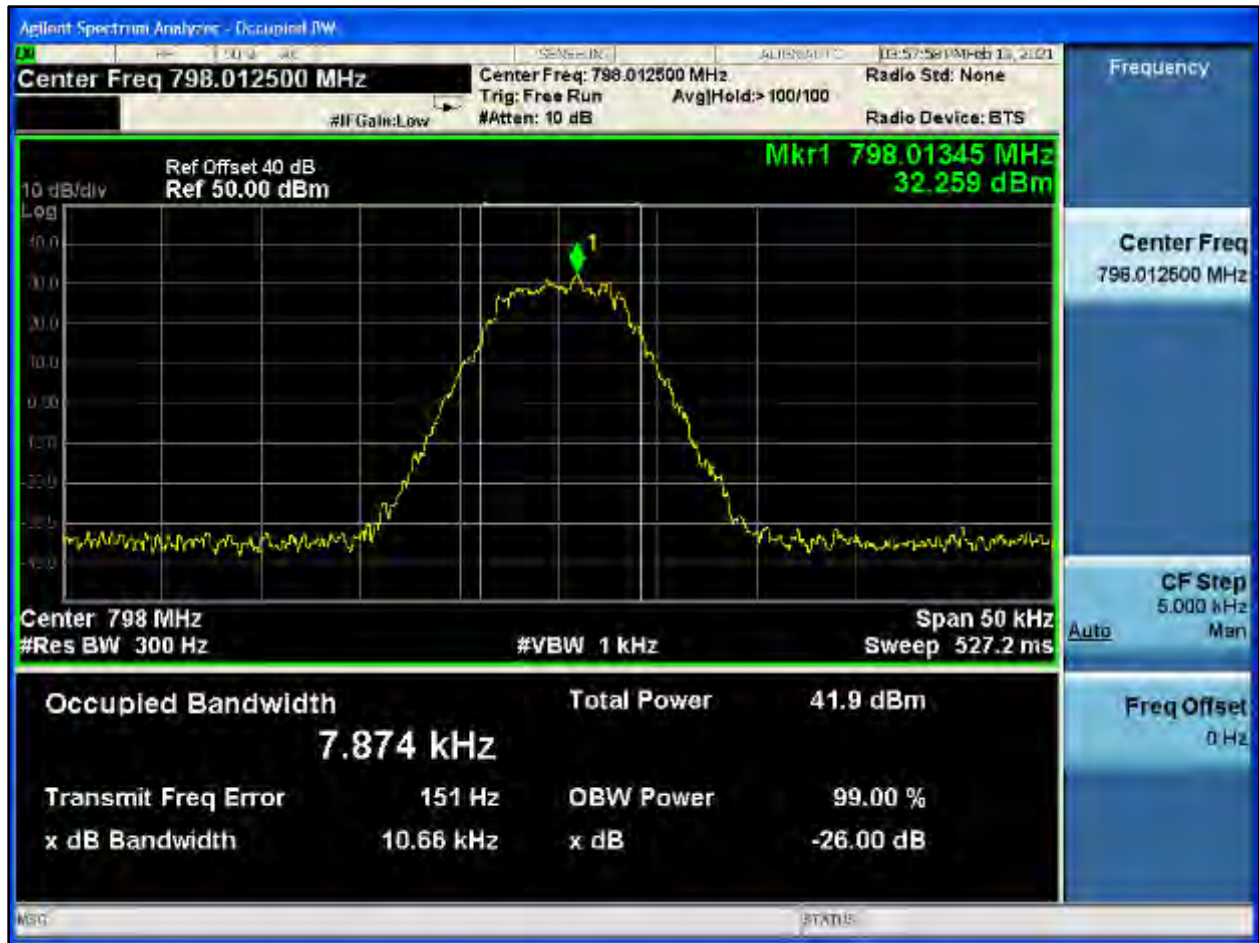

Plot 8-508: OBW 99%, 798.0125 MHz, NB 2 FSK

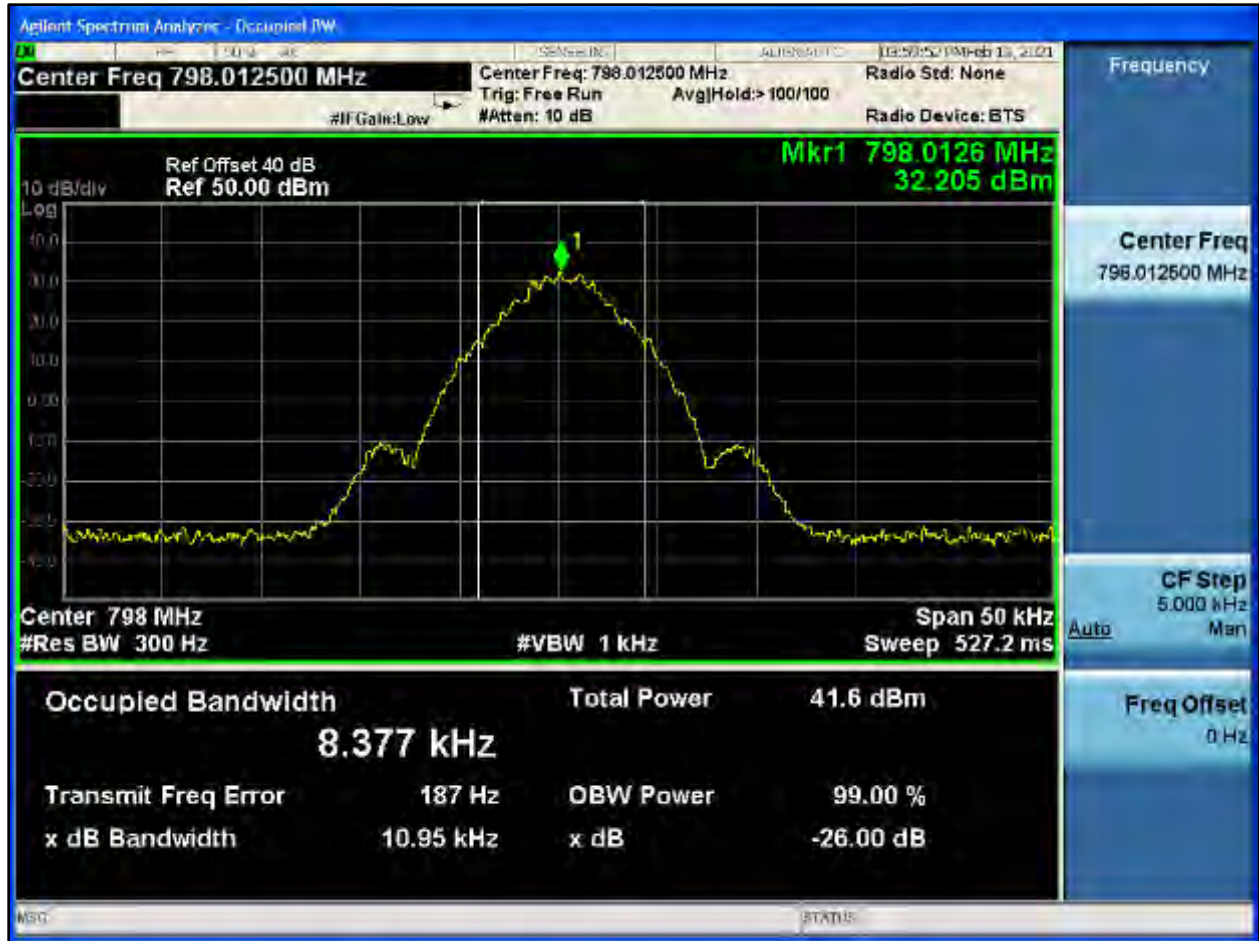


Plot 8-509: OBW 99%, 798.0125 MHz, NPSPAC 2 FSK




Plot 8-510: OBW 99%, 798.0125 MHz, WB 2 FSK




Plot 8-511: OBW 99%, 798.0125 MHz, HVD SMR

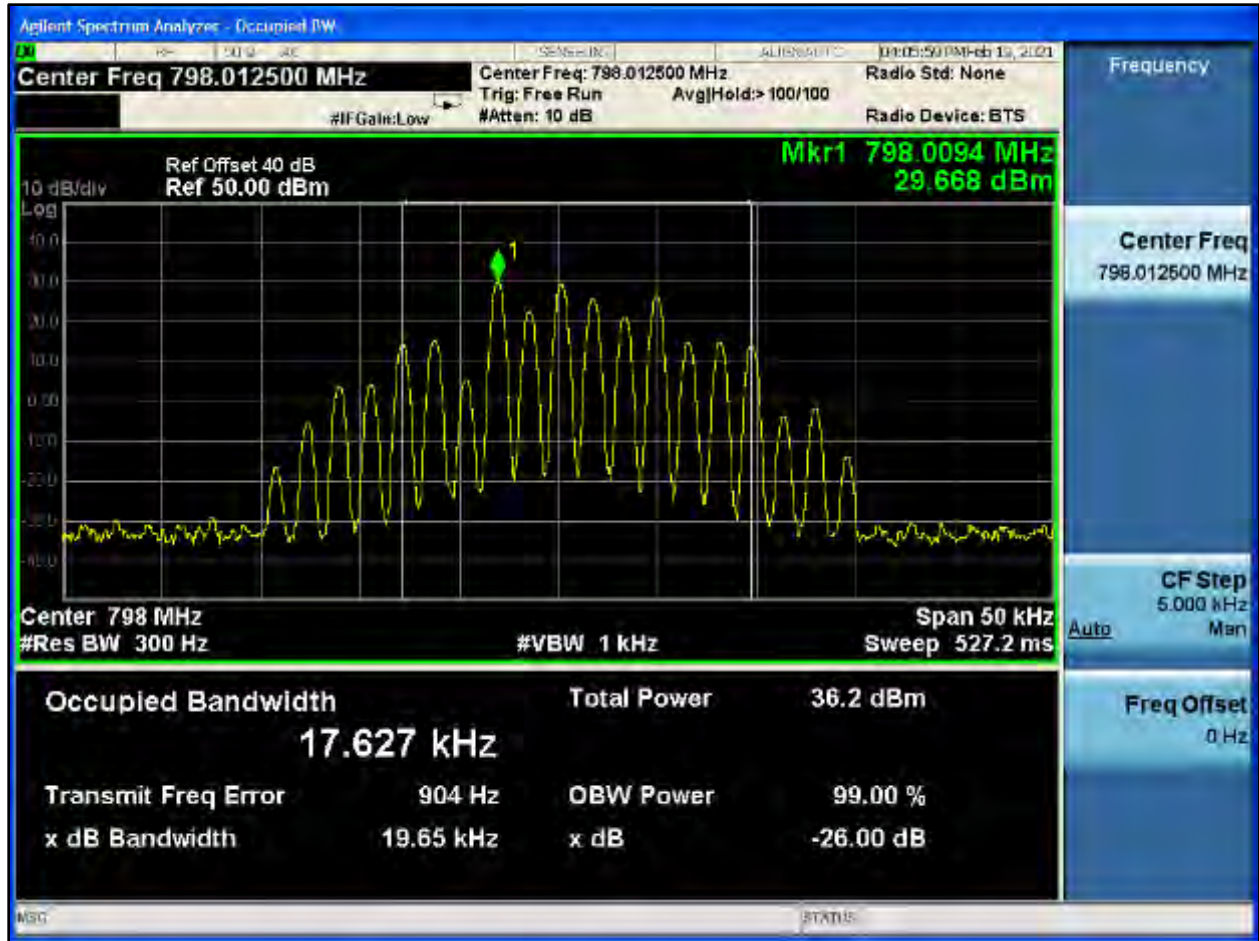


Plot 8-512: OBW 99%, 798.0125 MHz, HVD NPSPAC

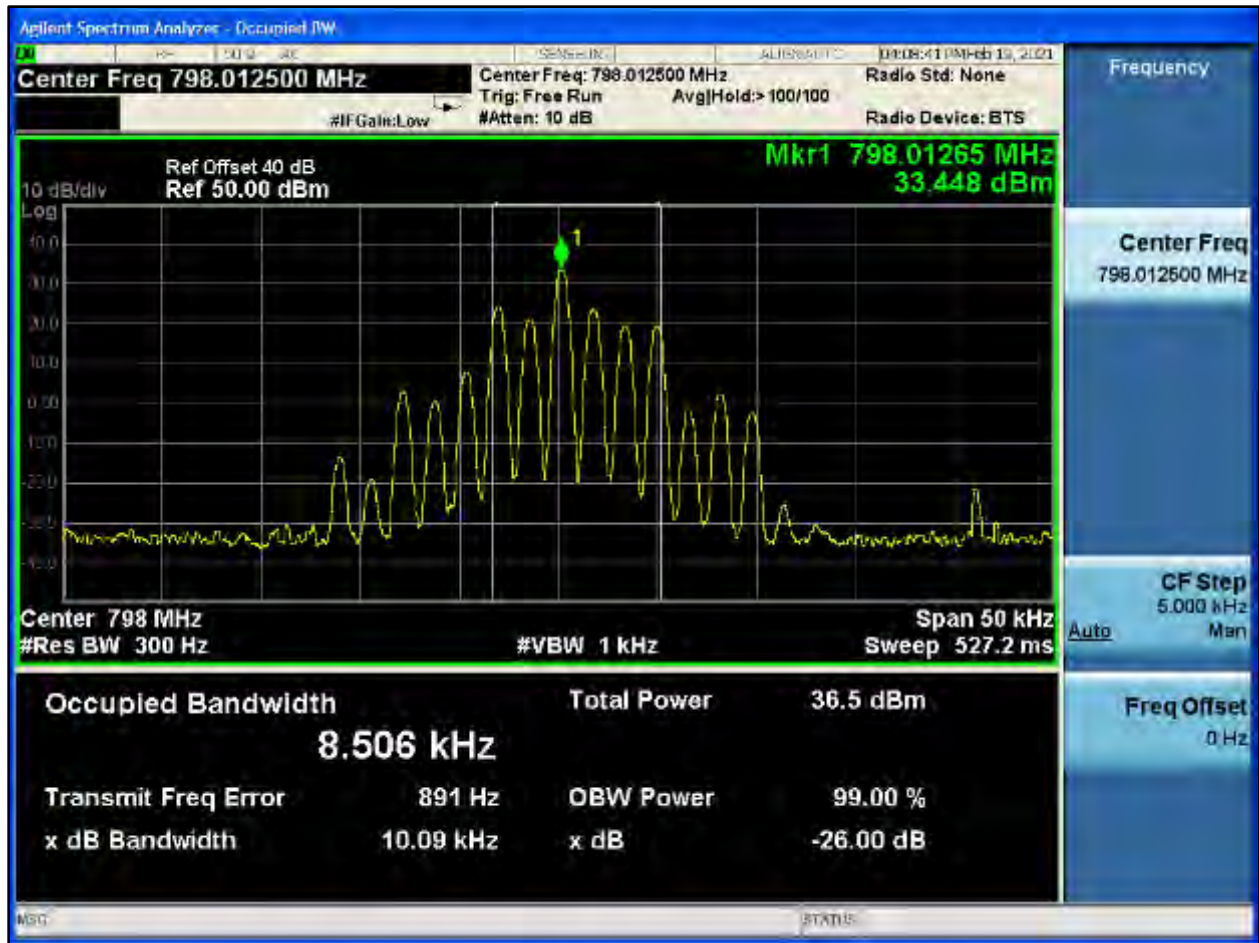


Plot 8-513: OBW 99%, 799.0125 MHz, NB

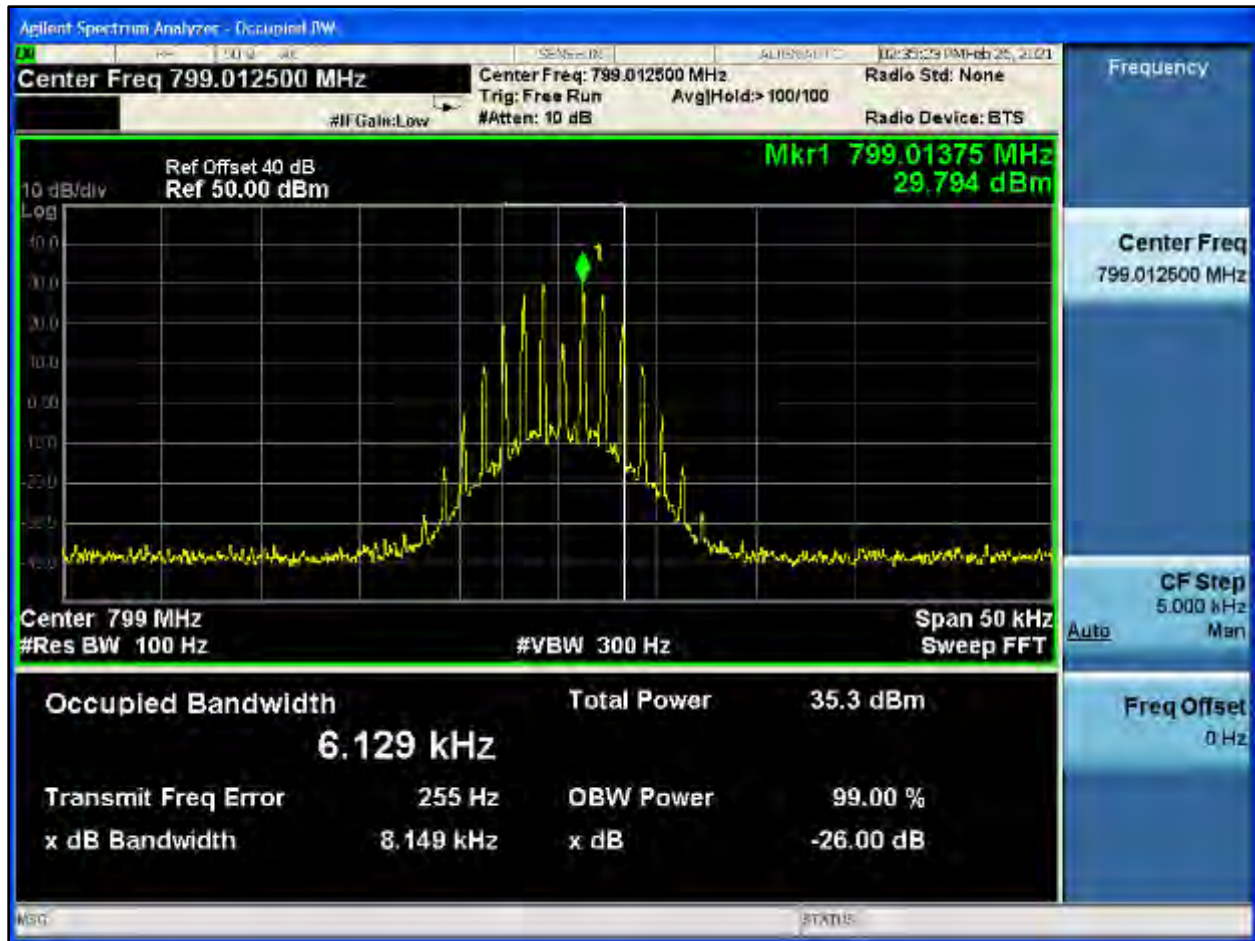


Plot 8-514: OBW 99%, 799.0125 MHz, NPSPAC

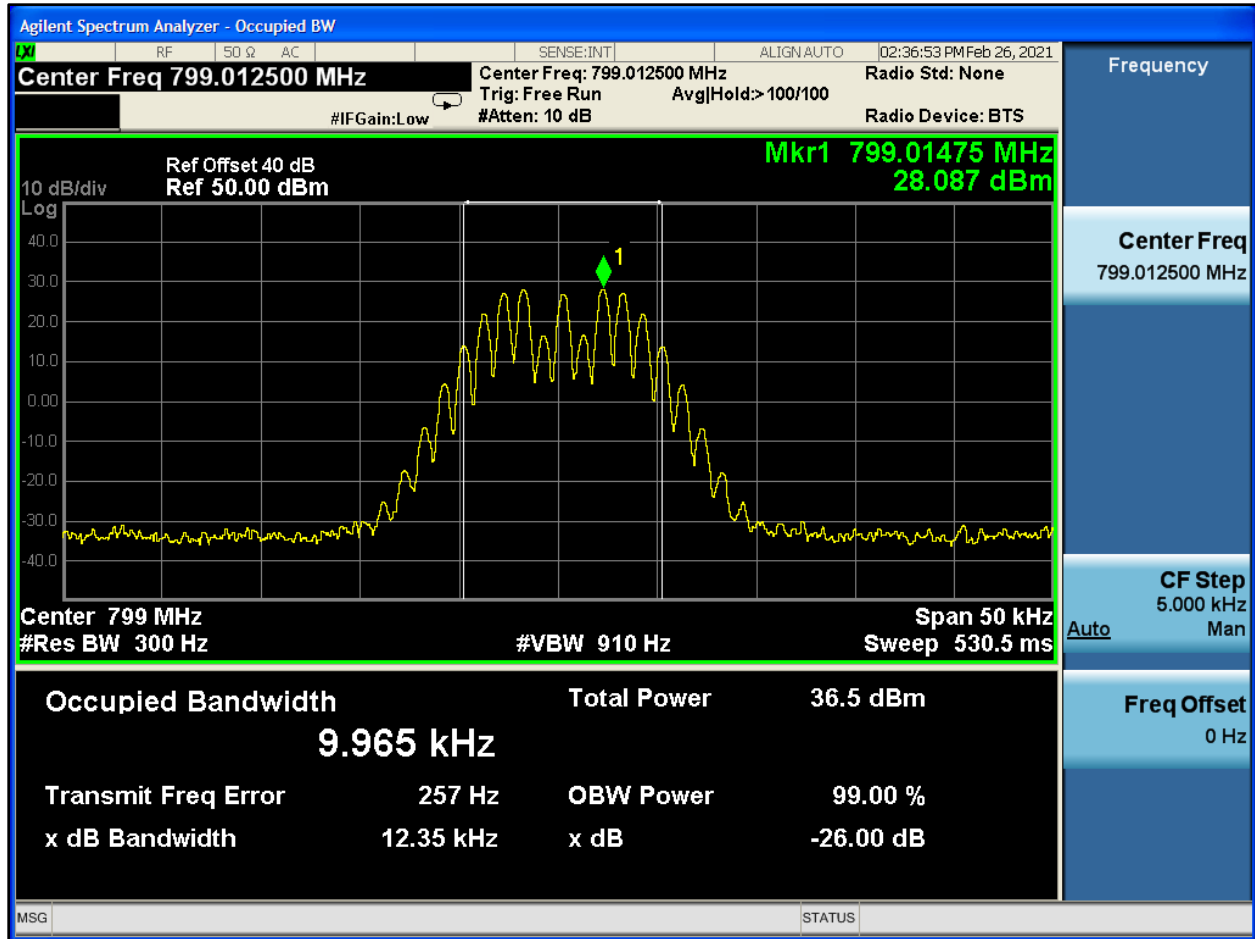


Plot 8-515: OBW 99%, 799.0125 MHz, WB

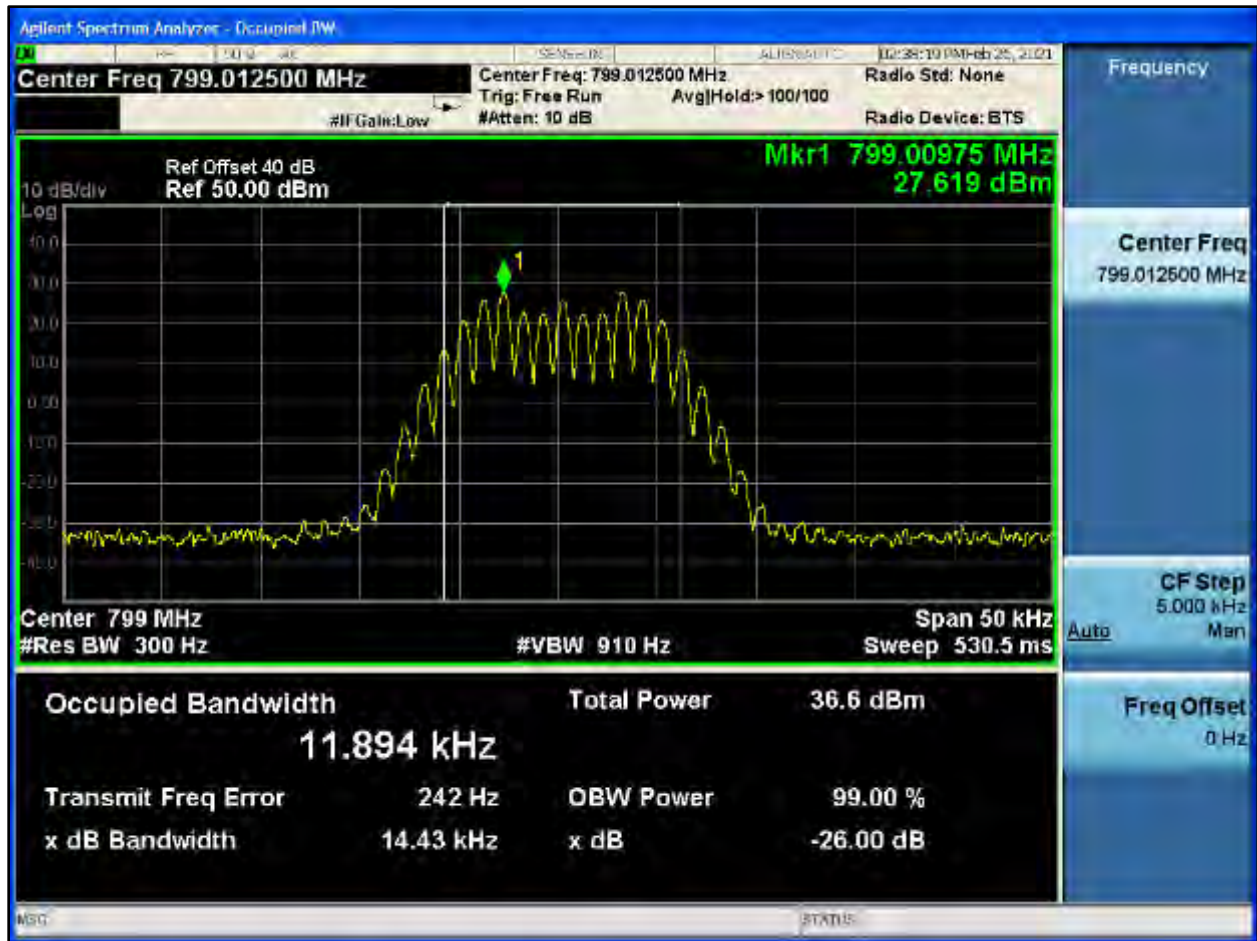

Plot 8-516: OBW 99%, 799.0125 MHz, C4FM

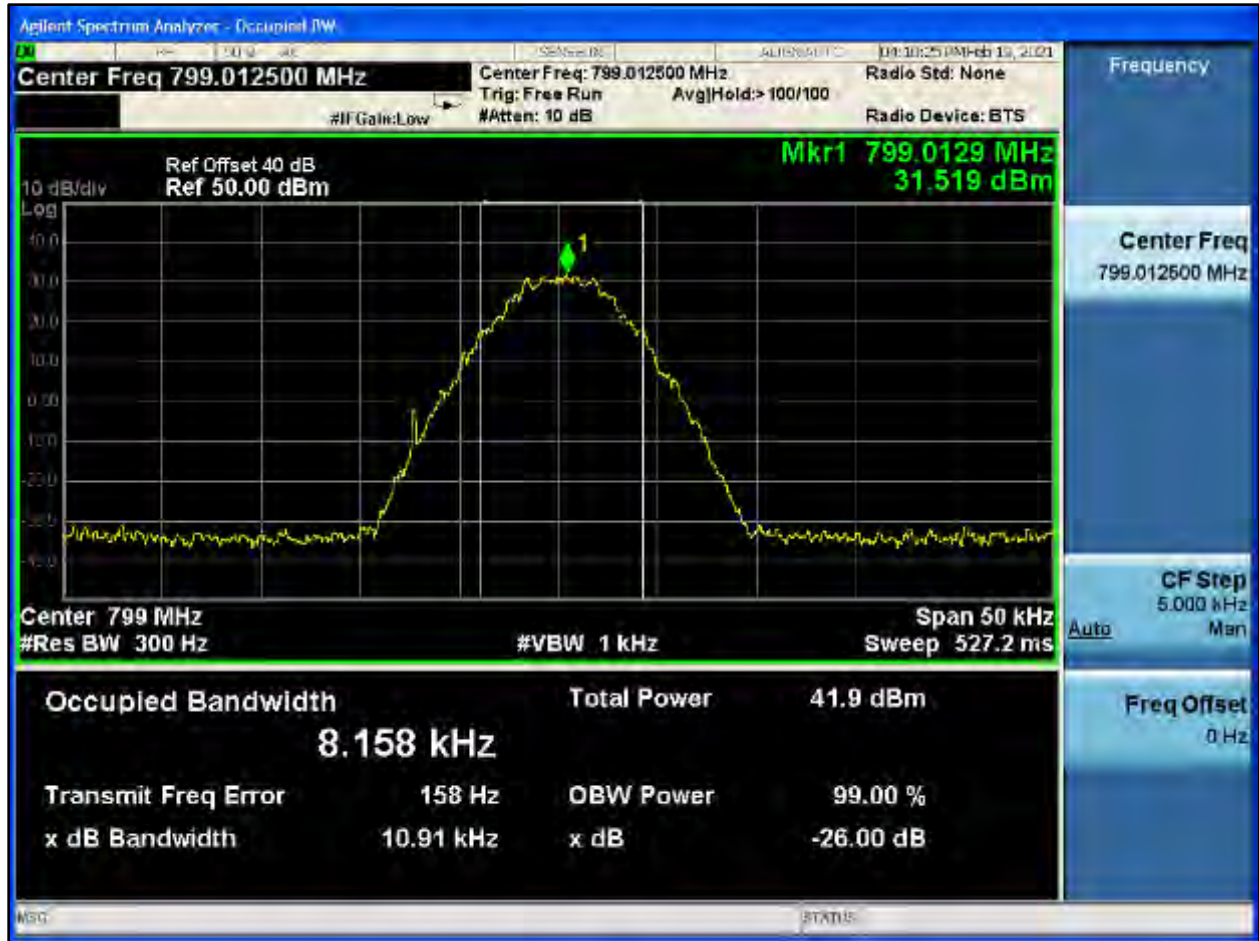


Plot 8-517: OBW 99%, 799.0125 MHz, H-CPM TDMA

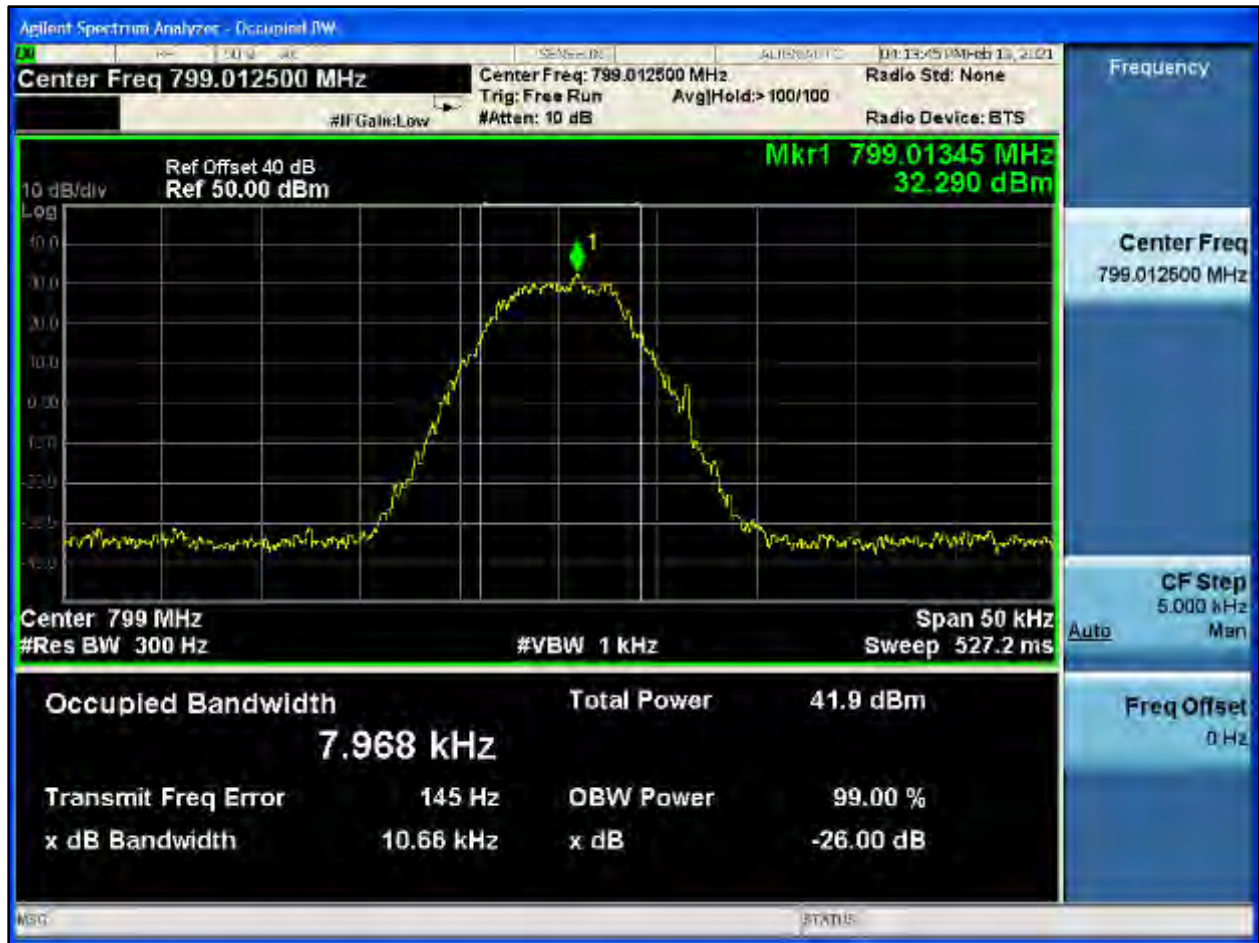

Plot 8-518: OBW 99%, 799.0125 MHz, NB 2 FSK




Plot 8-519: OBW 99%, 799.0125 MHz, NPSPAC 2 FSK

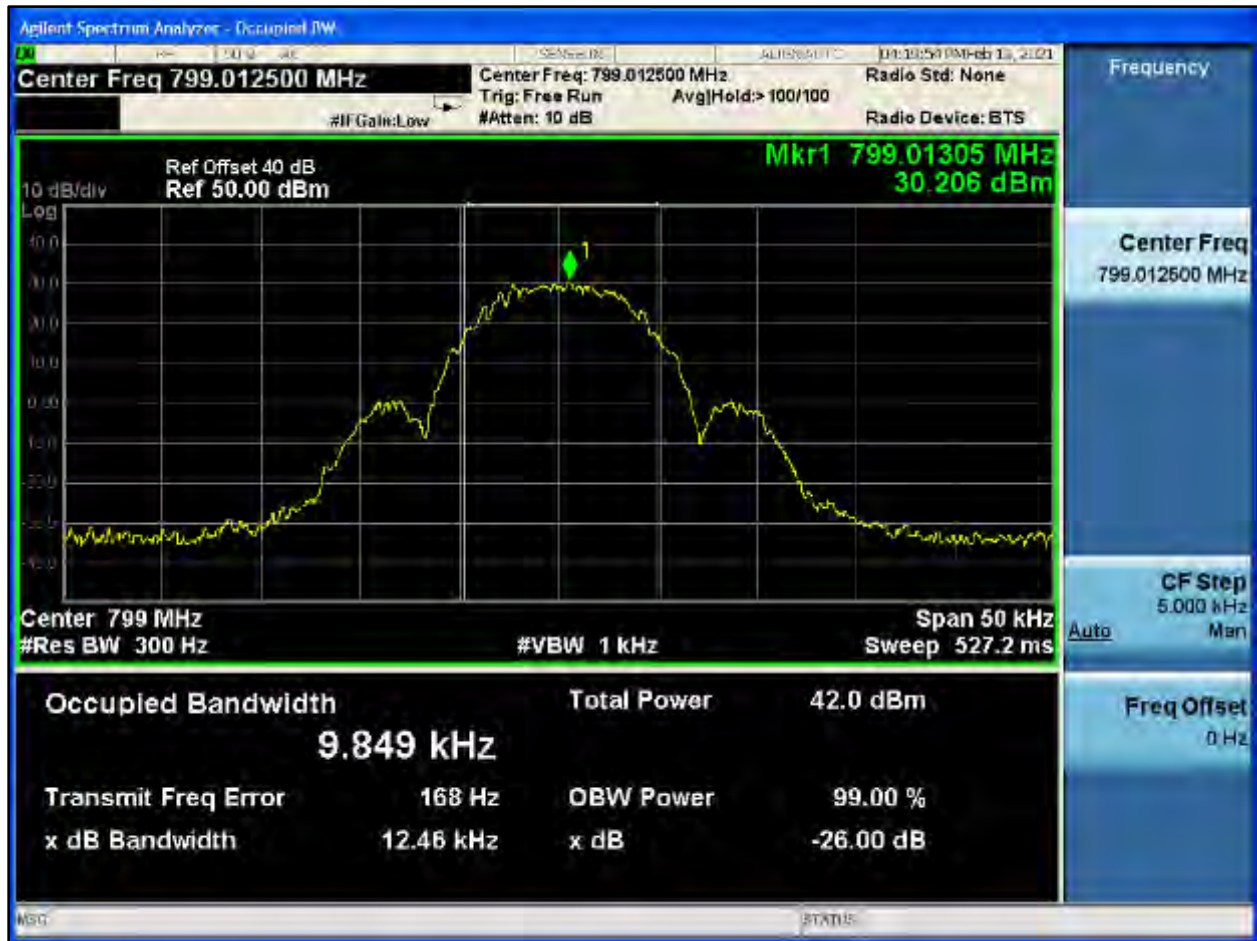


Plot 8-520: OBW 99%, 799.0125 MHz, WB 2 FSK




Plot 8-521: OBW 99%, 799.0125 MHz, HVD SMR

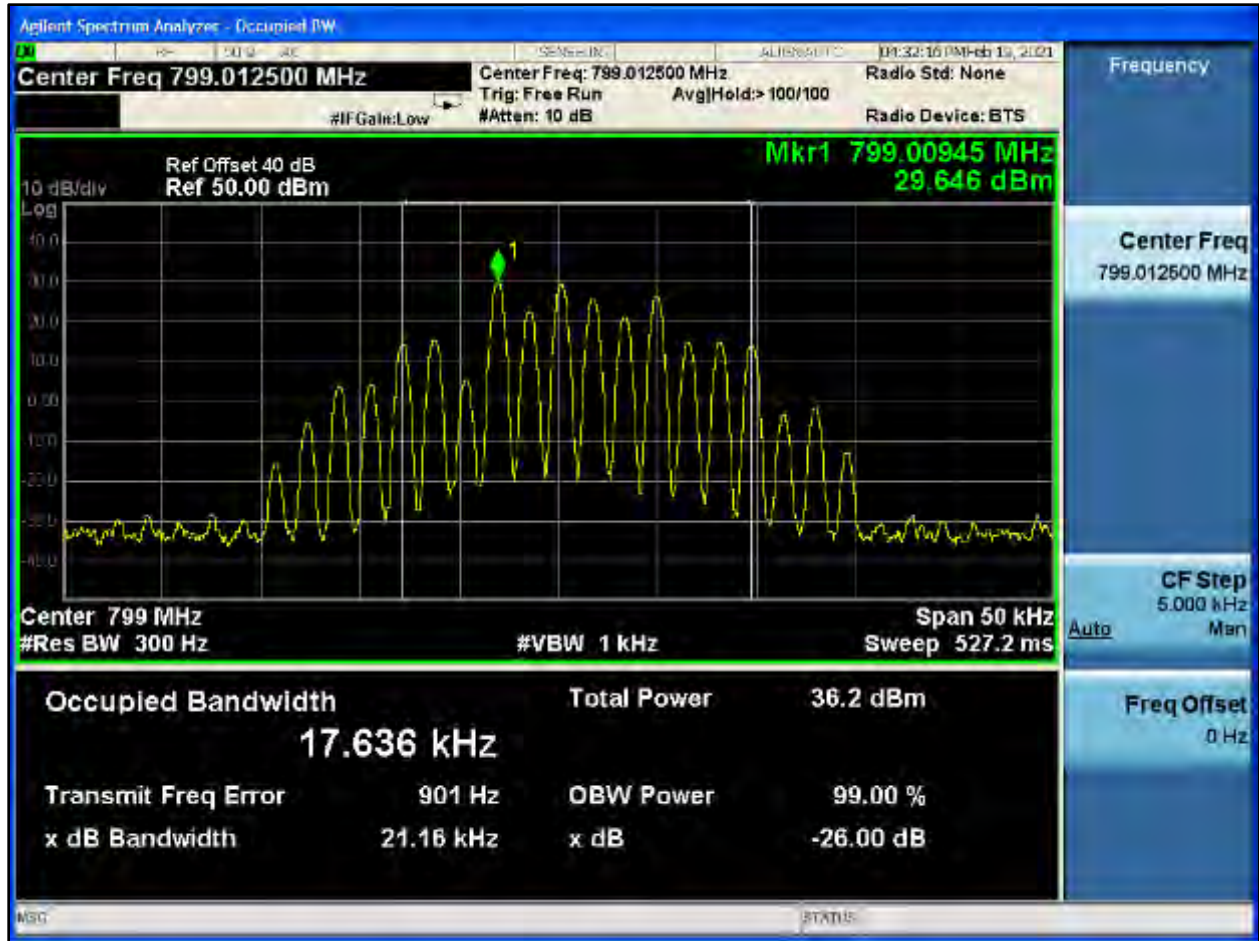


Plot 8-522: OBW 99%, 799.0125 MHz, HVD NPSPAC

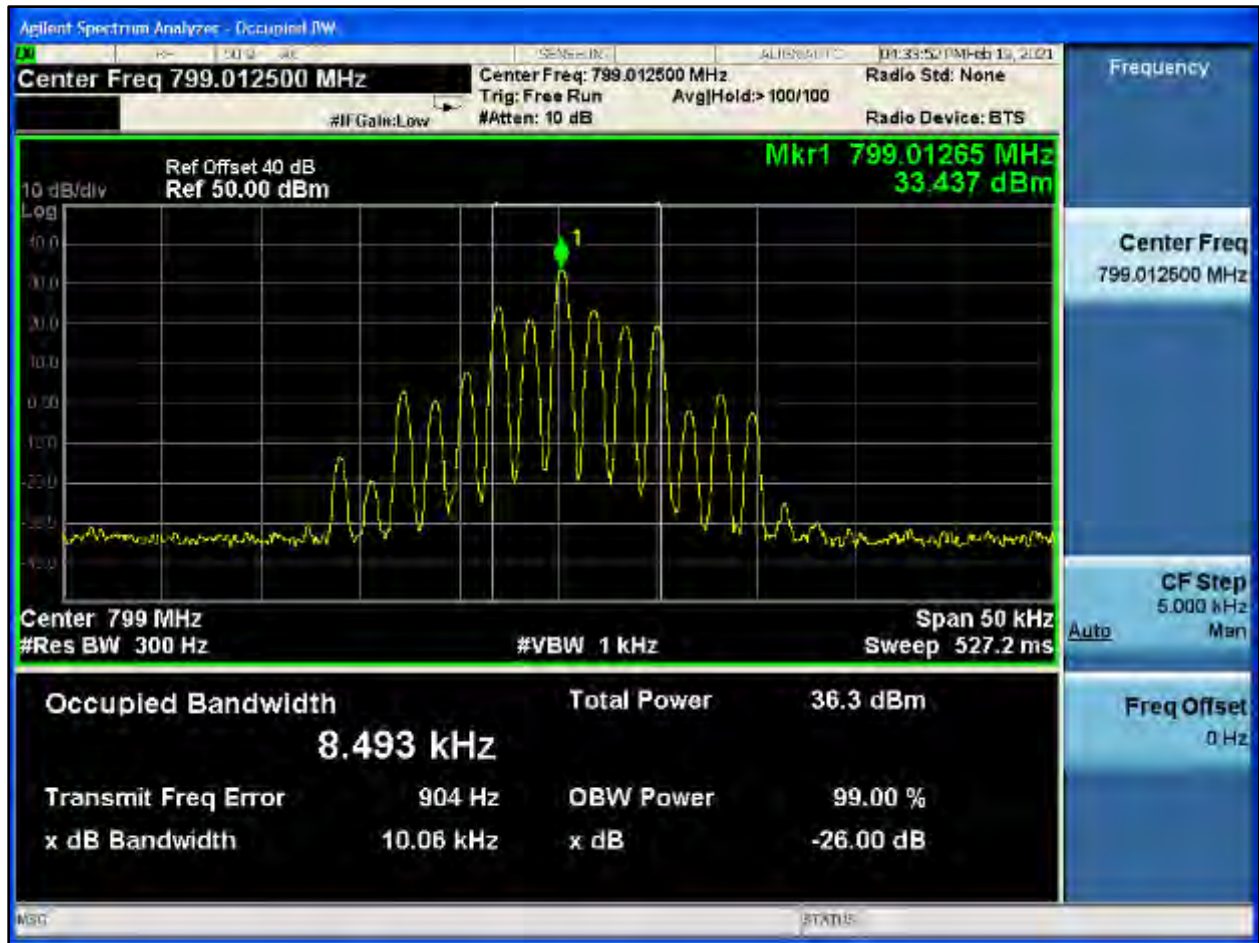


Plot 8-523: OBW 99%, 802.0000 MHz, NB

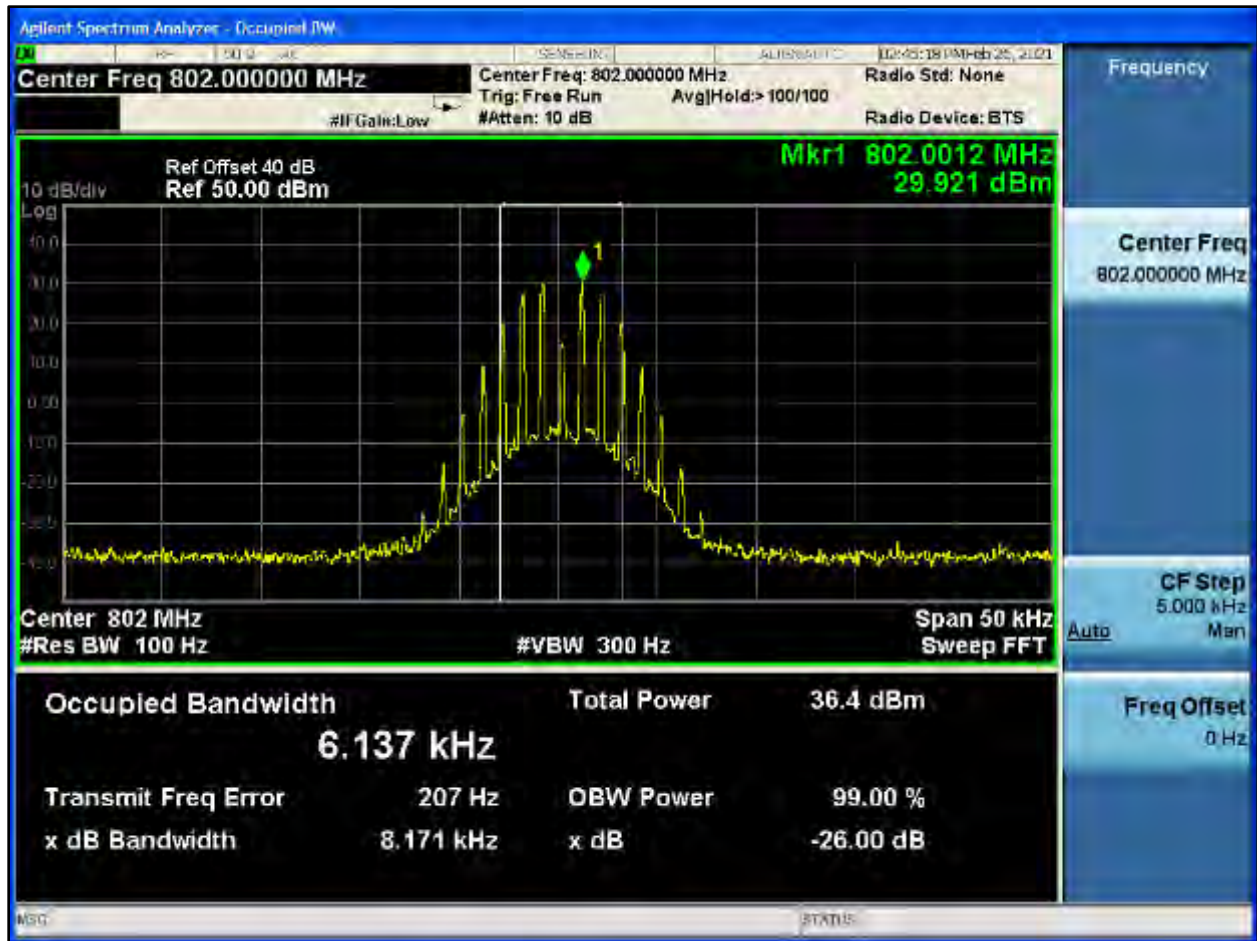

Plot 8-524: OBW 99%, 802.0000 MHz, NPSPAC

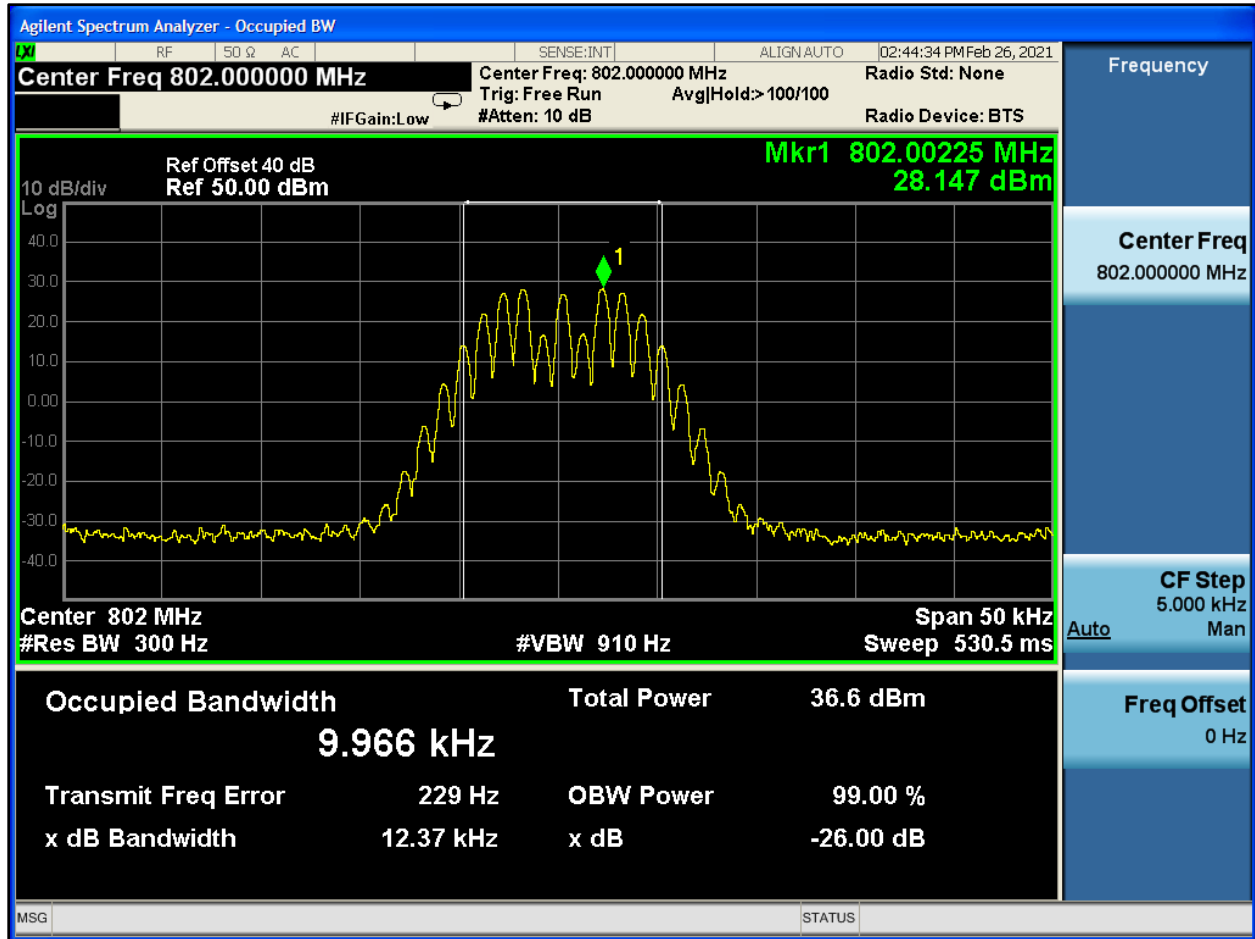

Plot 8-525: OBW 99%, 802.0000 MHz, WB

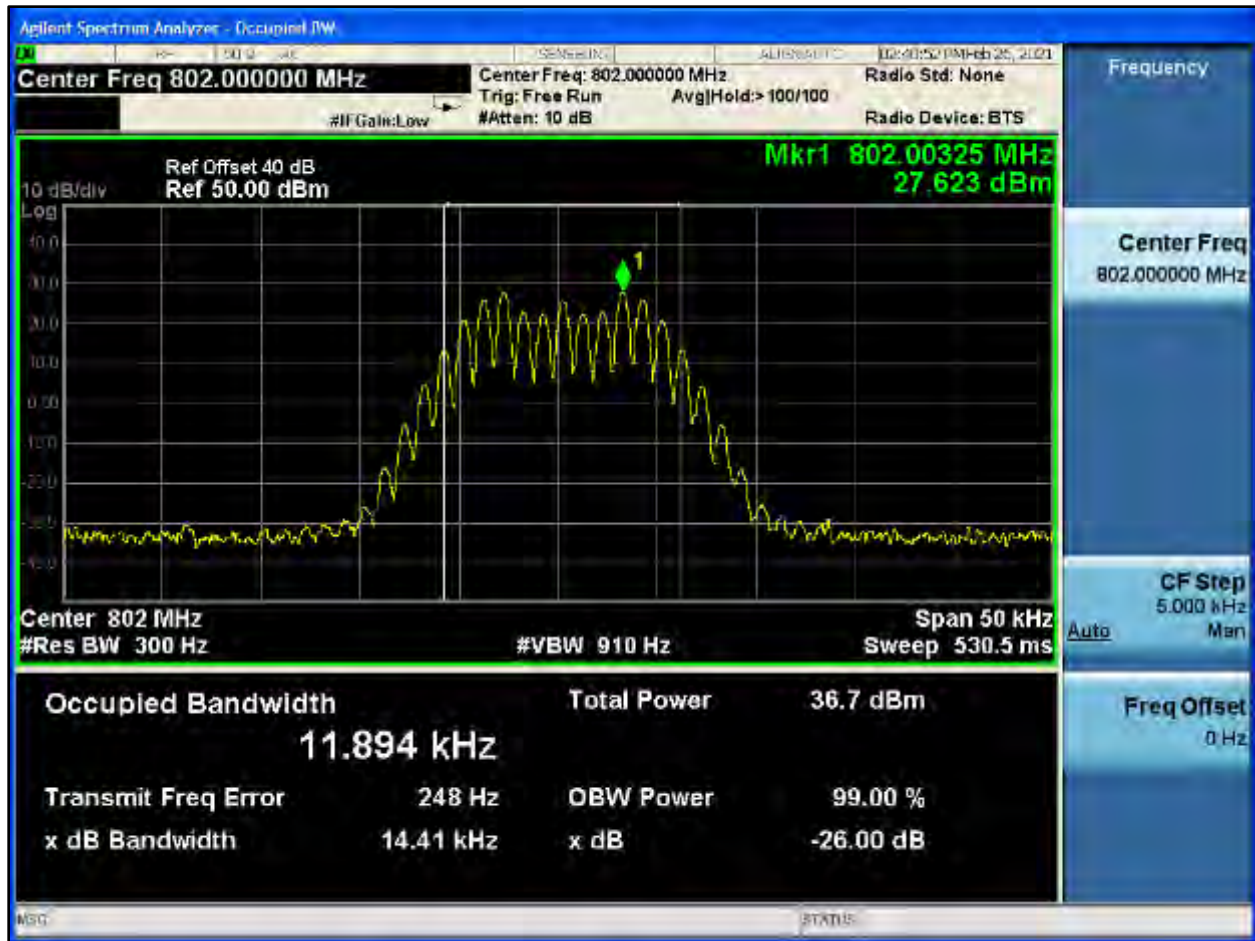

Plot 8-526: OBW 99%, 802.0000 MHz, C4FM




Plot 8-527: OBW 99%, 802.0000 MHz, H-CPM TDMA



Plot 8-528: OBW 99%, 802.0000 MHz, NB 2 FSK




Plot 8-529: OBW 99%, 802.0000 MHz, NPSPAC 2 FSK

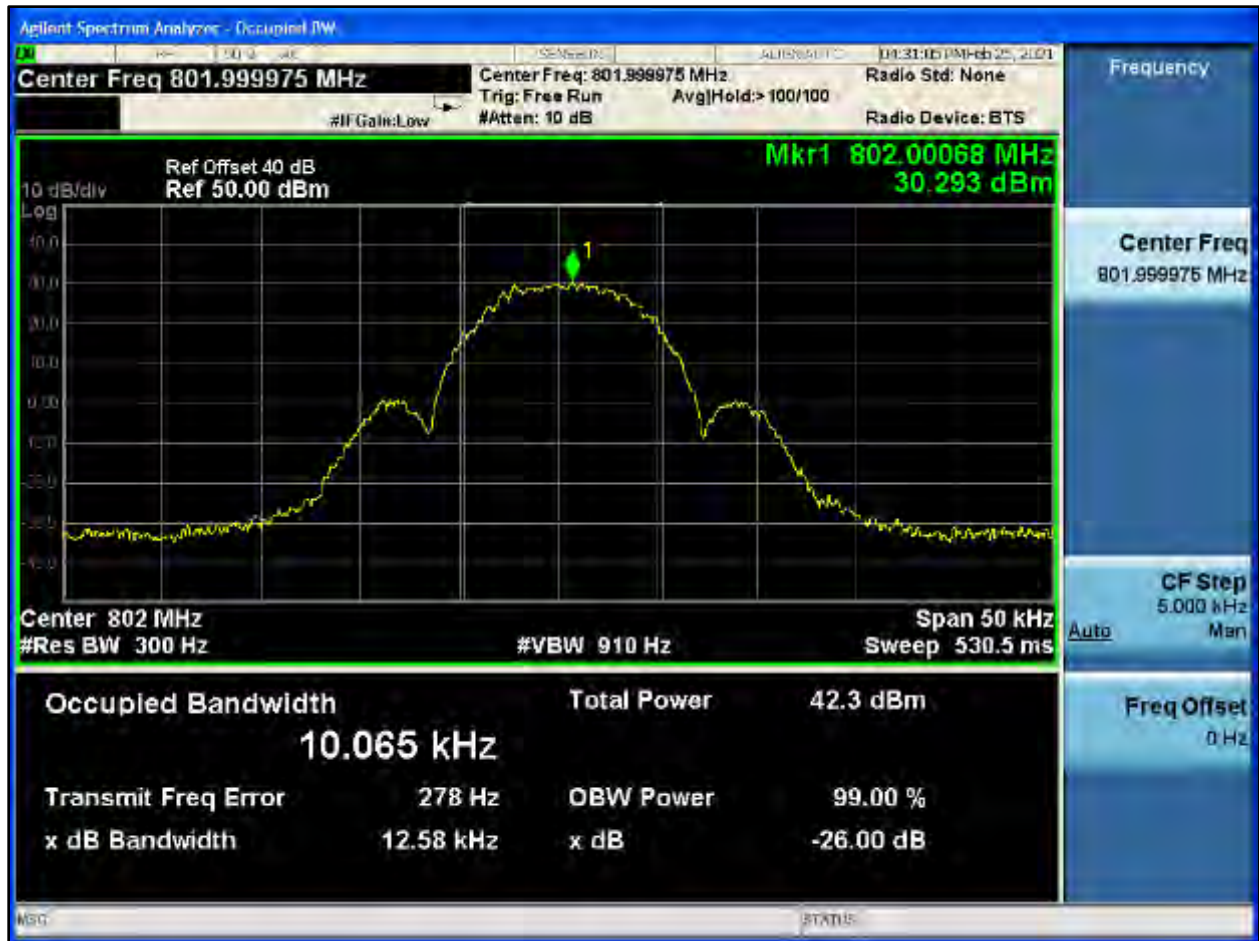


Plot 8-530: OBW 99%, 802.0000 MHz, WB 2 FSK




Plot 8-531: OBW 99%, 802.0000 MHz, HVD SMR

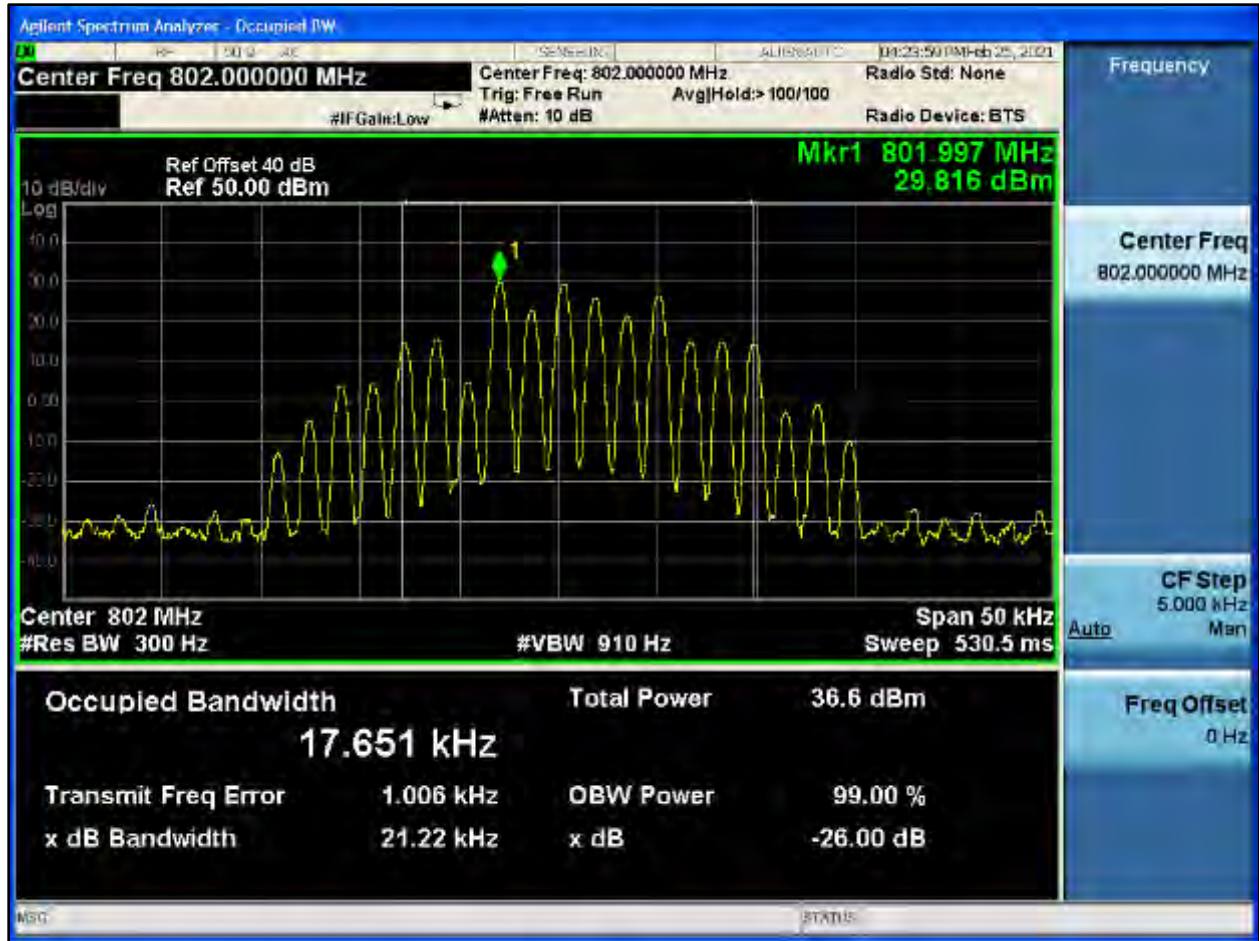


Plot 8-532: OBW 99%, 802.0000 MHz, HVD NPSPAC

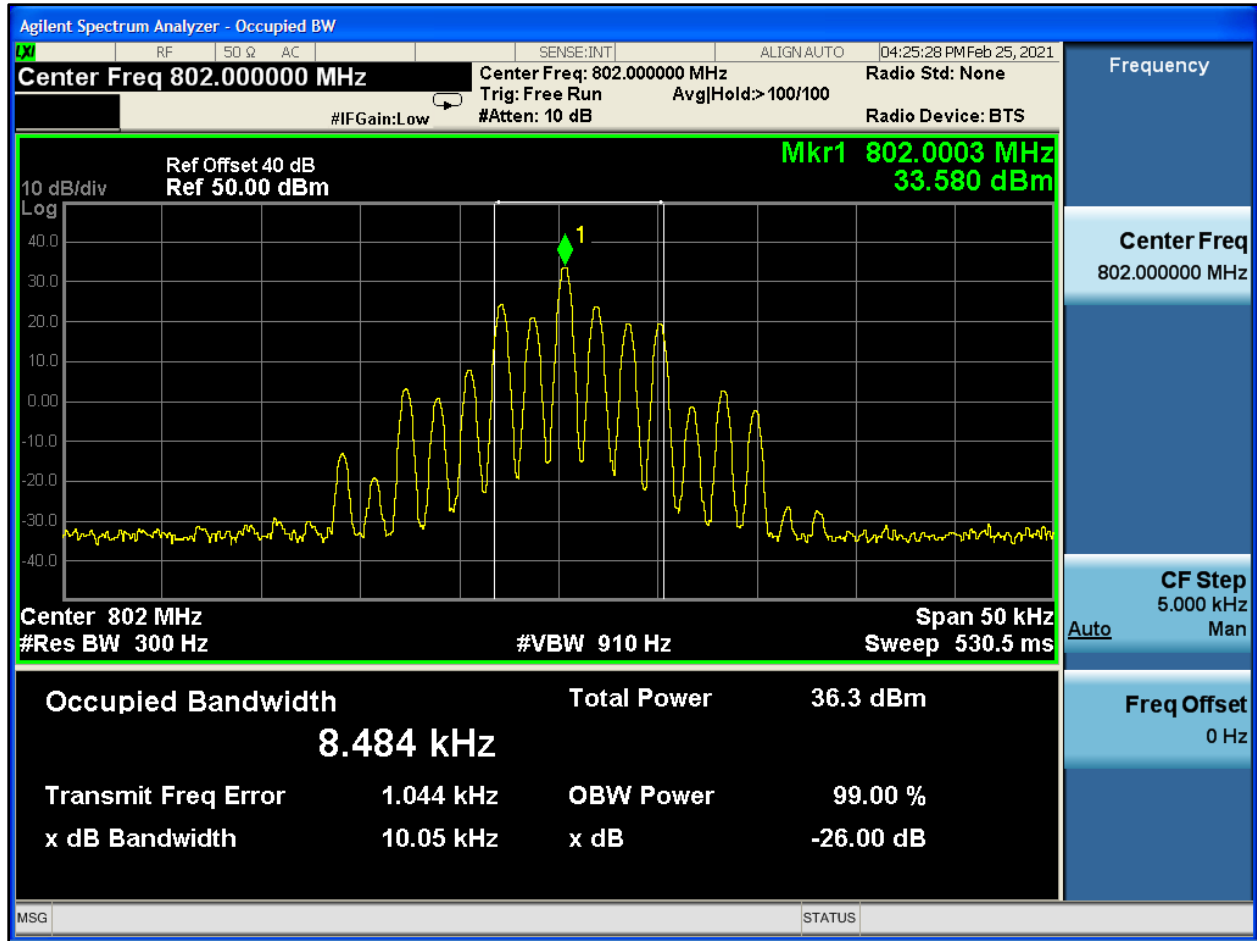

Plot 8-533: OBW 99%, 804.9875 MHz, NB

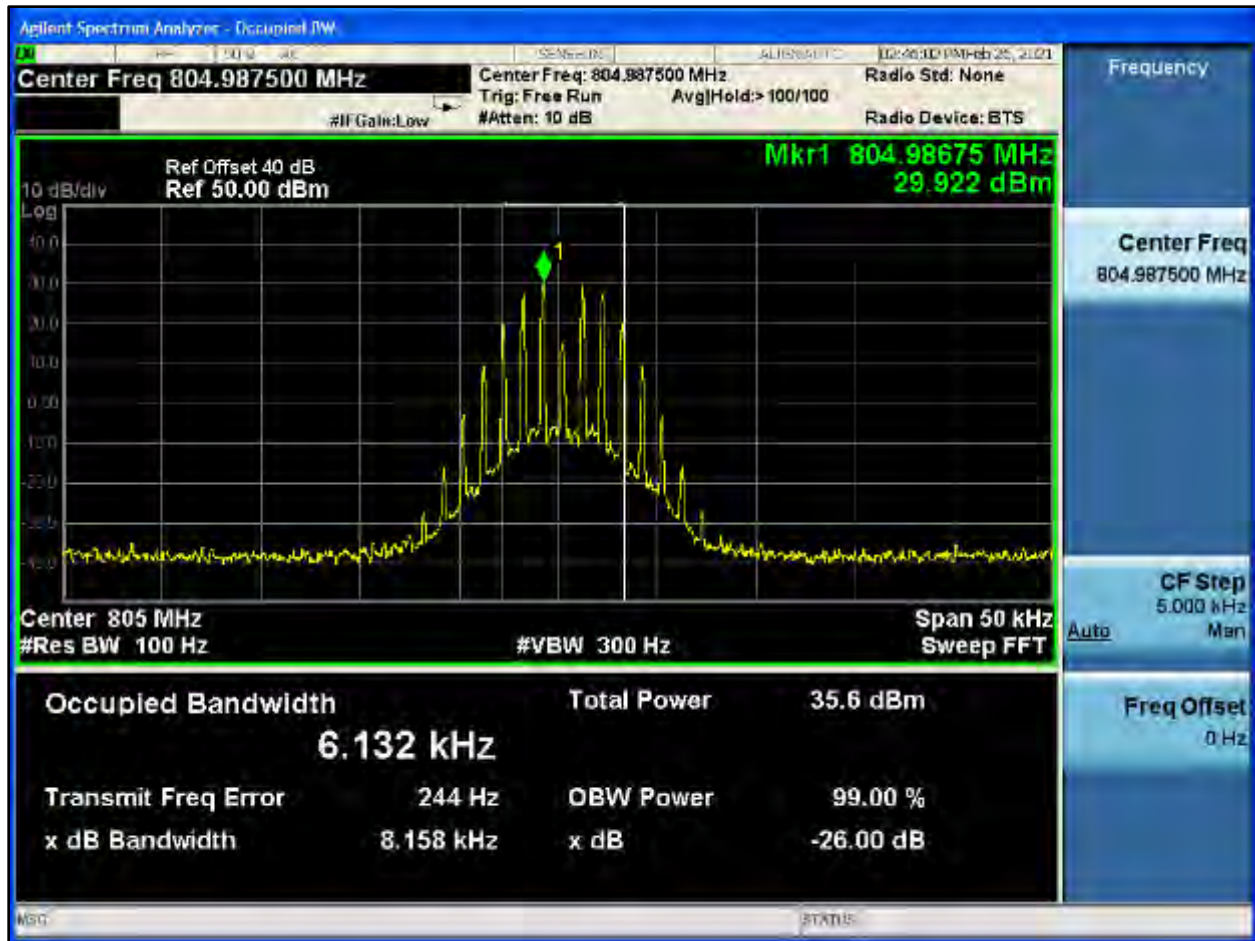


Plot 8-534: OBW 99%, 804.9875 MHz, NPSPAC

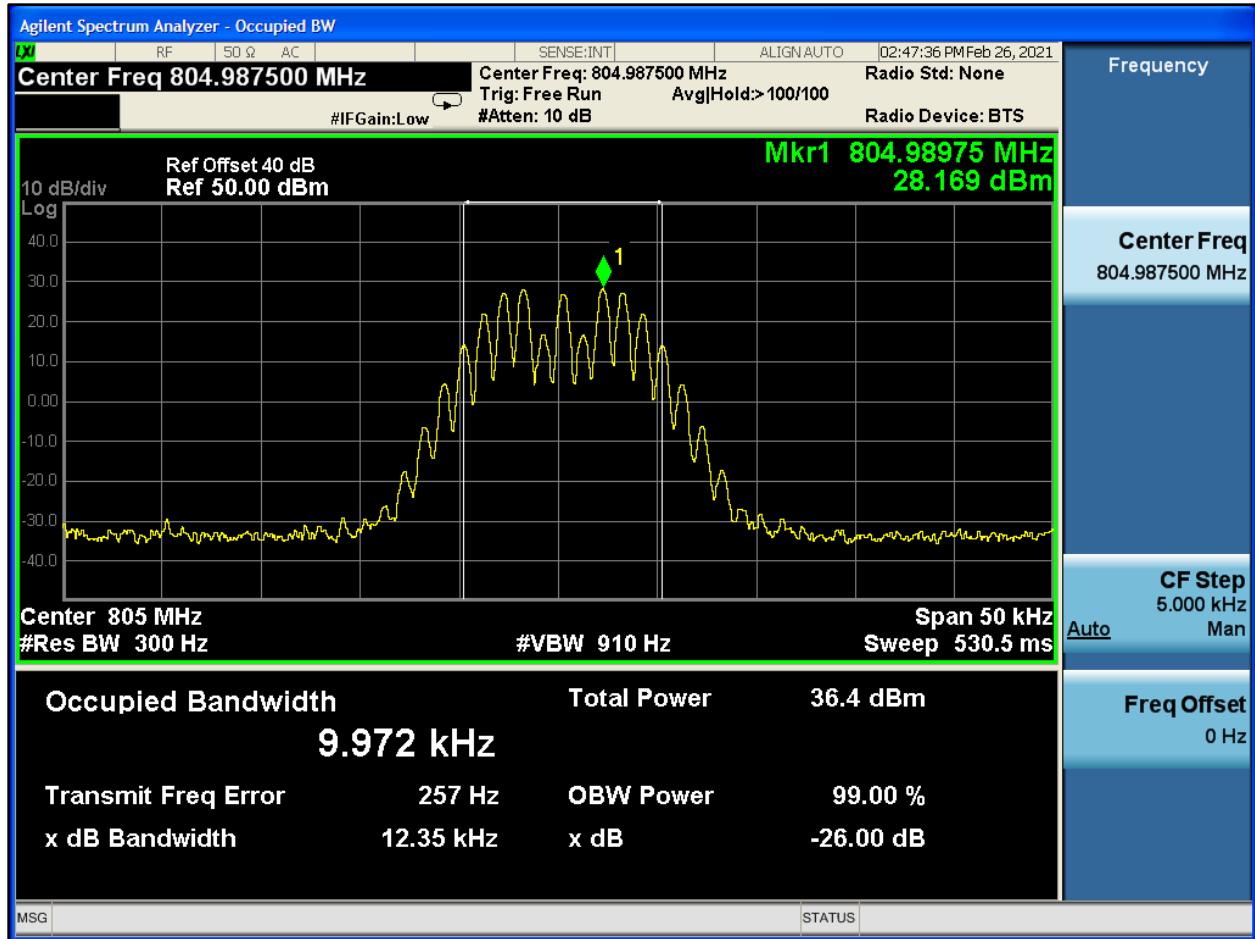

Plot 8-535: OBW 99%, 804.9875 MHz, WB



Plot 8-536: OBW 99%, 804.9875 MHz, C4FM

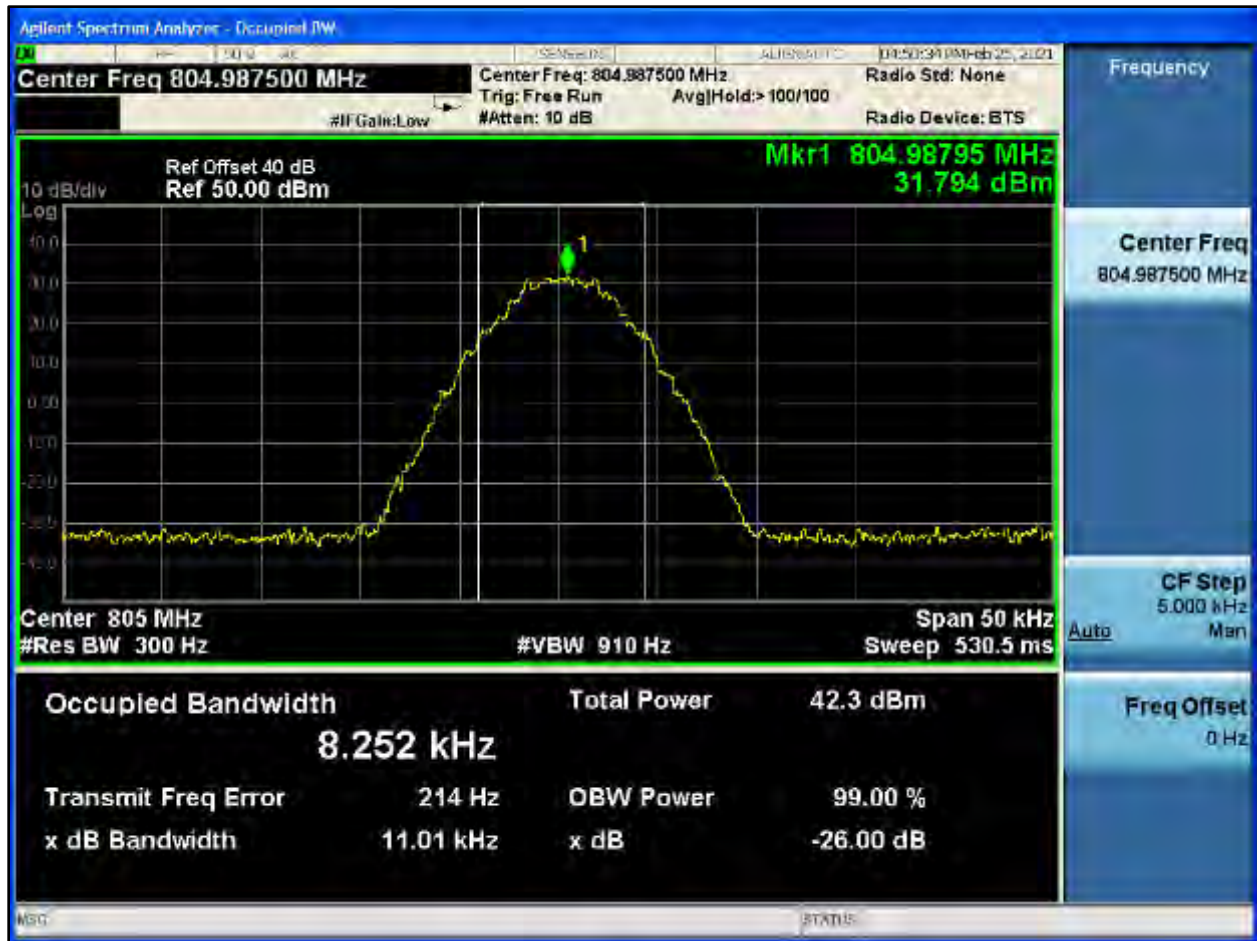


Plot 8-537: OBW 99%, 804.9875 MHz, H-CPM TDMA



Plot 8-538: OBW 99%, 804.9875 MHz, NB 2 FSK




Plot 8-539: OBW 99%, 804.9875 MHz, NPSPAC 2 FSK

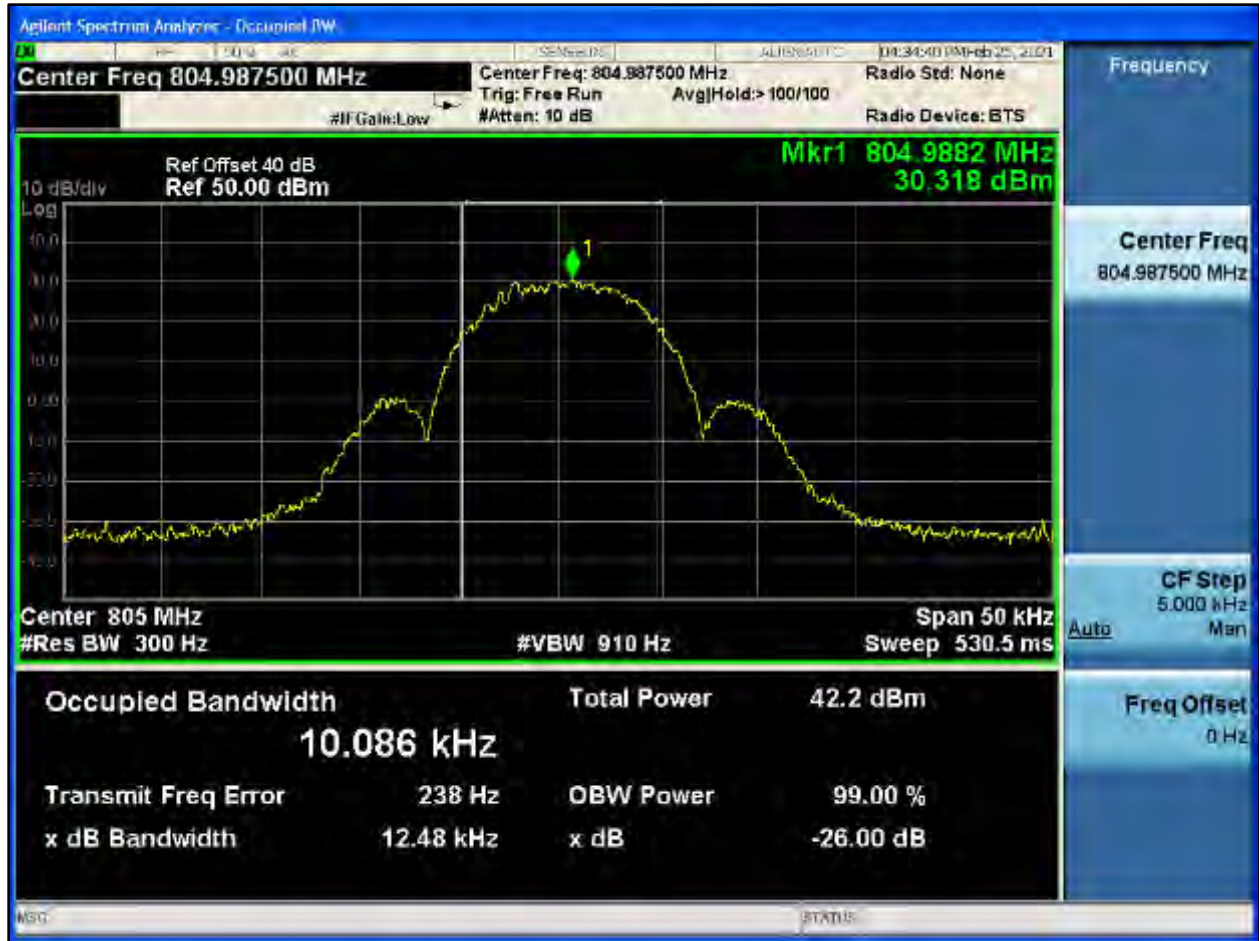


Plot 8-540: OBW 99%, 804.9875 MHz, WB 2 FSK




Plot 8-541: OBW 99%, 804.9875 MHz, HVD SMR

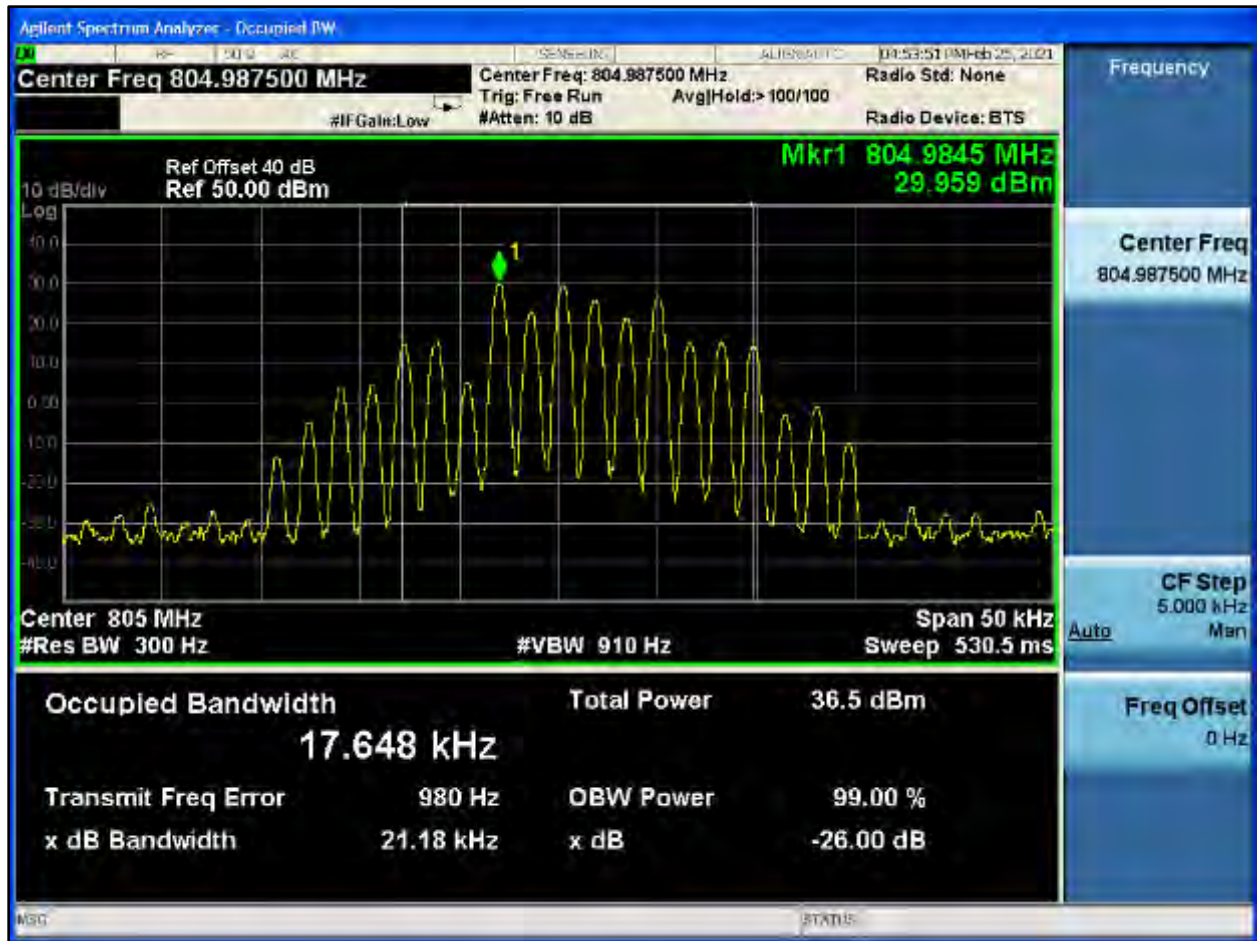


Plot 8-542: OBW 99%, 804.9875 MHz, HVD NPSPAC

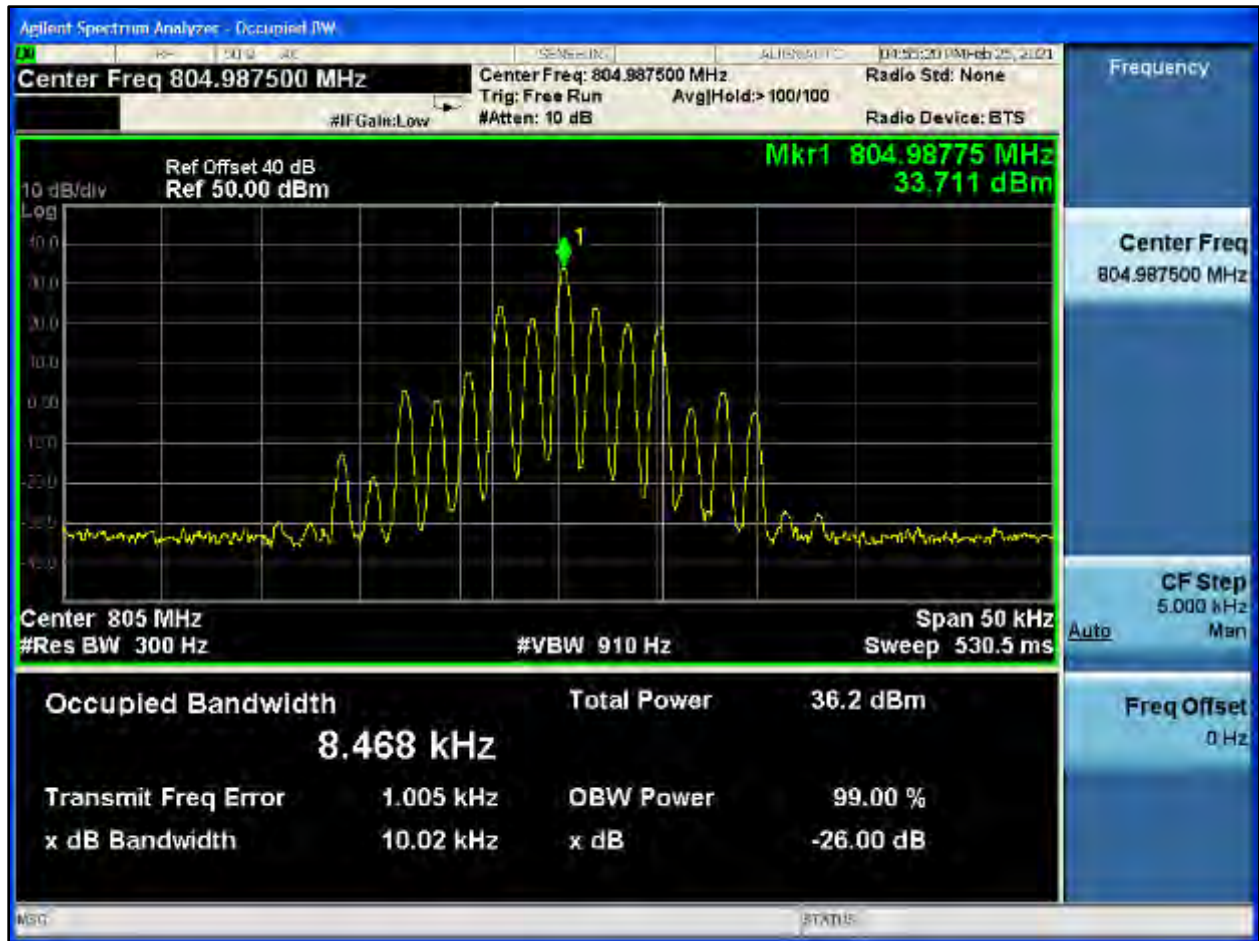

Plot 8-543: OBW 99%, 805.9875 MHz, NB

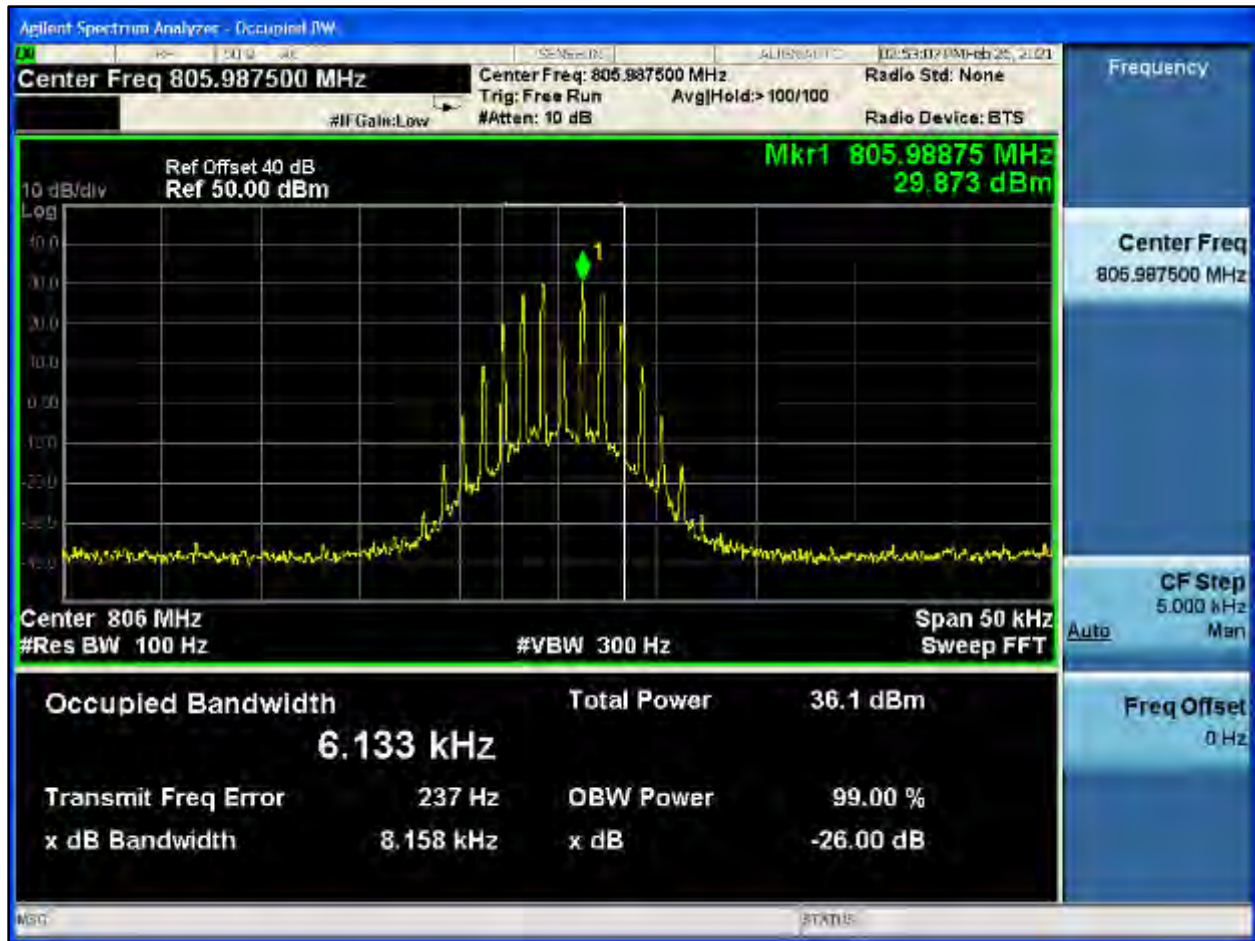


Plot 8-544: OBW 99%, 805.9875 MHz, NPSPAC

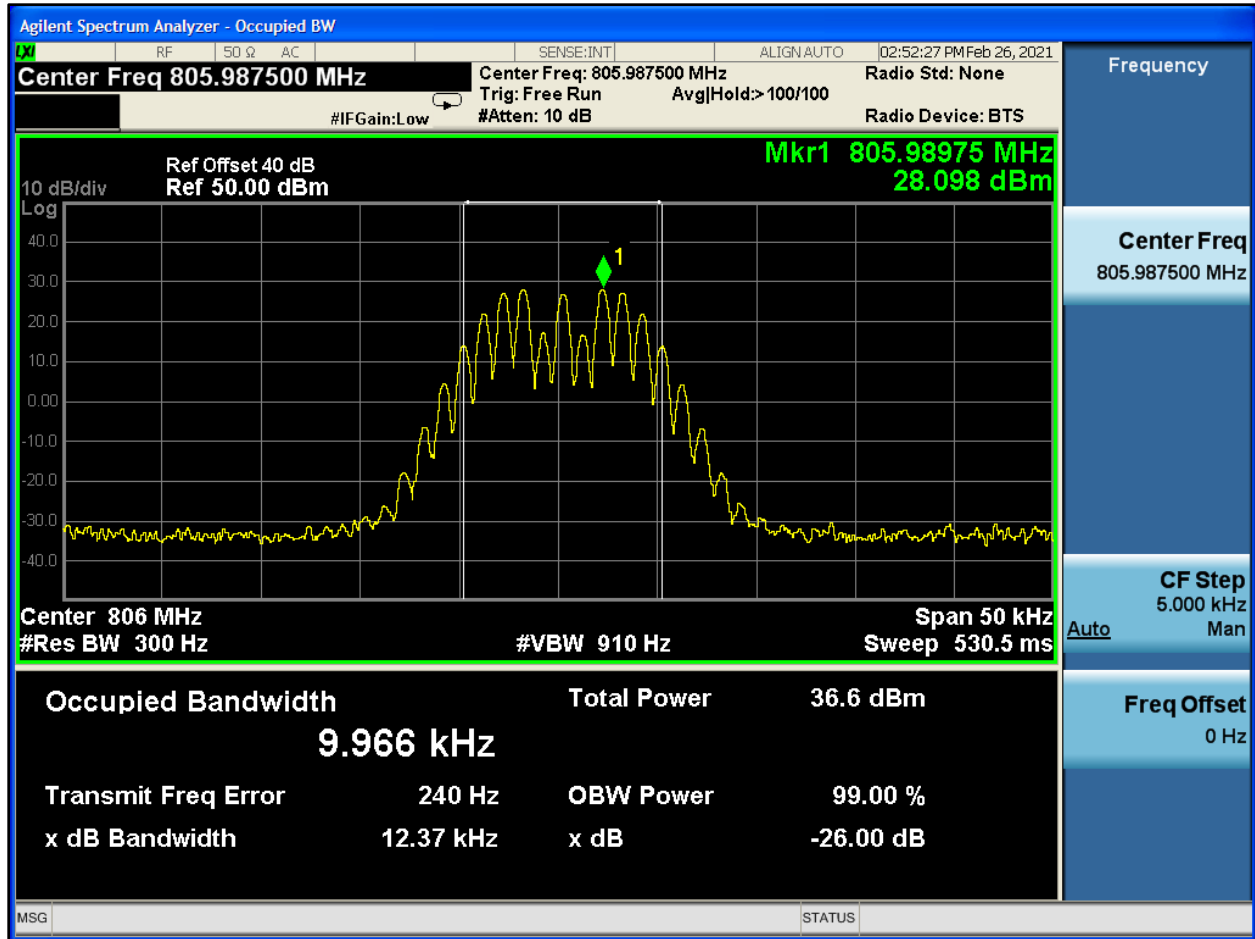


Plot 8-545: OBW 99%, 805.9875 MHz, WB



Plot 8-546: OBW 99%, 805.9875 MHz, C4FM

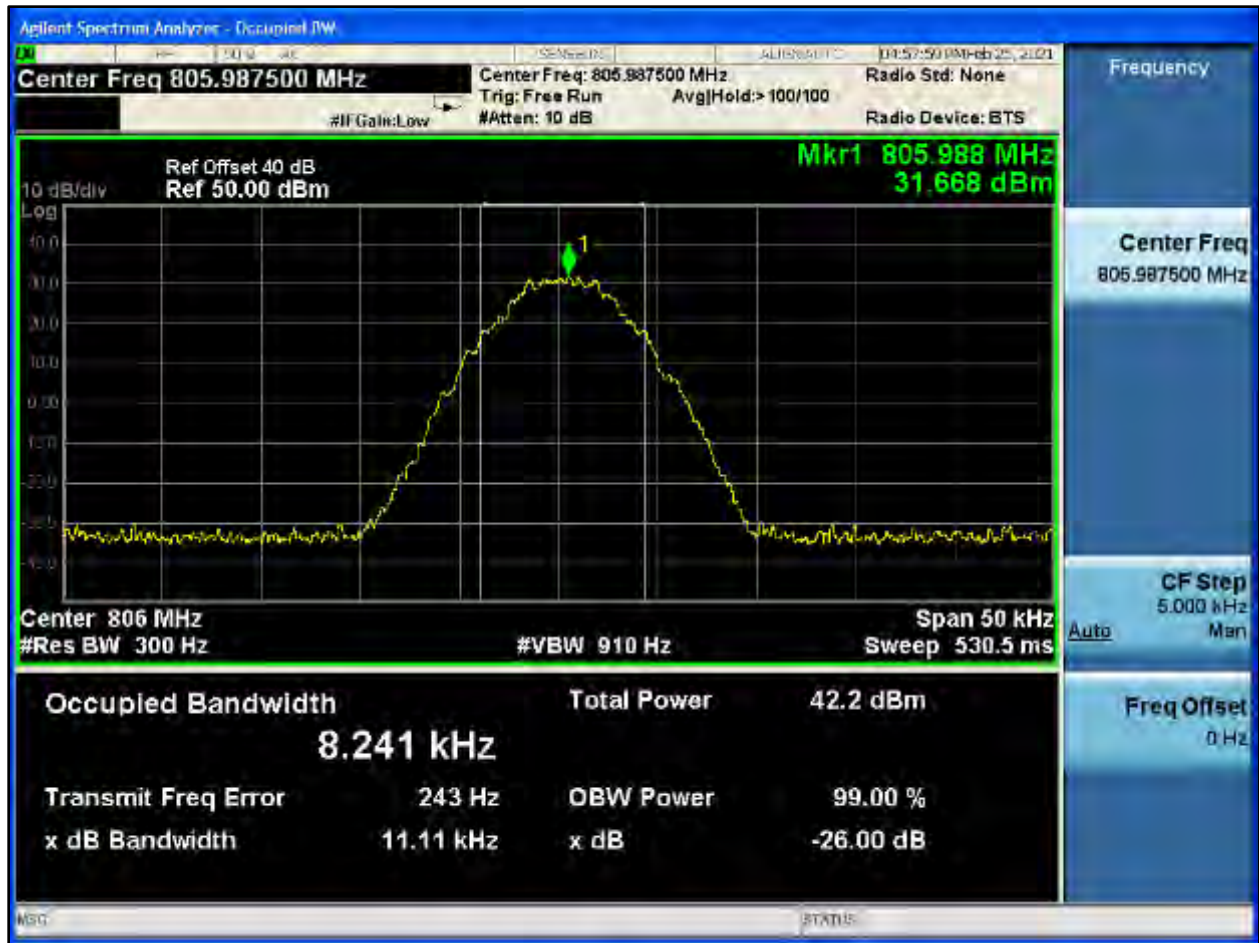


Plot 8-547: OBW 99%, 805.9875 MHz, H-CPM TDMA

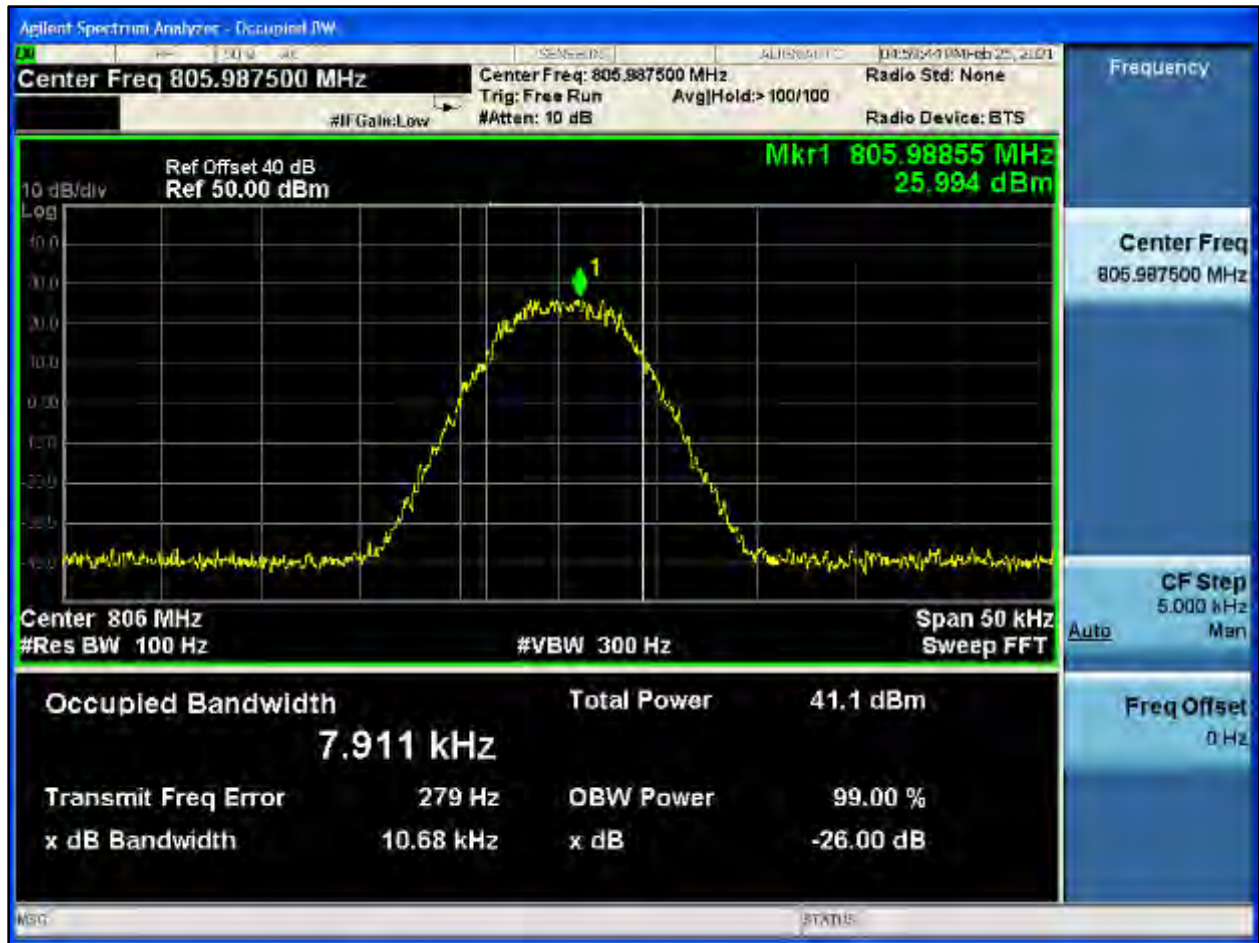

Plot 8-548: OBW 99%, 805.9875 MHz, NB 2 FSK




Plot 8-549: OBW 99%, 805.9875 MHz, NPSPAC 2 FSK

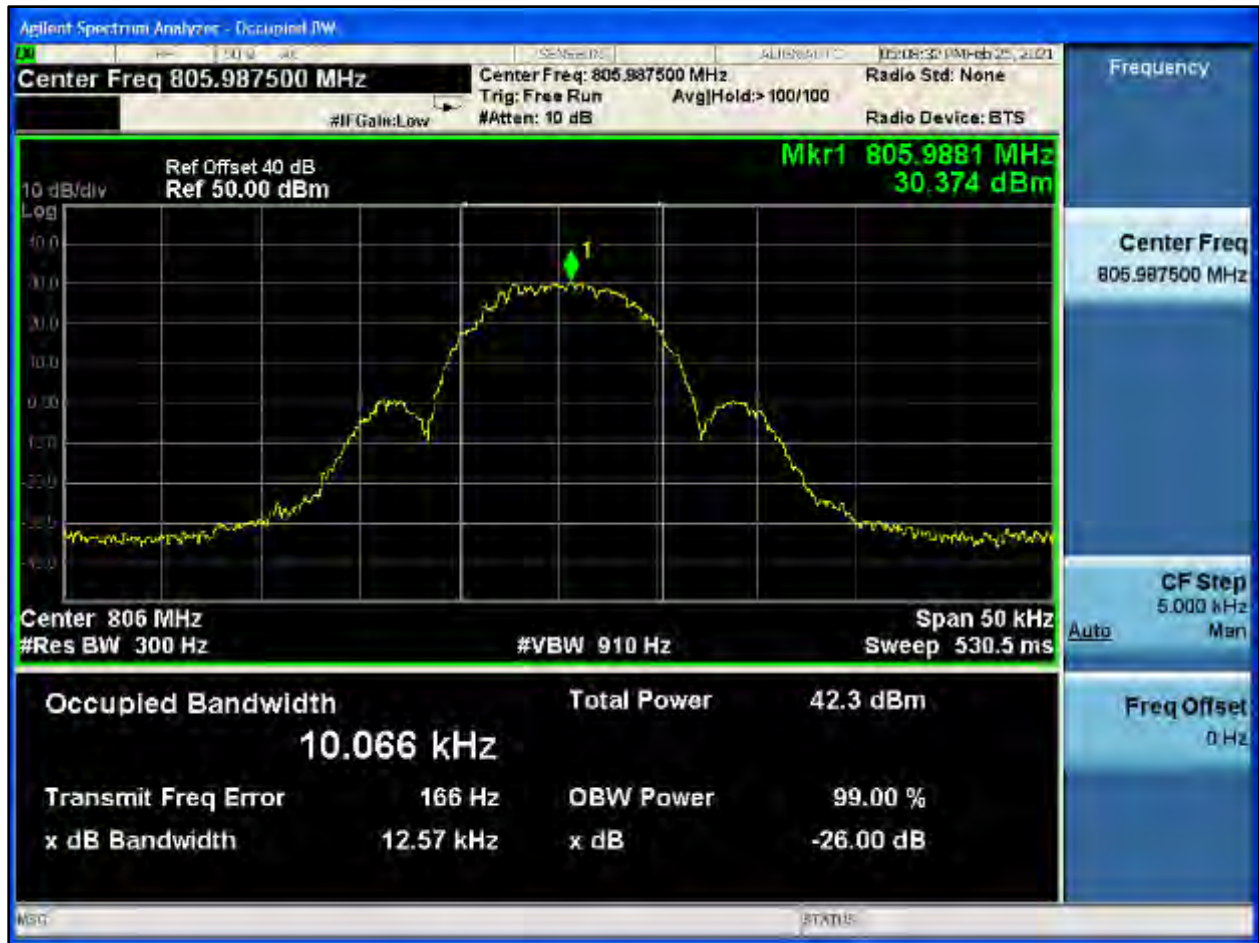


Plot 8-550: OBW 99%, 805.9875 MHz, WB 2 FSK




Plot 8-551: OBW 99%, 805.9875 MHz, HVD SMR

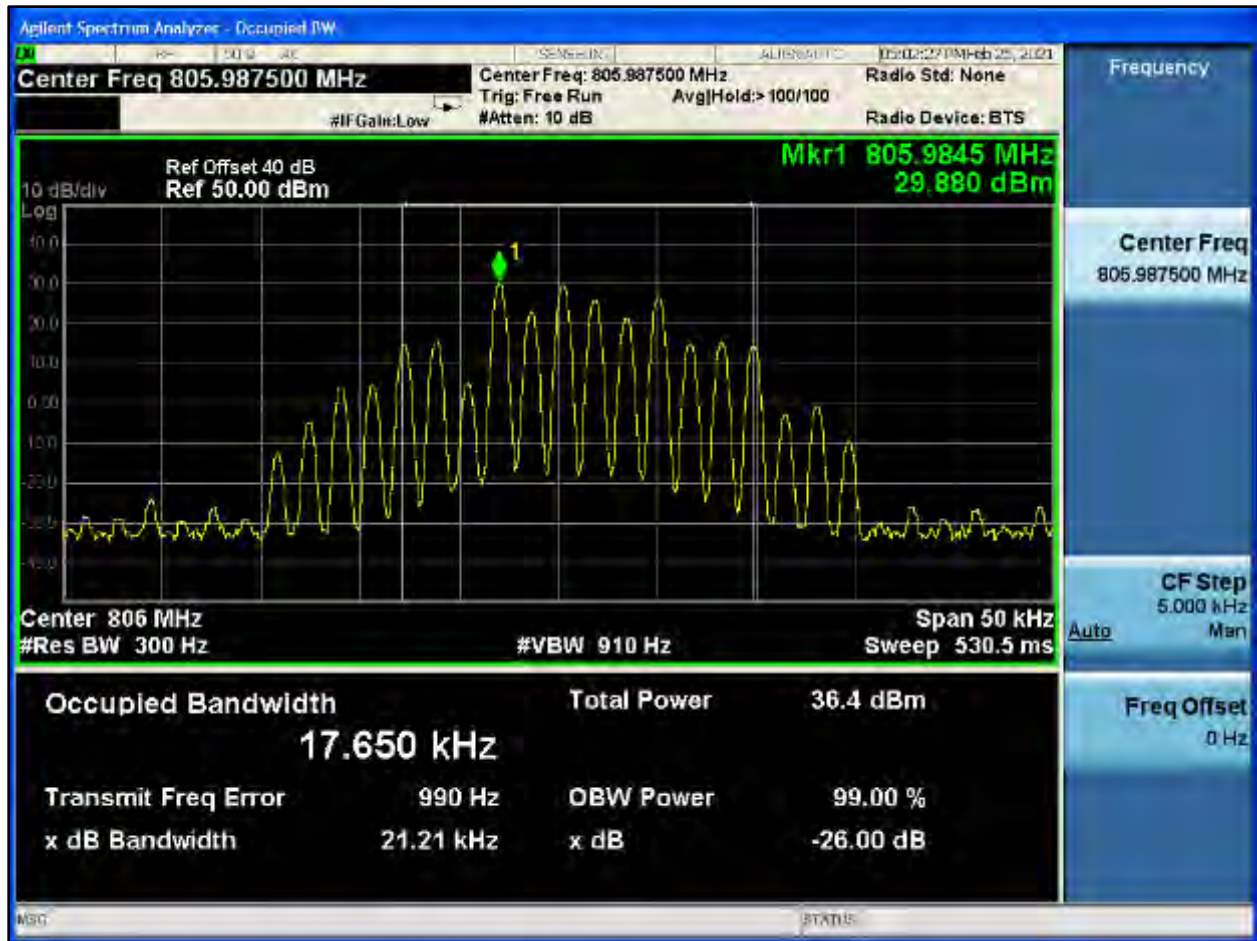


Plot 8-552: OBW 99%, 805.9875 MHz, HVD NPSPAC

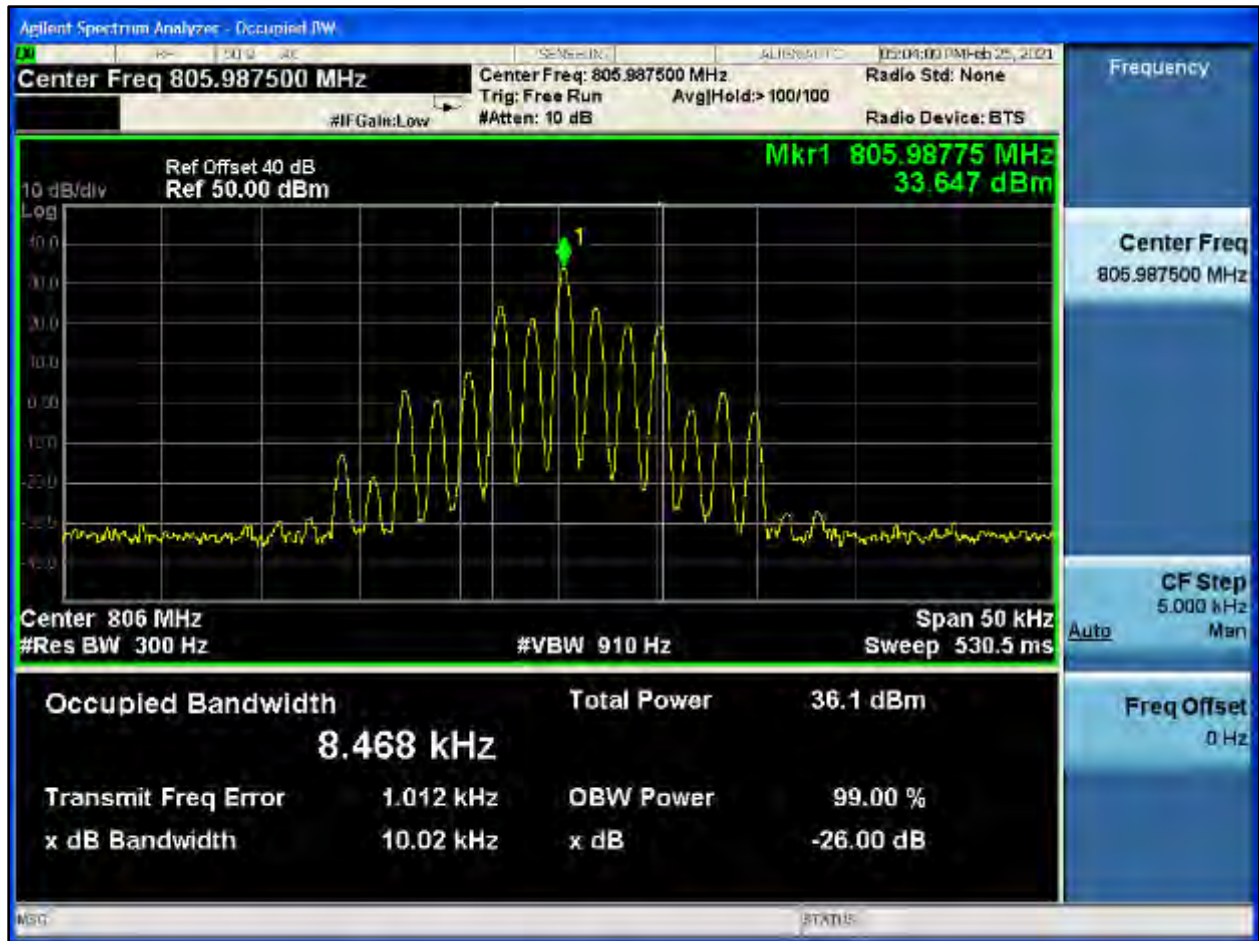


Plot 8-553: OBW 99%, 806.0125 MHz, NB

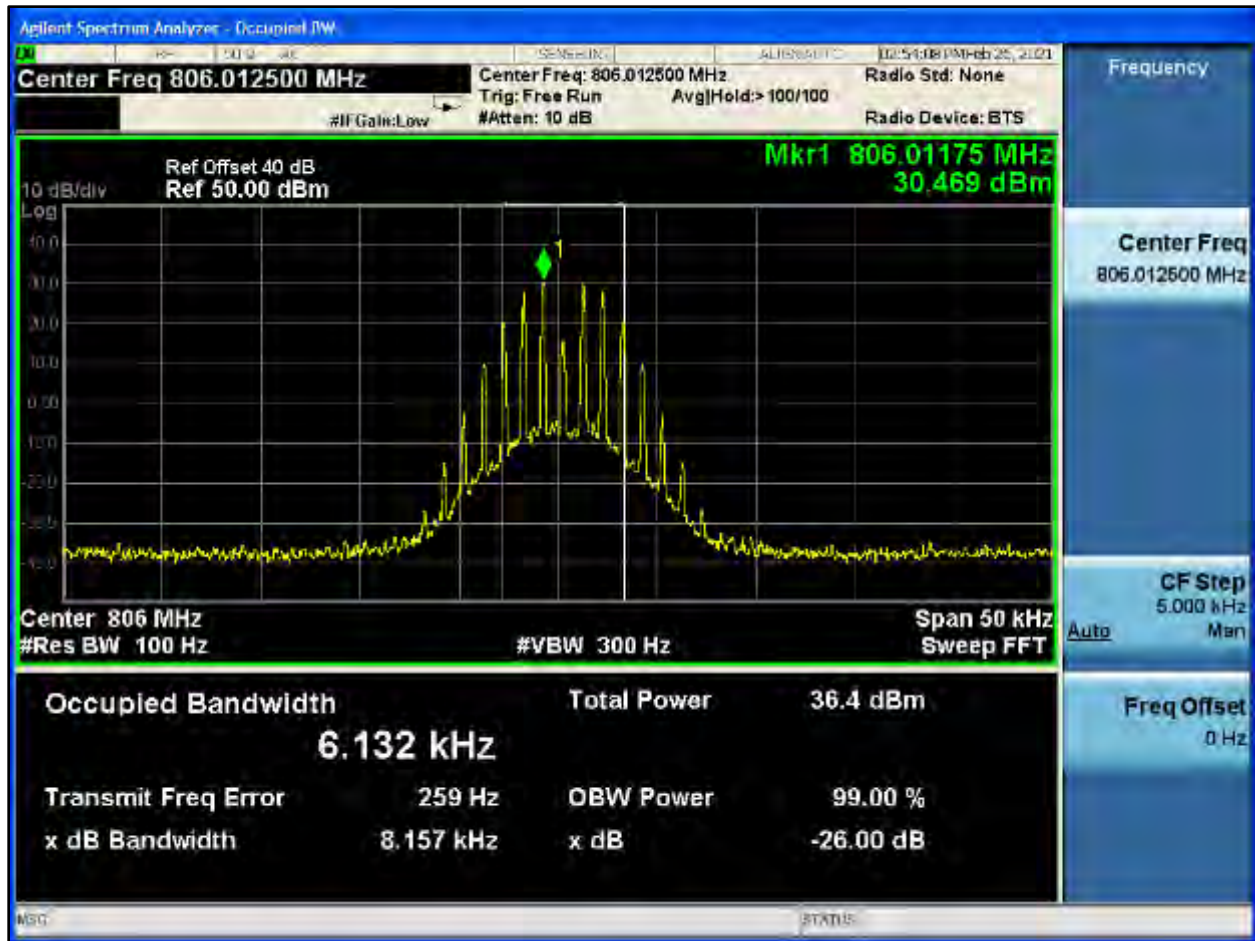


Plot 8-554: OBW 99%, 806.0125 MHz, NPSPAC

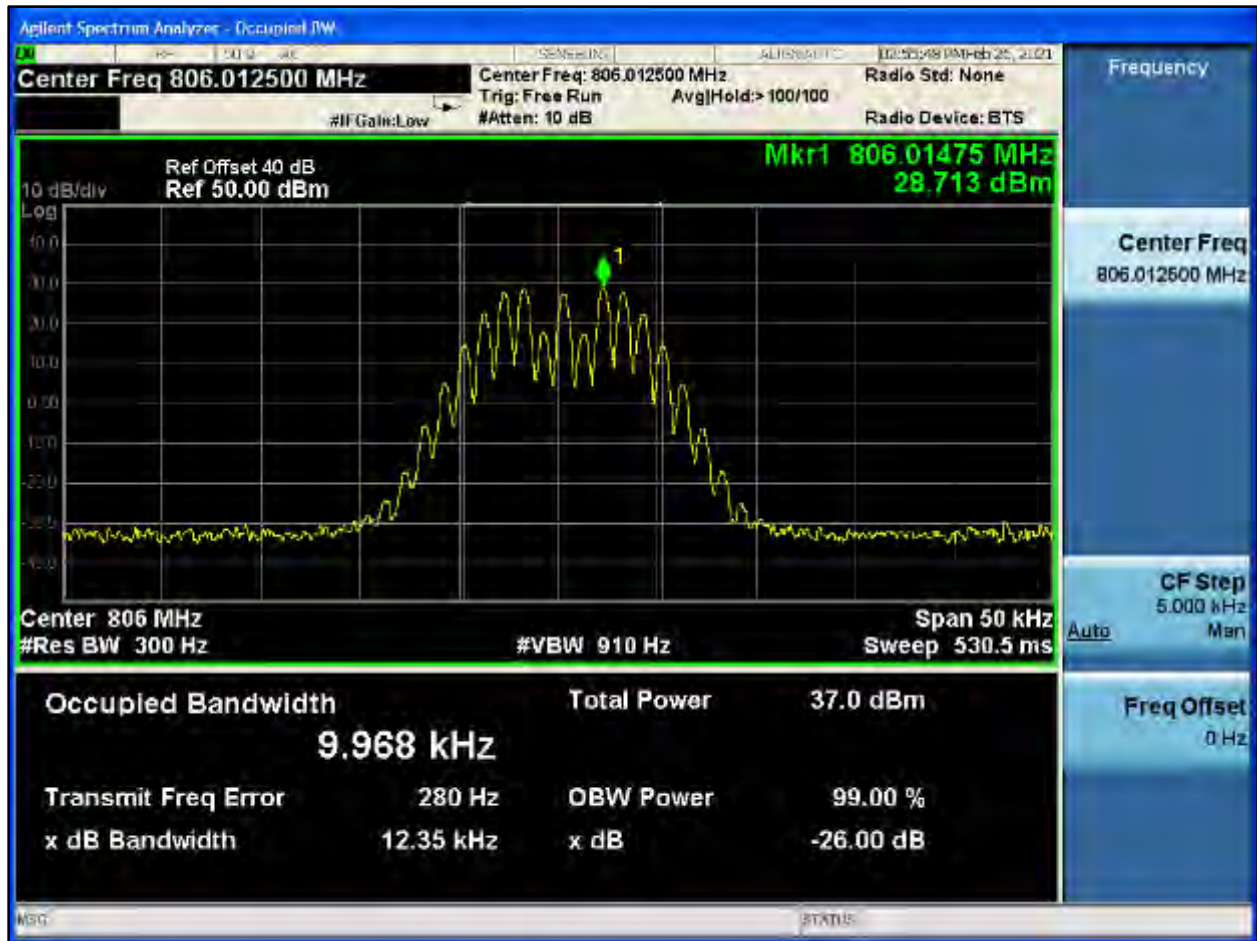

Plot 8-555: OBW 99%, 806.0125 MHz, WB

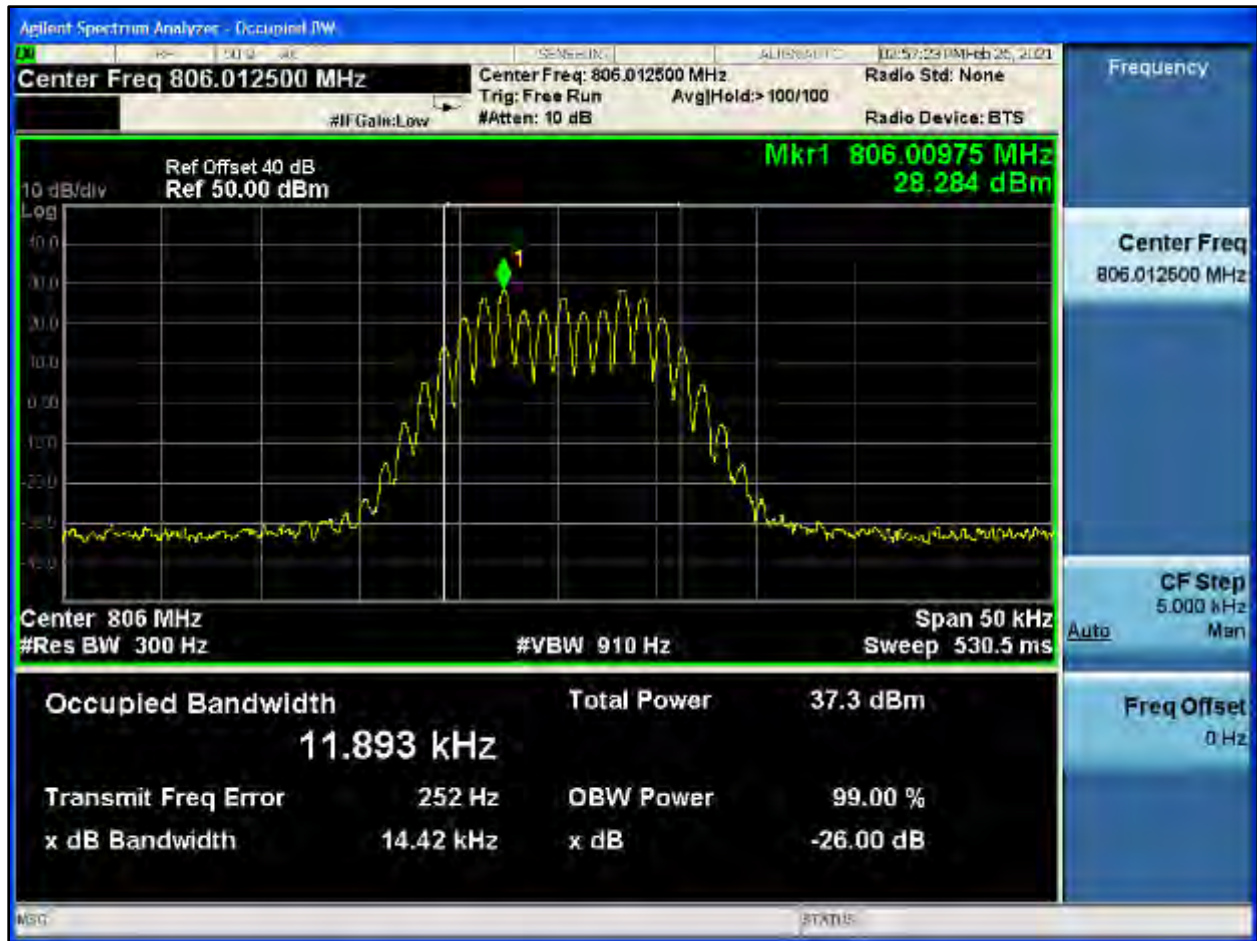


Plot 8-556: OBW 99%, 806.0125 MHz, C4FM

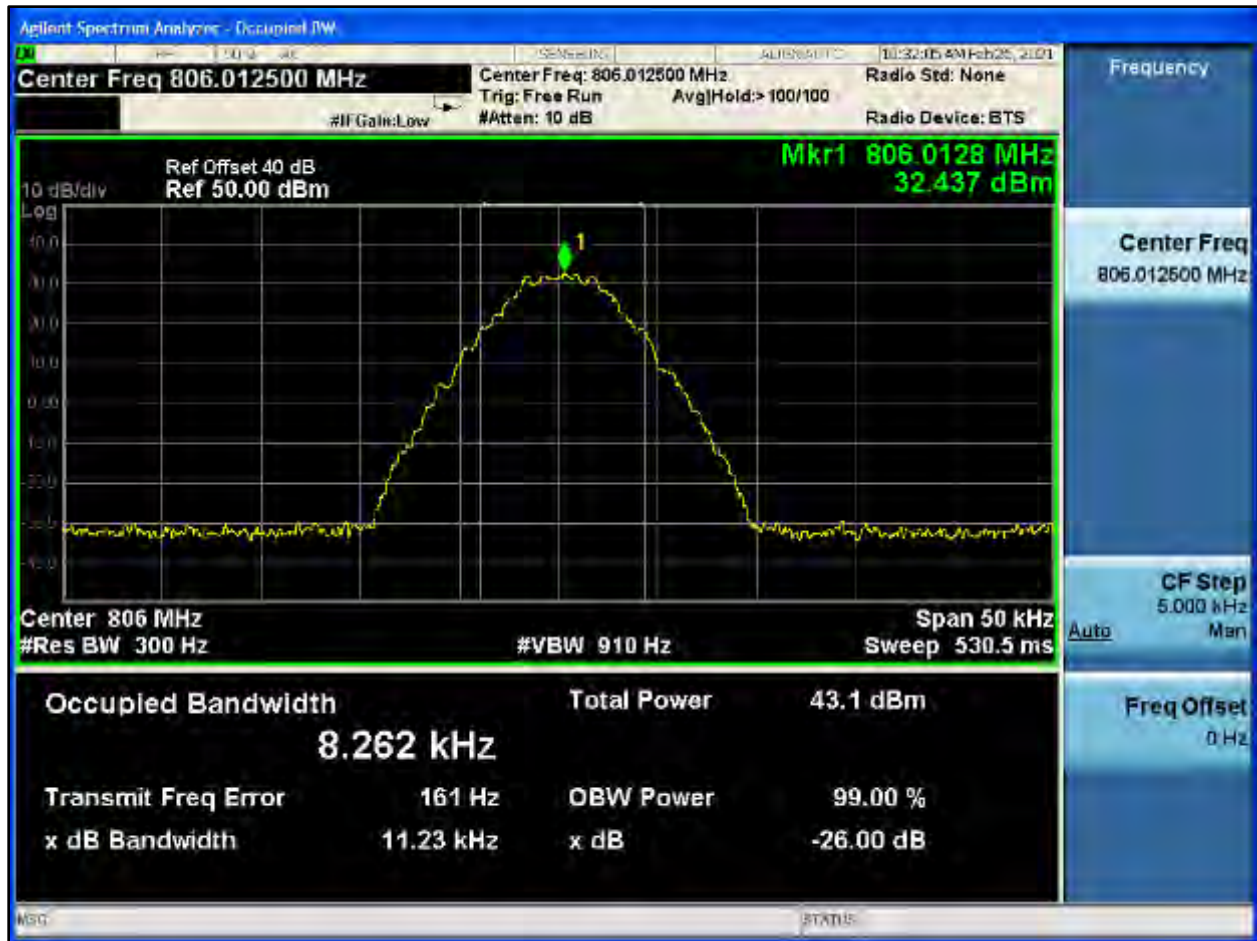


Plot 8-557: OBW 99%, 806.0125 MHz, H-CPM TDMA



Plot 8-558: OBW 99%, 806.0125 MHz, NB 2 FSK

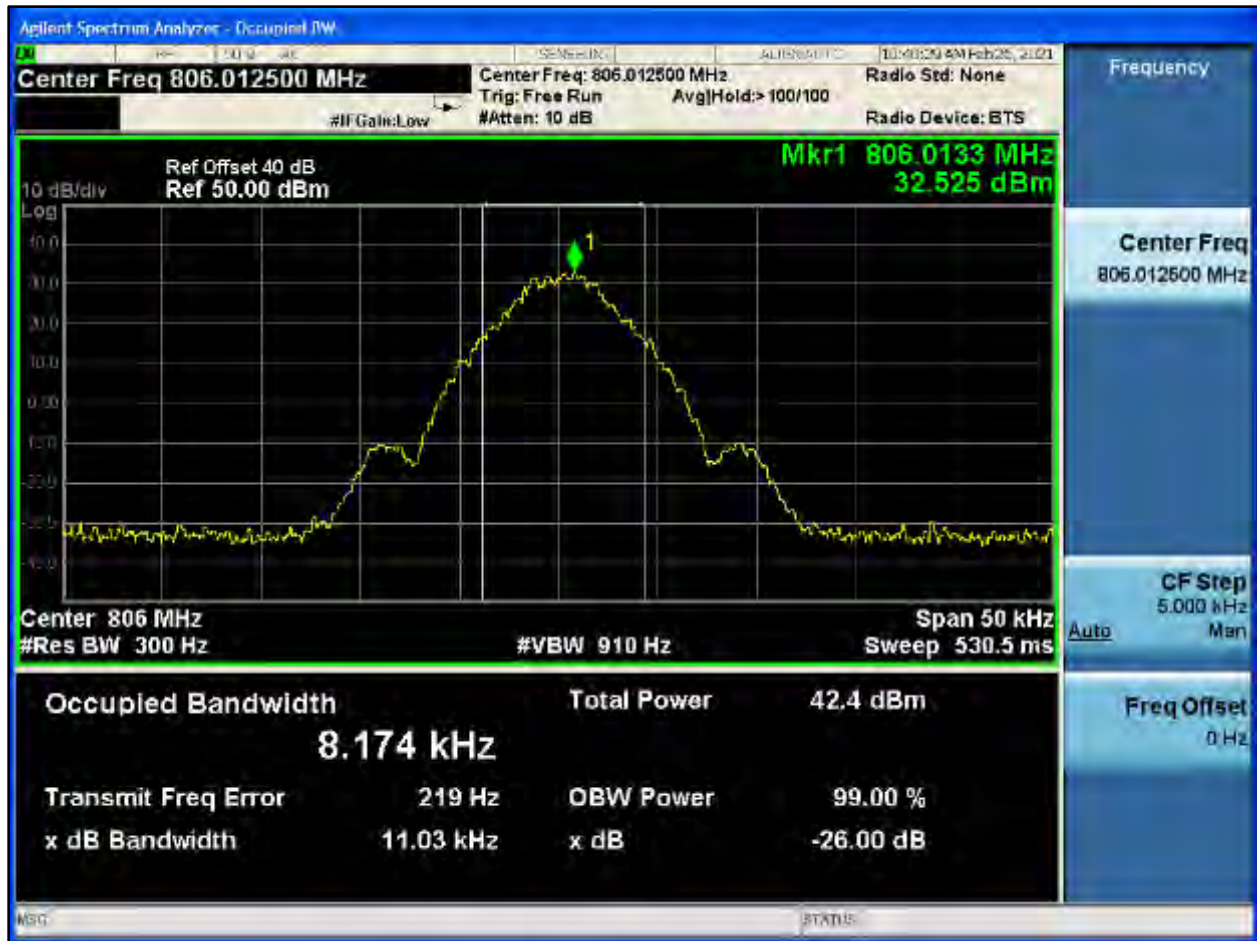


Plot 8-559: OBW 99%, 806.0125 MHz, NPSPAC 2 FSK

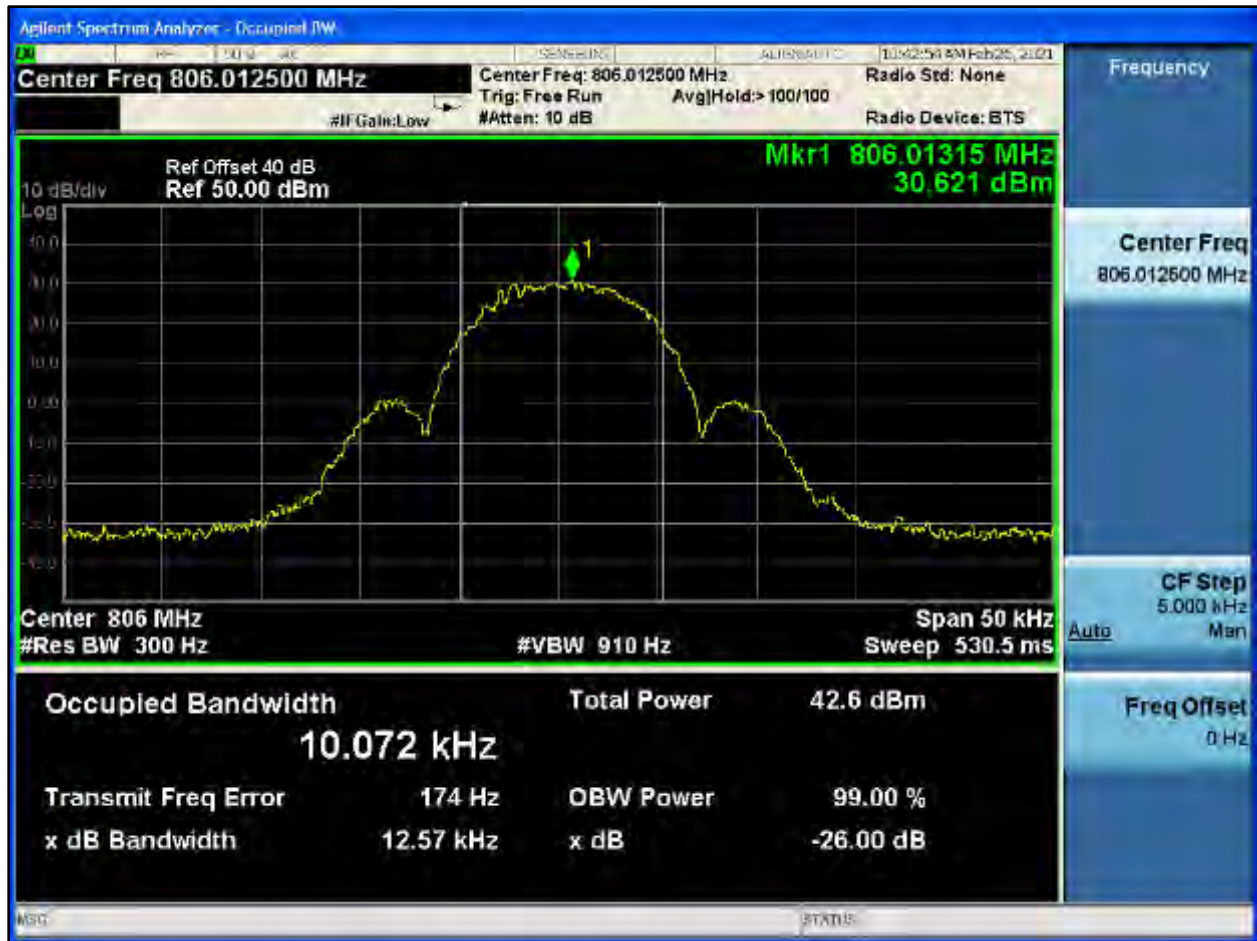


Plot 8-560: OBW 99%, 806.0125 MHz, WB 2 FSK




Plot 8-561: OBW 99%, 806.0125 MHz, HVD SMR

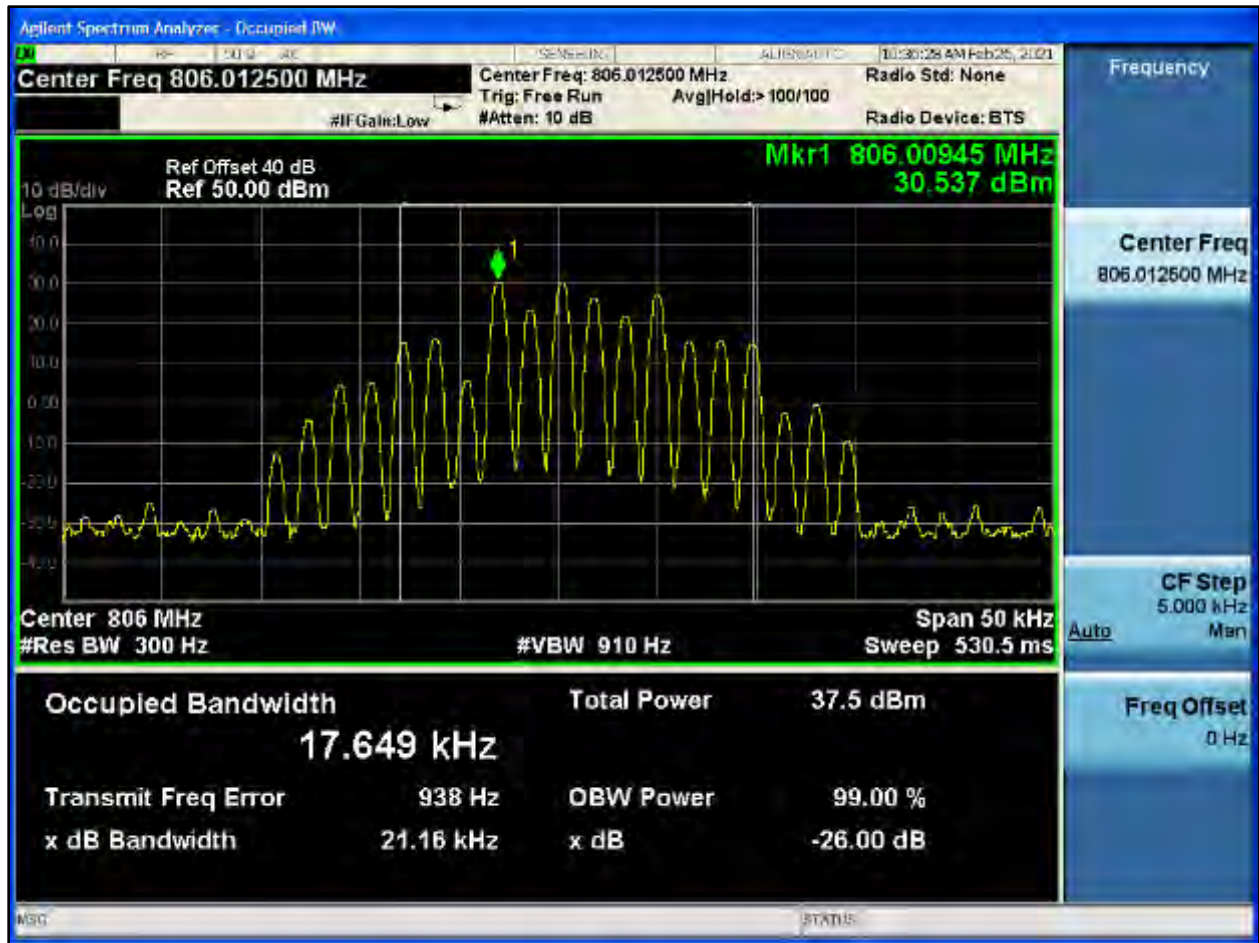


Plot 8-562: OBW 99%, 806.0125 MHz, HVD NPSPAC

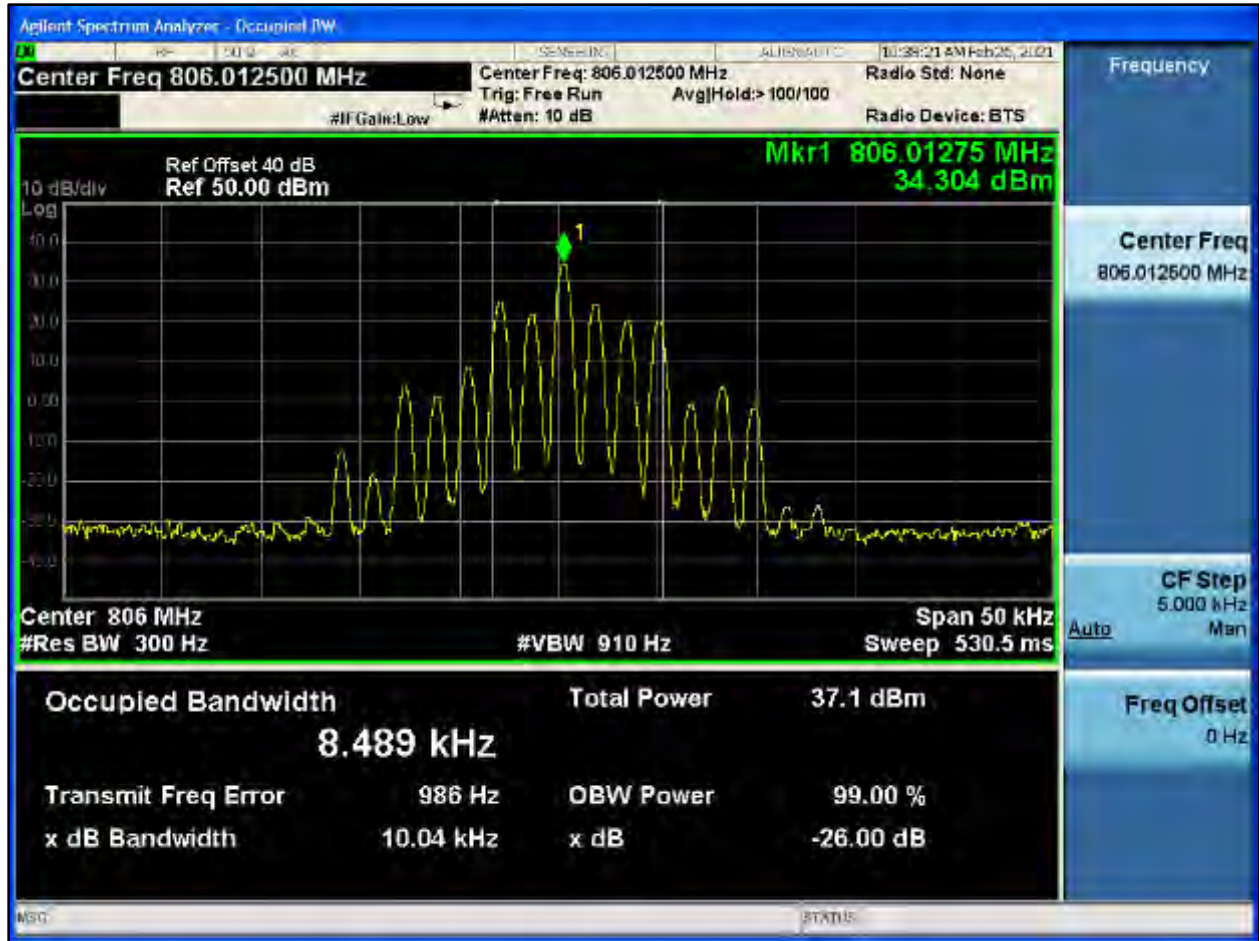


Plot 8-563: OBW 99%, 815.0000 MHz, NB

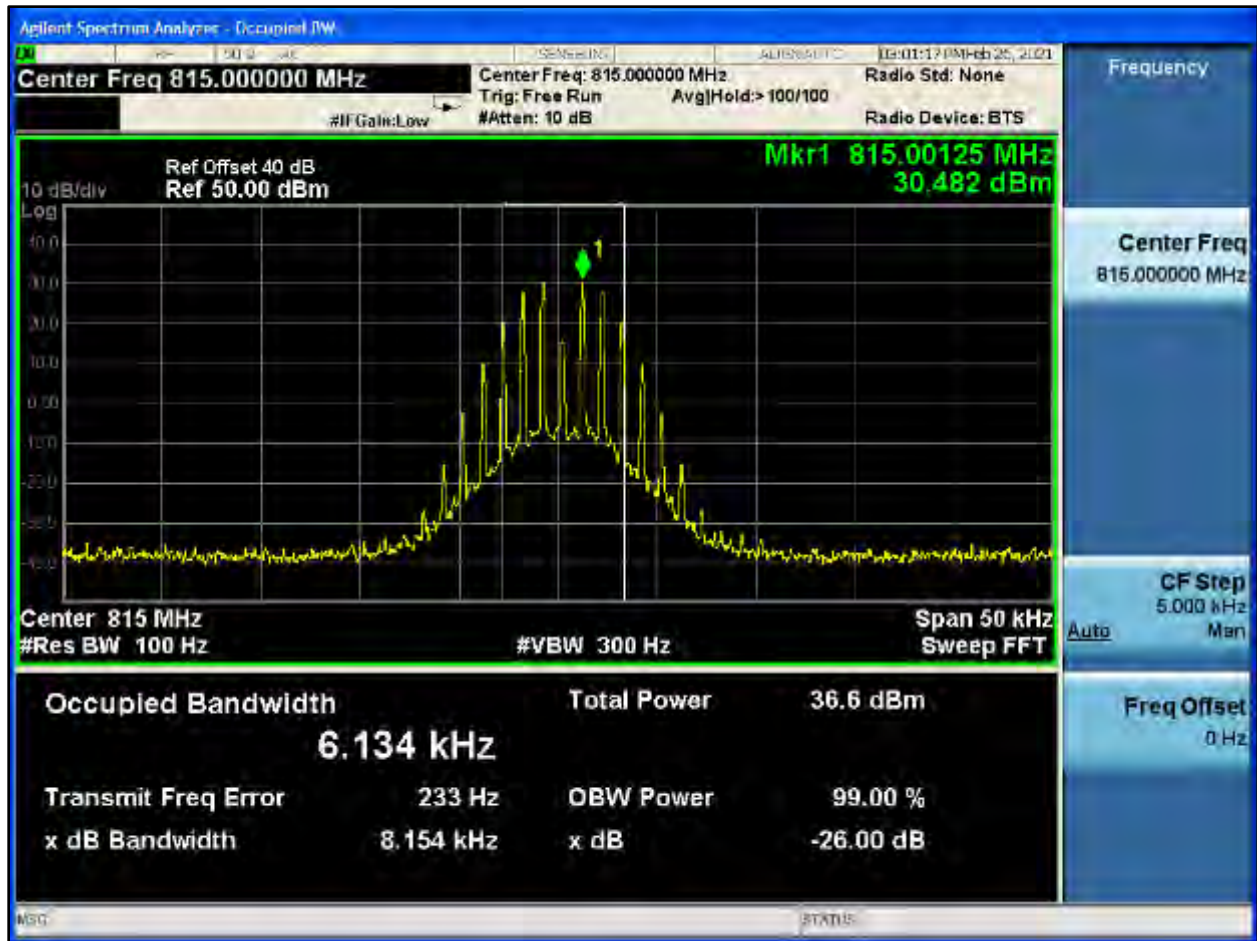

Plot 8-564: OBW 99%, 815.0000 MHz, NPSPAC

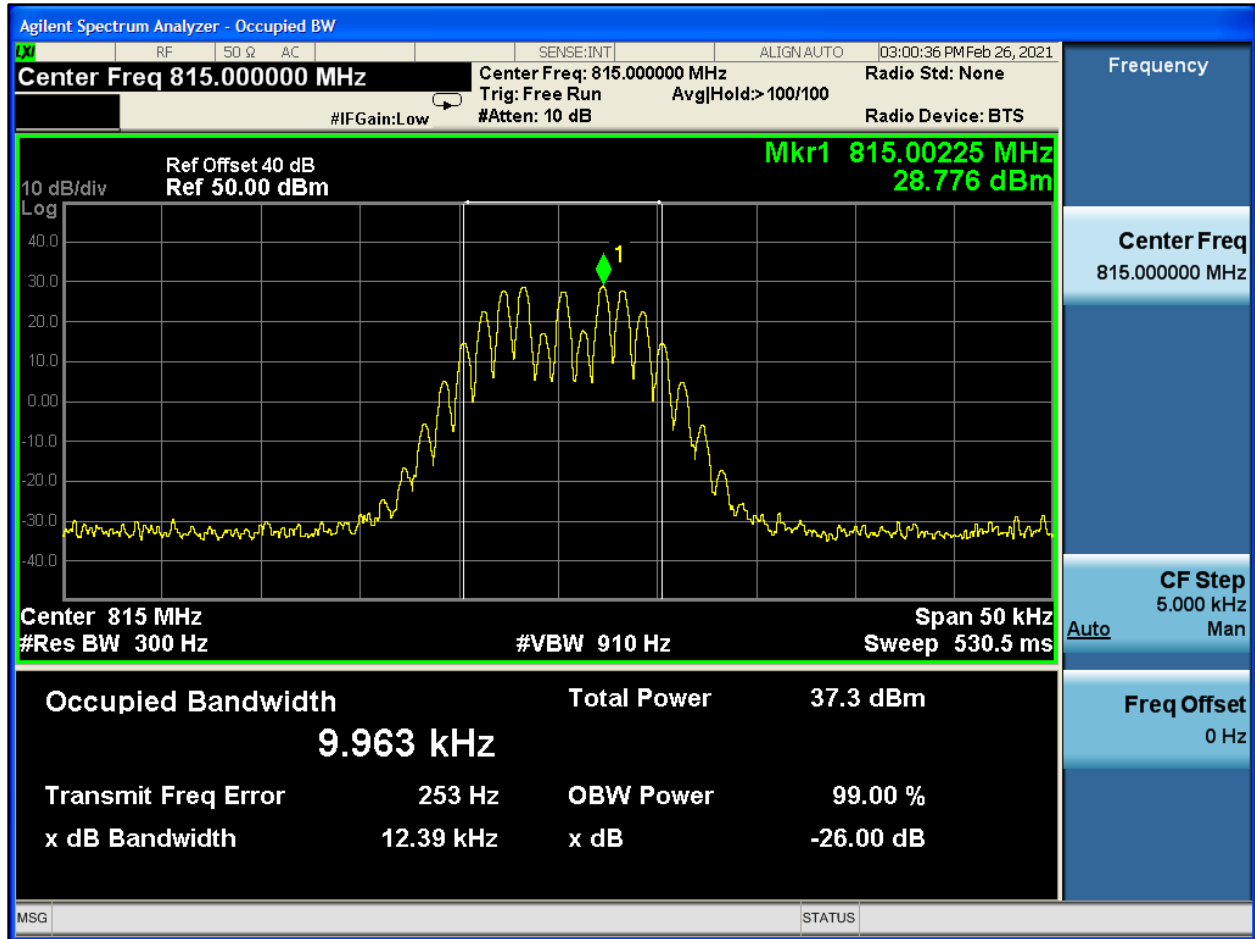


Plot 8-565: OBW 99%, 815.0000 MHz, WB

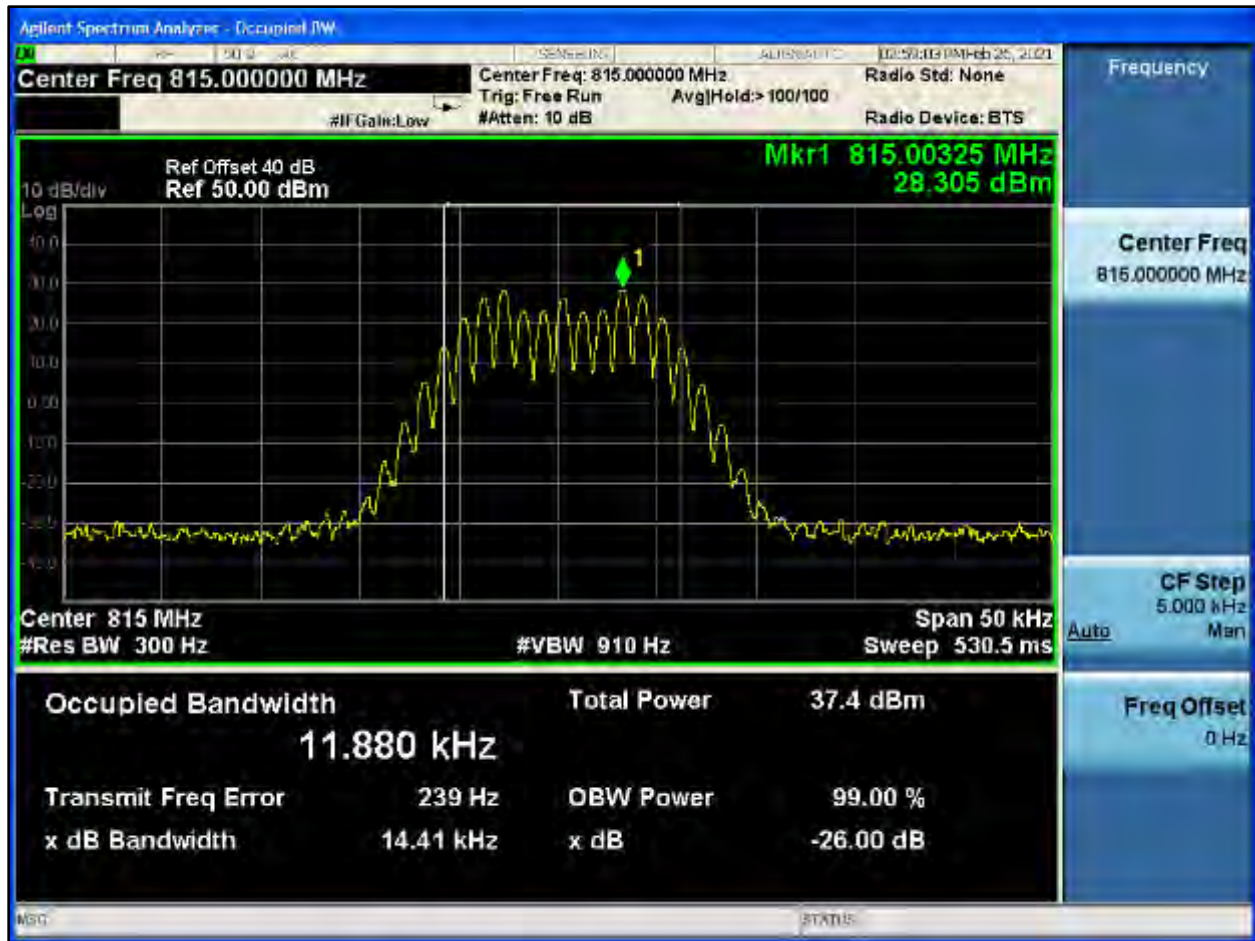


Plot 8-566: OBW 99%, 815.0000 MHz, C4FM




Plot 8-567: OBW 99%, 815.0000 MHz, H-CPM TDMA

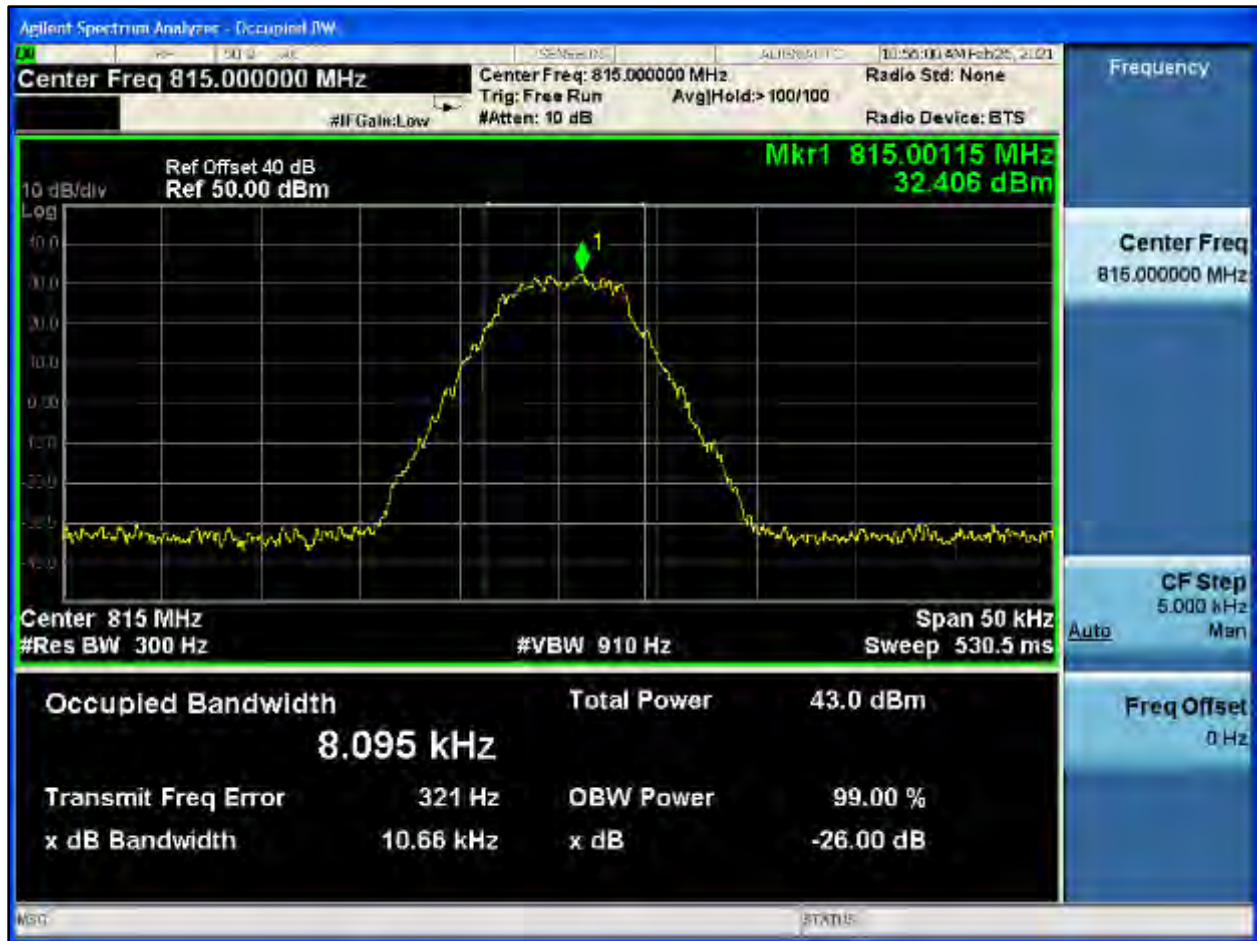

Plot 8-568: OBW 99%, 815.0000 MHz, NB 2 FSK

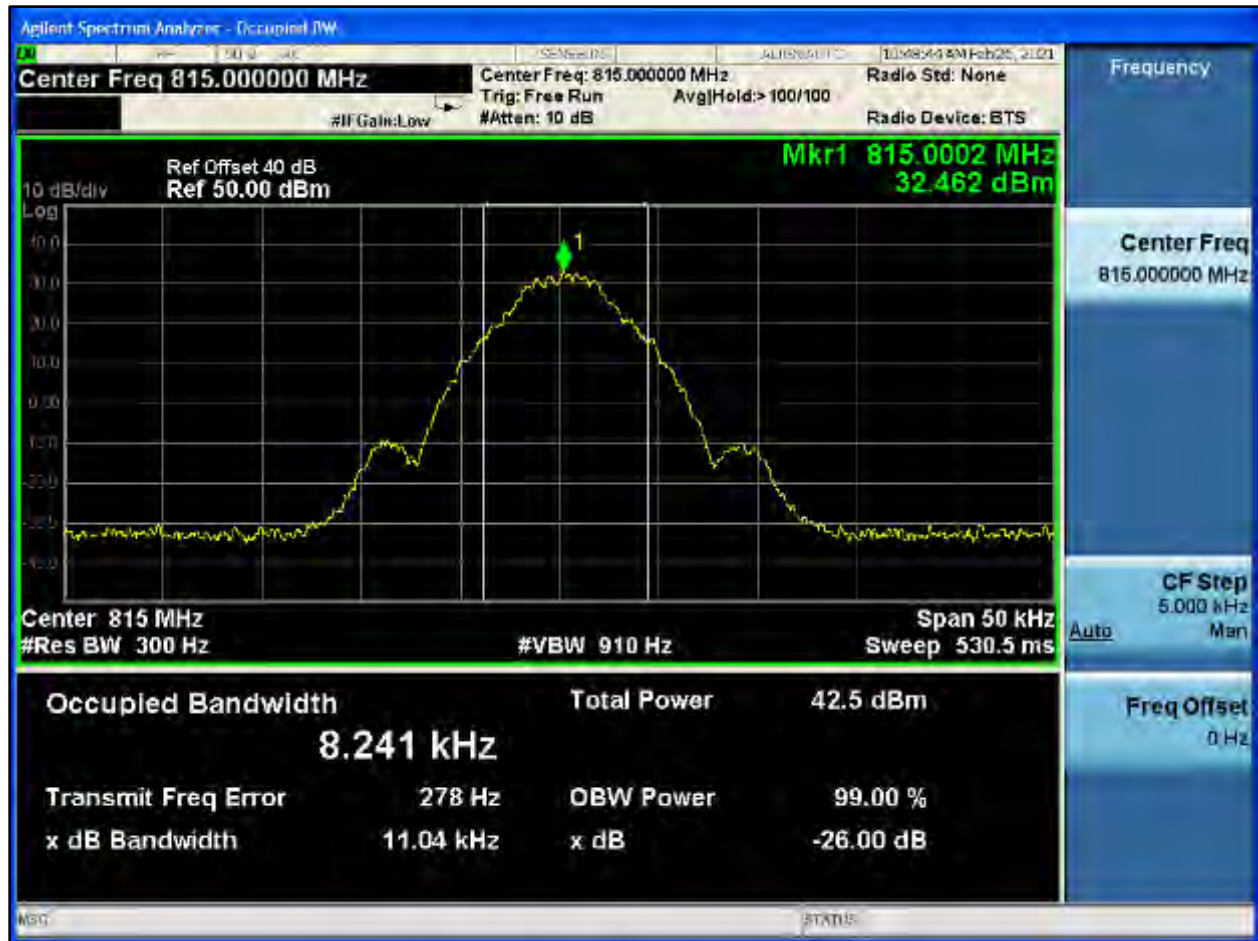


Plot 8-569: OBW 99%, 815.0000 MHz, NPSPAC 2 FSK

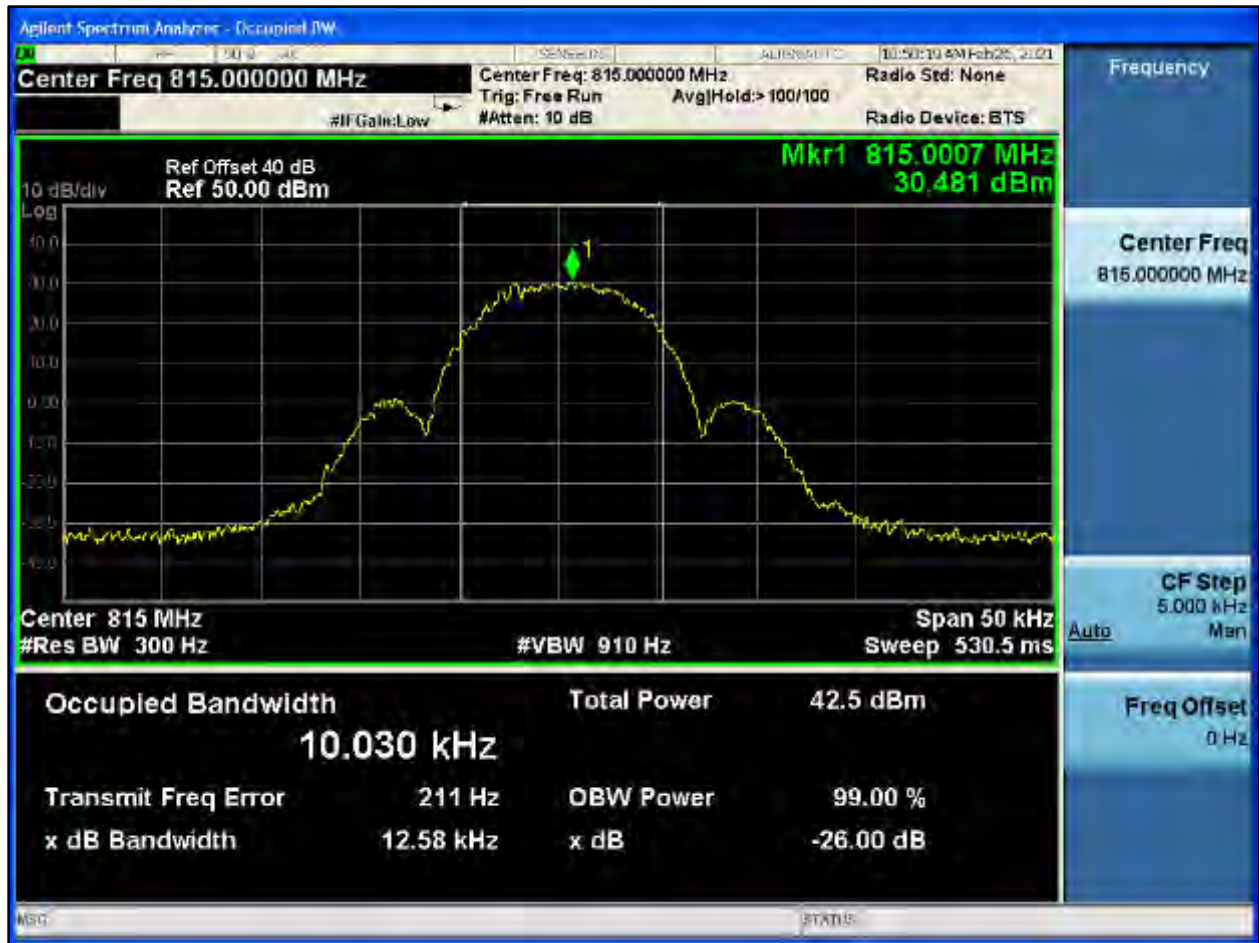


Plot 8-570: OBW 99%, 815.0000 MHz, WB 2 FSK




Plot 8-571: OBW 99%, 815.0000 MHz, HVD SMR

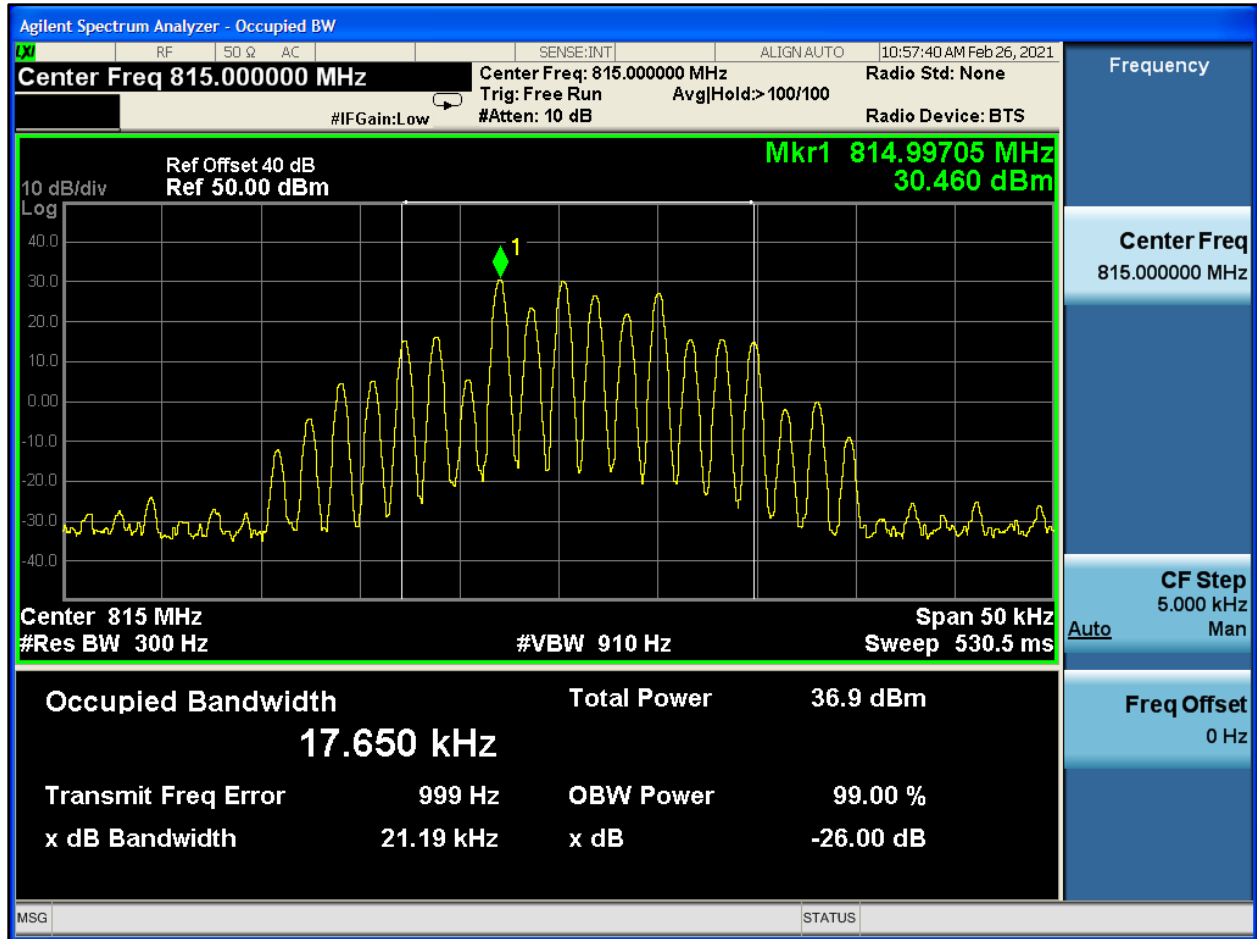


Plot 8-572: OBW 99%, 815.0000 MHz, HVD NPSPAC

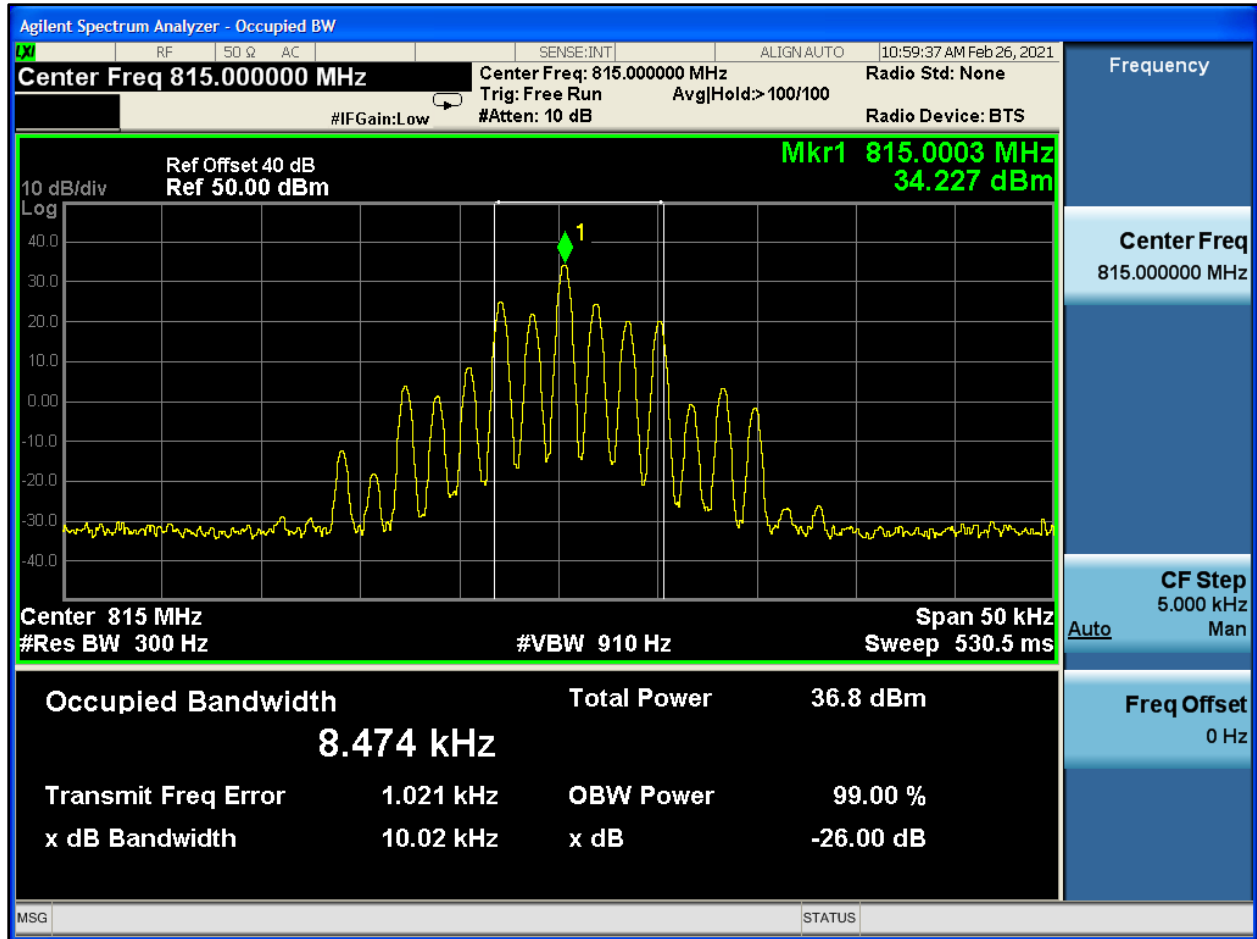


Plot 8-573: OBW 99%, 823.9875 MHz, NB

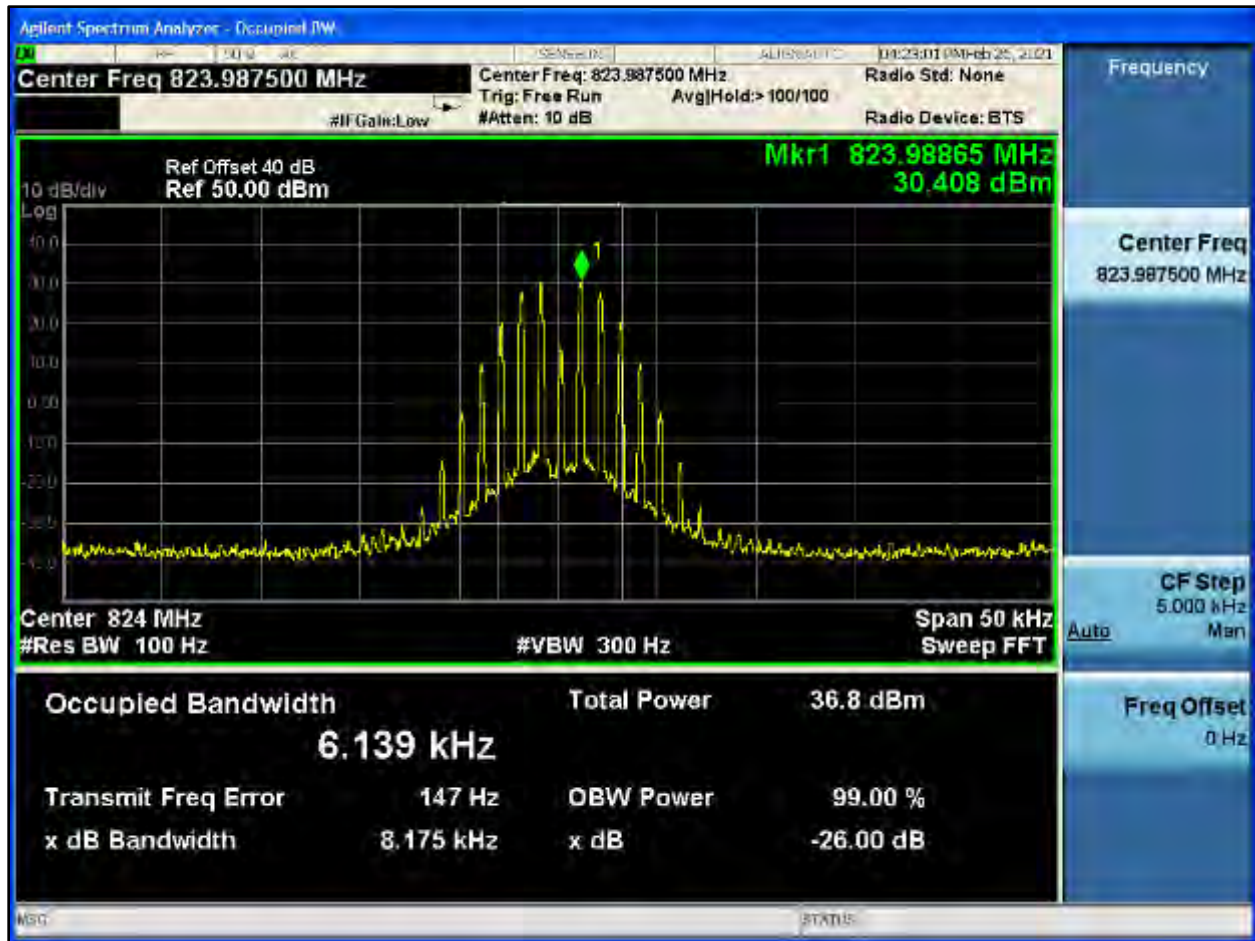


Plot 8-574: OBW 99%, 823.9875 MHz, NPSPAC

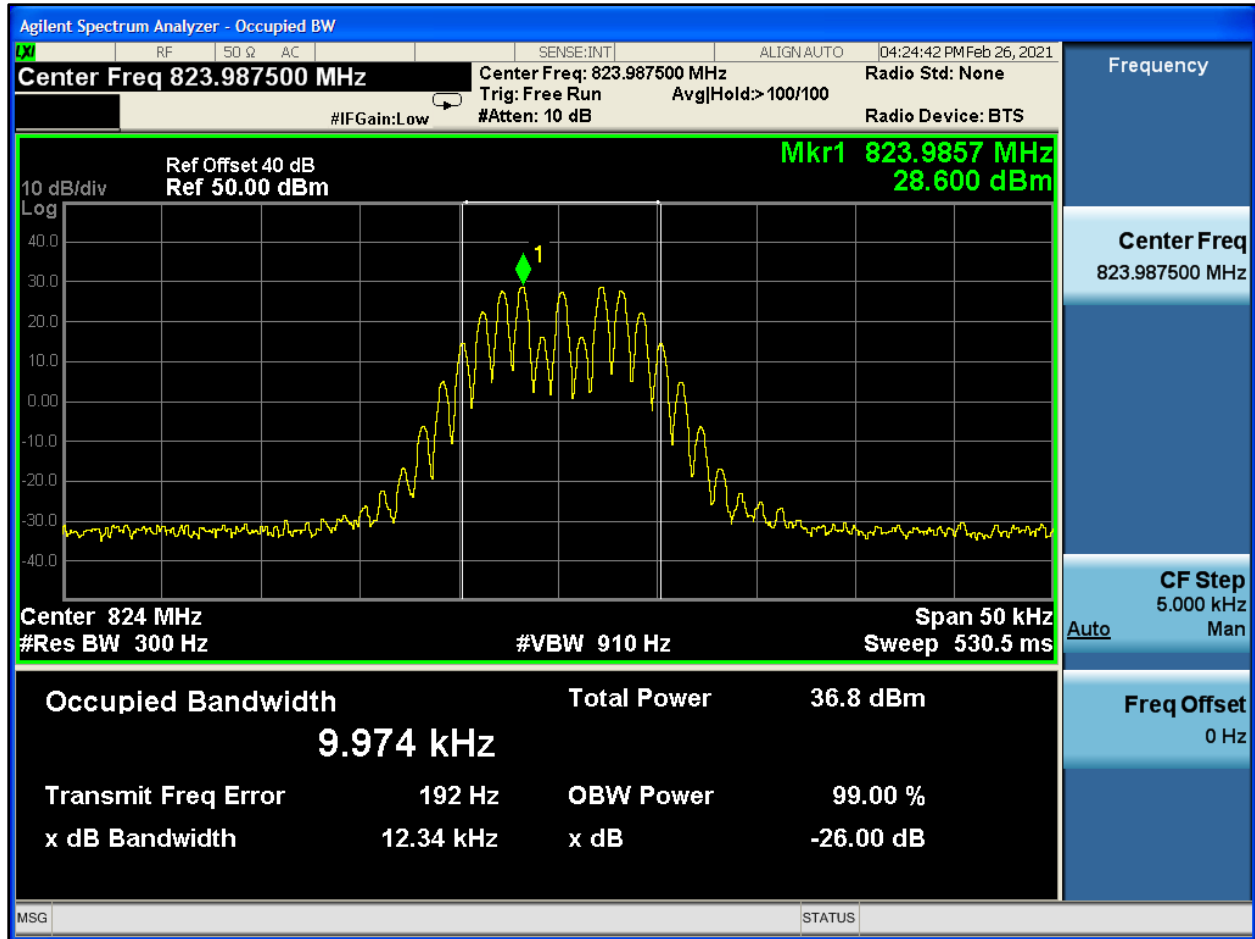

Plot 8-575: OBW 99%, 823.9875 MHz, WB

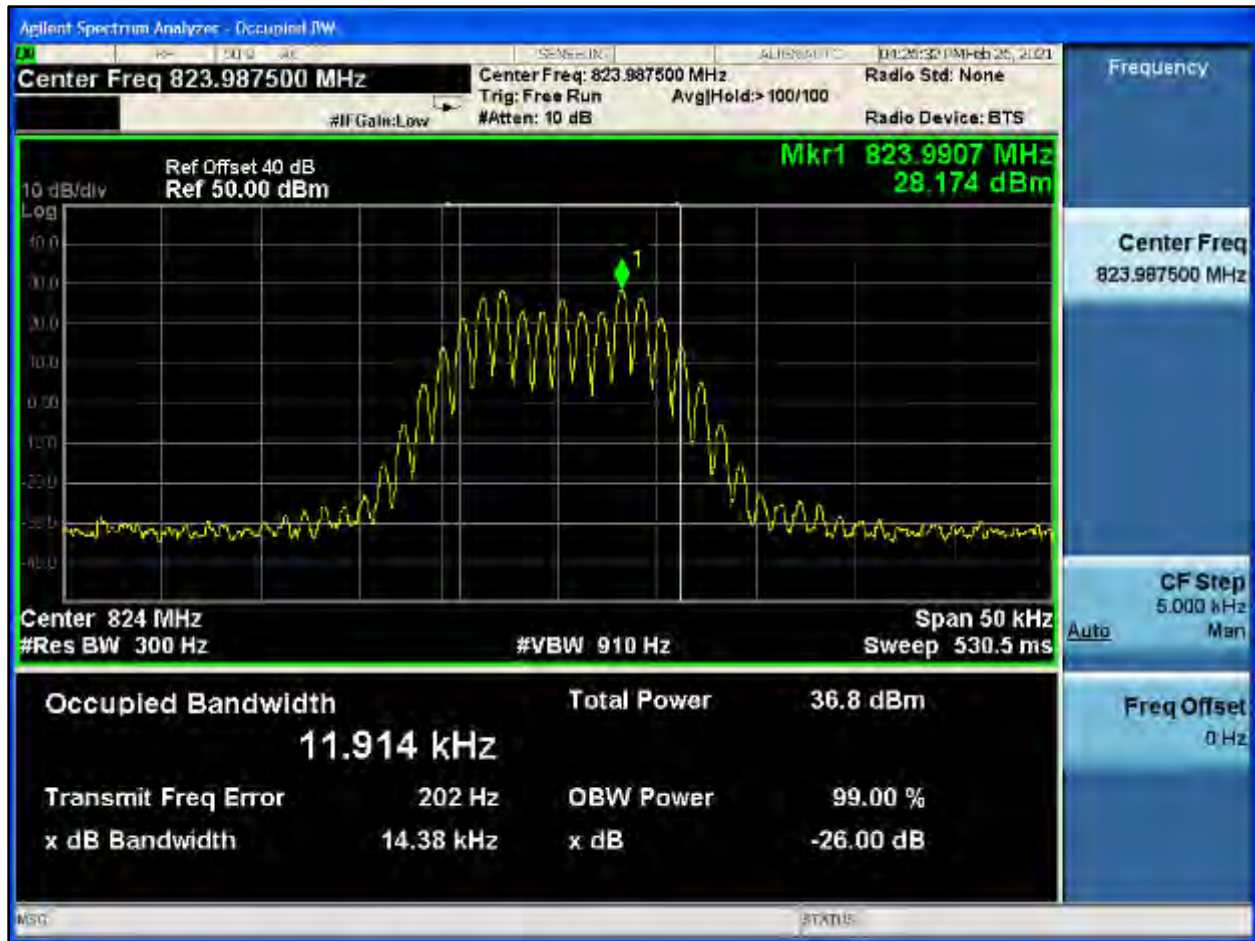

Plot 8-576: OBW 99%, 823.9875 MHz, C4FM

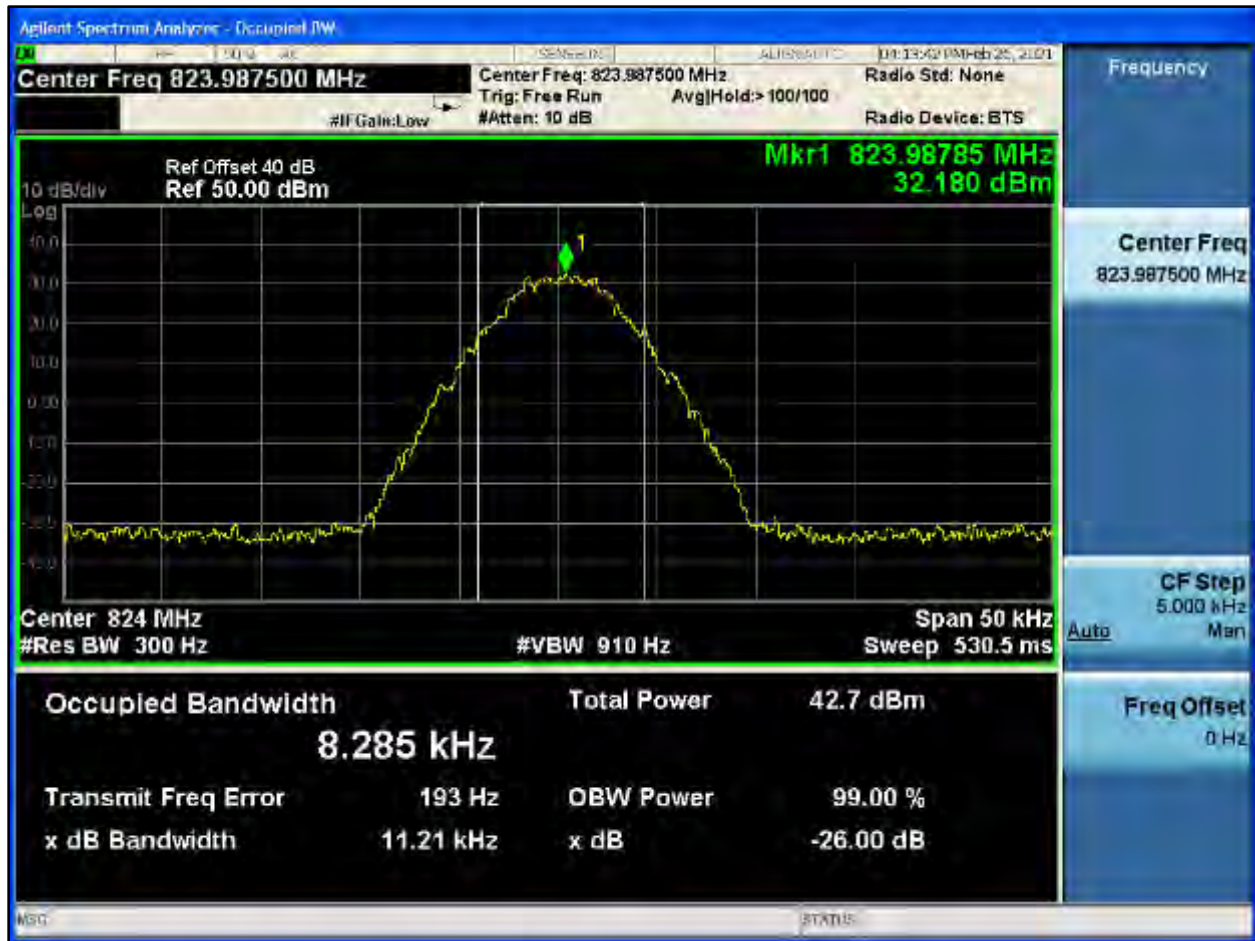


Plot 8-577: OBW 99%, 823.9875 MHz, H-CPM TDMA



Plot 8-578: OBW 99%, 823.9875 MHz, NB 2 FSK




Plot 8-579: OBW 99%, 823.9875 MHz, NPSPAC 2 FSK

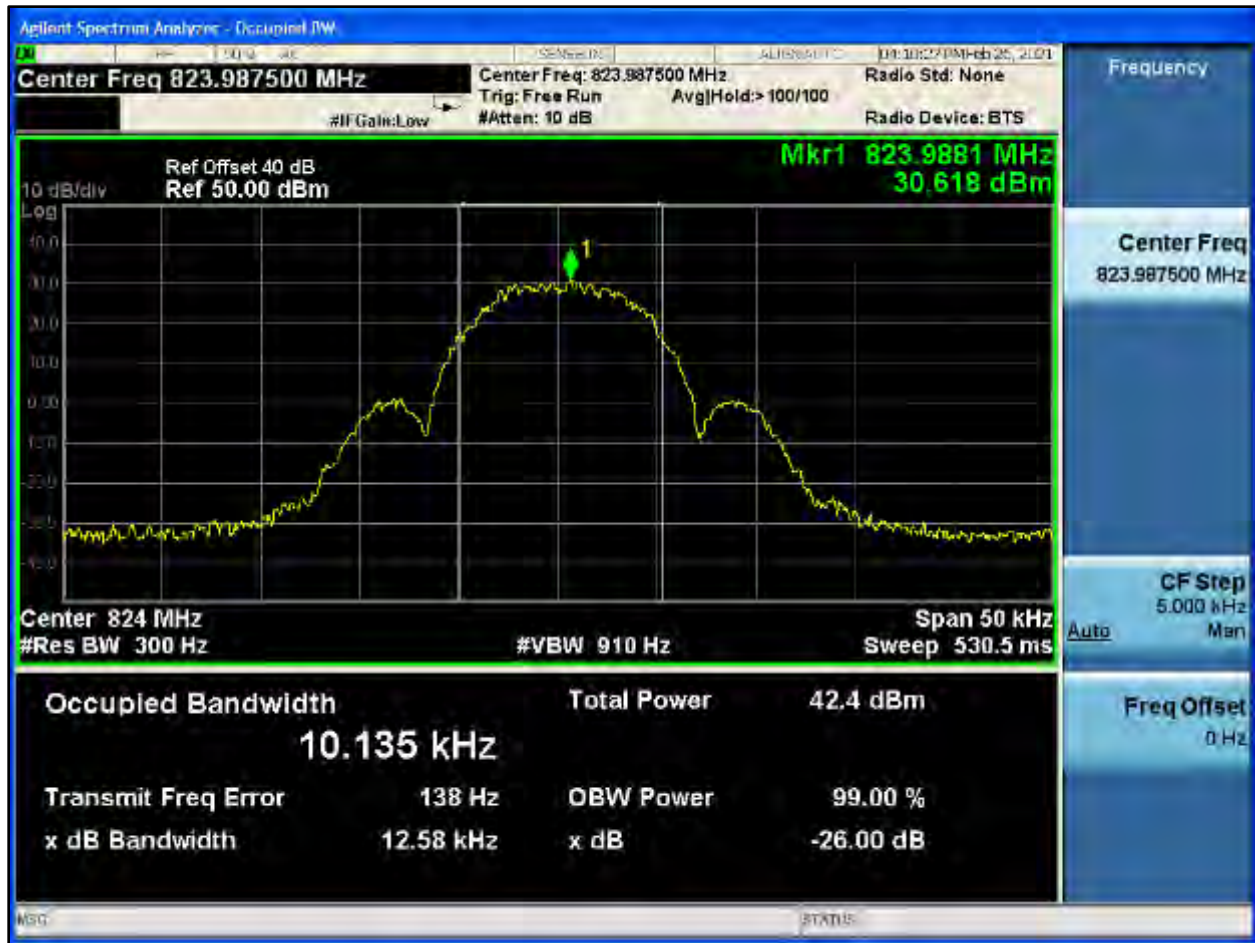


Plot 8-580: OBW 99%, 823.9875 MHz, WB 2 FSK




Plot 8-581: OBW 99%, 823.9875 MHz, HVD SMR

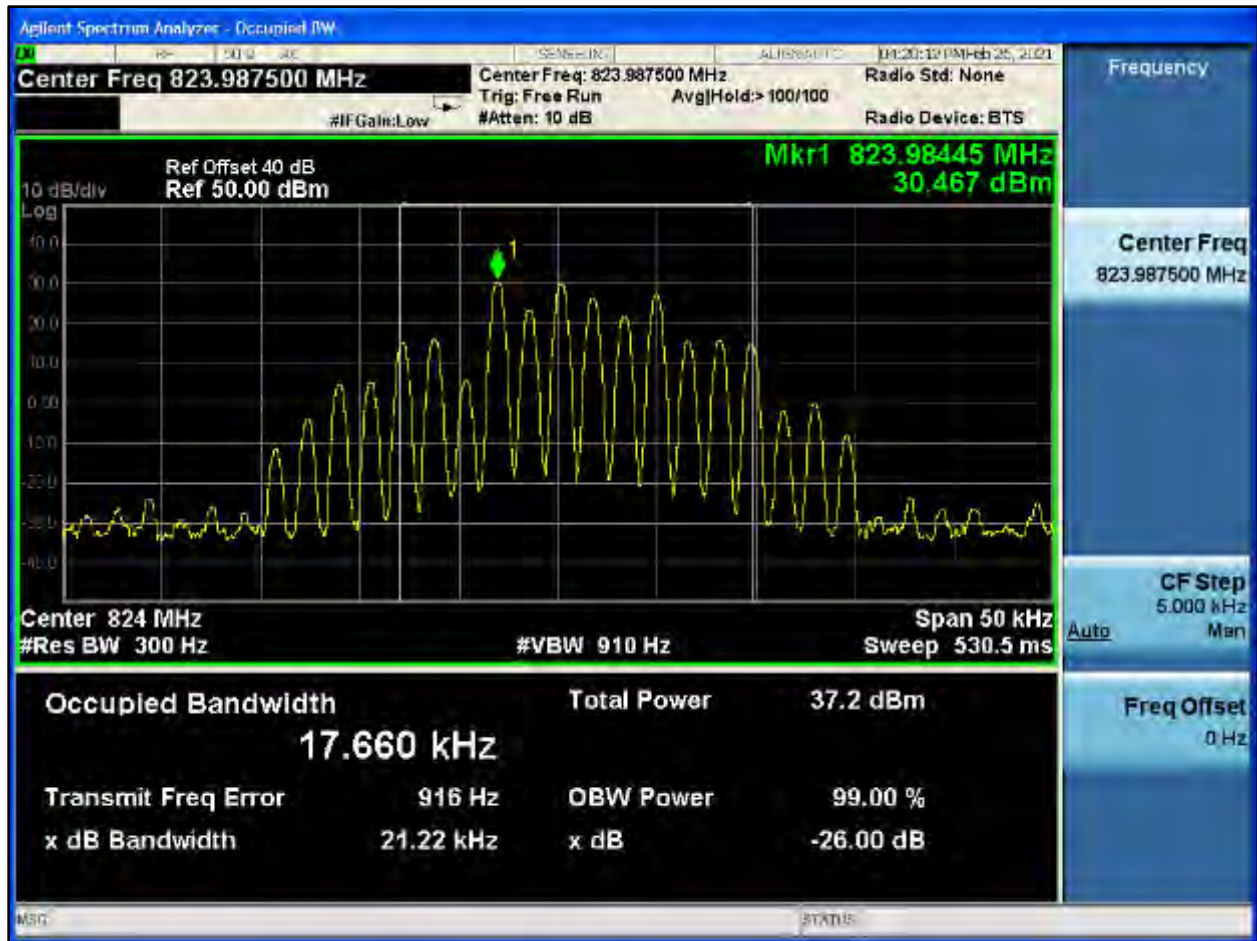


Plot 8-582: OBW 99%, 823.9875 MHz, HVD NPSPAC

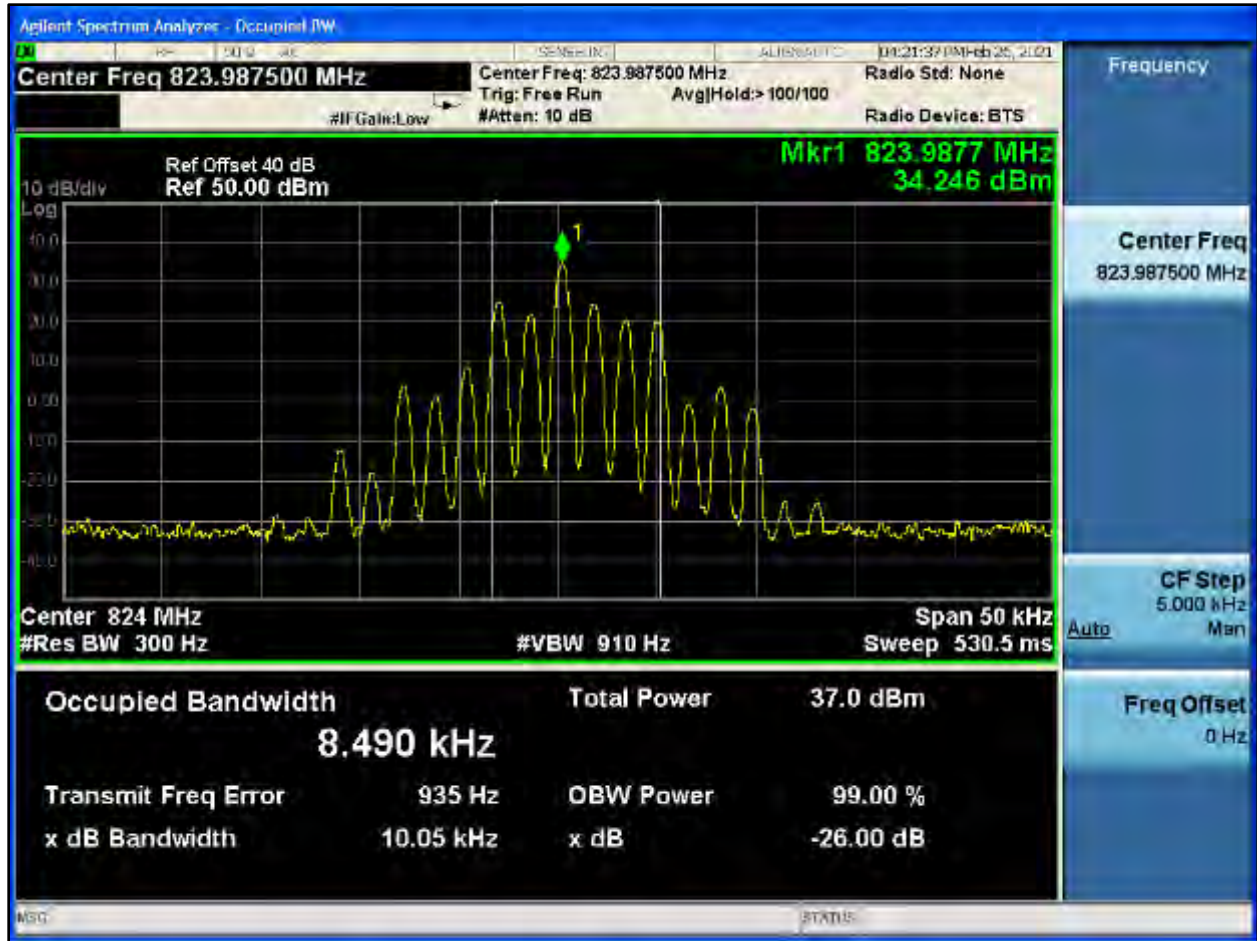


Plot 8-583: OBW 99%, 824.9875 MHz, NB

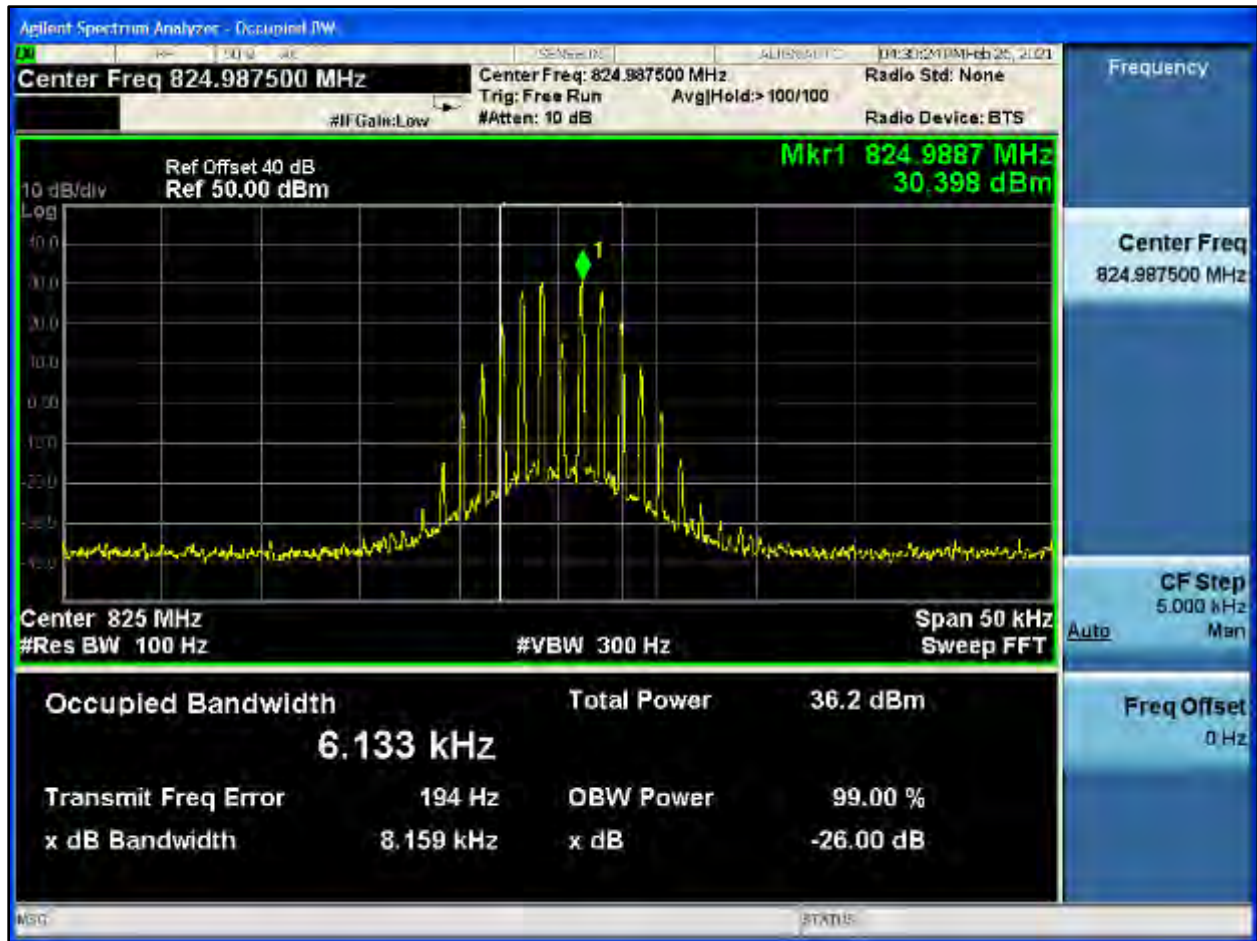


Plot 8-584: OBW 99%, 824.9875 MHz, NPSPAC

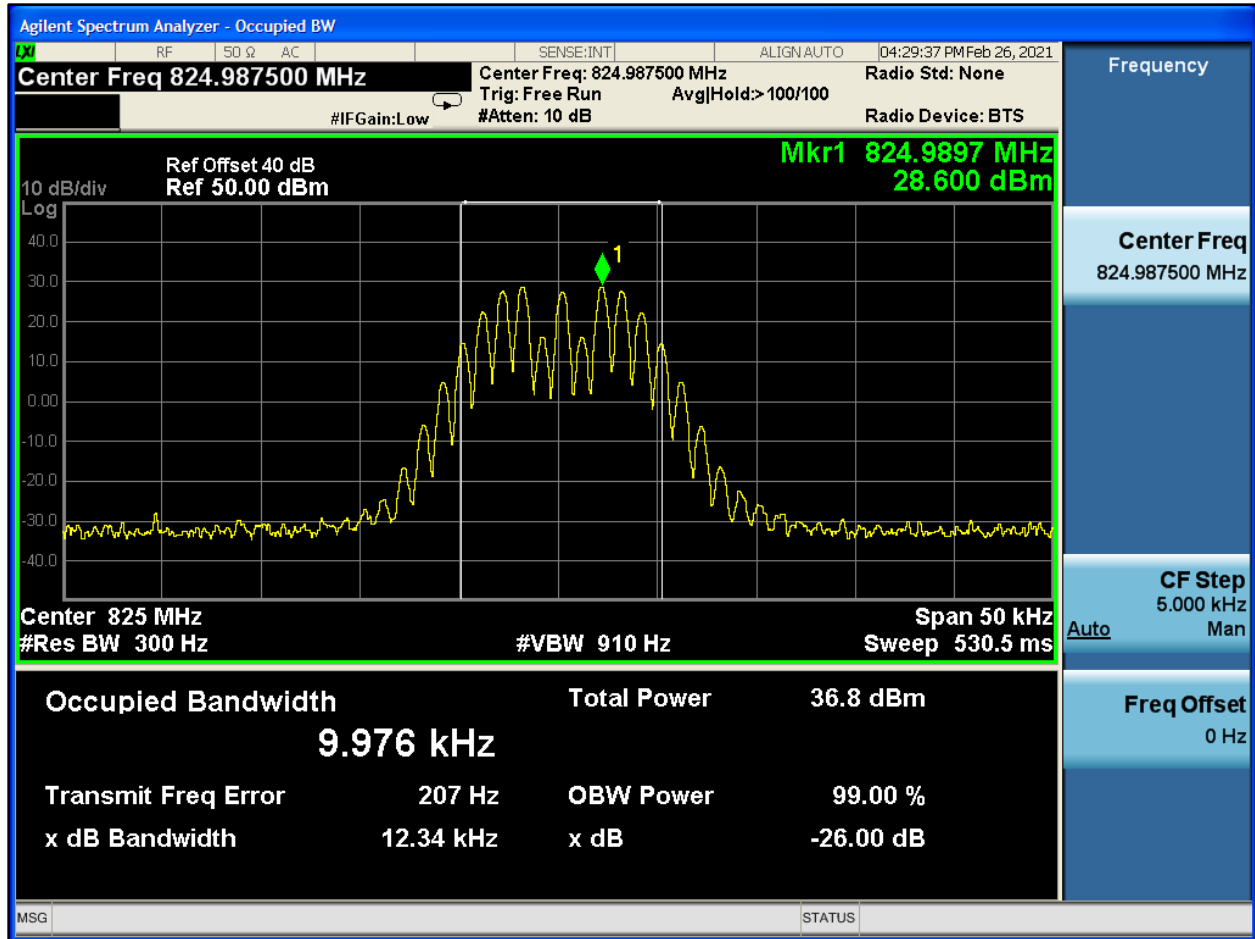

Plot 8-585: OBW 99%, 824.9875 MHz, WB

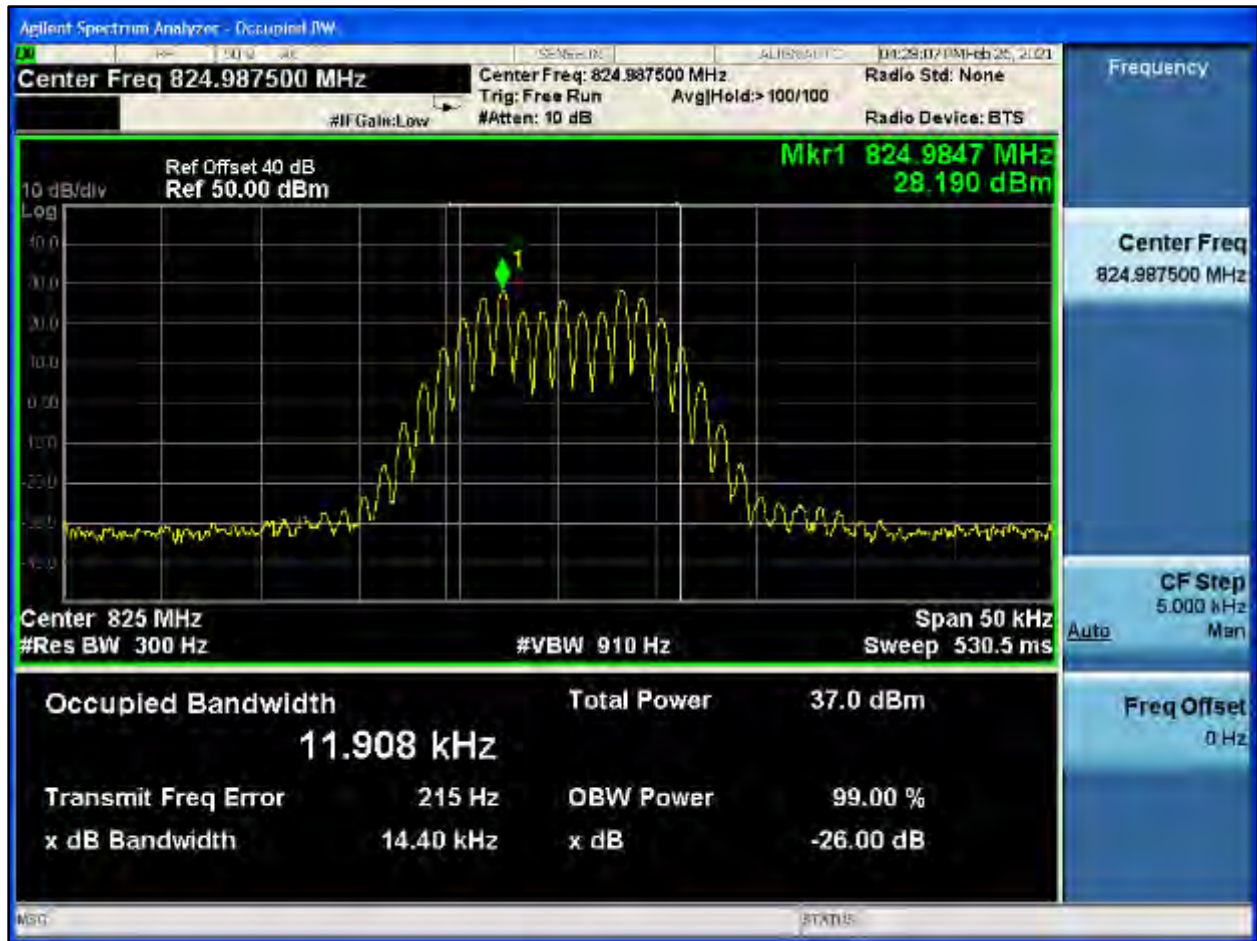

Plot 8-586: OBW 99%, 824.9875 MHz, C4FM

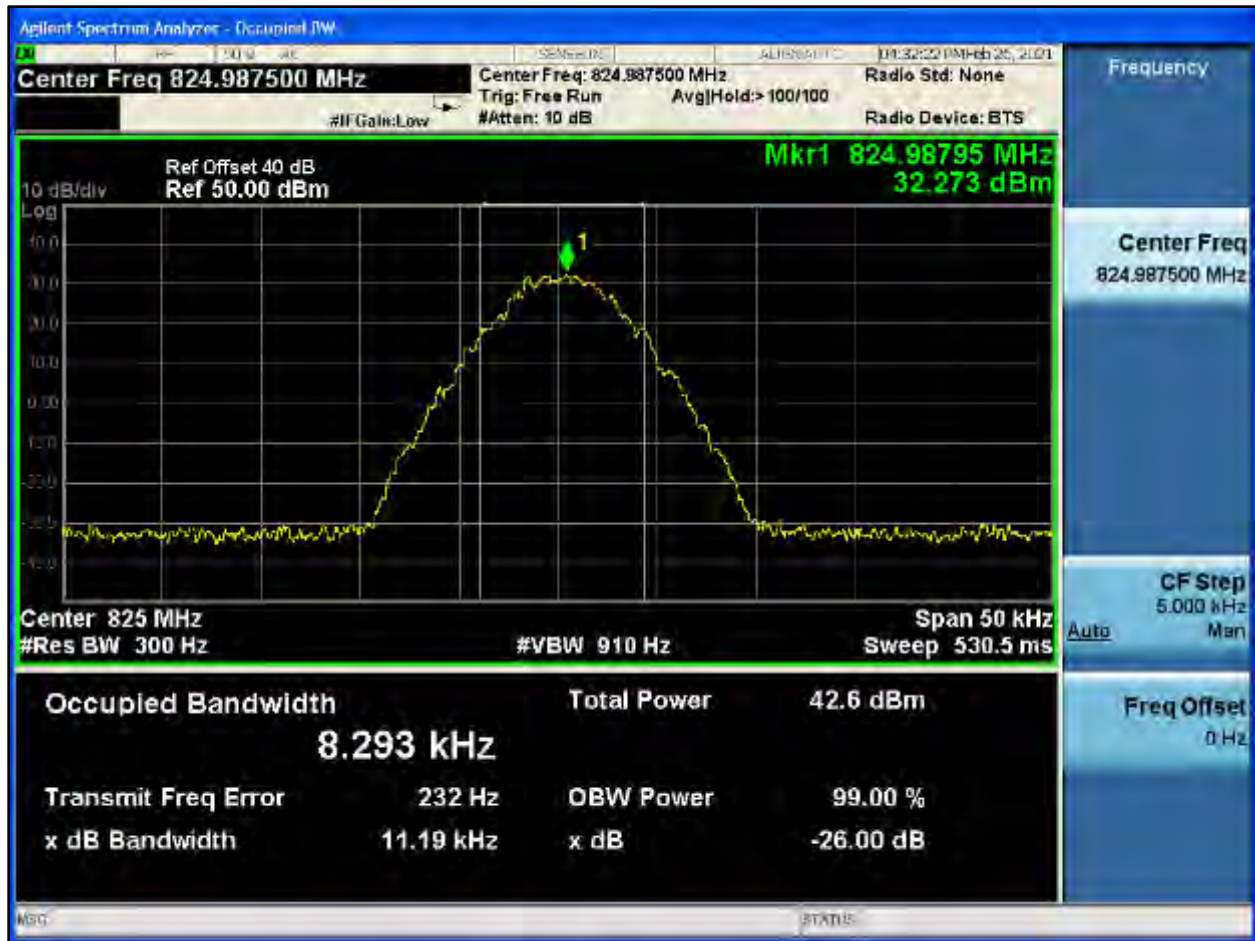


Plot 8-587: OBW 99%, 824.9875 MHz, H-CPM TDMA



Plot 8-588: OBW 99%, 824.9875 MHz, NB 2 FSK




Plot 8-589: OBW 99%, 824.9875 MHz, NPSPAC 2 FSK

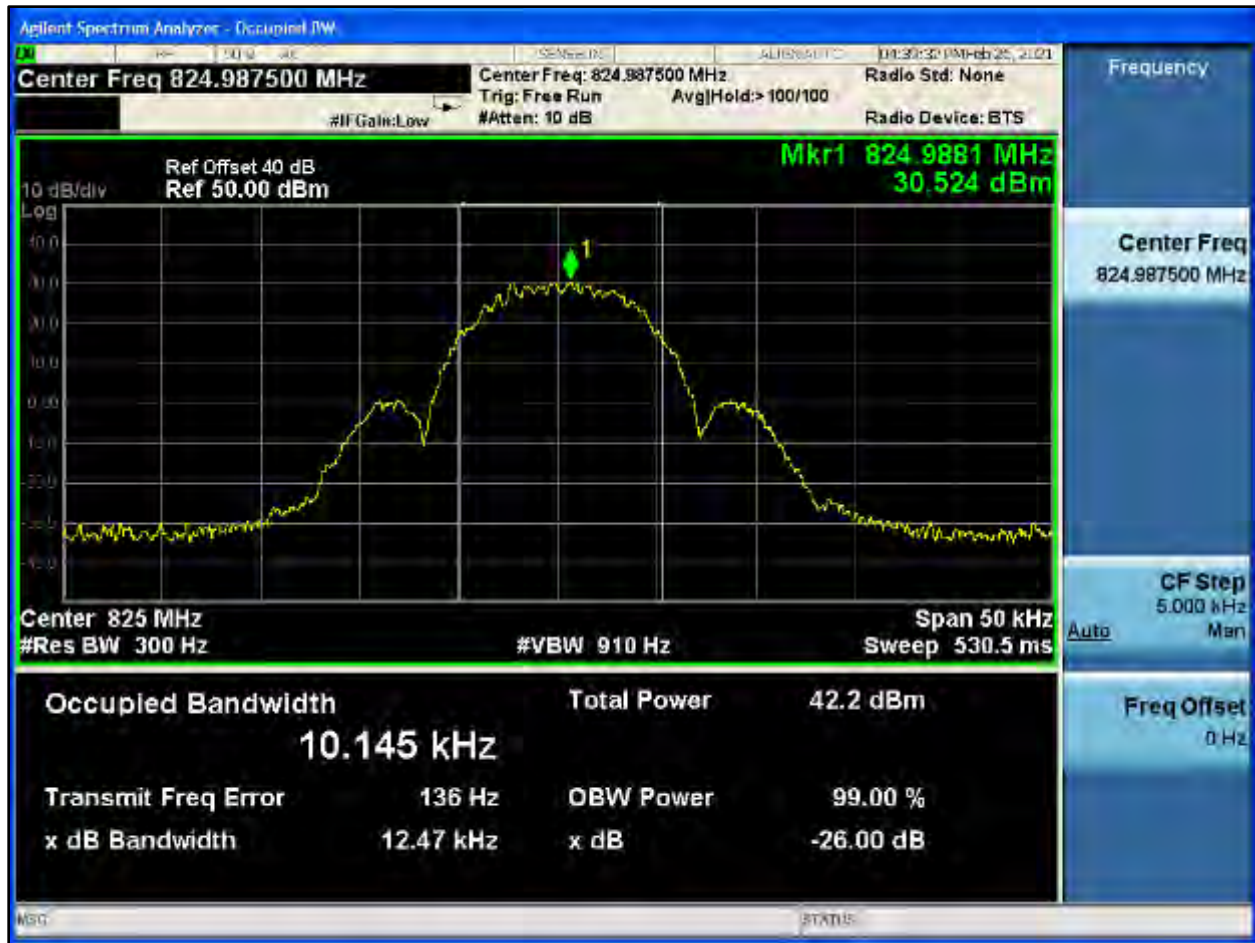


Plot 8-590: OBW 99%, 824.9875 MHz, WB 2 FSK




Plot 8-591: OBW 99%, 824.9875 MHz, HVD SMR

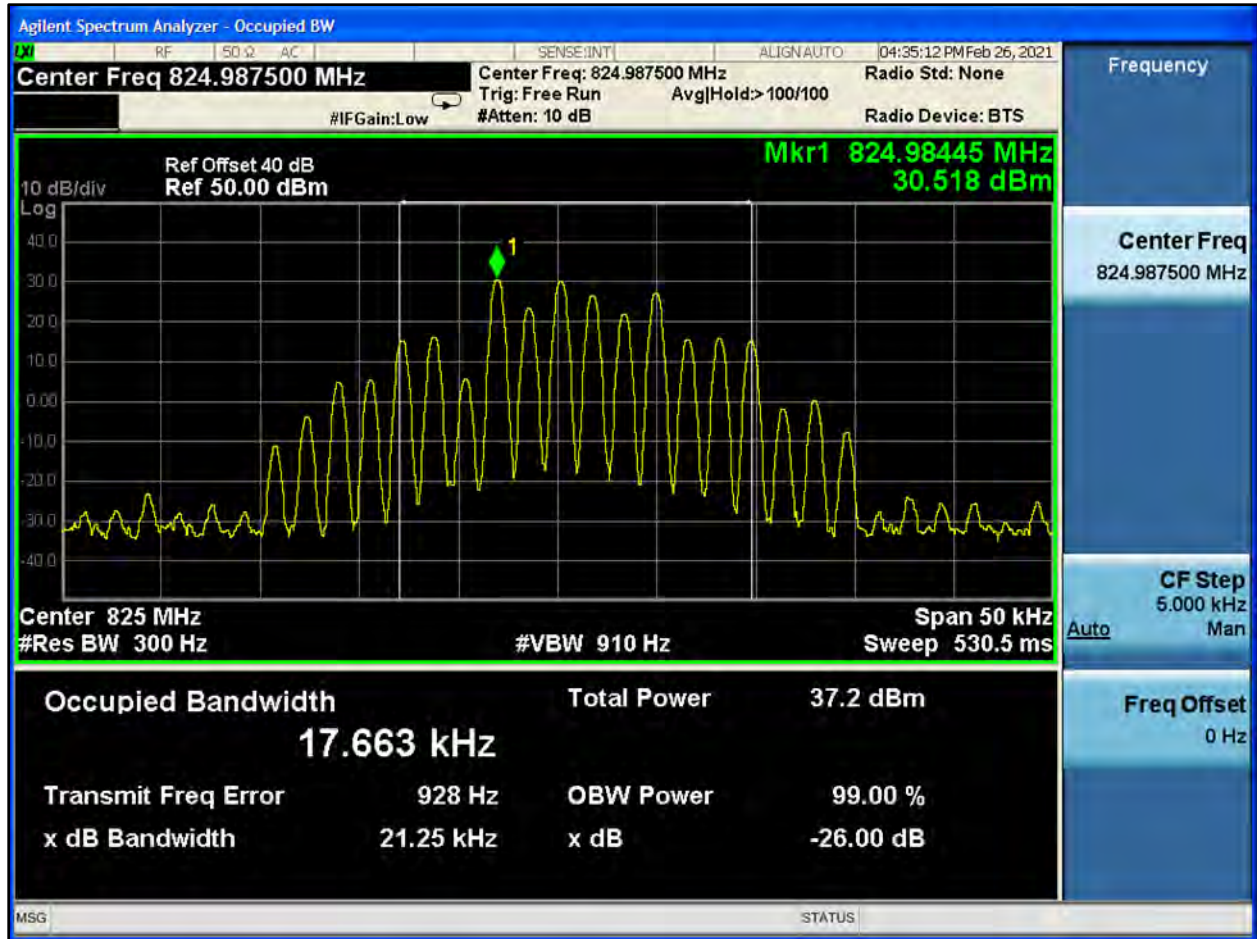


Plot 8-592: OBW 99%, 824.9875 MHz, HVD NPSPAC

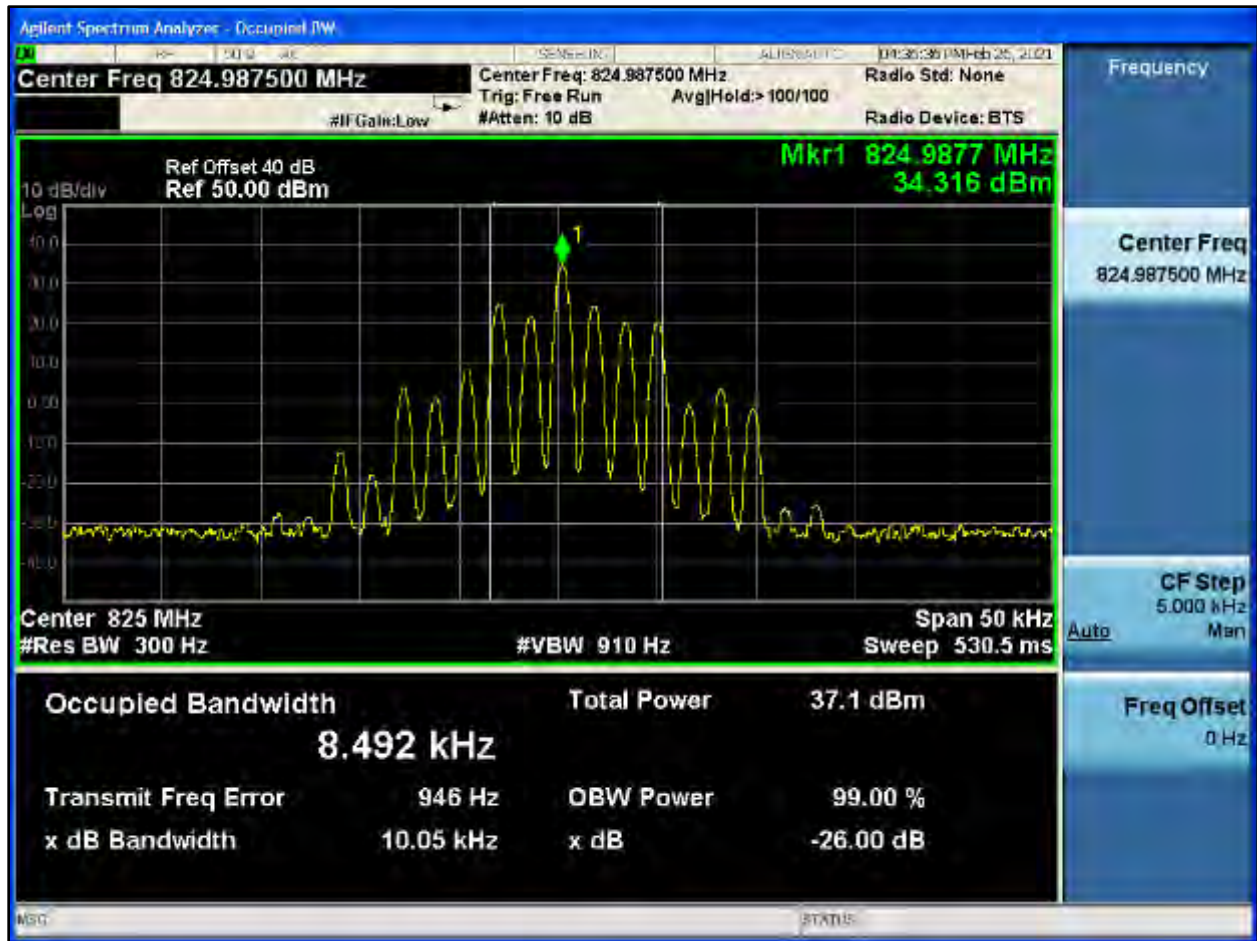


Plot 8-593: OBW 99%, 851.0125 MHz, NB

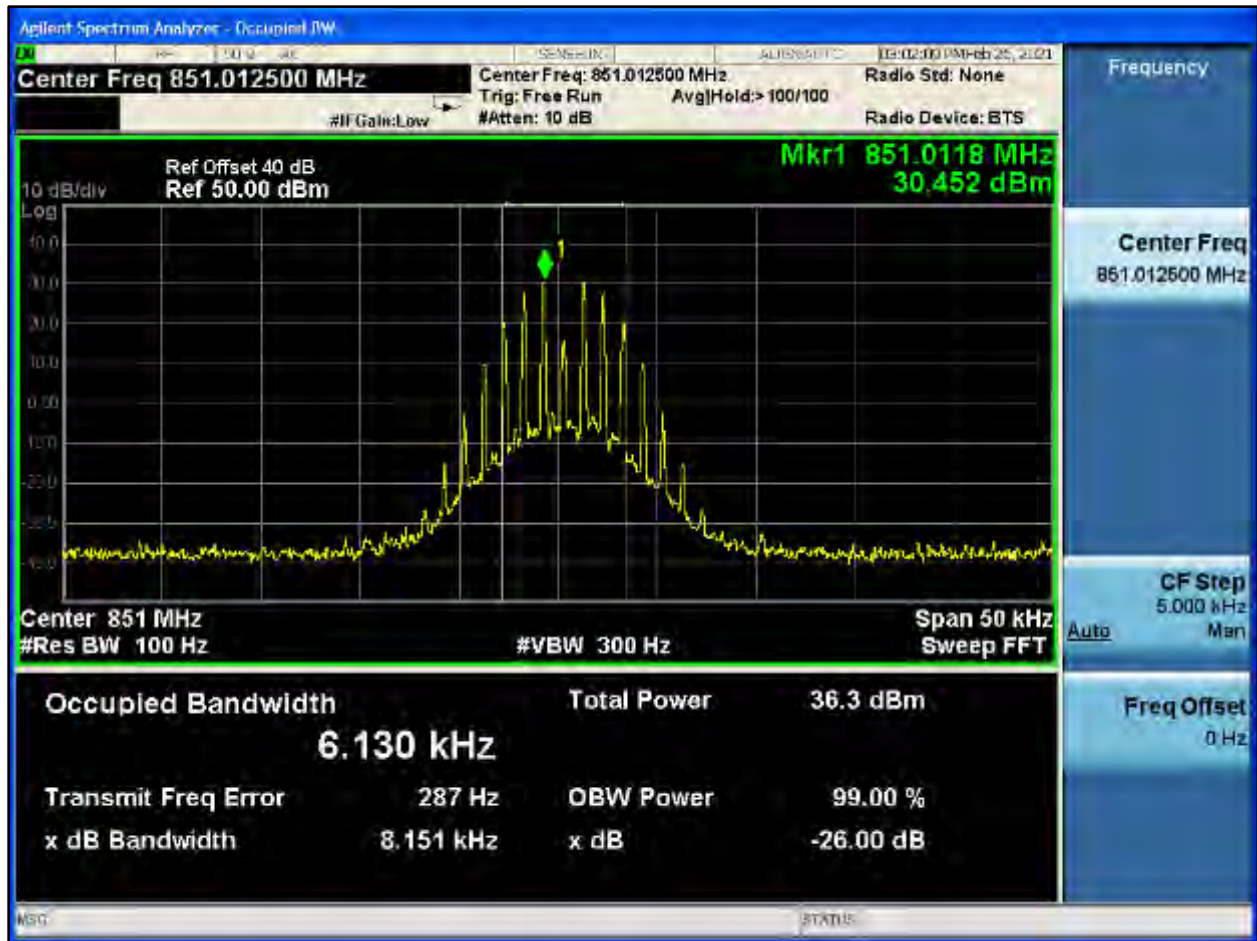

Plot 8-594: OBW 99%, 851.0125 MHz, NPSPAC

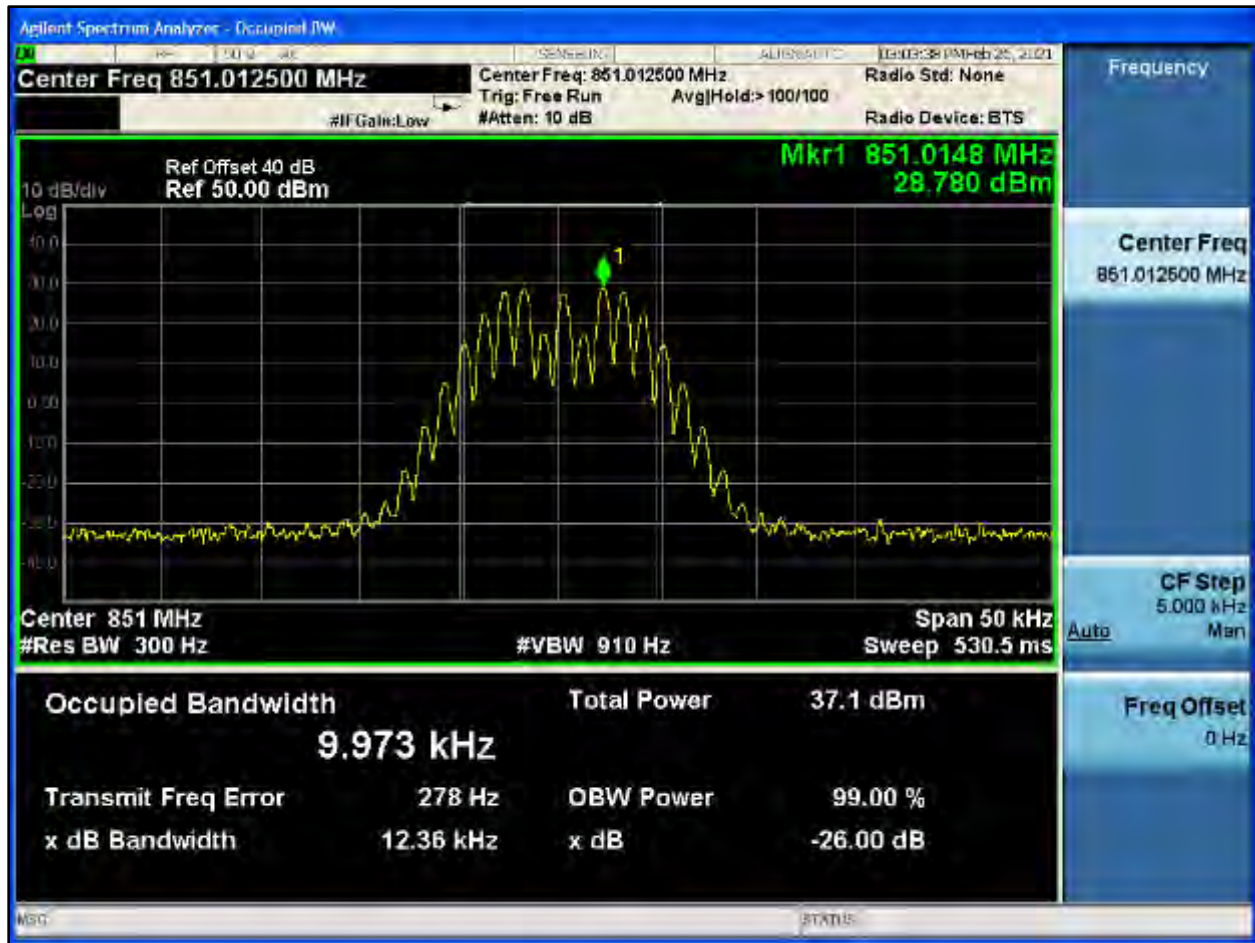

Plot 8-595: OBW 99%, 851.0125 MHz, WB

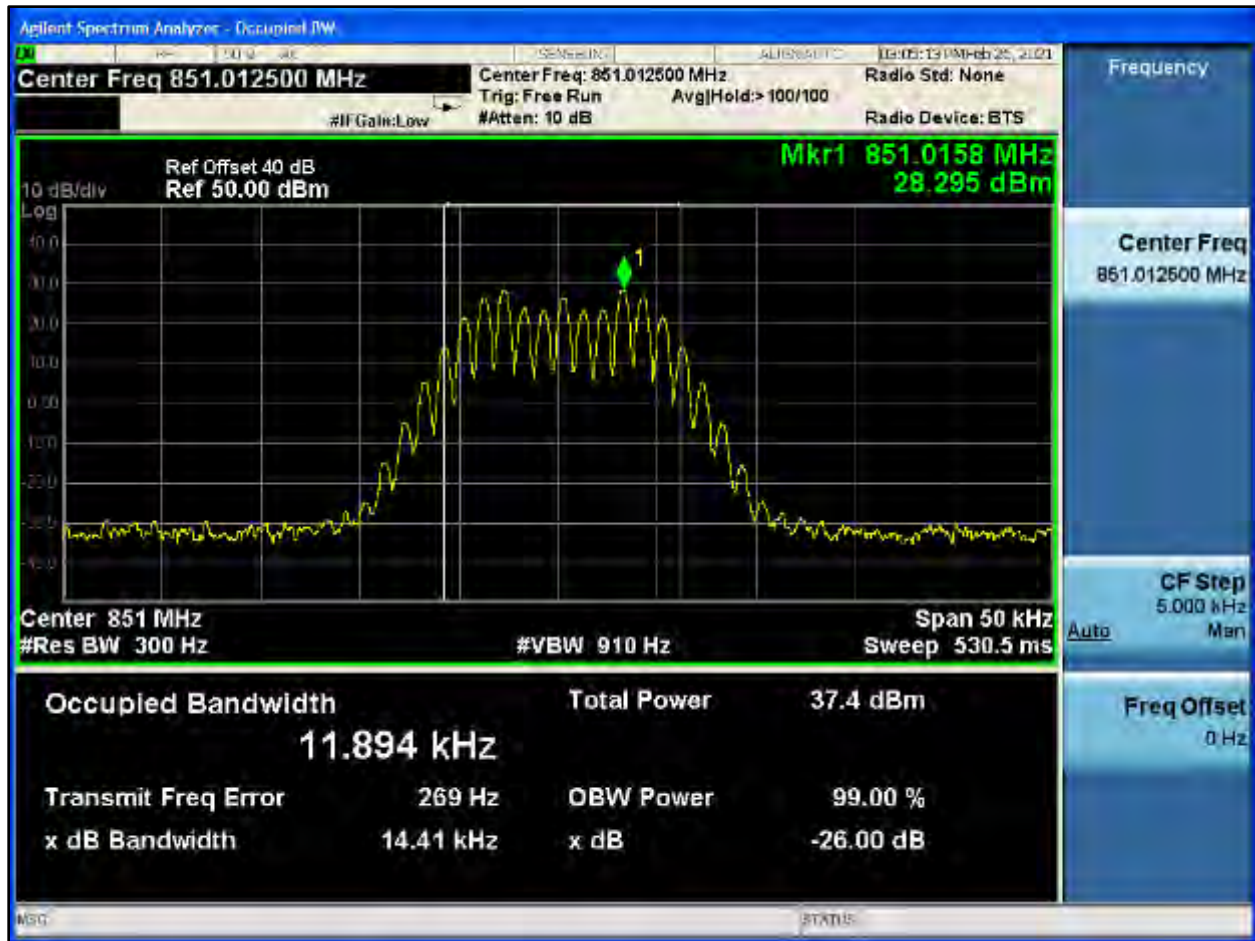


Plot 8-596: OBW 99%, 851.0125 MHz, C4FM



Plot 8-597: OBW 99%, 851.0125 MHz, H-CPM TDMA



Plot 8-598: OBW 99%, 851.0125 MHz, NB 2 FSK

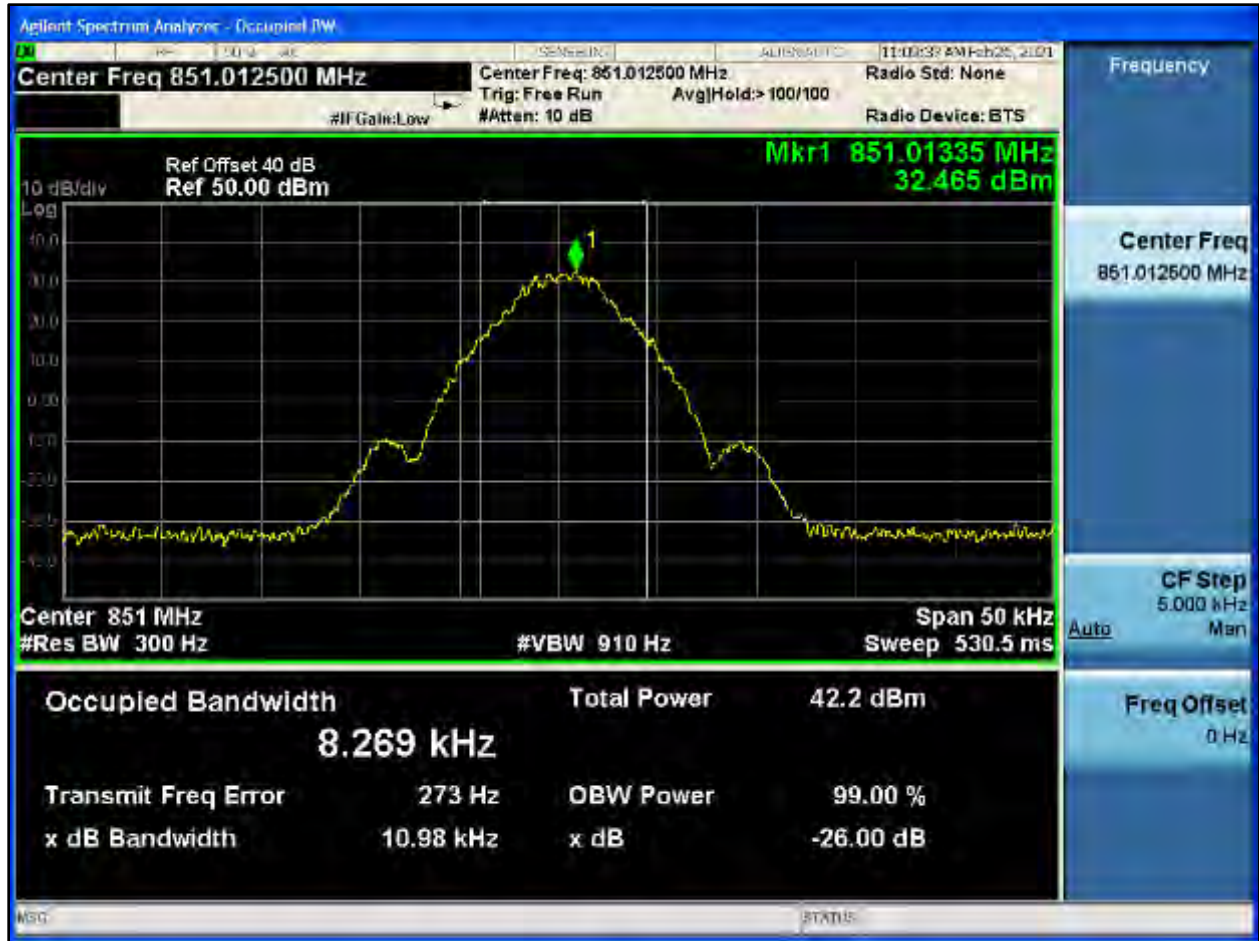


Plot 8-599: OBW 99%, 851.0125 MHz, NPSPAC 2 FSK




Plot 8-600: OBW 99%, 851.0125 MHz, WB 2 FSK




Plot 8-601: OBW 99%, 851.0125 MHz, HVD SMR

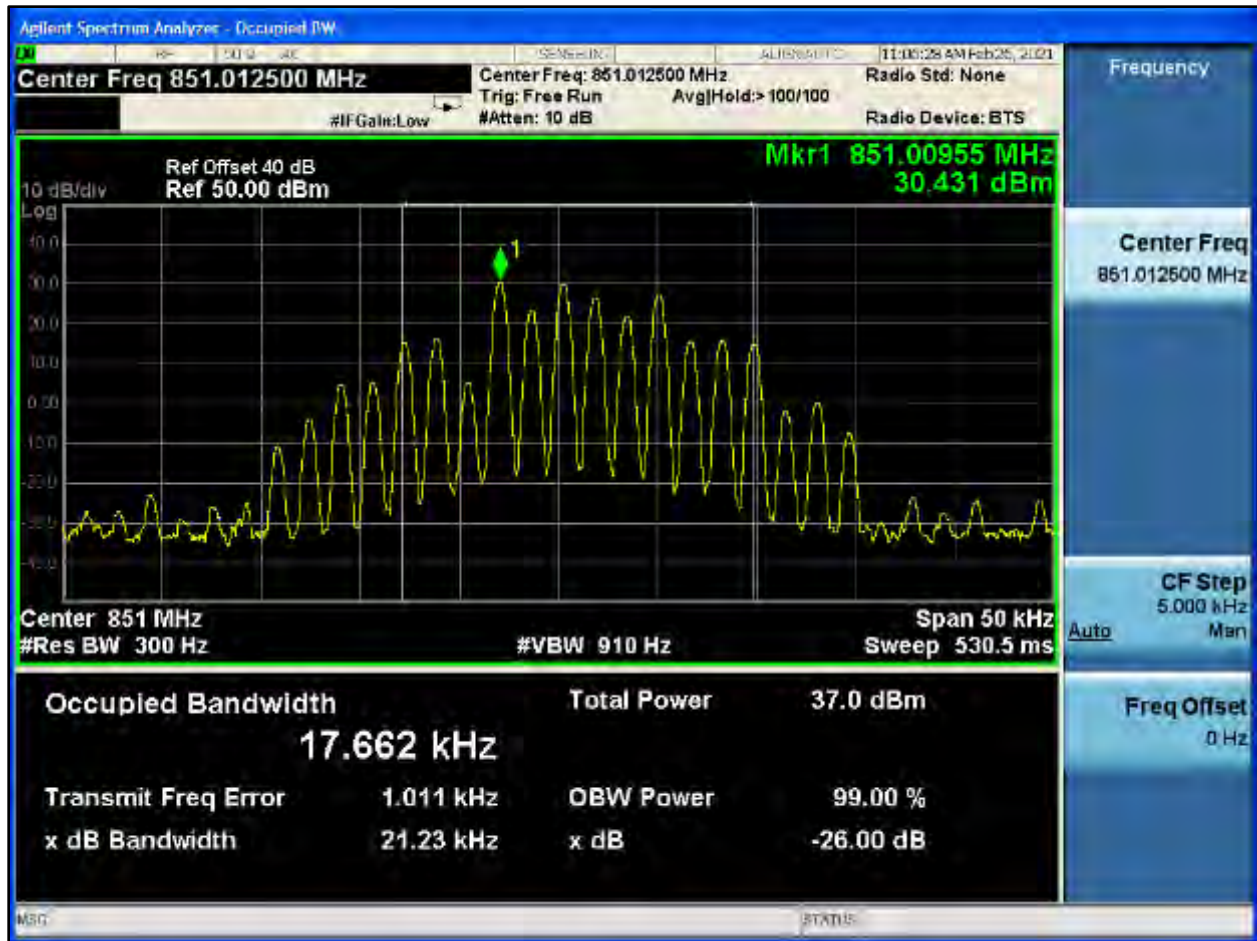


Plot 8-602: OBW 99%, 851.0125 MHz, HVD NPSPAC

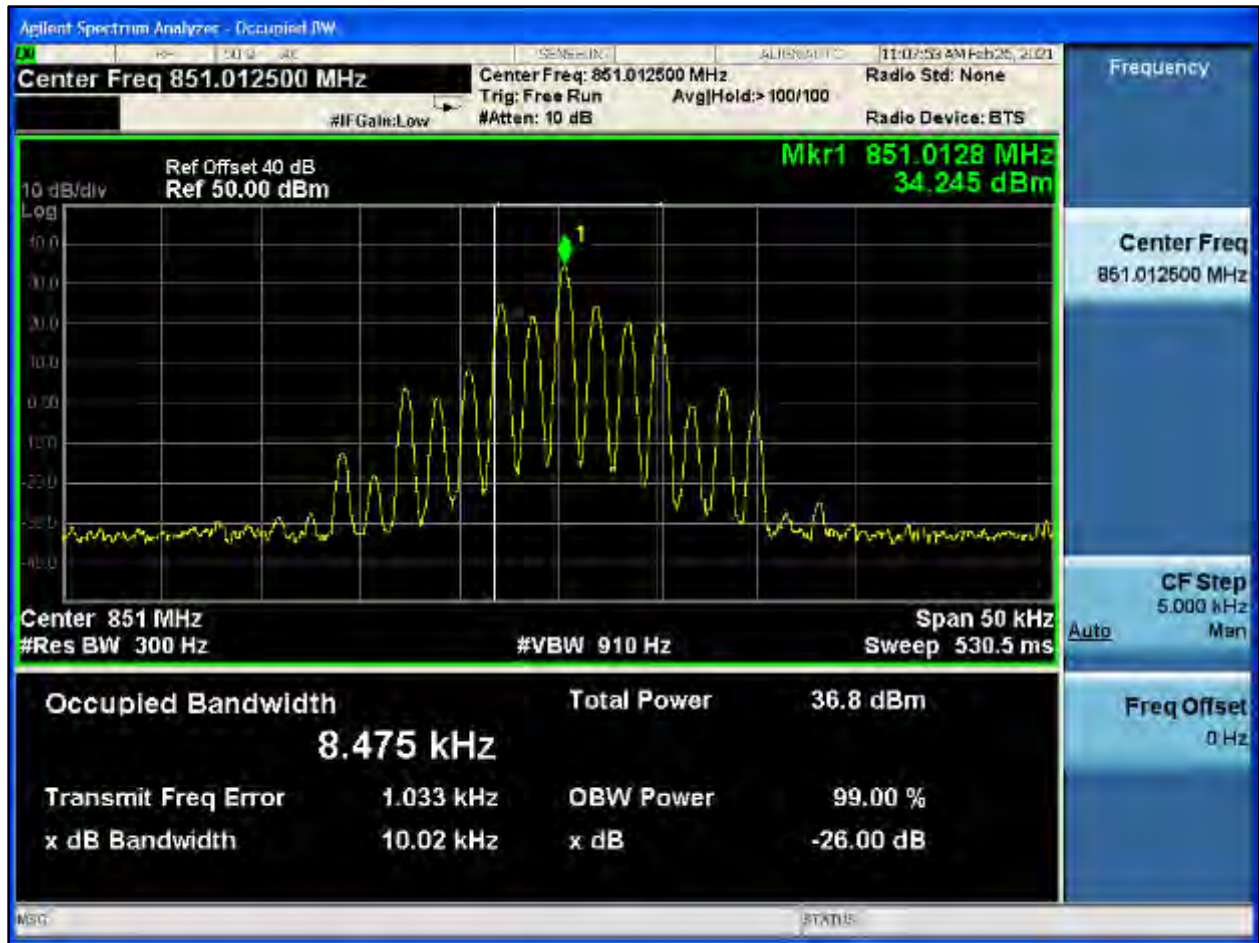


Plot 8-603: OBW 99%, 860.0000 MHz, NB

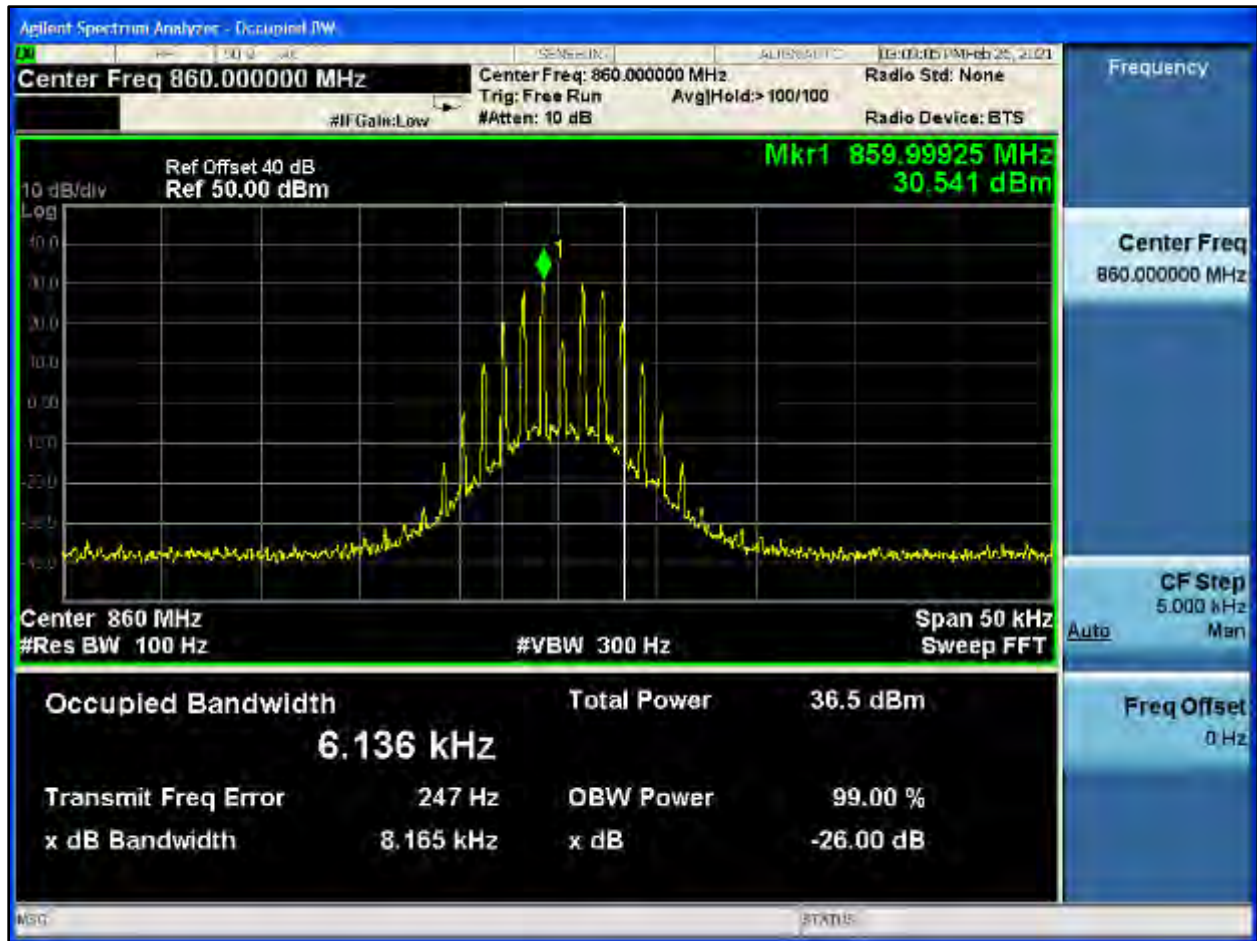

Plot 8-604: OBW 99%, 860.0000 MHz, NPSPAC

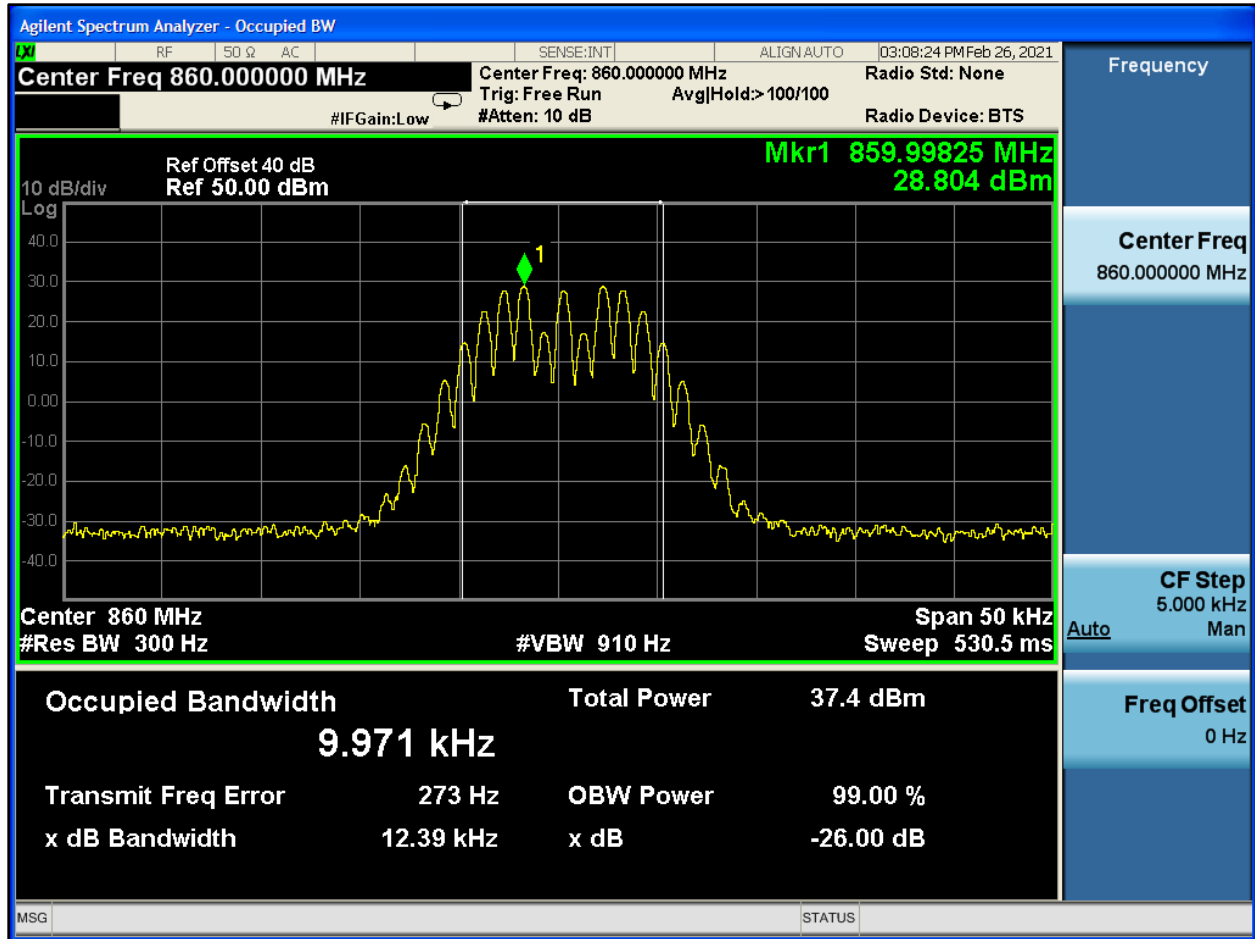


Plot 8-605: OBW 99%, 860.0000 MHz, WB

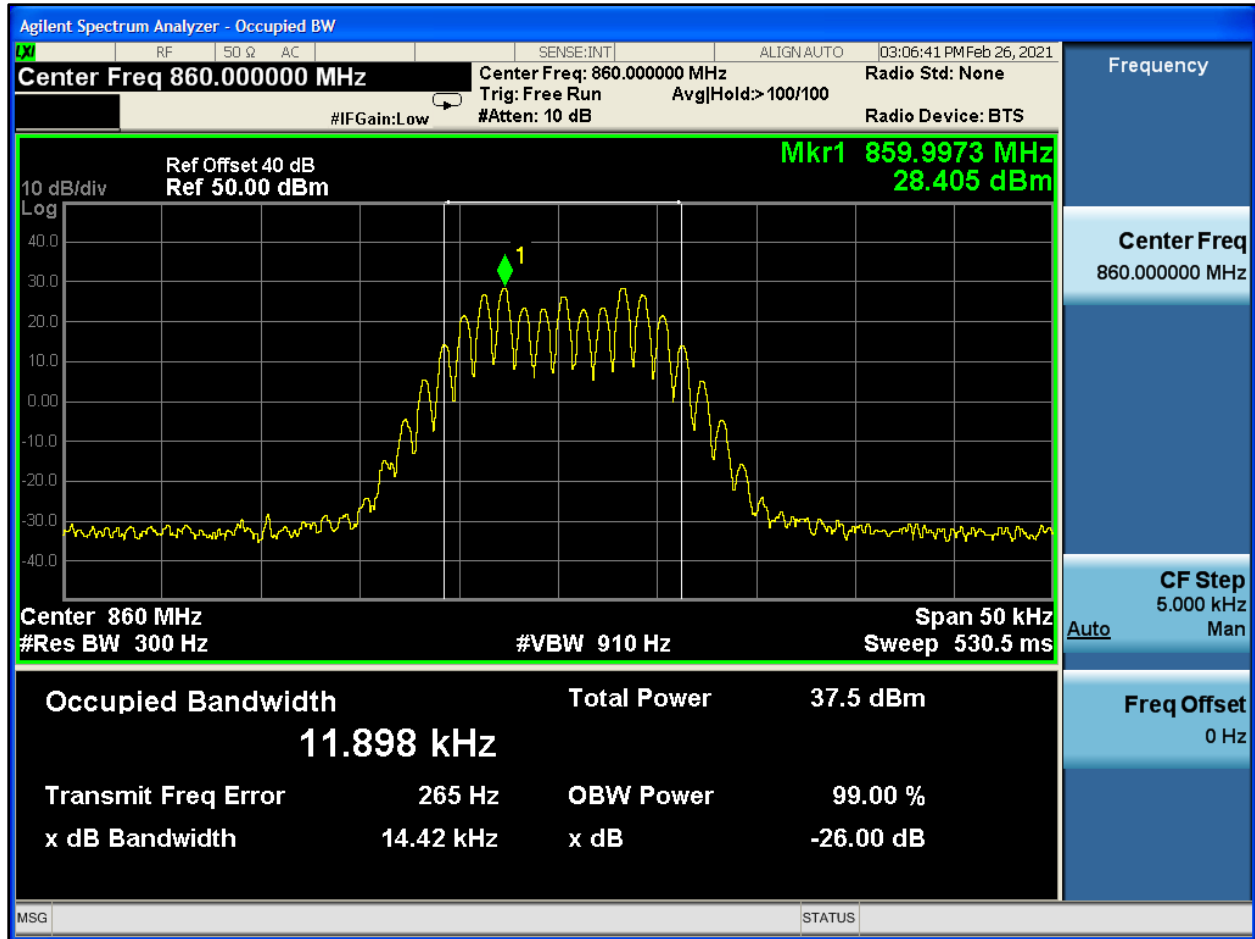

Plot 8-606: OBW 99%, 860.0000 MHz, C4FM



Plot 8-607: OBW 99%, 860.0000 MHz, H-CPM TDMA

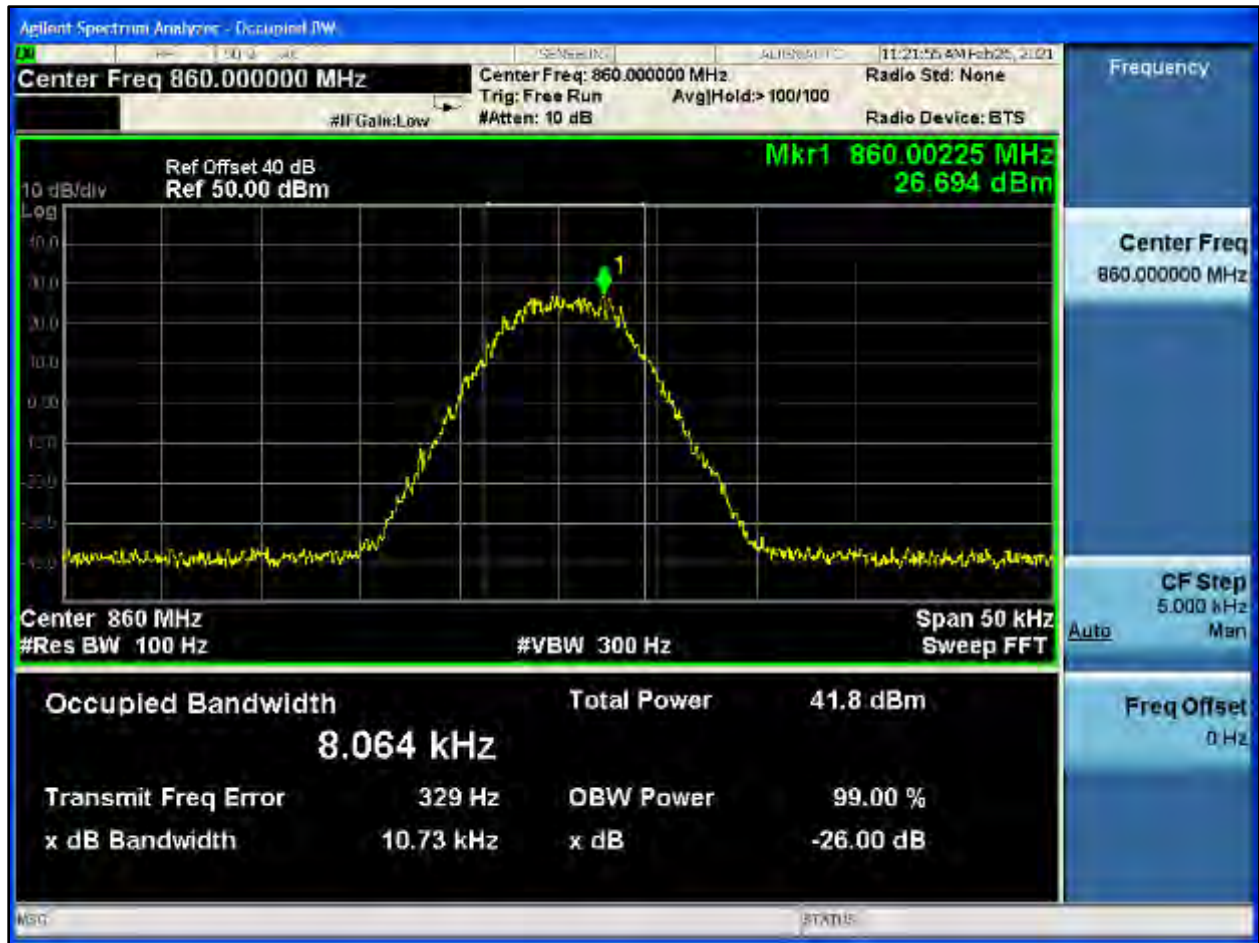

Plot 8-608: OBW 99%, 860.0000 MHz, NB 2 FSK




Plot 8-609: OBW 99%, 860.0000 MHz, NPSPAC 2 FSK




Plot 8-610: OBW 99%, 860.0000 MHz, WB 2 FSK




Plot 8-611: OBW 99%, 860.0000 MHz, HVD SMR

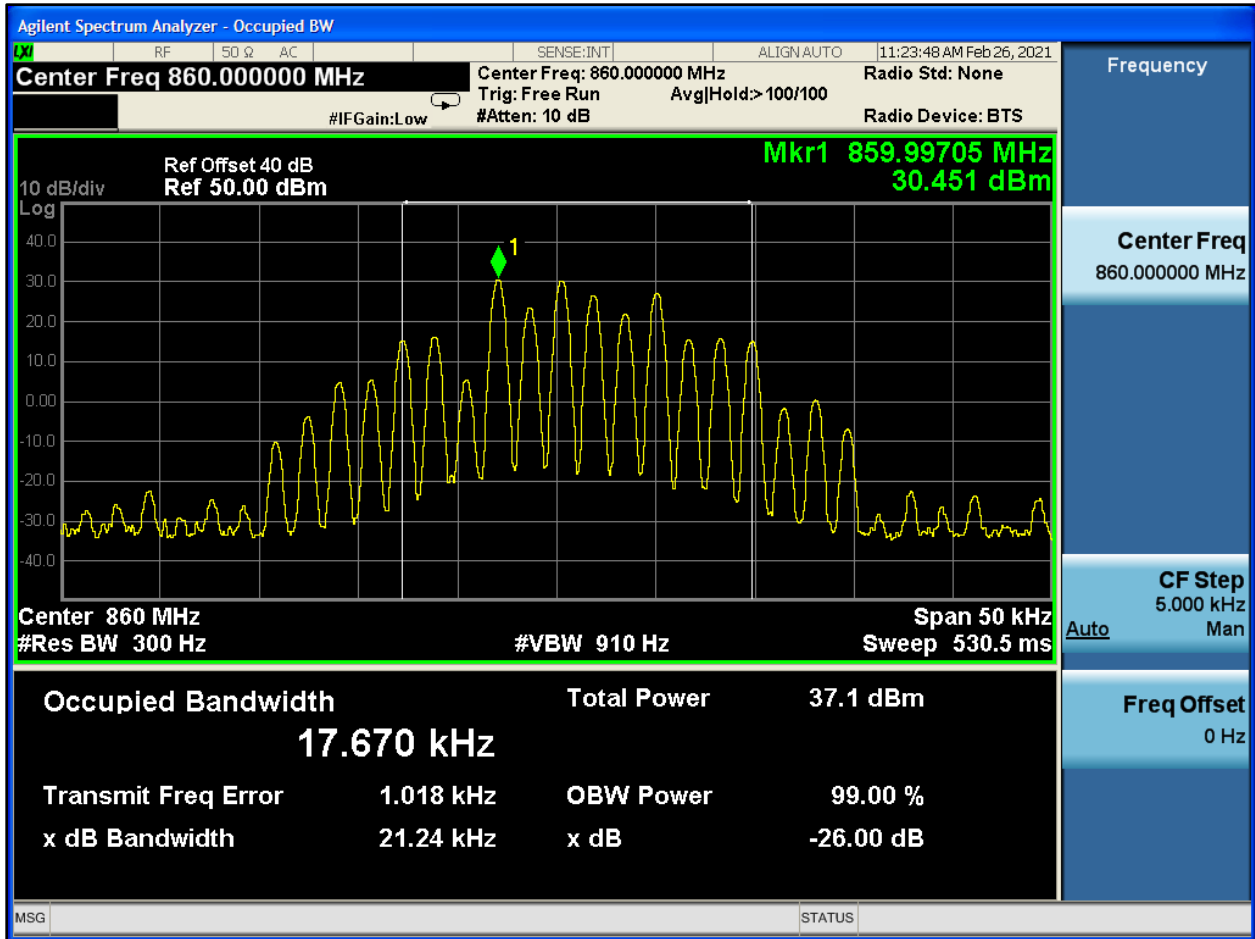


Plot 8-612: OBW 99%, 860.0000 MHz, HVD NPSPAC

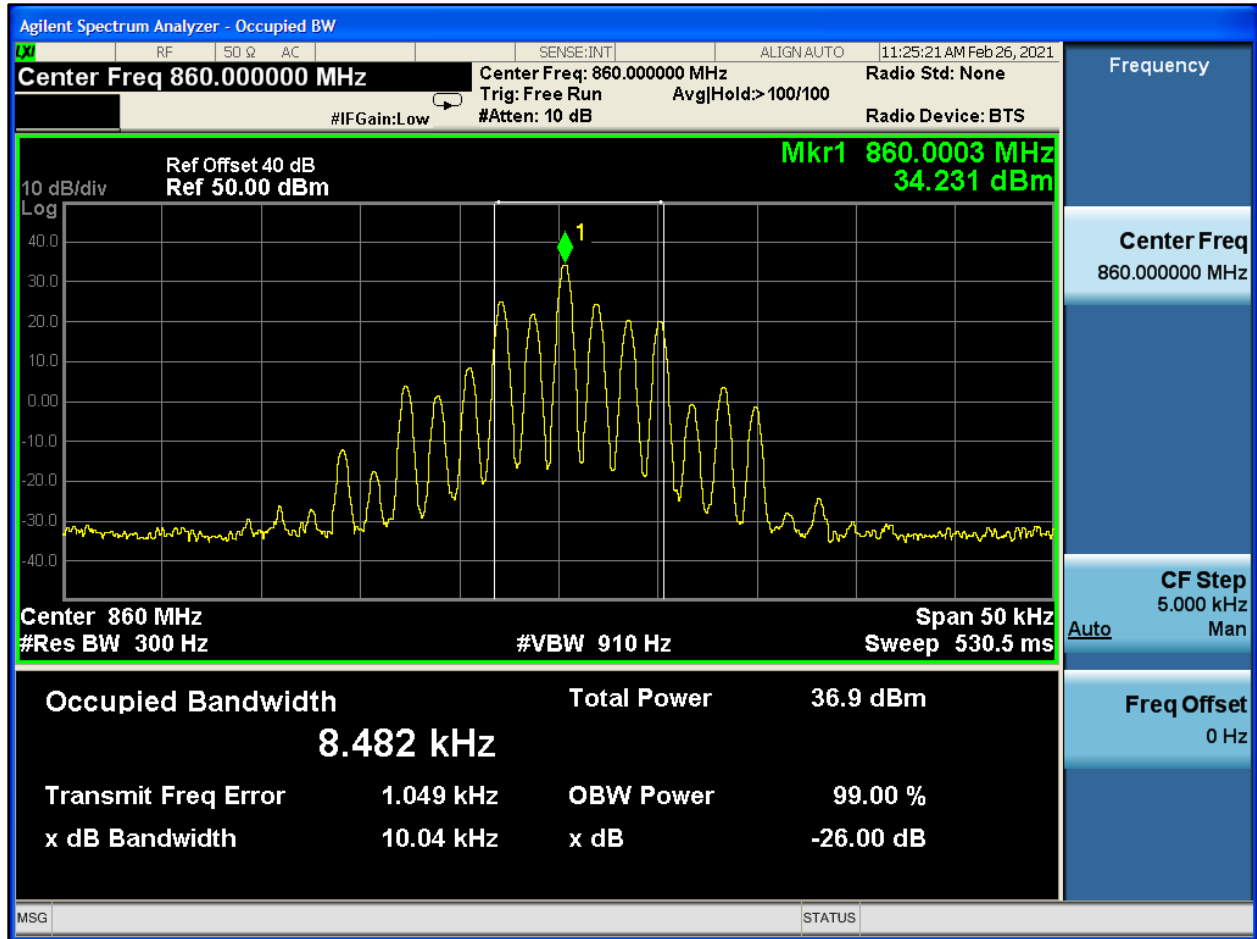


Plot 8-613: OBW 99%, 868.9875 MHz, NB

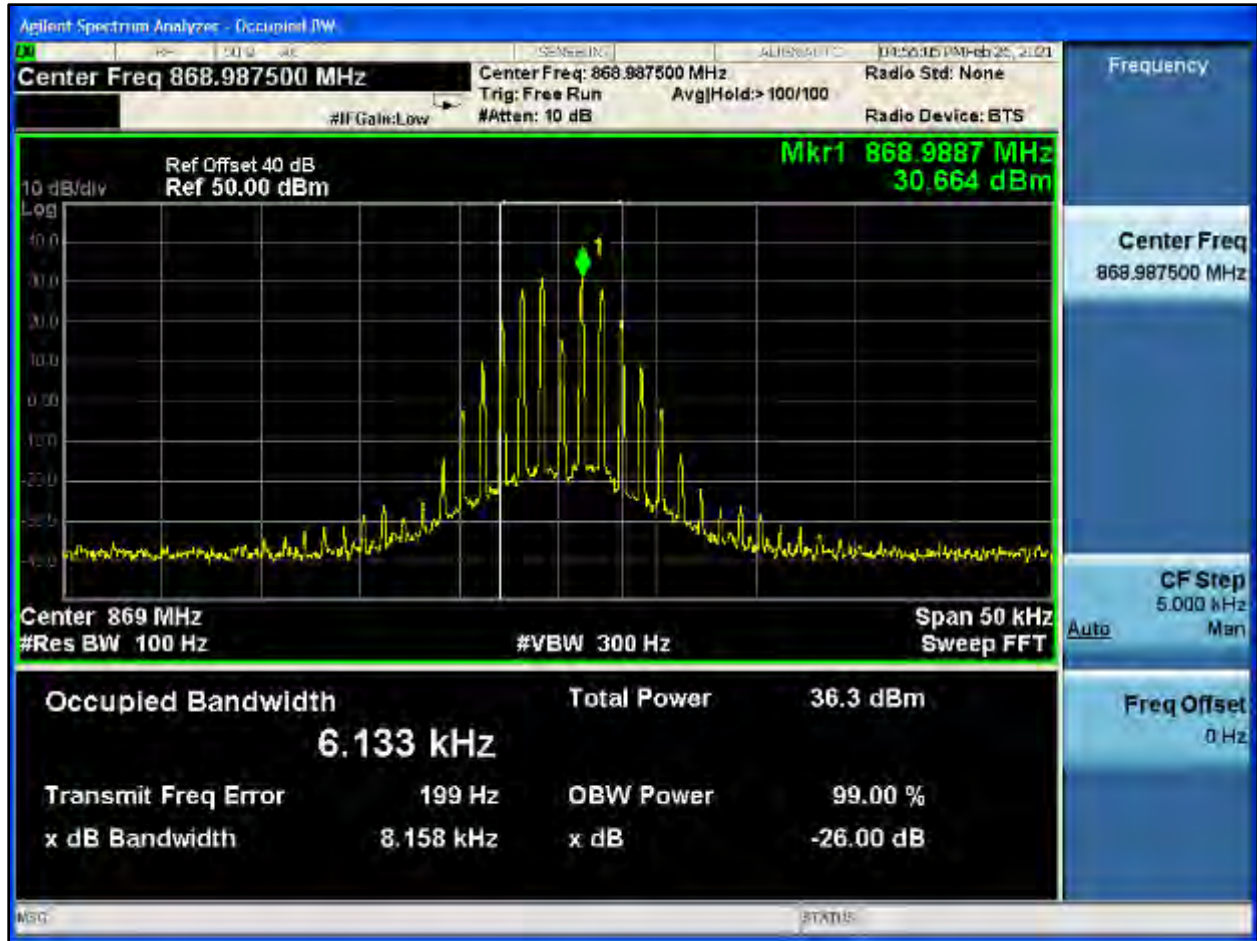

Plot 8-614: OBW 99%, 868.9875 MHz, NPSPAC

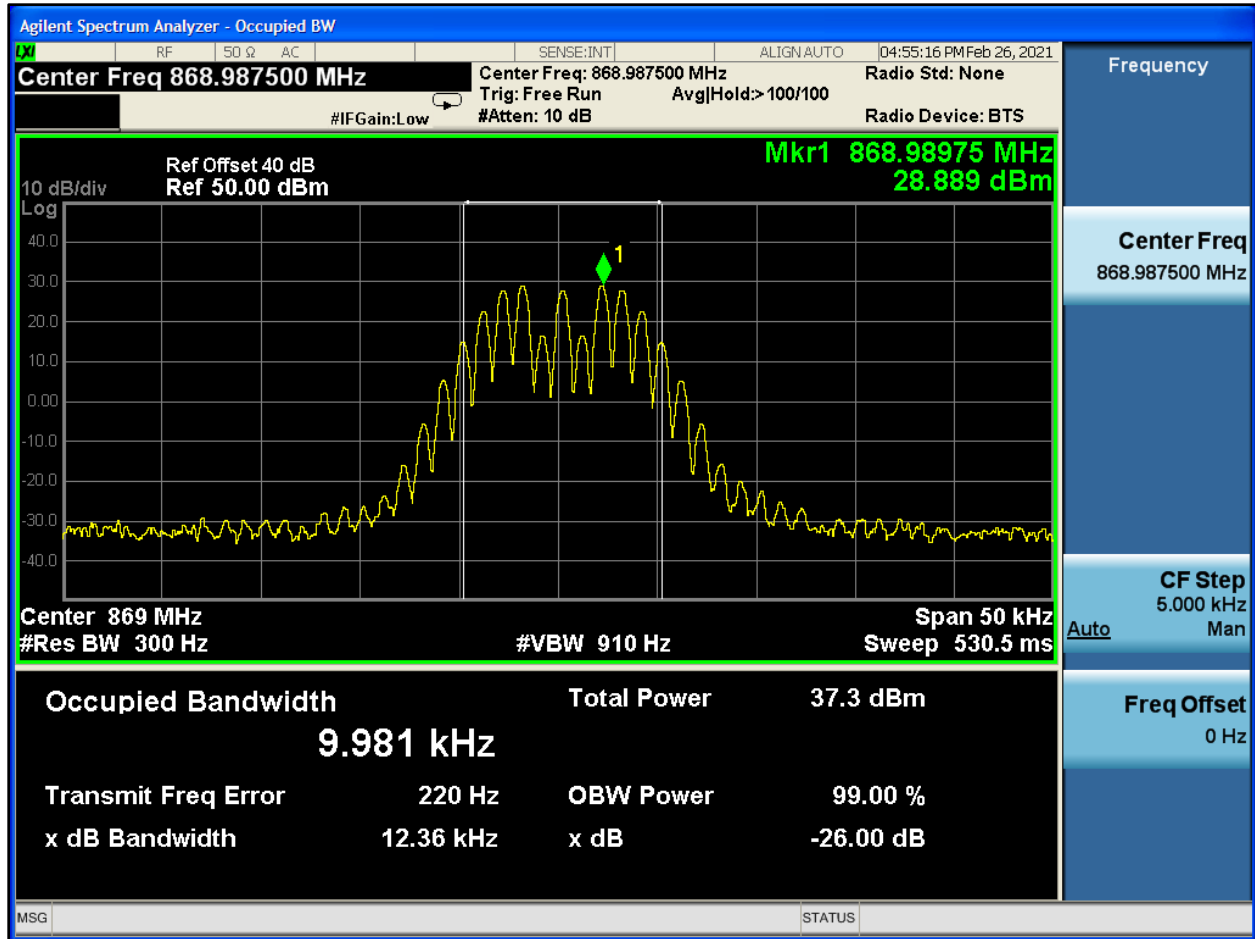

Plot 8-615: OBW 99%, 868.9875 MHz, WB

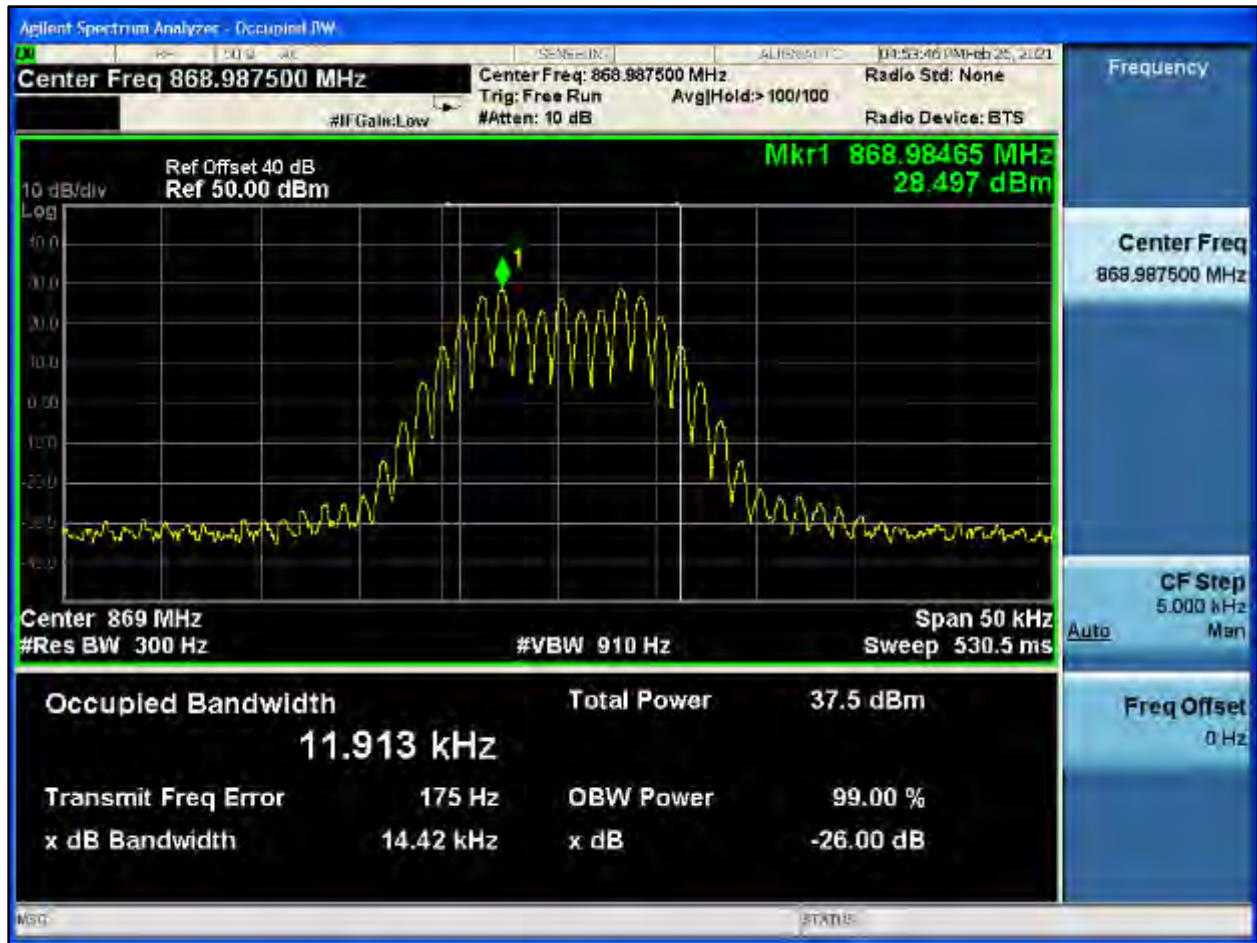


Plot 8-616: OBW 99%, 868.9875 MHz, C4FM




Plot 8-617: OBW 99%, 868.9875 MHz, H-CPM TDMA



Plot 8-618: OBW 99%, 868.9875 MHz, NB 2 FSK

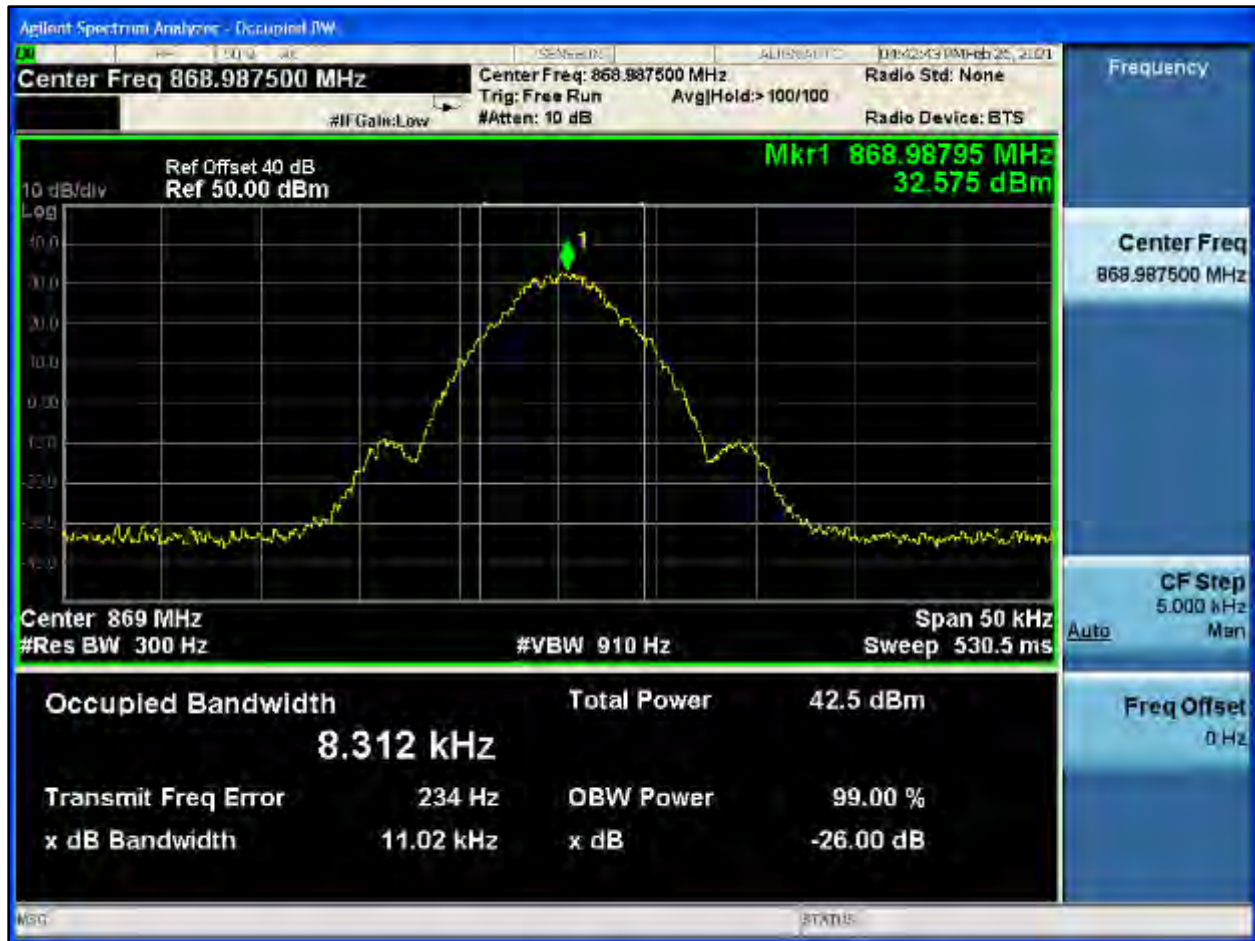


Plot 8-619: OBW 99%, 868.9875 MHz, NPSPAC 2 FSK

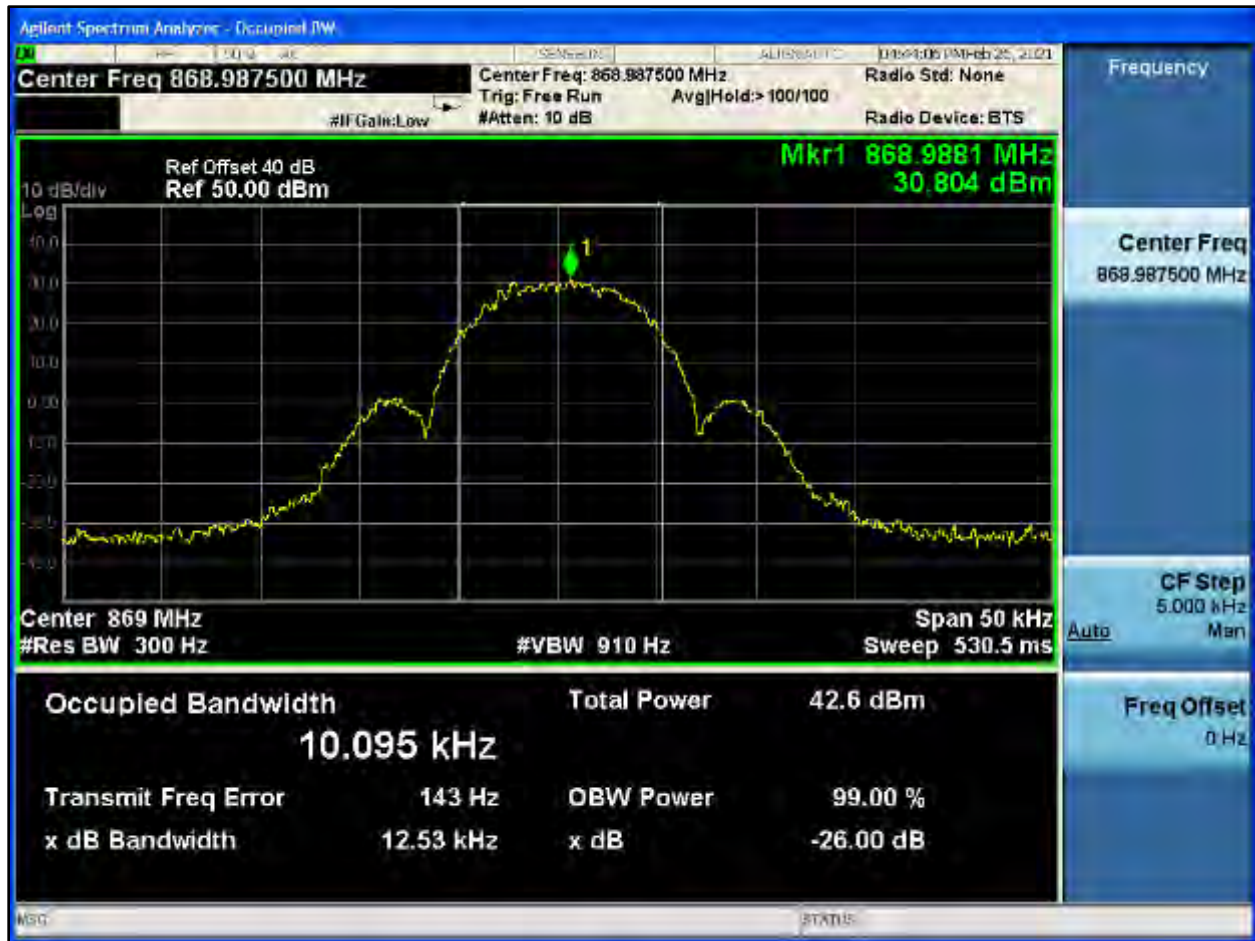


Plot 8-620: OBW 99%, 868.9875 MHz, WB 2 FSK




Plot 8-621: OBW 99%, 868.9875 MHz, HVD SMR

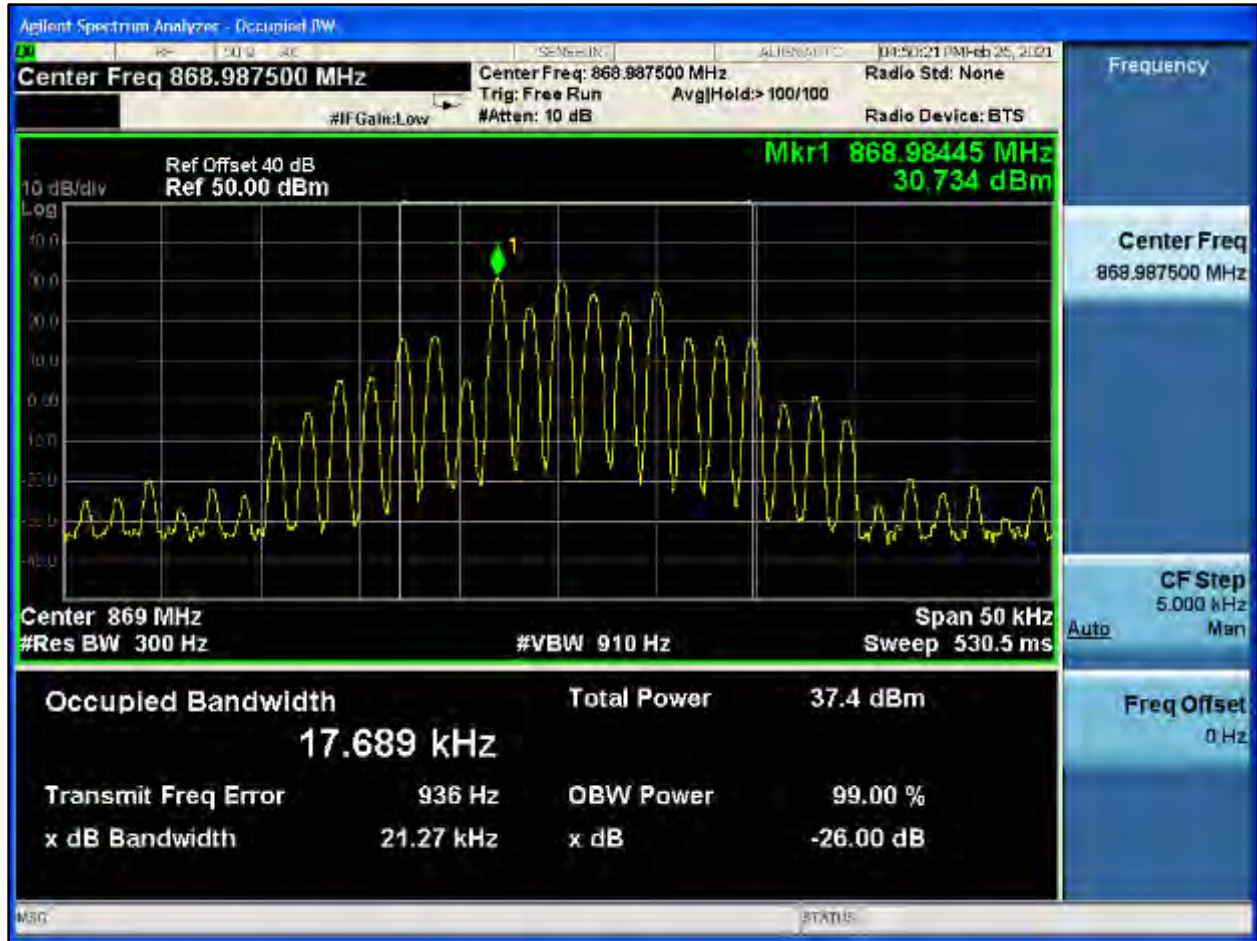


Plot 8-622: OBW 99%, 868.9875 MHz, HVD NPSPAC

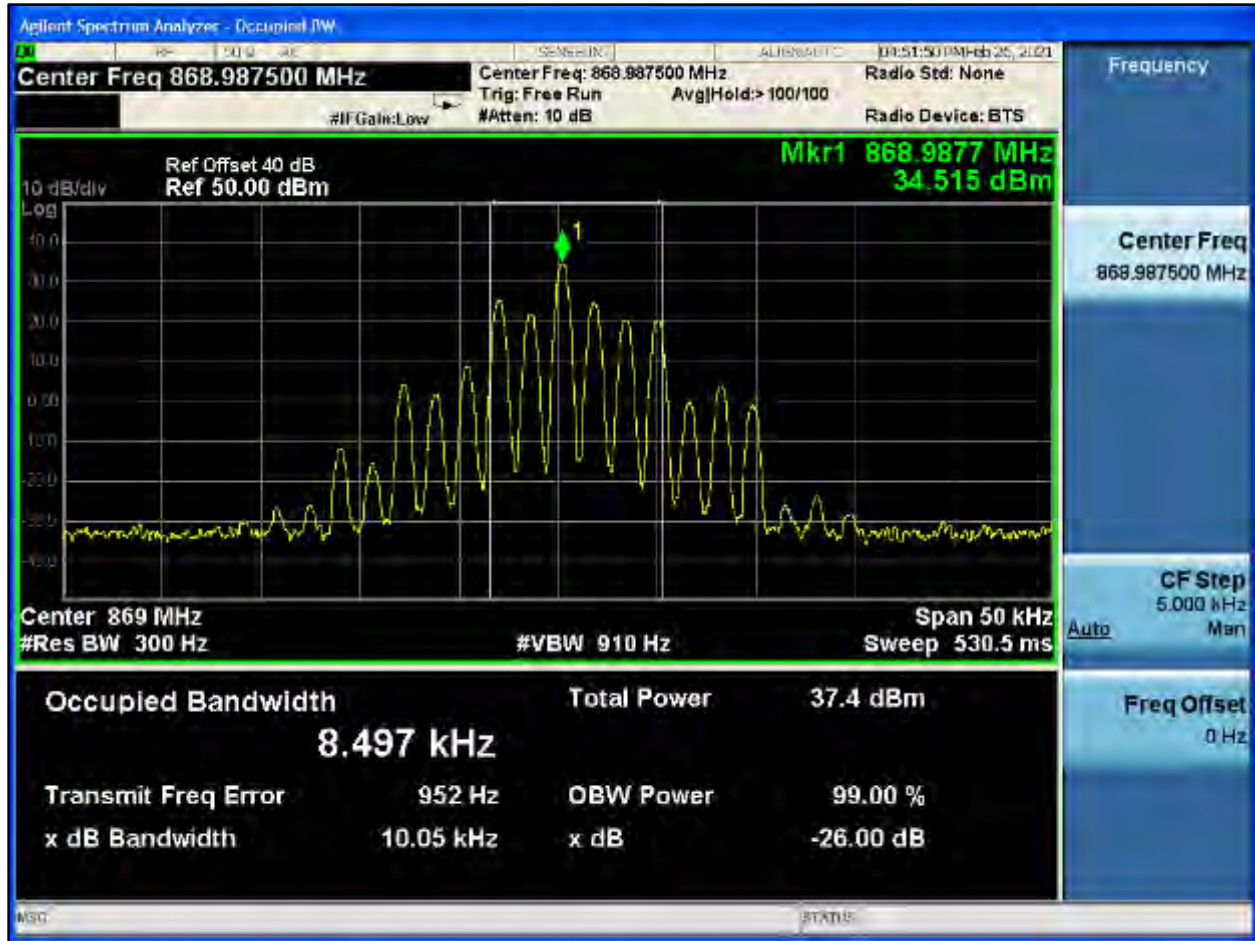


Plot 8-623: OBW 99%, 869.9875 MHz, NB

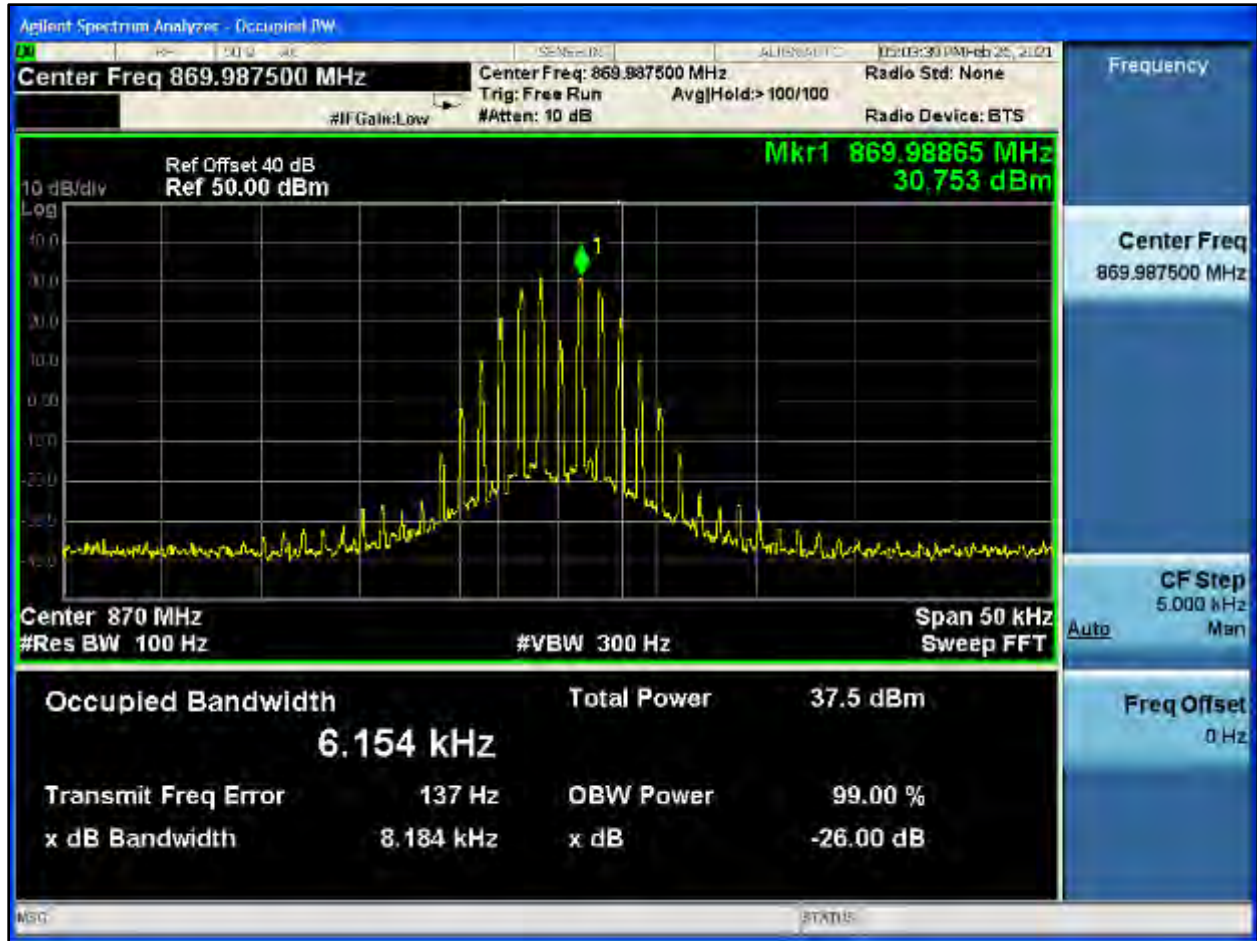

Plot 8-624: OBW 99%, 869.9875 MHz, NPSPAC

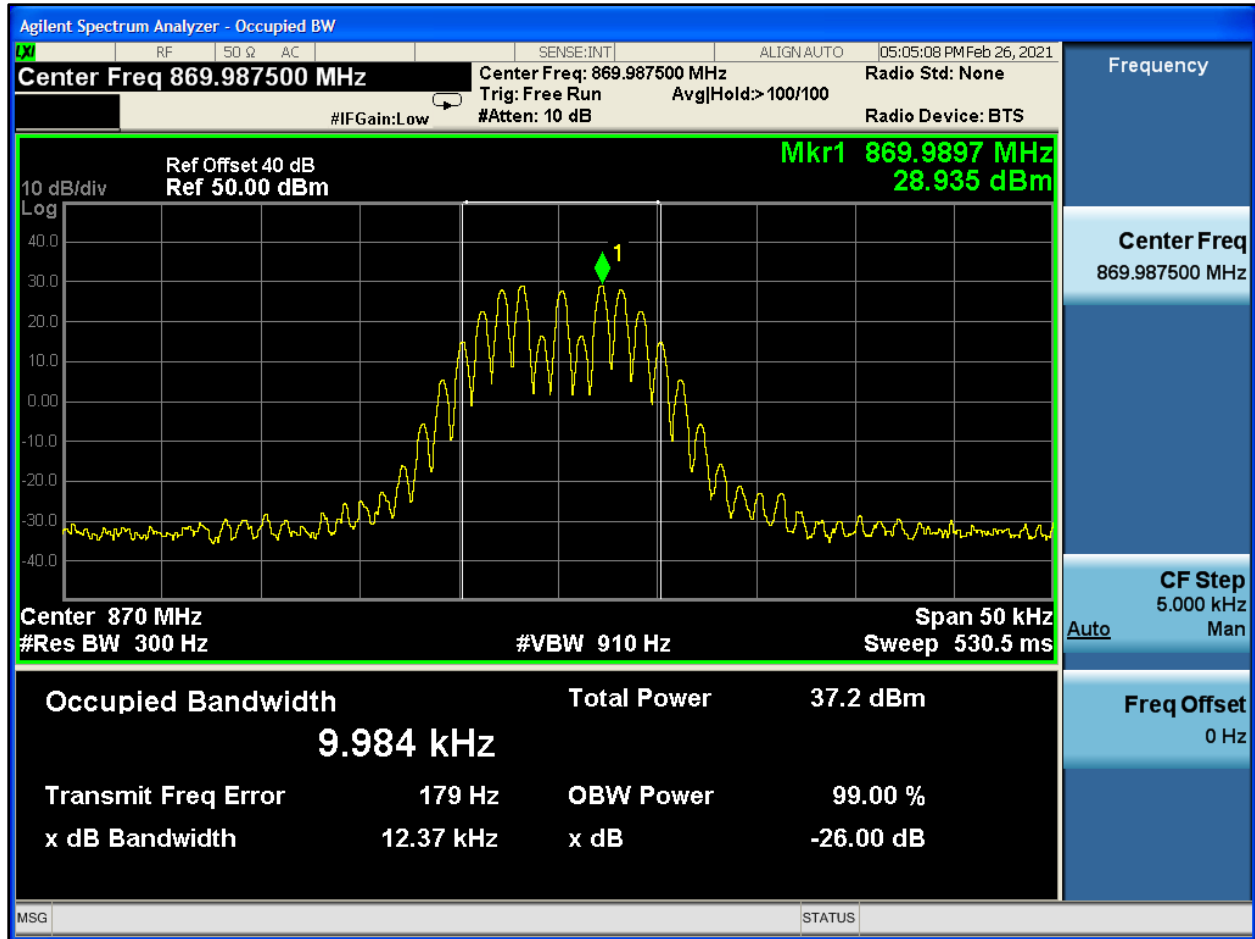

Plot 8-625: OBW 99%, 869.9875 MHz, WB

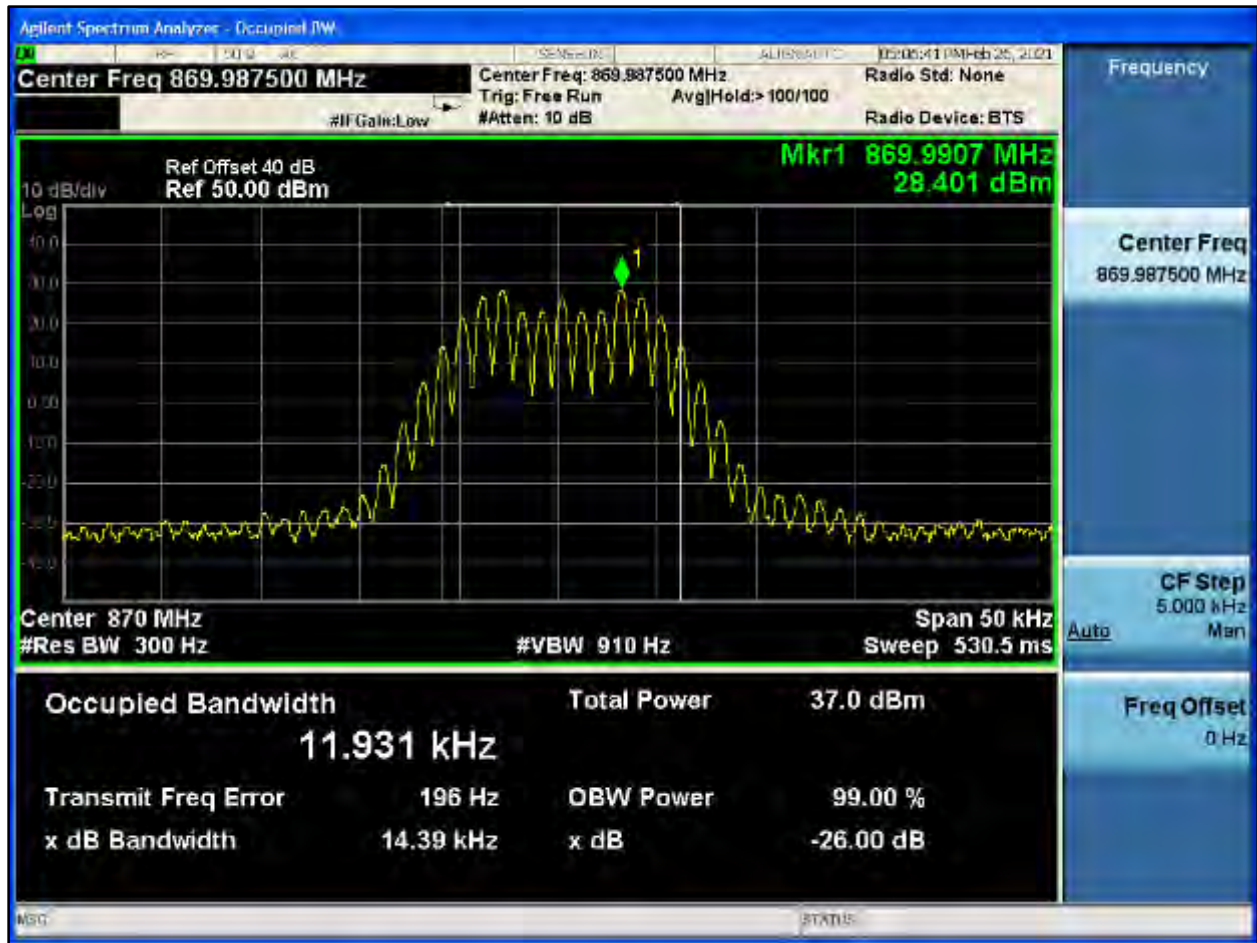

Plot 8-626: OBW 99%, 869.9875 MHz, C4FM



Plot 8-627: OBW 99%, 869.9875 MHz, H-CPM TDMA



Plot 8-628: OBW 99%, 869.9875 MHz, NB 2 FSK




Plot 8-629: OBW 99%, 869.9875 MHz, NPSPAC 2 FSK




Plot 8-630: OBW 99%, 869.9875 MHz, WB 2 FSK



Plot 8-631: OBW 99%, 869.9875 MHz, HVD SMR

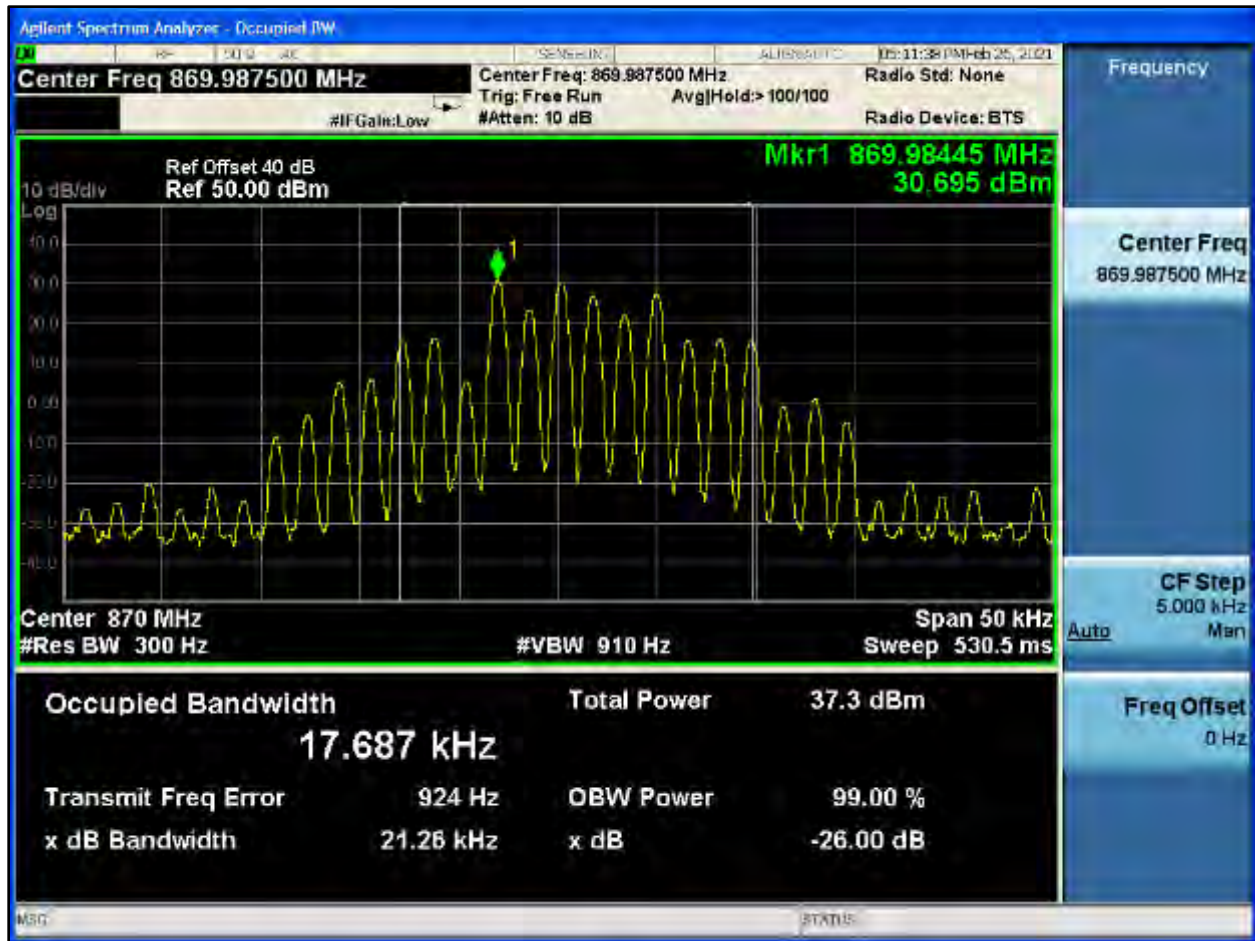

Plot 8-632: OBW 99%, 869.9875 MHz, HVD NPSPAC

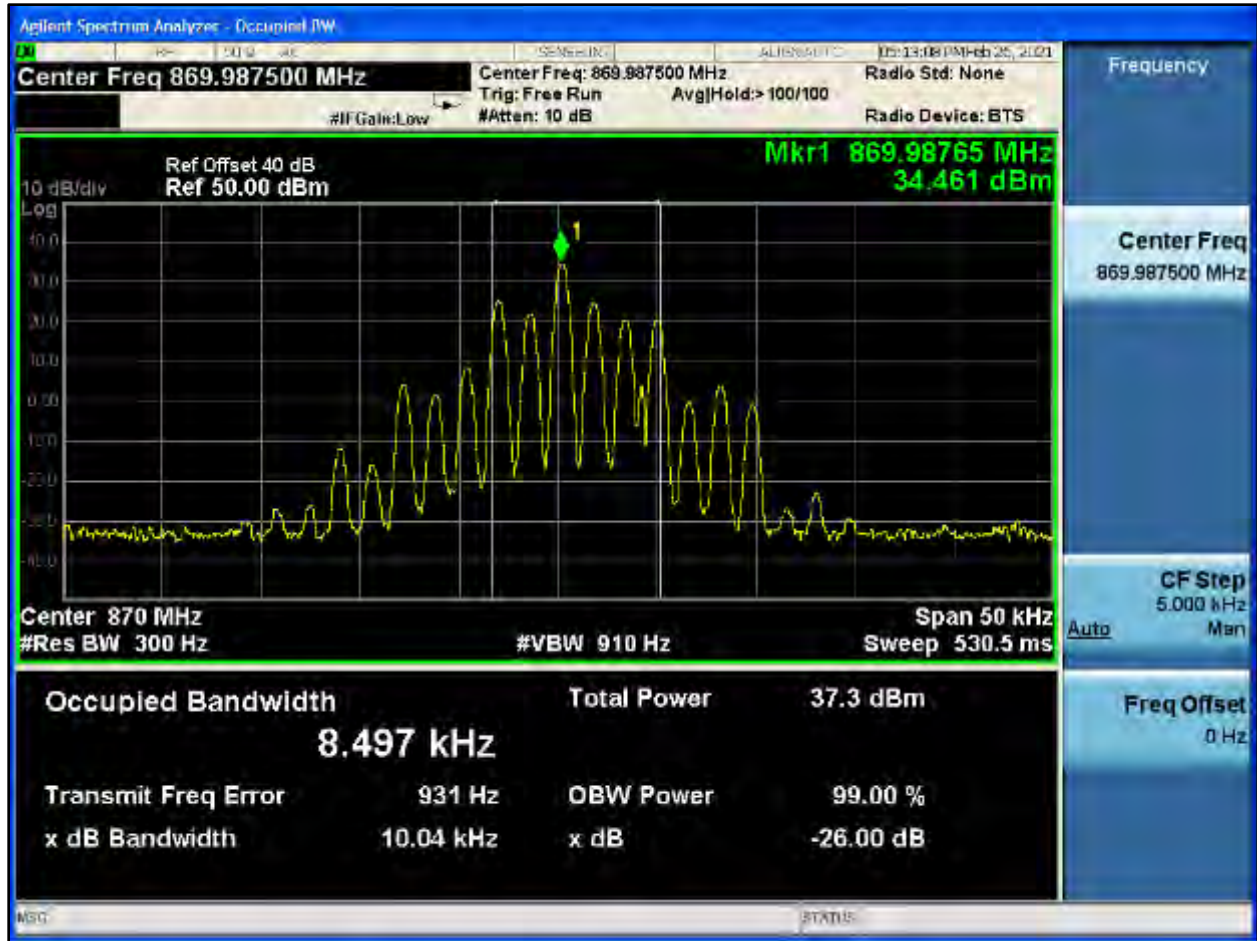


Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ± 0.5 Hz

Results: Pass

Table 8-1: Test Equipment Used For Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	04/26/21
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20dB	BK5859	05/04/21
901724	API Weinschel, Inc.	48-40-34	40 dB 100W Attenuator	CJ8921	9/15/21
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	3/18/22
901582	Rohde & Schwarz	1167.0000.02	Signal Generator	101903	04/24/21

Test Personnel:

		
Daniel Baltzell	Signature	February 22-March 8, 2021
Test Engineer		Dates of Tests

9 FCC Part 2.1055: Frequency Stability; Part 22.355: Frequency Tolerance; Part 74.464; Frequency Tolerance; Part 80.209: Frequency Stability; Part 90.213, Part 90.539: Frequency Stability; ISED RSS-119 5.3: Transmitter Frequency Stability

9.1 Test Procedure

ANSI C63.26, section 5.6

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C. The AFC was not locked to the base station.

The temperature was initially set to -30°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

Part 22.355 Frequency tolerance. Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Mobile <= 3 Watts (ppm)
50-450	50.0
450-512	5.0
821-896	2.5

Part 74.464 Frequency tolerance. For operations on frequencies above 25 MHz using authorized bandwidths to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter.

Part 80.209: 156-162 MHz 10 ppm. 400-466 MHz 5 ppm

Part 90.213 Frequency Stability

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

MINIMUM FREQUENCY STABILITY [Parts per million (ppm)]			
Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25-50	20	20	50
72-76	5	5	50
150-174	^{5,11} 5	⁶ 5	^{4,6} 50
216-220	1.0	1.0	1.0
220-222 ¹²	0.1	1.5	1.5
421-512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5	1.5	1.5
935-940	0.1	1.5	1.5
1427-1435	⁹ 300	300	300
Above 2450 ¹⁰

Part 90.213: Mobile stations over 2 W operating power - 1.5 ppm (806-809 MHz, 851-854 MHz, 896-901 MHz, and 935-940 MHz); 2.5 ppm (809-824 MHz, and 854-869 MHz)

Part 90.539 Frequency Stability

Transmitters designed to operate in 769-775 MHz and 799-805 MHz frequency bands must meet the frequency stability requirements in this section.

- (a) Mobile, portable and control transmitters must normally use automatic frequency control (AFC) to lock on to the base station signal.
- (b) The frequency stability of base transmitters operating in the narrowband segment must be 100 parts per billion or better.
- (c) The frequency stability of mobile, portable and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).

The EUT was tested while the AFC was not locked, therefore, the worst case limit is 1.5 ppm. The worst-case deviation was found to be -0.07 ppm.

9.2 Test Data

Table 9-1: Temperature Frequency Stability – 136.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	136.012495	-0.04
-20	136.012495	-0.04
-10	136.012497	-0.02
0	136.012495	-0.04
10	136.012502	0.01
20 (reference)	136.012500	0.00
30	136.012498	-0.01
40	136.012502	0.01
50	136.012505	0.04
55	136.012503	0.02
60	136.012495	-0.04

Table 9-2: Temperature Frequency Stability – 141.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	141.012492	-0.06
-20	141.012497	-0.02
-10	141.012498	-0.01
0	141.012495	-0.03
10	141.012502	0.01
20 (reference)	141.012500	0.00
30	141.012498	-0.01
40	141.012503	0.02
50	141.012505	0.03
55	141.012503	0.02
60	141.012492	-0.06

Table 9-3: Temperature Frequency Stability – 162.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	162.012490	-0.06
-20	162.012497	-0.02
-10	162.012497	-0.02
0	162.012497	-0.02
10	162.012505	0.03
20 (reference)	162.012500	0.00
30	162.012497	-0.02
40	162.012503	0.02
50	162.012508	0.05
55	162.012503	0.02
60	162.012490	-0.06

Table 9-4: Temperature Frequency Stability – 156.8 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	156.799992	-0.05
-20	156.799995	-0.03
-10	156.799997	-0.02
0	156.799997	-0.02
10	156.800000	0.00
20 (reference)	156.800000	0.00
30	156.799998	-0.01
40	156.800005	0.03
50	156.800006	0.04
55	156.800003	0.02
60	156.799992	-0.05

Table 9-5: Temperature Frequency Stability – 418.0 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	417.999984	-0.04
-20	417.999999	0.00
-10	417.999997	-0.01
0	418.000002	0.00
10	418.000002	0.00
20 (reference)	418.000000	0.00
30	417.999996	-0.01
40	418.000013	0.03
50	418.000018	0.04
55	418.000013	0.03
60	417.999984	-0.04

Table 9-6: Temperature Frequency Stability – 459.025 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	459.024974	-0.06
-20	459.024989	-0.02
-10	459.024987	-0.03
0	459.024994	-0.01
10	459.024992	-0.02
20 (reference)	459.025000	0.00
30	459.024986	-0.03
40	459.025010	0.02
50	459.025010	0.02
55	459.025003	0.01
60	459.024974	-0.06

Table 9-7: Temperature Frequency Stability – 469.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	469.987473	-0.06
-20	469.987492	-0.02
-10	469.987490	-0.02
0	469.987494	-0.01
10	469.987516	0.03
20 (reference)	469.987500	0.00
30	469.987484	-0.03
40	469.987506	0.01
50	469.987510	0.02
55	469.987503	0.01
60	469.987473	-0.06

Table 9-8: Temperature Frequency Stability – 772.0125 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	772.012457	-0.06
-20	772.012498	0.00
-10	772.012482	-0.02
0	772.012551	0.07
10	772.012482	-0.02
20 (reference)	772.012500	0.00
30	772.012489	-0.01
40	772.012510	0.01
50	772.012510	0.01
55	772.012506	0.01
60	772.012457	-0.06

Table 9-9: Temperature Frequency Stability – 802.0 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	801.999962	-0.05
-20	801.999990	-0.01
-10	801.999982	-0.02
0	802.000048	0.06
10	801.999984	-0.02
20 (reference)	802.000000	0.00
30	801.999976	-0.03
40	802.000010	0.01
50	802.000016	0.02
55	802.000003	0.00
60	801.999962	-0.05

Table 9-10: Temperature Frequency Stability – 815.0 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	814.999946	-0.07
-20	814.999994	-0.01
-10	814.999984	-0.02
0	815.000046	0.06
10	814.999982	-0.02
20 (reference)	815.000000	0.00
30	814.999978	-0.03
40	815.000024	0.03
50	815.000005	0.01
55	814.999998	0.00
60	814.999946	-0.07

Table 9-11: Temperature Frequency Stability – 860.0MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	859.999947	-0.06
-20	859.999990	-0.01
-10	859.999984	-0.02
0	860.000051	0.06
10	859.999984	-0.02
20 (reference)	860.000000	0.00
30	859.999965	-0.04
40	860.000016	0.02
50	860.000002	0.00
55	860.000002	0.00
60	859.999947	-0.06

Table 9-12: Temperature Frequency Stability – 869.9875 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	869.987449	-0.06
-20	869.987476	-0.03
-10	869.987479	-0.02
0	869.987554	0.06
10	869.987484	-0.02
20 (reference)	869.987500	0.00
30	869.987482	-0.02
40	869.987514	0.02
50	869.987530	0.03
55	869.987508	0.01
60	869.987449	-0.06

Table 9-13: Frequency Stability/Voltage Variation –136.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	136.012497	-0.02
6.375	136.012497	-0.02
7.5(reference)	136.012500	0.00
8.625	136.012500	0.00

Table 9-14: Frequency Stability/Voltage Variation – 141.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	141.012500	0.00
6.375	141.012500	0.00
7.5(reference)	141.012500	0.00
8.625	141.012500	0.00

Table 9-15: Frequency Stability/Voltage Variation – 162.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	162.012500	0.00
6.375	162.012500	0.00
7.5(reference)	162.012500	0.00
8.625	162.012500	0.00

Table 9-16: Frequency Stability/Voltage Variation –156.8 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	156.800000	0.00
6.375	156.799997	-0.02
7.5(reference)	156.800000	0.00
8.625	156.800000	0.00

Table 9-17: Frequency Stability/Voltage Variation – 418 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	418.000004	0.01
6.375	418.000007	0.02
7.5(reference)	418.000000	0.00
8.625	418.000004	0.01

Table 9-18: Frequency Stability/Voltage Variation – 459.025 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	459.024997	-0.01
6.375	459.025000	0.00
7.5(reference)	459.025000	0.00
8.625	459.024997	-0.01

Table 9-19: Frequency Stability/Voltage Variation –469.9875 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	469.987497	-0.01
6.375	469.987500	0.00
7.5(reference)	469.987500	0.00
8.625	469.987500	0.00

Table 9-20: Frequency Stability/Voltage Variation – 772.0125 MHz

Voltage (VDC)	Measured Frequency (Hz)	ppm
6.3 Battery End-point	772.012497	0.00
6.375	772.012503	0.00
7.5(reference)	772.012500	0.00
8.625	772.012494	-0.01

Table 9-21: Frequency Stability/Voltage Variation – 802 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
6.3 Battery End-point	802.000891	1.11
6.375	802.000000	0.00
7.5(reference)	802.000000	0.00
8.625	801.999994	-0.01

Table 9-22: Frequency Stability/Voltage Variation –815 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
6.3 Battery End-point	814.999997	0.00
6. 6.3 *375	815.000000	0.00
7.5(reference)	815.000000	0.00
8.625	814.999994	-0.01

Table 9-23: Frequency Stability/Voltage Variation – 860 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
6.3 Battery End-point	859.999994	-0.01
6.375	859.999997	0.00
7.5(reference)	860.000000	0.00
8.625	859.999994	-0.01

Table 9-24: Frequency Stability/Voltage Variation – 869.9875 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
6.3 Battery End-point	869.987494	-0.01
6.375	869.987494	-0.01
7.5(reference)	869.987500	0.00
8.625	869.987494	-0.01

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 Hz

Results: Pass

Table 9-25: Test Equipment Used For Testing Temperature Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901350	Meterman	33XR	Multimeter	040402802	09/20/21
901672	Rohde & Schwarz	FSEM30	Spectrum Analyzer	FSEM30	04/25/22
901724	API Weinschel, Inc.	48-40-34	40 dB 100W Attenuator	CJ8921	09/15/21
N/A	GW Instek	PSS-3203	Power Supply	2679	Not Required
900946	Tenney Engineering, Inc	TH65	Temperature Chamber with Humidity	11380	04/7/22

Test Personnel:

Daniel W. Baltzell EMC Test Engineer	 Signature	February 9, 2021 Date of Test
---	--	----------------------------------

10 FCC §2.1047(a)(b): Modulation Characteristics; Part 74.463: Modulation Requirements; Part 80.213: Modulation Requirements; RSS-119 5.2: Types of Modulation

10.1 Test Procedures

10.1.1 Audio Frequency Response

ANSI C63.26 2015, section 5.3.3

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

Audio Frequency Response = 20 LOG (DEVfreq/DEVref)

10.1.2 Audio Low Pass Filter Response

ANSI C63.26 2015, section 5.3

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.


10.1.3 Modulation Limiting

ANSI C63.26 2015, section 5.3.2


The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level (0 dB) as a reference, the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.

10.1.4 Audio Frequency Response


Plot 10-1: Modulation Characteristics - Audio Frequency Response – 136.0125 MHz (WB)

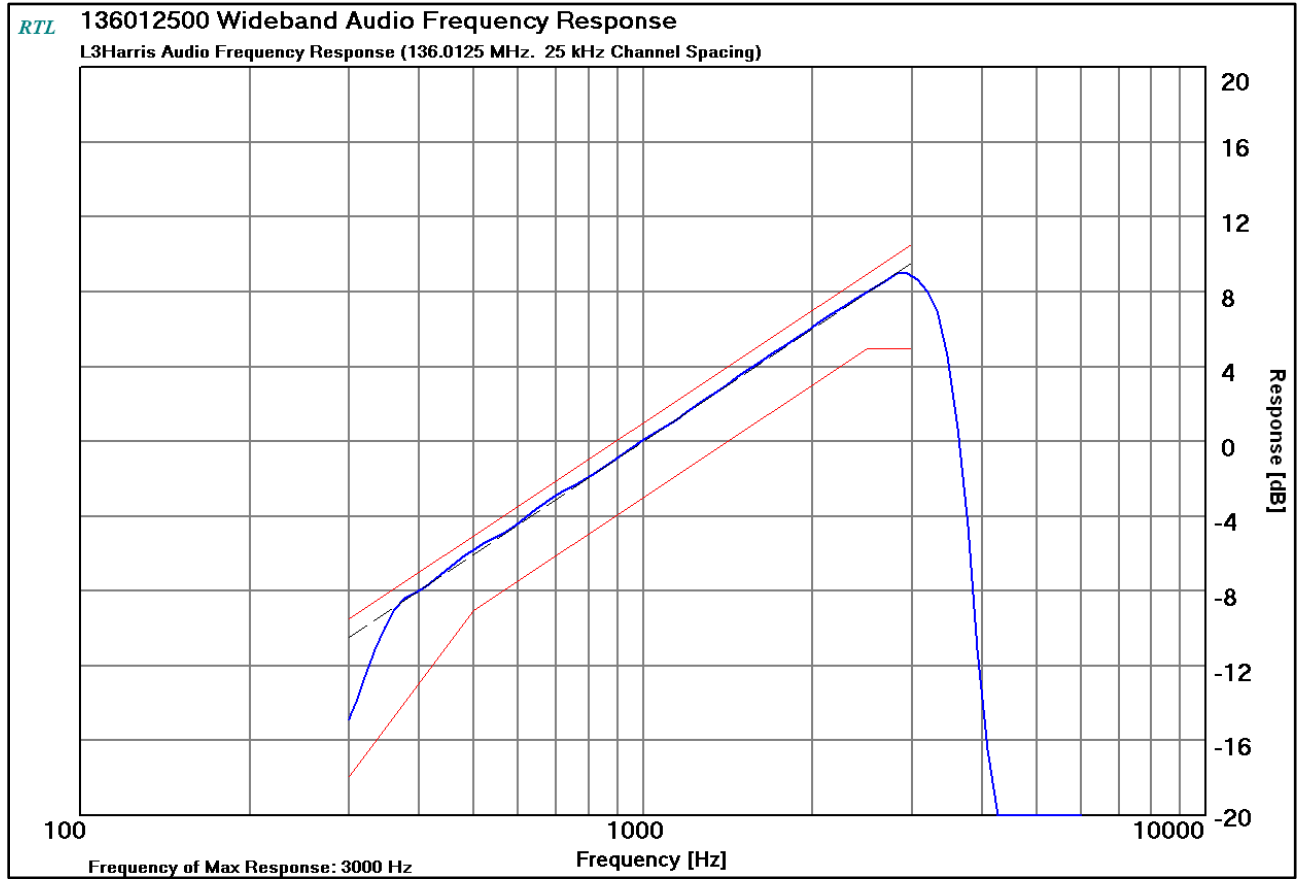


Plot 10-2: Modulation Characteristics - Audio Frequency Response – 418.0 MHz (NB)

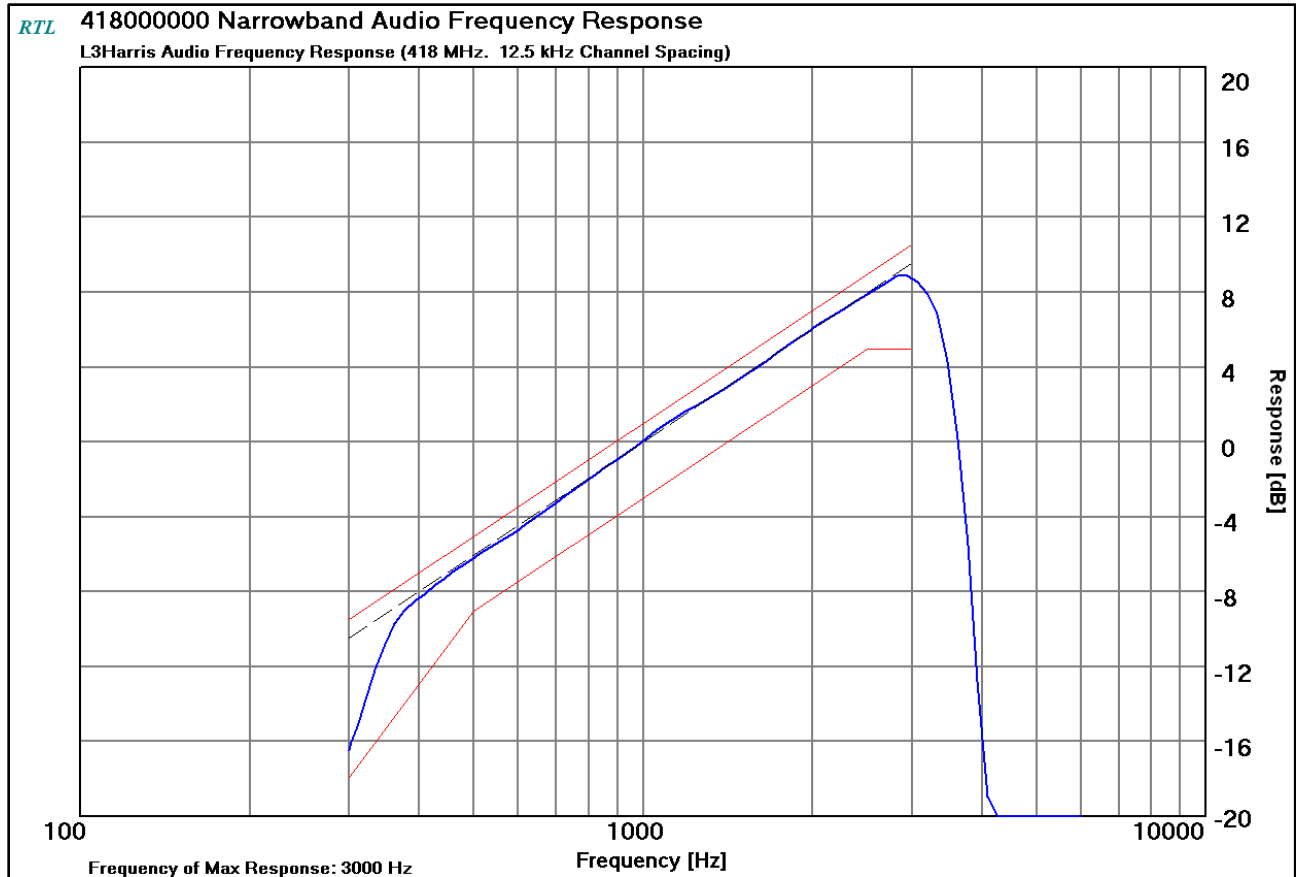

Plot 10-3: Modulation Characteristics - Audio Frequency Response – 772.0125 MHz (NB)

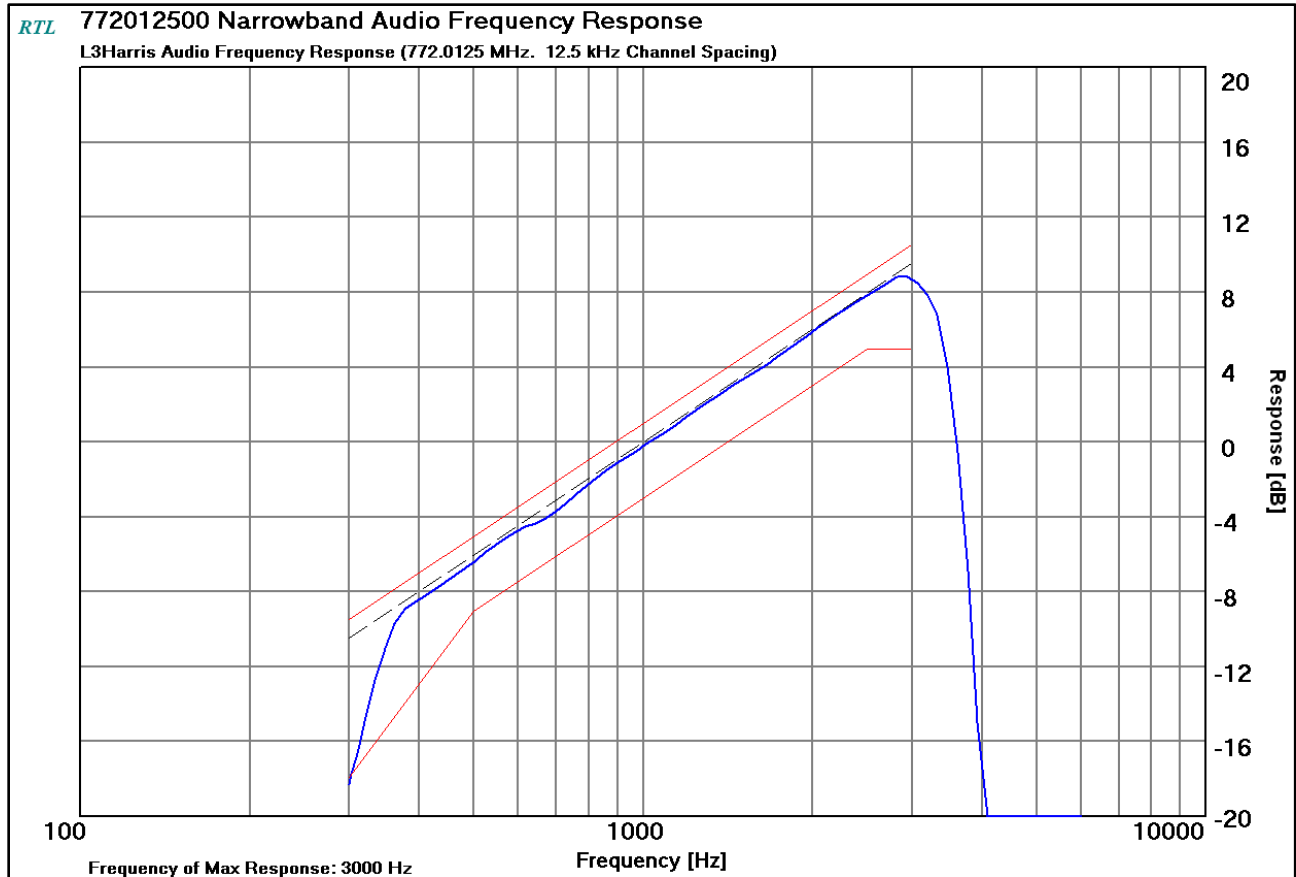


Plot 10-4: Modulation Characteristics - Audio Frequency Response – 860.0 MHz (NPSPAC)

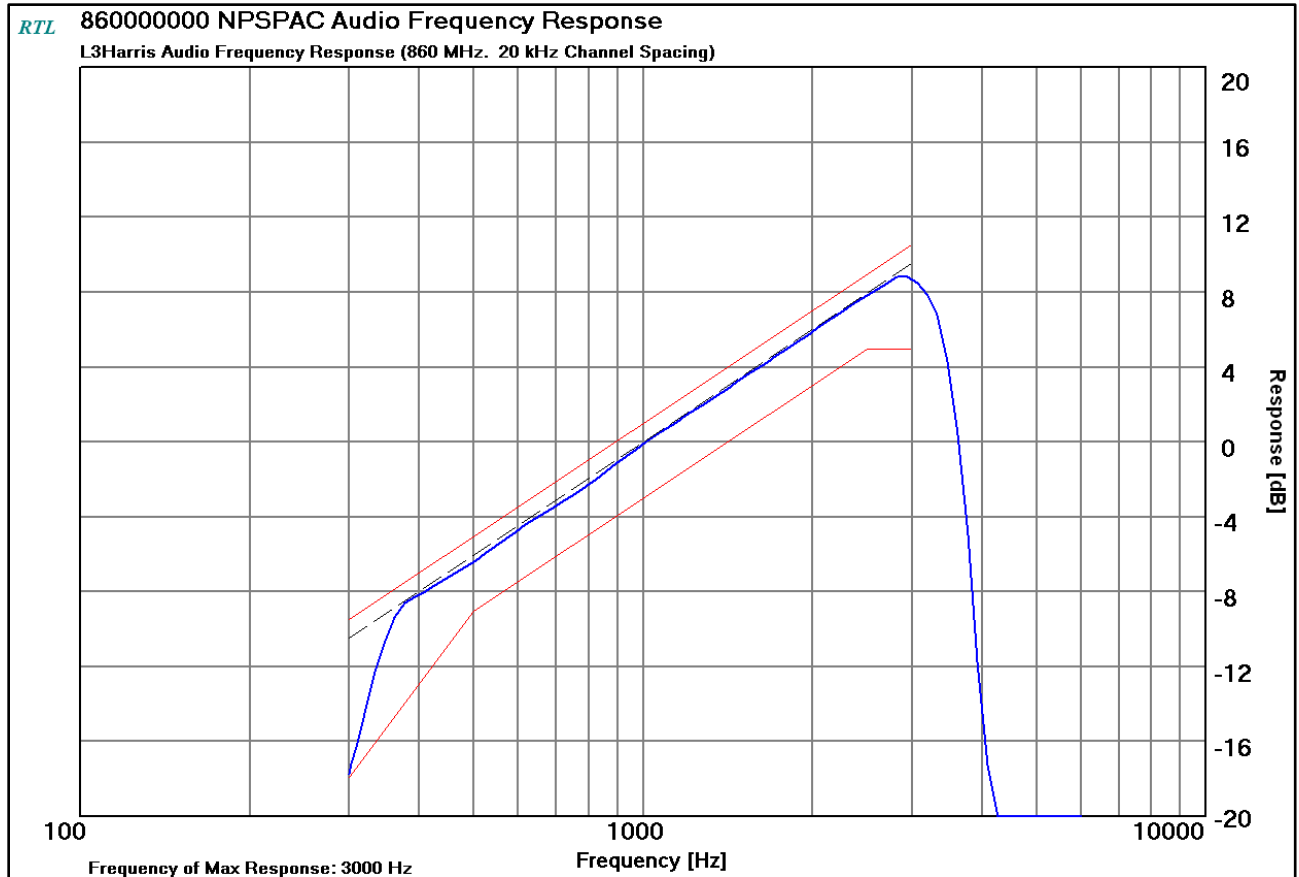


10.1.5 Modulation Limiting


Plot 10-5: Modulation Characteristics – Modulation Limiting – 162.0125 MHz; (WB); Positive Peak

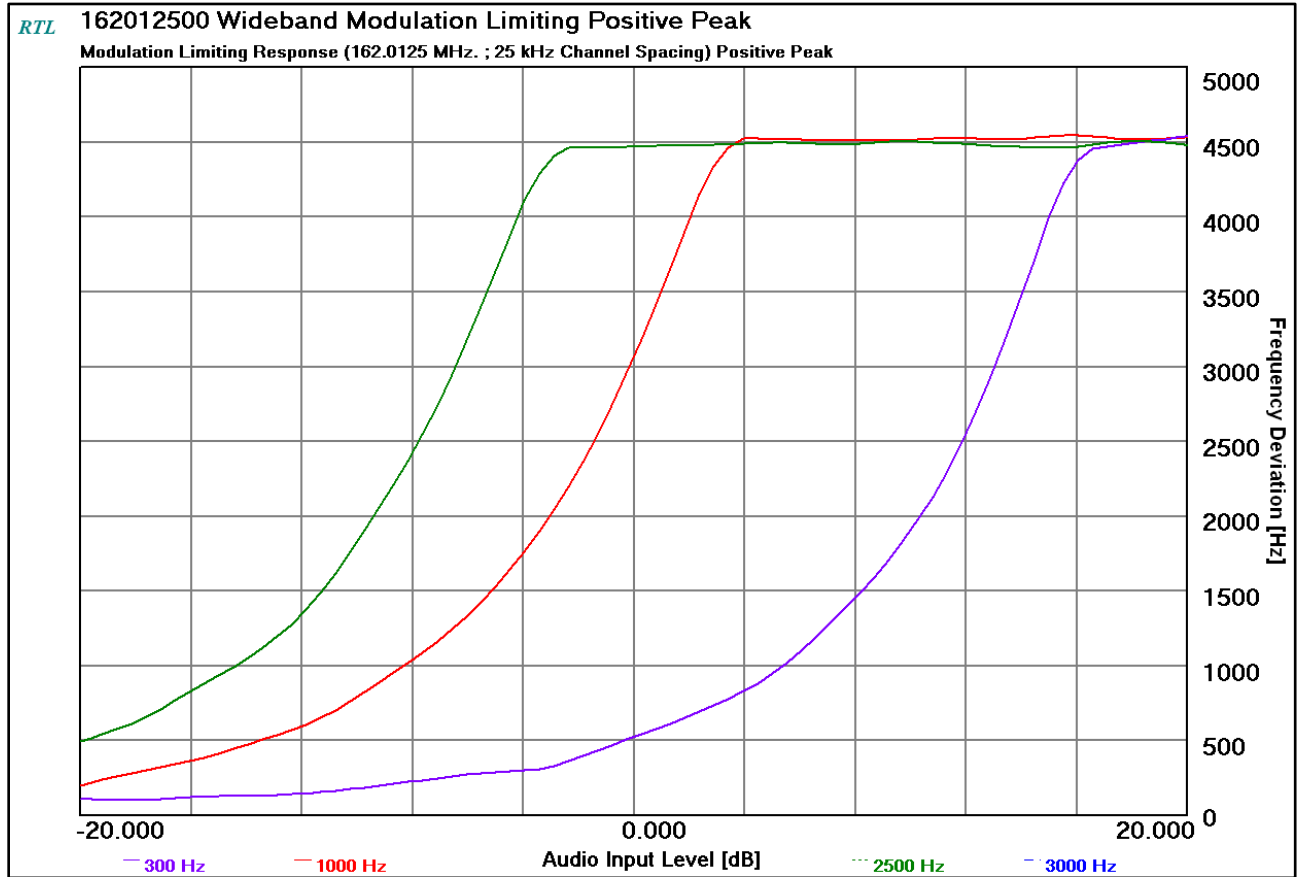


Plot 10-6: Modulation Characteristics – Modulation Limiting - 162.0125 MHz; (WB) Negative Peak

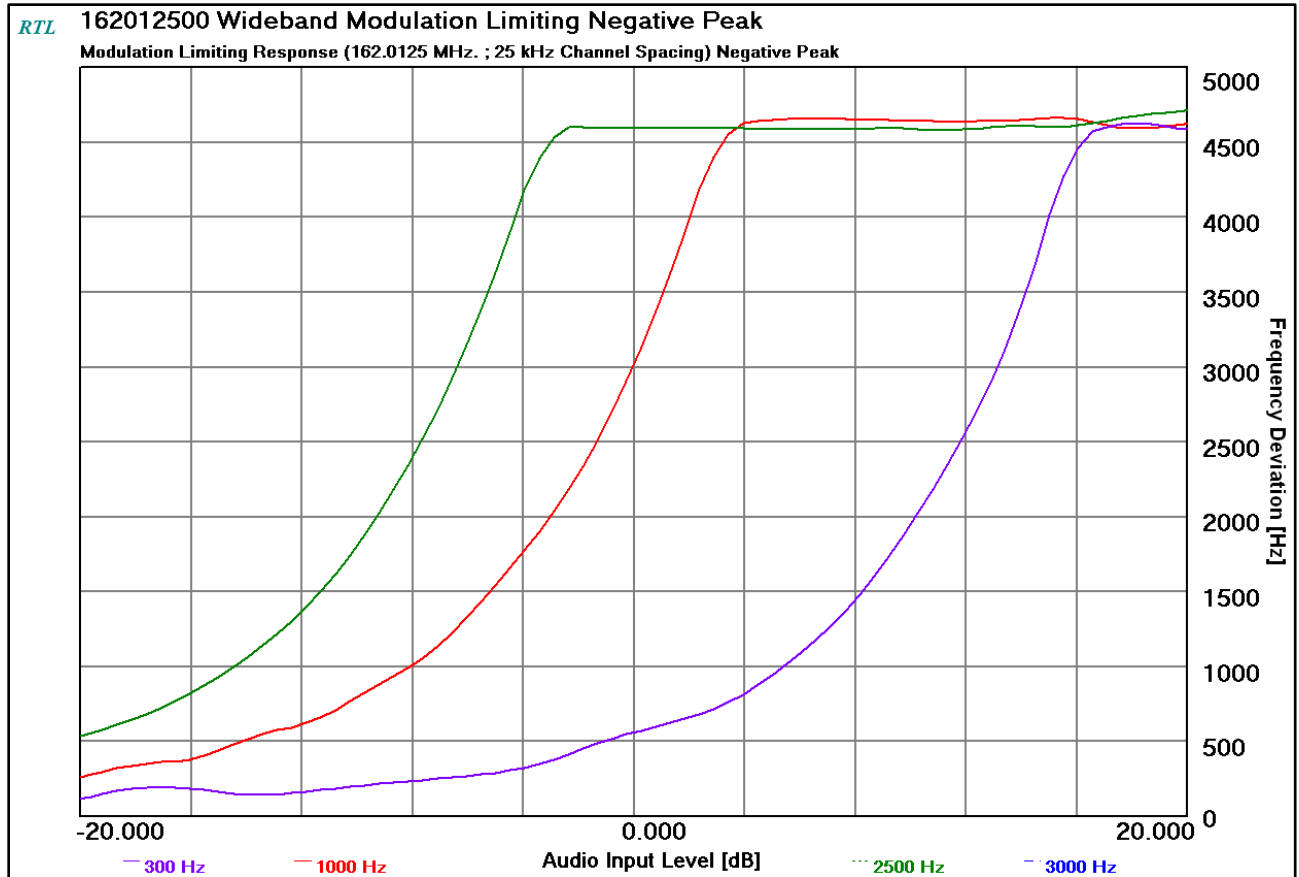


Plot 10-7: Modulation Characteristics – Modulation Limiting – 418.0 MHz; (NB); Positive Peak

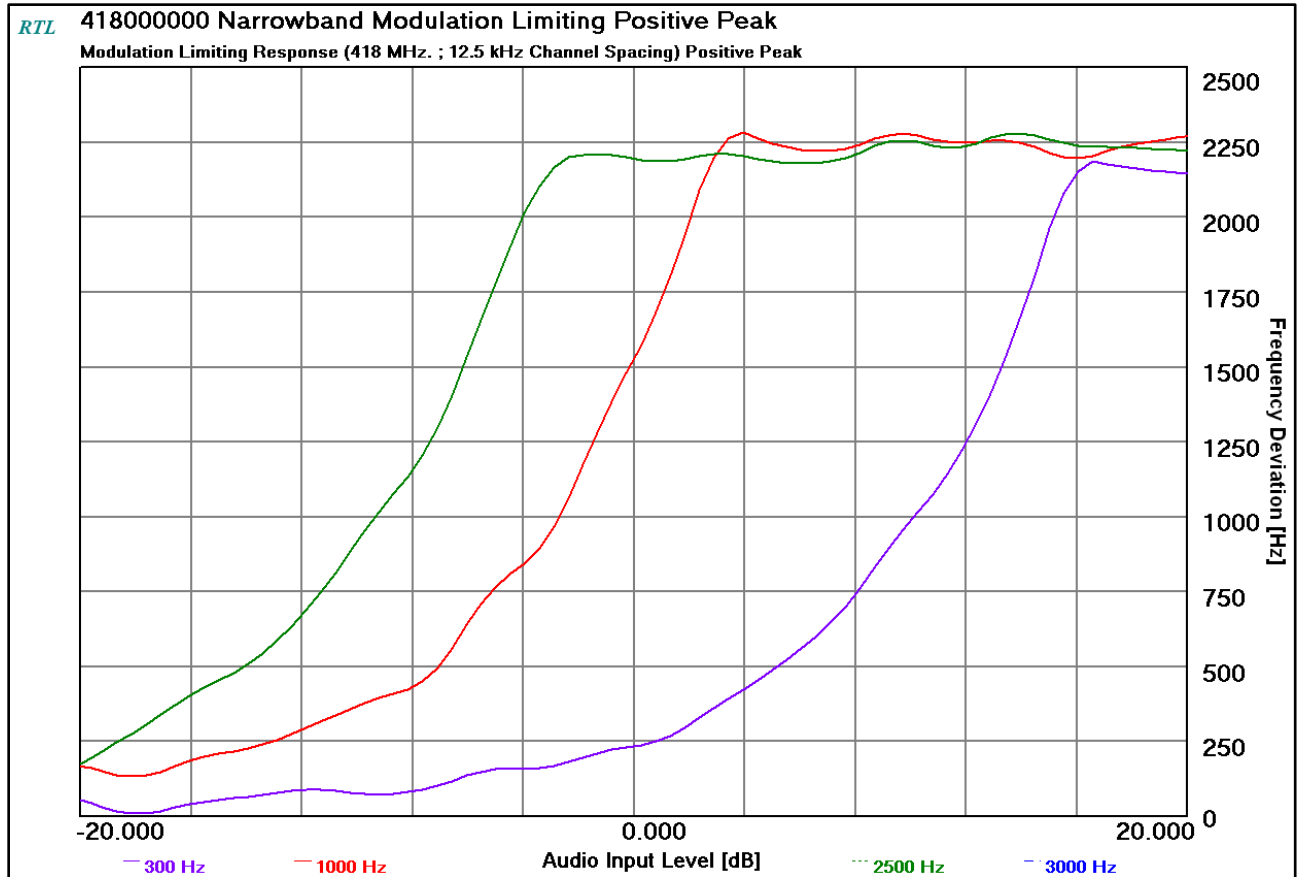


Plot 10-8: Modulation Characteristics – Modulation Limiting – 418.0 MHz; (NB); Negative Peak

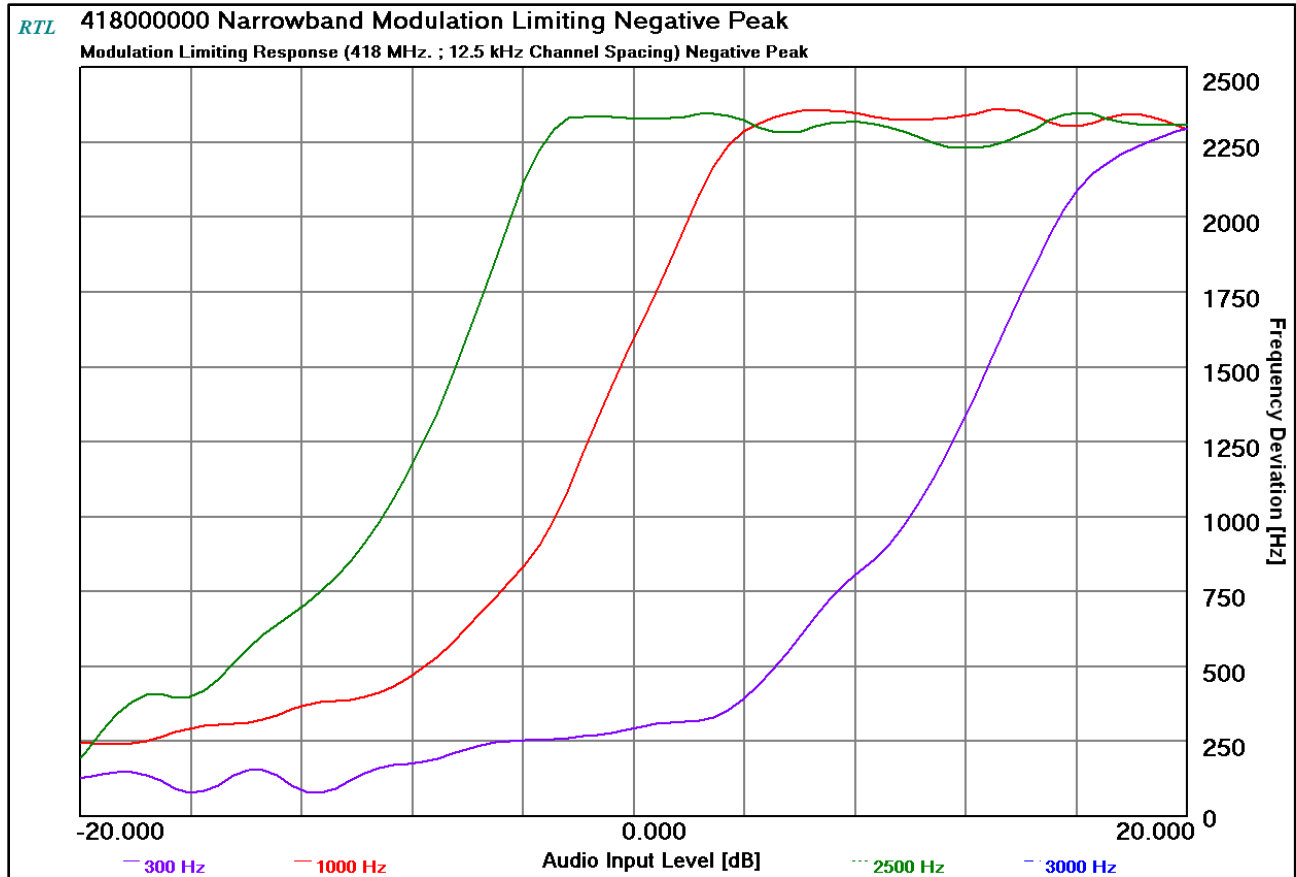


Plot 10-9: Modulation Characteristics – Modulation Limiting – 772.0125 MHz; (NB); Positive Peak

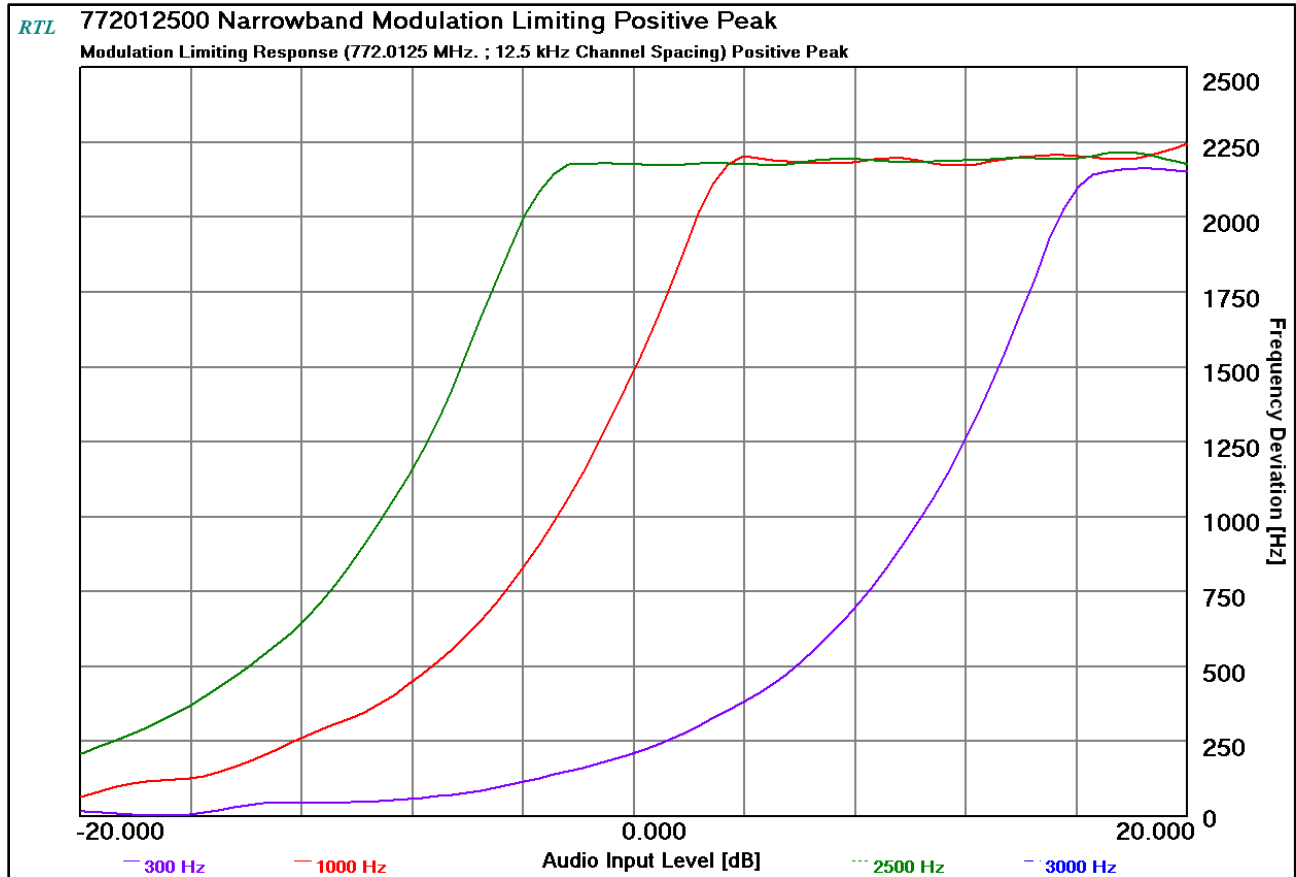


Plot 10-10: Modulation Characteristics – Modulation Limiting – 772.0125 MHz; (NB); Negative Peak

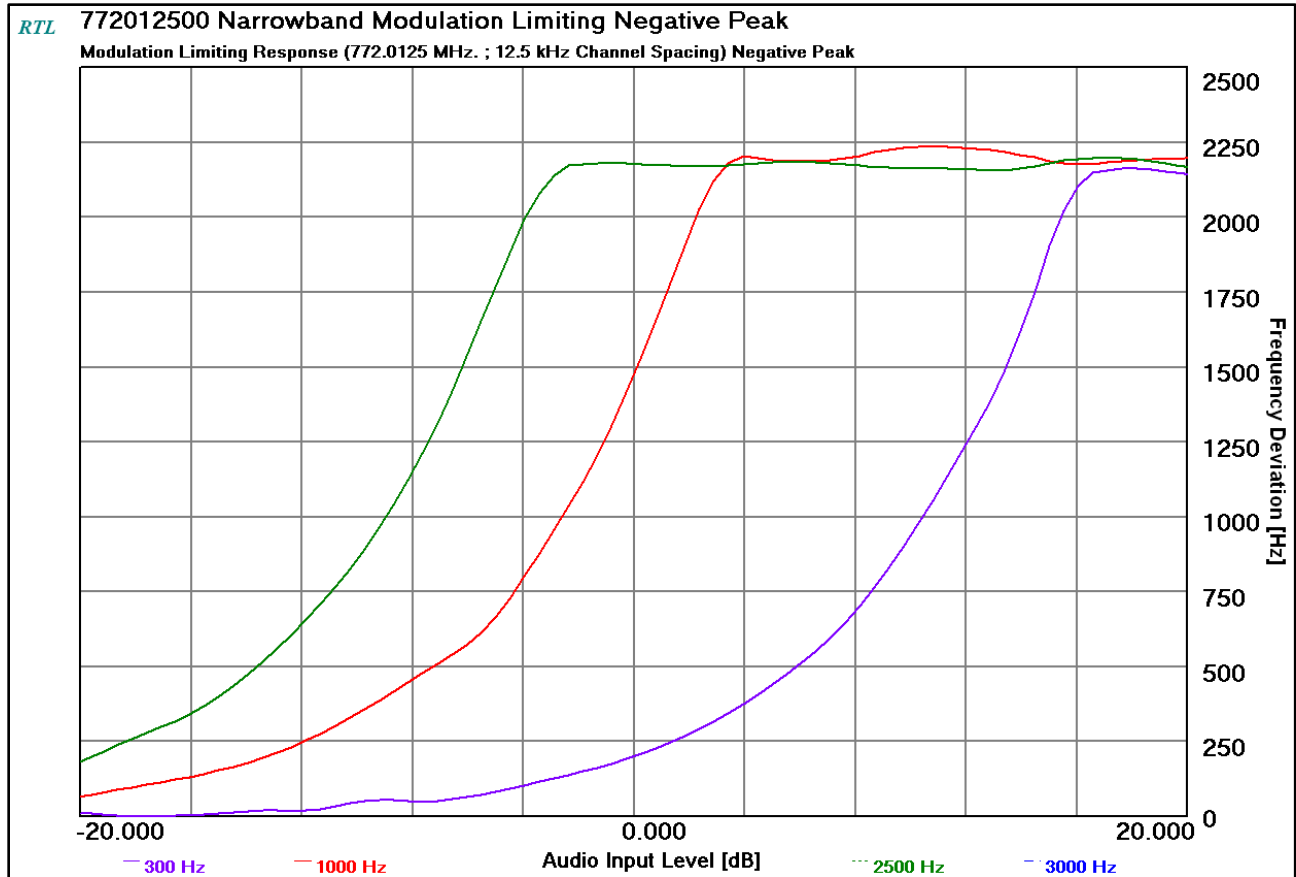

Plot 10-11: Modulation Characteristics – Modulation Limiting – 860.0000 MHz; (NPSPAC); Positive Peak

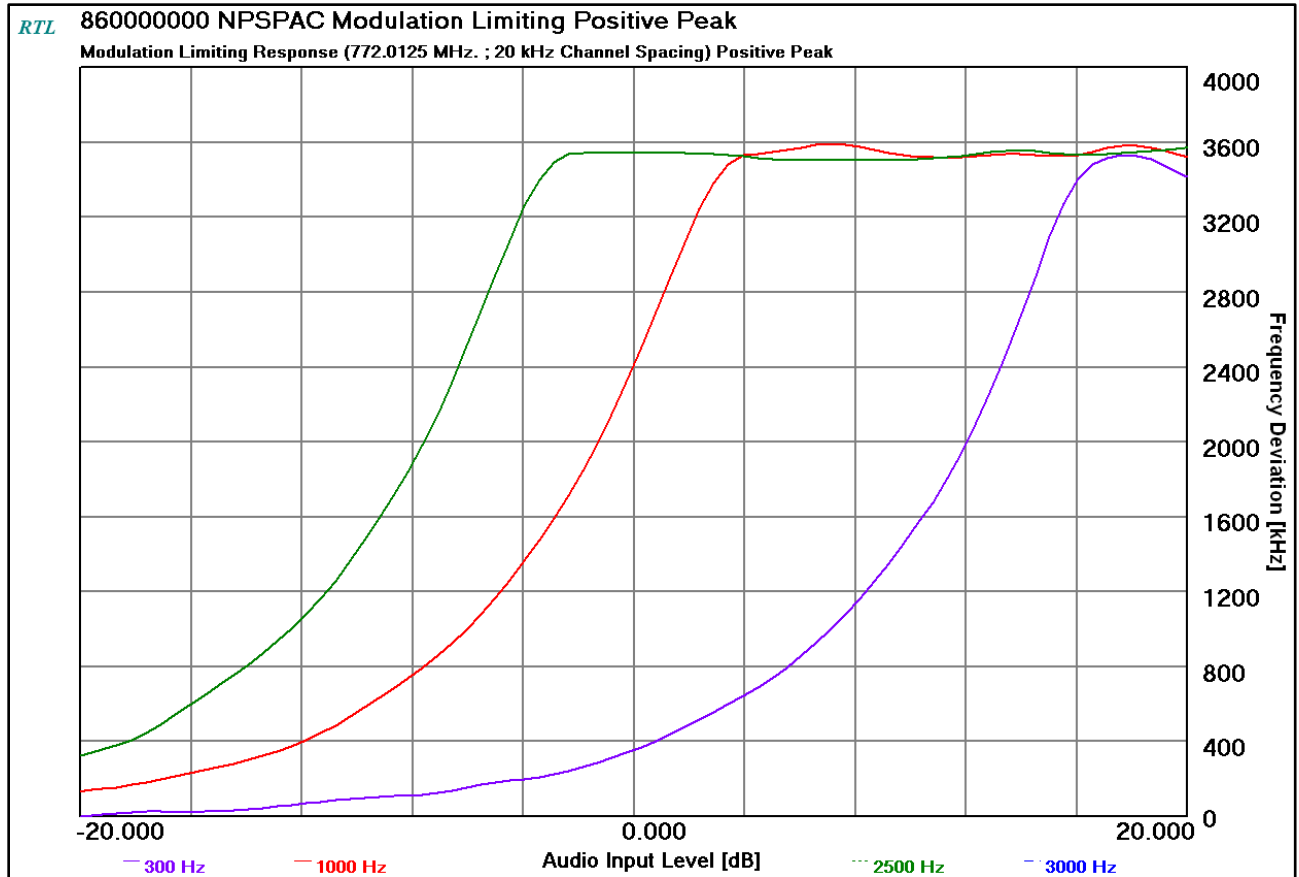

Plot 10-12: Modulation Characteristics – Modulation Limiting – 860.0000 MHz; (NPSPAC); Negative Peak

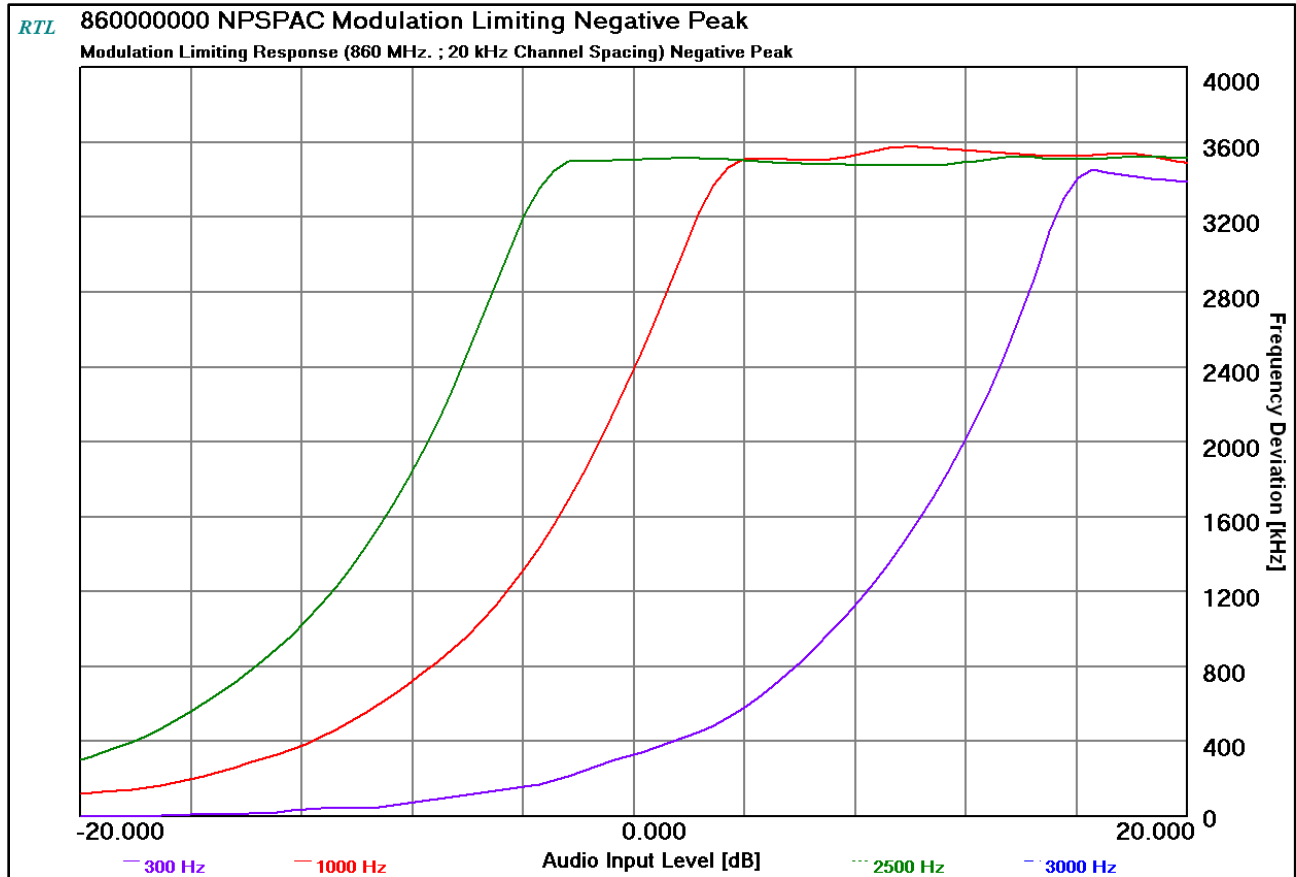

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: $\pm 0.5 \text{ Hz} / \pm 0.5 \text{ dB}$

Results: Pass

Table 10-1: Test Equipment Used For Testing Modulation Requirements

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/ Level Generator	2514A02585	2/1/22
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	2/1/22
901759	Hewlett Packard	HP 3586B	Selective Level Meter	2510A03886	7/20/21
901139	Weinschel Corporation	48-20-34	Attenuator DC-18 GHz 20 dB 100W	BK5859	5/4/21

Test Personnel:

Daniel W. Baltzell
 EMC Test Engineer

Signature

February 11, 2021
 Date of Test

11 FCC Rules and Regulations Part 90.214: Transient Frequency Response; Part 74.462(c): Authorized Bandwidth and Emissions; RSS-119 5.9: Transient Frequency Behavior

11.1 Test Procedure

TIA-EIA-603-C 2004, section 2.2.3. Transmitter plots were taken with the radio set at high power.

§90.214 Transient Frequency Behavior

Transmitters designed to operate in the 150–174 MHz and 421–512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1,2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in § 90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.


⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 Test Data


Plot 11-1: Transient Frequency Behavior – 150.0125 MHz; Wide Band; Carrier ON Time

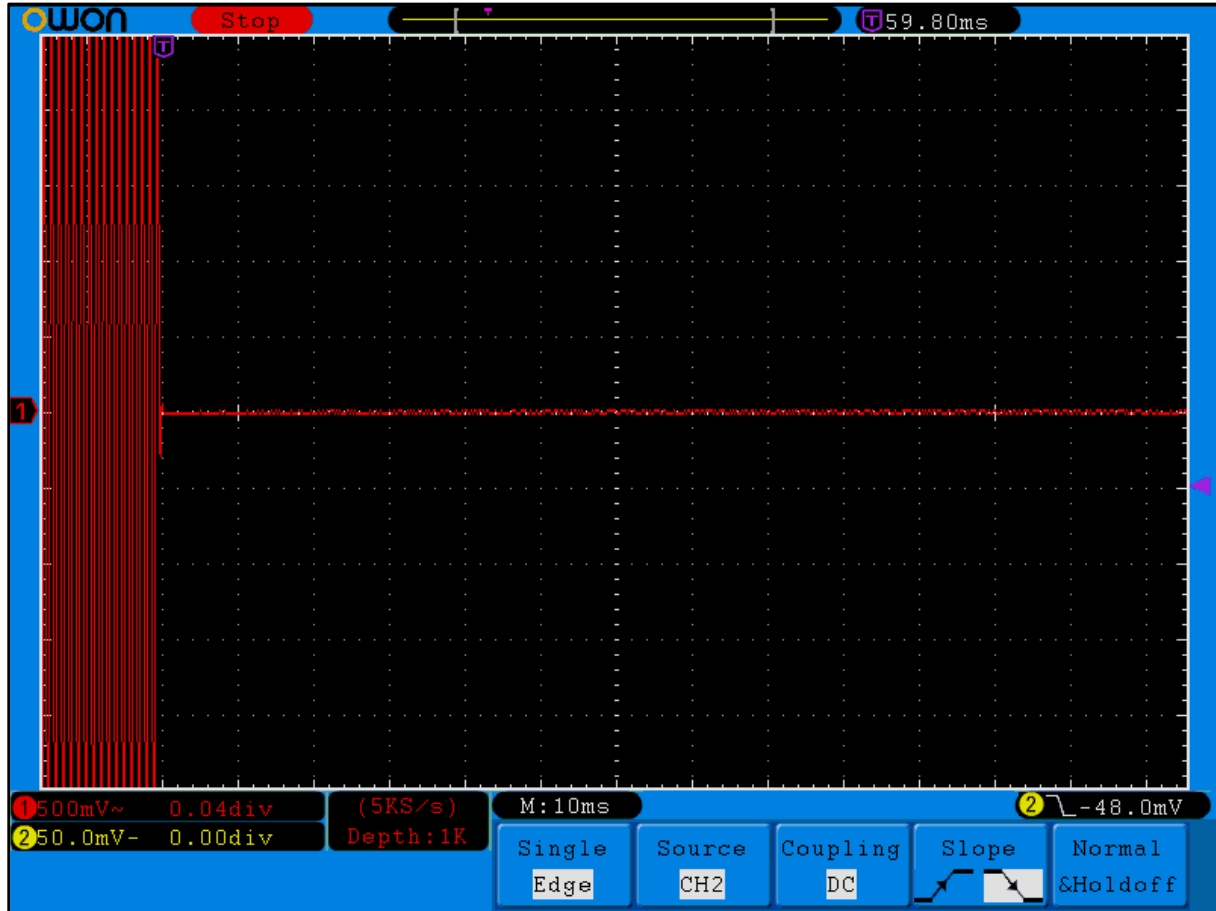


Plot 11-2: Transient Frequency Behavior – 150.0125 MHz; Wide Band; Carrier OFF Time

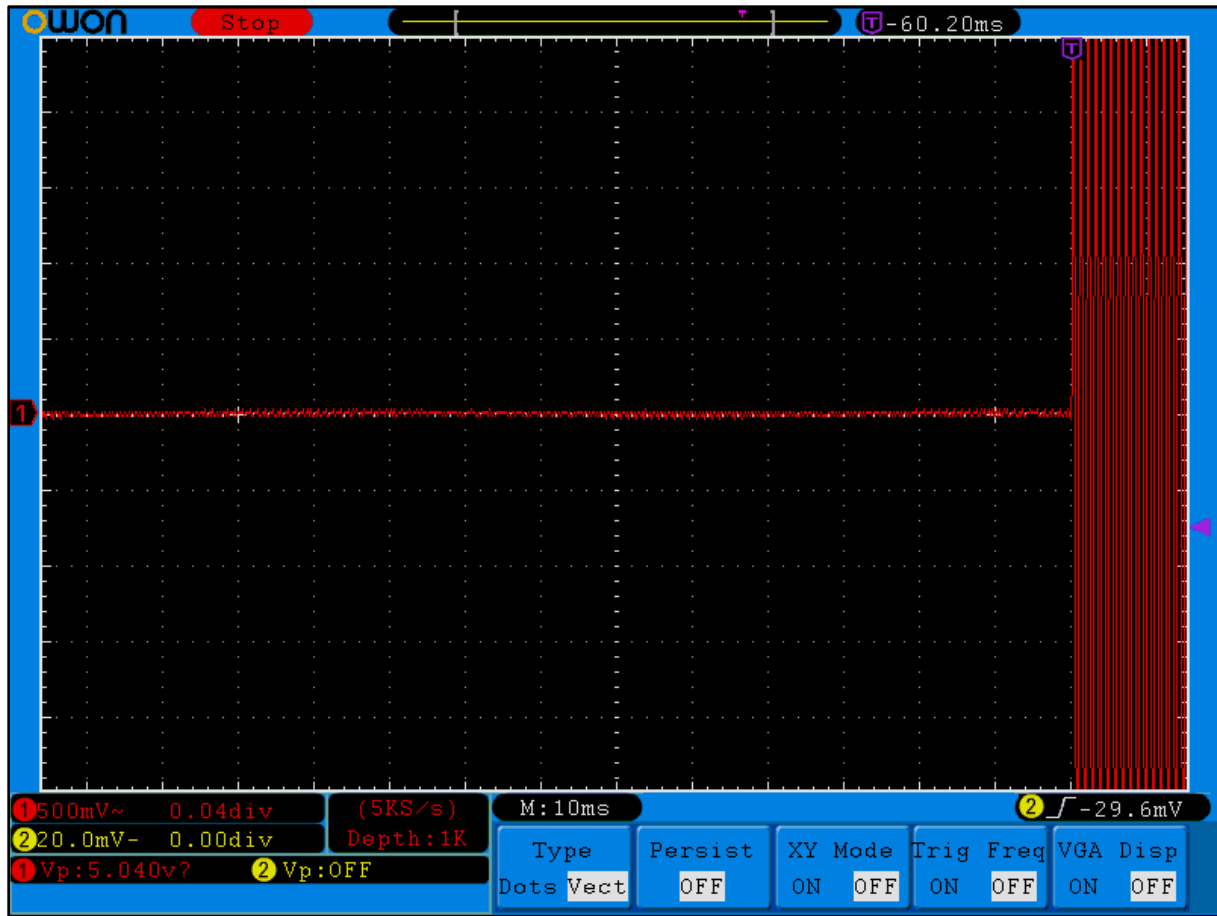


Plot 11-3: Transient Frequency Behavior – 150.0125 MHz; Narrow Band; Carrier ON Time

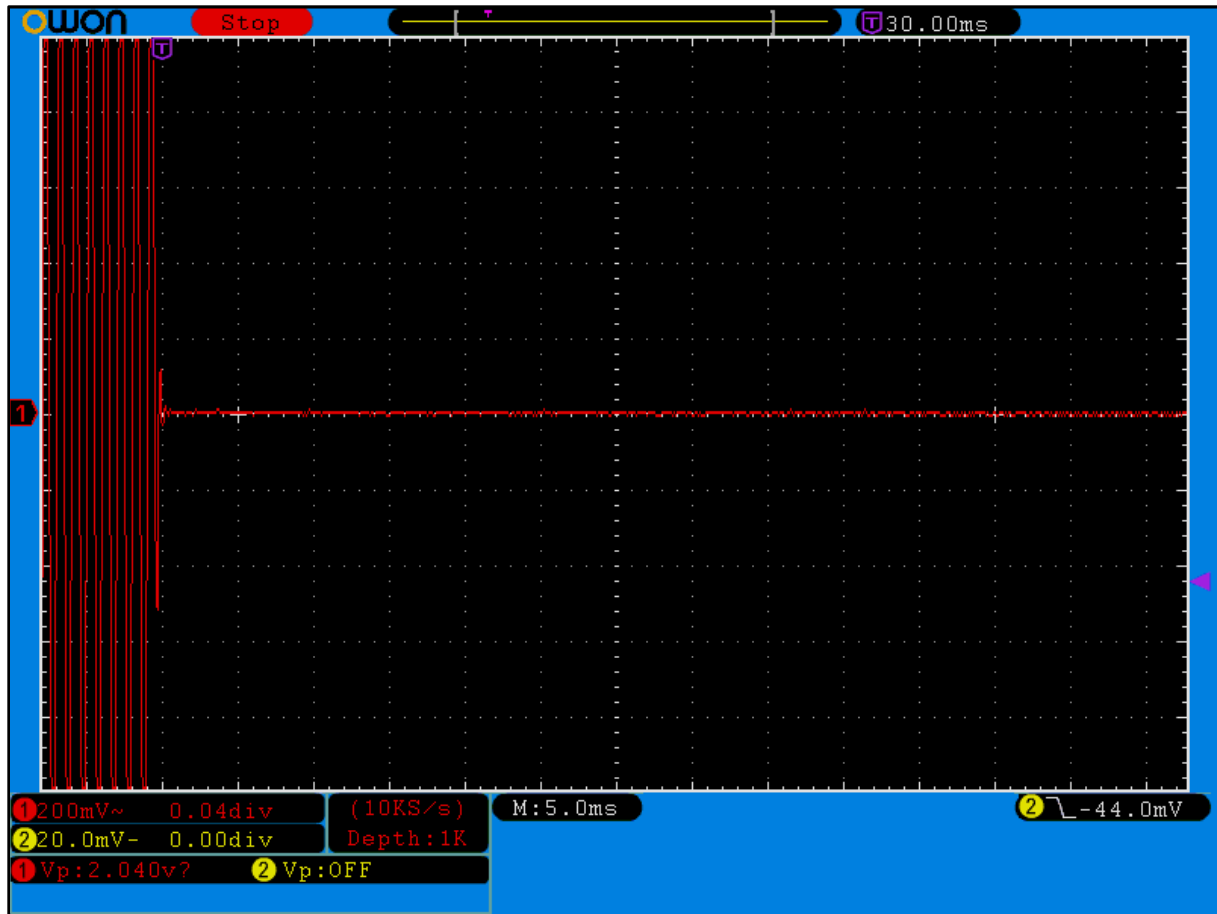


Plot 11-4: Transient Frequency Behavior – 150.0125 MHz; Narrow Band; Carrier OFF Time

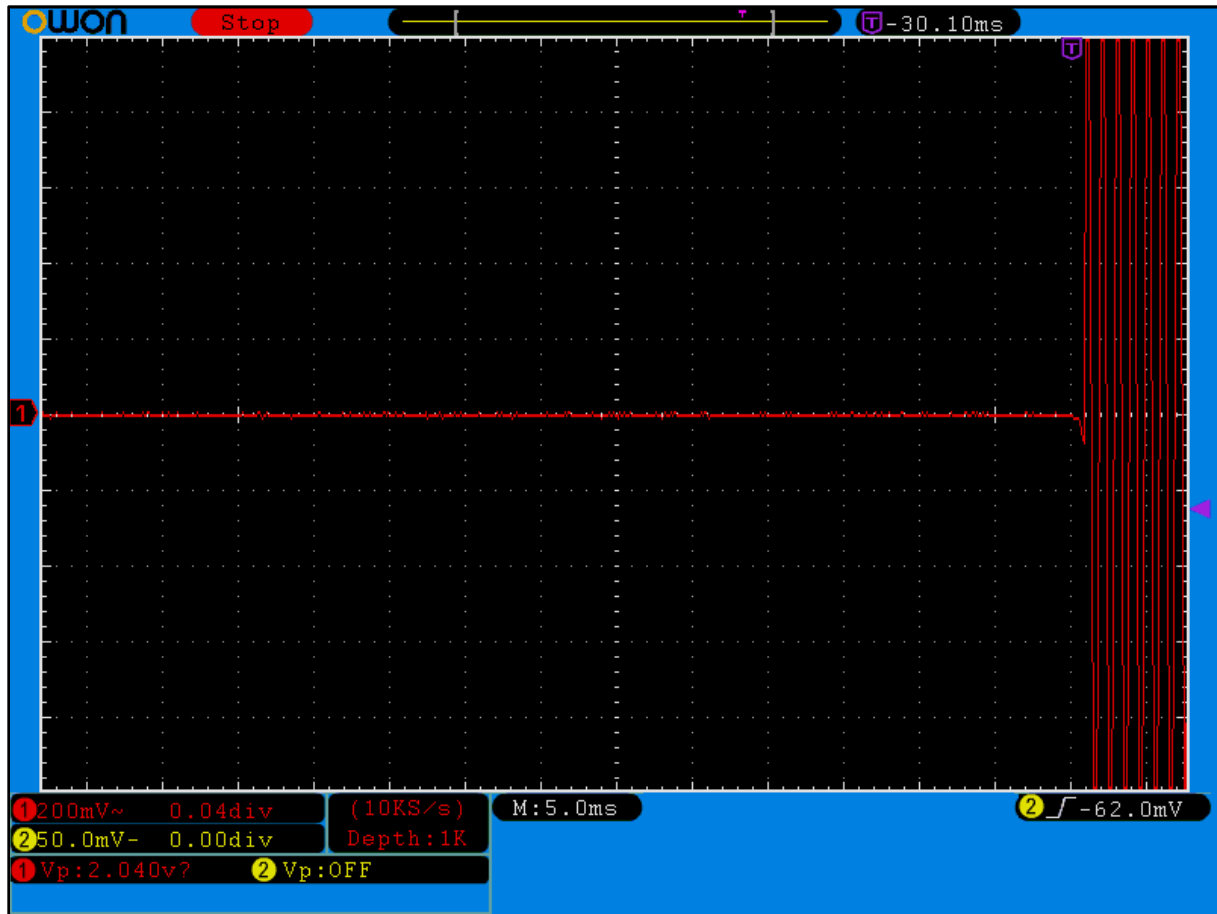


Plot 11-5: Transient Frequency Behavior – 162.0125 MHz; Wide Band; Carrier ON Time

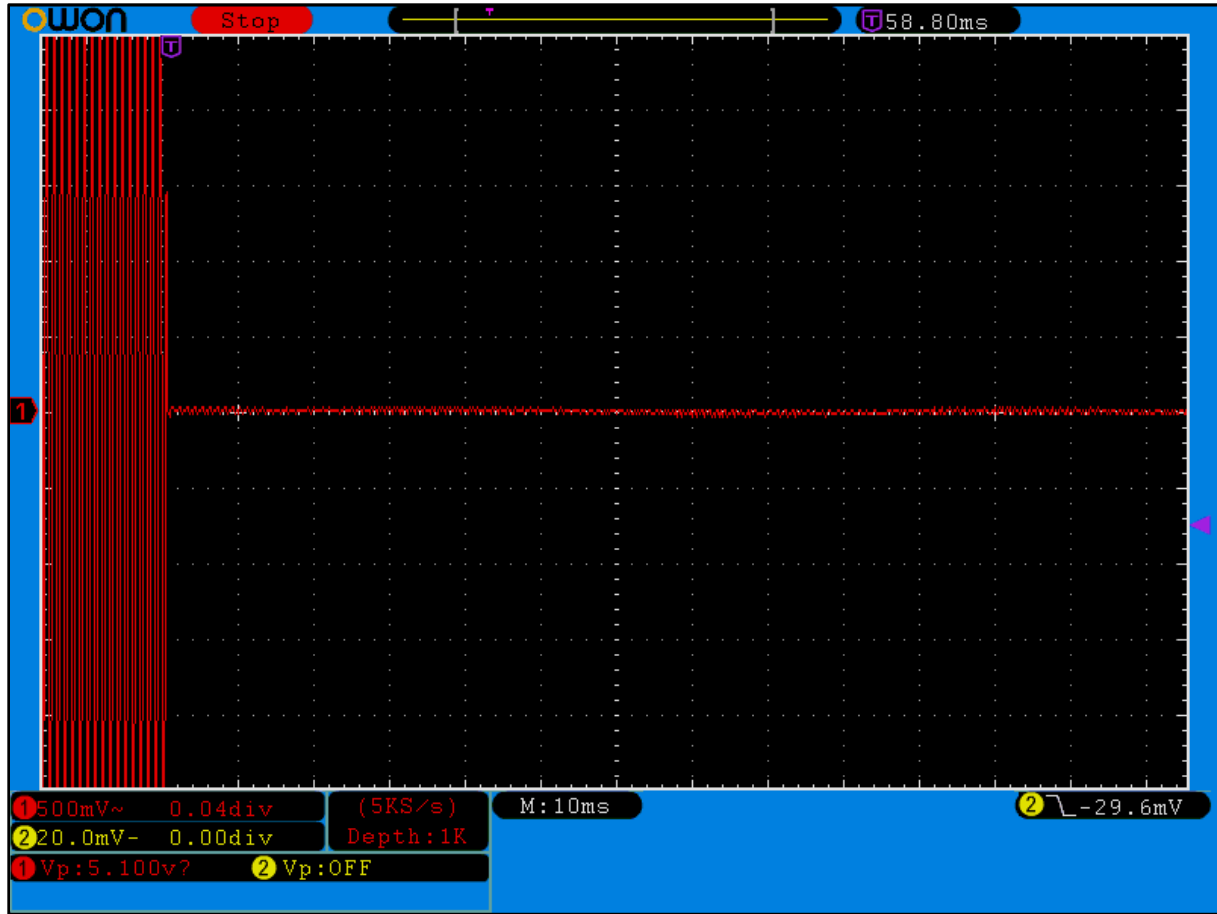


Plot 11-6: Transient Frequency Behavior – 162.0000 MHz; Wide Band; Carrier OFF Time

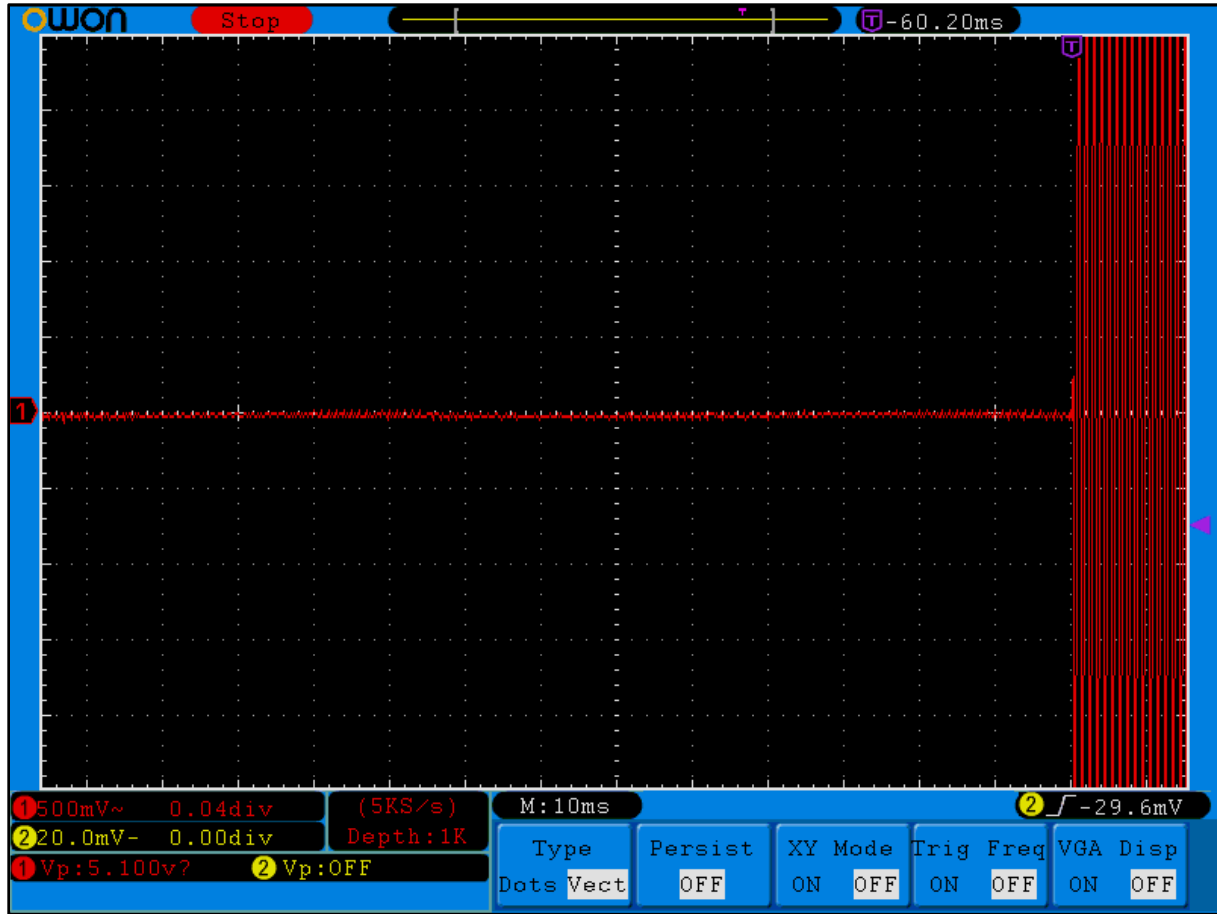


Plot 11-7: Transient Frequency Behavior – 162.0125 MHz; Narrow Band; Carrier ON Time

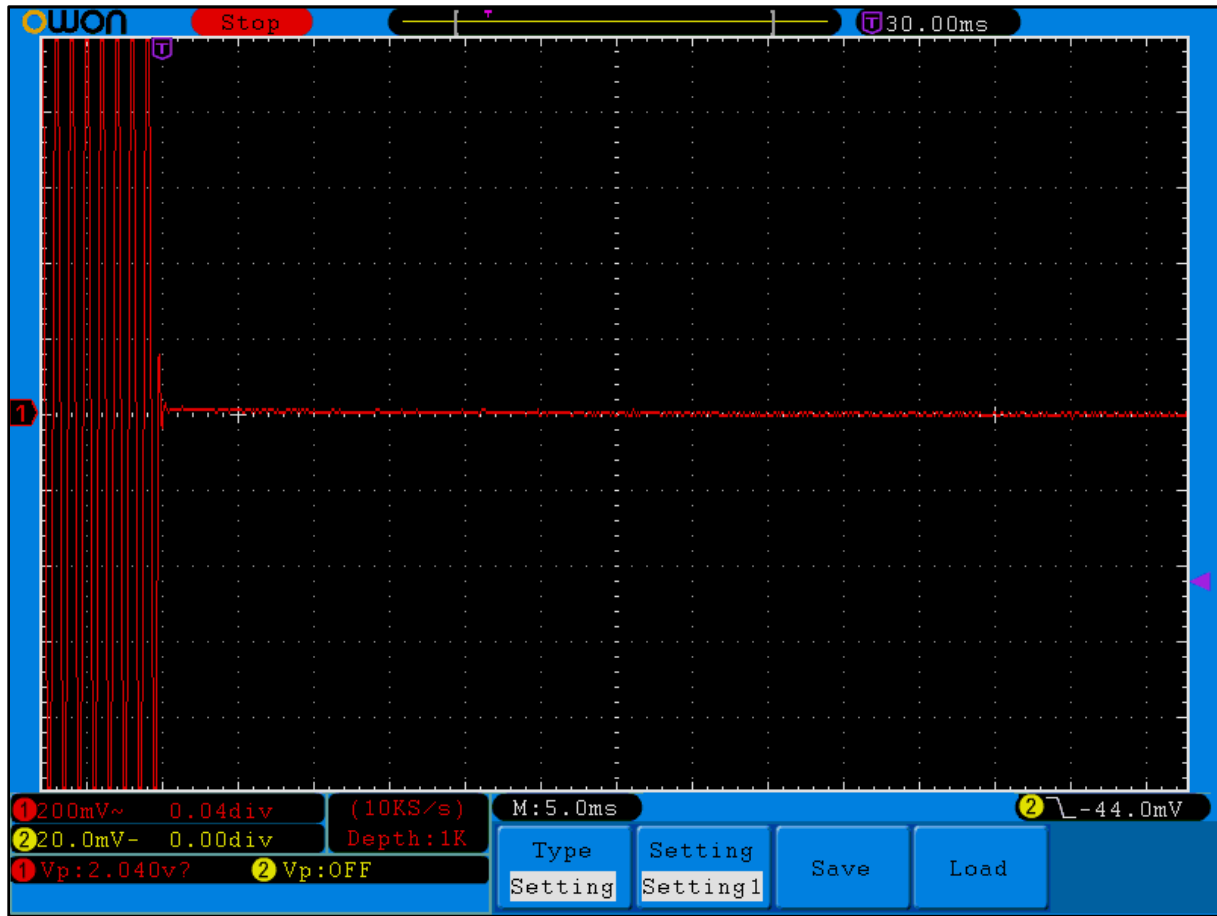


Plot 11-8: Transient Frequency Behavior – 162.0125 MHz; Narrow Band; Carrier OFF Time

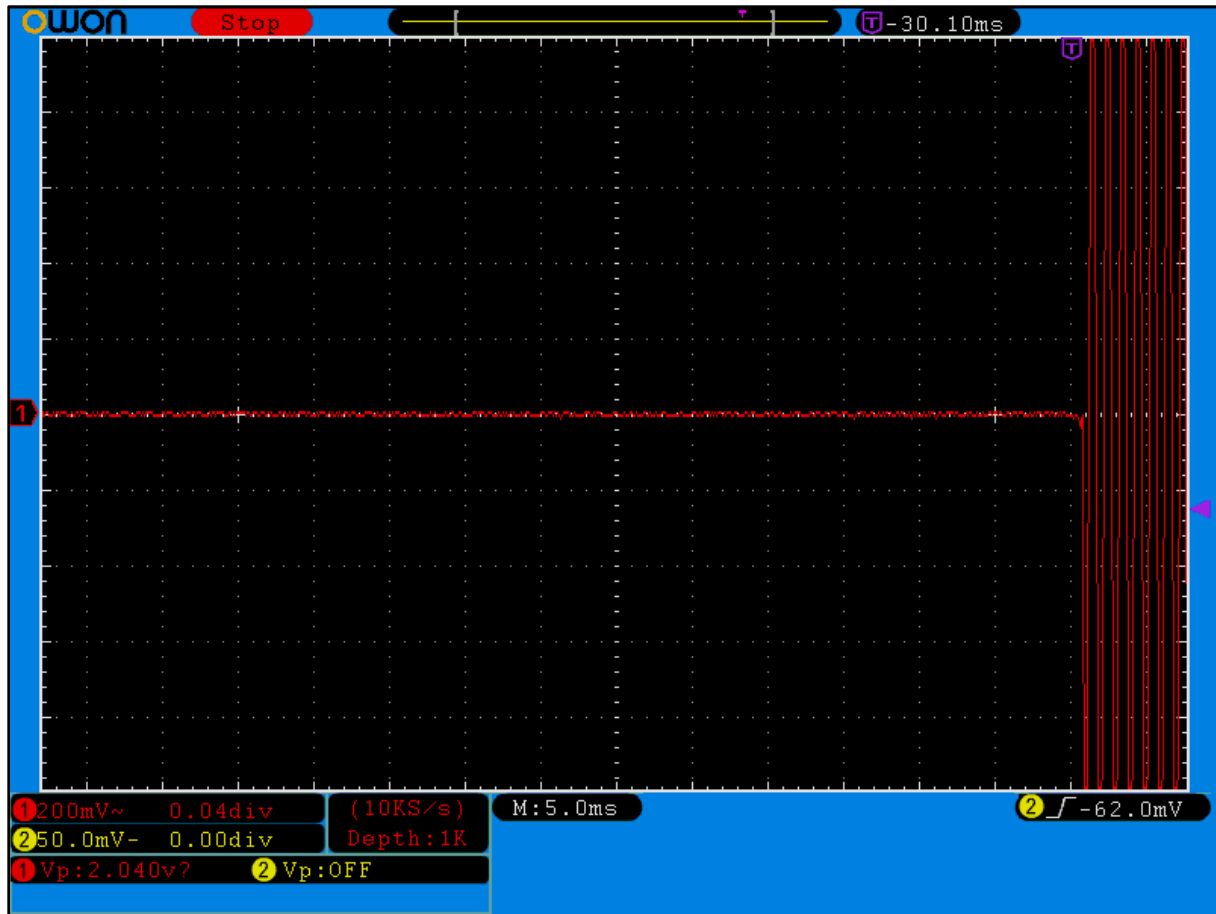


Plot 11-9: Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier ON Time

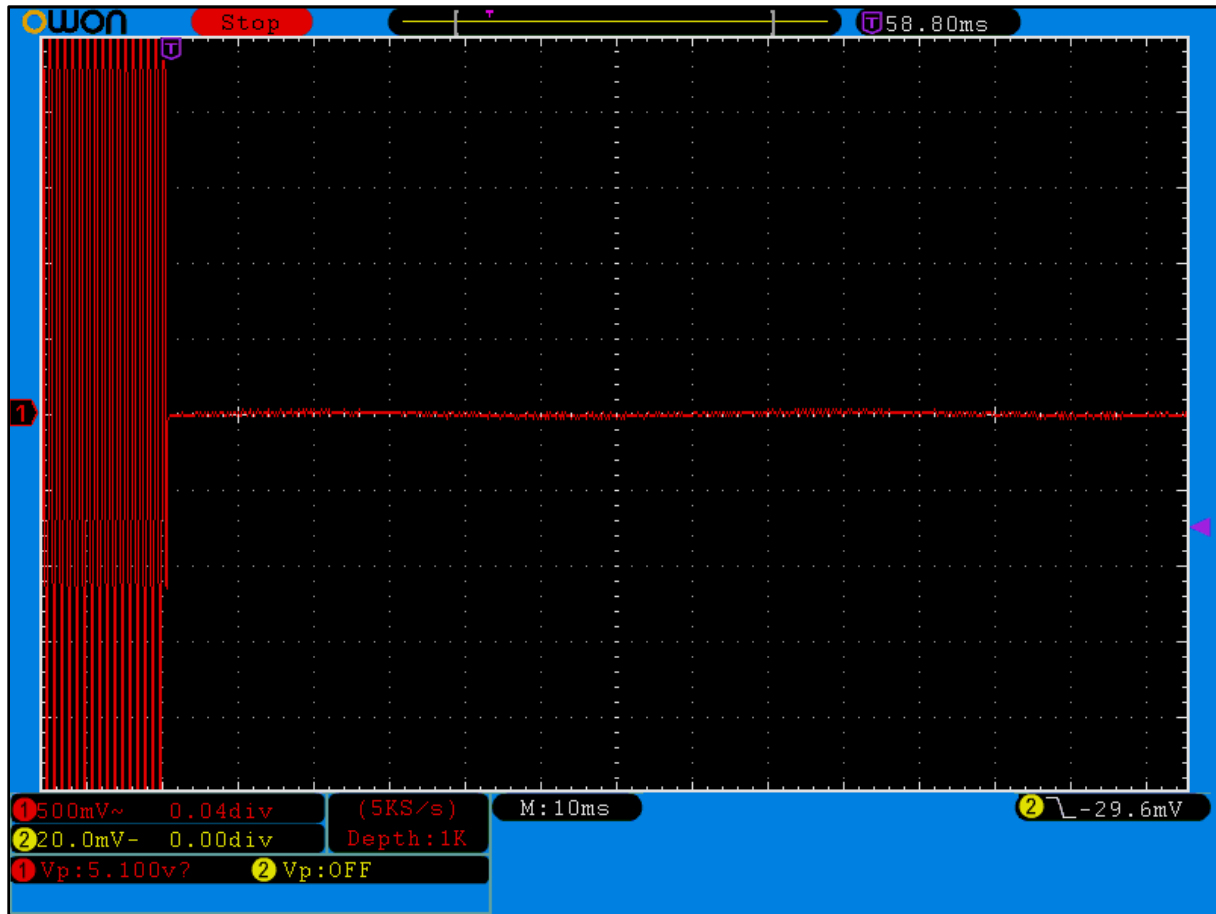


Plot 11-10: Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier OFF Time

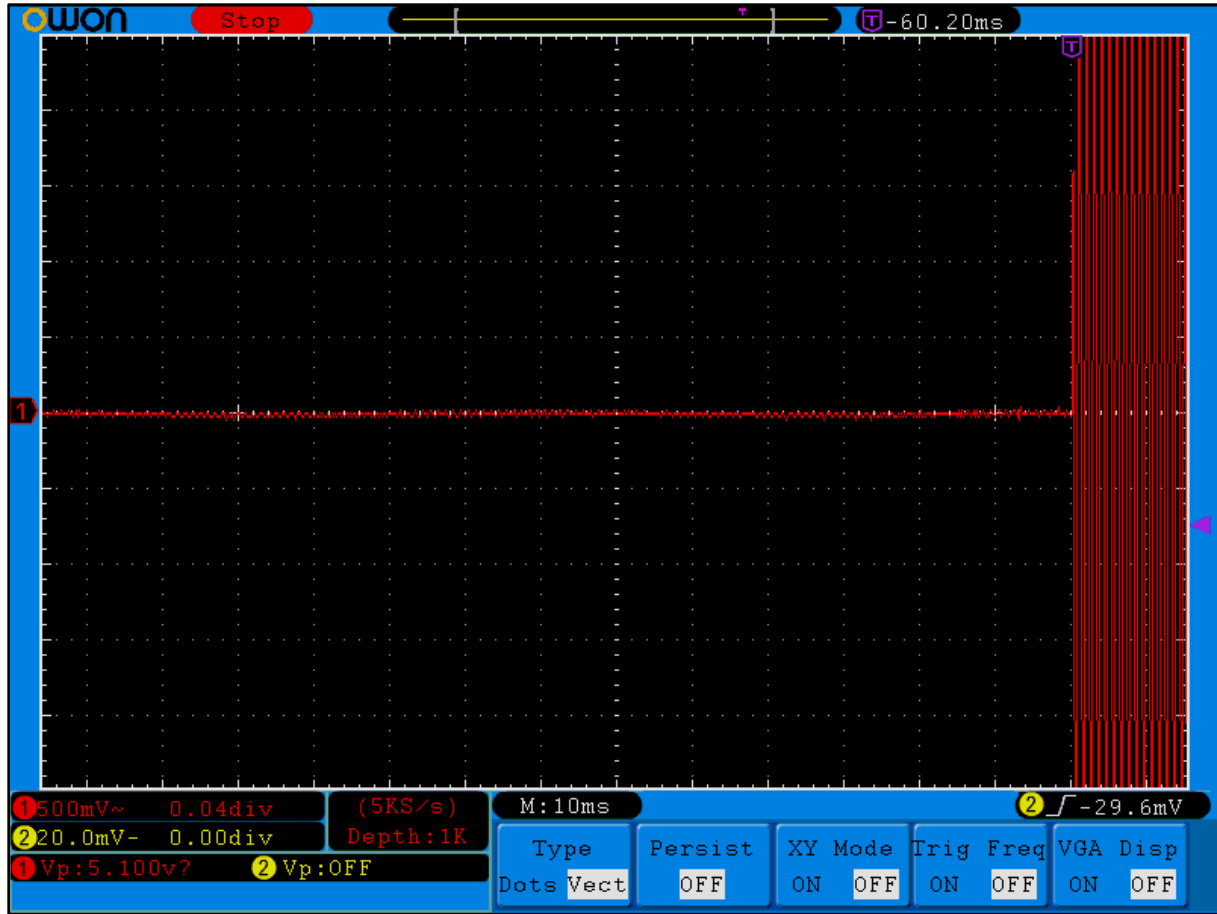


Plot 11-11: Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier ON Time

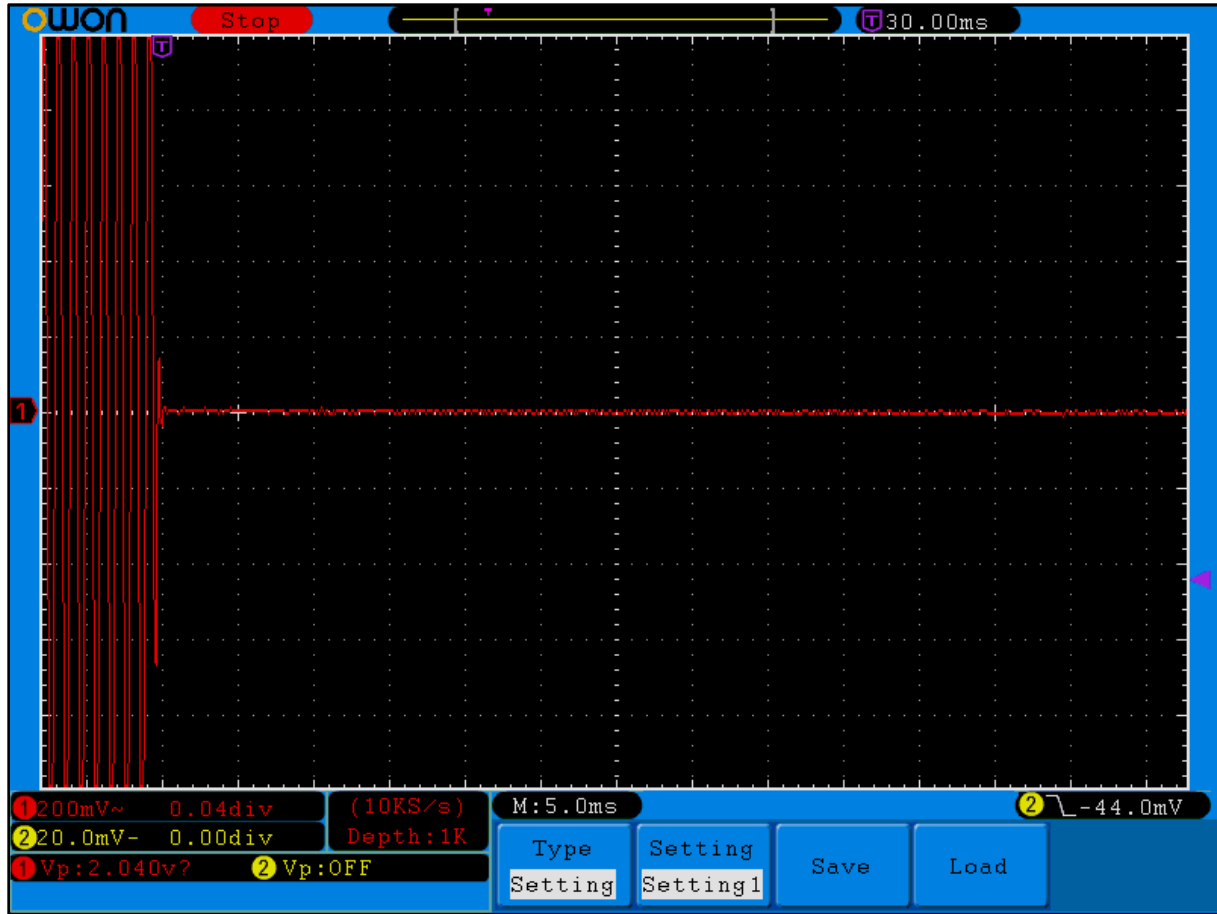


Plot 11-12: Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier OFF Time

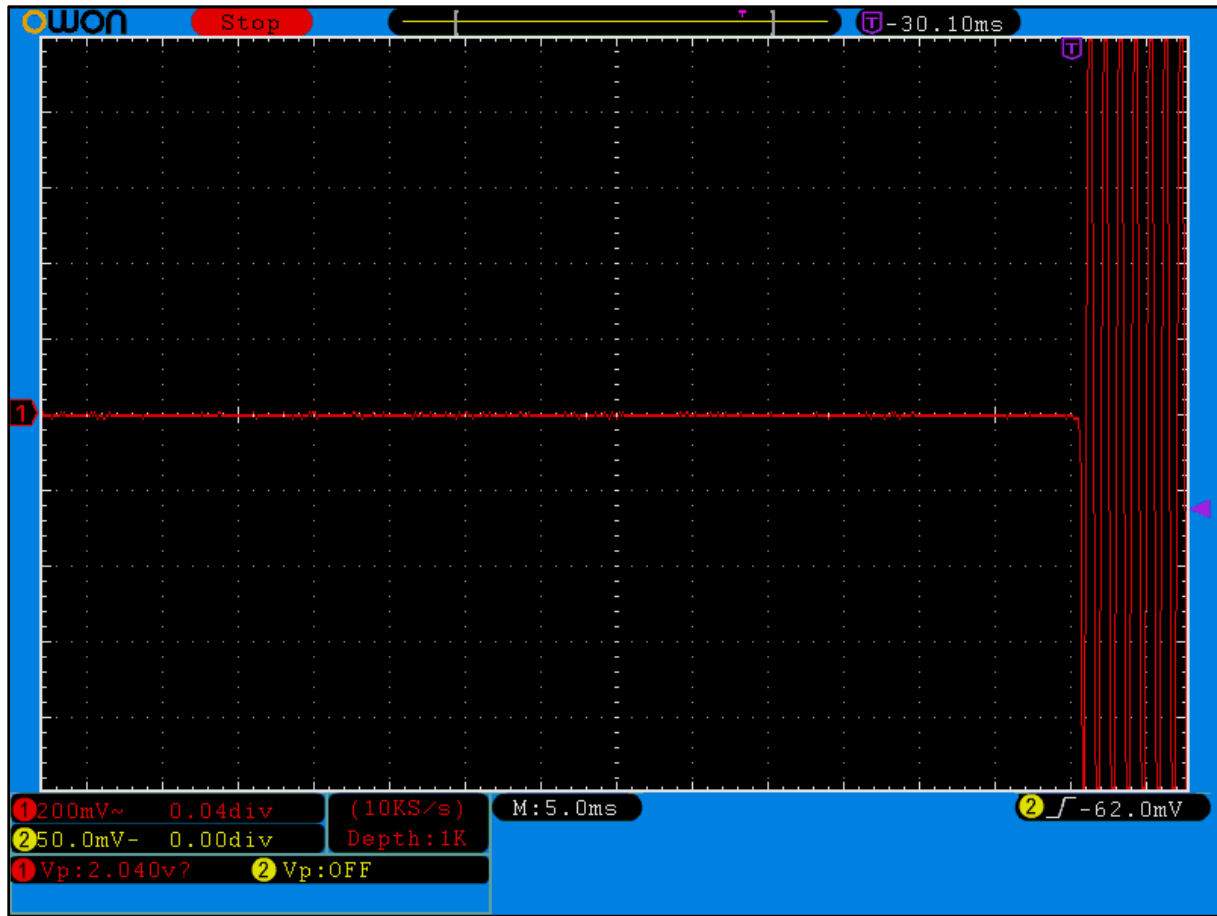


Plot 11-13: Transient Frequency Behavior – 429.9875 MHz; Wide Band; Carrier ON Time

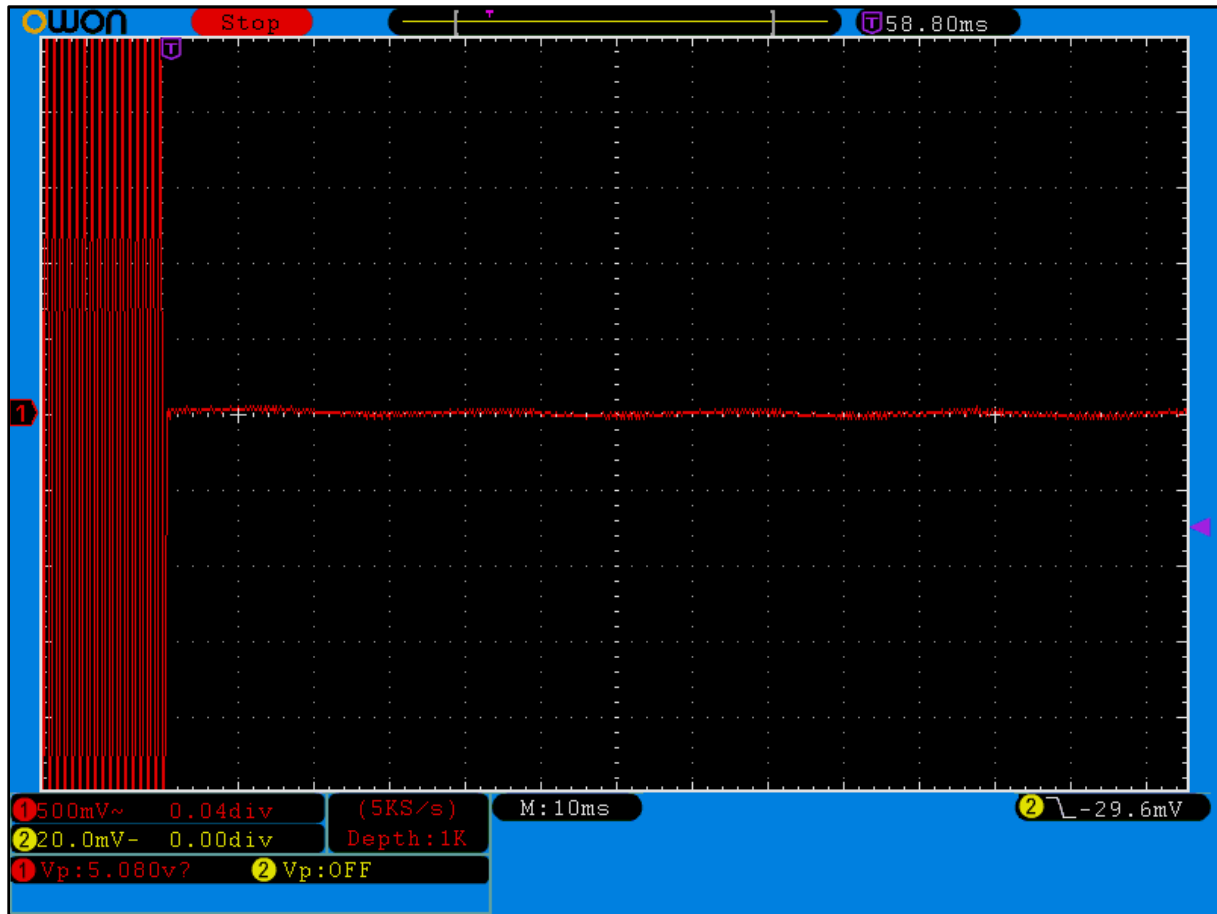


Plot 11-14: Transient Frequency Behavior – 429.9875 MHz; Wide Band; Carrier OFF Time

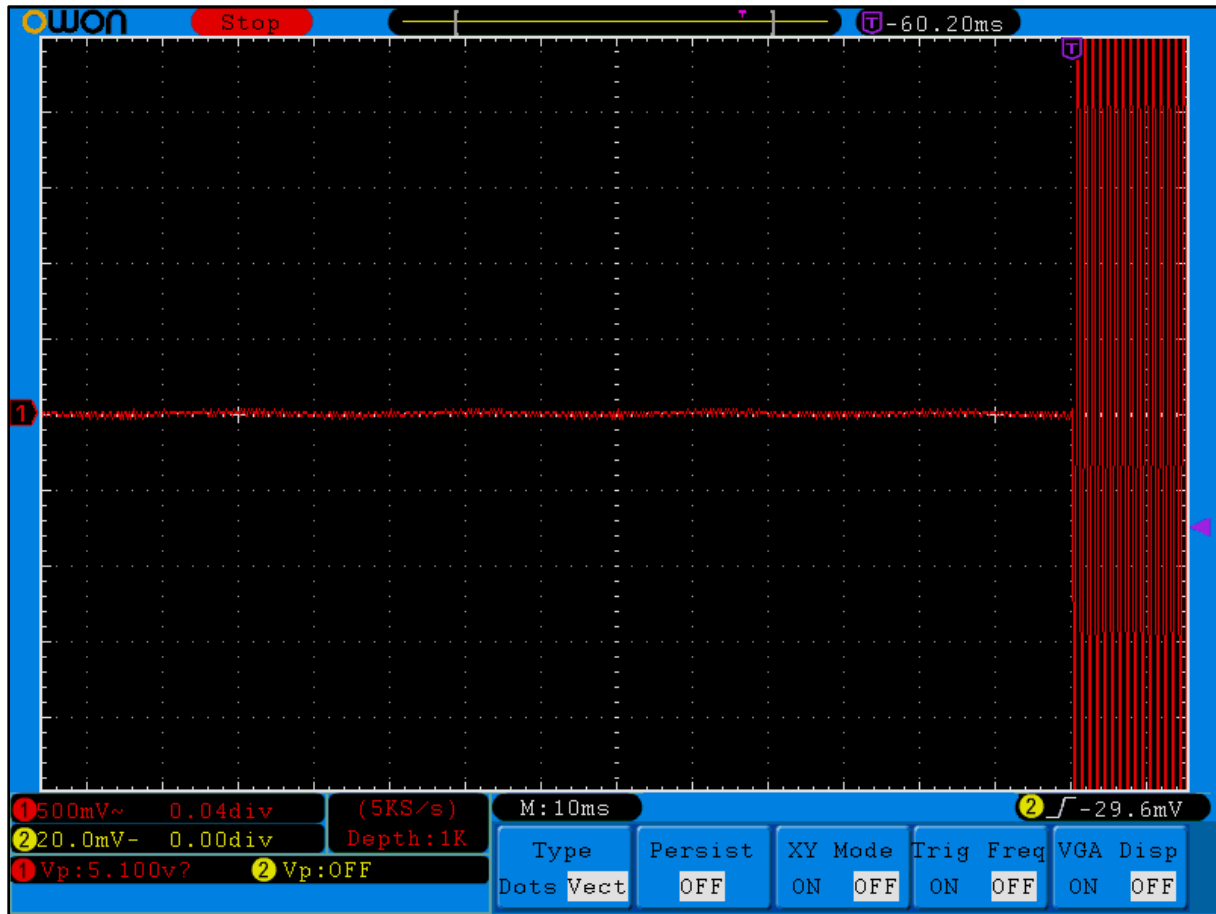


Plot 11-15: Transient Frequency Behavior – 469.9875 MHz; Wide Band; Carrier ON Time

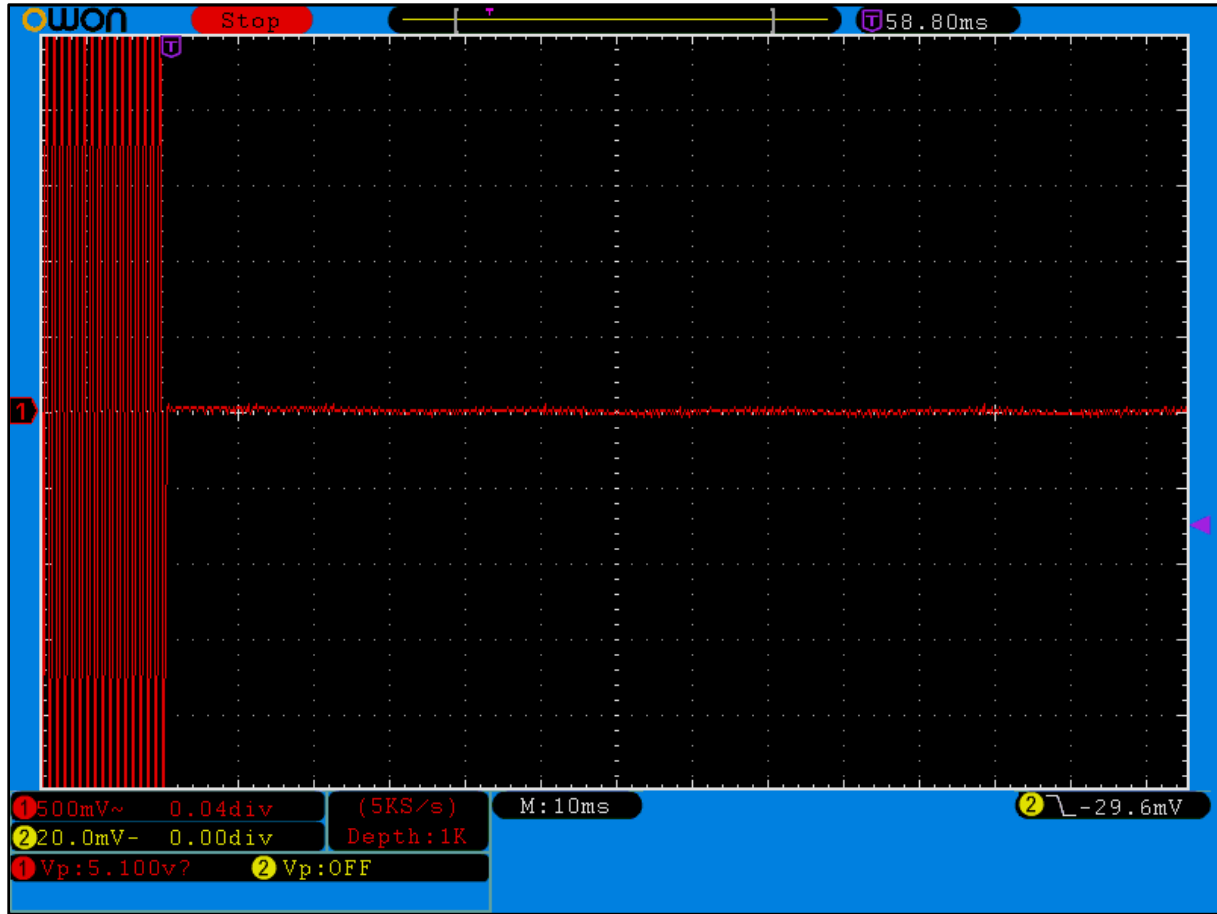


Plot 11-16: Transient Frequency Behavior – 469.9875 MHz; Wide Band; Carrier OFF Time

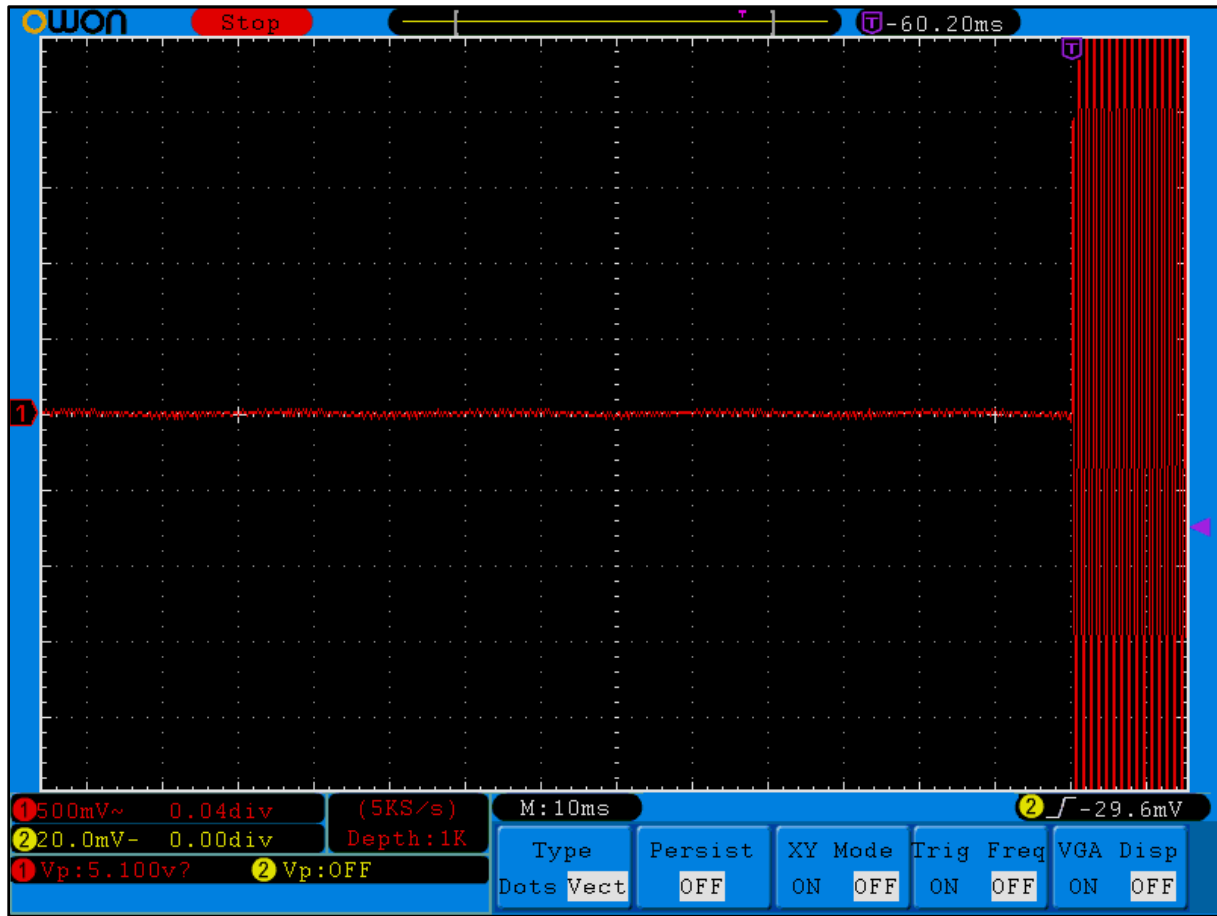


Plot 11-17: Transient Frequency Behavior – 469.9875 MHz; Narrow Band; Carrier ON Time

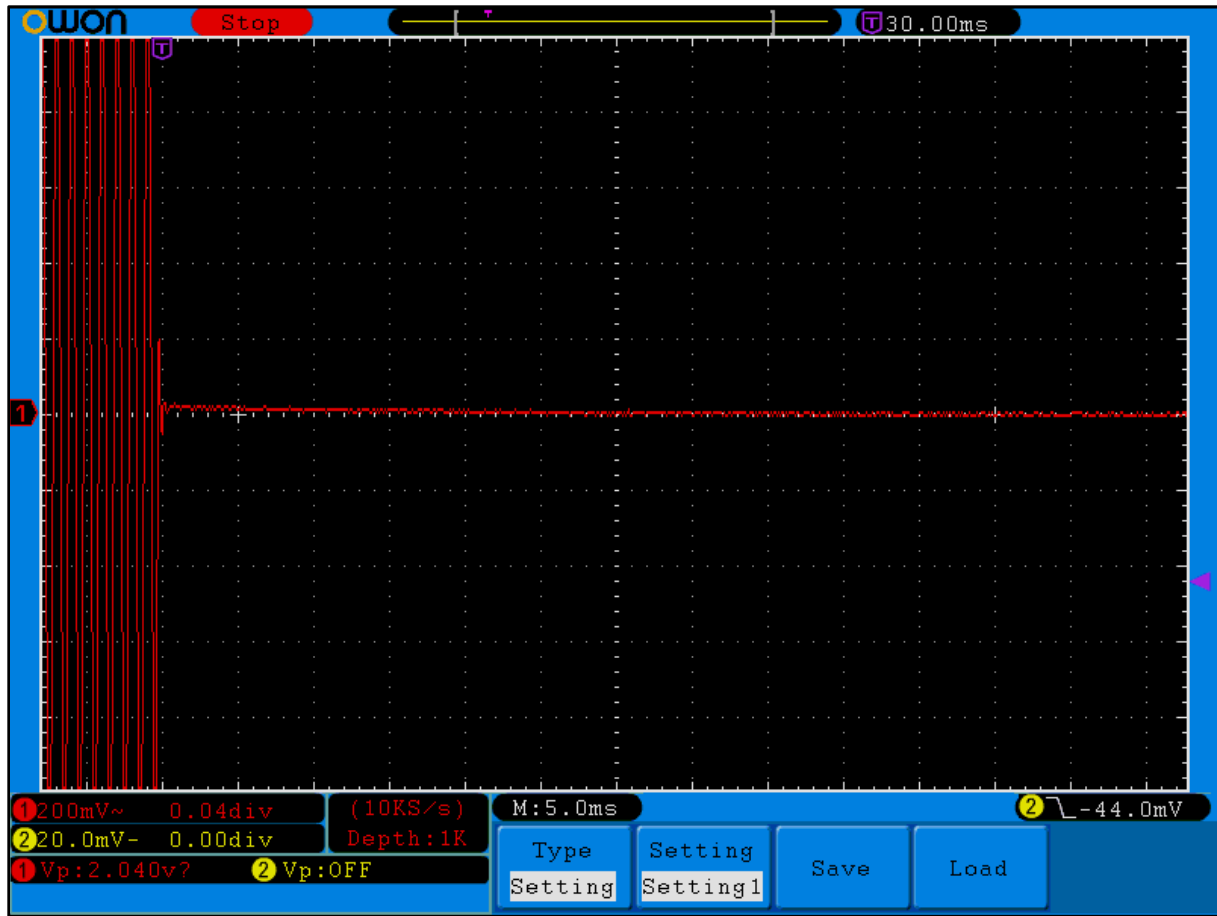


Plot 11-18: Transient Frequency Behavior – 469.9875 MHz; Narrow Band; Carrier OFF Time

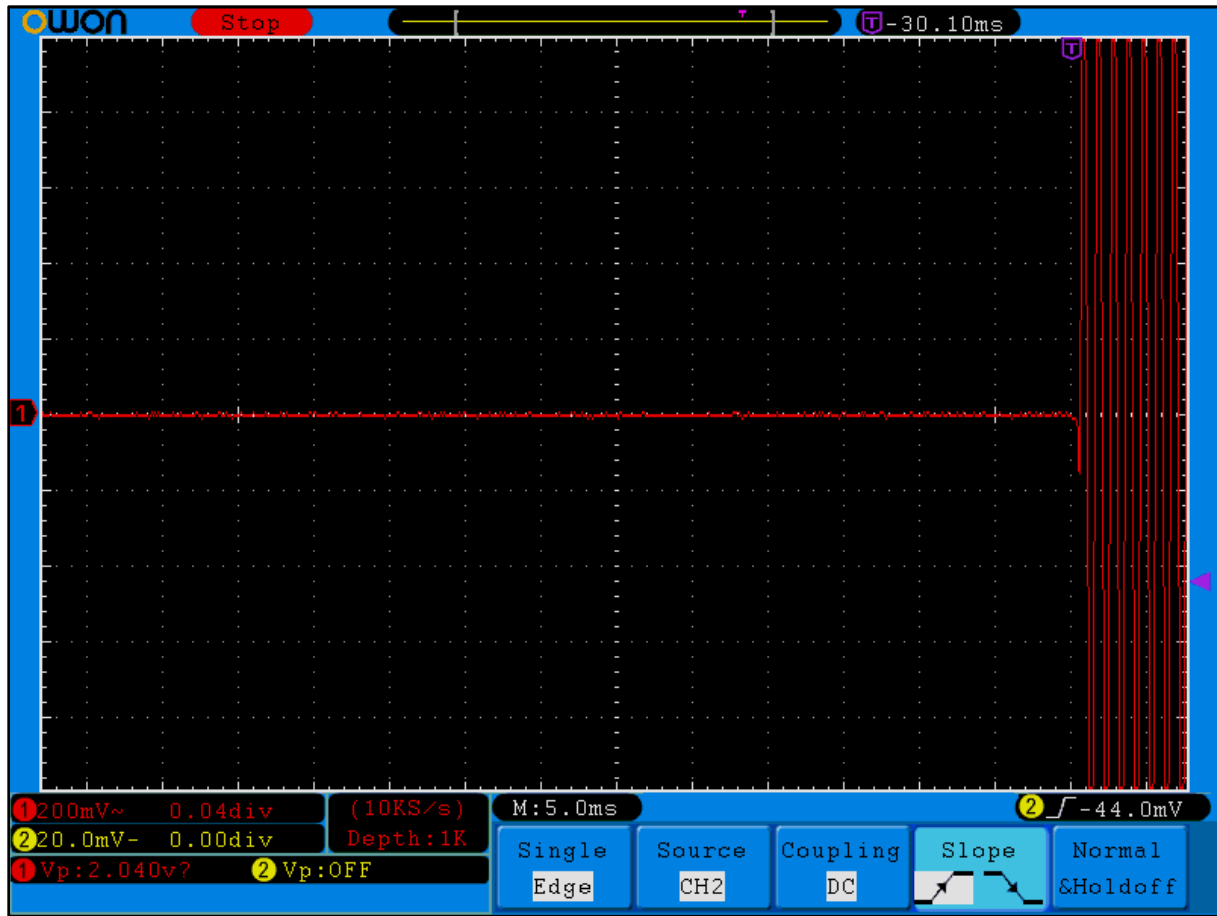


Plot 11-19: Transient Frequency Behavior – 511.9875 MHz; Wide Band; Carrier ON Time

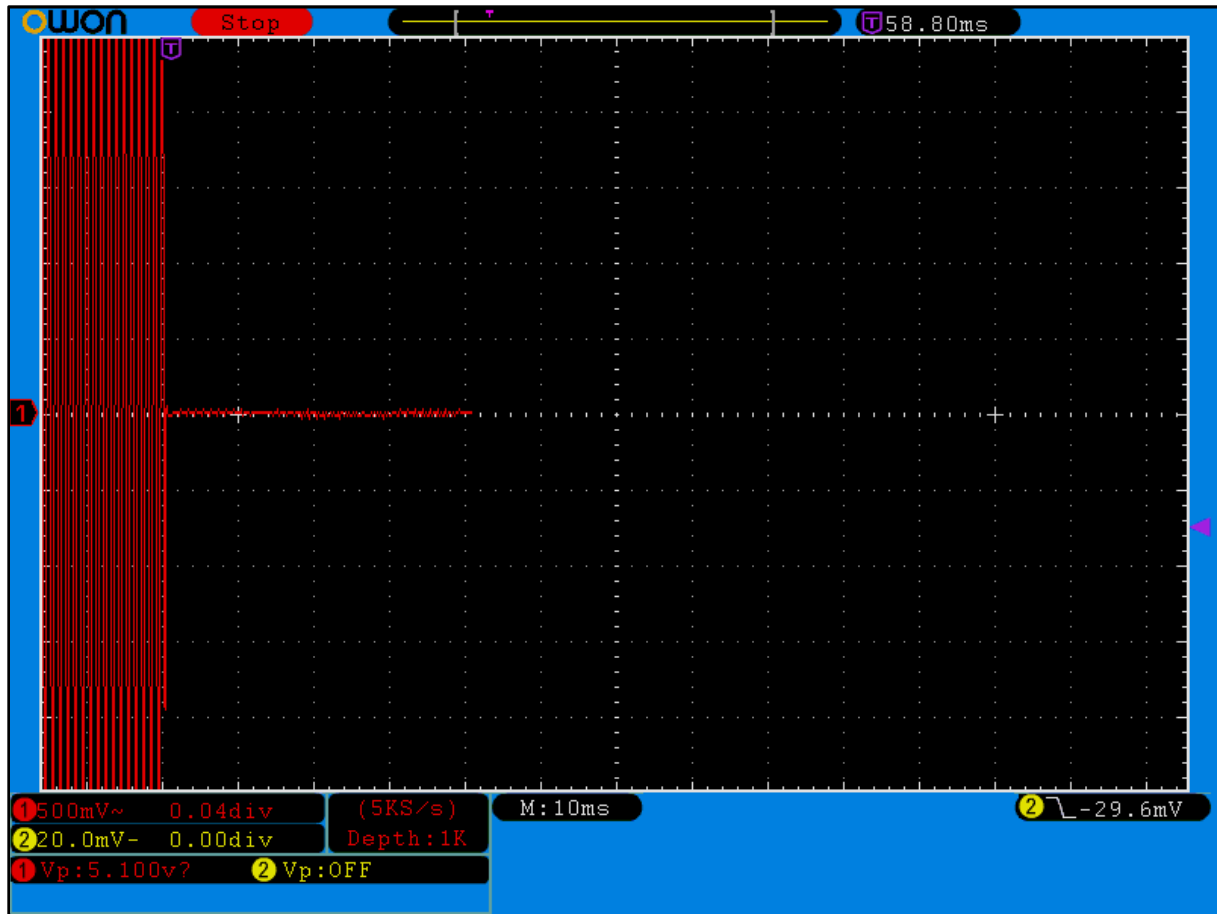


Plot 11-20: Transient Frequency Behavior – 511.9875 MHz; Wide Band; Carrier OFF Time

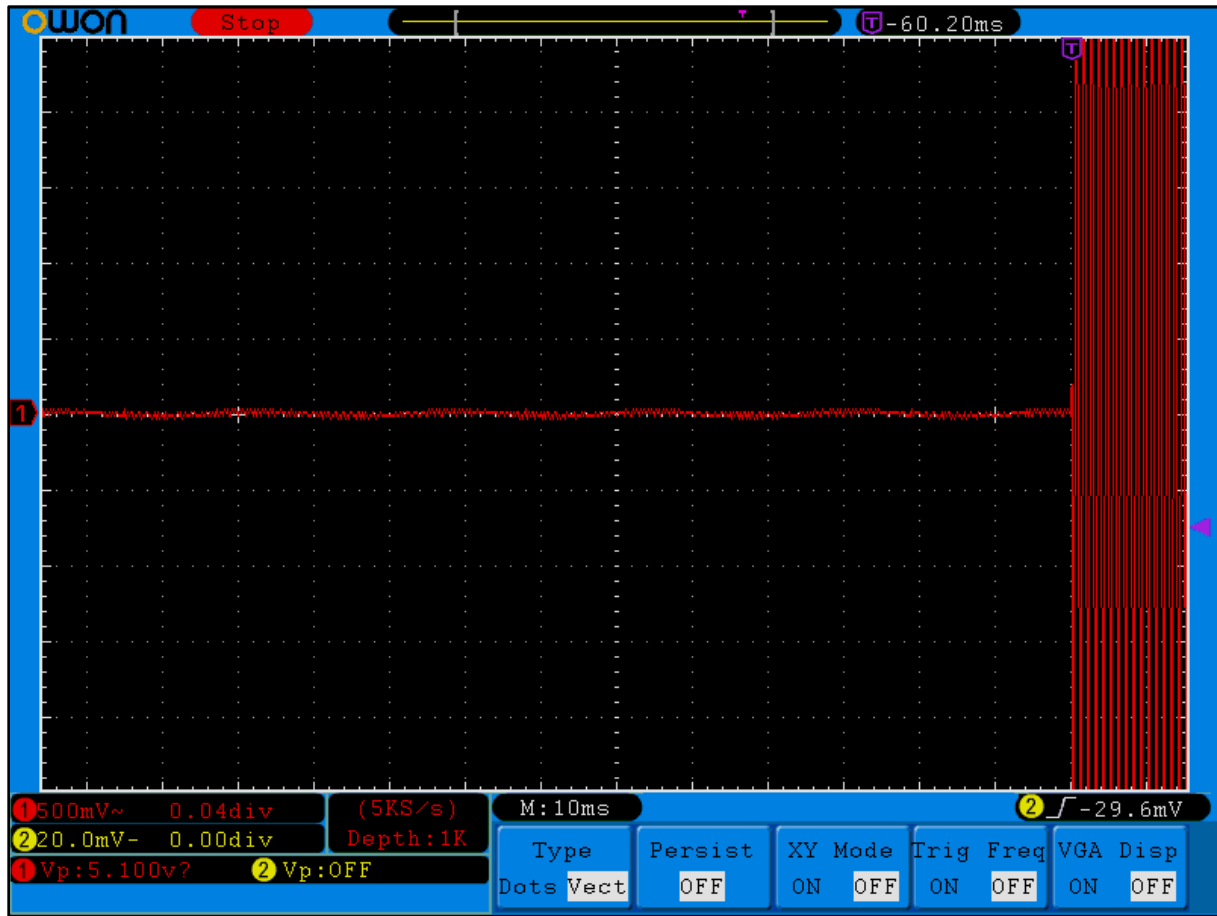

Plot 11-21: Transient Frequency Behavior – 511.9875 MHz; Narrow Band; Carrier ON Time

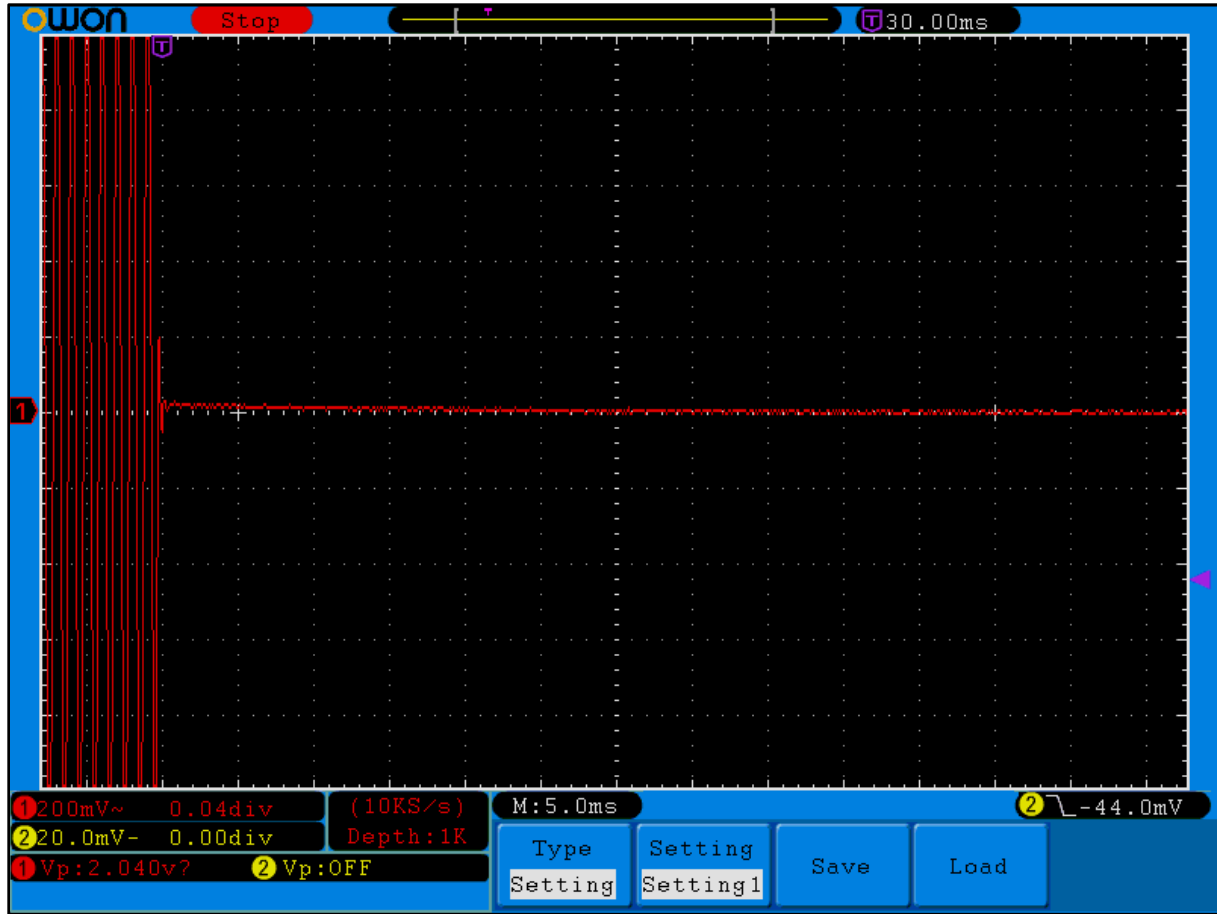

Plot 11-22: Transient Frequency Behavior – 511.9875 MHz; Narrow Band; Carrier OFF Time

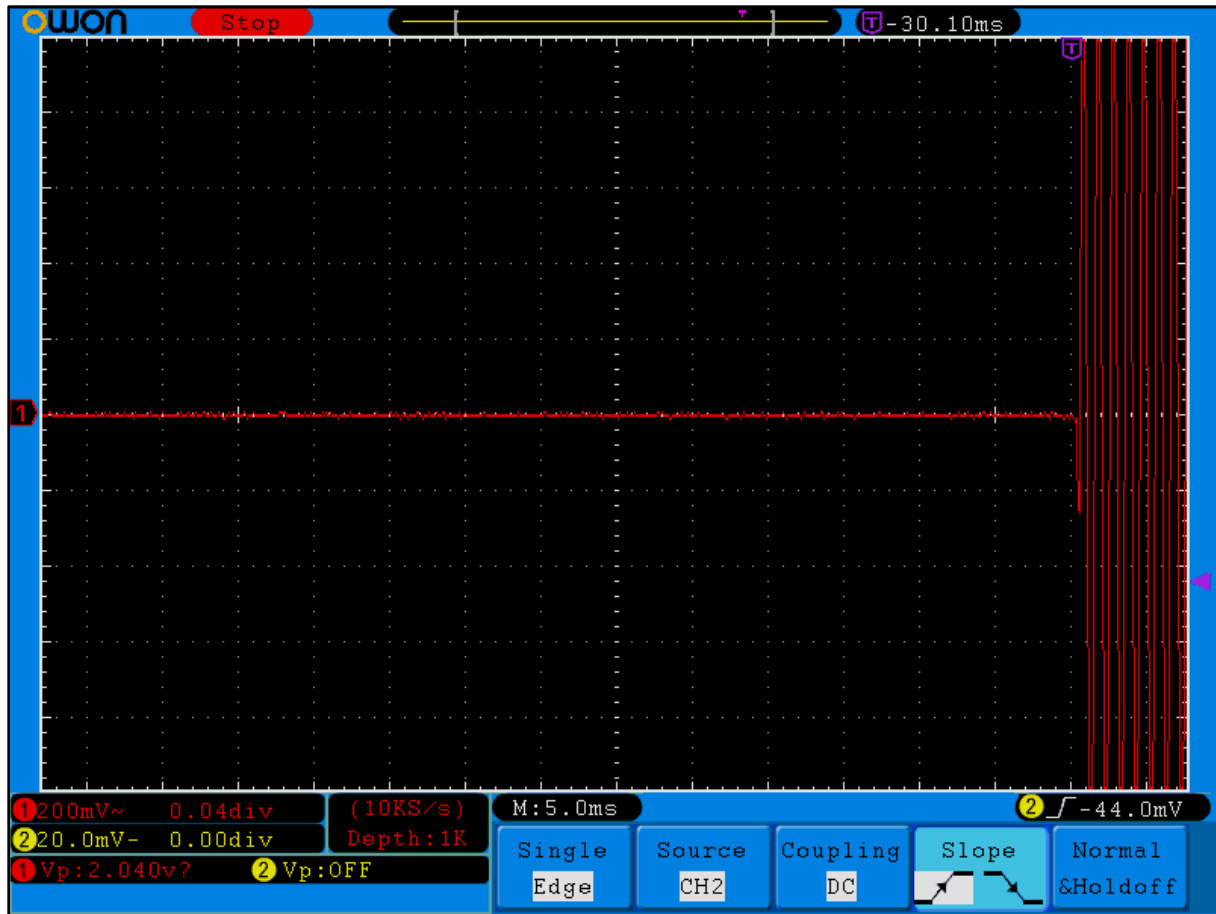

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: $\pm 0.5 \text{ Hz} / \pm 0.5 \text{ dB}$

Results: Pass

Table 11-1: Test Equipment Used For Testing Transient Frequency Behavior

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900917	Rhode & Schwarz	SMF 100A	Signal Generator	1167.0000.02	04/24/21
901118	Hewlett Packard	HP8901B	Modulation Analyzer (150 kHz–1300 MHz)	2406A00178	02/01/22
901651	OWON	SDS7102V	Oscilloscope	B020129	04/02/21

Test Personnel:

Daniel Baltzell
 Test Engineer

Signature

February 5, 2021
 Date of Tests

12 FCC 2.202: Necessary Bandwidth and Emission Bandwidth

Analog FM (Wideband)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2M + 2DK = 16.0$ kHz

Emission designator: 16K0F3E

2-level FSK 9600 Data/Digital Voice (Wideband)

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 5600

$B_n = [9600/\log_2(4) + 2(5600)(1)] = 16.000$ kHz

Emission designator: 16K0F1D, 16K0F1E

Analog FM (NPSPAC)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 4

Constant factor (K): 1 (assumed)

$B_n = 2xM + 2xDK = 14.0$ kHz

Emission designator: 14K0F3E

2-level FSK 9600 Data/Digital Voice (NPSPAC)

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 4600

$B_n = [9600/\log_2(4) + 2(4600)(1)] = 14.000$ kHz

Emission designator: 14K0F1D, 14K0F1E

Analog FM (Narrowband)

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2xM + 2xDK = 11.0$ kHz

Emission designator: 11K0F3E

2-level FSK 9600 Data/Digital Voice (Narrowband)

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 3450

$B_n = [9600/\log_2(4) + 2(3450)(1)] = 11.700$ kHz

Emission designator: 11K7F1D, 11K7F1E

2-level FSK 4800 Data/Digital Voice (XNarrowband)

Calculation:

Data rate in bps (R) = 4800

Peak deviation of carrier (D) = 1800

$B_n = [4800/\log_2(4) + 2 (2350) (1) = 7.100 \text{ kHz}$

Emission designator: 7K10F1D, 7K10F1E

C4FM Data/Voice

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = [9600/\log_2(4) + 2 (1800) (1) = 8.400 \text{ kHz}$

Emission designator: 8K40F1D, 8K40F1E

H-CPM (TDMA) Data/Voice

Calculation:

Data rate in bps (R) = 12000

Peak deviation of carrier (D) = 1050

$B_n = [12000/\log_2(4) + 2 (1050) (1) = 8.1 \text{ kHz}$

Emission designator: 8K10DXW

HVD-SMR

Calculation:

Data rate in bps (R) = 19200

Signaling states (S) = 4

$B_n = 2(19200)(.96)/\log_2(4) = 18.5 \text{ kHz}$

Emission designator: 18K5F1W

HVD-NPSPAC

Calculation:

Data rate in bps (R) = 19200

Signaling states (S) = 4

$B_n = 2(19200)(.67)/\log_2(4) = 12.9 \text{ kHz}$

Emission designator: 12K9F1W

13 Conclusion

The data in this measurement report shows that the Harris Corporation, Model XL-400P; FCC ID: OWDTR-0164-E, IC: 3636B-0164, complies with the applicable requirements of Parts 2, 22, 74, 80 and 90 of the FCC Rules and ISED RSS-119.