

SAR Test Report - New Certification

Applicant:



Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA, 24501
USA

| Maximum Reported 1g SAR | | | | |
|-------------------------|-----|-------|------|------|
| FCC | LMR | FACE: | 3.55 | W/kg |
| | | BODY: | 7.52 | |
| ISED | | FACE: | 3.67 | |
| | | BODY: | 7.85 | |
| Simultaneous: | | 7.85 | | |
| Occupational Limit: | | 8.00 | | |

FCC ID:

OWDTR-0164-E

Product Name / PMN

XL-400P

ISED Registration Number

3636B-0164

Product Model Number / HVIN

EXTREME

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:



Ben Hewson, President

Celltech Labs Inc.

21-364 Lougheed Rd.

Kelowna, BC, V1X 7R8

Canada



Test Lab Certificate: 2470.01



Industry
Canada

IC Registration 3874A-1



FCC Registration: 714830

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL..... 5

2.0 CLIENT AND DEVICE INFORMATION..... 6

3.0 SCOPE OF EVALUATION/DATA REUSE..... 7

4.0 NORMATIVE REFERENCES..... 8

5.0 STATEMENT OF COMPLIANCE..... 9

6.0 RF CONDUCTED POWER MEASUREMENT..... 10

7.0 NUMBER OF TEST CHANNELS (N_c)..... 11

8.0 ACCESSORIES EVALUATED..... 11

 TABLE 8.1 MANUFACTURER’S ACCESSORY LIST..... 11

9.0 SAR MEASUREMENT SUMMARY..... 13

 TABLE 9.1: MEASURED RESULTS LMR – BODY..... 13

 TABLE 9.1: MEASURED RESULTS LMR – BODY (CONT)..... 14

 TABLE 9.2: MEASURED RESULTS WLAN 2.4GHZ & 5GHZ BAND – BODY..... 14

 TABLE 9.3: MEASURED RESULTS LMR – FACE..... 15

 TABLE 9.3: MEASURED RESULTS LMR – FACE (CONT)..... 16

 TABLE 9.5: MEASURED RESULTS WLAN 2.4G & BT BAND – FACE..... 17

10.0 SCALING OF MAXIMUM MEASURE SAR..... 18

 TABLE 10.1 SAR SCALING – LMR..... 18

11.0 ANALYSIS OF SIMULTANEOUS TRANSMISSION..... 20

 TABLE 11.1 LIST OF POSSIBLE TRANSMITTERS..... 20

 TABLE 11.2 LIST OF POSSIBLE TRANSMITTERS COMBINATIONS..... 21

 TABLE 11.3 ANALYSIS OF SUM-OF-THE-RATIOS..... 22

12.0 SAR EXPOSURE LIMITS..... 24

 TABLE 12.1 EXPOSURE LIMITS..... 24

13.0 DETAILS OF SAR EVALUATION..... 25

 TABLE 13.1 DAY LOG..... 25

 TABLE 13.2 DUT POSITIONING..... 26

 TABLE 13.3 GENERAL PROCEDURES AND REPORT..... 26

 TABLE 13.4 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK..... 27

 TABLE 13.5 SCAN RESOLUTION 100MHZ TO 2GHZ..... 27

 TABLE 13.6 SCAN RESOLUTION 2GHZ TO 3GHZ..... 28

 TABLE 13.7 SCAN RESOLUTION 5GHZ TO 6GHZ..... 28

14.0 MEASUREMENT UNCERTAINTIES..... 29

 TABLE 14.1 MEASUREMENT UNCERTAINTY..... 29

| | |
|--|-----------|
| TABLE 14.2 CALCULATION OF DEGREES OF FREEDOM..... | 30 |
| 15.0 FLUID DIELECTRIC PARAMETERS | 31 |
| TABLE 15.1 FLUID DIELECTRIC PARAMETERS 835MHZ HEAD TSL, 8 SEPTEMBER 2020..... | 31 |
| TABLE 15.2 FLUID DIELECTRIC ANALYSIS 835MHZ HEAD TSL, 8 SEPTEMBER 2020 | 32 |
| TABLE 15.3 FLUID DIELECTRIC PARAMETERS 150MHZ HEAD TSL, 14 SEPTEMBER 2020..... | 33 |
| TABLE 15.4 FLUID DIELECTRIC ANALYSIS 150MHZ HEAD TSL, 14 SEPTEMBER 2020 | 34 |
| TABLE 15.5 FLUID DIELECTRIC PARAMETERS 450MHZ HEAD TSL, 17 SEPTEMBER 2020..... | 35 |
| TABLE 15.6 FLUID DIELECTRIC ANALYSIS 150MHZ HEAD TSL, 17 SEPTEMBER 2020 | 36 |
| TABLE 15.7 FLUID DIELECTRIC PARAMETERS 150MHZ HEAD TSL, 4 FEBRUARY 2021..... | 37 |
| TABLE 15.8 FLUID DIELECTRIC ANALYSIS 150MHZ HEAD TSL, 4 FEBRUARY 2021..... | 38 |
| TABLE 15.9 FLUID DIELECTRIC PARAMETERS 150MHZ HEAD TSL, 8 FEBRUARY 2021 | 39 |
| TABLE 15.10 FLUID DIELECTRIC ANALYSIS 150MHZ HEAD TSL, 8 FEBRUARY 2021..... | 40 |
| TABLE 15.11 FLUID DIELECTRIC PARAMETERS 450MHZ HEAD TSL, 11 FEBRUARY 2021..... | 41 |
| TABLE 15.12 FLUID DIELECTRIC ANALYSIS 450MHZ HEAD TSL, 11 FEBRUARY 2021..... | 42 |
| TABLE 15.13 FLUID DIELECTRIC PARAMETERS 835MHZ HEAD TSL, 2 MARCH 2021..... | 43 |
| TABLE 15.14 FLUID DIELECTRIC ANALYSIS 835MHZ HEAD TSL, 11 FEBRUARY 2021..... | 44 |
| TABLE 15.15 FLUID DIELECTRIC PARAMETERS 2450MHZ HEAD TSL, 3 MARCH 2021..... | 45 |
| TABLE 15.16 FLUID DIELECTRIC ANALYSIS 2450MHZ HEAD TSL, 3 MARCH 2021..... | 46 |
| TABLE 15.17 FLUID DIELECTRIC PARAMETERS 5250MHZ HEAD TSL, 6 MARCH 2021..... | 47 |
| TABLE 15.18 FLUID DIELECTRIC ANALYSIS 5250MHZ HEAD TSL, 6 MARCH 2021..... | 48 |
| TABLE 15.19 FLUID DIELECTRIC PARAMETERS 5750MHZ HEAD TSL, 6 MARCH 2021..... | 49 |
| TABLE 15.20 FLUID DIELECTRIC ANALYSIS 5750MHZ HEAD TSL, 6 MARCH 2021..... | 50 |
| 16.0 SYSTEM VERIFICATION TEST RESULTS | 51 |
| TABLE 16.1 SYSTEM VERIFICATION RESULTS 835MHZ HEAD TSL, 8 SEPTEMBER 2020..... | 51 |
| TABLE 16.2 SYSTEM VERIFICATION RESULTS 150MHZ HEAD TSL, 14 SEPTEMBER 2020..... | 52 |
| TABLE 16.3 SYSTEM VERIFICATION RESULTS 450MHZ HEAD TSL, 17 SEPTEMBER 2020..... | 53 |
| TABLE 16.4 SYSTEM VERIFICATION RESULTS 150MHZ HEAD TSL, 4 FEBRUARY 2021..... | 54 |
| TABLE 16.5 SYSTEM VERIFICATION RESULTS 150MHZ HEAD TSL, 8 FEBRUARY 2021..... | 55 |
| TABLE 16.6 SYSTEM VERIFICATION RESULTS 450MHZ HEAD TSL, 11 FEBRUARY 2021..... | 56 |
| TABLE 16.7 SYSTEM VERIFICATION RESULTS 835MHZ HEAD TSL, 2 MARCH 2021..... | 57 |
| TABLE 16.8 SYSTEM VERIFICATION RESULTS 2450MHZ HEAD TSL, 3 MARCH 2021..... | 58 |
| TABLE 16.9 SYSTEM VERIFICATION RESULTS 5250MHZ HEAD TSL, 6 MARCH 2021..... | 59 |
| TABLE 16.10 SYSTEM VERIFICATION RESULTS 5750MHZ HEAD TSL, 6 MARCH 2021..... | 60 |
| 17.0 MEASUREMENT SYSTEM SPECIFICATIONS | 61 |
| TABLE 17.1 MEASUREMENT SYSTEM | 61 |
| TABLE 17.2 MEASUREMENT SYSTEM SPECIFICATIONS..... | 62 |
| 18.0 TEST EQUIPMENT LIST | 64 |
| TABLE 18.1 EQUIPMENT LIST AND CALIBRATION | 64 |

| | |
|--|----|
| 19.0 SYSTEM VALIDATION SUMMARY | 65 |
| 20.0 FLUID COMPOSITION | 66 |
| TABLE 20.1 FLUID COMPOSITION 150MHZ HEAD TSL | 66 |
| TABLE 20.2 FLUID COMPOSITION 450MHZ HEAD TSL | 66 |
| TABLE 20.3 FLUID COMPOSITION 835MHZ HEAD TSL | 66 |
| TABLE 20.4 FLUID COMPOSITION 2450MHZ HEAD TSL | 67 |
| TABLE 20.5 FLUID COMPOSITION 5250MHZ HEAD TSL AND 5750MHZ HEAD TSL | 67 |
| APPENDIX A – SYSTEM VERIFICATION PLOTS..... | 68 |
| PLOT A.1 SYSTEM VERIFICATION PLOT, 835MHZ, 8 SEPTEMBER 2020..... | 68 |
| PLOT A.2 SYSTEM VERIFICATION PLOT, 150MHZ, 14 SEPTEMBER 2020..... | 69 |
| PLOT A.3 SYSTEM VERIFICATION PLOT, 450MHZ, 17 SEPTEMBER 2020..... | 70 |
| PLOT A.4 SYSTEM VERIFICATION PLOT, 150MHZ, 4 FEBRUARY 2021 | 71 |
| PLOT A.5 SYSTEM VERIFICATION PLOT, 150MHZ, 8 FEBRUARY 2021 | 72 |
| PLOT A.6 SYSTEM VERIFICATION PLOT, 450MHZ, 11 FEBRUARY 2021 | 73 |
| PLOT A.7 SYSTEM VERIFICATION PLOT, 835MHZ, 2 MARCH 2021 | 74 |
| PLOT A.7 SYSTEM VERIFICATION PLOT, 2450MHZ, 3 MARCH 2021 | 75 |
| PLOT A.8 SYSTEM VERIFICATION PLOT, 5250MHZ, 6 MARCH 2021 | 76 |
| PLOT A.9 SYSTEM VERIFICATION PLOT, 5750MHZ, 6 MARCH 2021 | 77 |
| APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR..... | 78 |
| PLOT B1-3 BASELINE | 78 |
| PLOT F8-15..... | 80 |
| APPENDIX C - SETUP PHOTOS..... | 82 |
| FIGURE C.2 - BODY CONFIGURATION, KRE101506/1 ANTENNA..... | 82 |
| FIGURE C.2 - FACE CONFIGURATION..... | 83 |
| APPENDIX D – DUT PHOTOS..... | 84 |
| FIGURE D.1 – XL-400P – FRONT/BACK | 84 |
| FIGURE D.2 – XL-400P – BACK – BATTERY REMOVED | 85 |
| FIGURE D.3 – XL-400P – TOP/BOTTOM..... | 86 |
| FIGURE D.5 – ANTENNA | 87 |
| FIGURE D.6 – BATTERY..... | 88 |
| FIGURE D.7 – SPEAKER/MIC..... | 89 |
| FIGURE D.8 – BELT CLIP | 90 |
| APPENDIX E – PROBE CALIBRATION..... | 91 |
| APPENDIX F – DIPOLE CALIBRATION | 92 |
| APPENDIX G - PHANTOM..... | 93 |

1.0 DOCUMENT CONTROL

| Revision History | | | | | |
|----------------------------|---|--------------------------------|------------|-------------------------------|-------------------------|
| Samples Tested By: | | Jasmeet Gill, Trevor Whillock | | Date(s) of Evaluation: | 8 Sep 2020 - 7 Mar 2021 |
| Report Prepared By: | | Jasmeet Gill, Art Voss, P.Eng. | | Report Reviewed By: | Art Voss |
| Report Revision | Description of Revision | Revised Section | Revised By | Revision Date | |
| 0.1 | Draft Release | n/a | Art Voss | 5 March 2021 | |
| 1.0 | Initial Release | n/a | Art Voss | 8 March 2021 | |
| 2.0 | Revised Rated Power | 2.0, 6.0 | Art Voss | 25 March 2021 | |
| | Revised Scaling Table 10.1 | 10.0 | | | |
| | Revised <u>reported</u> SAR | 10.0 | | | |
| | | Cover | | | |
| 3.0 | Removed Reference to 2477MHz WiFi Channel | 6.0 | Art Voss | 26 March 2021 | |

2.0 CLIENT AND DEVICE INFORMATION

| Client Information | |
|---|--|
| Applicant Name | Harris Corporation |
| Applicant Address | 221 Jefferson Ridge Parkway |
| | Lynchburg, VA, 24501 |
| | USA |
| DUT Information | |
| Device Identifier(s): | FCC ID: OWDTR-0164-E |
| | ISED: 3636B-0164 |
| Device Marketing Name / PMN: | XL-400P |
| Device Model(s) / HVIN: | EXTREME |
| Test Sample Serial No.: | A40330000113 |
| Equipment Class (FCC): | Licensed Non-Broadcast Transmitter Held to Face (TNF) FCC Part 90 - LMRS |
| | Digital Transmission System (DTS) FCC Part 15C - WiFi |
| | Spread Spectrum Transmitter (DSS) FCC Part 15C - BT |
| | Unlicensed National Information Infrastructure (NII) FCC Part 15E - WiFi |
| Equipment Class (ISED): | Land Mobile Radio Transmitter/Receiver (27.41-960MHz) RSS-119 |
| | WLAN RSS-247 - WiFi 2412 - 2462MHz |
| | BlueTooth Device RSS-247 - BT |
| | WLAN RSS-247 - WiFi 5180 - 5240MHz |
| | Spread Spectrum/Digital Device (5725 - 5850MHz) RSS-247 |
| Transmit Frequency Range (FCC): | VHF Band: 136 - 174MHz |
| | UHF Band: 378 - 522MHz |
| | 700 Band: 763 - 776MHz, 793 - 806MHz |
| | 800 Band: 806 - 825MHz, 851 - 870MHz |
| | BT: 2402-2480MHz |
| | WiFi 2.4G: 2412-2462MHz |
| | WiFi 5G: 5180-5240MHz, 5745-5825MHz |
| Transmit Frequency Range (ISED): | VHF Band: 138 - 144MHz, 148 - 149.9MHz, 150.05 - 174MHz |
| | UHF Band: 406.1 - 430MHz, 450 - 470MHz |
| | 700 Band: 768 - 776MHz, 798-806MHz |
| | 800 Band: 806 - 824MHz, 851 - 870MHz |
| | BT: 2402-2480MHz |
| | WiFi 2.4G: 2412-2462MHz |
| | WiFi 5G: 5180-5240MHz, 5745-5825MHz |
| Number of Channels: | Programmable |
| Transmitter Rated Power (Max): Including Tune-Up Tolerance | VHF Band: 7.2W (38.6dBm) |
| | UHF Band: 6W (37.8dBm) |
| | 700 Band: 3W (34.8dBm) |
| | 800 Band: 3.6W (35.6dBm) |
| | BT: 0.0049W (6.9dBm) |
| | WLAN 2.4G: 0.234W (23.85dBm) |
| | WLAN 5G: 5180-5240MHz: 0.0499W (16.98dBm) WLAN 5G: 5745-5825MHz: 0.0698W (18.43dBm) |
| Duty Cycle: | BT/BLE, WLAN: 100%, LMR: 50% PTT Duty Cycle |
| DUT Power Source: | 7.2VDC Li-Ion Rechargeable Battery Pack |
| Deviation(s) from standard/procedure: | None |
| Modification of DUT: | None |

3.0 SCOPE OF EVALUATION/DATA REUSE

This Certification Report was prepared on behalf of:

Harris Corporation

(the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in this report.

The XL-400P, FCC ID: **OWDTR-0164-E**, IC ID: **3636B-0164**, is a Tri-band(VHF,UHF,7/800) Push-To-Talk (PTT), Licensed Mobile Radio Service (LMRS) transceiver intended for Occupational Use. This "host" employs WiFi and Bluetooth transceivers. The XL-400P is similar to the XL-200P, FCC ID: OWDTR-0133-E, IC ID: 3636B-0133, which has been previously evaluated for SAR and the results of those previous evaluations were taken into consideration when developing the XL-400P SAR Test Plan. The XL-400P was previously evaluated during an initial Pre-Compliance evaluation and results of that investigation are used in this report. In addition, the XL-400P uses some of the same accessories as the XL-200P and these accessories and additional accessories were also taken into consideration and/or evaluated.

Application:

This is an application for a new device certification.

Scope:

The scope of this evaluation is to evaluate the SAR for intended use applications. It will include an extensive evaluation of the LMR transmitter and all simultaneous transmission conditions that can occur with this host device. The analysis of the Standalone and Simultaneous Transmission SAR is found in Section 11.0 of this report.

The Test Plan developed for this evaluation is based on the required test channels and configurations which produced the highest worst case SAR and where applicable, SAR test reduction and/or SAR test exclusion may be utilized. The DUT was evaluated for SAR at the maximum tune up tolerance and conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEEE 1528, IEC 62209-2, FCC KDB 865646, 447498, and RSS 102.

4.0 NORMATIVE REFERENCES



| Normative References* | |
|---|--|
| ANSI / ISO 17025:2017 | General Requirements for competence of testing and calibration laboratories |
| FCC CFR Title 47 Part 2 Title 47: Part 2.1093: | Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices |
| Health Canada Safety Code 6 (2015) | Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz |
| Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5: | Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) |
| IEEE International Committee on Electromagnetic Safety IEEE 1528-2013: | IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques |
| IEC International Standard IEC 62209-2 2019 | Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2 |
| FCC KDB KDB 248227 D01v02r02 | SAR Guidance for IEEE 802.11 (WiFi) Transmitters |
| FCC KDB KDB 447498 D01v06 | Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies |
| FCC KDB KDB 643646 D01v01r03 | SAR Test Reduction Considerations for Occupational PTT Radios |
| FCC KDB KDB 690783 D01v01r03 | SAR Listings on Equipment Authorization Grants |
| FCC KDB KDB 865664 D01v01r04 | SAR Measurement Requirements for 100MHz to 6GHz |
| * When the issue number or issue date is omitted, the latest version is assumed. | |

5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

| | | |
|--|---|--|
| Applicant: Harris Corporation | Model Name / PMN: XL-400P | |
| Standard(s) Applied: FCC 47 CFR §2.1093 Health Canada's Safety Code 6 | Measurement Procedure(s): FCC KDB 865664, FCC KDB 447498, FCC KDB 643646, FCC KDB 941225 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2 | |
| Reason For Issue: <input checked="" type="checkbox"/> New Certification <input type="checkbox"/> Class I Permissive Change <input type="checkbox"/> Class II Permissive Change | Use Group: <input type="checkbox"/> General Population / Uncontrolled <input checked="" type="checkbox"/> Occupational / Controlled | Limits Applied: <input type="checkbox"/> 1.6W/kg - 1g Volume <input checked="" type="checkbox"/> 8.0W/kg - 1g Volume <input type="checkbox"/> 4.0W/kg - 10g Volume |
| Reason for Change: Original Filing | Date(s) Evaluated: | |

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

| | | |
|--|--|---|
| I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025. |  <hr/> Art Voss, P.Eng. Technical Manager Celltech Labs Inc. |  |
| | <hr/> 5 March 2021 Date | |

6.0 RF CONDUCTED POWER MEASUREMENT

| Conducted Power Measurements | | | | | | |
|-------------------------------------|----------------------------|-------------------------------------|----------------------------------|--------------------------------|------------------------|---------------------------------------|
| Channel | Frequency (MHz) | Measured Power (dBm) | Rated Power (dBm) | Rated Power (W) | Delta (dBm) | SAR Test Channel (Y/N) |
| LMR | | | | | | |
| | 136.0 | 37.77 | 38.60 | 7.20 | 0.83 | Y |
| | 143.0 | 37.69 | 38.60 | 7.20 | 0.91 | Y |
| | 150.0 | 37.10 | 38.60 | 7.20 | 1.50 | Y |
| | 158.0 | 37.77 | 38.60 | 7.20 | 0.83 | Y |
| | 168.0 | 37.78 | 38.60 | 7.20 | 0.82 | Y |
| | 174.0 | 37.78 | 38.60 | 7.20 | 0.82 | Y |
| | 378.0 | 36.81 | 37.80 | 6.00 | 0.99 | Y |
| | 406.0 | 36.81 | 37.80 | 6.00 | 0.99 | Y |
| | 418.0 | 36.74 | 37.80 | 6.00 | 1.06 | Y |
| | 430.0 | 36.89 | 37.80 | 6.00 | 0.91 | Y |
| | 450.0 | 36.95 | 37.80 | 6.00 | 0.85 | Y |
| | 454.0 | 36.84 | 37.80 | 6.00 | 0.96 | Y |
| | 456.0 | 36.80 | 37.80 | 6.00 | 1.00 | Y |
| | 522.0 | 36.69 | 37.80 | 6.00 | 1.11 | |
| | 763.0 | 34.23 | 34.80 | 3.00 | 0.57 | Y |
| | 768.0 | 34.21 | 34.80 | 3.00 | 0.59 | Y |
| | 772.0 | 34.14 | 34.80 | 3.00 | 0.66 | Y |
| | 776.0 | 34.11 | 34.80 | 3.00 | 0.69 | Y |
| | 798.0 | 34.12 | 34.80 | 3.00 | 0.68 | Y |
| | 806.0 | 33.83 | 35.60 | 3.60 | 1.77 | Y |
| | 816.0 | 33.64 | 35.60 | 3.60 | 1.96 | Y |
| | 851.0 | 33.56 | 35.60 | 3.60 | 2.04 | Y |
| | 861.0 | 33.62 | 35.60 | 3.60 | 1.98 | Y |
| WiFi | | | | | | |
| 1 | 2412 | 23.70 | 23.85 | 0.234 | 0.15 | Y |
| 6 | 2437 | 23.65 | 23.85 | 0.234 | 0.2 | Y |
| 11 | 2462 | 23.72 | 23.85 | 0.234 | 0.13 | Y |
| 36 | 5180 | 16.52 | 16.98 | 0.0499 | 0.46 | Y |
| 44 | 5220 | 16.21 | 16.98 | 0.0499 | 0.77 | Y |
| 48 | 5240 | 16.48 | 16.98 | 0.0499 | 0.5 | Y |
| 132 | 5660 | 18.31 | 18.43 | 0.0698 | 0.12 | Y |
| 157 | 5785 | 18.05 | 18.43 | 0.0698 | 0.38 | Y |
| 165 | 5825 | 18.25 | 18.43 | 0.0698 | 0.18 | Y |

7.0 NUMBER OF TEST CHANNELS (N_c)

The number of test channels and test configurations were determined in accordance with FCC KDB 447498, FCC KDB 643646 and FCC KDB 248227. When applicable, SAR Test Reduction was exercised in accordance with FCC KDB 643646 and FCC KDB 248227.

8.0 ACCESSORIES EVALUATED

Table 8.1 Manufacturer's Accessory List

| Manufacturer's Accessory List | | | | | | |
|-------------------------------|----------------------------|-----------------------------------|--------------------------|------------------------------|------------------------------|---------------------------|
| Test Report ID Number | Manufacturer's Part Number | Description | Change ID ⁽¹⁾ | Type II Group ⁽³⁾ | SAR ⁽⁴⁾ Evaluated | SAR ⁽⁵⁾ Tested |
| Antenna | | | | | | |
| T13 | 14100-4300-01 | Helical, Flex, Xtrm, 136 - 870MHz | 40 | n/a | Y | Y |

| Manufacturer's Accessory List | | | | | | |
|-------------------------------|----------------------------|----------------------|--------------------------|------------------------------|------------------------------|---------------------------|
| Test Report ID Number | Manufacturer's Part Number | Description | Change ID ⁽¹⁾ | Type II Group ⁽³⁾ | SAR ⁽⁴⁾ Evaluated | SAR ⁽⁵⁾ Tested |
| Battery | | | | | | |
| P9 | 14100-4000-01 | Battery, Li-Ion, FGD | 1 | n/a | Y | Y |

| Manufacturer's Accessory List | | | | | | |
|-------------------------------|----------------------------|---|--------------------------|------------------------------|------------------------------|---------------------------|
| Test Report ID Number | Manufacturer's Part Number | Description | Change ID ⁽¹⁾ | Type II Group ⁽³⁾ | SAR ⁽⁴⁾ Evaluated | SAR ⁽⁵⁾ Tested |
| Audio Accessory | | | | | | |
| A1 | 12082-0600-01 | Standard Speaker Microphone | 1 | PB | Y | Y |
| A2 | 12082-0600-02 | Speaker Microphone, Emer Button | 1 | PB | Y | N |
| A4 | 12082-0650-01 | Microphone, Palm, 2-Wire Black | 1 | IL | Y | N |
| A6 | 12082-0650-03 | Microphone, Mini Lapel, 3-Wire Black | 1 | IL | Y | N |
| A11 | 12082-0650-08 | Headset, LTWT, OTH, Single Ear, IN-Line PTT | 3 | IL | Y | N |
| A12 | 12082-0650-09 | Headset, LTWT, BTH, Dual Ear, In_Line PTT | 3 | IL | Y | N |
| A13 | 12082-0650-10 | Headset, LTWT, BTH, Dual Ear, Pig Tail PTT | 3 | PT | Y | N |
| A14 | 12082-0650-11 | Headset, LTWT, BTH, Dual In-Ear, In_Line PTT | 3 | IL | Y | N |
| A15 | 12082-0650-12 | Headset, LTWT, BTH, Dual In-Ear, Pig Tail PTT | 3 | IL | Y | N |
| A16 | 12082-0650-13 | Headset, Heavy Duty, BTH, w /PTT | 3 | IL | Y | N |
| A17 | 12082-0650-14 | Headset, Heavy Duty, OTH, w /PTT | 3 | IL | Y | N |
| A20 | 12082-0650-17 | Skull MIC, w /Body PTT, Earcup | 3 | BB | Y | N |
| A21 | 12082-0650-18 | Throat MIC, w /Acoustic Tube, Body PTT | 3 | BB | Y | N |
| A22 | 12082-0650-19 | Throat MIC, w /Acoustic Tube, Body & Ring PTT | 3 | BB | Y | N |
| A24 | 12082-0684-01 | BlueTooth, Covert, Earpiece, MIC, PTT | 3 | BT | Y | N |
| A26 | LS103239V1 | Earphone, Lapel MIC, 2.5mm | 3 | n/a | Y | N |
| A27 | LS103239V2 | Earphone, Lapel MIC, 2.5mm, Right Angle | 4 | n/a | Y | N |
| A28 | 12082-0600-03 | Microphone, Antenna Speaker, EMRG, 18" | 6 | PB | Y | N |
| A29 | 12082-0600-04 | Microphone, Antenna Speaker, EMRG, 25.6" | 6 | PB | Y | N |
| A30 | 12082-0600-05 | Microphone, Antenna Speaker, EMRG, 30" | 6 | PB | Y | N |
| A32 | 14035-4700-01 | SPEAKER MIC, REVO NC2, C1D2 LMR | 27 | PB | Y | N |
| A34 | 14035-4750-01 | SPEAKER MIC, 500F, C1D1 LMR | 29 | PB | Y | N |
| A35 | 12082-0800-02 | SPEAKER MIC, WIRELESS, BLUETOOTH, ADVANCED | | BT | Y | N |
| A36 | 12082-0800-03 | SPEAKER MIC, WIRELESS, BLUETOOTH, ADV, ANZ | | BT | Y | N |
| A37 | 14002-0197-01 | Adapter, 6-Pin HIROSE, Ext Cable | | Adpt | Y | N |

| Manufacturer's Accessory List | | | | | | |
|-------------------------------|----------------------------|----------------------|--------------------------|------------------------------|------------------------------|---------------------------|
| Test Report ID Number | Manufacturer's Part Number | Description | Change ID ⁽¹⁾ | Type II Group ⁽³⁾ | SAR ⁽⁴⁾ Evaluated | SAR ⁽⁵⁾ Tested |
| Body-Worn Accessory | | | | | | |
| B1 | 12082-1290-01 | Metal Belt Clip, 0mm | 1 | Y | Y | Y |
| B2 | 12082-3230-01 | D-Swivel | 1 | Y | Y | N |

(1) Change ID: Indicates the change number in which the accessory was added.

(3) Type II Group: "y" indicates that this accessory was evaluated with similar devices and found to have no significant contribution to the reported SAR

(4) SAR Evaluated: Indicates the accessory was visually evaluated and may or may not have tested.

(5) SAR Tested: Indicates the accessory was SAR tested during the course of this investigation.

9.0 SAR MEASUREMENT SUMMARY

Table 9.1: Measured Results LMR – BODY

| Measured SAR Results (1g) - BODY Configuration (FCC/ISED) | | | | | | | | | | | | | | | | | |
|--|---------------|-----------|------|----------------------|------------|------------------------------------|------------|---------|----------|-----------------------|--------------|-----------------------------|-------------------|--------------------------------|----------------|--|--|
| Date | Plot ID | DUT | | Test Frequency (MHz) | Modulation | Accessories | | | | DUT Spacing | | Conducted Power (dBm) | Measured SAR (1g) | | SAR Drift (dB) | | |
| | | M/N | Type | | | Antenna ID | Battery ID | Body ID | Audio ID | DUT (mm) | Antenna (mm) | | 100% DC (W/kg) | 50% DC (W/kg) | | | |
| VHF Body | | | | | | | | | | | | | | | | | |
| 9/14/2020 | B8 | FireRadio | PTT | 136 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.77 | 1.240 | 0.620 | -0.430 | | |
| 9/14/2020 | B9 | FireRadio | PTT | 143 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.69 | 1.880 | 0.940 | -0.180 | | |
| 9/14/2020 | B10 | FireRadio | PTT | 150 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.71 | 1.470 | 0.735 | -0.280 | | |
| 9/14/2020 | B11 | FireRadio | PTT | 158 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.77 | 1.430 | 0.715 | -0.150 | | |
| 9/14/2020 | B12 | FireRadio | PTT | 168 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.78 | 1.510 | 0.755 | -0.320 | | |
| 9/14/2020 | B13 | FireRadio | PTT | 174 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.78 | 0.537 | 0.269 | -0.410 | | |
| 9/17/2020 | B21 | FireRadio | PTT | 174 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.78 | 0.427 | 0.214 | -0.280 | | |
| 2/10/2021 | B1 Baseline | FR Eng Ev | PTT | 143 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.69 | 2.100 | 1.050 | -0.160 | | |
| 2/10/2021 | B2 | FireRadio | PTT | 143 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 37.69 | 0.487 | 0.244 | -0.170 | | |
| UHF Body | | | | | | | | | | | | | | | | | |
| 9/17/2020 | B14 | FireRadio | PTT | 378 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.81 | 6.070 | 3.035 | -0.220 | | |
| 9/17/2020 | B15 | FireRadio | PTT | 406 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.81 | 8.280 | 4.140 | -0.190 | | |
| 9/17/2020 | B16 | FireRadio | PTT | 418 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.74 | 3.990 | 1.995 | -0.230 | | |
| 9/17/2020 | B17 | FireRadio | PTT | 430 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.89 | 8.780 | 4.390 | -0.120 | | |
| 9/17/2020 | B18 | FireRadio | PTT | 450 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.95 | 4.180 | 2.090 | -0.230 | | |
| 9/17/2020 | B19 | FireRadio | PTT | 454 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.84 | 10.200 | 5.100 | -0.260 | | |
| 9/17/2020 | B20 | FireRadio | PTT | 456 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.8 | 10.300 | 5.150 | -0.330 | | |
| 2/12/2021 | B1-3 Baseline | FR Eng Ev | PTT | 456 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.8 | 11.700 | 5.850 | -0.190 | | |
| 2/12/2021 | B2-4 | FireRadio | PTT | 456 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.38 | 11.200 | 5.600 | -0.070 | | |
| 2/12/2021 | B3-5 | FireRadio | PTT | 454 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 36.84 | 10.700 | 5.350 | -0.180 | | |
| SAR Limit | | | | | | Spatial Peak | | | | Head/Body | | RF Exposure Category | | | | | |
| FCC 47 CFR 2.1093 | | | | | | Health Canada Safety Code 6 | | | | 1 Gram Average | | 8.0 W/kg | | Occupational/User Aware | | | |

Table 9.1: Measured Results LMR – BODY (Cont)

| Measured SAR Results (1g) - BODY Configuration (FCC/ISED) | | | | | | | | | | | | | | | | | |
|--|---------------|-----------|------|----------------------|------------|------------------------------------|------------|---------|----------|-----------------------|--------------|-----------------------------|-------------------|--------------------------------|----------------|--|--|
| Date | Plot ID | DUT | | Test Frequency (MHz) | Modulation | Accessories | | | | DUT Spacing | | Conducted Power (dBm) | Measured SAR (1g) | | SAR Drift (dB) | | |
| | | M/N | Type | | | Antenna ID | Battery ID | Body ID | Audio ID | DUT (mm) | Antenna (mm) | | 100% DC (W/kg) | 50% DC (W/kg) | | | |
| 7/800 Body | | | | | | | | | | | | | | | | | |
| 9/9/2020 | B1 | FireRadio | PTT | 768 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.21 | 4.090 | 2.045 | -0.010 | | |
| 9/9/2020 | B2 | FireRadio | PTT | 776 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.11 | 4.330 | 2.165 | -0.244 | | |
| 9/9/2020 | B3 | FireRadio | PTT | 798 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.12 | 2.130 | 1.065 | -0.710 | | |
| 9/9/2020 | B4 | FireRadio | PTT | 806 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 33.83 | 1.900 | 0.950 | -0.030 | | |
| 9/9/2020 | B5 | FireRadio | PTT | 816 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 33.64 | 3.480 | 1.740 | -0.342 | | |
| 9/9/2020 | B6 | FireRadio | PTT | 851 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 33.56 | 4.020 | 2.010 | -0.420 | | |
| 9/10/2020 | B7 | FireRadio | PTT | 861 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 33.62 | 1.510 | 0.755 | -0.130 | | |
| 3/2/2021 | B1-6 Baseline | FR Eng Ev | PTT | 776 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.11 | 2.460 | 1.230 | -0.400 | | |
| 3/2/2021 | B1-7 Baseline | FR Eng Ev | PTT | 768 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.21 | 3.770 | 1.885 | -0.410 | | |
| 3/2/2021 | B2-9 | FireRadio | PTT | 776 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.11 | 2.460 | 1.230 | 0.050 | | |
| 3/2/2021 | B2-10 | FireRadio | PTT | 768 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.21 | 2.610 | 1.305 | -0.380 | | |
| 3/2/2021 | B2-11 | FireRadio | PTT | 851 | CW | T13 | P9 | B1 | A1 | 0 | 35 | 34.56 | 5.270 | 2.635 | -0.010 | | |
| SAR Limit | | | | | | Spatial Peak | | | | Head/Body | | RF Exposure Category | | | | | |
| FCC 47 CFR 2.1093 | | | | | | Health Canada Safety Code 6 | | | | 1 Gram Average | | 8.0 W/kg | | Occupational/User Aware | | | |

Table 9.2: Measured Results WLAN 2.4GHz & 5GHz Band – BODY

| Measured SAR Results (1g) - BODY Configuration (FCC/ISED) | | | | | | | | | | | | | | | | | |
|--|---------|-----------|------|----------------------|------------|------------------------------------|------------|-----------|----------|-----------------------|--------------|-----------------------------|-------------------|---------------------------|----------------|--|--|
| Date | Plot ID | DUT | | Test Frequency (MHz) | Modulation | Accessories | | | | DUT Spacing | | Conducted Power (dBm) | Measured SAR (1g) | | SAR Drift (dB) | | |
| | | M/N | Type | | | Antenna ID | Battery ID | Body ID | Audio ID | DUT (mm) | Antenna (mm) | | 100% DC (W/kg) | 50% DC (W/kg) | | | |
| 3/3/2021 | B12 | FireRadio | PTT | 2412 | DSSS | FireAnt | 5050-01 | Belt Clip | SpkrMic | 0 | n/a | 23.7 | 0.000 | | -0.120 | | |
| 3/4/2021 | B13 | FireRadio | PTT | 2437 | DSSS | FireAnt | 5050-01 | Belt Clip | SpkrMic | 0 | n/a | 23.65 | 0.000 | | 0.000 | | |
| 3/4/2021 | B14 | FireRadio | PTT | 2462 | DSSS | FireAnt | 5050-01 | Belt Clip | SpkrMic | 0 | n/a | 23.72 | 0.000 | | -0.150 | | |
| 3/7/2021 | B15 | FireRadio | PTT | 5180 | OFDM | FireAnt | 5050-01 | Belt Clip | SpkrMic | 0 | n/a | 16.52 | 0.001 | | 0.000 | | |
| 3/7/2021 | B16 | FireRadio | PTT | 5660 | OFDM | FireAnt | 5050-01 | Belt Clip | SpkrMic | 0 | n/a | 18.31 | 0.000 | | 0.000 | | |
| SAR Limit | | | | | | Spatial Peak | | | | Head/Body | | RF Exposure Category | | | | | |
| FCC 47 CFR 2.1093 | | | | | | Health Canada Safety Code 6 | | | | 1 Gram Average | | 1.6 W/kg | | General Population | | | |

Table 9.3: Measured Results LMR – FACE

| Measured SAR Results (1g) - FACE Configuration (FCC/ISED) | | | | | | | | | | | | | | | | | |
|--|---------------|-----------|------|----------------------|------------|-------------|------------------------------------|---------|----------|-----------------------|--------------|-----------------------------|-------------------|--------------------------------|----------------|--|--|
| Date | Plot ID | DUT | | Test Frequency (MHz) | Modulation | Accessories | | | | DUT Spacing | | Conducted Power (dBm) | Measured SAR (1g) | | SAR Drift (dB) | | |
| | | M/N | Type | | | Antenna ID | Battery ID | Body ID | Audio ID | DUT (mm) | Antenna (mm) | | 100% DC (W/kg) | 50% DC (W/kg) | | | |
| VHF Face | | | | | | | | | | | | | | | | | |
| 9/15/2020 | F6 | FireRadio | PTT | 168 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.78 | 0.421 | 0.211 | -0.370 | | |
| 9/17/2020 | F7 | FireRadio | PTT | 143 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.69 | 0.482 | 0.241 | -0.360 | | |
| 2/10/2021 | F1 Baseline | FR Eng Ev | PTT | 143 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.69 | 0.792 | 0.396 | -0.300 | | |
| 2/10/2021 | F2 | FireRadio | PTT | 143 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.69 | 0.828 | 0.414 | -0.260 | | |
| 2/10/2021 | F3 | FireRadio | PTT | 136 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.77 | 1.660 | 0.830 | -0.400 | | |
| 2/10/2021 | F4 | FireRadio | PTT | 150 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.1 | 0.724 | 0.362 | -0.190 | | |
| 2/11/2021 | F5 | FireRadio | PTT | 158 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.77 | 1.130 | 0.565 | -0.090 | | |
| 2/11/2021 | F6 | FireRadio | PTT | 168 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.78 | 1.060 | 0.530 | -0.200 | | |
| 2/11/2021 | F7 | FireRadio | PTT | 174 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 37.78 | 0.693 | 0.347 | -0.740 | | |
| UHF Face | | | | | | | | | | | | | | | | | |
| 9/17/2020 | F8 | FireRadio | PTT | 456 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.38 | 2.370 | 1.185 | -0.130 | | |
| 2/12/2021 | F1-8 Baseline | FR Eng Ev | PTT | 456 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.8 | 4.030 | 2.015 | -0.490 | | |
| 2/12/2021 | F2-9 | FireRadio | PTT | 456 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.8 | 5.080 | 2.540 | -0.090 | | |
| 2/12/2021 | F3-10 | FireRadio | PTT | 378 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.81 | 3.830 | 1.915 | -0.150 | | |
| 2/12/2021 | F4-11 | FireRadio | PTT | 406 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.81 | 4.660 | 2.330 | -0.250 | | |
| 2/12/2021 | F5-12 | FireRadio | PTT | 418 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.74 | 5.090 | 2.545 | -0.130 | | |
| 2/12/2021 | F6-13 | FireRadio | PTT | 430 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.89 | 3.880 | 1.940 | 0.120 | | |
| 2/12/2021 | F7-14 | FireRadio | PTT | 450 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.95 | 4.740 | 2.370 | -0.170 | | |
| 2/12/2021 | F8-15 | FireRadio | PTT | 454 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 36.84 | 5.580 | 2.790 | -0.150 | | |
| SAR Limit | | | | | | | Spatial Peak | | | Head/Body | | RF Exposure Category | | | | | |
| FCC 47 CFR 2.1093 | | | | | | | Health Canada Safety Code 6 | | | 1 Gram Average | | 8.0 W/kg | | Occupational/User Aware | | | |

Table 9.3: Measured Results LMR – FACE (Cont)

| Measured SAR Results (1g) - FACE Configuration (FCC/ISED) | | | | | | | | | | | | | | | | | |
|--|----------------|-----------|------|----------------------|------------|-------------|------------------------------------|---------|----------|-----------------------|--------------|-----------------------------|-------------------|--------------------------------|----------------|--|--|
| Date | Plot ID | DUT | | Test Frequency (MHz) | Modulation | Accessories | | | | DUT Spacing | | Conducted Power (dBm) | Measured SAR (1g) | | SAR Drift (dB) | | |
| | | M/N | Type | | | Antenna ID | Battery ID | Body ID | Audio ID | DUT (mm) | Antenna (mm) | | 100% DC (W/kg) | 50% DC (W/kg) | | | |
| 7/800 Face | | | | | | | | | | | | | | | | | |
| 9/10/2020 | F1 | FireRadio | PTT | 768 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 34.21 | 0.425 | 0.213 | -0.481 | | |
| 9/10/2020 | F2 | FireRadio | PTT | 776 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 34.11 | 0.354 | 0.177 | -0.442 | | |
| 9/10/2020 | F3 | FireRadio | PTT | 798 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 34.12 | 0.602 | 0.301 | -0.350 | | |
| 9/10/2020 | F5 | FireRadio | PTT | 851 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 34.56 | 0.980 | 0.490 | -0.190 | | |
| 3/2/2021 | F1-16 Baseline | FR Eng Ev | PTT | 851 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 33.56 | 2.060 | 1.030 | -0.160 | | |
| 3/2/2021 | F2-17 | FireRadio | PTT | 768 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 34.21 | 1.210 | 0.605 | 0.040 | | |
| 3/2/2021 | F3-18 | FireRadio | PTT | 776 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 34.11 | 0.899 | 0.450 | 0.140 | | |
| 3/2/2021 | F4-19 | FireRadio | PTT | 798 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 34.12 | 1.220 | 0.610 | -0.130 | | |
| 3/2/2021 | F5-20 | FireRadio | PTT | 806 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 33.83 | 1.570 | 0.785 | -0.160 | | |
| 3/3/2021 | F6-21 | FireRadio | PTT | 816 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 33.64 | 1.320 | 0.660 | 0.000 | | |
| 3/3/2021 | F7-22 | FireRadio | PTT | 851 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 33.56 | 2.390 | 1.195 | 0.150 | | |
| 3/3/2021 | F8-23 | FireRadio | PTT | 861 | CW | T13 | P9 | n/a | n/a | 25 | 55 | 33.62 | 2.420 | 1.210 | 0.470 | | |
| SAR Limit | | | | | | | Spatial Peak | | | Head/Body | | RF Exposure Category | | | | | |
| FCC 47 CFR 2.1093 | | | | | | | Health Canada Safety Code 6 | | | 1 Gram Average | | 8.0 W/kg | | Occupational/User Aware | | | |

Table 9.5: Measured Results WLAN 2.4G & BT Band – FACE

| Measured SAR Results (1g) - FACE Configuration (FCC/ISED) | | | | | | | | | | | | | | | | | |
|---|---------|-----------|------|----------------------|------------|-------------|-----------------------------|---------|----------|----------------|--------------|-----------------------|-------------------|--------------------|----------------|--|--|
| Date | Plot ID | DUT | | Test Frequency (MHz) | Modulation | Accessories | | | | DUT Spacing | | Conducted Power (dBm) | Measured SAR (1g) | | SAR Drift (dB) | | |
| | | M/N | Type | | | Antenna ID | Battery ID | Body ID | Audio ID | DUT (mm) | Antenna (mm) | | 100% DC (W/kg) | 50% DC (W/kg) | | | |
| 3/4/2021 | F24 | FireRadio | PTT | 2412 | DSSS | FireAnt | 5050-01 | N/A | N/A | 25 | n/a | 23.7 | 0.000 | | 0.000 | | |
| 3/4/2021 | F25 | FireRadio | PTT | 2437 | DSSS | FireAnt | 5050-01 | N/A | N/A | 25 | n/a | 23.65 | 0.000 | | 0.000 | | |
| 3/4/2021 | F26 | FireRadio | PTT | 2462 | DSSS | FireAnt | 5050-01 | N/A | N/A | 25 | n/a | 23.72 | 0.000 | | 0.000 | | |
| 3/4/2021 | F27* | FireRadio | PTT | 2462 | DSSS | FireAnt | 5050-01 | N/A | N/A | 0 | n/a | 23.72 | 0.000 | | 0.000 | | |
| 3/6/2021 | F28 | FireRadio | PTT | 5180 | OFDM | FireAnt | 5050-01 | N/A | N/A | 25 | n/a | 16.52 | 0.002 | | 0.000 | | |
| 3/7/2021 | F29 | FireRadio | PTT | 5240 | OFDM | FireAnt | 5050-01 | N/A | N/A | 25 | n/a | 16.48 | 0.000 | | 0.000 | | |
| 3/7/2021 | F30 | FireRadio | PTT | 5660 | OFDM | FireAnt | 5050-01 | N/A | N/A | 25 | n/a | 18.31 | 0.000 | | 0.000 | | |
| SAR Limit | | | | | | | Spatial Peak | | | Head/Body | | RF Exposure Category | | | | | |
| FCC 47 CFR 2.1093 | | | | | | | Health Canada Safety Code 6 | | | 1 Gram Average | | 1.6 W/kg | | General Population | | | |

* Due to the extremely low SAR, these measurements were made with a 0mm separation as verification of DUT operation. Since this was an exceptional test configuration, these measurement values will not be used as the reported SAR.

10.0 SCALING OF MAXIMUM MEASURE SAR

Table 10.1 SAR Scaling – LMR

| Scaling of Maximum Measured SAR (1g) | | | | | |
|--------------------------------------|--------------|---------------|---------------|------|--------|
| Measured Parameters | | Configuration | | | |
| | | Face | Body | Head | |
| Plot ID | | F8-15 | B1-3 Baseline | | |
| Maximum Measured SAR _M | | 2.790 | 5.850 | | (W/kg) |
| Frequency | | 454 | 456 | | (MHz) |
| Power Drift | | -0.150 | -0.190 | | (dB) |
| Conducted Power | | 36.840 | 36.800 | | (dBm) |
| Fluid Deviation from Target | | | | | |
| Δe | Permittivity | 5.34% | 5.48% | | |
| Δσ | Conductivity | 3.91% | 4.14% | | |

| Fluid Sensitivity Calculation (1g) | | | IEC 62209-2 Annex F | | |
|--|---------------------|--------|---------------------|--|-----|
| $\Delta SAR = C_e * \Delta e + C_\sigma * \Delta \sigma$ | | | (F.1) | | |
| $C_e = (-0.0007854 * f^3) + (0.009402 * f^2) - (0.02742 * f) - 0.2026$ | | | (F.2) | | |
| $C_\sigma = (0.009804 * f^3) - (0.08661 * f^2) + (0.02981 * f) + 0.7829$ | | | (F.3) | | |
| f | Frequency (GHz) | 0.454 | 0.456 | | |
| | C _e | -0.213 | -0.213 | | |
| | C _σ | 0.779 | 0.779 | | |
| | C _e * Δe | -0.011 | -0.012 | | |
| | C _σ * Δσ | 0.030 | 0.032 | | |
| | ΔSAR | 0.019 | 0.021 | | (%) |

| Manufacturer's Tuneup Tolerance | | | | | |
|---------------------------------|--|--------|--------|--|-------|
| Measured Conducted Power | | 36.840 | 36.800 | | (dBm) |
| Rated Conducted Power | | 37.800 | 37.800 | | (dBm) |
| ΔP | | -0.960 | -1.000 | | (dB) |

| SAR Adjustment for Fluid Sensitivity | | | | | |
|--|--|-------|-------|--|--------|
| SAR ₁ = SAR _M * ΔSAR | | 2.843 | 5.970 | | (W/kg) |

| SAR Adjustment for Tuneup Tolerance | | | | | |
|--|--|-------|-------|--|--------|
| SAR ₂ = SAR ₁ + [ΔP] | | 3.546 | 7.515 | | (W/kg) |

| SAR Adjustment for Drift | | | | | |
|---|--|-------|-------|--|--------|
| SAR ₃ = SAR ₂ + Drift | | 3.670 | 7.851 | | (W/kg) |

| reported SAR | | | | | |
|-------------------------|--|------|------|--|--------|
| FCC = SAR ₂ | | 3.55 | 7.52 | | (W/kg) |
| ISED = SAR ₃ | | 3.67 | 7.85 | | (W/kg) |

NOTES to Table

(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face, Body and/or Head SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 3. The Plot ID is for identification of the SAR Measurement Plots in the Annexes of this report.

NOTE: Some of the scaling factors in Steps 1 through 3 may not apply and are identified by grayed fields.

Step 1

Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 10.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).

Step 2

Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.

Step 3

Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported.

Step 4

The Reported SAR is the Maximum Final Adjusted SAR from the applicable Steps 1 through 3 and are reported on Page 1 of this report.

11.0 ANALYSIS OF SIMULTANEOUS TRANSMISSION

Simultaneous Transmission Analysis

The XL-400P employs Wi-Fi and BlueTooth transmitters capable of simultaneously transmitting with the LMR transmitter. The Wi-Fi and BlueTooth transmitters share the same antenna and the transmissions are interleaved such that only one transmitter is transmitting at a time. As per FCC KDB 447498, simultaneous transmission analysis is required for devices capable of simultaneous transmission. The Wi-Fi and BT SAR are subject to General Population limits of 1.6W/kg. The LMR SAR is subject to Occupational limits of 8.0W/kg. To determine compliance when different SAR limits are applied to the different transmit modes, the Sum-of-the-Ratios of the SAR to the respective SAR limit is applied. When the Sum-of-the-Ratios is ≤ 1.0 , Simultaneous Transmission SAR Test Exclusion may be applied.

When the Sum-of-the-Ratios exceeds 1.0, the SAR to Peak Location Separation Ration (SPLSR) may be used to determine simultaneous transmission SAR test exclusion. However, the equation for determining this exclusion applies to General Population limits only. Reference KDB Inquiry 4285674. When mixed Occupational and General Population exposure limits are used, the SAR of the Occupational configuration is normalize to the General Population limit. For example if $SAR_{Occupational} = 6.4W/kg$ and $SAR_{GenPop} = 0.65W/kg$, normalizing the Occupational SAR to General Population limits yields $SAR_{OccNorm} = 1.28W/kg$. The SPLSR equation of KDB 447498 4.3.1 c) becomes

$$(SAR_1 + SAR_2)^{1.5}/R_i \leq 0.04 = (SAR_{OccNorm} + SAR_{GenPop})^{1.5}/R_i = (1.28 + 0.65)^{1.5}/R_i \leq 0.04$$

SAR for each transmission band, transmission mode and/or equipment class was evaluated with Body-Worn and Audio Accessories in the BODY configuration and with no Accessories in the HEAD configurations. Only the Maximum reported SAR for BODY and HEAD configuration is used in the Sum-of-the-Ratios or SPLSR calculation and the worst case of all possible combinations is considered.

Table 11.1 List of Possible Transmitters

| List of Possible Transmitters | | | | |
|--------------------------------------|-------|-----------------|-------------|--------------------------|
| Type | Class | Frequency Range | | Rated Output Power (dBm) |
| | | Lower (MHz) | Upper (MHz) | |
| VHF | TNF | 136.0 | 174.0 | 38.60 |
| UHF | | 378.0 | 522.0 | 37.80 |
| LMR 700 | | 764.0 | 806.0 | 34.80 |
| LMR 800 | | 806.0 | 869.0 | 35.60 |
| BlueTooth | DSS | 2402.0 | 2480.0 | 6.90 |
| WiFi 2.4 | DTS | 2412.0 | 2462.0 | 23.85 |
| WiFi 5 | NII | 5150.0 | 5240.0 | 16.98 |
| WiFi 5 | NII | 5745.0 | 5825.0 | 18.43 |

Table 11.2 List of Possible Transmitters Combinations

| Simultaneous Transmitter Combinations | | | | |
|--|--------------------|------------------|-----------------|---------------|
| Configuration Number | Transmitter | | | |
| | LMR 7/800 | BlueTooth | WiFi 2.4 | WiFi 5 |
| 1 | X | X | | |
| 2 | X | | X | |
| 3 | X | | | X |


 Indicates this configuration is not supported

Table 11.3 Analysis of Sum-of-the-Ratios

| Analysis of Sum-of-the-Ratios For All Transmitters and Configurations | | | | | | | | | | | | |
|--|---------------|------------------------------------|----------------|--|----------------|-------------------------------|----------------|-------------------------------|----------------|---------------|--------------------|-------|
| Configuration Number | Configuration | Transmitter Type | | | | | | | | Sum of Ratios | Sum of SARs (W/kg) | |
| | | LMR Band | | BlueTooth | | WiFi 2.4 | | WiFi 5 | | | | |
| | | <u>stand-alone</u> SAR (W/kg) | Ratio to Limit | <u>stand-alone</u> SAR (W/kg) | Ratio to Limit | <u>stand-alone</u> SAR (W/kg) | Ratio to Limit | <u>stand-alone</u> SAR (W/kg) | Ratio to Limit | | | |
| | | SAR Limit = 8.0W/kg (Occupational) | | SAR Limit = 1.6W/kg (General Population) | | | | | | | | |
| FCC | | | | | | | | | | | | |
| 1 | HEAD | 3.546 | 0.443 | 0.000 | 0.000 | | | | | 0.443 | 3.546 | |
| 2 | | | | | | 0.000 | 0.000 | | | | 0.443 | 3.546 |
| 3 | | | | | | | | 0.002 | 0.001 | | 0.445 | 3.548 |
| 1 | BODY | 7.515 | 0.939 | 0.000 | 0.000 | | | | | 0.939 | 7.515 | |
| 2 | | | | | | 0.000 | 0.000 | | | 0.939 | 7.515 | |
| 3 | | | | | | | | 0.001 | 0.001 | | 0.940 | 7.516 |
| ISED | | | | | | | | | | | | |
| 1 | HEAD | 3.670 | 0.459 | 0.000 | 0.000 | | | | | 0.443 | 3.670 | |
| 2 | | | | | | 0.000 | 0.000 | | | 0.443 | 3.670 | |
| 3 | | | | | | | | 0.002 | 0.001 | | 0.445 | 3.672 |
| 1 | BODY | 7.851 | 0.981 | 0.000 | 0.000 | | | | | 0.981 | 7.851 | |
| 2 | | | | | | 0.000 | 0.000 | | | 0.981 | 7.851 | |
| 3 | | | | | | | | 0.001 | 0.001 | | 0.982 | 7.852 |

 Indicates this combination is not supported

Simultaneous Transmission SAR Test Exclusion may be determined by applying the Sum-of-the-Ratios for the worst case combinations of all simultaneously transmitting transmitters. From the above table, none of the stand-alone transmitters exceed their respective limit. Additionally, the Sum-of-the-Ratios for the worst case combinations of the transmitters with General Population limits do not exceed 1.0.

12.0 SAR EXPOSURE LIMITS

Table 12.1 Exposure Limits

| SAR RF EXPOSURE LIMITS | | | |
|--|------------------------------------|---|---|
| FCC 47 CFR§2.1093 | Health Canada Safety Code 6 | General Population / Uncontrolled Exposure⁽⁴⁾ | Occupational / Controlled Exposure⁽⁵⁾ |
| Spatial Average⁽¹⁾ (averaged over the whole body) | | 0.08 W/kg | 0.4 W/kg |
| Spatial Peak⁽²⁾ (Head and Trunk averaged over any 1 g of tissue) | | 1.6 W/kg | 8.0 W/kg |
| Spatial Peak⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g) | | 4.0 W/kg | 20.0 W/kg |
| (1) The Spatial Average value of the SAR averaged over the whole body. | | | |
| (2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time. | | | |
| (3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time. | | | |
| (4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure. | | | |
| (5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure. | | | |

13.0 DETAILS OF SAR EVALUATION

Table 13.1 Day Log

| DAY LOG | | | | | Fluid Dielectric | SPC | DUT Test | TSL | Comments |
|--------------|-------------------|-----------------|-----------------------|---------------------------|------------------|-----|----------|-------|---------------------|
| Date | Ambient Temp (°C) | Fluid Temp (°C) | Relative Humidity (%) | Barometric Pressure (kPa) | | | | | |
| 8 Sep 2020 | 21 | 21.2 | 32% | 103.1 | X | X | | 835H | |
| 9 Sep 2020 | 22 | 21.3 | 32% | 102.5 | | | X | 835H | |
| 10 Sep 2020 | 22 | 21.3 | 37% | 102.3 | | | X | 835H | |
| 14 Sep 2020 | 24 | 21.8 | 37% | 101.3 | X | X | X | 150H | |
| 14 Sep 2020 | 23 | 22.2 | 44% | 101.4 | | | X | 150H | |
| 15 Sep 2020 | 22 | 23.2 | 43% | 102.1 | X | | X | 150H | |
| 16 Sep 2020 | 22 | 23.4 | 42% | 102.1 | | | X | 150H | |
| 17 Sep 2020 | 23 | 23.5 | 40% | 102.0 | | | X | 150H | |
| 17 Sep 2020 | 23 | 22.8 | 40% | 102.0 | X | X | X | 450H | |
| 18 Sep 2020 | 23 | 23.1 | 40% | 101.1 | | | X | 450H | |
| Feb 4 2021 | 24 | 22.7 | 25% | 102.3 | x | x | x | 150H | |
| Feb 5 2021 | 24 | 23.2 | 25% | 101.8 | | | x | 150H | |
| Feb 8 2021 | 23 | 24.0 | 21% | 102.4 | x | x | x | 150H | Preliminary Testing |
| Feb 10 2021 | 23 | 23.0 | 16% | 103.1 | | | x | 150H | |
| Feb 11 2021 | 25 | 22.9 | 14% | 103.8 | | | x | 150H | |
| Feb 11 2021 | 25 | 23.6 | 14% | 103.8 | x | x | | 450H | |
| Feb 12 2021 | 23 | 22.5 | 14% | 102.9 | | | x | 450H | |
| March 2 2021 | 25 | 22.1 | 19% | 101.1 | x | x | x | 835H | |
| March 3 2021 | 24 | 22.4 | 22% | 101.2 | x | x | x | 835H | |
| March 4 2021 | 23 | 22.6 | 21% | 101.6 | | | x | 2450H | |
| March 6 2021 | 21 | 20.4 | 25% | 101.2 | x | x | x | 5250H | |
| March 6 2021 | 21 | 20.4 | 25% | 101.2 | x | x | x | 5750H | |

Table 13.2 DUT Positioning

| DUT Positioning | |
|---------------------------|--|
| Positioning | The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation. |
| FACE Configuration | The DUT was securely clamped into the device holder with the surface of the DUT normally held to the user's face facing the phantom. The device holder was adjusted to ensure that the horizontal axis of the DUT was parallel to the bottom of the phantom. A 25mm spacer block was used to set the separation distance between the DUT and the phantom to 25mm. When applicable and unless by design, the antenna of the DUT was prevented from sagging away from the phantom. The spacer block was removed before testing. |
| BODY Configuration | Body-Worn and Audio Accessories were affixed to the DUT in the manner in which they are intended to be used. The DUT, with its accessories, were securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom. Body-Worn Accessory straps, linkages, etc. were positioned in a fashion resembling that for which they were intended to be used. Audio Accessory cables, etc., were positioned in a fashion resembling that for which they were intended to be used. |
| HEAD Configuration | This device is not intended to be held to the ear and was not tested in the HEAD configuration. |

Table 13.3 General Procedures and Report

| General Procedures and Reporting | |
|---|---|
| General Procedures | <p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 1.0^{\circ}\text{C}$ throughout the test series. TSL analysis and SPC were repeated when the Active TSL use exceeded 84 hours.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.</p> |
| Reporting | <p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. The SAR values in the 50% DC column have been scaled by 50% for 50% Push-To-Talk duty cycle compensation. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY and FACE configurations, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p> |

Table 13.4 Fluid Dielectric and Systems Performance Check

| Fluid Dielectric and Systems Performance Check | |
|--|---|
| Fluid Dielectric Measurement Procedure | <p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$ and $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ with frequency step size of 10MHz is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC OET Bulletin 65 Supplement C targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p> |
| Systems Performance Check | <p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p> |

Table 13.5 Scan Resolution 100MHz to 2GHz

| Scan Resolution 100MHz to 2GHz | |
|--|--|
| Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center) | $4 \pm 1 \text{ mm}$ |
| Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom) | $5^\circ \pm 1^\circ$ |
| Area Scan Spatial Resolution $\Delta X, \Delta Y$ | 15 mm |
| Zoom Scan Spatial Resolution $\Delta X, \Delta Y$ | 7.5 mm |
| Zoom Scan Spatial Resolution ΔZ (Uniform Grid) | 5 mm |
| Zoom Scan Volume X, Y, Z | 30 mm |
| Phantom | ELI |
| Fluid Depth | $150 \pm 5 \text{ mm}$ |
| An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima. | |
| A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR | |

Table 13.6 Scan Resolution 2GHz to 3GHz

| Scan Resolution 2GHz to 3GHz | |
|--|-------------------|
| Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center) | 4 ± 1 mm |
| Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom) | 5° ± 1° |
| Area Scan Spatial Resolution $\Delta X, \Delta Y$ | 12 mm |
| Zoom Scan Spatial Resolution $\Delta X, \Delta Y$ | 5 mm |
| Zoom Scan Spatial Resolution ΔZ (Uniform Grid) | 5 mm |
| Zoom Scan Volume X, Y, Z | 30 mm |
| Phantom | ELI |
| Fluid Depth | 150 ± 5 mm |
| An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima. | |
| A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR | |

Table 13.7 Scan Resolution 5GHz to 6GHz

| Scan Resolution 5GHz to 6GHz | |
|--|-------------------|
| Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center) | 4 ± 1 mm |
| Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom) | 5° ± 1° |
| Area Scan Spatial Resolution $\Delta X, \Delta Y$ | 10 mm |
| Zoom Scan Spatial Resolution $\Delta X, \Delta Y$ | 4 mm |
| Zoom Scan Spatial Resolution ΔZ (Uniform Grid) | 2 mm |
| Zoom Scan Volume X, Y, Z | 22 mm |
| Phantom | ELI |
| Fluid Depth | 100 ± 5 mm |
| An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima. | |
| A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR | |

14.0 MEASUREMENT UNCERTAINTIES

Table 14.1 Measurement Uncertainty

| IEEE 1528 Table E.9 | | | | | | | | | | |
|---|-------------------|----------|------------|------|-----|---------------------|----------------------|--------------------|--------------------------|------------------------------------|
| UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9) | | | | | | | | | | |
| Source of Uncertainty | IEEE 1528 Section | Toler ±% | Prob Dist | Div | Div | c _i (1g) | c _i (10g) | Stand Unct ±% (1g) | Stand Unct ±% (10g) | V _i or V _{eff} |
| Measurement System | | | | | | | | | | |
| EX3DV4 Probe Calibration** (k=1) | E.2.1 | 6.7 | N | 1.00 | 1 | 1 | 1 | 6.7 | 6.7 | ∞ |
| Axial Isotropy** (k=1) | E.2.2 | 0.6 | R | 1.73 | √3 | 0.7 | 0.7 | 0.2 | 0.2 | ∞ |
| Hemispherical Isotropy** (k=1) | E.2.2 | 3.2 | R | 1.73 | √3 | 0.7 | 0.7 | 1.3 | 1.3 | ∞ |
| Boundary Effect* | E.2.3 | 1.0 | R | 1.73 | √3 | 1 | 1 | 0.6 | 0.6 | ∞ |
| Linearity** (k=1) | E.2.4 | 0.5 | R | 1.73 | √3 | 1 | 1 | 0.3 | 0.3 | ∞ |
| System Detection Limits* | E.2.4 | 1.0 | R | 1.73 | √3 | 1 | 1 | 0.6 | 0.6 | ∞ |
| Modulation Response** (k=1) | E.2.5 | 8.3 | R | 1.73 | √3 | 1 | 1 | 4.8 | 4.8 | ∞ |
| Readout Electronics* | E.2.6 | 0.3 | N | 1.00 | 1 | 1 | 1 | 0.3 | 0.3 | ∞ |
| Response Time* | E.2.7 | 0.8 | R | 1.73 | √3 | 1 | 1 | 0.5 | 0.5 | ∞ |
| Integration Time* | E.2.8 | 2.6 | R | 1.73 | √3 | 1 | 1 | 1.5 | 1.5 | ∞ |
| RF Ambient Conditions - Noise | E.6.1 | 0.0 | R | 1.73 | √3 | 1 | 1 | 0.0 | 0.0 | 10 |
| RF Ambient Conditions - Reflection | E.6.1 | 0.0 | R | 1.73 | √3 | 1 | 1 | 0.0 | 0.0 | 10 |
| Probe Positioner Mechanical Tolerance* | E.6.2 | 0.0 | R | 1.73 | √3 | 1 | 1 | 0.0 | 0.0 | ∞ |
| Probe Positioning wrt Phantom Shell* | E.6.3 | 0.4 | R | 1.73 | √3 | 1 | 1 | 0.2 | 0.2 | ∞ |
| Post-processing* | E.5 | 2.0 | R | 1.73 | √3 | 1 | 1 | 1.2 | 1.2 | ∞ |
| Test Sample Related | | | | | | | | | | |
| Test Sample Positioning | E.4.2 | 2.2 | N | 1.00 | 1 | 1 | 1 | 2.2 | 2.2 | 5 |
| Device Holder Uncertainty* | E.4.1 | 3.6 | N | 1.00 | 1 | 1 | 1 | 3.6 | 3.6 | ∞ |
| SAR Drift Measurement ⁽²⁾ | E.2.9 | 0.0 | R | 1.73 | √3 | 1 | 1 | 0.0 | 0.0 | ∞ |
| SAR Power Scaling ⁽³⁾ | E.6.5 | 0.0 | R | 1.73 | √3 | 1 | 1 | 0.0 | 0.0 | ∞ |
| Phantom and Tissue Parameters | | | | | | | | | | |
| Phantom Uncertainty* | E.3.1 | 6.1 | R | 1.73 | √3 | 1 | 1 | 3.5 | 3.5 | ∞ |
| SAR Correction Uncertainty | E.3.2 | 1.6 | N | 1.00 | 1 | 1 | 0.84 | 1.6 | 1.3 | ∞ |
| Liquid Conductivity (measurement) | E.3.3 | 5.0 | N | 1.00 | 1 | 0.78 | 0.71 | 3.9 | 3.6 | 10 |
| Liquid Permittivity (measurement) | E.3.3 | 5.0 | N | 1.00 | 1 | 0.23 | 0.26 | 1.2 | 1.3 | 10 |
| Liquid Conductivity (Temperature) | E.3.2 | 0.4 | R | 1.73 | √3 | 0.78 | 0.71 | 0.2 | 0.2 | 10 |
| Liquid Permittivity Temperature) | E.3.2 | 0.2 | R | 1.73 | √3 | 0.23 | 0.26 | 0.0 | 0.0 | 10 |
| Effective Degrees of Freedom⁽¹⁾ | | | | | | | | | V_{eff} = | 1141 |
| Combined Standard Uncertainty | | | RSS | | | | | 11.1 | 11.0 | |
| Expanded Uncertainty (95% Confidence Interval) | | | k=2 | | | | | 22.2 | 21.9 | |

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003

(1) The Effective Degrees of Freedom is > 30

Therefore a coverage factor of k=2 represents an approximate confidence level of 95%.

(2) The SAR Value is compensated for Drift

(3) SAR Power Scaling not Required

* Provided by SPEAG for DASY4

** Standard Uncertainty Calibration Data Provided by SPEAG for EX3DEV4 Probe

Table 14.2 Calculation of Degrees of Freedom

| Table 14.2 | |
|--|---|
| Calculation of the Degrees and Effective Degrees of Freedom | |
| $v_i = n - 1$ | $v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1}^m \frac{c_i^4 u_i^4}{v_i}}$ |

15.0 FLUID DIELECTRIC PARAMETERS

Note: Effective February 19, 2019 TCB Workshop: FCC has permitted the use of single head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests. TSL can be changed in a Permissive Change. If SAR increased and Original SAR > 1.2W/kg, additional SAR measurements will be required.

Table 15.1 Fluid Dielectric Parameters 835MHz HEAD TSL, 8 September 2020

```

*****
                Aprel Laboratory
                Test Result for UIM Dielectric Parameter
                Tue 08/Sep/2020 13:42:49
                Freq   Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
                Test_e  Epsilon of UIM
                Test_s  Sigma of UIM
*****
Freq           FCC_eHFCC_sHTest_e  Test_s
0.7350         42.02  0.89  40.50  0.78
0.7450         41.97  0.89  40.43  0.80
0.7550         41.92  0.89  40.61  0.81
0.7650         41.86  0.89  40.41  0.81
0.7750         41.81  0.90  40.34  0.84
0.7850         41.76  0.90  40.04  0.84
0.7950         41.71  0.90  39.76  0.84
0.8050         41.66  0.90  39.97  0.86
0.8150         41.60  0.90  39.93  0.86
0.8250         41.55  0.90  39.51  0.87
0.8350         41.50  0.90  39.33  0.88
0.8450         41.50  0.91  39.19  0.90
0.8550         41.50  0.92  39.10  0.90
0.8650         41.50  0.93  38.93  0.92
0.8750         41.50  0.94  38.89  0.92
0.8850         41.50  0.95  38.83  0.94
0.8950         41.50  0.96  38.82  0.94
0.9050         41.50  0.97  38.67  0.94
0.9150         41.50  0.98  38.44  0.95
0.9250         41.48  0.98  38.16  0.96
0.9350         41.46  0.99  38.43  0.97

```

Table 15.2 Fluid Dielectric Analysis 835MHz HEAD TSL, 8 September 2020

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|------------|-------------|----------|------------|------------------------|------------------------|------|
| Date: | 8 Sep 2020 | Fluid Temp: | 21.2 | Frequency: | 835MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 735.0000 | 40.5000 | 0.7800 | 42.0200 | 0.89 | -3.62% | -12.36% | |
| 745.0000 | 40.4300 | 0.8000 | 41.9700 | 0.89 | -3.67% | -10.11% | |
| 755.0000 | 40.6100 | 0.8100 | 41.9200 | 0.89 | -3.13% | -8.99% | |
| 765.0000 | 40.4100 | 0.8100 | 41.8600 | 0.89 | -3.46% | -8.99% | |
| 775.0000 | 40.3400 | 0.8400 | 41.8100 | 0.90 | -3.52% | -6.67% | |
| 785.0000 | 40.0400 | 0.8400 | 41.7600 | 0.90 | -4.12% | -6.67% | |
| 795.0000 | 39.7600 | 0.8400 | 41.7100 | 0.90 | -4.68% | -6.67% | |
| 805.0000 | 39.9700 | 0.8600 | 41.6600 | 0.90 | -4.06% | -4.44% | |
| 815.0000 | 39.9300 | 0.8600 | 41.6000 | 0.90 | -4.01% | -4.44% | |
| 825.0000 | 39.5100 | 0.8700 | 41.5500 | 0.90 | -4.91% | -3.33% | |
| 835.0000 | 39.3300 | 0.8800 | 41.5000 | 0.90 | -5.23% | -2.22% | |
| 845.0000 | 39.1900 | 0.9000 | 41.5000 | 0.91 | -5.57% | -1.10% | |
| 855.0000 | 39.1000 | 0.9000 | 41.5000 | 0.92 | -5.78% | -2.17% | |
| 865.0000 | 38.9300 | 0.9200 | 41.5000 | 0.93 | -6.19% | -1.08% | |
| 875.0000 | 38.8900 | 0.9200 | 41.5000 | 0.94 | -6.29% | -2.13% | |
| 885.0000 | 38.8300 | 0.9400 | 41.5000 | 0.95 | -6.43% | -1.05% | |
| 895.0000 | 38.8200 | 0.9400 | 41.5000 | 0.96 | -6.46% | -2.08% | |
| 905.0000 | 38.6700 | 0.9400 | 41.5000 | 0.97 | -6.82% | -3.09% | |
| 915.0000 | 38.4400 | 0.9500 | 41.5000 | 0.98 | -7.37% | -3.06% | |
| 925.0000 | 38.1600 | 0.9600 | 41.4800 | 0.98 | -8.00% | -2.04% | |
| 935.0000 | 38.4300 | 0.9700 | 41.4600 | 0.99 | -7.31% | -2.02% | |

*Channel Frequency Tested

Table 15.3 Fluid Dielectric Parameters 150MHz HEAD TSL, 14 September 2020

```

*****
                Aprel Laboratory
                Test Result for UIM Dielectric Parameter
                Fri 14/Sep/2020 13:12:10
                Freq   Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
                Test_e  Epsilon of UIM
                Test_s  Sigma of UIM
*****
Freq           FCC_eHFCC_sHTest_e  Test_s
0.1000         54.63  0.72  56.02  0.69
0.1100         54.17  0.73  51.89  0.69
0.1200         53.70  0.74  52.02  0.69
0.1300         53.23  0.75  51.71  0.69
0.1400         52.77  0.75  49.81  0.69
0.1500         52.30  0.76  49.90  0.69
0.1600         51.83  0.77  48.95  0.71
0.1700         51.37  0.77  47.66  0.71
0.1800         50.90  0.78  47.94  0.73
0.1900         50.43  0.79  47.60  0.74
0.2000         49.97  0.80  48.14  0.74

```

Table 15.4 Fluid Dielectric Analysis 150MHz HEAD TSL, 14 September 2020

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|-------------|-------------|----------|------------|------------------------|------------------------|------|
| Date: | 14 Sep 2020 | Fluid Temp: | 21.7 | Frequency: | 150MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 100.0000 | 56.0200 | 0.6900 | 54.6300 | 0.72 | 2.54% | -4.17% | |
| 110.0000 | 51.8900 | 0.6900 | 54.1700 | 0.73 | -4.21% | -5.48% | |
| 120.0000 | 52.0200 | 0.6900 | 53.7000 | 0.74 | -3.13% | -6.76% | |
| 130.0000 | 51.7100 | 0.6900 | 53.2300 | 0.75 | -2.86% | -8.00% | |
| 140.0000 | 49.8100 | 0.6900 | 52.7700 | 0.75 | -5.61% | -8.00% | |
| 150.0000 | 49.9000 | 0.6900 | 52.3000 | 0.76 | -4.59% | -9.21% | |
| 160.0000 | 48.9500 | 0.7100 | 51.8300 | 0.77 | -5.56% | -7.79% | |
| 170.0000 | 47.6600 | 0.7100 | 51.3700 | 0.77 | -7.22% | -7.79% | |
| 180.0000 | 47.9400 | 0.7300 | 50.9000 | 0.78 | -5.82% | -6.41% | |
| 190.0000 | 47.6000 | 0.7400 | 50.4300 | 0.79 | -5.61% | -6.33% | |
| 200.0000 | 48.1400 | 0.7400 | 49.9700 | 0.80 | -3.66% | -7.50% | |

*Channel Frequency Tested

Table 15.5 Fluid Dielectric Parameters 450MHz HEAD TSL, 17 September 2020

 Aprel Laboratory
 Test Result for UIM Dielectric Parameter
 Thu 17/Sep/2020 11:48:45
 Freq Frequency(GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 0.3500 | 44.70 | 0.87 | 45.75 | 0.79 |
| 0.3600 | 44.58 | 0.87 | 45.55 | 0.79 |
| 0.3700 | 44.46 | 0.87 | 45.87 | 0.79 |
| 0.3800 | 44.34 | 0.87 | 45.04 | 0.79 |
| 0.3900 | 44.22 | 0.87 | 45.36 | 0.79 |
| 0.4000 | 44.10 | 0.87 | 45.01 | 0.79 |
| 0.4100 | 43.98 | 0.87 | 44.63 | 0.79 |
| 0.4200 | 43.86 | 0.87 | 44.19 | 0.80 |
| 0.4300 | 43.74 | 0.87 | 43.94 | 0.82 |
| 0.4400 | 43.62 | 0.87 | 43.92 | 0.80 |
| 0.4500 | 43.50 | 0.87 | 43.69 | 0.82 |
| 0.4600 | 43.45 | 0.87 | 43.61 | 0.84 |
| 0.4700 | 43.40 | 0.87 | 43.35 | 0.86 |
| 0.4800 | 43.34 | 0.87 | 42.81 | 0.87 |
| 0.4900 | 43.29 | 0.87 | 43.04 | 0.88 |
| 0.5000 | 43.24 | 0.87 | 42.45 | 0.88 |
| 0.5100 | 43.19 | 0.87 | 42.29 | 0.88 |
| 0.5200 | 43.14 | 0.88 | 42.19 | 0.91 |
| 0.5300 | 43.08 | 0.88 | 42.07 | 0.92 |
| 0.5400 | 43.03 | 0.88 | 42.09 | 0.90 |
| 0.5500 | 42.98 | 0.88 | 41.96 | 0.91 |

Table 15.6 Fluid Dielectric Analysis 150MHz HEAD TSL, 17 September 2020

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|-------------|-------------|----------|------------|------------------------|------------------------|------|
| Date: | 17 Sep 2020 | Fluid Temp: | 22.8 | Frequency: | 450MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 350.0000 | 45.7500 | 0.7900 | 44.7000 | 0.87 | 2.35% | -9.20% | |
| 360.0000 | 45.5500 | 0.7900 | 44.5800 | 0.87 | 2.18% | -9.20% | |
| 370.0000 | 45.8700 | 0.7900 | 44.4600 | 0.87 | 3.17% | -9.20% | |
| 380.0000 | 45.0400 | 0.7900 | 44.3400 | 0.87 | 1.58% | -9.20% | |
| 390.0000 | 45.3600 | 0.7900 | 44.2200 | 0.87 | 2.58% | -9.20% | |
| 400.0000 | 45.0100 | 0.7900 | 44.1000 | 0.87 | 2.06% | -9.20% | |
| 410.0000 | 44.6300 | 0.7900 | 43.9800 | 0.87 | 1.48% | -9.20% | |
| 420.0000 | 44.1900 | 0.8000 | 43.8600 | 0.87 | 0.75% | -8.05% | |
| 430.0000 | 43.9400 | 0.8200 | 43.7400 | 0.87 | 0.46% | -5.75% | |
| 440.0000 | 43.9200 | 0.8000 | 43.6200 | 0.87 | 0.69% | -8.05% | |
| 450.0000 | 43.6900 | 0.8200 | 43.5000 | 0.87 | 0.44% | -5.75% | |
| 460.0000 | 43.6100 | 0.8400 | 43.4500 | 0.87 | 0.37% | -3.45% | |
| 470.0000 | 43.3500 | 0.8600 | 43.4000 | 0.87 | -0.12% | -1.15% | |
| 480.0000 | 42.8100 | 0.8700 | 43.3400 | 0.87 | -1.22% | 0.00% | |
| 490.0000 | 43.0400 | 0.8800 | 43.2900 | 0.87 | -0.58% | 1.15% | |
| 500.0000 | 42.4500 | 0.8800 | 43.2400 | 0.87 | -1.83% | 1.15% | |
| 510.0000 | 42.2900 | 0.8800 | 43.1900 | 0.87 | -2.08% | 1.15% | |
| 520.0000 | 42.1900 | 0.9100 | 43.1400 | 0.88 | -2.20% | 3.41% | |
| 530.0000 | 42.0700 | 0.9200 | 43.0800 | 0.88 | -2.34% | 4.55% | |
| 540.0000 | 42.0900 | 0.9000 | 43.0300 | 0.88 | -2.18% | 2.27% | |
| 550.0000 | 41.9600 | 0.9100 | 42.9800 | 0.88 | -2.37% | 3.41% | |

*Channel Frequency Tested

Table 15.7 Fluid Dielectric Parameters 150MHz HEAD TSL, 4 February 2021

```

*****
                Aprel Laboratory
                Test Result for UIM Dielectric Parameter
                Thu 04/Feb/2021 11:27:31
                Freq   Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
                Test_e  Epsilon of UIM
                Test_s  Sigma of UIM
*****
Freq           FCC_eHFCC_sHTest_e  Test_s
0.1000         54.63  0.72  56.92  0.68
0.1100         54.17  0.73  54.61  0.70
0.1200         53.70  0.74  56.22  0.70
0.1300         53.23  0.75  52.74  0.72
0.1400         52.77  0.75  53.75  0.70
0.1500         52.30  0.76  51.84  0.72
0.1600         51.83  0.77  51.22  0.71
0.1700         51.37  0.77  51.75  0.74
0.1800         50.90  0.78  50.35  0.77
0.1900         50.43  0.79  49.90  0.74
0.2000         49.97  0.80  48.99  0.75

```

Table 15.8 Fluid Dielectric Analysis 150MHz HEAD TSL, 4 February 2021

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|------------|-------------|----------|------------|------------------------|------------------------|------|
| Date: | 4 Feb 2021 | Fluid Temp: | 22.7 | Frequency: | 150MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 100.0000 | 56.9200 | 0.6800 | 54.6300 | 0.72 | 4.19% | -5.56% | |
| 110.0000 | 54.6100 | 0.7000 | 54.1700 | 0.73 | 0.81% | -4.11% | |
| 120.0000 | 56.2200 | 0.7000 | 53.7000 | 0.74 | 4.69% | -5.41% | |
| 130.0000 | 52.7400 | 0.7200 | 53.2300 | 0.75 | -0.92% | -4.00% | |
| 140.0000 | 53.7500 | 0.7000 | 52.7700 | 0.75 | 1.86% | -6.67% | |
| 150.0000 | 51.8400 | 0.7200 | 52.3000 | 0.76 | -0.88% | -5.26% | |
| 160.0000 | 51.2200 | 0.7100 | 51.8300 | 0.77 | -1.18% | -7.79% | |
| 170.0000 | 51.7500 | 0.7400 | 51.3700 | 0.77 | 0.74% | -3.90% | |
| 180.0000 | 50.3500 | 0.7700 | 50.9000 | 0.78 | -1.08% | -1.28% | |
| 190.0000 | 49.9000 | 0.7400 | 50.4300 | 0.79 | -1.05% | -6.33% | |
| 200.0000 | 48.9900 | 0.7500 | 49.9700 | 0.80 | -1.96% | -6.25% | |

*Channel Frequency Tested

Table 15.9 Fluid Dielectric Parameters 150MHz HEAD TSL, 8 February 2021

```

*****
                Aprel Laboratory
                Test Result for UIM Dielectric Parameter
                Mon 08/Feb/2021 14:18:46
                Freq   Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
                Test_e  Epsilon of UIM
                Test_s  Sigma of UIM
*****
Freq           FCC_eHFCC_sHTest_e  Test_s
0.1000         54.63  0.72  52.65  0.70
0.1100         54.17  0.73  54.62  0.73
0.1200         53.70  0.74  51.19  0.73
0.1300         53.23  0.75  55.06  0.73
0.1400         52.77  0.75  52.68  0.74
0.1500         52.30  0.76  51.23  0.76
0.1600         51.83  0.77  49.54  0.75
0.1700         51.37  0.77  49.99  0.75
0.1800         50.90  0.78  48.79  0.80
0.1900         50.43  0.79  49.00  0.78
0.2000         49.97  0.80  48.38  0.79

```

Table 15.10 Fluid Dielectric Analysis 150MHz HEAD TSL, 8 February 2021

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|------------|-------------|----------|------------|------------------------|------------------------|--------|
| Date: | 8 Feb 2021 | Fluid Temp: | 24 | Frequency: | 150MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 100.0000 | | 52.6500 | 0.7000 | 54.6300 | 0.72 | -3.62% | -2.78% |
| 110.0000 | | 54.6200 | 0.7300 | 54.1700 | 0.73 | 0.83% | 0.00% |
| 120.0000 | | 51.1900 | 0.7300 | 53.7000 | 0.74 | -4.67% | -1.35% |
| 130.0000 | | 55.0600 | 0.7300 | 53.2300 | 0.75 | 3.44% | -2.67% |
| 136.0000 | * | 53.6320 | 0.7360 | 52.9540 | 0.75 | 1.28% | -1.87% |
| 140.0000 | | 52.6800 | 0.7400 | 52.7700 | 0.75 | -0.17% | -1.33% |
| 143.0000 | * | 52.2450 | 0.7460 | 52.6290 | 0.75 | -0.73% | -0.93% |
| 150.0000 | * | 51.2300 | 0.7600 | 52.3000 | 0.76 | -2.05% | 0.00% |
| 158.0000 | * | 49.8780 | 0.7520 | 51.9240 | 0.77 | -3.94% | -2.08% |
| 160.0000 | | 49.5400 | 0.7500 | 51.8300 | 0.77 | -4.42% | -2.60% |
| 168.0000 | * | 49.9000 | 0.7500 | 51.4620 | 0.77 | -3.04% | -2.60% |
| 170.0000 | | 49.9900 | 0.7500 | 51.3700 | 0.77 | -2.69% | -2.60% |
| 174.0000 | * | 49.5100 | 0.7700 | 51.1820 | 0.77 | -3.27% | -0.52% |
| 180.0000 | | 48.7900 | 0.8000 | 50.9000 | 0.78 | -4.15% | 2.56% |
| 190.0000 | | 49.0000 | 0.7800 | 50.4300 | 0.79 | -2.84% | -1.27% |
| 200.0000 | | 48.3800 | 0.7900 | 49.9700 | 0.80 | -3.18% | -1.25% |

*Channel Frequency Tested

Table 15.11 Fluid Dielectric Parameters 450MHz HEAD TSL, 11 February 2021

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Thu 11/Feb/2021 16:21:37
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

| Freq | FCC_eHFCC_sH | Test_e | Test_s | |
|--------|--------------|--------|--------|------|
| 0.3500 | 44.70 | 0.87 | 48.83 | 0.81 |
| 0.3600 | 44.58 | 0.87 | 48.35 | 0.83 |
| 0.3700 | 44.46 | 0.87 | 47.66 | 0.85 |
| 0.3800 | 44.34 | 0.87 | 48.03 | 0.86 |
| 0.3900 | 44.22 | 0.87 | 47.81 | 0.87 |
| 0.4000 | 44.10 | 0.87 | 47.24 | 0.86 |
| 0.4100 | 43.98 | 0.87 | 47.18 | 0.86 |
| 0.4200 | 43.86 | 0.87 | 46.95 | 0.87 |
| 0.4300 | 43.74 | 0.87 | 47.02 | 0.87 |
| 0.4400 | 43.62 | 0.87 | 46.53 | 0.88 |
| 0.4500 | 43.50 | 0.87 | 45.70 | 0.90 |
| 0.4600 | 43.45 | 0.87 | 45.95 | 0.91 |
| 0.4700 | 43.40 | 0.87 | 46.08 | 0.91 |
| 0.4800 | 43.34 | 0.87 | 45.13 | 0.93 |
| 0.4900 | 43.29 | 0.87 | 45.01 | 0.94 |
| 0.5000 | 43.24 | 0.87 | 44.75 | 0.95 |
| 0.5100 | 43.19 | 0.87 | 45.21 | 0.95 |
| 0.5200 | 43.14 | 0.88 | 44.84 | 0.95 |
| 0.5300 | 43.08 | 0.88 | 44.24 | 0.98 |
| 0.5400 | 43.03 | 0.88 | 44.28 | 0.96 |
| 0.5500 | 42.98 | 0.88 | 44.22 | 0.96 |

Table 15.12 Fluid Dielectric Analysis 450MHz HEAD TSL, 11 February 2021

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|-------------|-------------|----------|------------|------------------------|------------------------|--------|
| Date: | 11 Feb 2021 | Fluid Temp: | 23.6 | Frequency: | 450MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 350.0000 | | 48.8300 | 0.8100 | 44.7000 | 0.87 | 9.24% | -6.90% |
| 360.0000 | | 48.3500 | 0.8300 | 44.5800 | 0.87 | 8.46% | -4.60% |
| 370.0000 | | 47.6600 | 0.8500 | 44.4600 | 0.87 | 7.20% | -2.30% |
| 378.0000 | * | 47.9560 | 0.8580 | 44.3640 | 0.87 | 8.10% | -1.38% |
| 380.0000 | | 48.0300 | 0.8600 | 44.3400 | 0.87 | 8.32% | -1.15% |
| 390.0000 | | 47.8100 | 0.8700 | 44.2200 | 0.87 | 8.12% | 0.00% |
| 400.0000 | | 47.2400 | 0.8600 | 44.1000 | 0.87 | 7.12% | -1.15% |
| 406.0000 | * | 47.2040 | 0.8600 | 44.0280 | 0.87 | 7.21% | -1.15% |
| 410.0000 | | 47.1800 | 0.8600 | 43.9800 | 0.87 | 7.28% | -1.15% |
| 418.0000 | * | 46.9960 | 0.8680 | 43.8840 | 0.87 | 7.09% | -0.23% |
| 420.0000 | | 46.9500 | 0.8700 | 43.8600 | 0.87 | 7.05% | 0.00% |
| 430.0000 | * | 47.0200 | 0.8700 | 43.7400 | 0.87 | 7.50% | 0.00% |
| 440.0000 | | 46.5300 | 0.8800 | 43.6200 | 0.87 | 6.67% | 1.15% |
| 450.0000 | * | 45.7000 | 0.9000 | 43.5000 | 0.87 | 5.06% | 3.45% |
| 454.0000 | * | 45.8000 | 0.9040 | 43.4800 | 0.87 | 5.34% | 3.91% |
| 456.0000 | * | 45.8500 | 0.9060 | 43.4700 | 0.87 | 5.48% | 4.14% |
| 460.0000 | | 45.9500 | 0.9100 | 43.4500 | 0.87 | 5.75% | 4.60% |
| 470.0000 | | 46.0800 | 0.9100 | 43.4000 | 0.87 | 6.18% | 4.60% |
| 480.0000 | | 45.1300 | 0.9300 | 43.3400 | 0.87 | 4.13% | 6.90% |
| 490.0000 | | 45.0100 | 0.9400 | 43.2900 | 0.87 | 3.97% | 8.05% |
| 500.0000 | | 44.7500 | 0.9500 | 43.2400 | 0.87 | 3.49% | 9.20% |
| 510.0000 | | 45.2100 | 0.9500 | 43.1900 | 0.87 | 4.68% | 9.20% |
| 520.0000 | | 44.8400 | 0.9500 | 43.1400 | 0.88 | 3.94% | 7.95% |
| 530.0000 | | 44.2400 | 0.9800 | 43.0800 | 0.88 | 2.69% | 11.36% |
| 540.0000 | | 44.2800 | 0.9600 | 43.0300 | 0.88 | 2.90% | 9.09% |
| 550.0000 | | 44.2200 | 0.9600 | 42.9800 | 0.88 | 2.89% | 9.09% |

*Channel Frequency Tested

Table 15.13 Fluid Dielectric Parameters 835MHz HEAD TSL, 2 March 2021

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Tue 02/Mar/2021 12:52:10
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 0.7350 | 42.02 | 0.89 | 41.35 | 0.86 |
| 0.7450 | 41.97 | 0.89 | 41.64 | 0.87 |
| 0.7550 | 41.92 | 0.89 | 41.27 | 0.87 |
| 0.7650 | 41.86 | 0.89 | 41.48 | 0.90 |
| 0.7750 | 41.81 | 0.90 | 41.19 | 0.89 |
| 0.7850 | 41.76 | 0.90 | 40.94 | 0.89 |
| 0.7950 | 41.71 | 0.90 | 40.74 | 0.91 |
| 0.8050 | 41.66 | 0.90 | 40.50 | 0.91 |
| 0.8150 | 41.60 | 0.90 | 40.24 | 0.91 |
| 0.8250 | 41.55 | 0.90 | 40.07 | 0.92 |
| 0.8350 | 41.50 | 0.90 | 39.96 | 0.95 |
| 0.8450 | 41.50 | 0.91 | 39.94 | 0.96 |
| 0.8550 | 41.50 | 0.92 | 39.95 | 0.98 |
| 0.8650 | 41.50 | 0.93 | 39.76 | 1.01 |
| 0.8750 | 41.50 | 0.94 | 39.63 | 1.01 |
| 0.8850 | 41.50 | 0.95 | 39.65 | 1.02 |
| 0.8950 | 41.50 | 0.96 | 39.61 | 1.01 |
| 0.9050 | 41.50 | 0.97 | 39.21 | 1.01 |
| 0.9150 | 41.50 | 0.98 | 39.06 | 1.02 |
| 0.9250 | 41.48 | 0.98 | 39.06 | 1.01 |
| 0.9350 | 41.46 | 0.99 | 38.97 | 1.03 |

Table 15.14 Fluid Dielectric Analysis 835MHz HEAD TSL, 11 February 2021

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|-------------------|-------------|-------------|------------|------------------------|------------------------|-------------|
| Date: | 2 Mar 2021 | Fluid Temp: | 22.1 | Frequency: | 835MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 735.0000 | | 41.3500 | 0.8600 | 42.0200 | 0.89 | -1.59% | -3.37% |
| 745.0000 | | 41.6400 | 0.8700 | 41.9700 | 0.89 | -0.79% | -2.25% |
| 755.0000 | | 41.2700 | 0.8700 | 41.9200 | 0.89 | -1.55% | -2.25% |
| 763.0000 | * | 41.4380 | 0.8940 | 41.8720 | 0.89 | -1.04% | 0.45% |
| 765.0000 | | 41.4800 | 0.9000 | 41.8600 | 0.89 | -0.91% | 1.12% |
| 768.0000 | * | 41.3930 | 0.8970 | 41.8450 | 0.89 | -1.08% | 0.45% |
| 772.0000 | * | 41.2770 | 0.8930 | 41.8250 | 0.90 | -1.31% | -0.45% |
| 775.0000 | | 41.1900 | 0.8900 | 41.8100 | 0.90 | -1.48% | -1.11% |
| 776.0000 | * | 41.1650 | 0.8900 | 41.8050 | 0.90 | -1.53% | -1.11% |
| 785.0000 | | 40.9400 | 0.8900 | 41.7600 | 0.90 | -1.96% | -1.11% |
| 795.0000 | | 40.7400 | 0.9100 | 41.7100 | 0.90 | -2.33% | 1.11% |
| 798.0000 | * | 40.6680 | 0.9100 | 41.6950 | 0.90 | -2.46% | 1.11% |
| 805.0000 | | 40.5000 | 0.9100 | 41.6600 | 0.90 | -2.78% | 1.11% |
| 806.0000 | * | 40.4740 | 0.9100 | 41.6540 | 0.90 | -2.83% | 1.11% |
| 815.0000 | | 40.2400 | 0.9100 | 41.6000 | 0.90 | -3.27% | 1.11% |
| 816.0000 | * | 40.2230 | 0.9110 | 41.5950 | 0.90 | -3.30% | 1.22% |
| 825.0000 | | 40.0700 | 0.9200 | 41.5500 | 0.90 | -3.56% | 2.22% |
| 835.0000 | | 39.9600 | 0.9500 | 41.5000 | 0.90 | -3.71% | 5.56% |
| 845.0000 | | 39.9400 | 0.9600 | 41.5000 | 0.91 | -3.76% | 5.49% |
| 851.0000 | * | 39.9460 | 0.9720 | 41.5000 | 0.92 | -3.74% | 6.11% |
| 855.0000 | | 39.9500 | 0.9800 | 41.5000 | 0.92 | -3.73% | 6.52% |
| 861.0000 | * | 39.8360 | 0.9980 | 41.5000 | 0.93 | -4.01% | 7.78% |
| 865.0000 | | 39.7600 | 1.0100 | 41.5000 | 0.93 | -4.19% | 8.60% |
| 875.0000 | | 39.6300 | 1.0100 | 41.5000 | 0.94 | -4.51% | 7.45% |
| 885.0000 | | 39.6500 | 1.0200 | 41.5000 | 0.95 | -4.46% | 7.37% |
| 895.0000 | | 39.6100 | 1.0100 | 41.5000 | 0.96 | -4.55% | 5.21% |
| 905.0000 | | 39.2100 | 1.0100 | 41.5000 | 0.97 | -5.52% | 4.12% |
| 915.0000 | | 39.0600 | 1.0200 | 41.5000 | 0.98 | -5.88% | 4.08% |
| 925.0000 | | 39.0600 | 1.0100 | 41.4800 | 0.98 | -5.83% | 3.06% |
| 935.0000 | | 38.9700 | 1.0300 | 41.4600 | 0.99 | -6.01% | 4.04% |

*Channel Frequency Tested

Table 15.15 Fluid Dielectric Parameters 2450MHz HEAD TSL, 3 March 2021

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Wed 03/Mar/2021 14:57:35
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 2.3500 | 39.38 | 1.71 | 38.24 | 1.79 |
| 2.3600 | 39.36 | 1.72 | 38.47 | 1.82 |
| 2.3700 | 39.34 | 1.73 | 38.40 | 1.83 |
| 2.3800 | 39.32 | 1.74 | 38.30 | 1.84 |
| 2.3900 | 39.31 | 1.75 | 38.23 | 1.84 |
| 2.4000 | 39.29 | 1.76 | 38.28 | 1.85 |
| 2.4100 | 39.27 | 1.76 | 37.97 | 1.88 |
| 2.4200 | 39.25 | 1.77 | 38.02 | 1.87 |
| 2.4300 | 39.24 | 1.78 | 37.71 | 1.89 |
| 2.4400 | 39.22 | 1.79 | 37.78 | 1.91 |
| 2.4500 | 39.20 | 1.80 | 37.80 | 1.91 |
| 2.4600 | 39.19 | 1.81 | 37.91 | 1.93 |
| 2.4700 | 39.17 | 1.82 | 38.05 | 1.95 |
| 2.4800 | 39.16 | 1.83 | 37.75 | 1.95 |
| 2.4900 | 39.15 | 1.84 | 37.90 | 1.96 |
| 2.5000 | 39.14 | 1.85 | 37.97 | 1.96 |
| 2.5100 | 39.12 | 1.87 | 37.72 | 1.98 |
| 2.5200 | 39.11 | 1.88 | 37.70 | 1.99 |
| 2.5300 | 39.10 | 1.89 | 37.52 | 2.02 |
| 2.5400 | 39.09 | 1.90 | 37.52 | 2.00 |
| 2.5500 | 39.07 | 1.91 | 37.50 | 2.04 |

Table 15.16 Fluid Dielectric Analysis 2450MHz HEAD TSL, 3 March 2021

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|-------------------|-------------|-------------|------------|------------------------|------------------------|-------------|
| Date: | 3 Mar 2021 | Fluid Temp: | 23.6 | Frequency: | 2450MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 2350.0000 | 38.2400 | 1.7900 | 39.3800 | 1.71 | -2.89% | 4.68% | |
| 2360.0000 | 38.4700 | 1.8200 | 39.3600 | 1.72 | -2.26% | 5.81% | |
| 2370.0000 | 38.4000 | 1.8300 | 39.3400 | 1.73 | -2.39% | 5.78% | |
| 2380.0000 | 38.3000 | 1.8400 | 39.3200 | 1.74 | -2.59% | 5.75% | |
| 2390.0000 | 38.2300 | 1.8400 | 39.3100 | 1.75 | -2.75% | 5.14% | |
| 2400.0000 | 38.2800 | 1.8500 | 39.2900 | 1.76 | -2.57% | 5.11% | |
| 2410.0000 | 37.9700 | 1.8800 | 39.2700 | 1.76 | -3.31% | 6.82% | |
| 2420.0000 | 38.0200 | 1.8700 | 39.2500 | 1.77 | -3.13% | 5.65% | |
| 2430.0000 | 37.7100 | 1.8900 | 39.2400 | 1.78 | -3.90% | 6.18% | |
| 2440.0000 | 37.7800 | 1.9100 | 39.2200 | 1.79 | -3.67% | 6.70% | |
| 2450.0000 | 37.8000 | 1.9100 | 39.2000 | 1.80 | -3.57% | 6.11% | |
| 2460.0000 | 37.9100 | 1.9300 | 39.1900 | 1.81 | -3.27% | 6.63% | |
| 2470.0000 | 38.0500 | 1.9500 | 39.1700 | 1.82 | -2.86% | 7.14% | |
| 2480.0000 | 37.7500 | 1.9500 | 39.1600 | 1.83 | -3.60% | 6.56% | |
| 2490.0000 | 37.9000 | 1.9600 | 39.1500 | 1.84 | -3.19% | 6.52% | |
| 2500.0000 | 37.9700 | 1.9600 | 39.1400 | 1.85 | -2.99% | 5.95% | |
| 2510.0000 | 37.7200 | 1.9800 | 39.1200 | 1.87 | -3.58% | 5.88% | |
| 2520.0000 | 37.7000 | 1.9900 | 39.1100 | 1.88 | -3.61% | 5.85% | |
| 2530.0000 | 37.5200 | 2.0200 | 39.1000 | 1.89 | -4.04% | 6.88% | |
| 2540.0000 | 37.5200 | 2.0000 | 39.0900 | 1.90 | -4.02% | 5.26% | |
| 2550.0000 | 37.5000 | 2.0400 | 39.0700 | 1.91 | -4.02% | 6.81% | |

*Channel Frequency Tested

Table 15.17 Fluid Dielectric Parameters 5250MHz HEAD TSL, 6 March 2021

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Sat 06/Mar/2021 11:06:38
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

| Freq | FCC_eHFCC_sH | Test_e | Test_s |
|--------|--------------|--------|--------|
| 5.1500 | 36.04 4.60 | 35.96 | 4.48 |
| 5.1600 | 36.03 4.61 | 35.93 | 4.49 |
| 5.1700 | 36.02 4.62 | 35.91 | 4.50 |
| 5.1800 | 36.01 4.63 | 35.88 | 4.51 |
| 5.1900 | 36.00 4.64 | 35.86 | 4.52 |
| 5.2000 | 35.99 4.65 | 35.83 | 4.53 |
| 5.2100 | 35.97 4.67 | 35.80 | 4.54 |
| 5.2200 | 35.96 4.68 | 35.78 | 4.55 |
| 5.2300 | 35.95 4.69 | 35.75 | 4.56 |
| 5.2400 | 35.94 4.70 | 35.73 | 4.57 |
| 5.2500 | 35.93 4.71 | 35.70 | 4.58 |
| 5.2600 | 35.92 4.72 | 35.68 | 4.59 |
| 5.2700 | 35.91 4.73 | 35.65 | 4.60 |
| 5.2800 | 35.89 4.74 | 35.62 | 4.61 |
| 5.2900 | 35.88 4.75 | 35.60 | 4.62 |
| 5.3000 | 35.87 4.76 | 35.57 | 4.63 |
| 5.3100 | 35.86 4.77 | 35.55 | 4.64 |
| 5.3200 | 35.85 4.78 | 35.52 | 4.64 |
| 5.3300 | 35.84 4.79 | 35.50 | 4.65 |
| 5.3400 | 35.83 4.80 | 35.47 | 4.66 |
| 5.3500 | 35.81 4.81 | 35.44 | 4.67 |

Table 15.18 Fluid Dielectric Analysis 5250MHz HEAD TSL, 6 March 2021

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|-------------------|-------------|-------------|------------|------------------------|------------------------|-------------|
| Date: | 6 Mar 2021 | Fluid Temp: | 20.4 | Frequency: | 5250MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 5150.0000 | 35.9600 | 4.4800 | 36.0400 | 4.60 | -0.22% | -2.61% | |
| 5160.0000 | 35.9300 | 4.4900 | 36.0300 | 4.61 | -0.28% | -2.60% | |
| 5170.0000 | 35.9100 | 4.5000 | 36.0200 | 4.62 | -0.31% | -2.60% | |
| 5180.0000 | 35.8800 | 4.5100 | 36.0100 | 4.63 | -0.36% | -2.59% | |
| 5190.0000 | 35.8600 | 4.5200 | 36.0000 | 4.64 | -0.39% | -2.59% | |
| 5200.0000 | 35.8300 | 4.5300 | 35.9900 | 4.65 | -0.44% | -2.58% | |
| 5210.0000 | 35.8000 | 4.5400 | 35.9700 | 4.67 | -0.47% | -2.78% | |
| 5220.0000 | 35.7800 | 4.5500 | 35.9600 | 4.68 | -0.50% | -2.78% | |
| 5230.0000 | 35.7500 | 4.5600 | 35.9500 | 4.69 | -0.56% | -2.77% | |
| 5240.0000 | 35.7300 | 4.5700 | 35.9400 | 4.70 | -0.58% | -2.77% | |
| 5250.0000 | 35.7000 | 4.5800 | 35.9300 | 4.71 | -0.64% | -2.76% | |
| 5260.0000 | 35.6800 | 4.5900 | 35.9200 | 4.72 | -0.67% | -2.75% | |
| 5270.0000 | 35.6500 | 4.6000 | 35.9100 | 4.73 | -0.72% | -2.75% | |
| 5280.0000 | 35.6200 | 4.6100 | 35.8900 | 4.74 | -0.75% | -2.74% | |
| 5290.0000 | 35.6000 | 4.6200 | 35.8800 | 4.75 | -0.78% | -2.74% | |
| 5300.0000 | 35.5700 | 4.6300 | 35.8700 | 4.76 | -0.84% | -2.73% | |
| 5310.0000 | 35.5500 | 4.6400 | 35.8600 | 4.77 | -0.86% | -2.73% | |
| 5320.0000 | 35.5200 | 4.6400 | 35.8500 | 4.78 | -0.92% | -2.93% | |
| 5330.0000 | 35.5000 | 4.6500 | 35.8400 | 4.79 | -0.95% | -2.92% | |
| 5340.0000 | 35.4700 | 4.6600 | 35.8300 | 4.80 | -1.00% | -2.92% | |
| 5350.0000 | 35.4400 | 4.6700 | 35.8100 | 4.81 | -1.03% | -2.91% | |

*Channel Frequency Tested

Table 15.19 Fluid Dielectric Parameters 5750MHz HEAD TSL, 6 March 2021

```

*****
Aprel Laboratory
Test Result for UIM Dielectric Parameter
Sat 06/Mar/2021 11:19:26
Freq Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM
*****

```

| Freq | FCC_eHFCC | sHFCC | Test_e | Test_s |
|--------|-----------|-------|--------|--------|
| 5.6500 | 35.47 | 5.12 | 34.41 | 5.05 |
| 5.6600 | 35.46 | 5.13 | 34.40 | 5.06 |
| 5.6700 | 35.45 | 5.14 | 34.39 | 5.07 |
| 5.6800 | 35.44 | 5.15 | 34.38 | 5.08 |
| 5.6900 | 35.43 | 5.16 | 34.37 | 5.09 |
| 5.7000 | 35.41 | 5.17 | 34.35 | 5.10 |
| 5.7100 | 35.40 | 5.18 | 34.34 | 5.11 |
| 5.7200 | 35.39 | 5.19 | 34.33 | 5.12 |
| 5.7300 | 35.38 | 5.20 | 34.32 | 5.13 |
| 5.7400 | 35.37 | 5.21 | 34.31 | 5.14 |
| 5.7500 | 35.36 | 5.22 | 34.30 | 5.15 |
| 5.7600 | 35.35 | 5.23 | 34.29 | 5.16 |
| 5.7700 | 35.33 | 5.24 | 34.27 | 5.17 |
| 5.7800 | 35.32 | 5.25 | 34.26 | 5.18 |
| 5.7900 | 35.31 | 5.26 | 34.25 | 5.19 |
| 5.8000 | 35.30 | 5.27 | 34.24 | 5.20 |
| 5.8100 | 35.29 | 5.28 | 34.23 | 5.21 |
| 5.8200 | 35.28 | 5.29 | 34.22 | 5.22 |
| 5.8300 | 35.27 | 5.30 | 34.21 | 5.23 |
| 5.8400 | 35.25 | 5.31 | 34.19 | 5.24 |
| 5.8500 | 35.24 | 5.32 | 34.18 | 5.25 |

Table 15.20 Fluid Dielectric Analysis 5750MHz HEAD TSL, 6 March 2021

| FLUID DIELECTRIC PARAMETERS | | | | | | | |
|------------------------------------|-------------------|-------------|-------------|------------|------------------------|------------------------|-------------|
| Date: | 6 Mar 2021 | Fluid Temp: | 20.4 | Frequency: | 5750MHz | Tissue: | Head |
| Freq (MHz) | Test_e | Test_s | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity | |
| 5650.0000 | 34.4100 | 5.0500 | 35.4700 | 5.12 | -2.99% | -1.37% | |
| 5660.0000 | 34.4000 | 5.0600 | 35.4600 | 5.13 | -2.99% | -1.36% | |
| 5670.0000 | 34.3900 | 5.0700 | 35.4500 | 5.14 | -2.99% | -1.36% | |
| 5680.0000 | 34.3800 | 5.0800 | 35.4400 | 5.15 | -2.99% | -1.36% | |
| 5690.0000 | 34.3700 | 5.0900 | 35.4300 | 5.16 | -2.99% | -1.36% | |
| 5700.0000 | 34.3500 | 5.1000 | 35.4100 | 5.17 | -2.99% | -1.35% | |
| 5710.0000 | 34.3400 | 5.1100 | 35.4000 | 5.18 | -2.99% | -1.35% | |
| 5720.0000 | 34.3300 | 5.1200 | 35.3900 | 5.19 | -3.00% | -1.35% | |
| 5730.0000 | 34.3200 | 5.1300 | 35.3800 | 5.20 | -3.00% | -1.35% | |
| 5740.0000 | 34.3100 | 5.1400 | 35.3700 | 5.21 | -3.00% | -1.34% | |
| 5750.0000 | 34.3000 | 5.1500 | 35.3600 | 5.22 | -3.00% | -1.34% | |
| 5760.0000 | 34.2900 | 5.1600 | 35.3500 | 5.23 | -3.00% | -1.34% | |
| 5770.0000 | 34.2700 | 5.1700 | 35.3300 | 5.24 | -3.00% | -1.34% | |
| 5780.0000 | 34.2600 | 5.1800 | 35.3200 | 5.25 | -3.00% | -1.33% | |
| 5790.0000 | 34.2500 | 5.1900 | 35.3100 | 5.26 | -3.00% | -1.33% | |
| 5800.0000 | 34.2400 | 5.2000 | 35.3000 | 5.27 | -3.00% | -1.33% | |
| 5810.0000 | 34.2300 | 5.2100 | 35.2900 | 5.28 | -3.00% | -1.33% | |
| 5820.0000 | 34.2200 | 5.2200 | 35.2800 | 5.29 | -3.00% | -1.32% | |
| 5830.0000 | 34.2100 | 5.2300 | 35.2700 | 5.30 | -3.01% | -1.32% | |
| 5840.0000 | 34.1900 | 5.2400 | 35.2500 | 5.31 | -3.01% | -1.32% | |
| 5850.0000 | 34.1800 | 5.2500 | 35.2400 | 5.32 | -3.01% | -1.32% | |

*Channel Frequency Tested

16.0 SYSTEM VERIFICATION TEST RESULTS

Table 16.1 System Verification Results 835MHz HEAD TSL, 8 September 2020

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | | S/N |
| 8 Sep 2020 | | 835 | D835V2 | | 4d075 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 21.2 | 21 | 32% | 250 | 15 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 39.33 | 41.50 | -5.23% | 0.88 | 0.90 | -2.22% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 2.41 | 2.41 | 0.00% | 1.56 | 1.55 | 0.65% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 9.64 | 9.45 | 2.01% | 6.24 | 6.11 | 2.13% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.2 System Verification Results 150MHz HEAD TSL, 14 September 2020

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | | S/N |
| 14 Sep 2020 | | 150 | CLA-150 | | 4007 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 21.8 | 24 | 37% | 1000 | 0 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 49.90 | 52.30 | -4.59% | 0.69 | 0.76 | -9.21% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 3.60 | 3.89 | -7.46% | 2.39 | 2.57 | -7.00% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 3.60 | 3.87 | -6.98% | 2.39 | 2.56 | -6.64% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.3 System Verification Results 450MHz HEAD TSL, 17 September 2020

| System Verification Test Results | | | | | |
|--|------------------|--------------------|-------------------------|-----------------------|------------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | | S/N |
| 17 Sep 2020 | | 450 | D450V3 | | 1068 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 22.8 | 23 | 40% | 250 | 15 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 43.69 | 43.50 | 0.44% | 0.82 | 0.87 | -5.75% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 1.15 | 1.13 | 1.77% | 0.78 | 0.75 | 3.32% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 4.60 | 4.53 | 1.55% | 3.11 | 3.02 | 3.05% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.4 System Verification Results 150MHz HEAD TSL, 4 February 2021

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | | S/N |
| Feb 4 2021 | | 150 | CLA-150 | | 4007 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 22.7 | 24 | 25% | 1000 | 0 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 51.84 | 52.30 | -0.88% | 0.72 | 0.76 | -5.26% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 3.73 | 3.89 | -4.11% | 2.44 | 2.57 | -5.06% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 3.73 | 3.87 | -3.62% | 2.44 | 2.56 | -4.69% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.5 System Verification Results 150MHz HEAD TSL, 8 February 2021

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | | S/N |
| Feb 8 2021 | | 150 | CLA-150 | | 4007 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 24.0 | 23 | 21% | 1000 | 0 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 51.23 | 52.30 | -2.05% | 0.76 | 0.76 | 0.00% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 3.98 | 3.89 | 2.31% | 2.65 | 2.57 | 3.11% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 3.98 | 3.87 | 2.84% | 2.65 | 2.56 | 3.52% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.6 System Verification Results 450MHz HEAD TSL, 11 February 2021

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | S/N | |
| Feb 11 2021 | | 450 | D450V3 | | 1068 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 23.6 | 25 | 14% | 250 | 15 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 45.70 | 43.50 | 5.06% | 0.90 | 0.87 | 3.45% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 1.14 | 1.13 | 0.88% | 0.78 | 0.75 | 3.05% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 4.56 | 4.53 | 0.66% | 3.10 | 3.02 | 2.78% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.7 System Verification Results 835MHz HEAD TSL, 2 March 2021

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | S/N | |
| March 2 2021 | | 835 | D835V2 | | 4d075 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 22.1 | 25 | 19% | 250 | 15 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 39.96 | 41.50 | -3.71% | 0.95 | 0.90 | 5.56% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 2.33 | 2.41 | -3.32% | 1.49 | 1.55 | -3.87% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 9.32 | 9.45 | -1.38% | 5.96 | 6.11 | -2.45% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.8 System Verification Results 2450MHz HEAD TSL, 3 March 2021

| System Verification Test Results | | | | | |
|--|------------------|--------------------|-------------------------|-----------------------|------------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | | S/N |
| March 3 2021 | | 2450 | D2450V2 | | 825 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 22.4 | 24 | 22% | 250 | 10 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 37.80 | 39.20 | -3.57% | 1.91 | 1.80 | 6.11% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 13.80 | 13.30 | 3.76% | 6.30 | 6.16 | 2.27% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 55.20 | 52.10 | 5.95% | 25.20 | 24.30 | 3.70% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.9 System Verification Results 5250MHz HEAD TSL, 6 March 2021

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | S/N | |
| March 6 2021 | | 5250 | D5GHzV2 | | 1031 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 20.4 | 21 | 25% | 55 | 10 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 35.70 | 35.93 | -0.64% | 4.58 | 4.71 | -2.76% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 4.40 | 4.39 | 0.13% | 1.28 | 1.26 | 1.63% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 80.00 | 80.00 | 0.00% | 23.27 | 22.90 | 1.63% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

Table 16.10 System Verification Results 5750MHz HEAD TSL, 6 March 2021

| System Verification Test Results | | | | | |
|--|---------------|-----------------|----------------------|--------------------|---------------------|
| Date | | Frequency (MHz) | Validation Source | | |
| | | | P/N | | S/N |
| March 6 2021 | | 5750 | D5GHzV2 | | 1031 |
| Fluid Type | Fluid Temp °C | Ambient Temp °C | Ambient Humidity (%) | Forward Power (mW) | Source Spacing (mm) |
| Head | 20.4 | 21 | 25% | 55 | 10 |
| Fluid Parameters | | | | | |
| Permittivity | | | Conductivity | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 34.30 | 35.36 | -3.00% | 5.15 | 5.22 | -1.34% |
| Measured SAR | | | | | |
| 1 gram | | | 10 gram | | |
| Measured | Target | Deviation | Measured | Target | Deviation |
| 4.67 | 4.42 | 5.61% | 1.34 | 1.25 | 6.86% |
| Measured SAR Normalized to 1.0W | | | | | |
| 1 gram | | | 10 gram | | |
| Normalized | Target | Deviation | Normalized | Target | Deviation |
| 84.91 | 80.40 | 5.61% | 24.36 | 22.80 | 6.86% |
| <p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 846224 and IEC 62209-1.</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p> | | | | | |

17.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 17.1 Measurement System




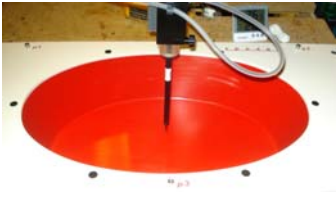

| SAR Measurement System | |
|--|--|
| <p>Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot’s servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.</p> | |
|  |  |
| DASY 6 SAR System with SAM Phantom | DASY 6 Measurement Controller |

Table 17.2 Measurement System Specifications

| Measurement System Specification | |
|---|---|
| Specifications | |
| Positioner | Stäubli Unimation Corp. Robot Model: TX90XL |
| Repeatability | +/- 0.035 mm |
| No. of axis | 6.0 |
| Data Acquisition Electronic (DAE) System | |
| Cell Controller | |
| Processor | Intel(R) Core(TM) i7-7700 |
| Clock Speed | 3.60 GHz |
| Operating System | Windows 10 Professional |
| Data Converter | |
| Features | Signal Amplifier, multiplexer, A/D converter, and control logic |
| Software | Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V10.2(1504) |
| | Postprocessing Software: SEMCAD X, V14.6.12(7470) |
| Connecting Lines | Optical downlink for data and status info., Optical uplink for commands and clock |
| DASY Measurement Server | |
| Function | Real-time data evaluation for field measurements and surface detection |
| Hardware | Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM |
| Connections | COM1, COM2, DAE, Robot, Ethernet, Service Interface |
| E-Field Probe | |
| Model | EX3DV4 |
| Serial No. | 3600 |
| Construction | Triangular core fiber optic detection system |
| Frequency | 10 MHz to 6 GHz |
| Linearity | ±0.2 dB (30 MHz to 3 GHz) |
| Phantom | |
| Type | ELI Elliptical Planar Phantom |
| Shell Material | Fiberglass |
| Thickness | 2mm +/- .2mm |
| Volume | > 30 Liter |

| Measurement System Specification | | |
|--|--|---|
| Probe Specification | | |
| Construction: | Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol) |  |
| Calibration: | In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$) | |
| Frequency: | 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) | |
| Directivity: | ± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis) | |
| Dynamic Range: | 5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB | |
| Surface Detect: | ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces | |
| Dimensions: | Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm | |
| Application: | General dosimetry up to 3 GHz; Compliance tests of mobile phone | |
| | | |
| Phantom Specification | | |
| <p>The SAM V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.</p> | |  |
| | | ELI Phantom |
| Device Positioner Specification | | |
| <p>The DASY4 device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p> | |  |
| | | Device Positioner |

18.0 TEST EQUIPMENT LIST

Table 18.1 Equipment List and Calibration

| Test Equipment List | | | | |
|---|-----------|------------|-----------------|-----------------|
| DESCRIPTION | ASSET NO. | SERIAL NO. | DATE CALIBRATED | CALIBRATION DUE |
| Schmid & Partner DASY 6 System | - | - | - | - |
| -DASY Measurement Server | 00158 | 1078 | CNR | CNR |
| -Robot | 00046 | 599396-01 | CNR | CNR |
| -DAE4 | 00019 | 353 | 17-Mar-20 | 17-Mar-23 |
| -EX3DV4 E-Field Probe | 00213 | 3600 | 25-Mar-20 | 25-Mar-23 |
| -CLA 30 Validation Dipole | 00300 | 1005 | 18-Mar-20 | 18-Mar-23 |
| -CLA150 Validation Dipole | 00251 | 4007 | 18-Mar-20 | 18-Mar-23 |
| -D450V3 Validation Dipole | 00221 | 1068 | 23-Apr-18 | 23-Apr-21 |
| -D750V3 Validation Dipole | 00238 | 1061 | 21-Mar-19 | 21-Mar-22 |
| -D835V2 Validation Dipole | 00217 | 4D075 | 20-Apr-18 | 20-Apr-21 |
| -D900V2 Validation Dipole | 00020 | 54 | 16-Mar-20 | 16-Mar-23 |
| -D2450V2 Validation Dipole** | 00219 | 825 | 24-Apr-18 | 24-Apr-21 |
| -D5GHzV2 Validation Dipole | 00126 | 1031 | 26-Apr-18 | 26-Apr-21 |
| ELI Phantom | 00247 | 1234 | CNR | CNR |
| SAM Phantom | 00154 | 1033 | CNR | CNR |
| HP 85070C Dielectric Probe Kit | 00033 | none | CNR | CNR |
| Gigatronics 8652A Power Meter | 00007 | 1835801 | 26-Mar-19 | 26-Mar-22 |
| Gigatronics 80701A Power Sensor | 00186 | 1837002 | COU | COU |
| Gigatronics 80334A Power Sensor | 00237 | 1837001 | 26-Mar-19 | 26-Mar-22 |
| HP 8753ET Network Analyzer | 00134 | US39170292 | 6-Jan-21 | 6-Jan-24 |
| Rohde & Schwarz SMR20 Signal Generator | 00006 | 100104 | 11-Aug-20 | 11-Aug-23 |
| Amplifier Research 10W1000C Power Amplifier | 00041 | 27887 | CNR | CNR |
| Amplifier Research 5S1G4 Power Amplifier | 00106 | 26235 | CNR | CNR |
| Narda Directional Coupler 3020A | 00064 | - | CNR | CNR |
| Traceable VWR Thermometer | 00334 | 192385455 | 6-Aug-19 | 6-Aug-21 |
| Kangaroo VWR Humidity/Thermometer | 00334 | 192385455 | 5-Aug-19 | 6-Aug-22 |
| Bipolar Power Supply 6299A | 00086 | 1144A02155 | CNR | CNR |
| DC-18G 10W 30db Attenuator | 00102 | - | COU | COU |
| R&S FSP40 Spectrum Analyzer | 00241 | 100500 | 15-May-18 | 15-May-21 |
| RF Cable-SMA | 00311 | - | CNR | CNR |
| HP Calibration Kit | 00145 | - | CNR | CNR |

CNR = Calibration Not Required

SB=Stand By

COU = Calibrate on Use

*Verified and Extended

* *Per KDB 865664 3.2.2; Supporting documentation is included in the report for validation dipoles exceeding the recommended annual calibration cycle.

When applicable, reference Appendix F

Note: Per KDB 865664, Dipoles are evaluated annually for return loss and impedance. The dipole's SAR target can only be assessed by the SAR equipment manufacturer and remains the target until the dipole is recalibrated by the manufacturer. The dipole's SAR is evaluated and compared to this target during each and every System Verification which is performed prior to and/or during each DUT SAR evaluation. The results of these verifications are shown in Section 16.

19.0 SYSTEM VALIDATION SUMMARY

| System Validation Summary | | | | | | | | | | | |
|---------------------------|-----------------|-------------|-----------|-------------------|------------|--------|--------------------|--------------|--------------------|-----------|----------|
| Frequency (MHz) | Validation Date | Probe Model | Probe S/N | Validation Source | Source S/N | Tissue | Tissue Dielectrics | | Validation Results | | |
| | | | | | | | Permittivity | Conductivity | Sensitivity | Linearity | Isotropy |
| 30 | 31-May-20 | EX3DV4 | 3600 | CLA-30 | 1005 | Head | 52.40 | 0.75 | Pass | Pass | Pass |
| 150 | 20-May-20 | EX3DV4 | 3600 | CLA-150 | 4007 | Head | 52.59 | 0.76 | Pass | Pass | Pass |
| 450 | 12-Aug-20 | EX3DV4 | 3600 | D450V3 | 1068 | Head | 43.64 | 0.84 | Pass | Pass | Pass |
| 750 | 20-Jun-19 | EX3DV4 | 3600 | D750V3 | 1061 | Head | 44.27 | 0.83 | Pass | Pass | Pass |
| 835 | 17-Aug-20 | EX3DV4 | 3600 | D835V2 | 4d075 | Head | 40.60 | 0.87 | Pass | Pass | Pass |
| 900 | 20-Aug-20 | EX3DV4 | 3600 | D900V2 | 045 | Head | 39.09 | 0.94 | Pass | Pass | Pass |
| 1640 | 5-Jul-18 | EX3DV4 | 3600 | 1620-S-2 | 207-00102 | Head | 39.87 | 1.27 | Pass | Pass | Pass |
| 1800 | 18-Jun-19 | EX3DV4 | 3600 | D1800V2 | 247 | Head | 54.77 | 1.53 | Pass | Pass | Pass |
| 2450 | 27-May-20 | EX3DV4 | 3600 | D2450V2 | 825 | Head | 37.21 | 1.95 | Pass | Pass | Pass |
| 5250 | 29-May-20 | EX3DV4 | 3600 | D5GHzV2 | 1031 | Head | 34.44 | 5.07 | Pass | Pass | Pass |
| 5750 | 28-May-20 | EX3DV4 | 3600 | D5GHzV2 | 1031 | Head | 35.16 | 5.56 | Pass | Pass | Pass |

20.0 FLUID COMPOSITION

Table 20.1 Fluid Composition 150MHz HEAD TSL

| 150 | | 150MHz Head | | |
|---|-------|---------------------|--------------------|-----------------------------|
| Tissue Simulating Liquid (TSL) Composition | | | | |
| Component by Percent Weight | | | | |
| Water | Sugar | Salt ⁽¹⁾ | HEC ⁽²⁾ | Bacteriacide ⁽³⁾ |
| 38.35 | 55.5 | 5.15 | 0.9 | 0.1 |

- (1) Non-Iodinized
- (2) **HydroxyEthyl-Cellulose**: Sigma-Aldrich P/N 54290-500g
- (3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 20.2 Fluid Composition 450MHz HEAD TSL

| 450 | | 450MHz Head | | |
|---|-------|---------------------|--------------------|-----------------------------|
| Tissue Simulating Liquid (TSL) Composition | | | | |
| Component by Percent Weight | | | | |
| Water | Sugar | Salt ⁽¹⁾ | HEC ⁽²⁾ | Bacteriacide ⁽³⁾ |
| 38.56 | 56.32 | 3.95 | 0.98 | 0.19 |

- (1) Non-Iodinized
- (2) **HydroxyEthyl-Cellulose**: Sigma-Aldrich P/N 54290-500g
- (3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 20.3 Fluid Composition 835MHz HEAD TSL

| 835 | | 835MHz Head | | |
|---|-------|---------------------|--------------------|-----------------------------|
| Tissue Simulating Liquid (TSL) Composition | | | | |
| Component by Percent Weight | | | | |
| Water | Sugar | Salt ⁽¹⁾ | HEC ⁽²⁾ | Bacteriacide ⁽³⁾ |
| 40.71 | 56.63 | 1.48 | 0.99 | 0.19 |

- (1) Non-Iodinized
- (2) **HydroxyEthyl-Cellulose**: Sigma-Aldrich P/N 54290-500g
- (3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 20.4 Fluid Composition 2450MHz HEAD TSL

| 2450 | | 2450MHz Head | | |
|--|--------|---------------------|--------------------|----------------------------|
| Tissue Simulating Liquid (TSL) Composition | | | | |
| Component by Percent Weight | | | | |
| Water | Glycol | Salt ⁽¹⁾ | HEC ⁽²⁾ | Bactericide ⁽³⁾ |
| 52.0 | 48.0 | 0.0 | 0.0 | 0.0 |

(1) Non-Iodinized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 20.5 Fluid Composition 5250MHz Head TSL AND 5750MHz Head TSL

This is a proprietary composition by SPEAG.

APPENDIX A – SYSTEM VERIFICATION PLOTS

Plot A.1 System Verification Plot, 835MHz, 8 September 2020

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d075
Procedure Name: SPC 835H,Target=[2.169][2.41][2.651]W/kg,Input 250mW 2

Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1
 Medium parameters used: f = 835 MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 39.33$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Date/Time: 9/8/2020 2:41:28 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.17, 8.17, 8.17) @ 835 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 835H,Target=[2.169][2.41][2.651]W/kg,Input 250mW 2/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.60 W/kg

SPC/SPC 835H,Target=[2.169][2.41][2.651]W/kg,Input 250mW 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 54.32 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.56 W/kg

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 2.60 W/kg

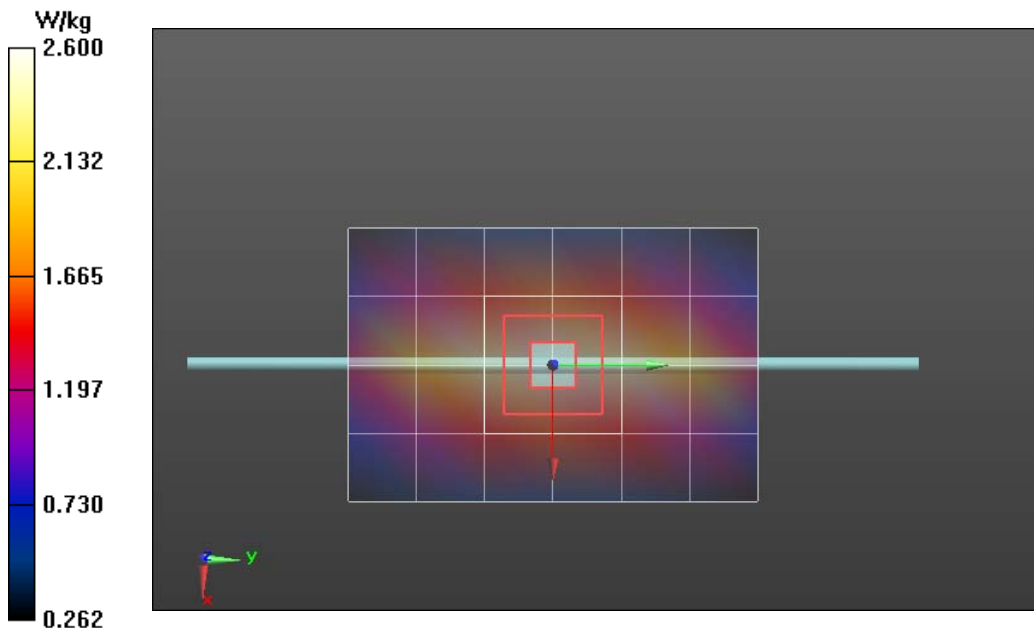

Plot A.2 System Verification Plot, 150MHz, 14 September 2020

DUT: CLA-150; Type: CLA-150; Serial: 4007
Procedure Name: SPC 150H Input=1.0W, Target=3.90W/kg

Communication System: UID 0, CW (0); Frequency: 150 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 150 \text{ MHz}$; $\sigma = 0.69 \text{ S/m}$; $\epsilon_r = 49.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


Date/Time: 9/14/2020 1:42:14 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(9.59, 9.59, 9.59) @ 150 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 150H Input=1.0W, Target=3.90W/kg/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 3.66 W/kg

SPC/SPC 150H Input=1.0W, Target=3.90W/kg/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 73.03 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 5.56 W/kg
SAR(1 g) = 3.6 W/kg; SAR(10 g) = 2.39 W/kg
 Ratio of SAR at M2 to SAR at M1 = 67.6%
 Maximum value of SAR (measured) = 3.87 W/kg

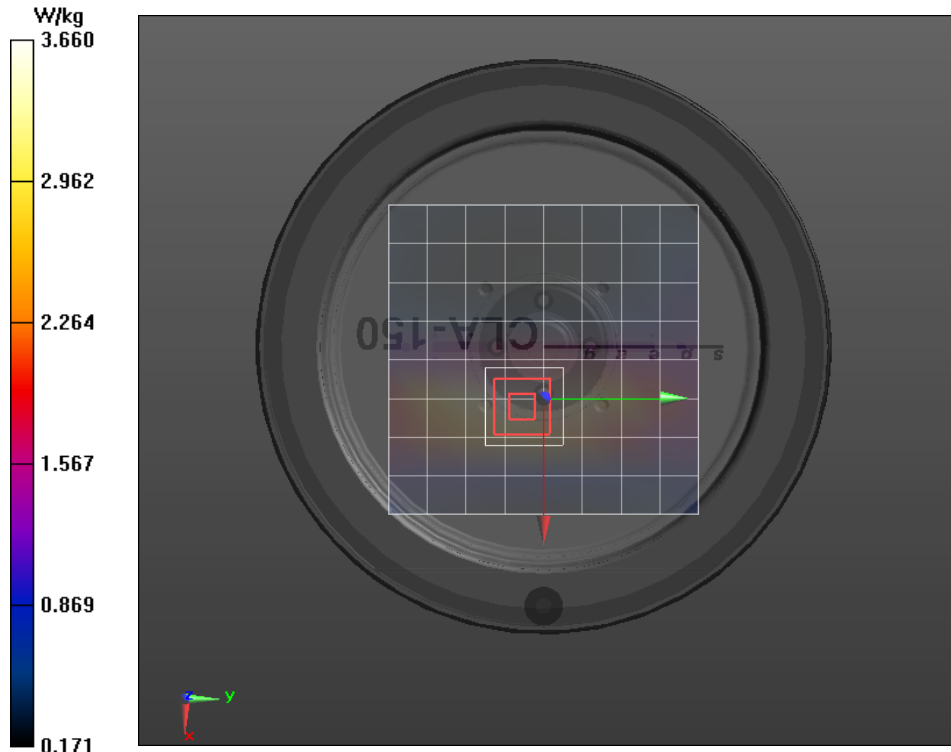

Plot A.3 System Verification Plot, 450MHz, 17 September 2020

DUT: Dipole 450 MHz D450V3; Type: D450V3; Serial: D450V3 - SN:1068
Procedure Name: SPC 450H, Input 250mW, Target[1.13][0.753] W/kg

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.82 \text{ S/m}$; $\epsilon_r = 43.69$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


Date/Time: 9/17/2020 12:05:44 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.84, 8.84, 8.84) @ 450 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 450H, Input 250mW, Target[1.13][0.753] W/kg/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.00890 W/kg

SPC/SPC 450H, Input 250mW, Target[1.13][0.753] W/kg/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 3.535 V/m; Power Drift = -0.31 dB
 Peak SAR (extrapolated) = 0.0210 W/kg
SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00637 W/kg
 Ratio of SAR at M2 to SAR at M1 = 56.4%
 Maximum value of SAR (measured) = 0.0111 W/kg

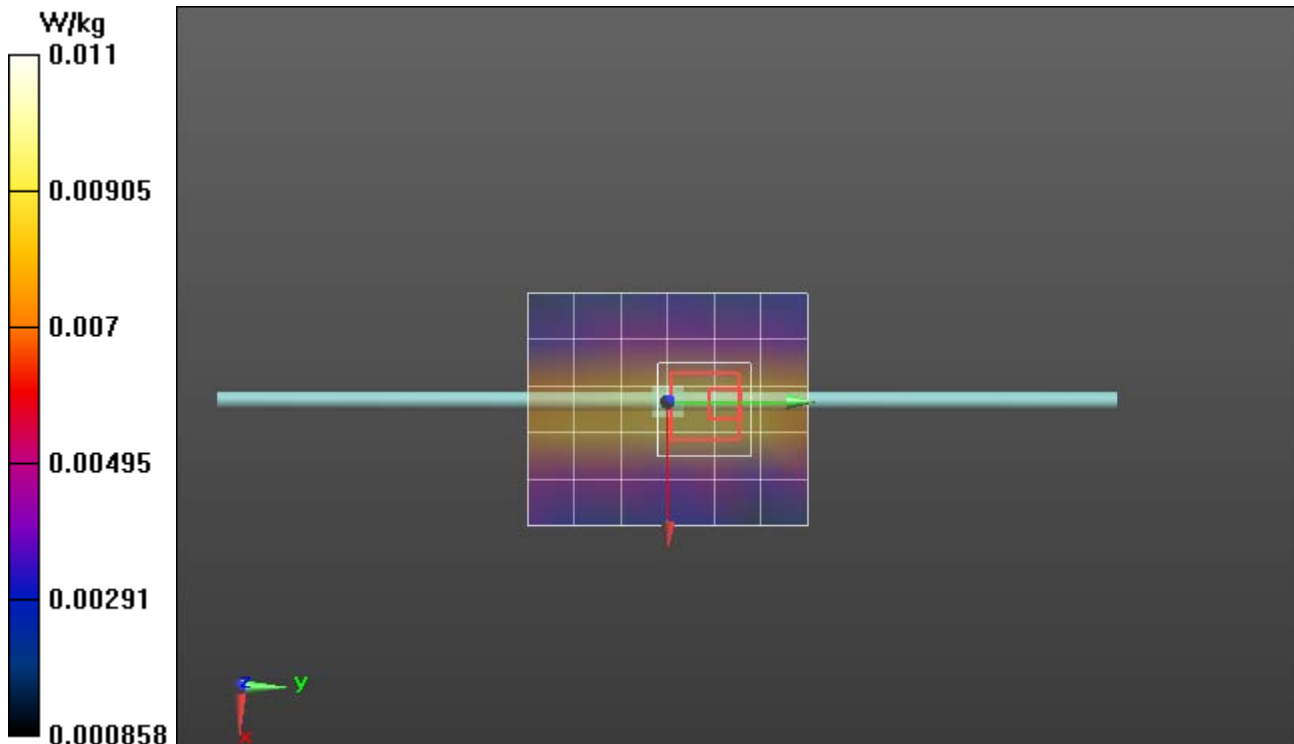

Plot A.4 System Verification Plot, 150MHz, 4 February 2021

DUT: CLA-150; Type: CLA-150; Serial: 4007
Procedure Name: SPC 150H Input=1.0W, Target=3.89W/kg

Communication System: UID 0, CW (0); Frequency: 150 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 150 \text{ MHz}$; $\sigma = 0.72 \text{ S/m}$; $\epsilon_r = 51.84$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


Date/Time: 2/4/2021 12:27:56 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(9.59, 9.59, 9.59) @ 150 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 150H Input=1.0W, Target=3.89W/kg/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 3.75 W/kg

SPC/SPC 150H Input=1.0W, Target=3.89W/kg/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 72.25 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 5.80 W/kg
SAR(1 g) = 3.73 W/kg; SAR(10 g) = 2.44 W/kg
 Smallest distance from peaks to all points 3 dB below = 20.2 mm
 Ratio of SAR at M2 to SAR at M1 = 66.8%
 Maximum value of SAR (measured) = 3.99 W/kg

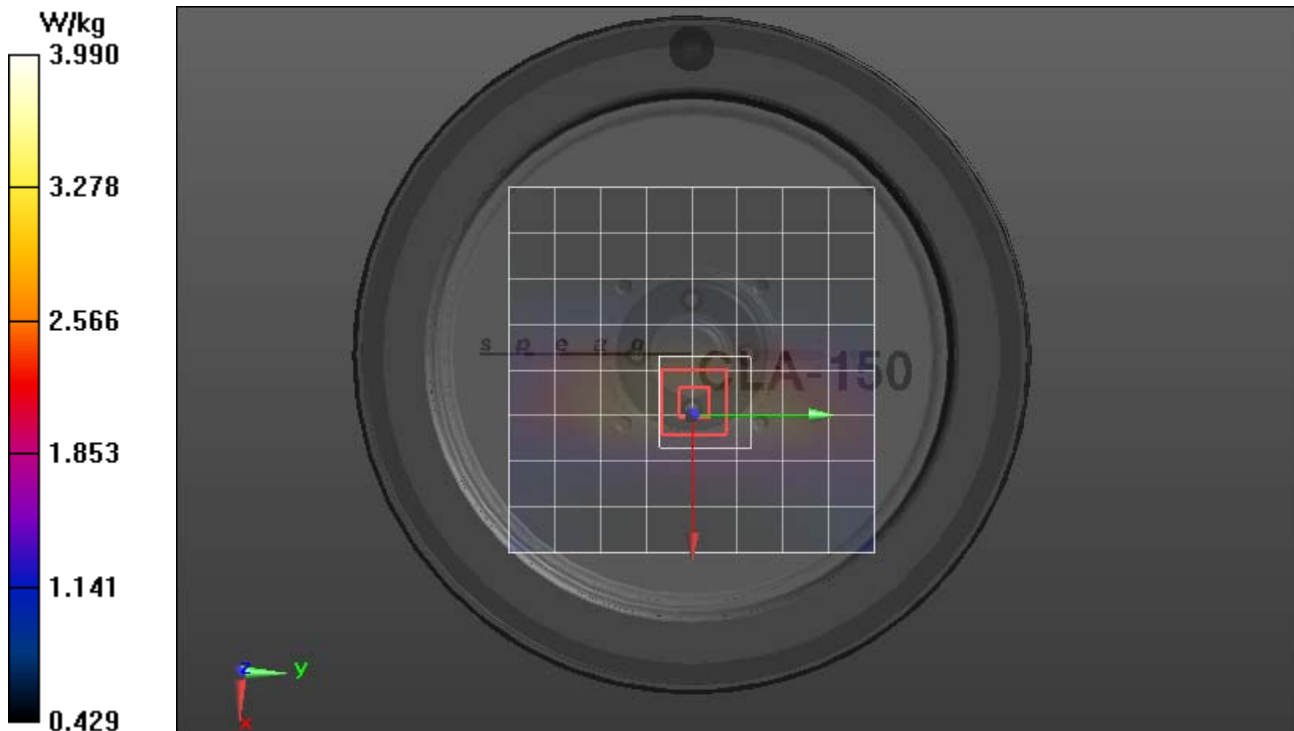

Plot A.5 System Verification Plot, 150MHz, 8 February 2021

DUT: CLA-150; Type: CLA-150; Serial: 4007
Procedure Name: SPC 150H Input=1.0W, Target=3.89W/kg

Communication System: UID 0, CW (0); Frequency: 150 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 150 \text{ MHz}$; $\sigma = 0.76 \text{ S/m}$; $\epsilon_r = 51.23$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Date/Time: 2/8/2021 2:52:04 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(9.59, 9.59, 9.59) @ 150 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 150H Input=1.0W, Target=3.89W/kg/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.75 W/kg

SPC/SPC 150H Input=1.0W, Target=3.89W/kg/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 67.90 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 6.11 W/kg
SAR(1 g) = 3.98 W/kg; SAR(10 g) = 2.65 W/kg
Smallest distance from peaks to all points 3 dB below = 21.2 mm
Ratio of SAR at M2 to SAR at M1 = 67.6%
Maximum value of SAR (measured) = 4.27 W/kg

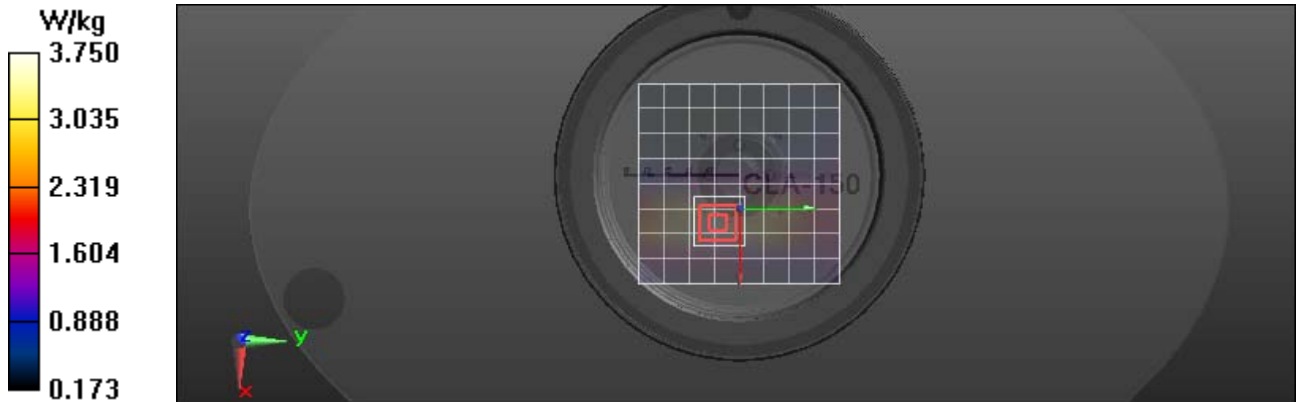

Plot A.6 System Verification Plot, 450MHz, 11 February 2021

DUT: Dipole 450 MHz D450V3; Type: D450V3; Serial: D450V3 - SN:1068
Procedure Name: SPC 450H, Input 250mW, Target[1.13][0.753] W/kg

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 45.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 2/11/2021 5:13:08 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.84, 8.84, 8.84) @ 450 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 450H, Input 250mW, Target[1.13][0.753] W/kg/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.22 W/kg

SPC/SPC 450H, Input 250mW, Target[1.13][0.753] W/kg/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 36.56 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.776 W/kg

Ratio of SAR at M2 to SAR at M1 = 69.2%

Maximum value of SAR (measured) = 1.22 W/kg

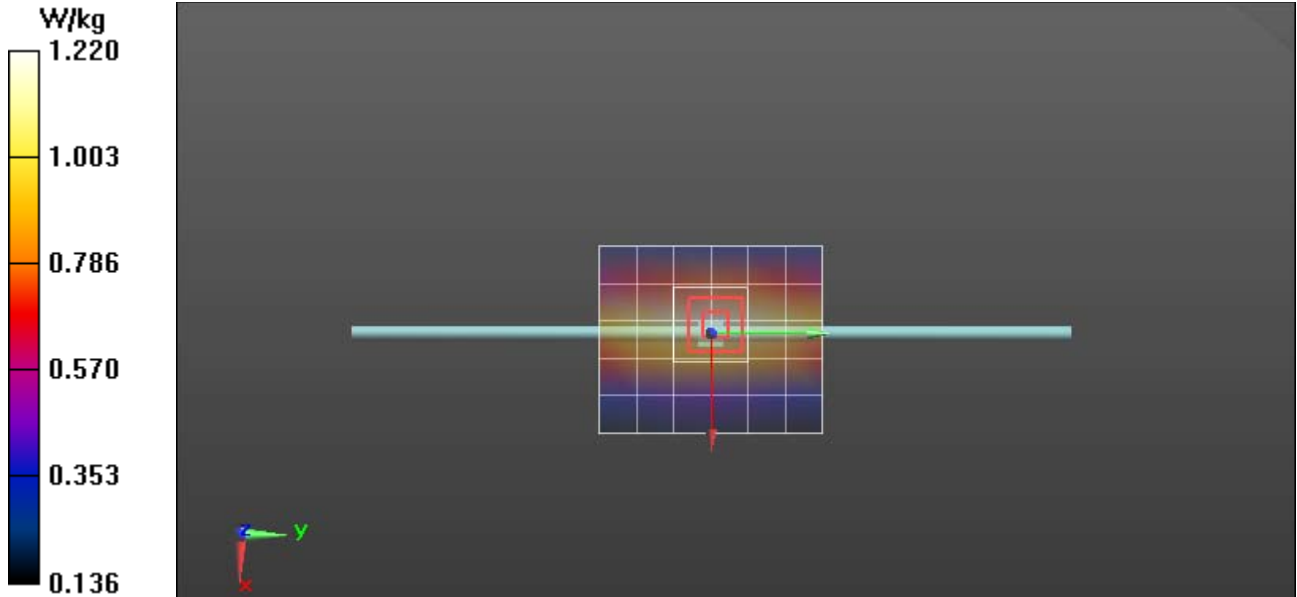

Plot A.7 System Verification Plot, 835MHz, 2 March 2021

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d075
Procedure Name: SPC 835H,Target=2.41W/kg,1.55W/kg,Input 250mW

Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 39.96$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 3/2/2021 1:06:52 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.17, 8.17, 8.17) @ 835 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 835H,Target=2.41W/kg,1.55W/kg,Input 250mW/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.50 W/kg

SPC/SPC 835H,Target=2.41W/kg,1.55W/kg,Input 250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 51.30 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.49 W/kg

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 2.52 W/kg

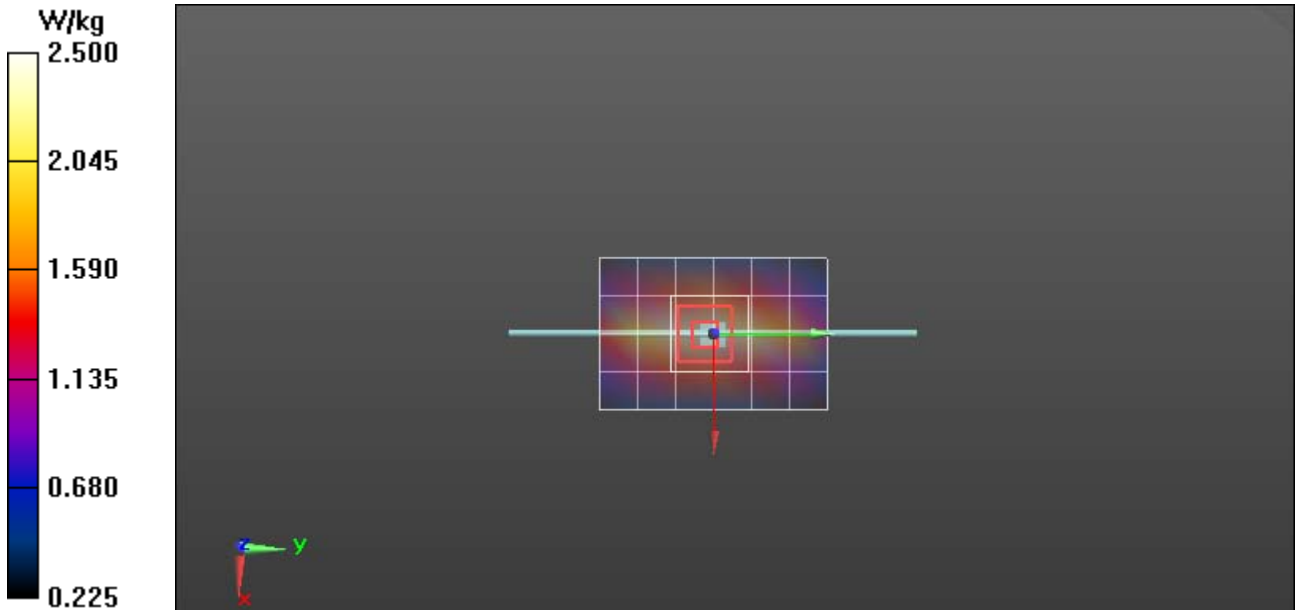

Plot A.7 System Verification Plot, 2450MHz, 3 March 2021

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825
Procedure Name: SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Date/Time: 3/3/2021 4:05:17 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.45, 6.45, 6.45) @ 2450 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg/Area Scan (4x9x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 13.8 W/kg

SPC/SPC 2450H Input=250mw, Target=[14.63][13.3][11.97]W/kg/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.88 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.3 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 15.6 W/kg

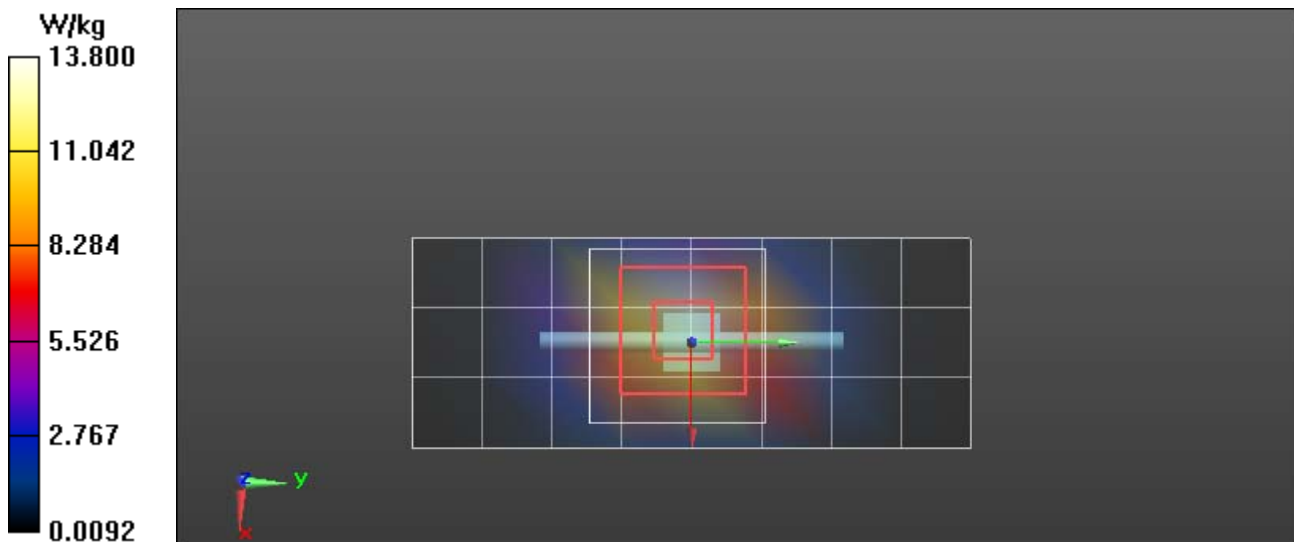

Plot A.8 System Verification Plot, 5250MHz, 6 March 2021

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1031
Procedure Name: SPC 5250H Input=55 mw, Target= [3.96][4.4][4.83], Target=7.99W/kg@100mw

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.58$ S/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


Date/Time: 3/6/2021 12:01:24 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.47, 4.47, 4.47) @ 5250 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 5250H Input=55 mw, Target= [3.96][4.4][4.83], Target=7.99W/kg@100mw/Area Scan (4x7x1): Measurement grid:
 dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 6.44 W/kg

SPC/SPC 5250H Input=55 mw, Target= [3.96][4.4][4.83], Target=7.99W/kg@100mw/Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 30.57 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 17.4 W/kg
SAR(1 g) = 4.4 W/kg; SAR(10 g) = 1.28 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.4 mm
 Ratio of SAR at M2 to SAR at M1 = 54.9%
 Maximum value of SAR (measured) = 9.17 W/kg

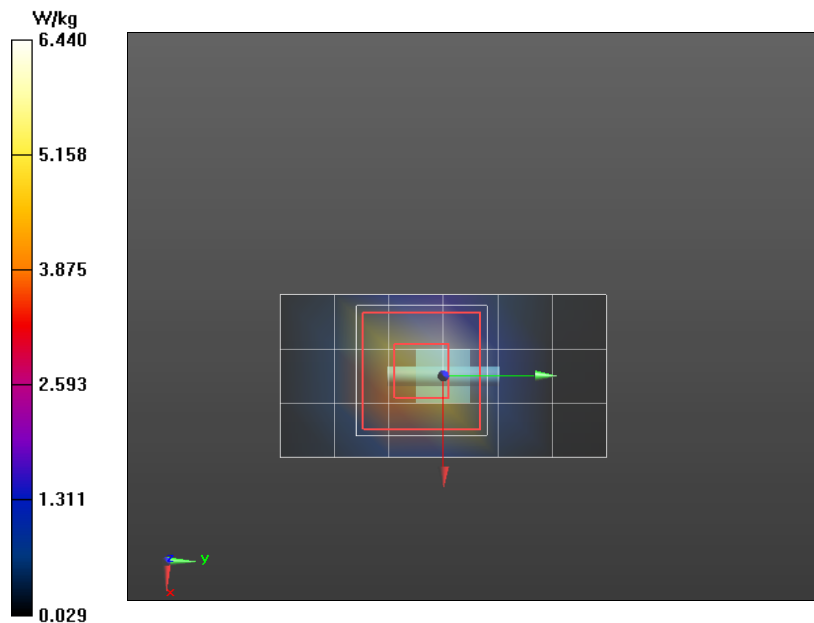

Plot A.9 System Verification Plot, 5750MHz, 6 March 2021

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx
Procedure Name: SPC 5750H Input=55 mw, Target=[3.978][4.42][4.862], Target=8.04W/kg@100mw

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

Date/Time: 3/6/2021 12:27:12 PM


DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.12, 4.12, 4.12) @ 5750 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 5750H Input=55 mw, Target=[3.978][4.42][4.862], Target=8.04W/kg@100mw/Area Scan (4x7x1): Measurement grid:
 dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 6.64 W/kg

SPC/SPC 5750H Input=55 mw, Target=[3.978][4.42][4.862], Target=8.04W/kg@100mw/Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 27.98 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 20.6 W/kg
SAR(1 g) = 4.67 W/kg; SAR(10 g) = 1.34 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.5 mm
 Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 9.85 W/kg

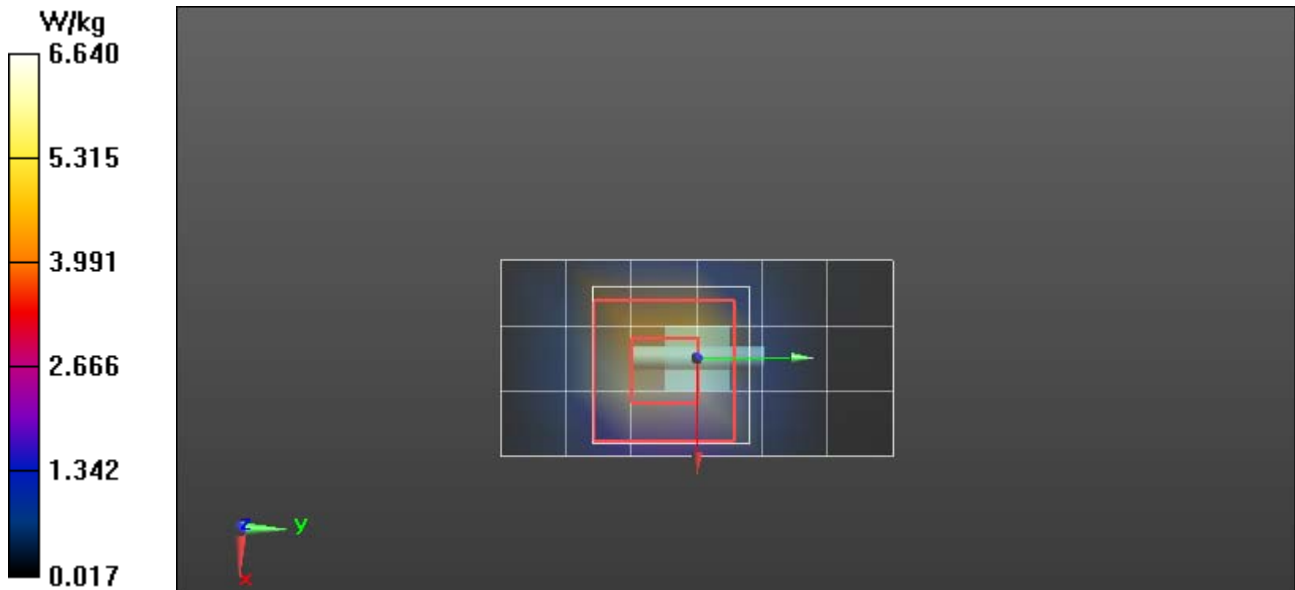

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B1-3 Baseline

DUT: Harris XL-400P Fire Radio; Type: PTT; Serial: Not Specified
Procedure Name: B1-3 - Baseline comparison w/ Eng Eval 456MHz Body, BC

Communication System: UID 0, CW (0); Frequency: 456 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 456 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 45.85$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Date/Time: 2/12/2021 9:50:50 AM
 DASY5 Configuration:


- Probe: EX3DV4 - SN3600; ConvF(8.84, 8.84, 8.84) @ 456 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)


450H/B1-3 - Baseline comparison w/ Eng Eval 456MHz Body, BC/Area Scan (8x28x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 12.5 W/kg

450H/B1-3 - Baseline comparison w/ Eng Eval 456MHz Body, BC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 87.20 V/m; Power Drift = -0.19 dB
 Peak SAR (extrapolated) = 18.5 W/kg
SAR(1 g) = 11.7 W/kg; SAR(10 g) = 7.85 W/kg
 Ratio of SAR at M2 to SAR at M1 = 67.6%

[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 12.4 W/kg

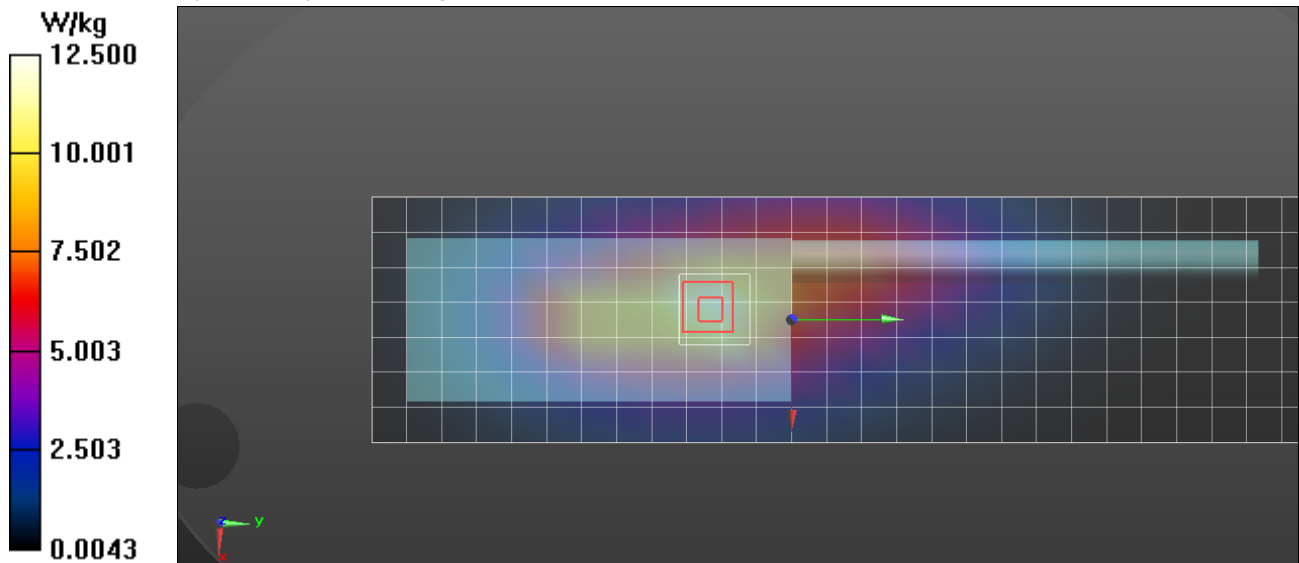

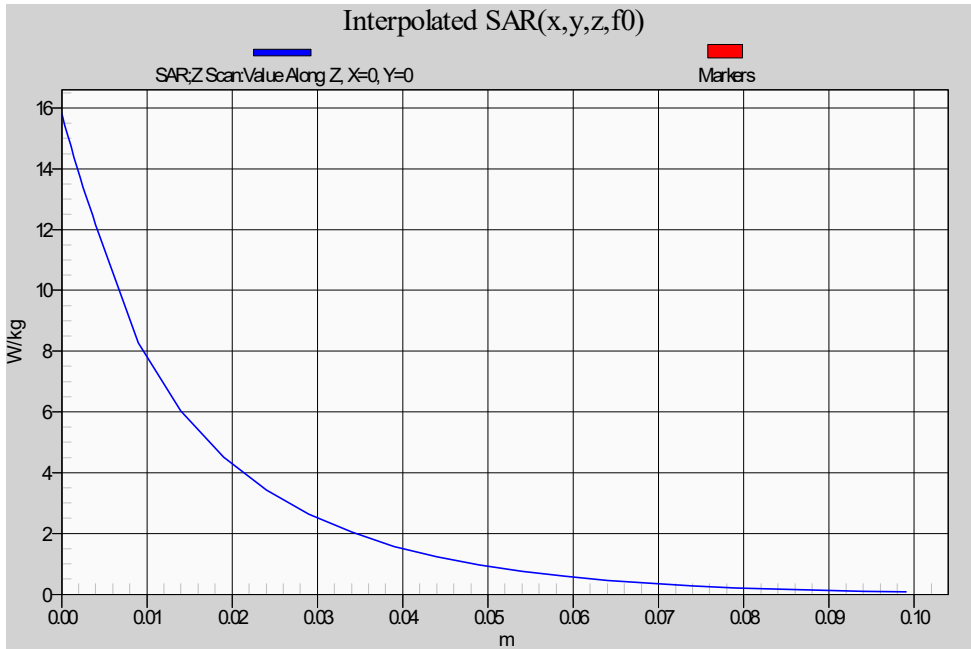

Plot F8-15

DUT: Harris XL-400P Fire Radio; Type: PTT; Serial: Not Specified
Procedure Name: F8-15 - XL-400P 454MHz Face

Communication System: UID 0, CW (0); Frequency: 454 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 454 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 45.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Date/Time: 2/12/2021 5:50:01 PM
 DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(8.84, 8.84, 8.84) @ 454 MHz; Calibrated: 3/25/2020
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 3/17/2020
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

450H/F8-15 - XL-400P 454MHz Face/Area Scan (8x28x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 4.64 W/kg

450H/F8-15 - XL-400P 454MHz Face/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 66.56 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 9.88 W/kg
SAR(1 g) = 5.58 W/kg; SAR(10 g) = 3.87 W/kg
 Smallest distance from peaks to all points 3 dB below = 3.4 mm
 Ratio of SAR at M2 to SAR at M1 = 77.7%

[Info: Interpolated medium parameters used for SAR evaluation.](#)
 Maximum value of SAR (measured) = 4.82 W/kg

