




**Plot 8-476: OBW 99%, 774.9875 MHz, C4FM**

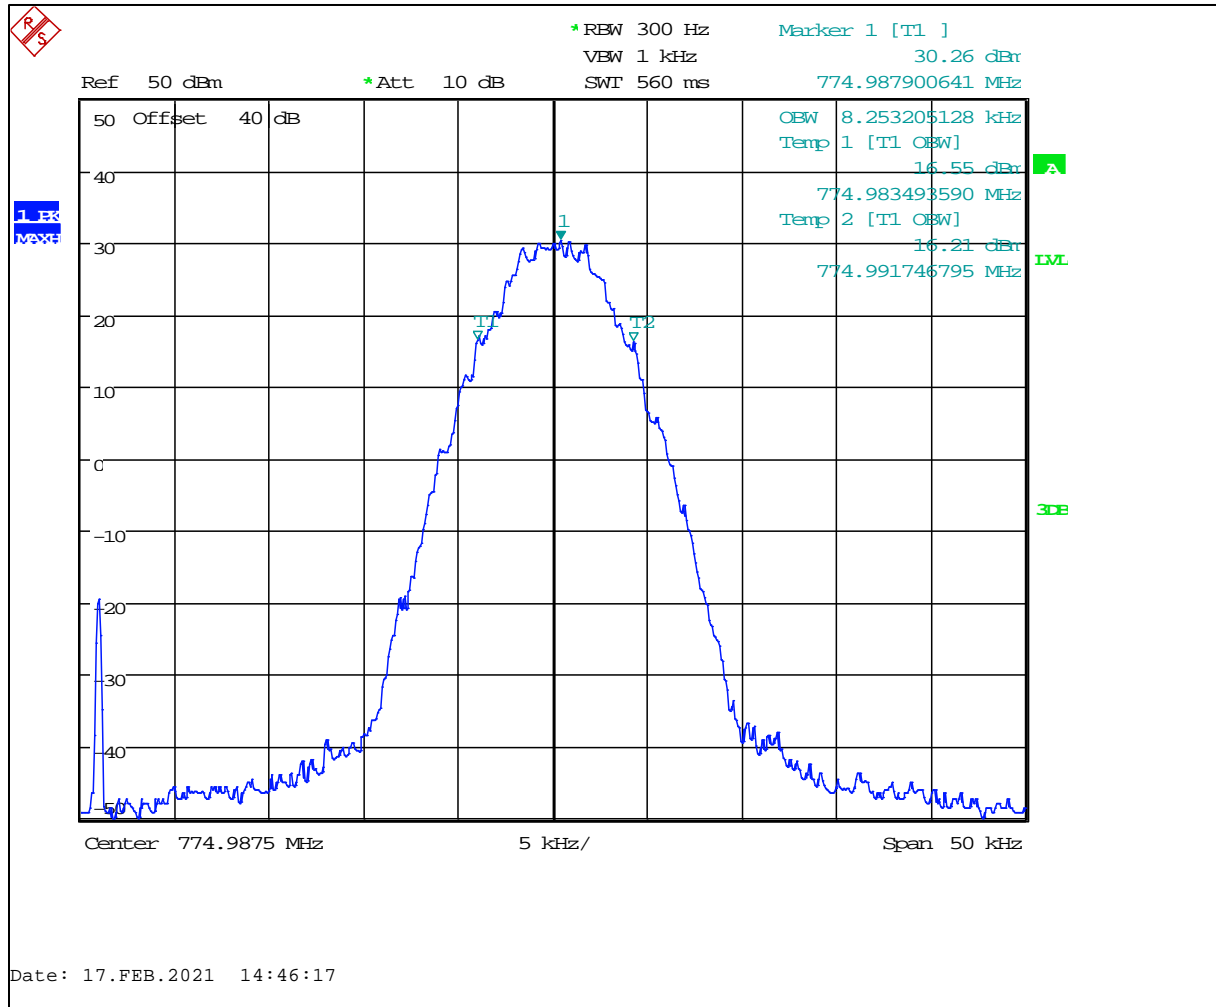


**Plot 8-477: OBW 99%, 774.9875 MHz, H-CPM TDMA**

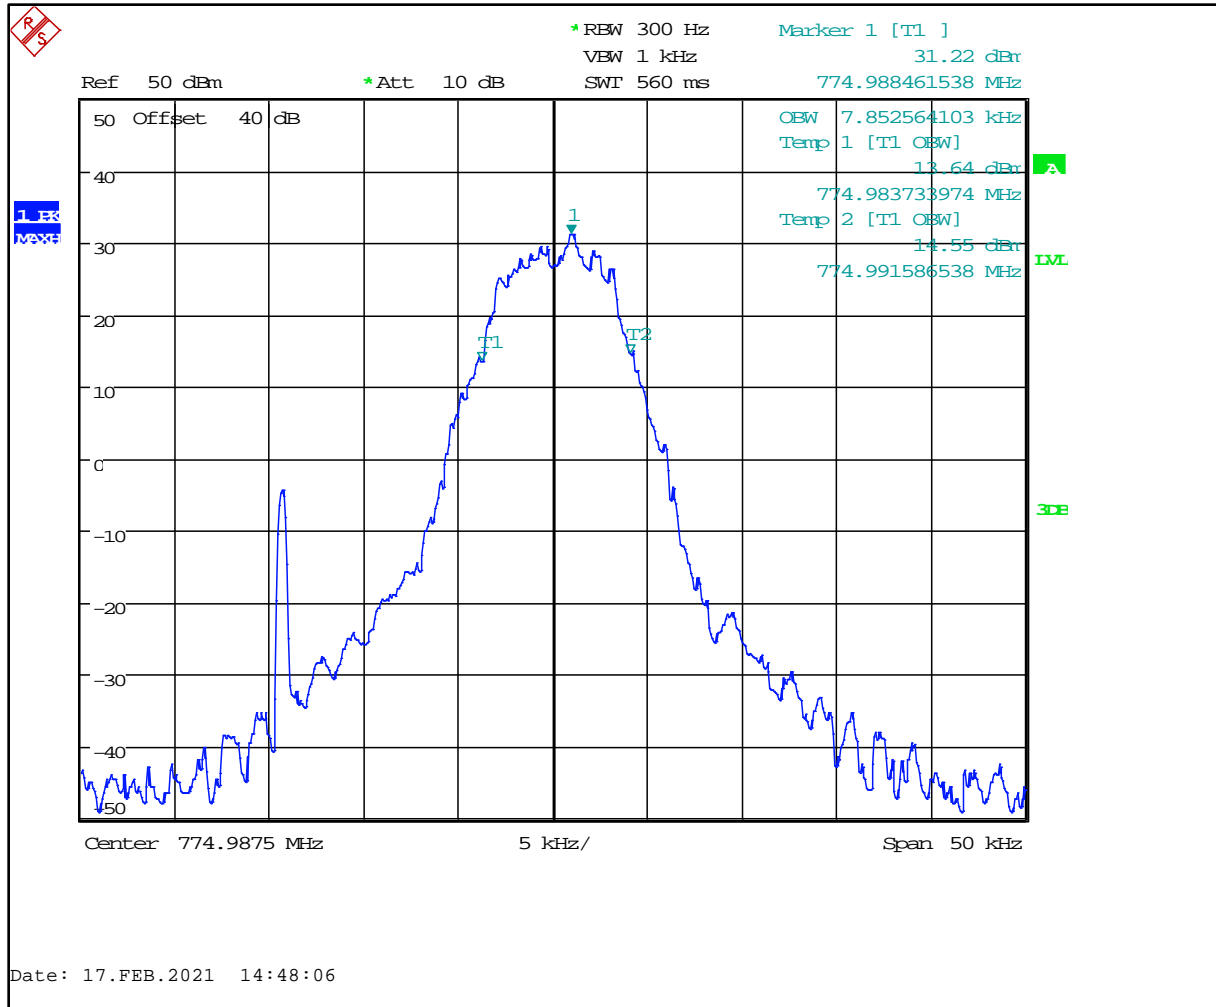

**Plot 8-478: OBW 99%, 774.9875 MHz, NB 2 FSK**

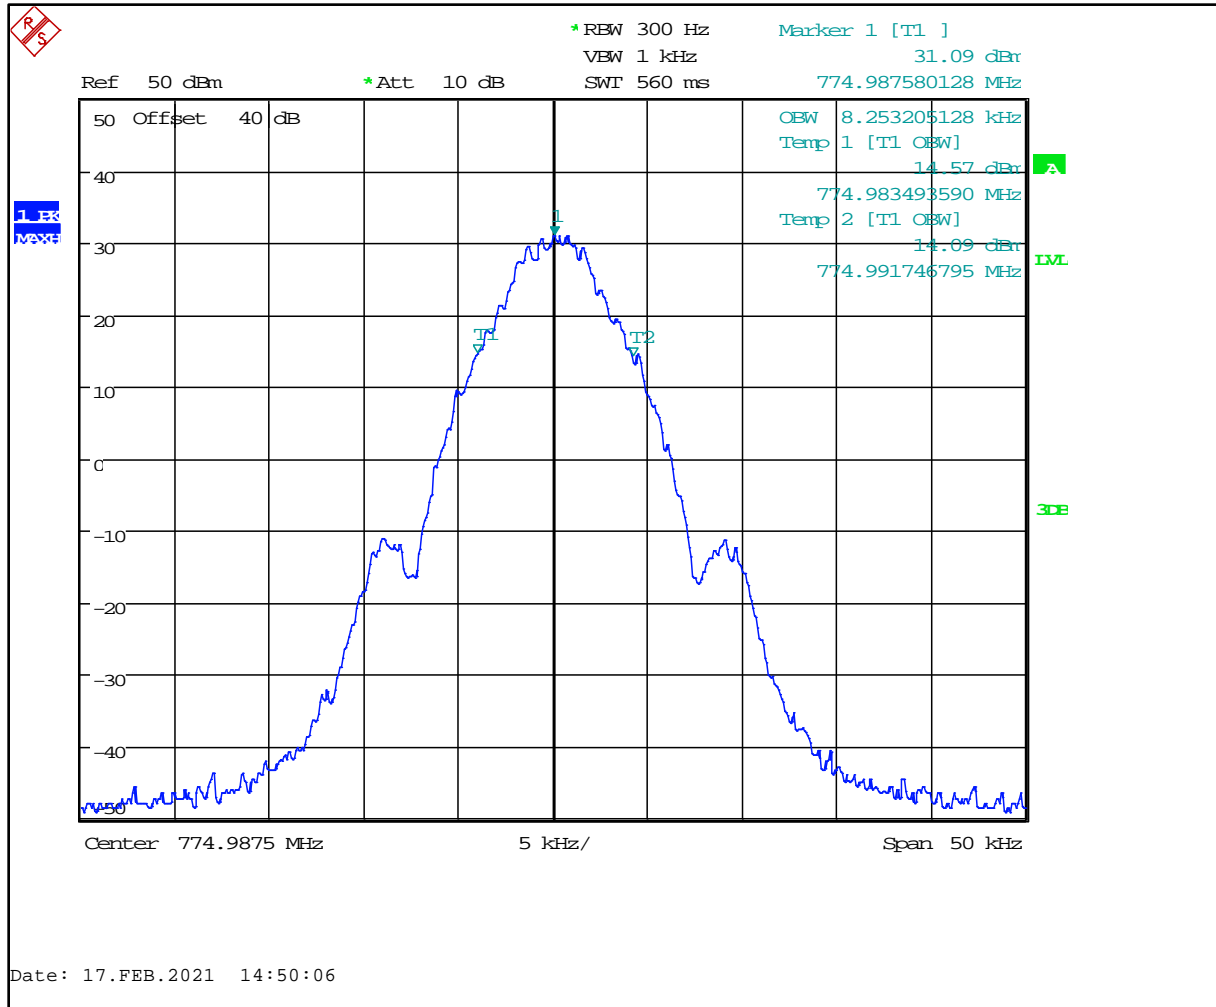


**Plot 8-479: OBW 99%, 774.9875 MHz, NPSPAC 2 FSK**

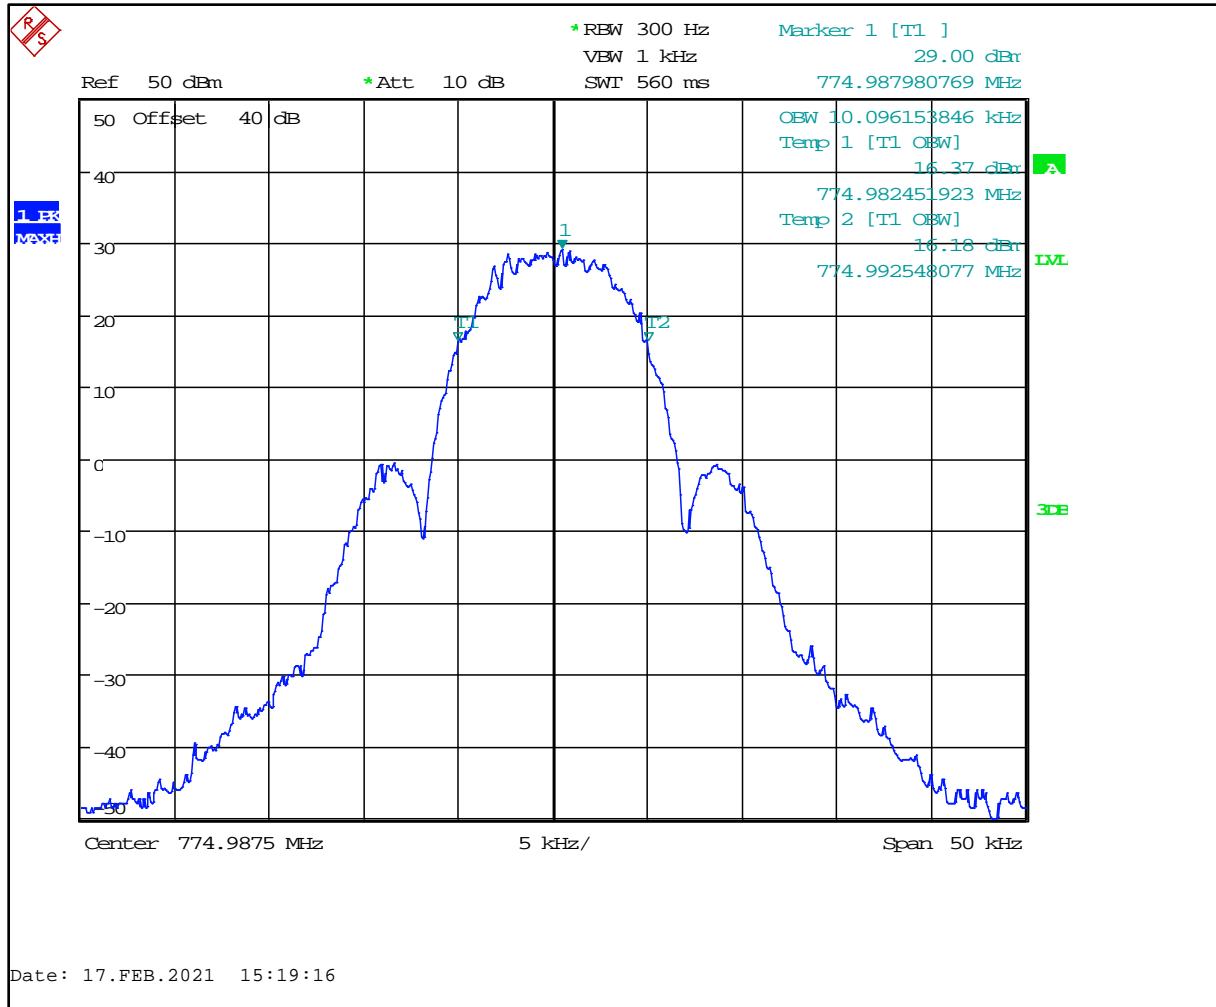


**Plot 8-480: OBW 99%, 774.9875 MHz, WB 2 FSK**




**Plot 8-481: OBW 99%, 774.9875 MHz, HVD SMR**

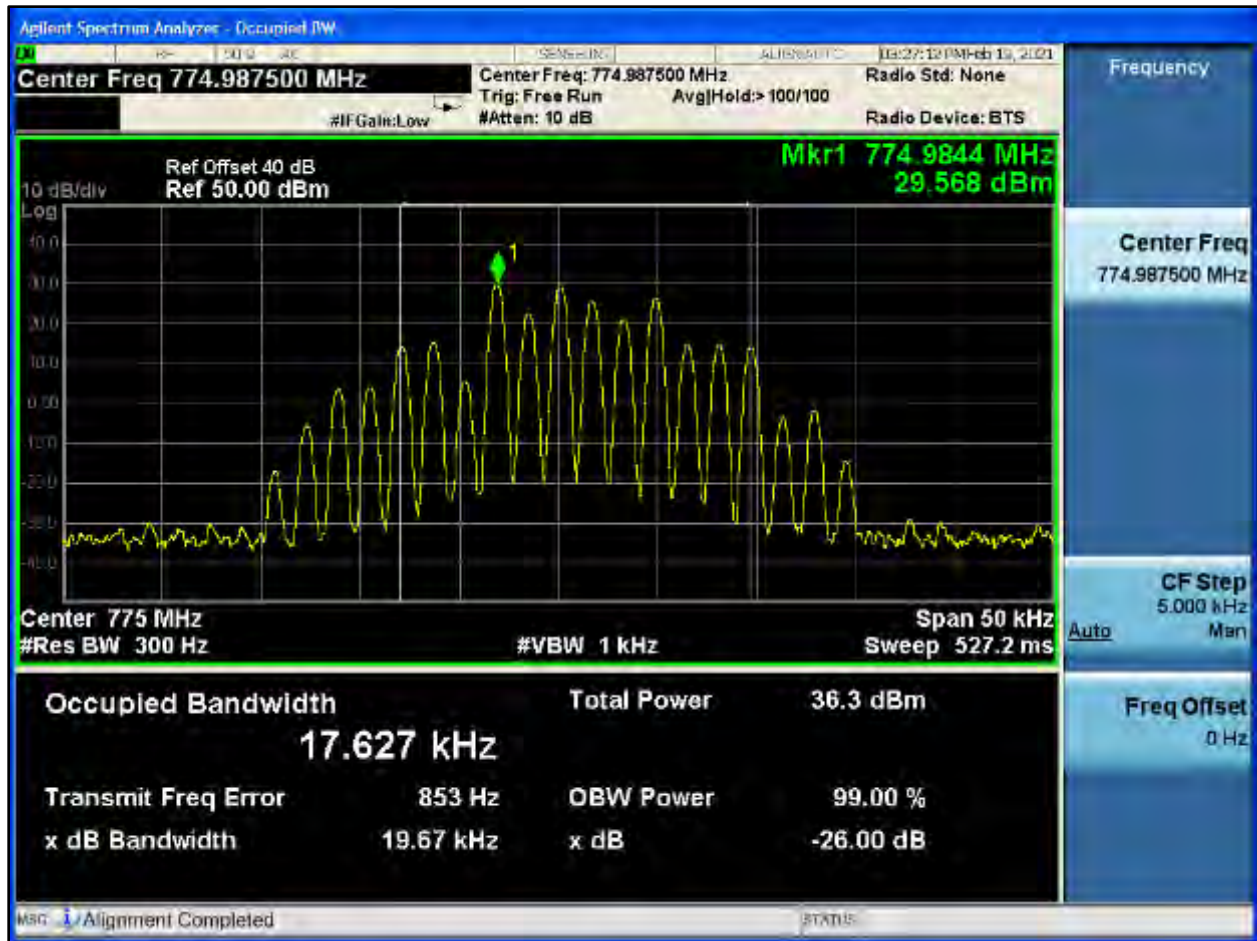

**Plot 8-482: OBW 99%, 774.9875 MHz, HVD NPSPAC**

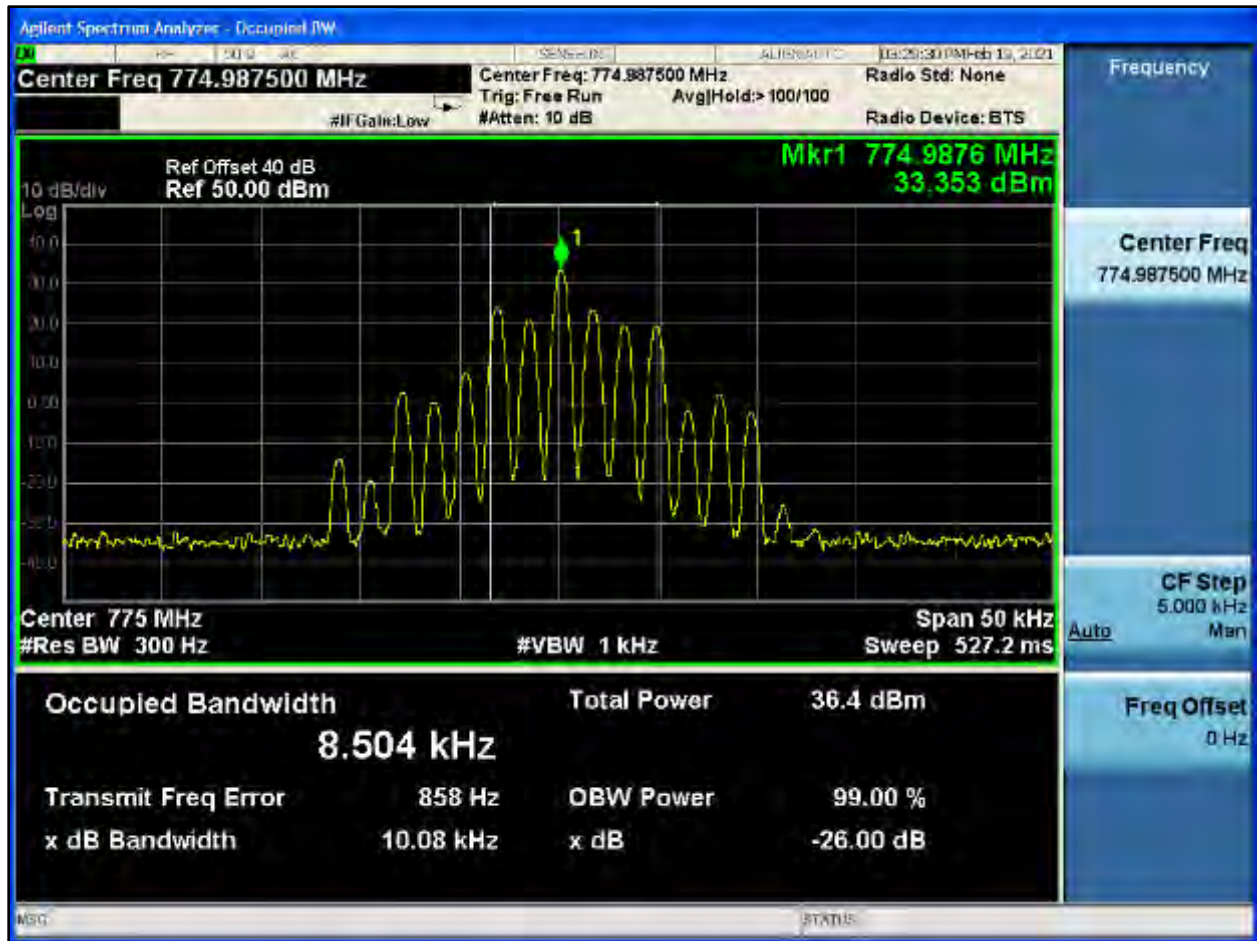


**Plot 8-483: OBW 99%, 775.9875 MHz, NB**

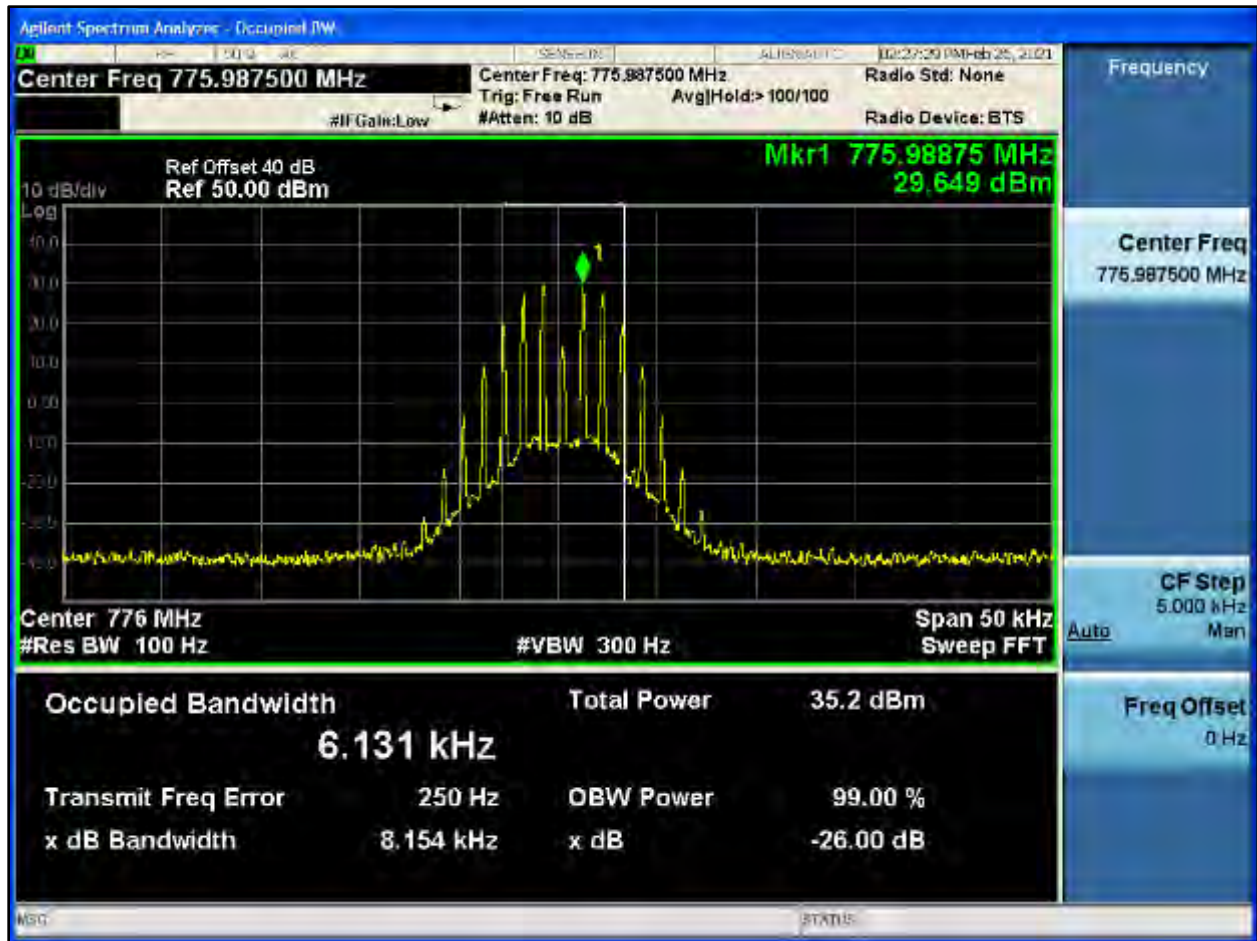




**Plot 8-484: OBW 99%, 775.9875 MHz, NPSPAC**

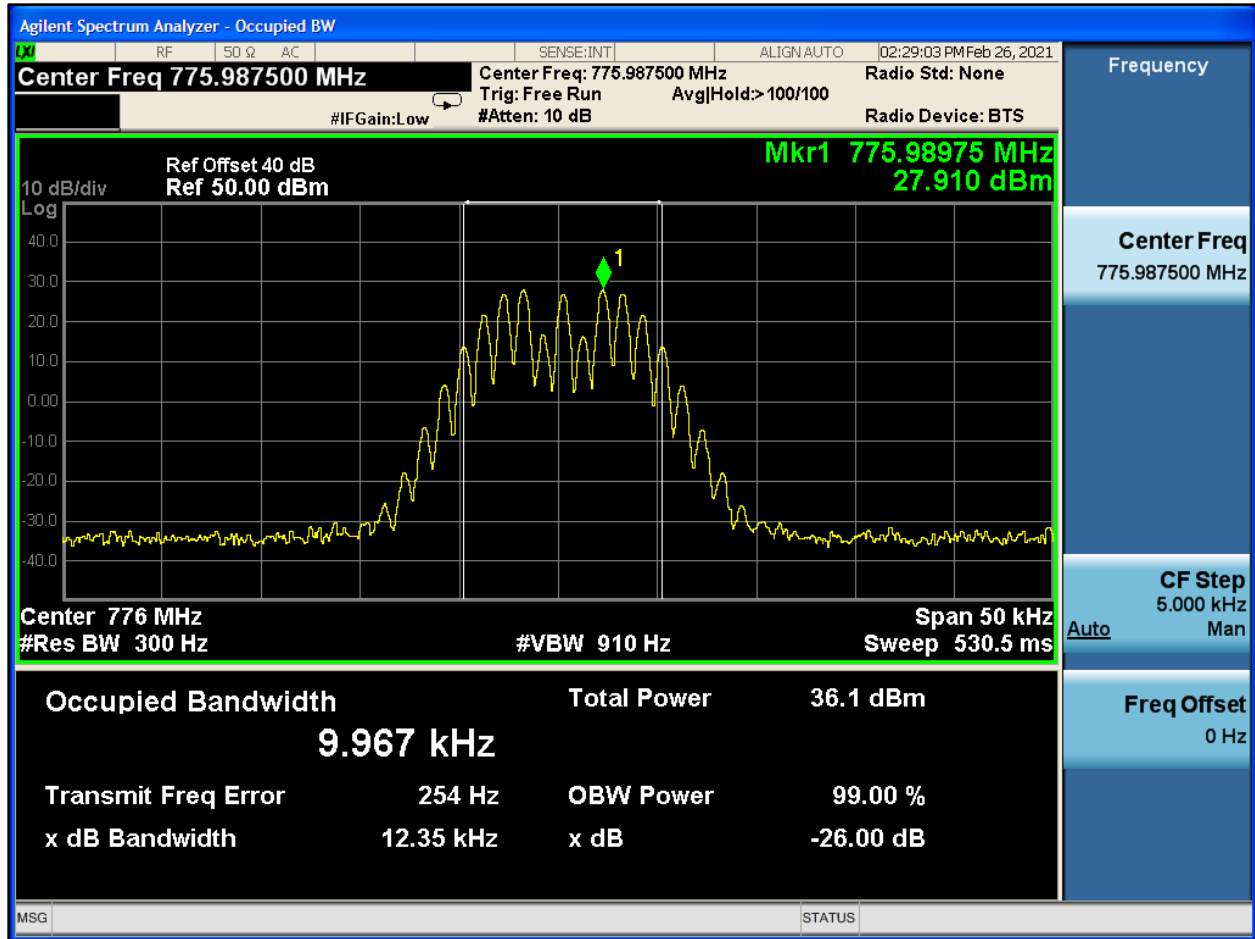

**Plot 8-485: OBW 99%, 775.9875 MHz, WB**



**Plot 8-486: OBW 99%, 775.9875 MHz, C4FM**

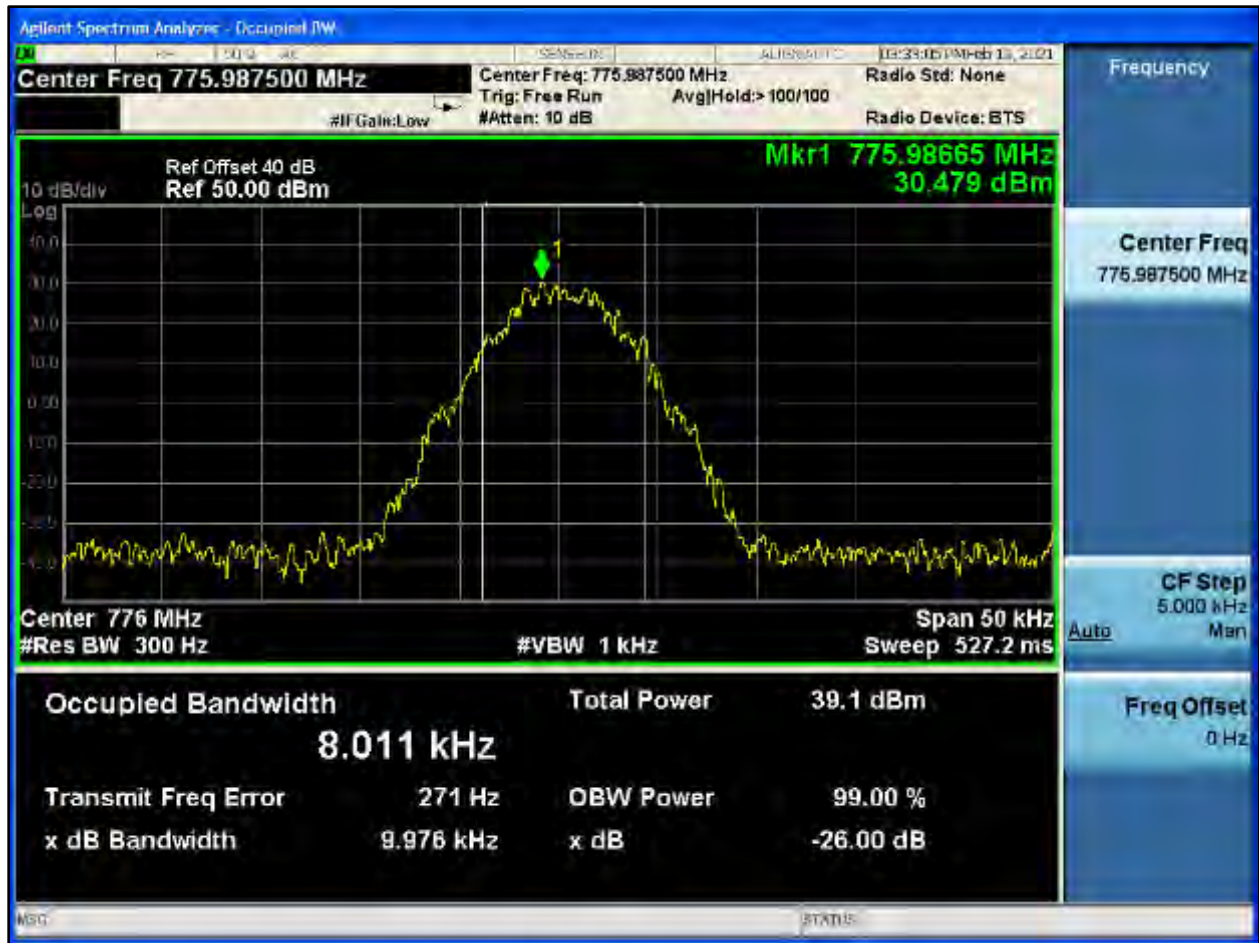


**Plot 8-487: OBW 99%, 775.9875 MHz, H-CPM TDMA**



**Plot 8-488: OBW 99%, 775.9875 MHz, NB 2 FSK**




**Plot 8-489: OBW 99%, 775.9875 MHz, NPSPAC 2 FSK**

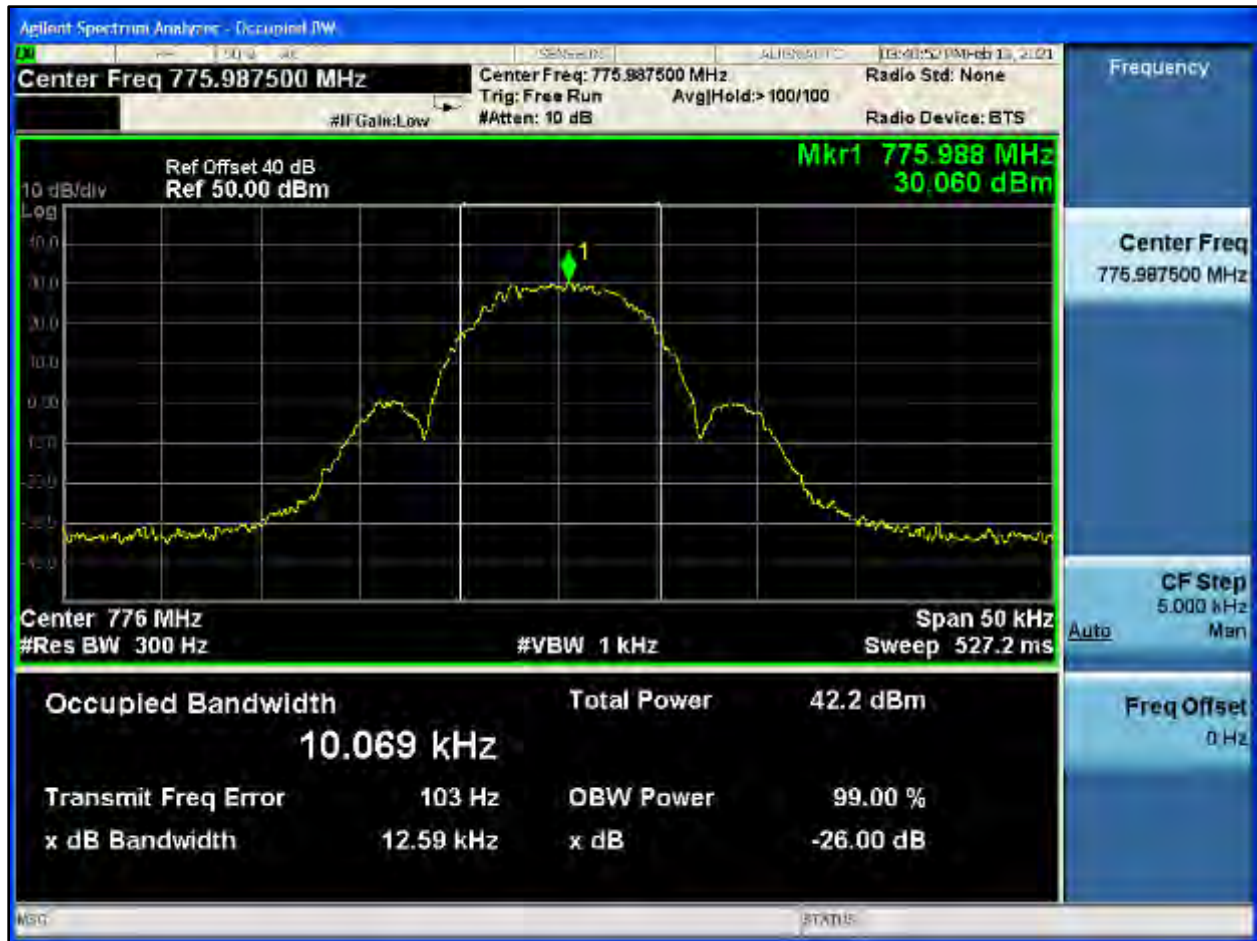

**Plot 8-490: OBW 99%, 775.9875 MHz, WB 2 FSK**




**Plot 8-491: OBW 99%, 775.9875 MHz, HVD SMR**

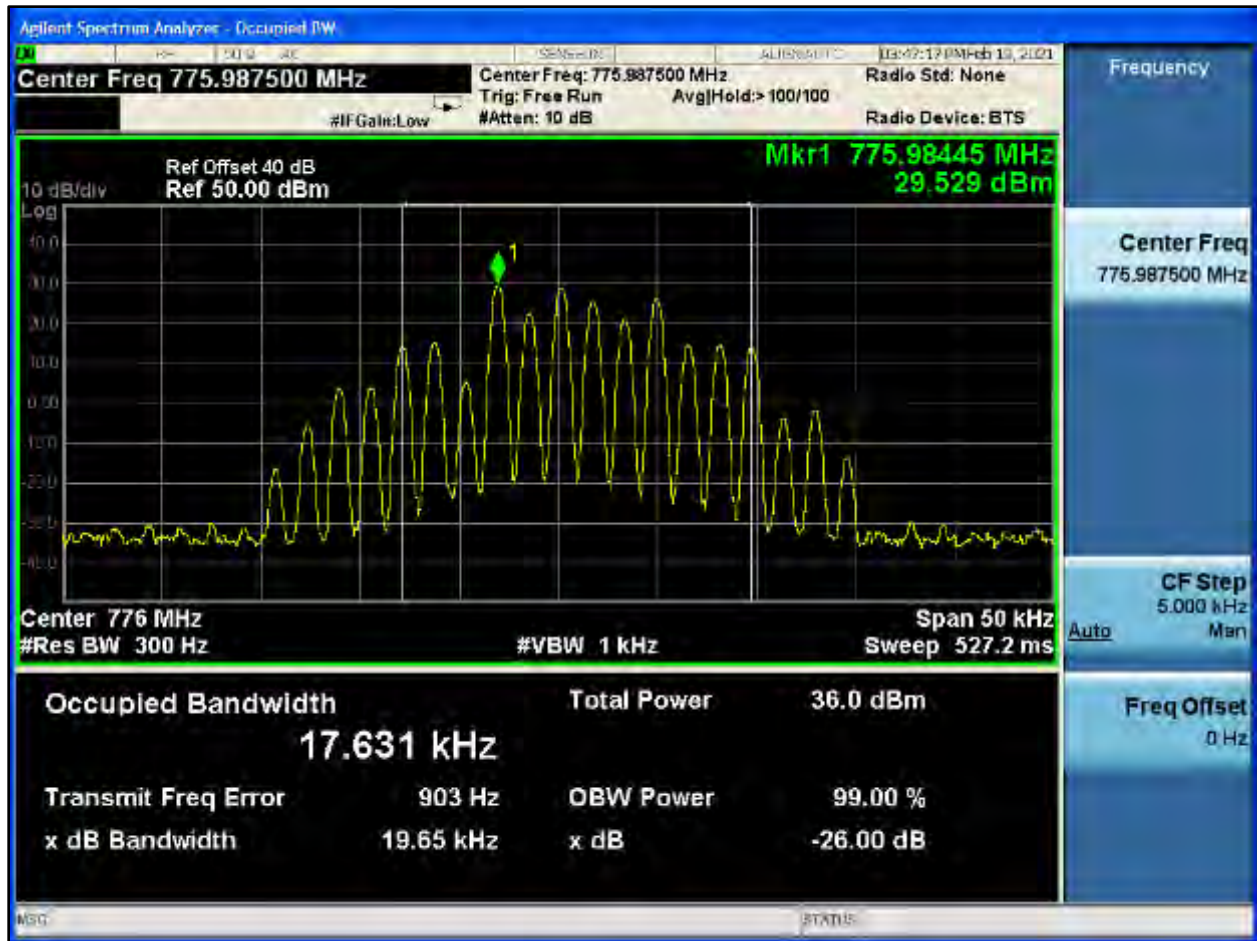





**Plot 8-492: OBW 99%, 775.9875 MHz, HVD NPSPAC**

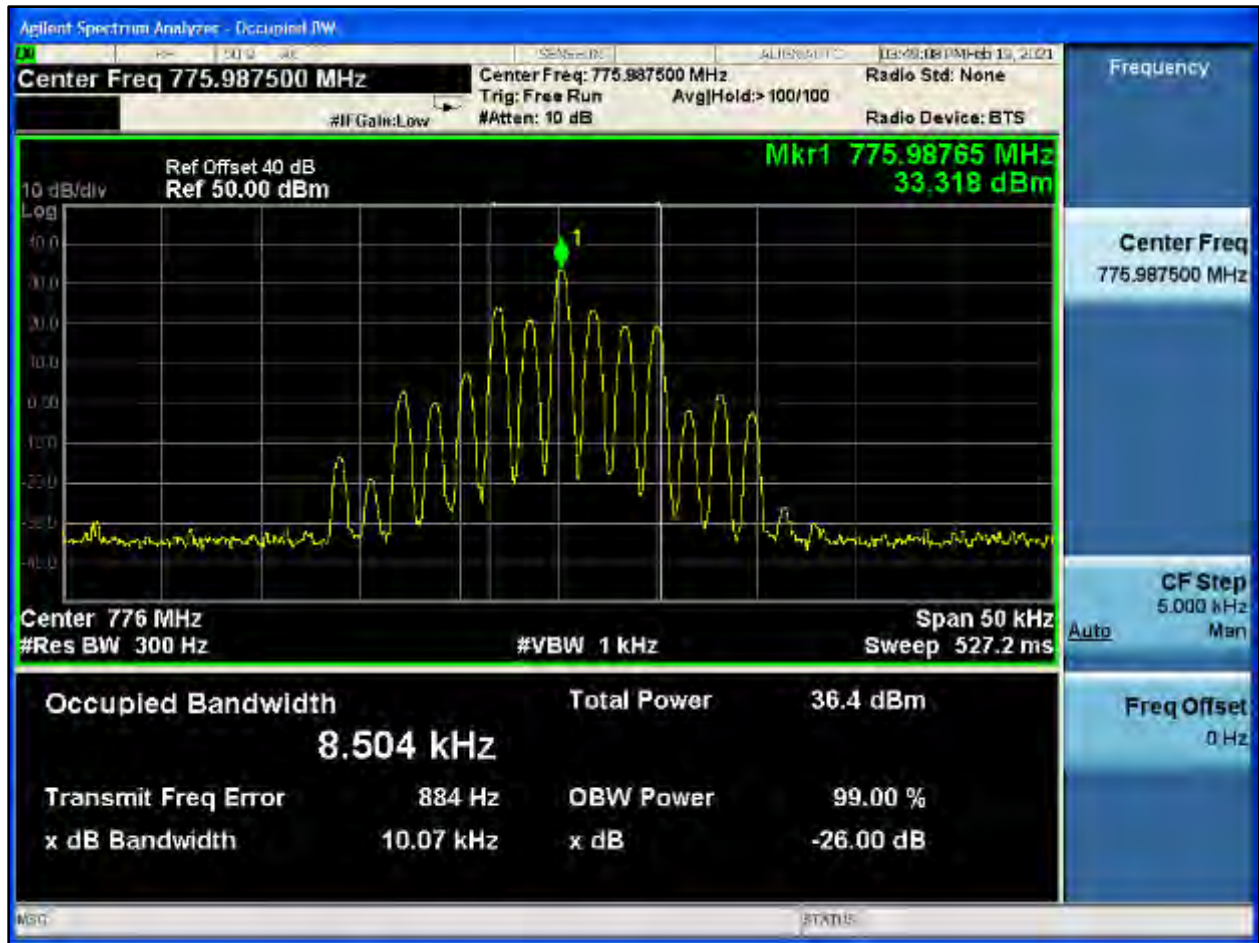

**Plot 8-493: OBW 99%, 793.0125 MHz, NB**

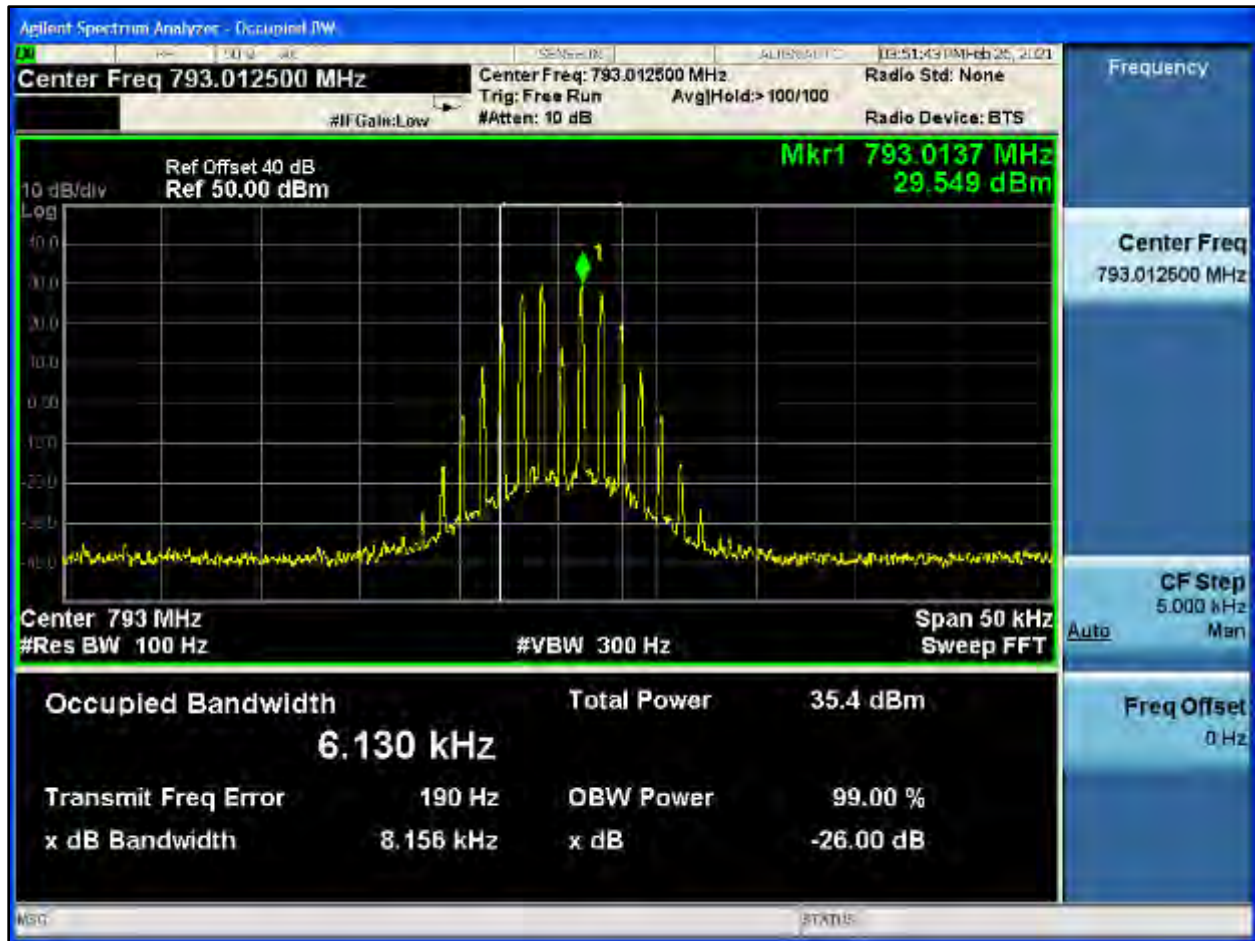


**Plot 8-494: OBW 99%, 793.0125 MHz, NPSPAC**

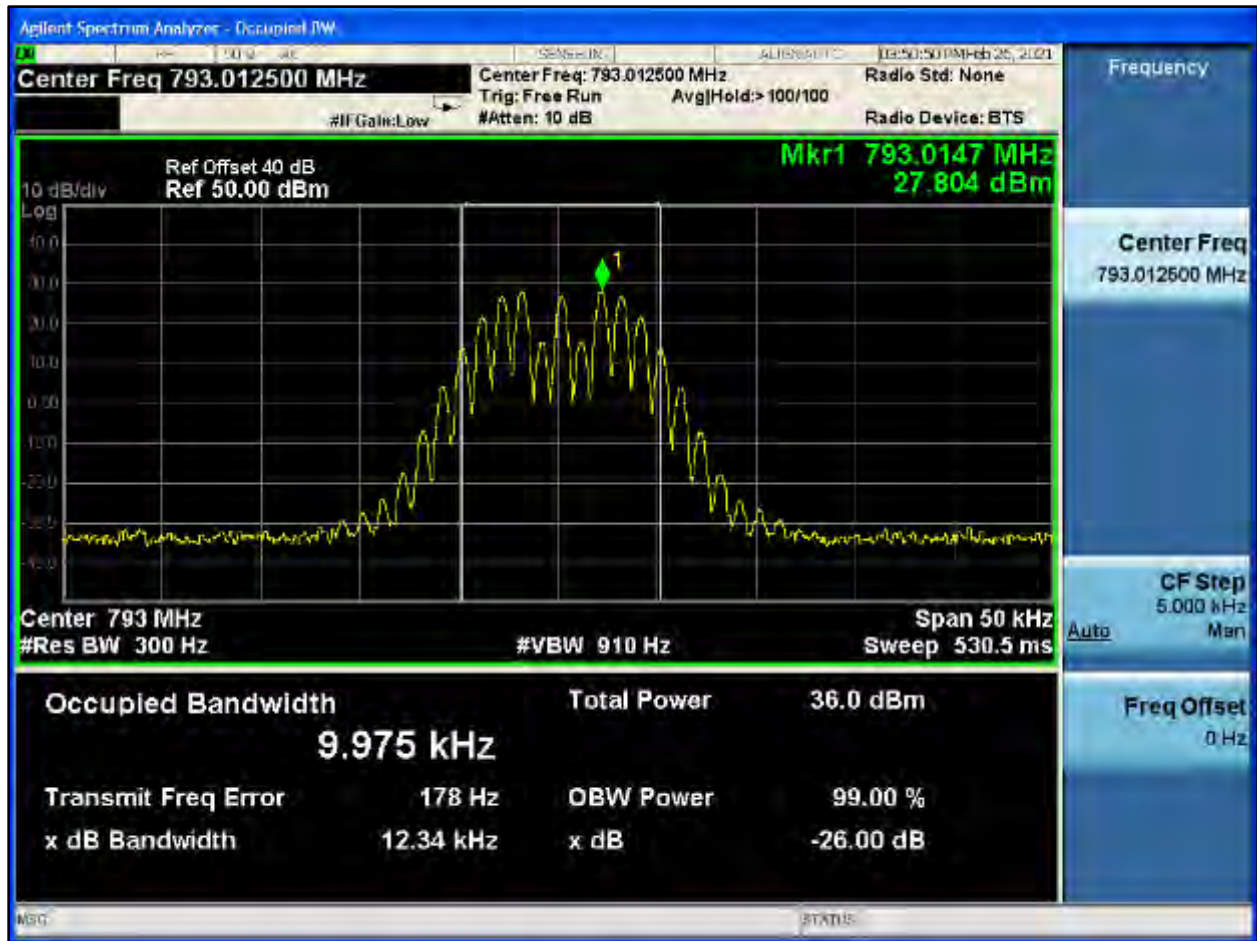


**Plot 8-495: OBW 99%, 793.0125 MHz, WB**



**Plot 8-496: OBW 99%, 793.0125 MHz, C4FM**

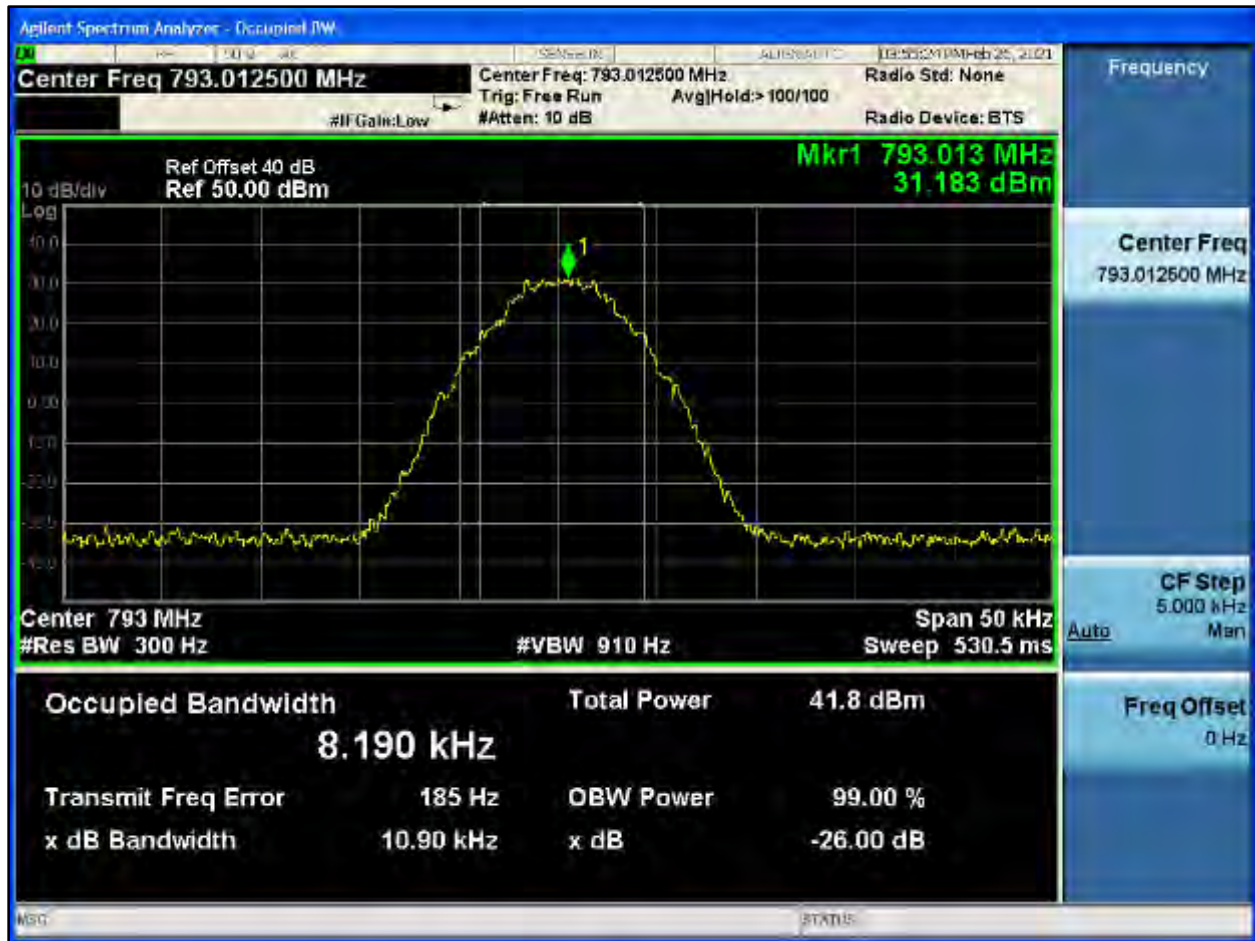


**Plot 8-497: OBW 99%, 793.0125 MHz, H-CPM TDMA**

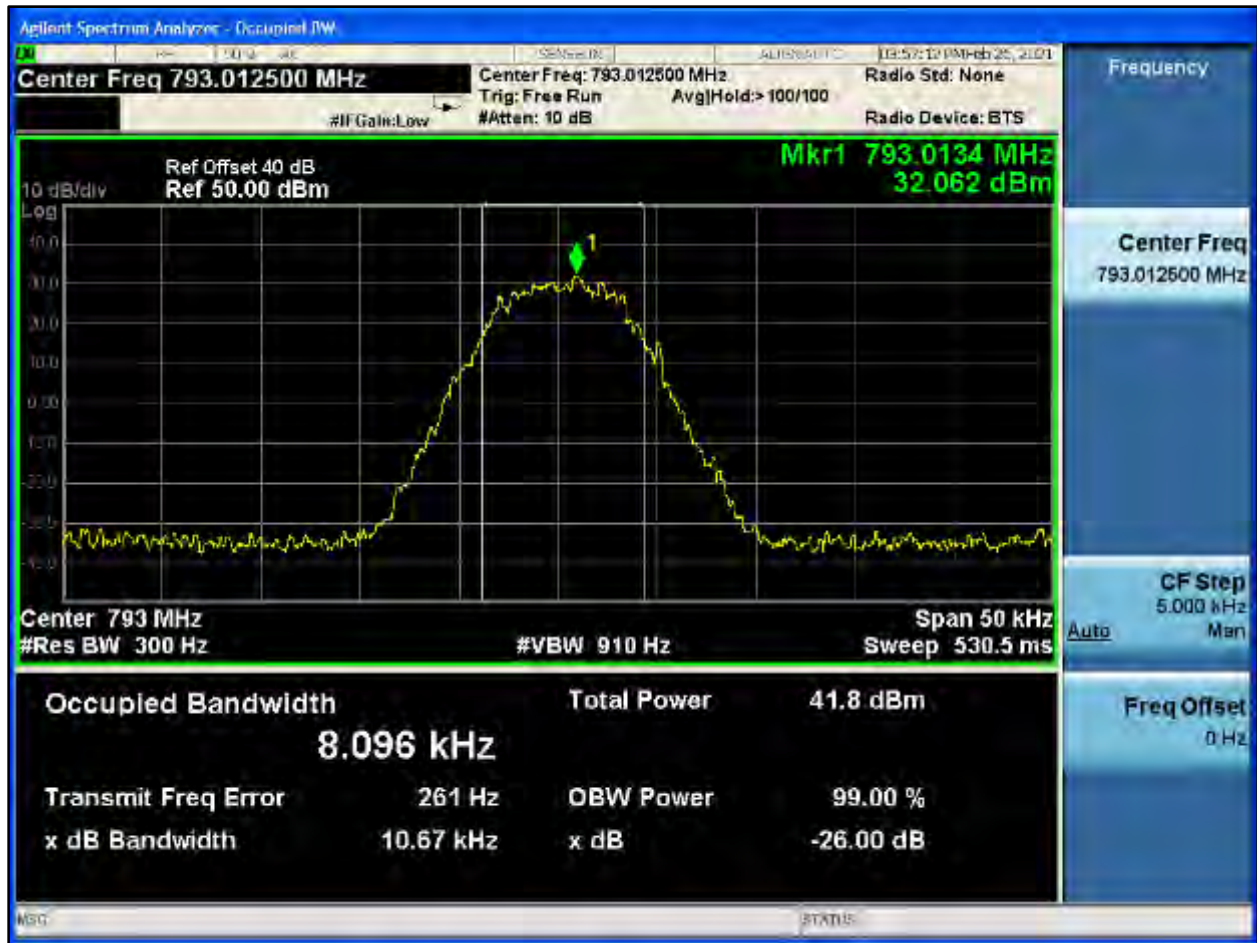

**Plot 8-498: OBW 99%, 793.0125 MHz, NB 2 FSK**



**Plot 8-499: OBW 99%, 793.0125 MHz, NPSPAC 2 FSK**

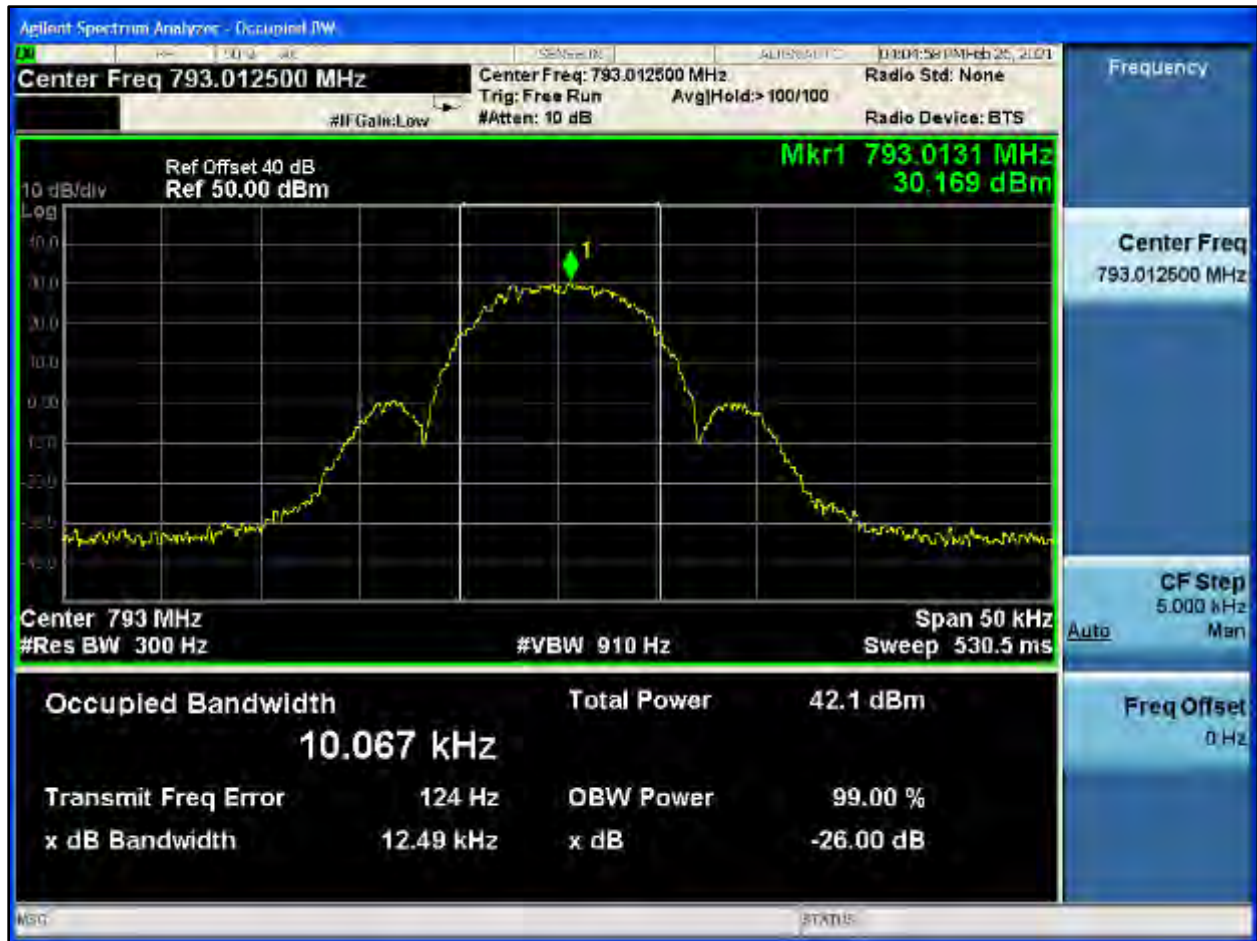





**Plot 8-500: OBW 99%, 793.0125 MHz, WB 2 FSK**




**Plot 8-501: OBW 99%, 793.0125 MHz, HVD SMR**

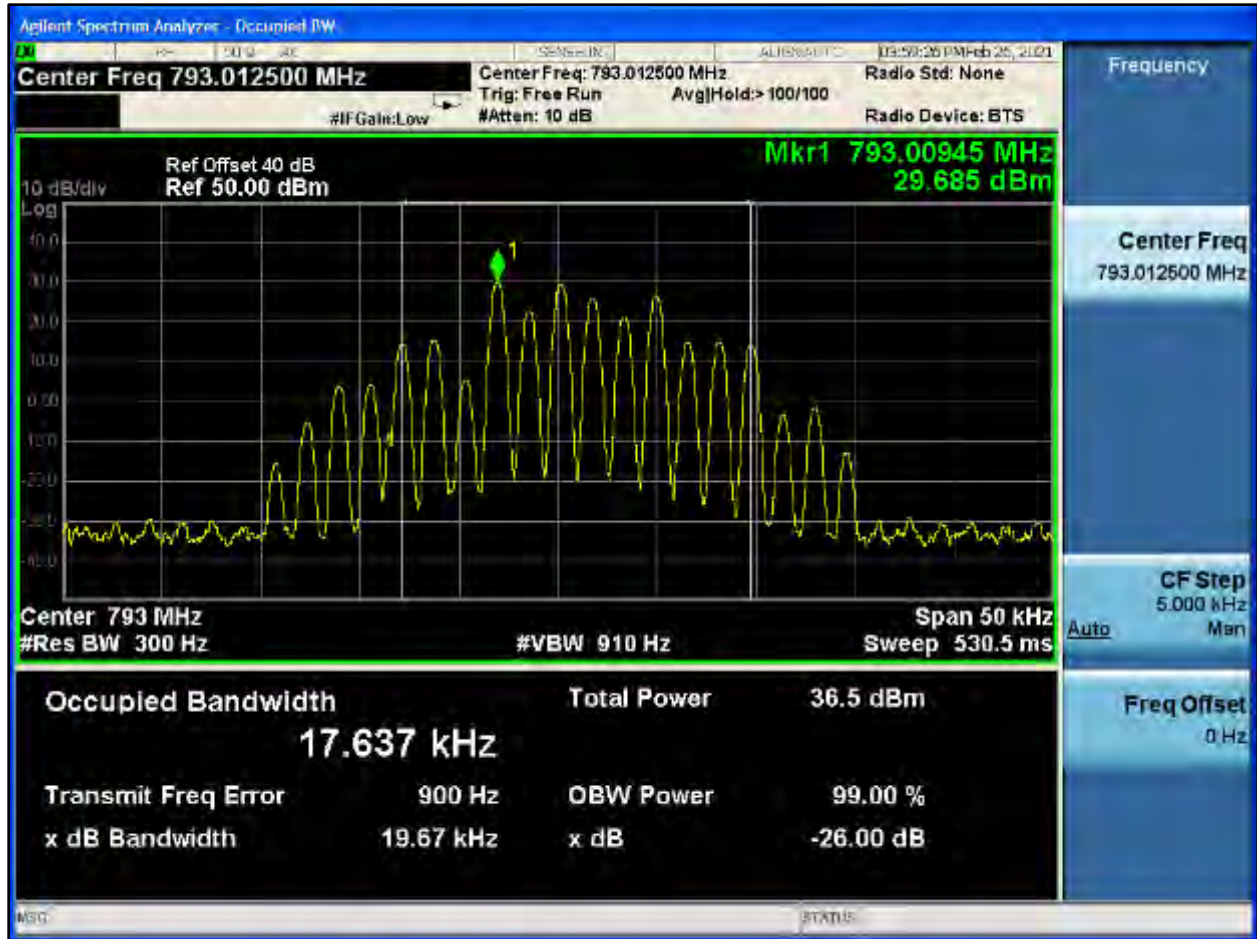


**Plot 8-502: OBW 99%, 793.0125 MHz, HVD NPSPAC**

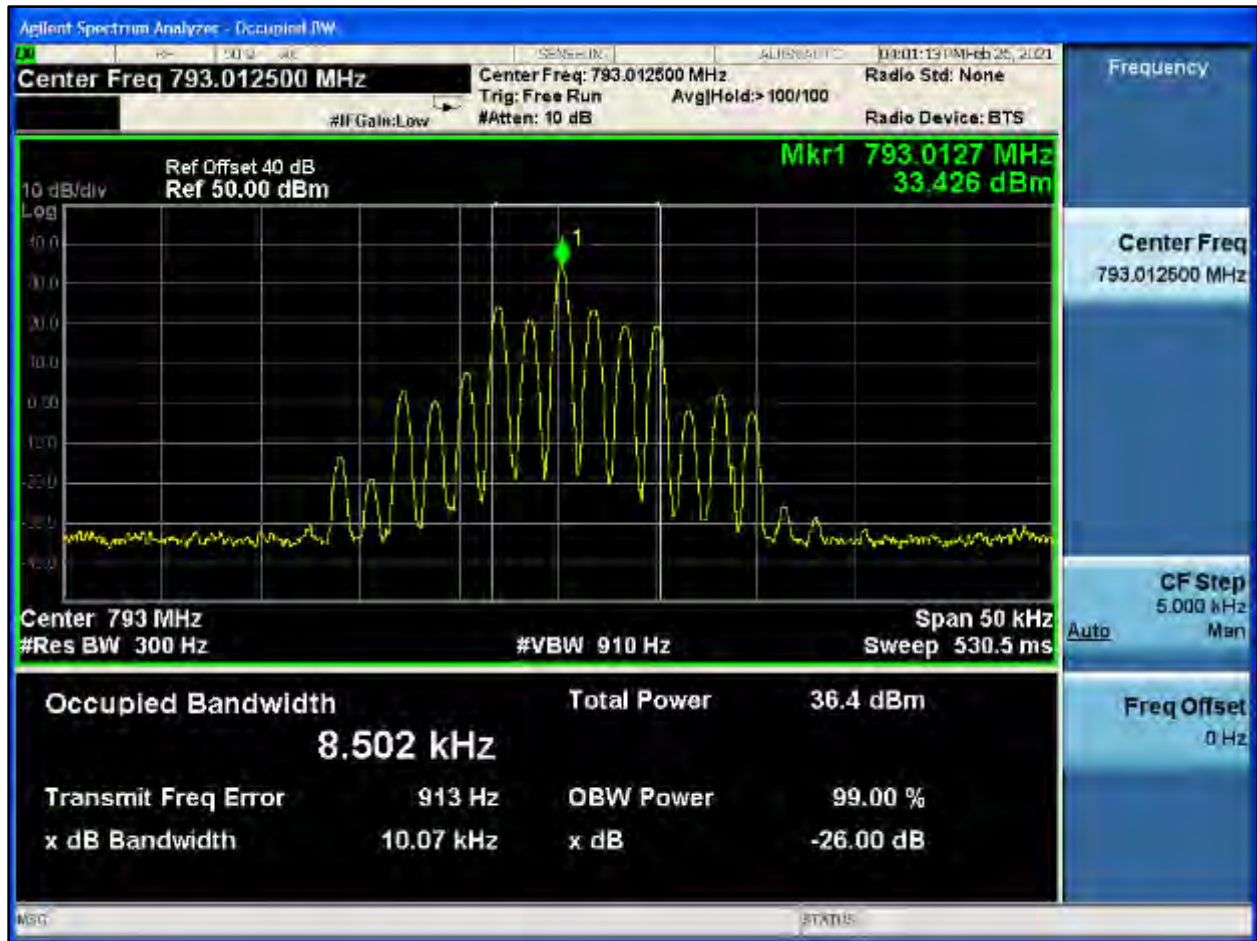

**Plot 8-503: OBW 99%, 798.0125 MHz, NB**

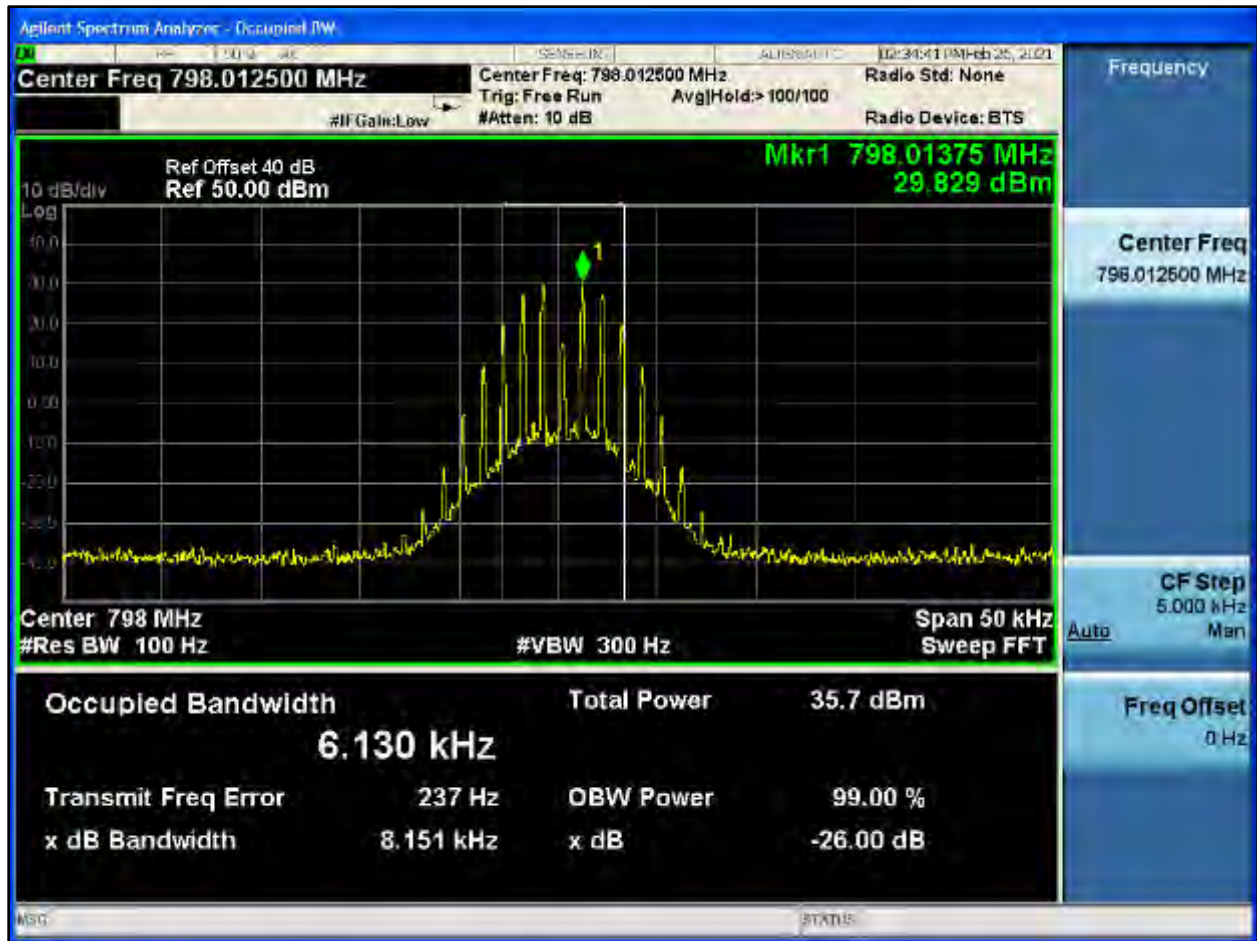

**Plot 8-504: OBW 99%, 798.0125 MHz, NPSPAC**

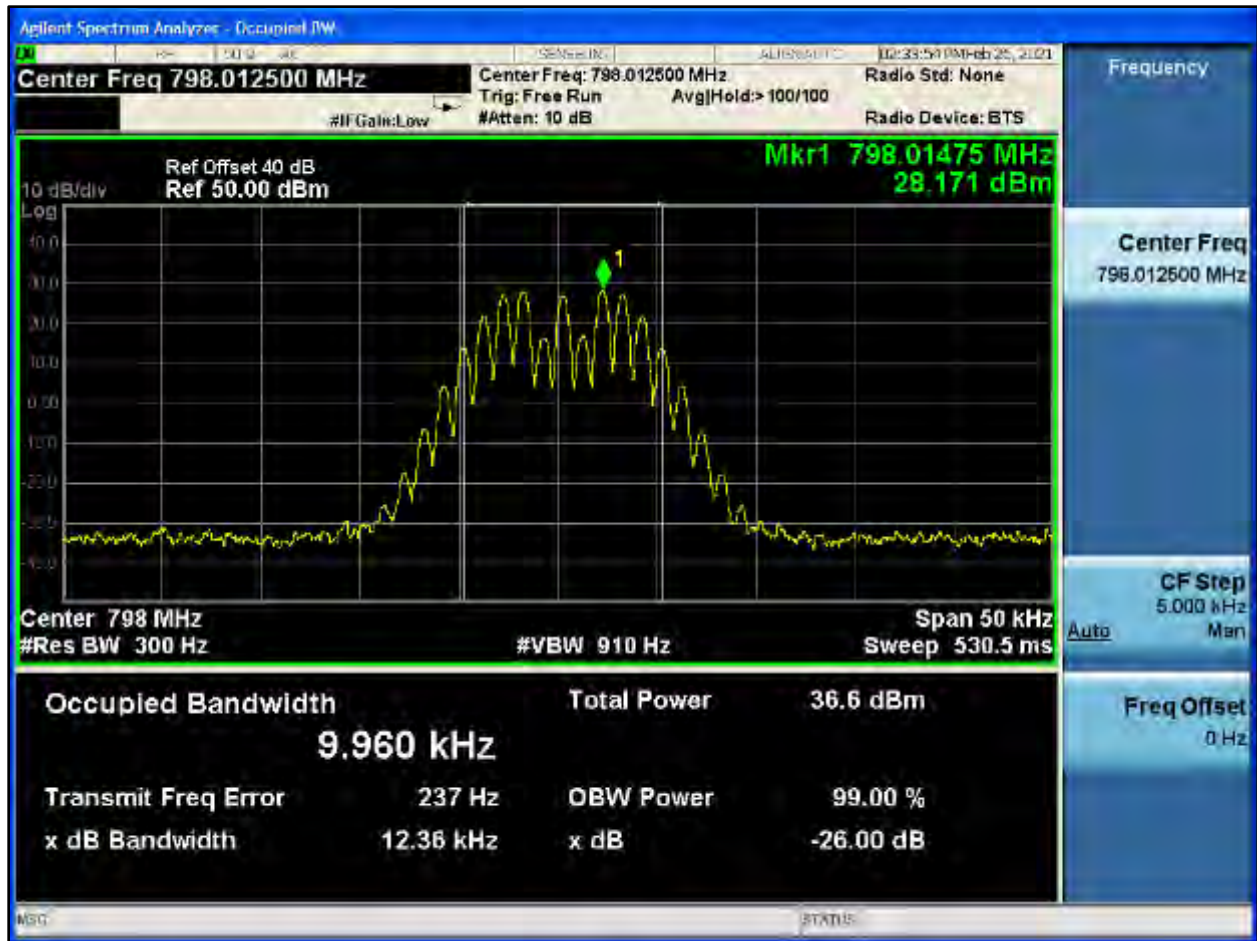


**Plot 8-505: OBW 99%, 798.0125 MHz, WB**



**Plot 8-506: OBW 99%, 798.0125 MHz, C4FM**




**Plot 8-507: OBW 99%, 798.0125 MHz, H-CPM TDMA**

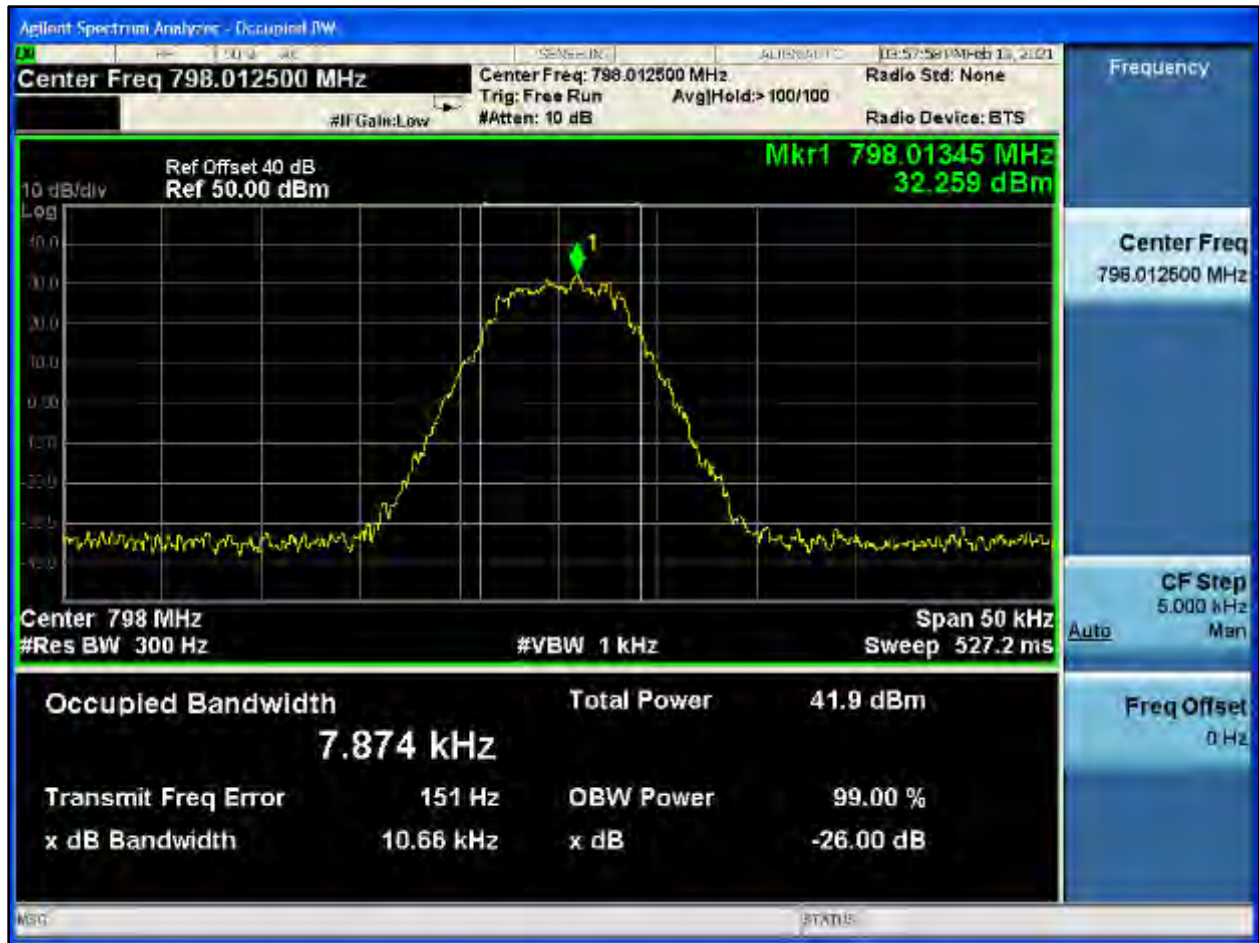




**Plot 8-508: OBW 99%, 798.0125 MHz, NB 2 FSK**

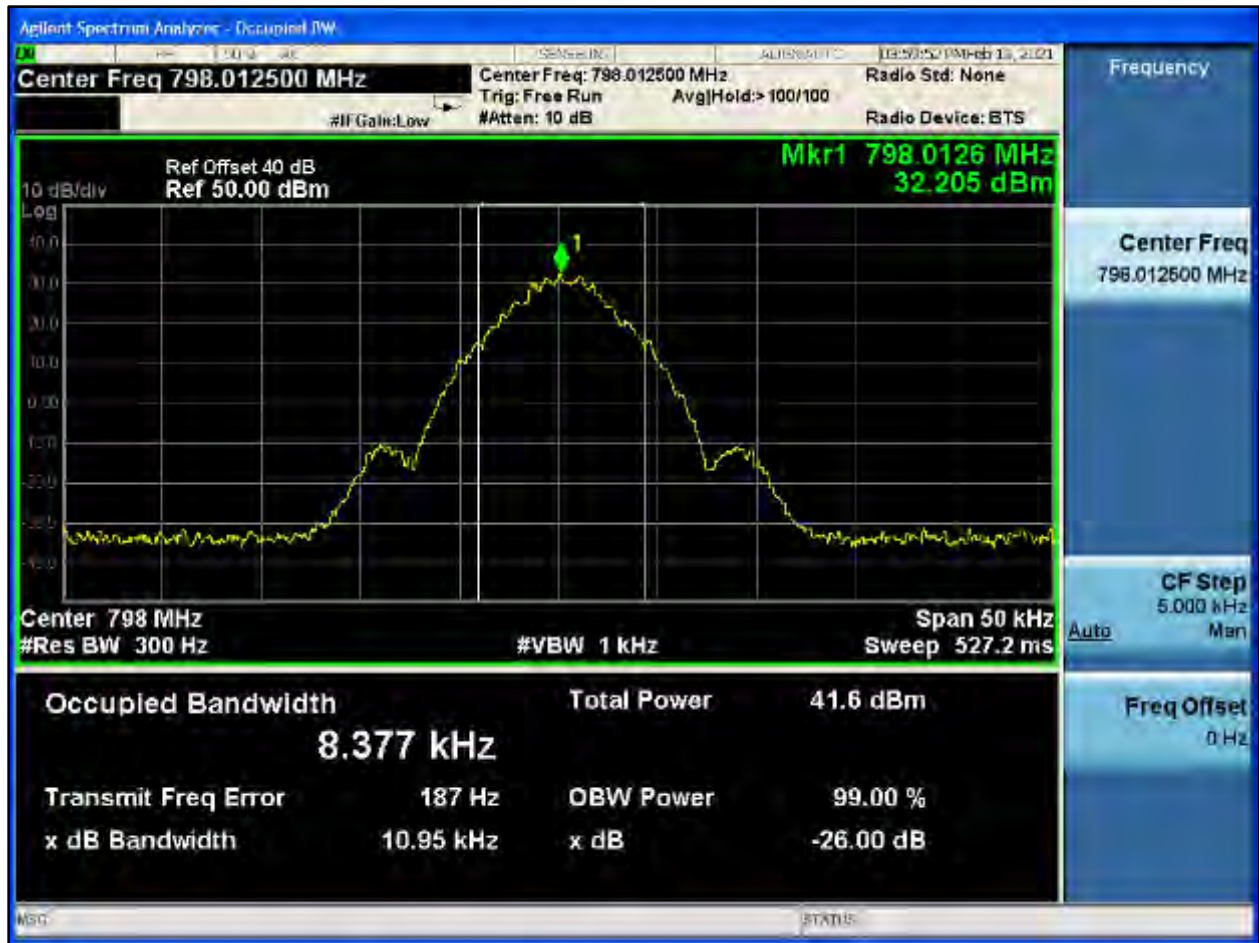


**Plot 8-509: OBW 99%, 798.0125 MHz, NPSPAC 2 FSK**

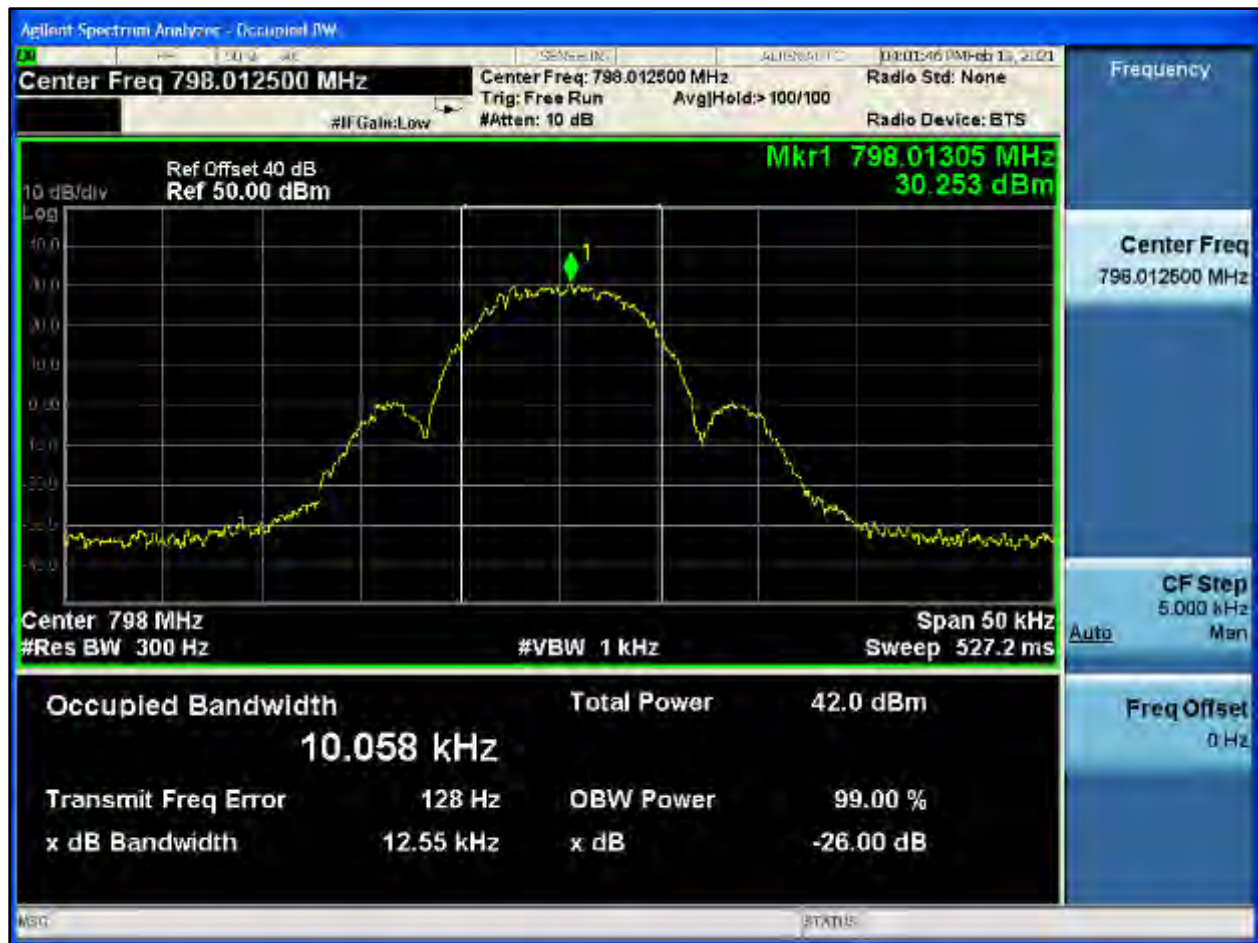


**Plot 8-510: OBW 99%, 798.0125 MHz, WB 2 FSK**




**Plot 8-511: OBW 99%, 798.0125 MHz, HVD SMR**

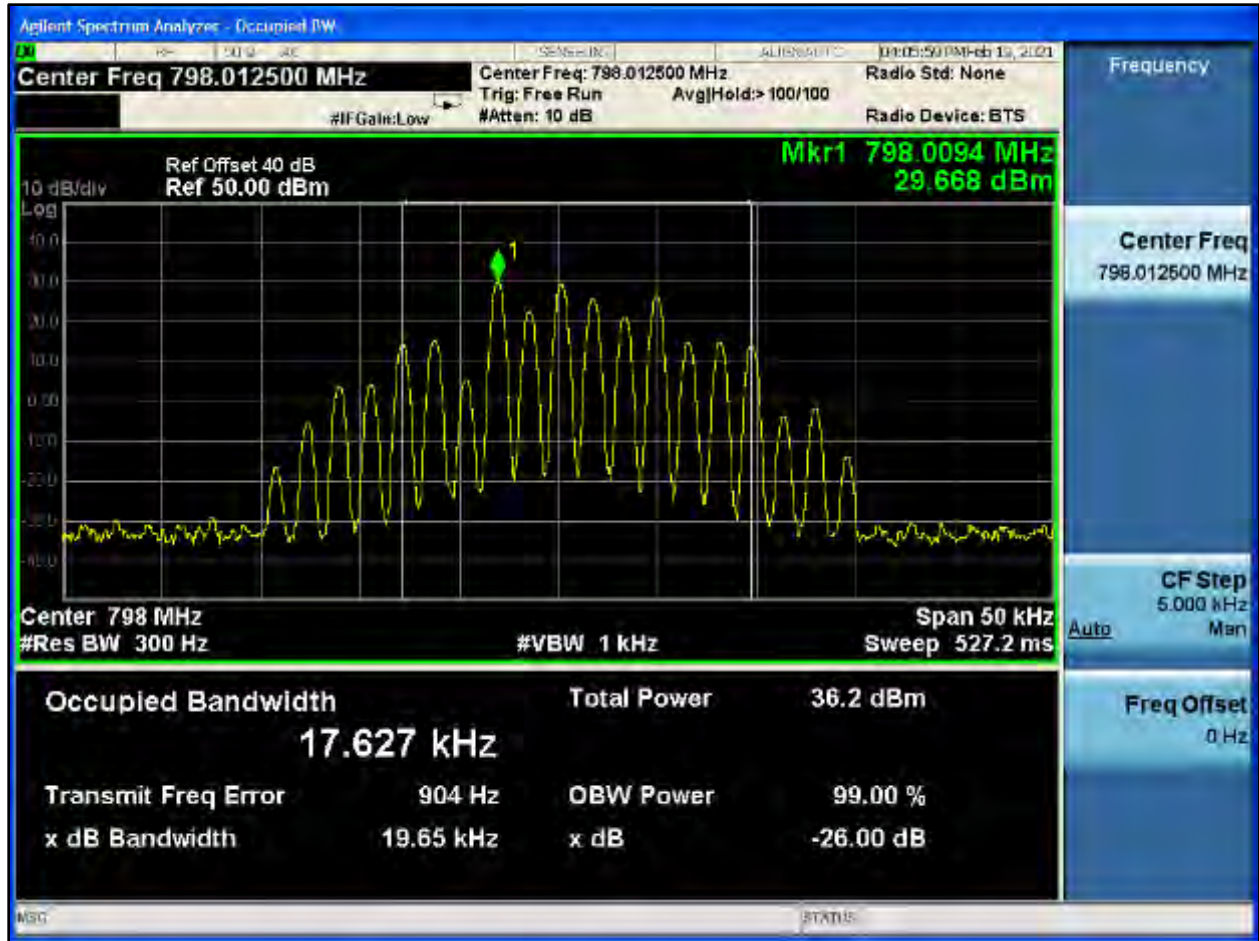


**Plot 8-512: OBW 99%, 798.0125 MHz, HVD NPSPAC**

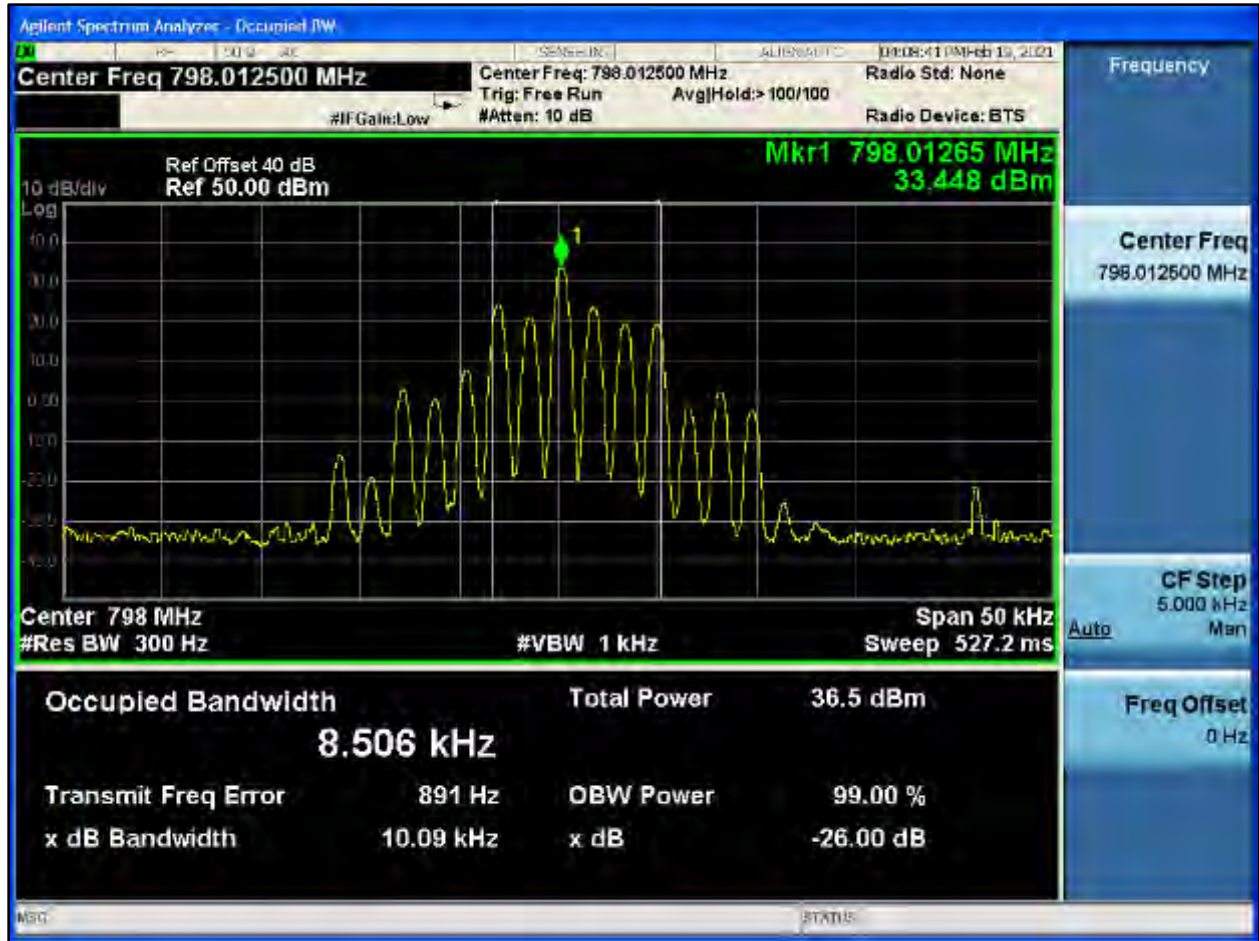


**Plot 8-513: OBW 99%, 799.0125 MHz, NB**

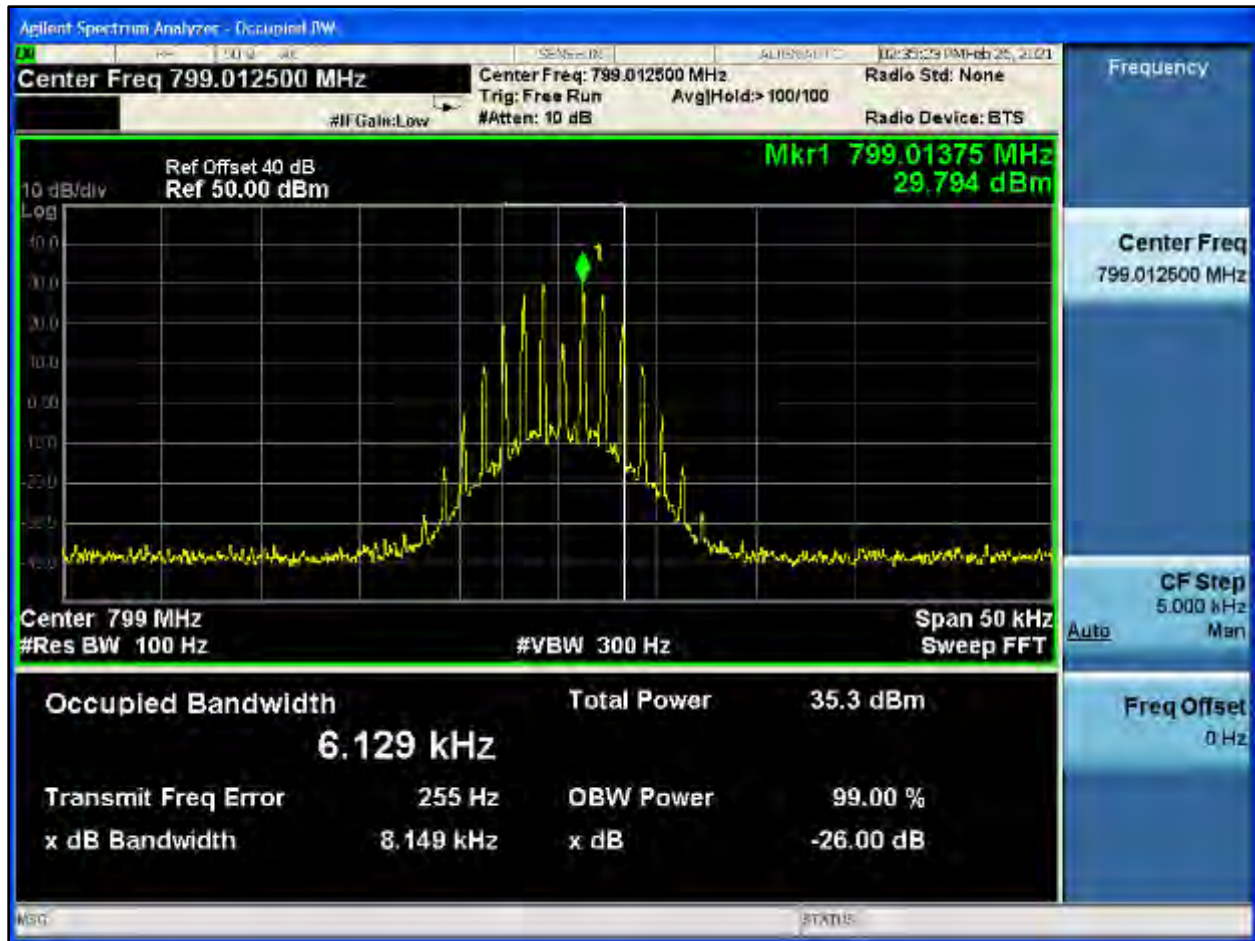

**Plot 8-514: OBW 99%, 799.0125 MHz, NPSPAC**

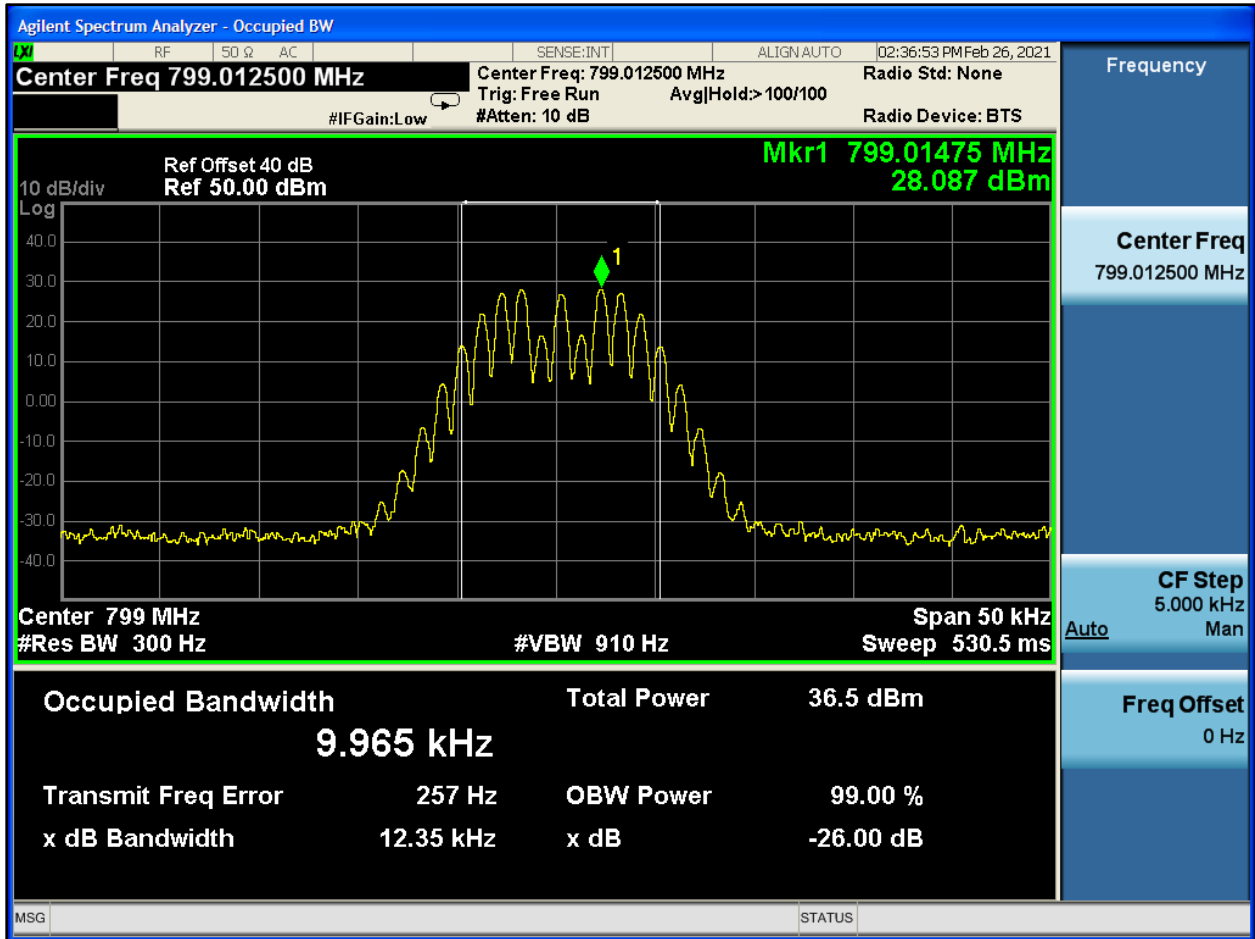

**Plot 8-515: OBW 99%, 799.0125 MHz, WB**

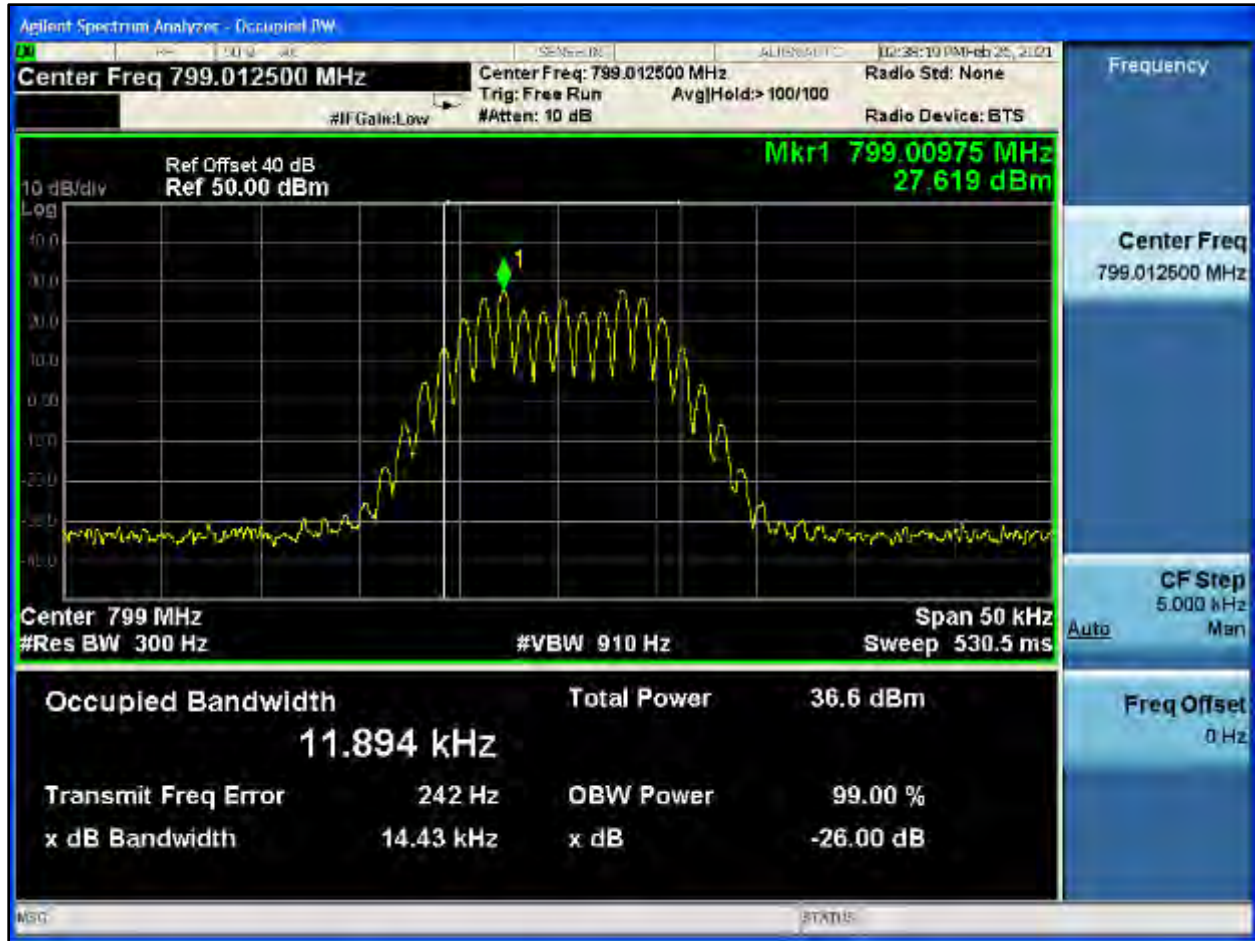




**Plot 8-516: OBW 99%, 799.0125 MHz, C4FM**



**Plot 8-517: OBW 99%, 799.0125 MHz, H-CPM TDMA**

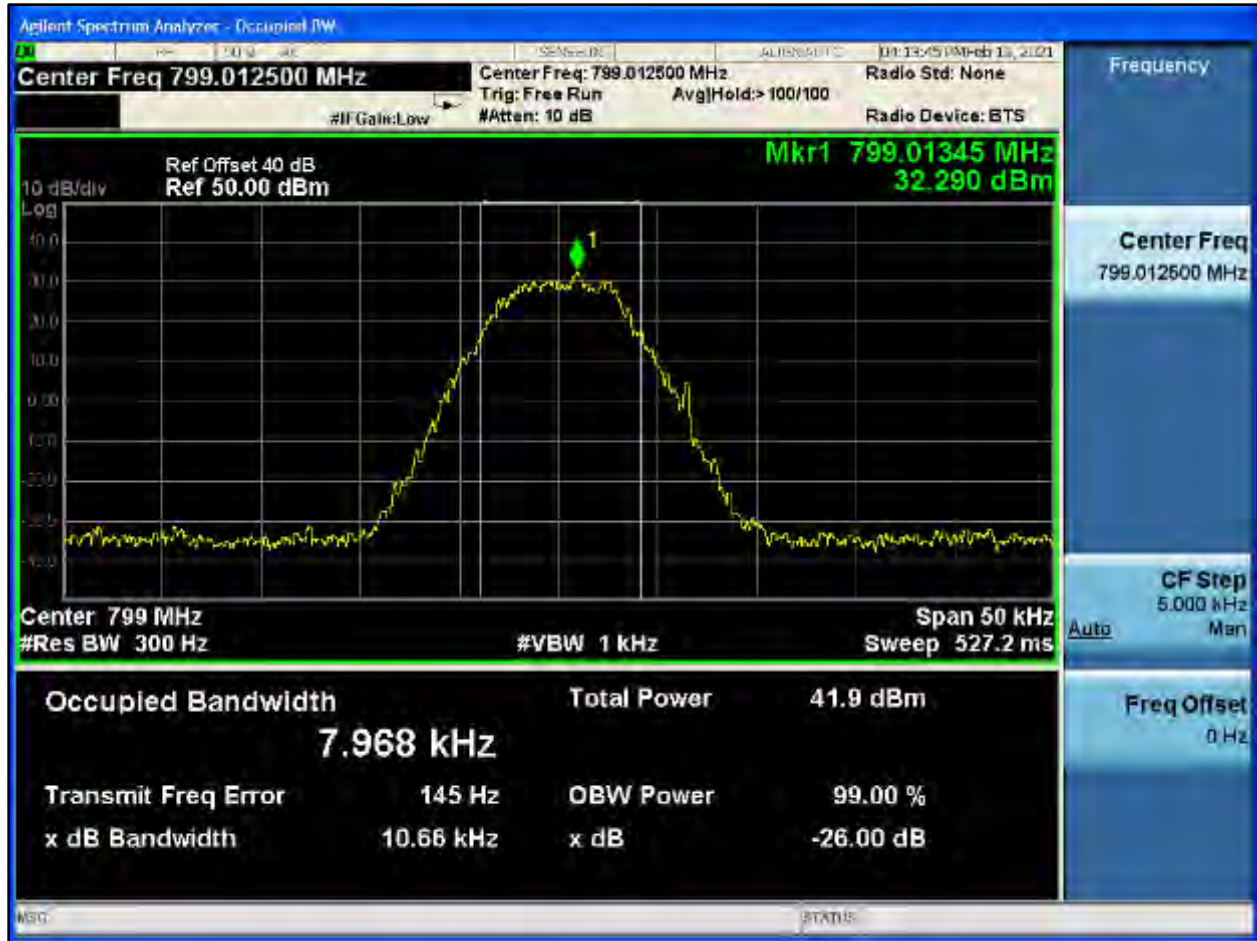

**Plot 8-518: OBW 99%, 799.0125 MHz, NB 2 FSK**




**Plot 8-519: OBW 99%, 799.0125 MHz, NPSPAC 2 FSK**




**Plot 8-520: OBW 99%, 799.0125 MHz, WB 2 FSK**




**Plot 8-521: OBW 99%, 799.0125 MHz, HVD SMR**

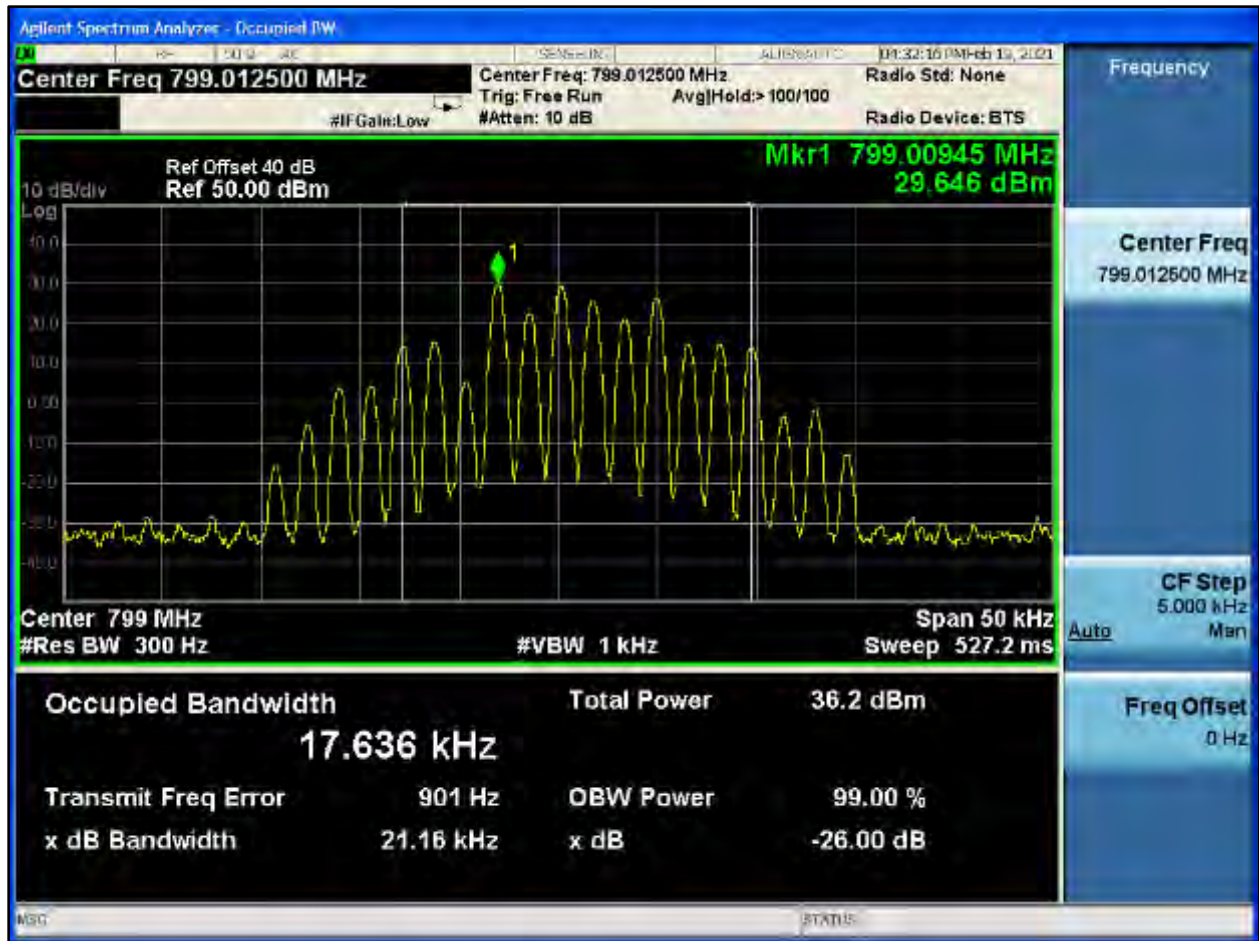

**Plot 8-522: OBW 99%, 799.0125 MHz, HVD NPSPAC**

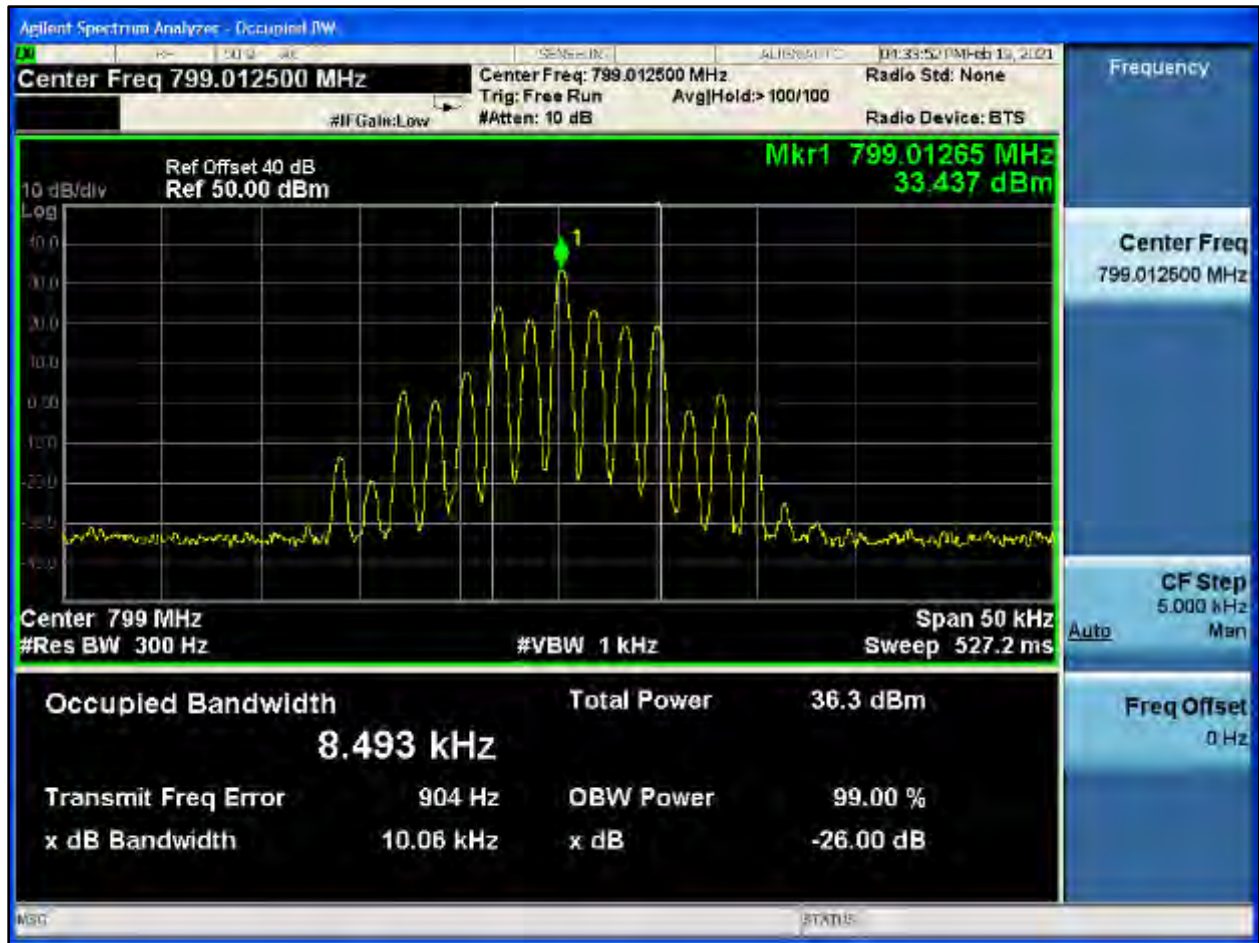


**Plot 8-523: OBW 99%, 802.0000 MHz, NB**

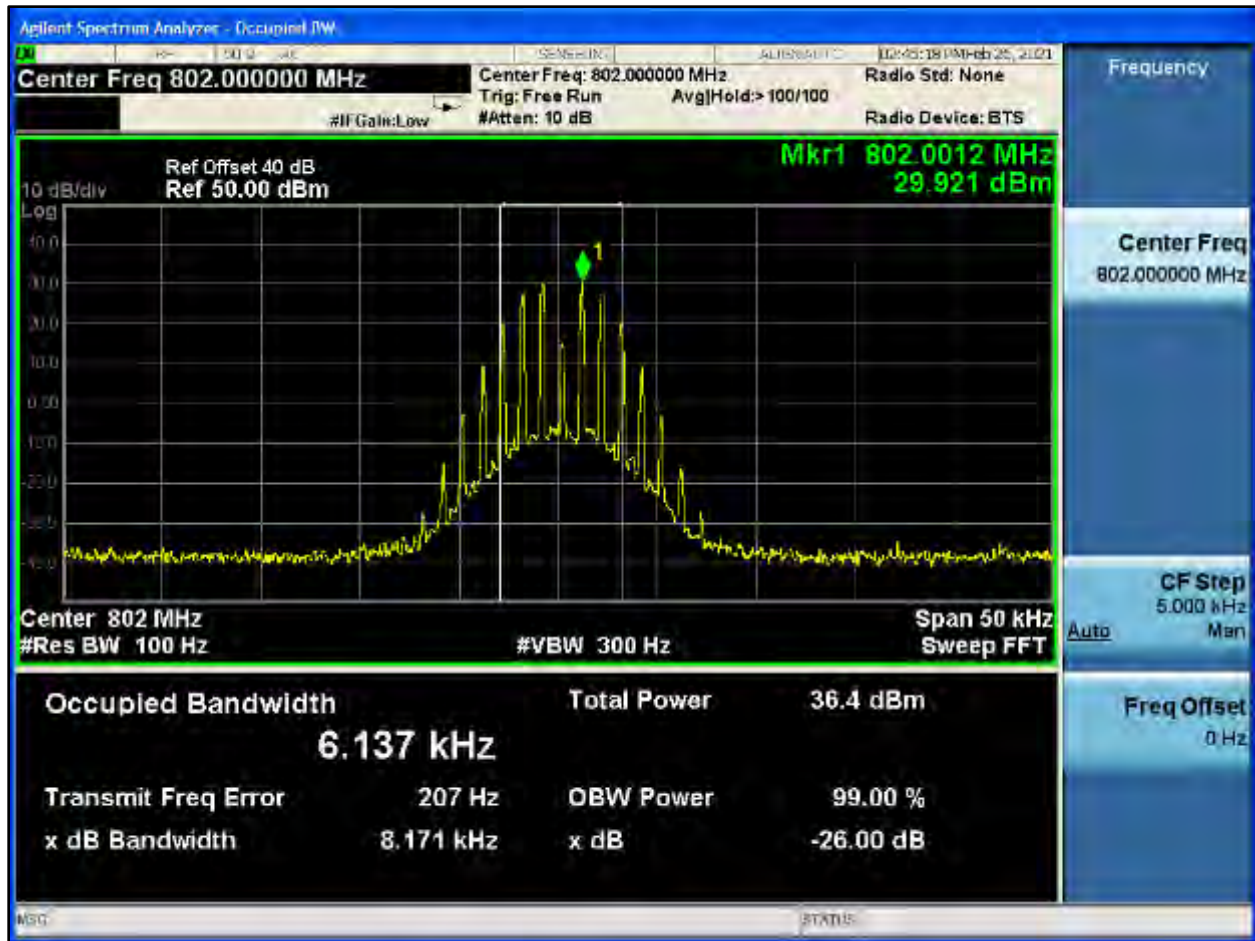





**Plot 8-524: OBW 99%, 802.0000 MHz, NPSPAC**

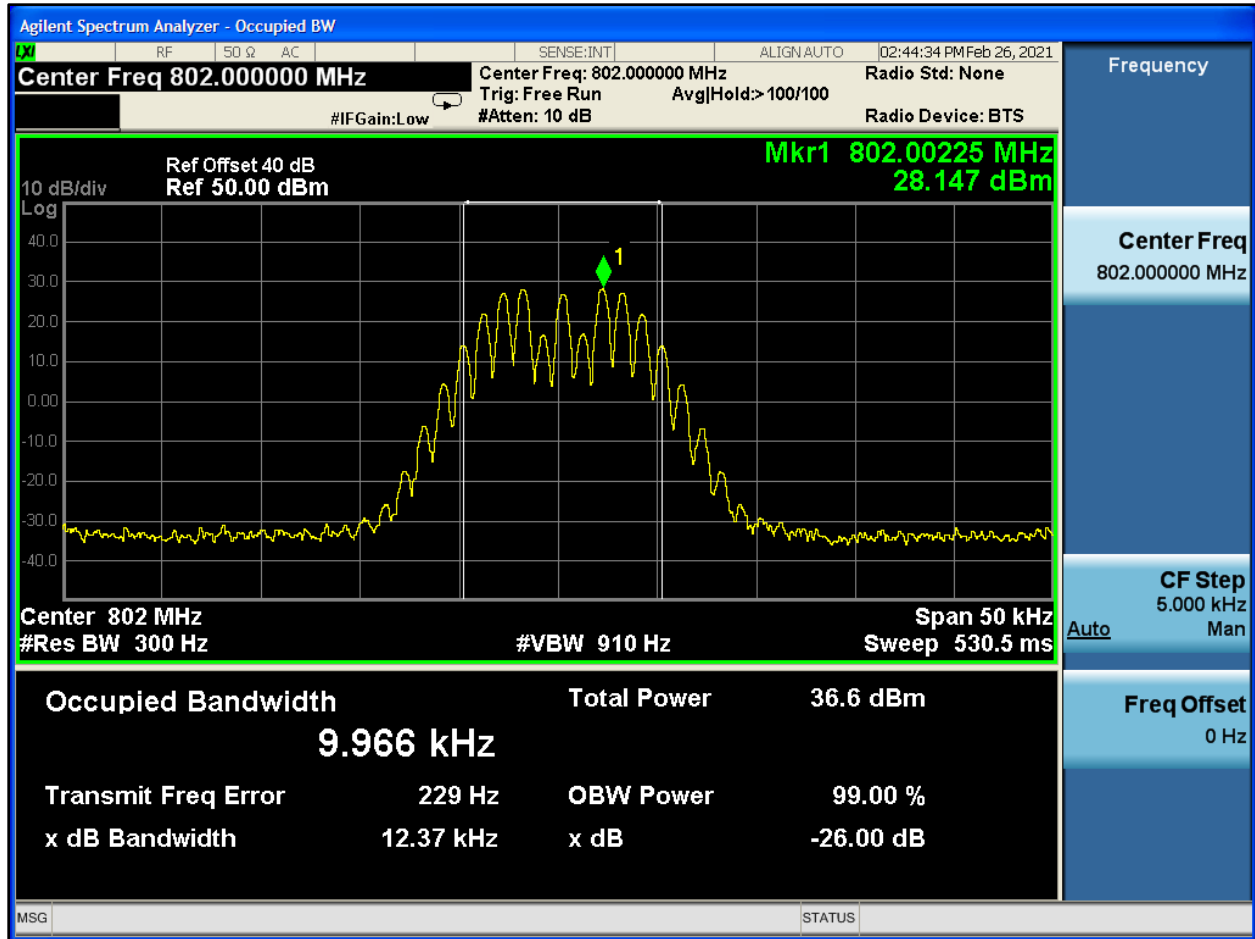

**Plot 8-525: OBW 99%, 802.0000 MHz, WB**

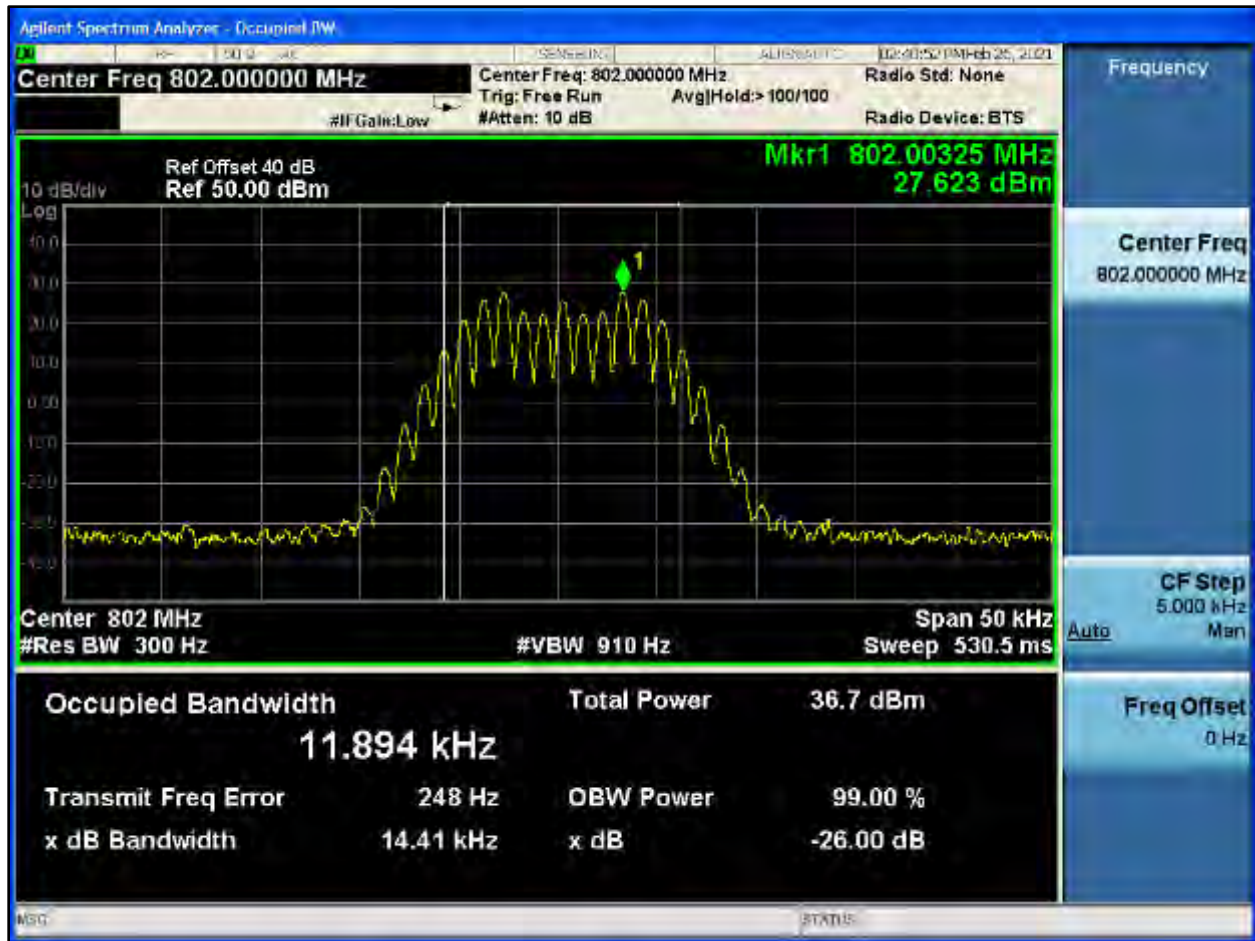

**Plot 8-526: OBW 99%, 802.0000 MHz, C4FM**

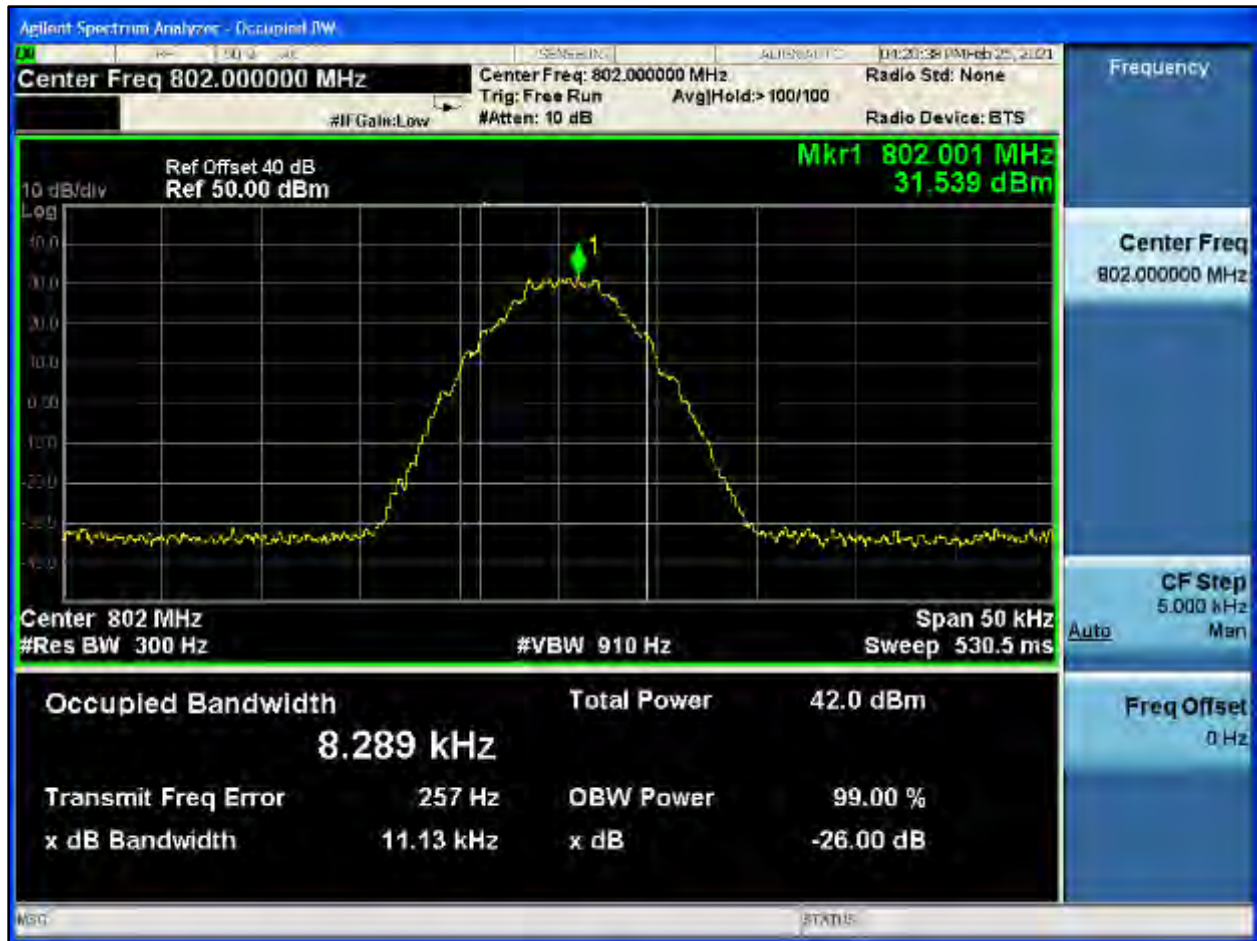


**Plot 8-527: OBW 99%, 802.0000 MHz, H-CPM TDMA**



**Plot 8-528: OBW 99%, 802.0000 MHz, NB 2 FSK**




**Plot 8-529: OBW 99%, 802.0000 MHz, NPSPAC 2 FSK**

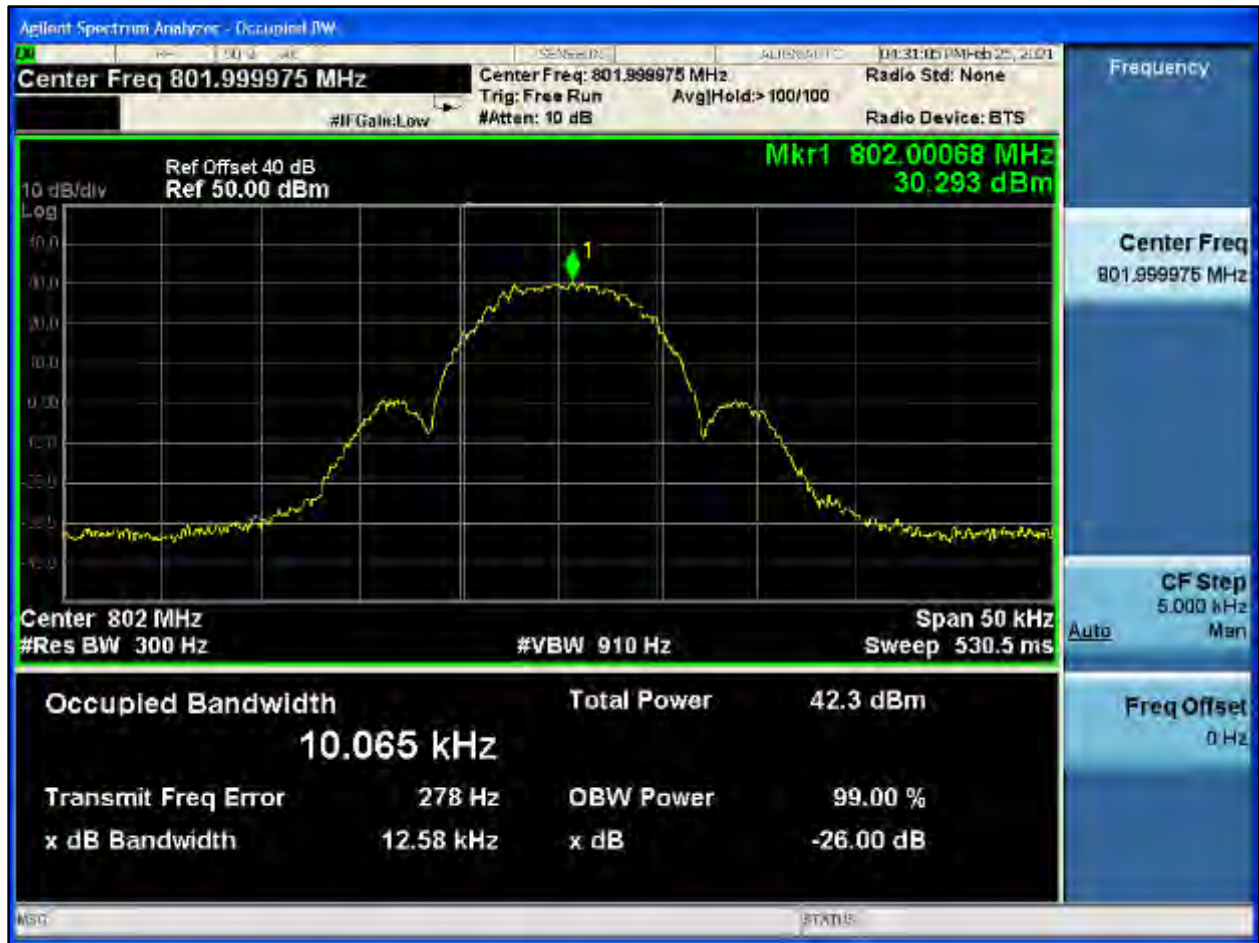

**Plot 8-530: OBW 99%, 802.0000 MHz, WB 2 FSK**




**Plot 8-531: OBW 99%, 802.0000 MHz, HVD SMR**

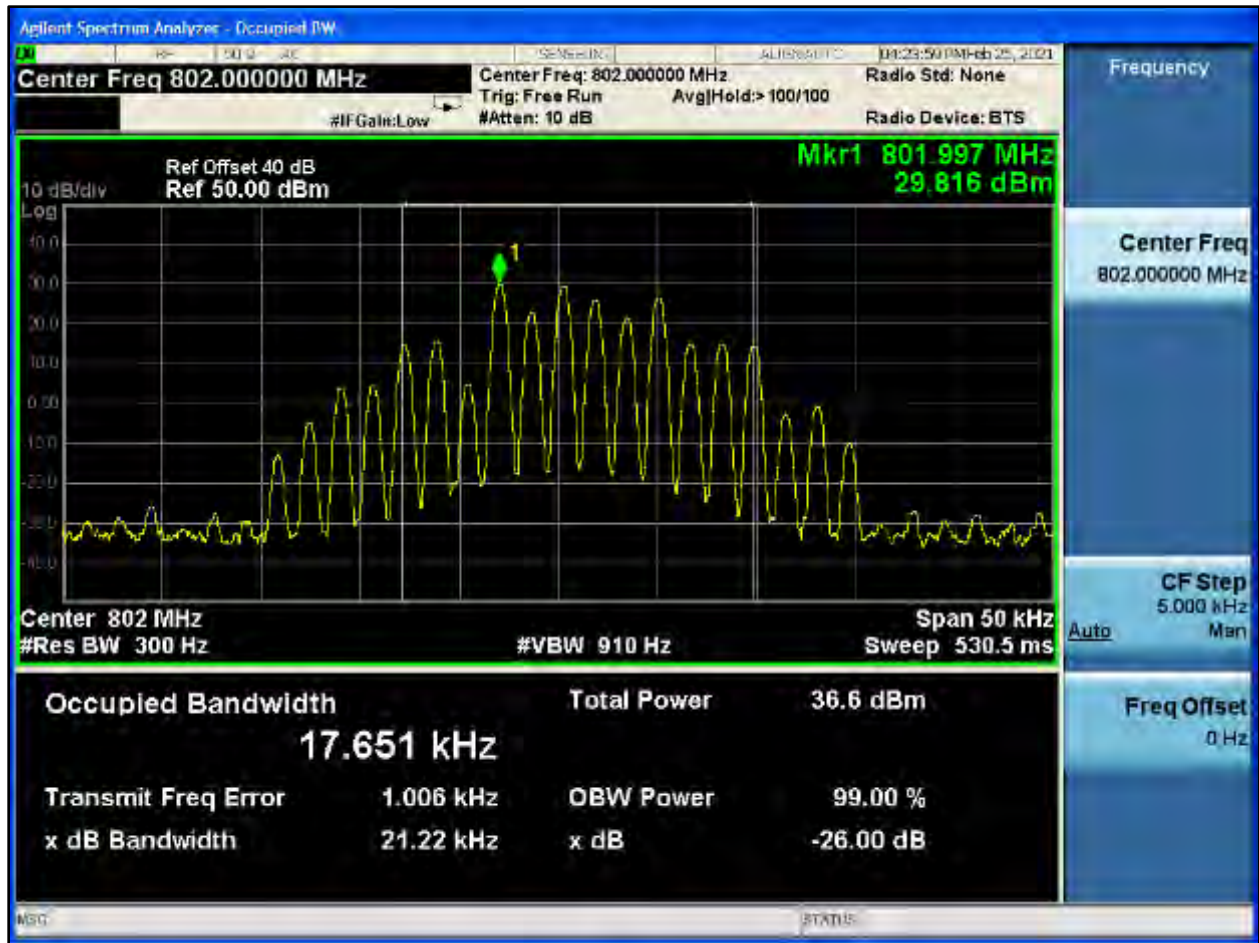





**Plot 8-532: OBW 99%, 802.0000 MHz, HVD NPSPAC**

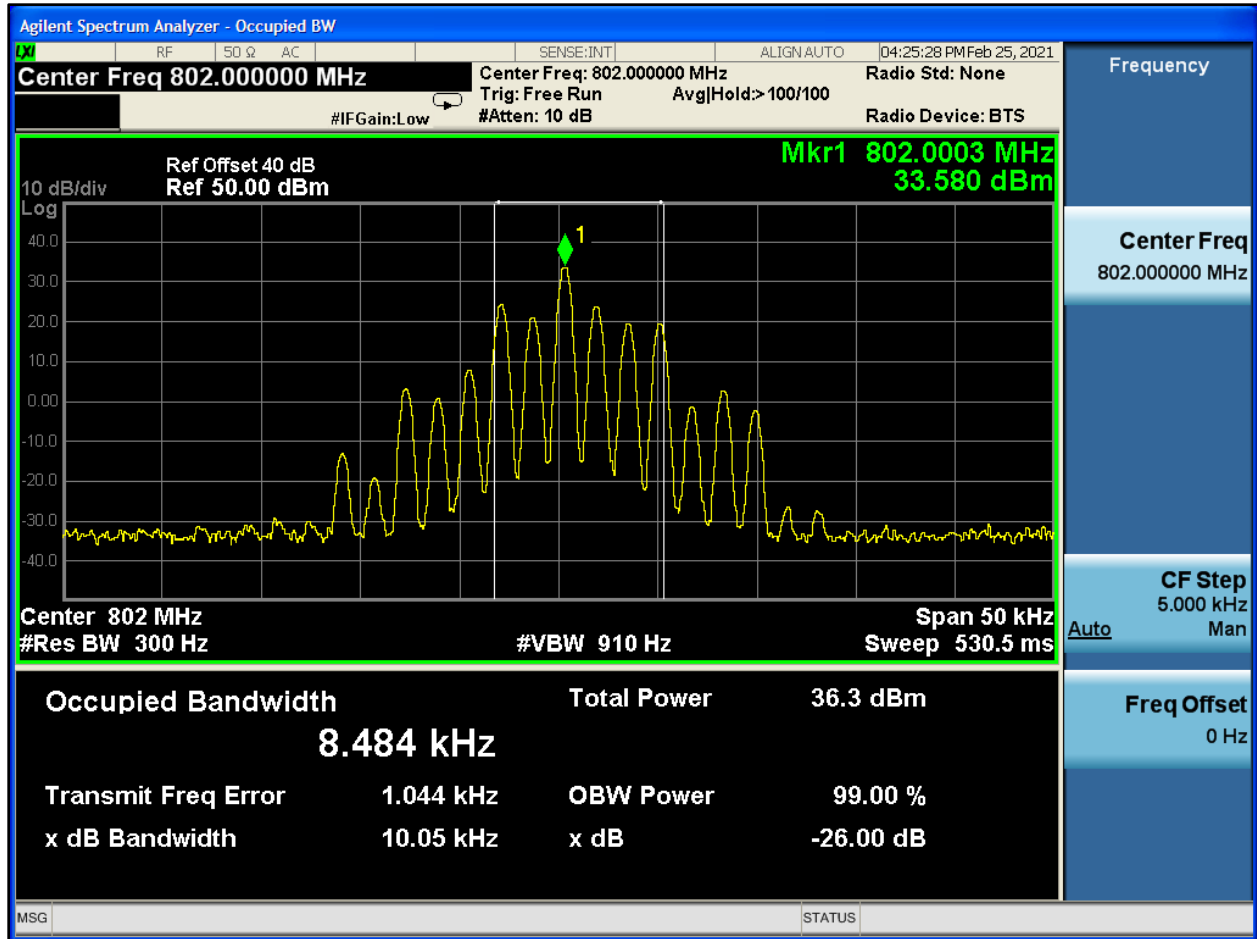

**Plot 8-533: OBW 99%, 804.9875 MHz, NB**

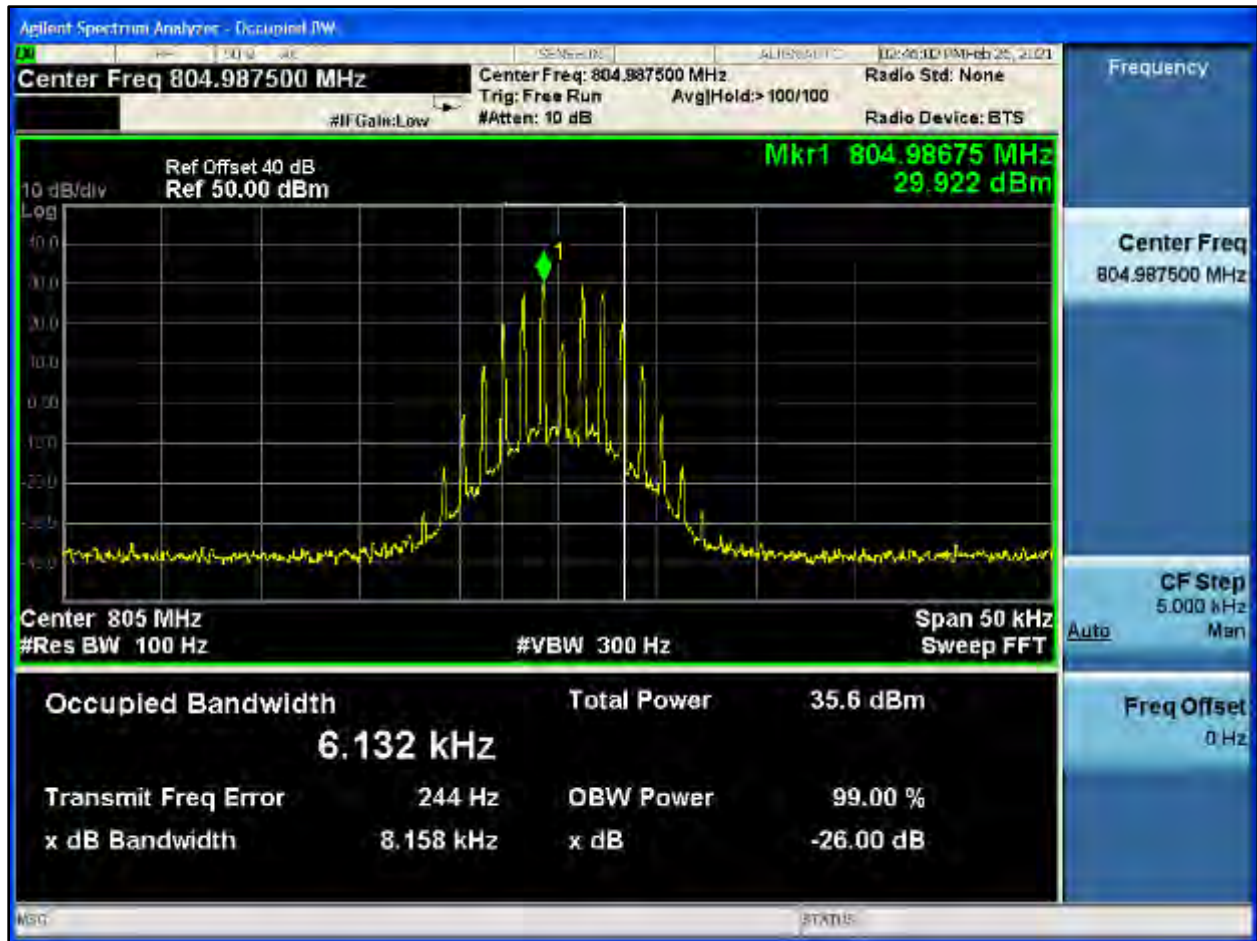

**Plot 8-534: OBW 99%, 804.9875 MHz, NPSPAC**

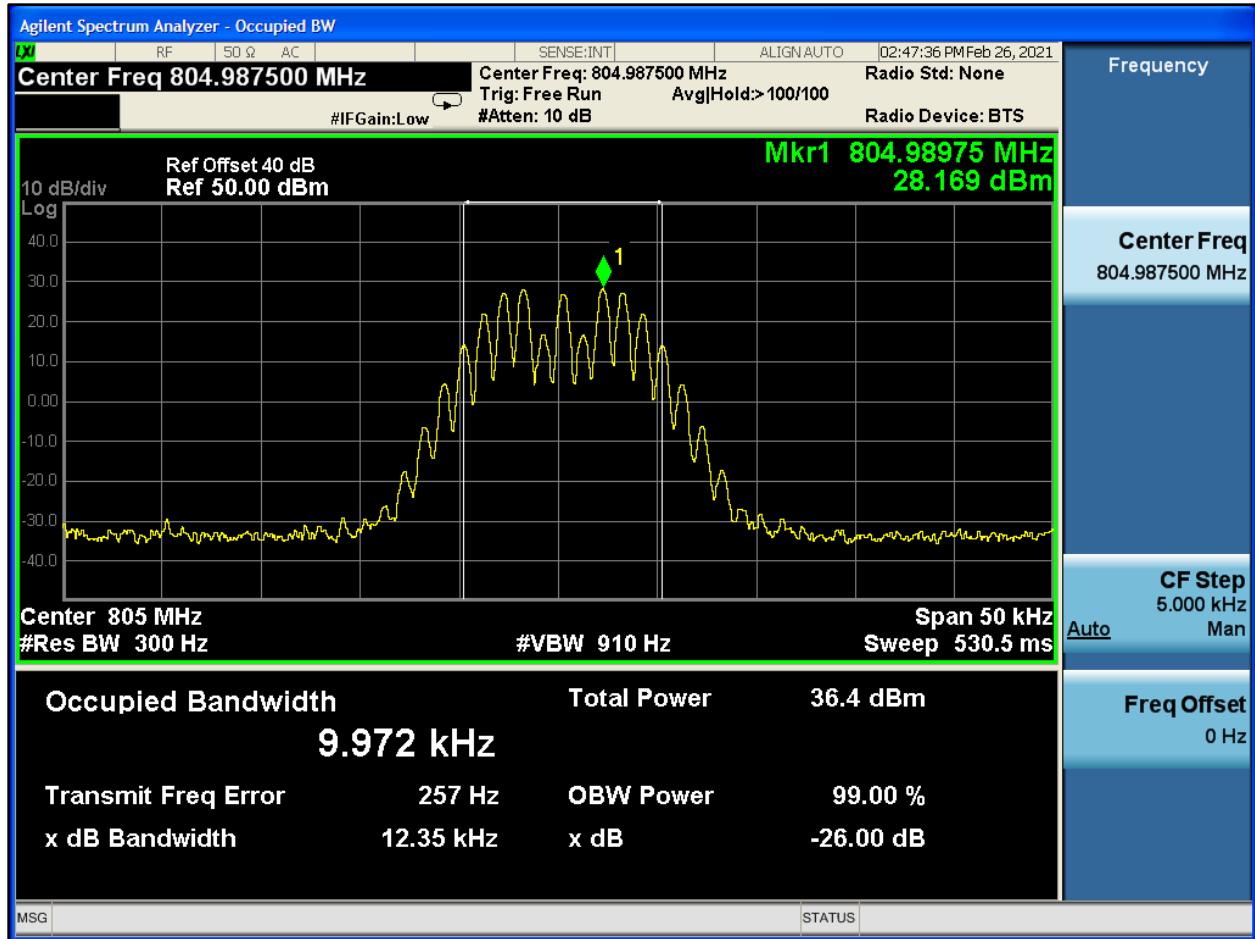

**Plot 8-535: OBW 99%, 804.9875 MHz, WB**



**Plot 8-536: OBW 99%, 804.9875 MHz, C4FM**




**Plot 8-537: OBW 99%, 804.9875 MHz, H-CPM TDMA**



**Plot 8-538: OBW 99%, 804.9875 MHz, NB 2 FSK**



**Plot 8-539: OBW 99%, 804.9875 MHz, NPSPAC 2 FSK**

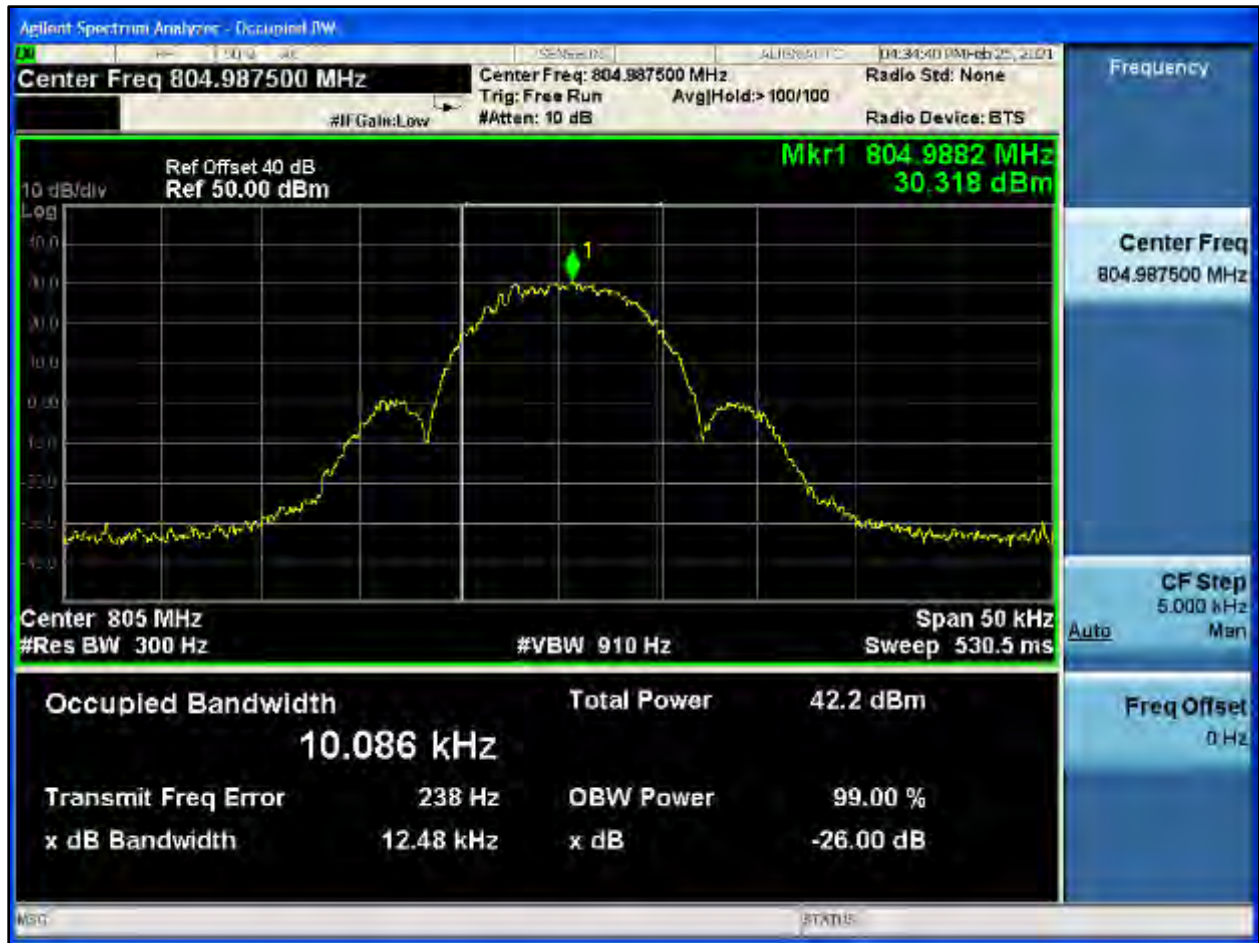





**Plot 8-540: OBW 99%, 804.9875 MHz, WB 2 FSK**




**Plot 8-541: OBW 99%, 804.9875 MHz, HVD SMR**

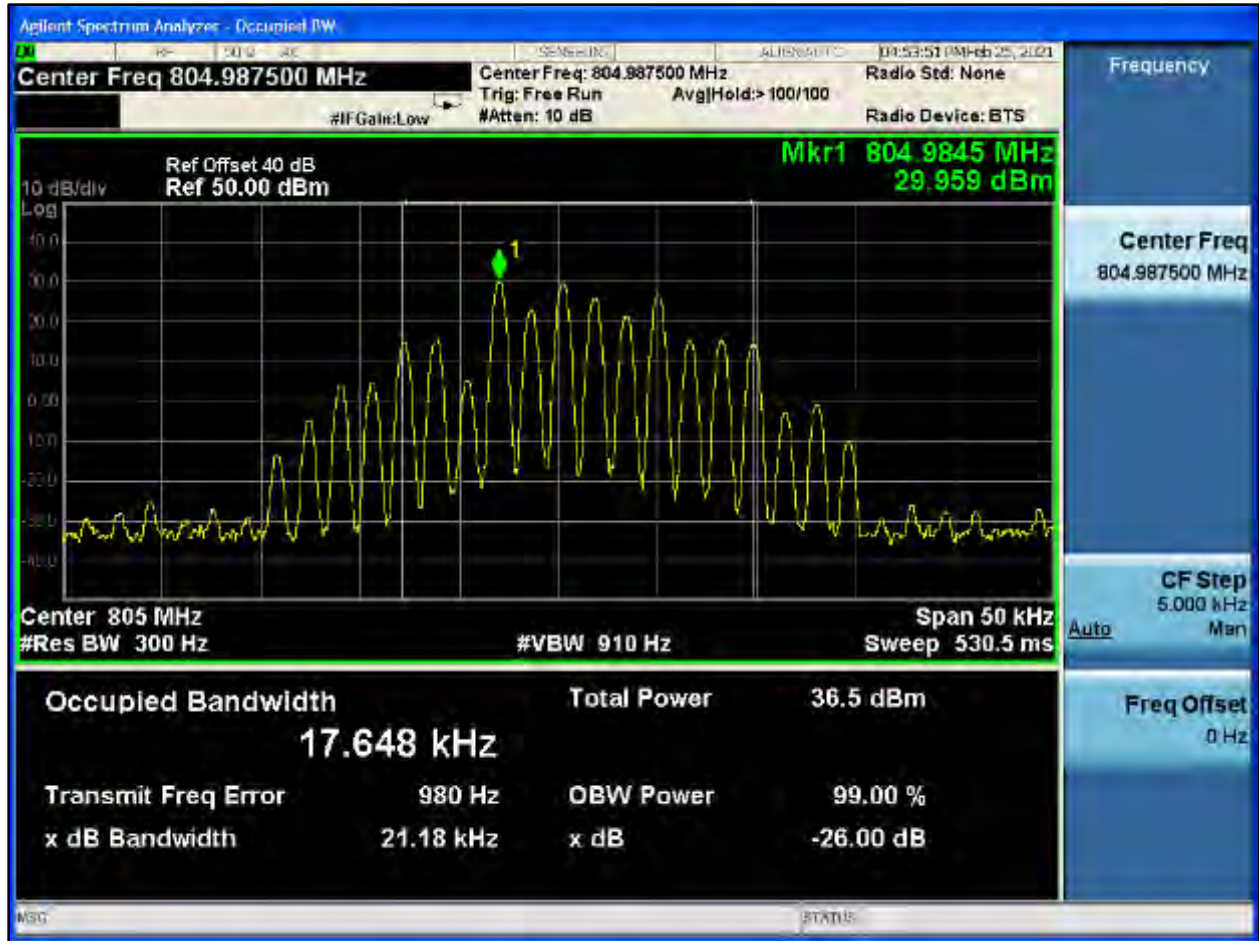


**Plot 8-542: OBW 99%, 804.9875 MHz, HVD NPSPAC**

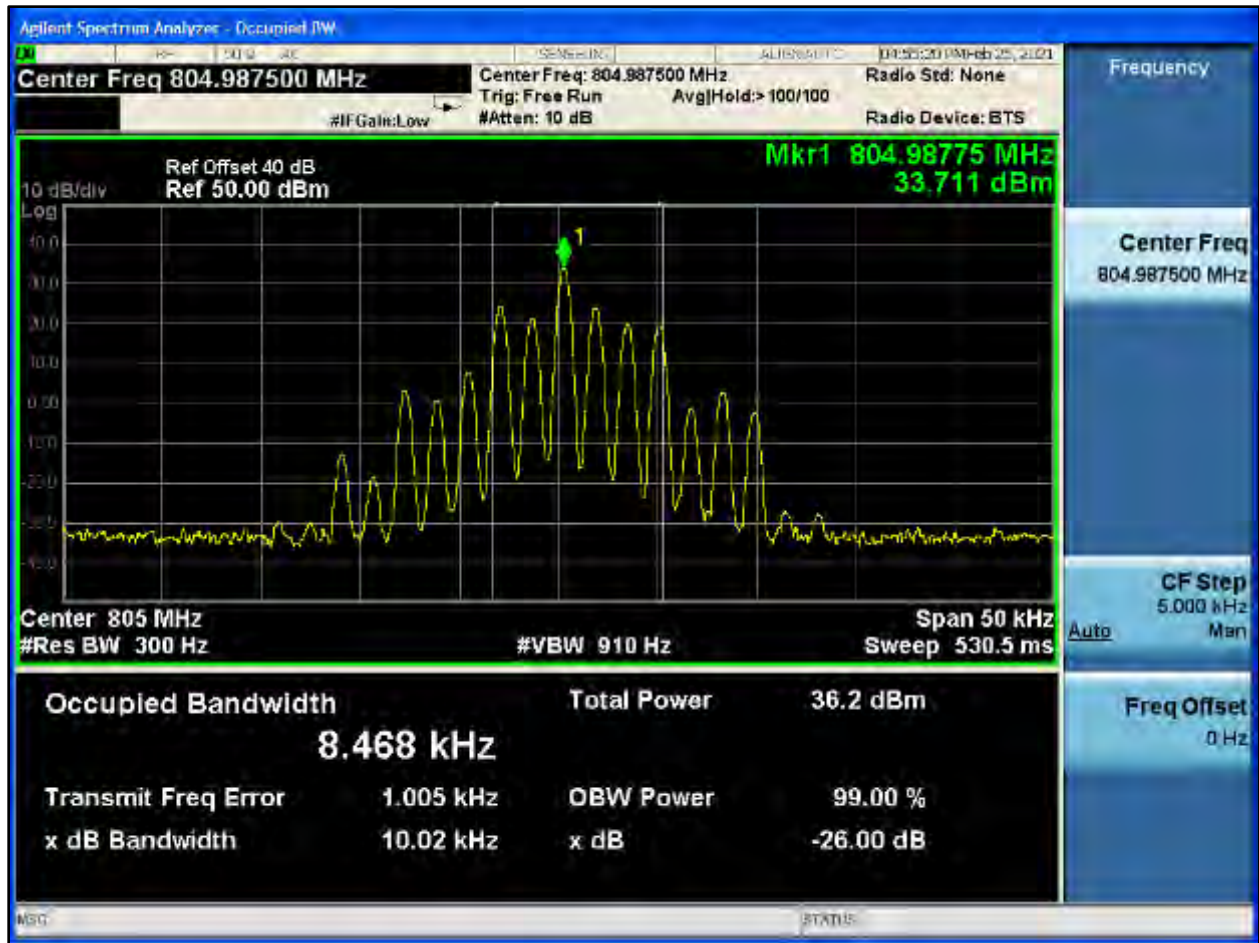

**Plot 8-543: OBW 99%, 805.9875 MHz, NB**

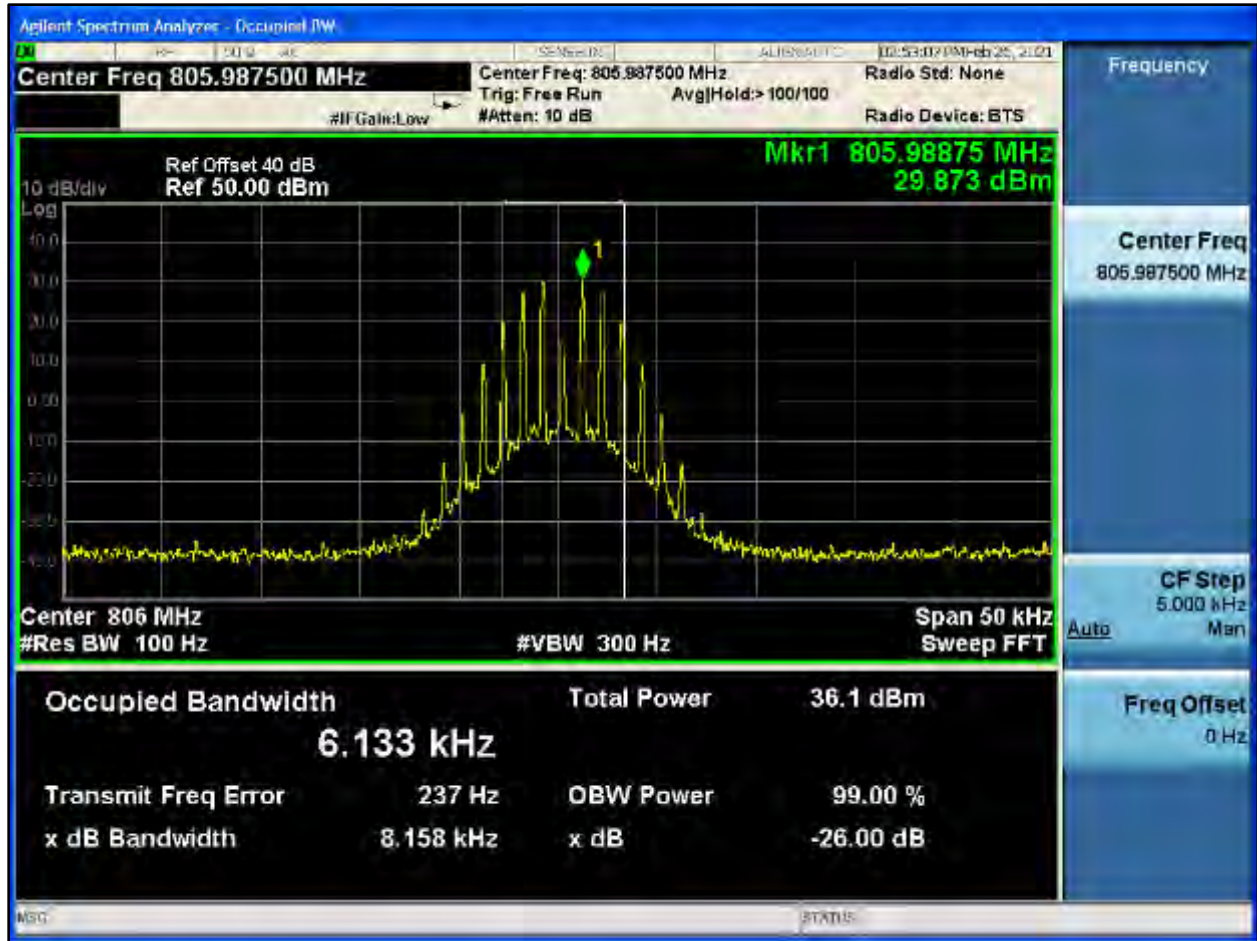


**Plot 8-544: OBW 99%, 805.9875 MHz, NPSPAC**

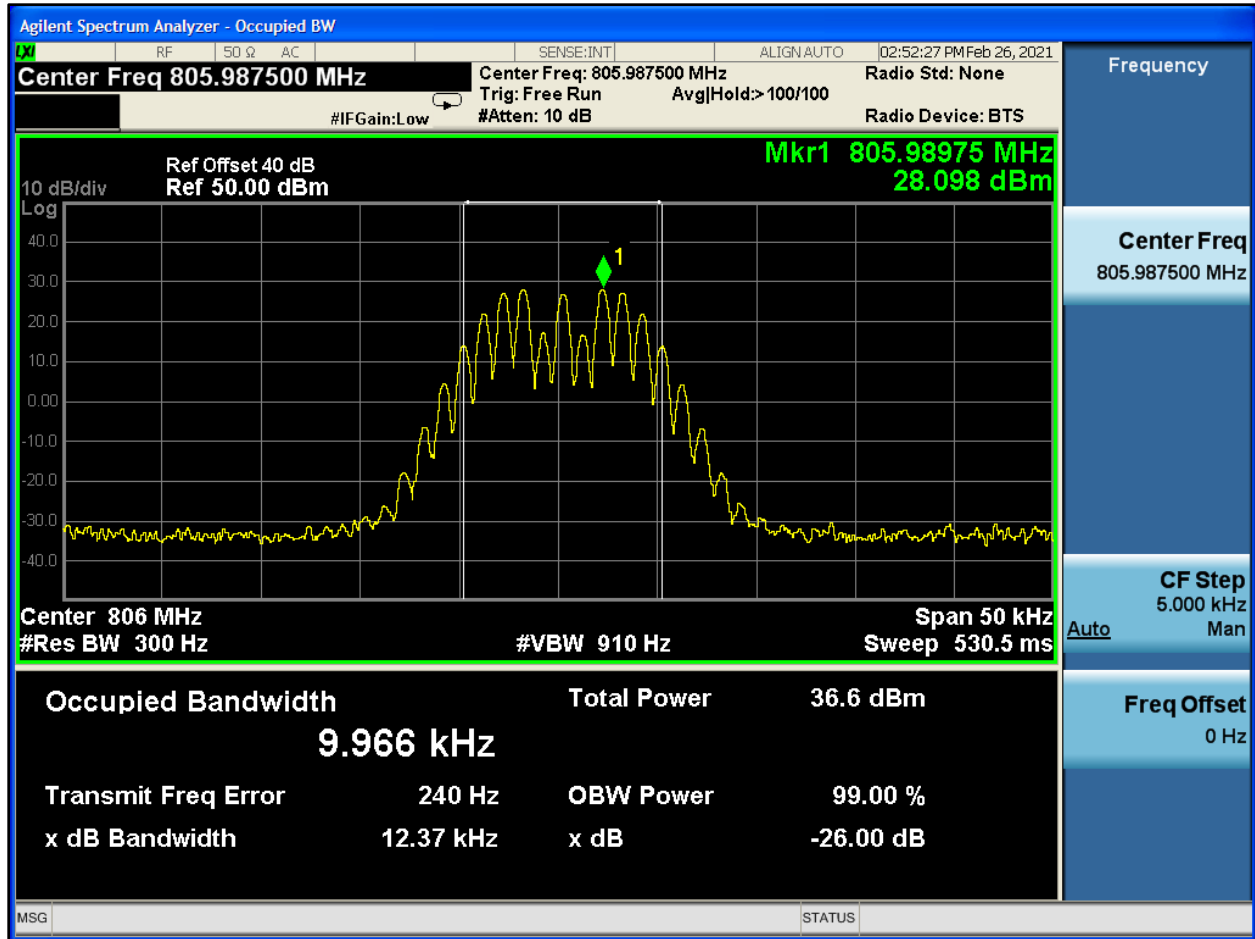


**Plot 8-545: OBW 99%, 805.9875 MHz, WB**



**Plot 8-546: OBW 99%, 805.9875 MHz, C4FM**

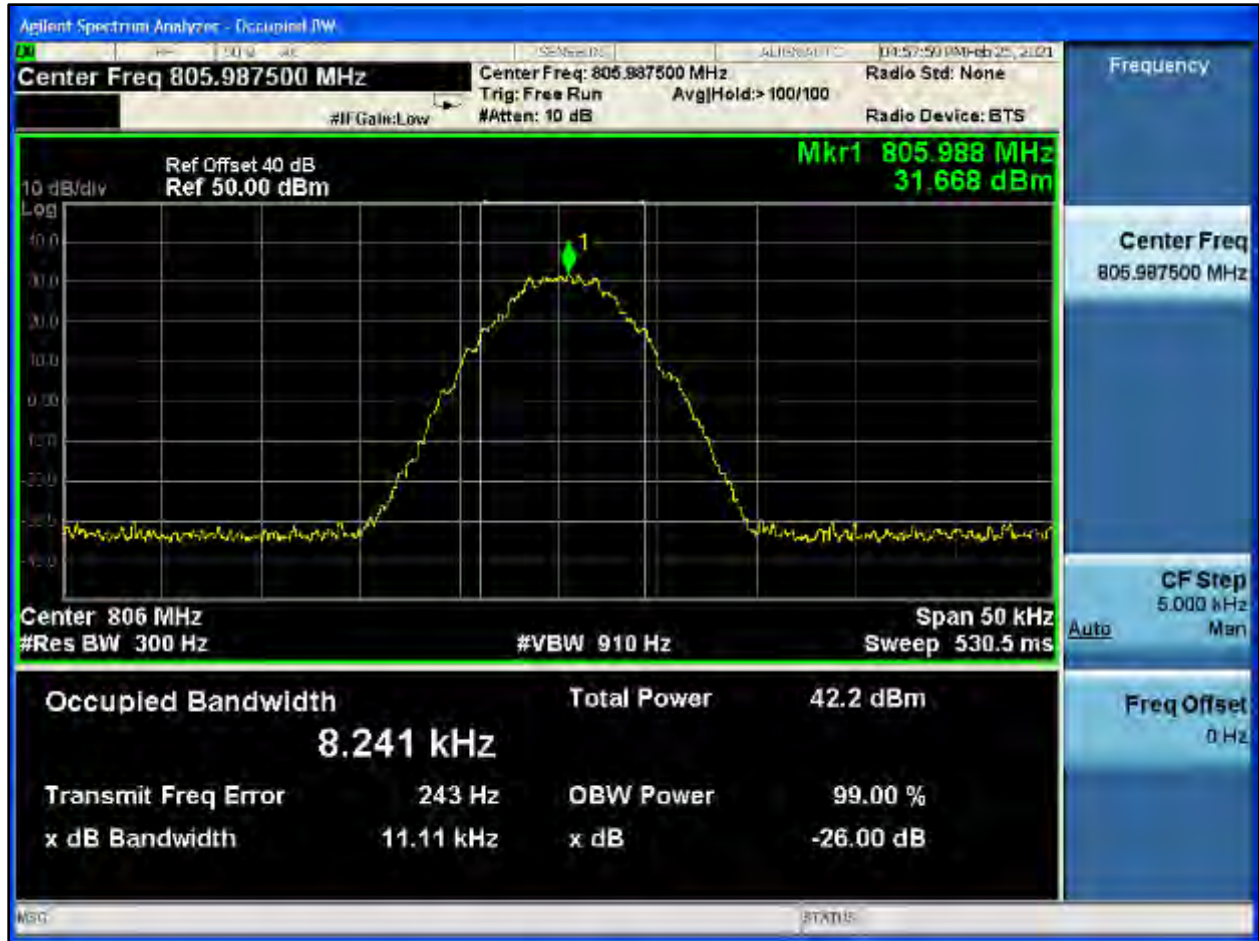


**Plot 8-547: OBW 99%, 805.9875 MHz, H-CPM TDMA**

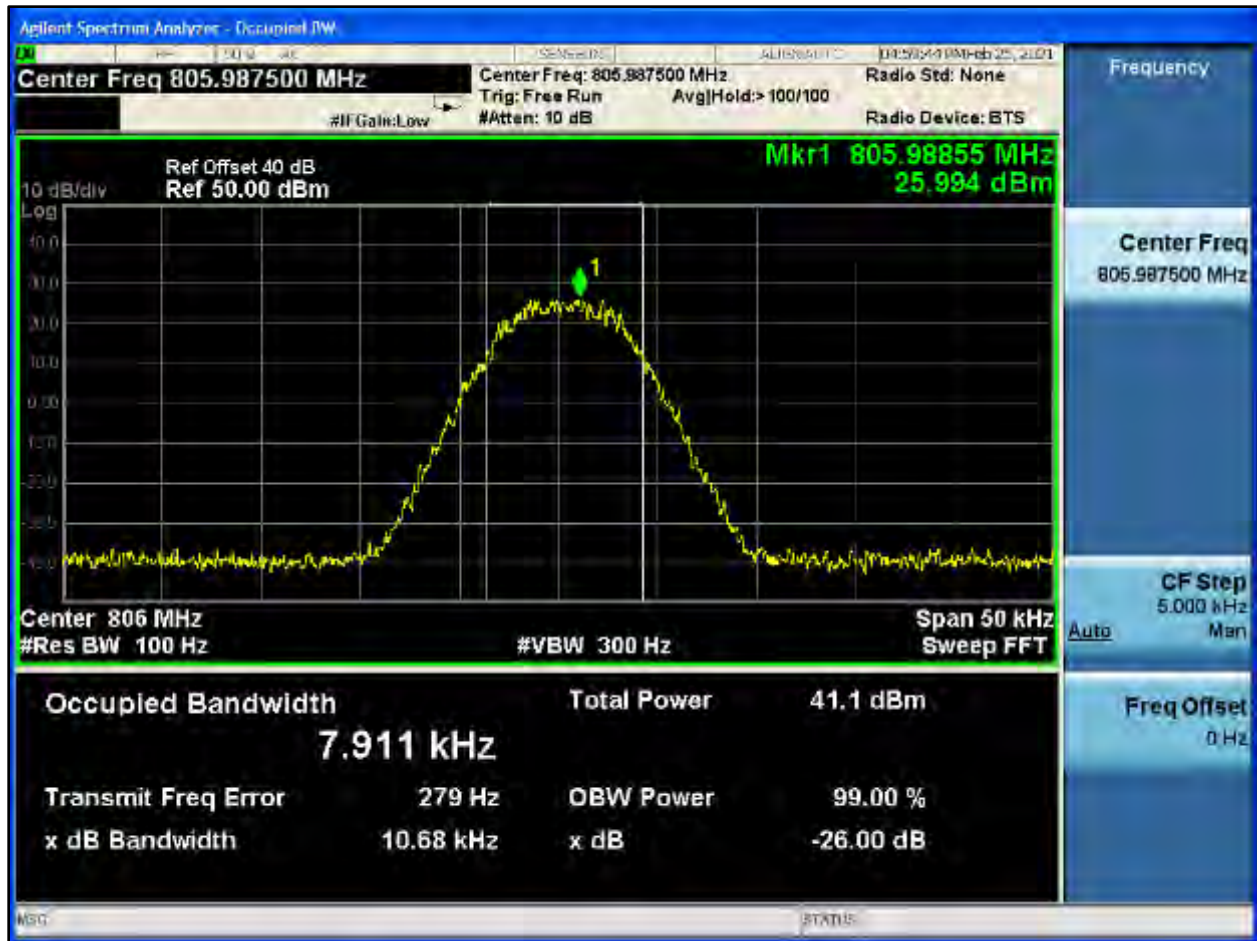




**Plot 8-548: OBW 99%, 805.9875 MHz, NB 2 FSK**

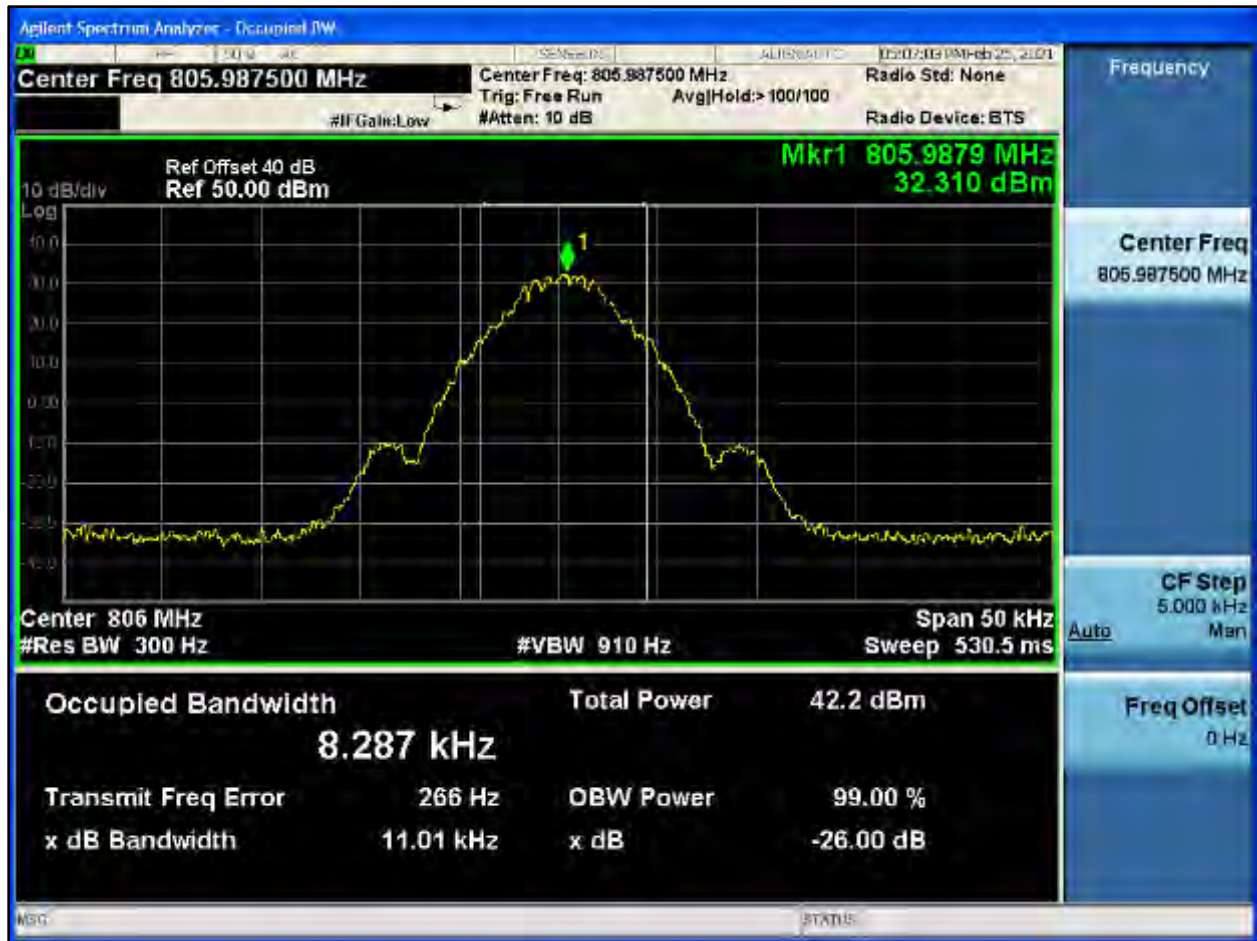


**Plot 8-549: OBW 99%, 805.9875 MHz, NPSPAC 2 FSK**

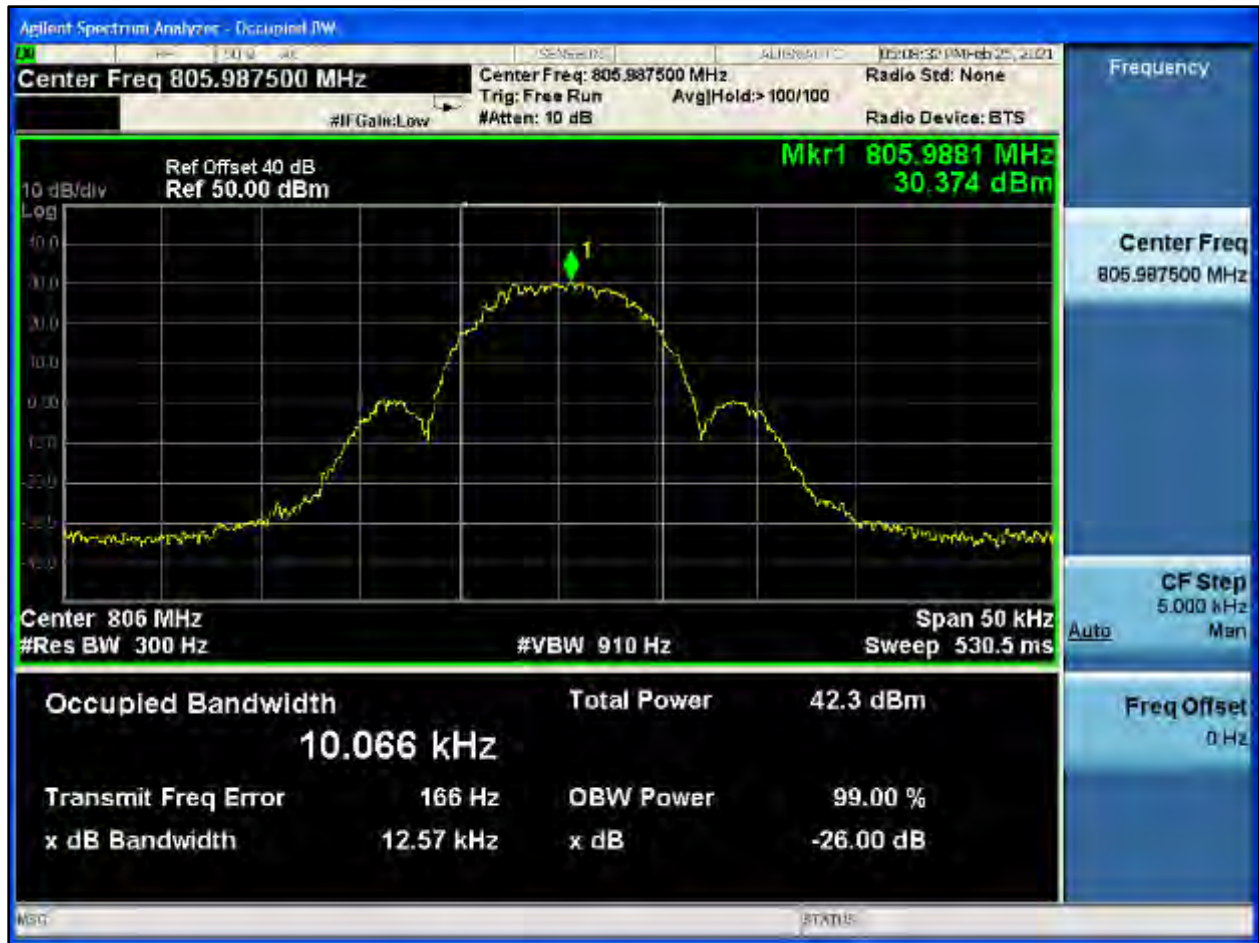

**Plot 8-550: OBW 99%, 805.9875 MHz, WB 2 FSK**




**Plot 8-551: OBW 99%, 805.9875 MHz, HVD SMR**

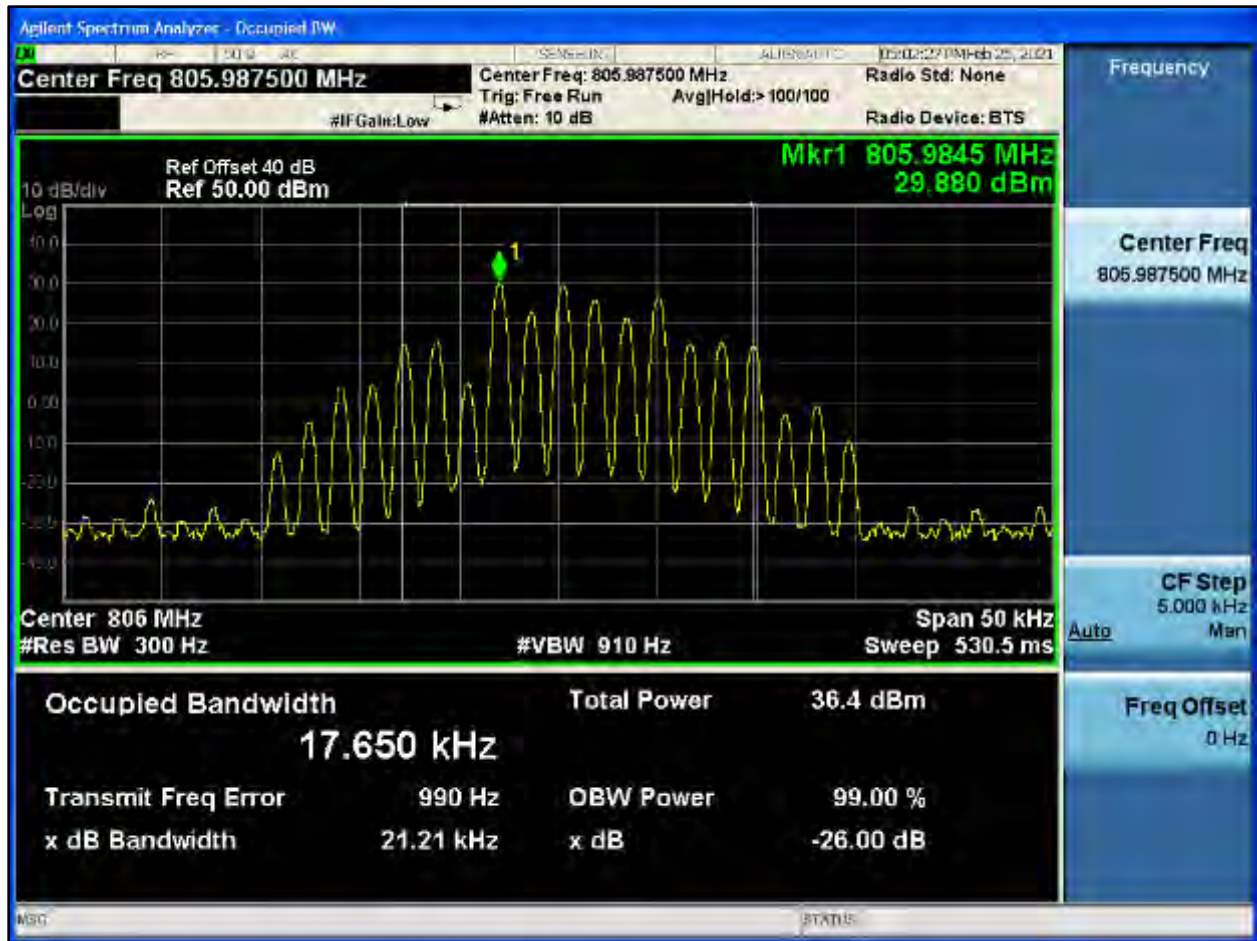


**Plot 8-552: OBW 99%, 805.9875 MHz, HVD NPSPAC**




**Plot 8-553: OBW 99%, 806.0125 MHz, NB**

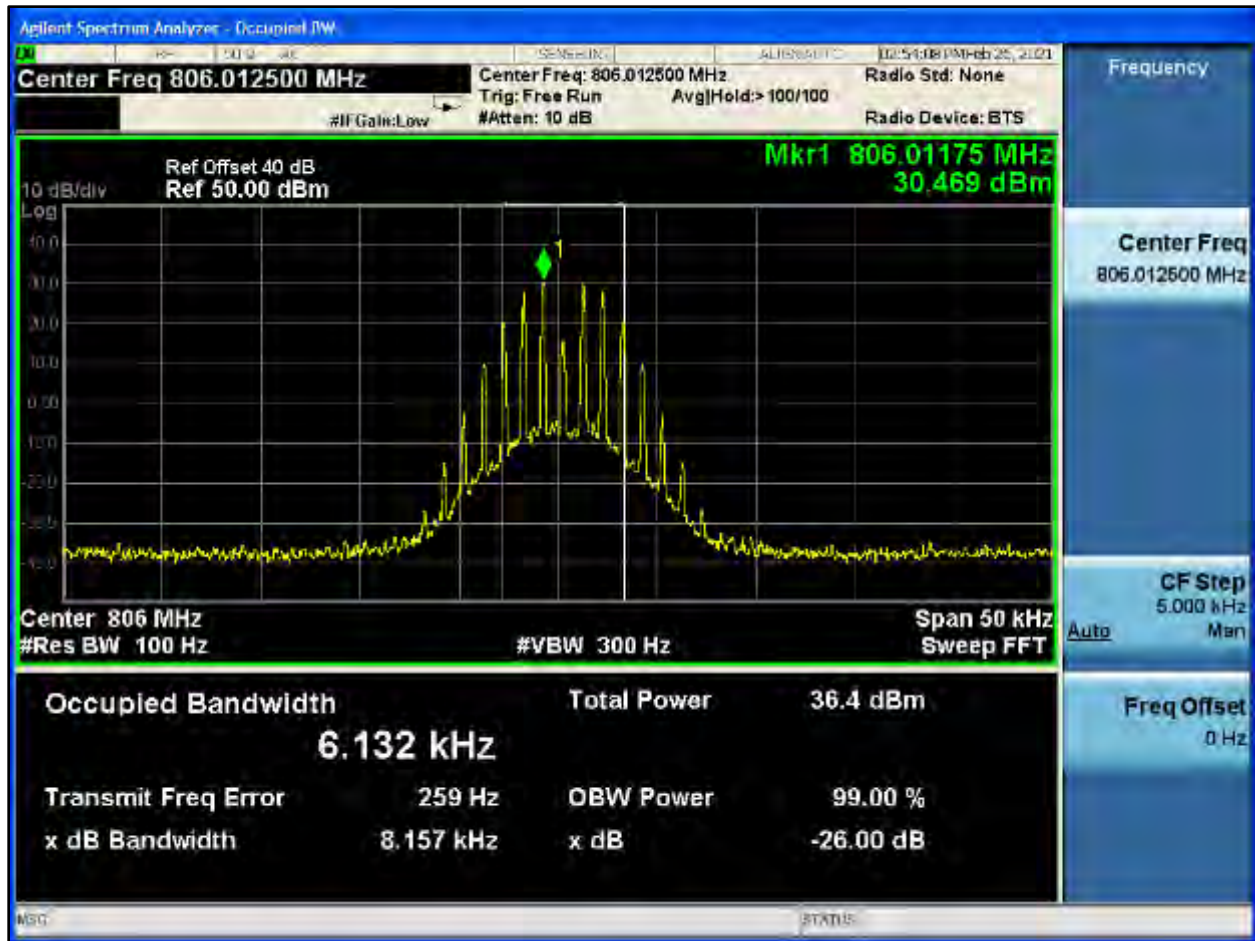

**Plot 8-554: OBW 99%, 806.0125 MHz, NPSPAC**

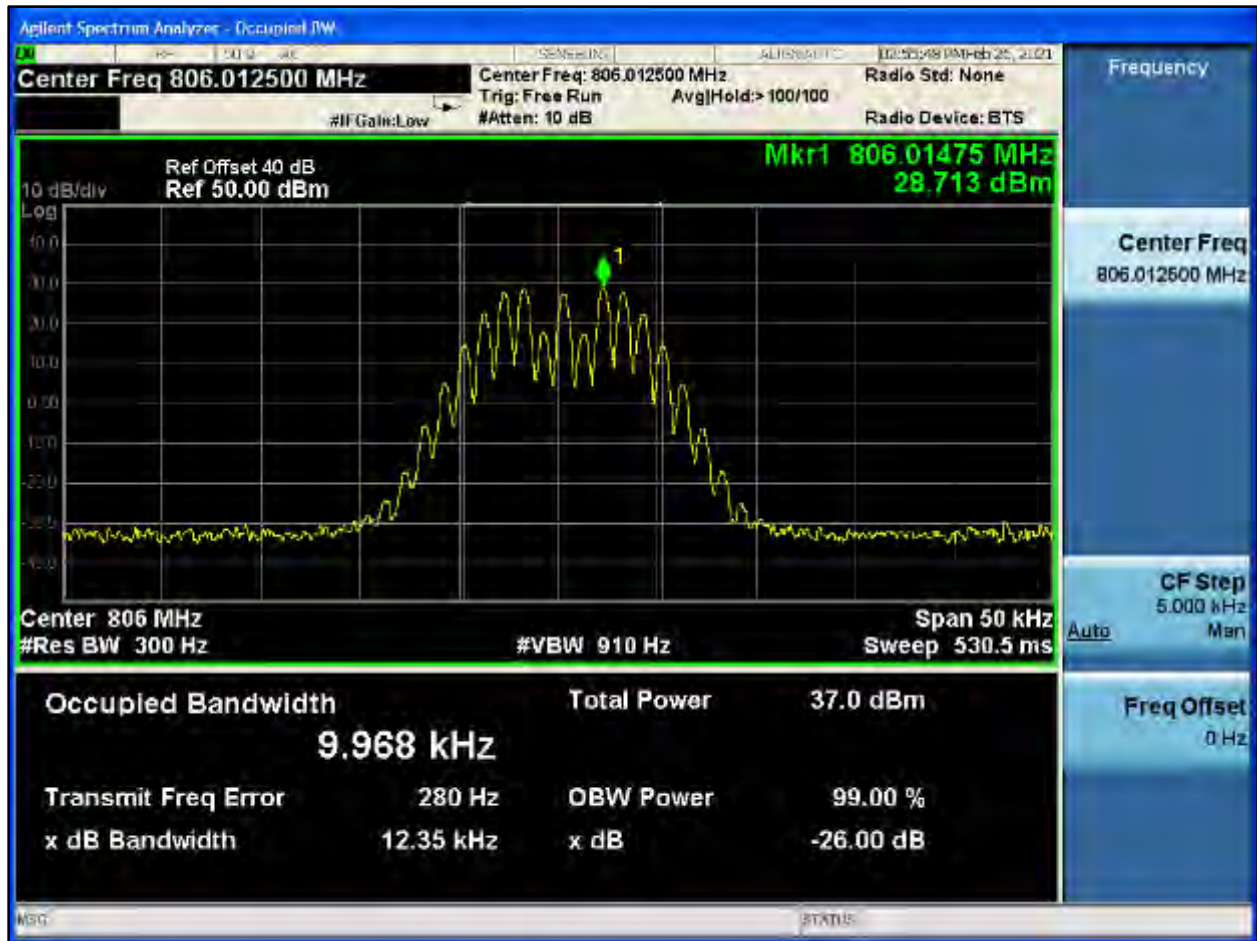


**Plot 8-555: OBW 99%, 806.0125 MHz, WB**

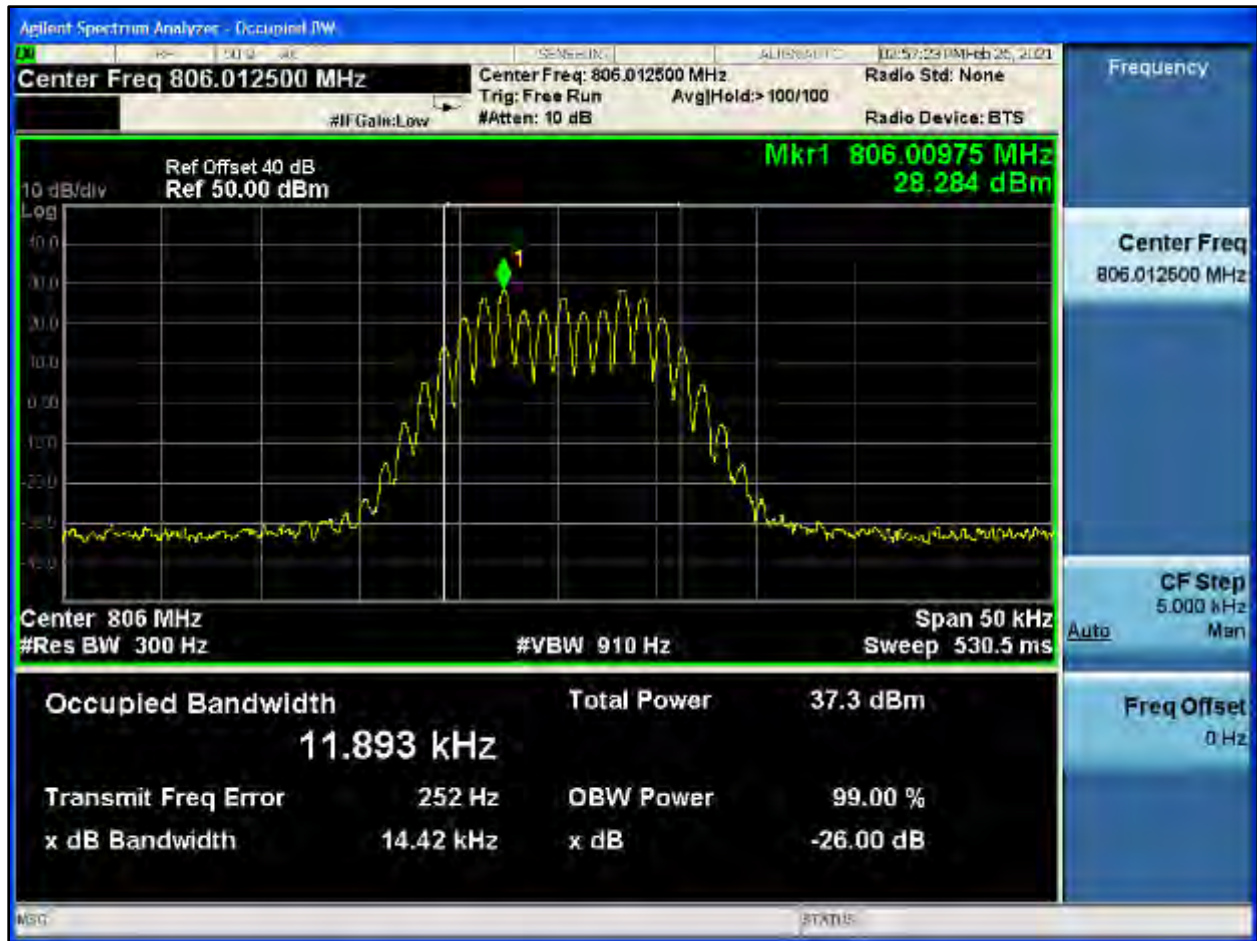




**Plot 8-556: OBW 99%, 806.0125 MHz, C4FM**

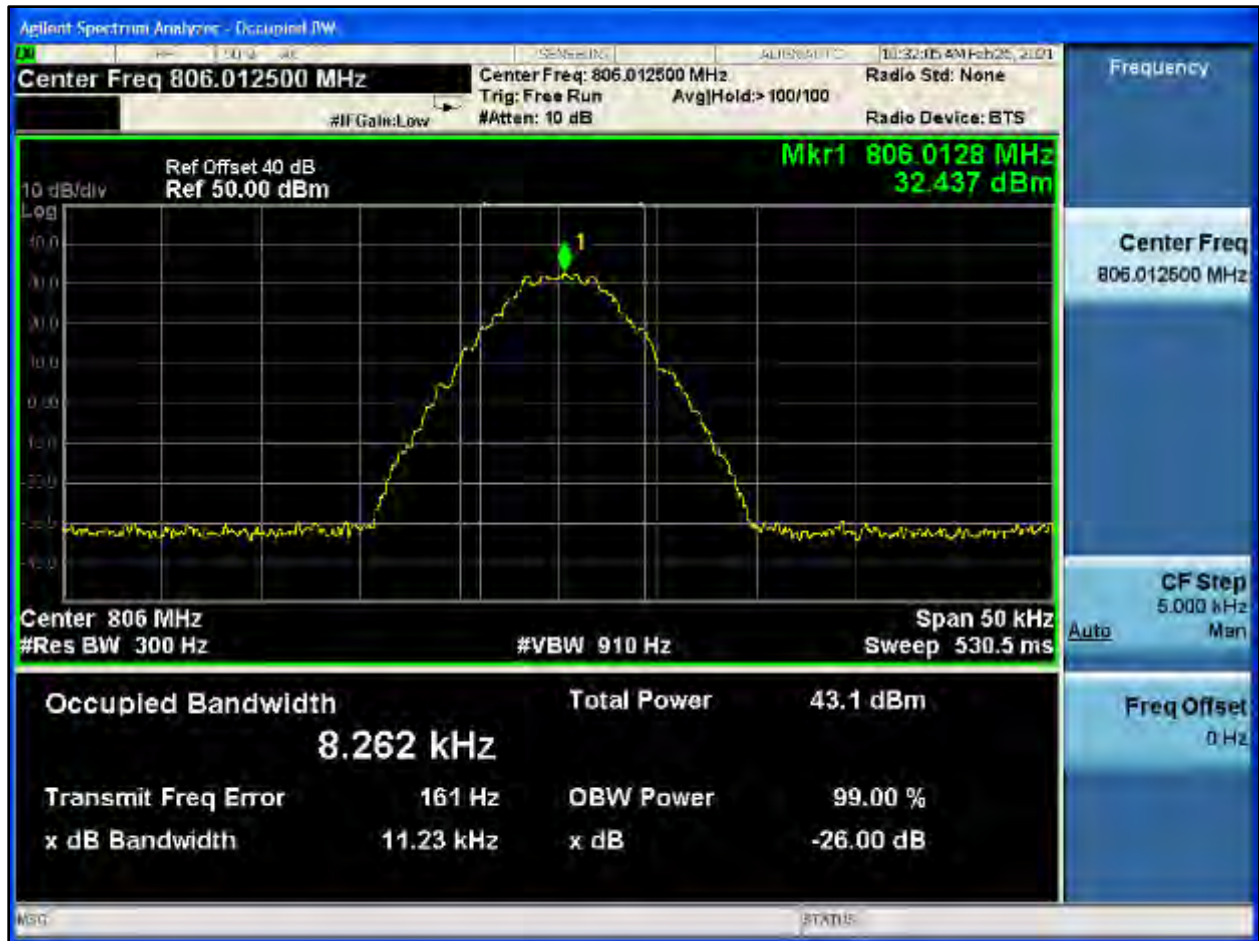

**Plot 8-557: OBW 99%, 806.0125 MHz, H-CPM TDMA**



**Plot 8-558: OBW 99%, 806.0125 MHz, NB 2 FSK**

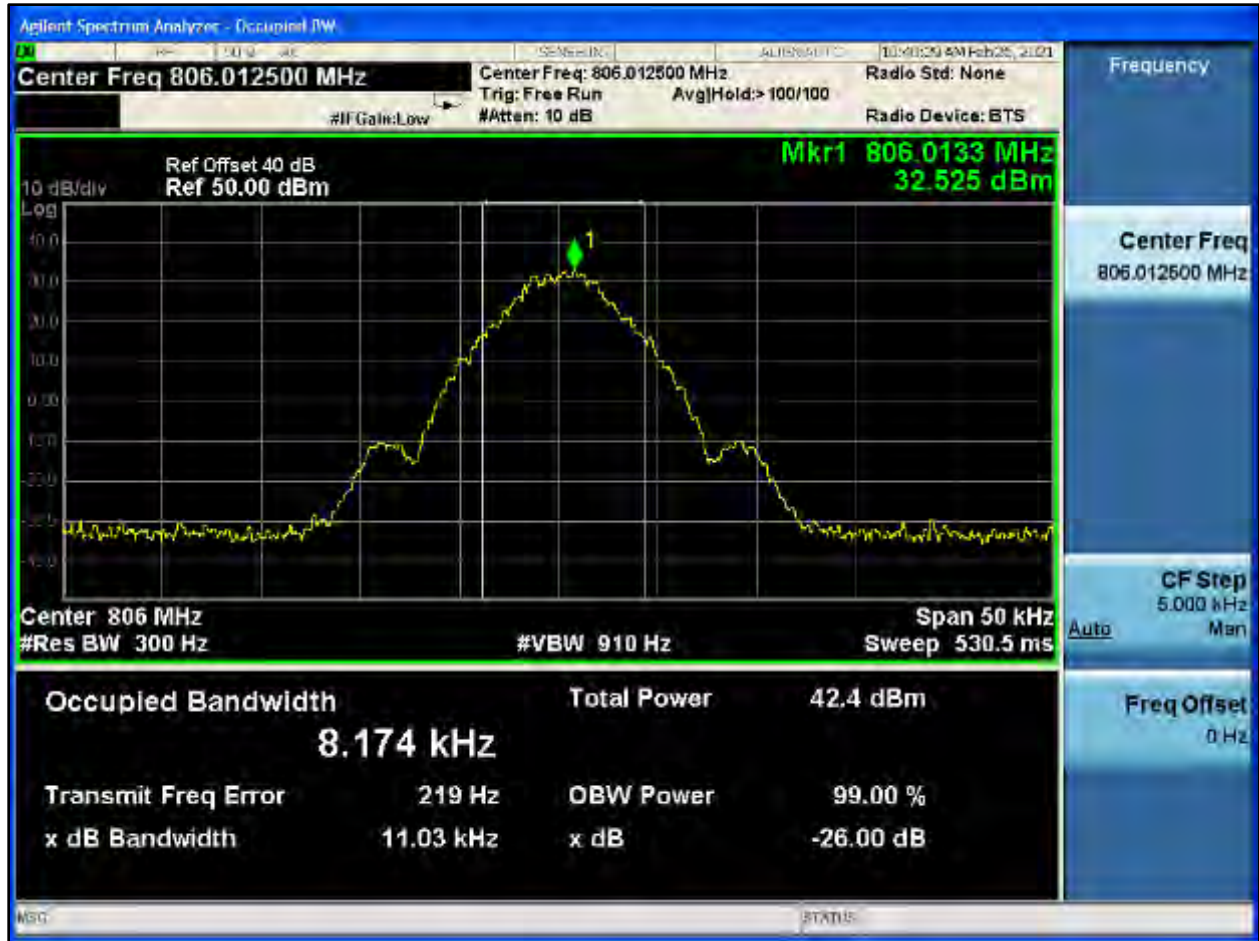


**Plot 8-559: OBW 99%, 806.0125 MHz, NPSPAC 2 FSK**




**Plot 8-560: OBW 99%, 806.0125 MHz, WB 2 FSK**




**Plot 8-561: OBW 99%, 806.0125 MHz, HVD SMR**

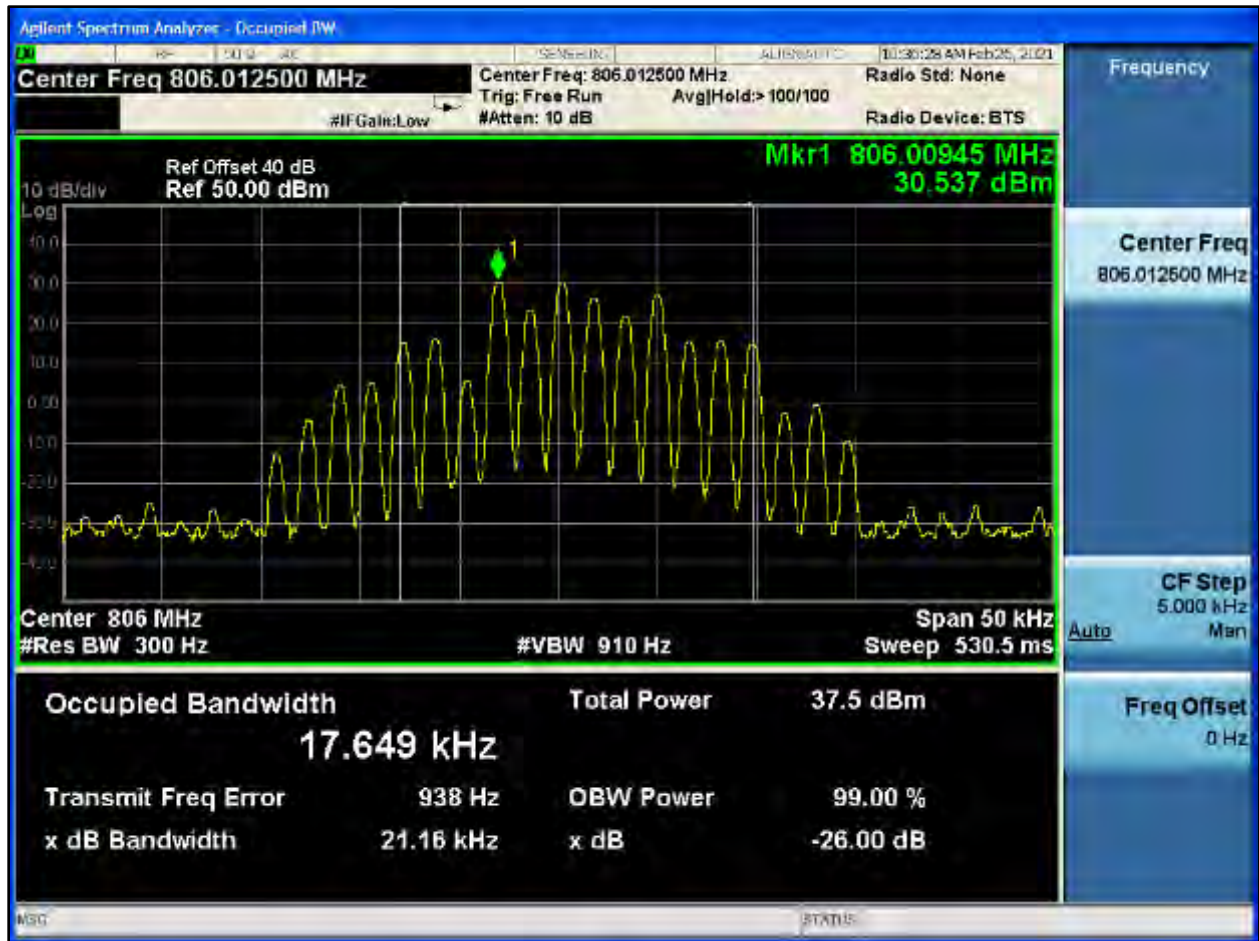

**Plot 8-562: OBW 99%, 806.0125 MHz, HVD NPSPAC**

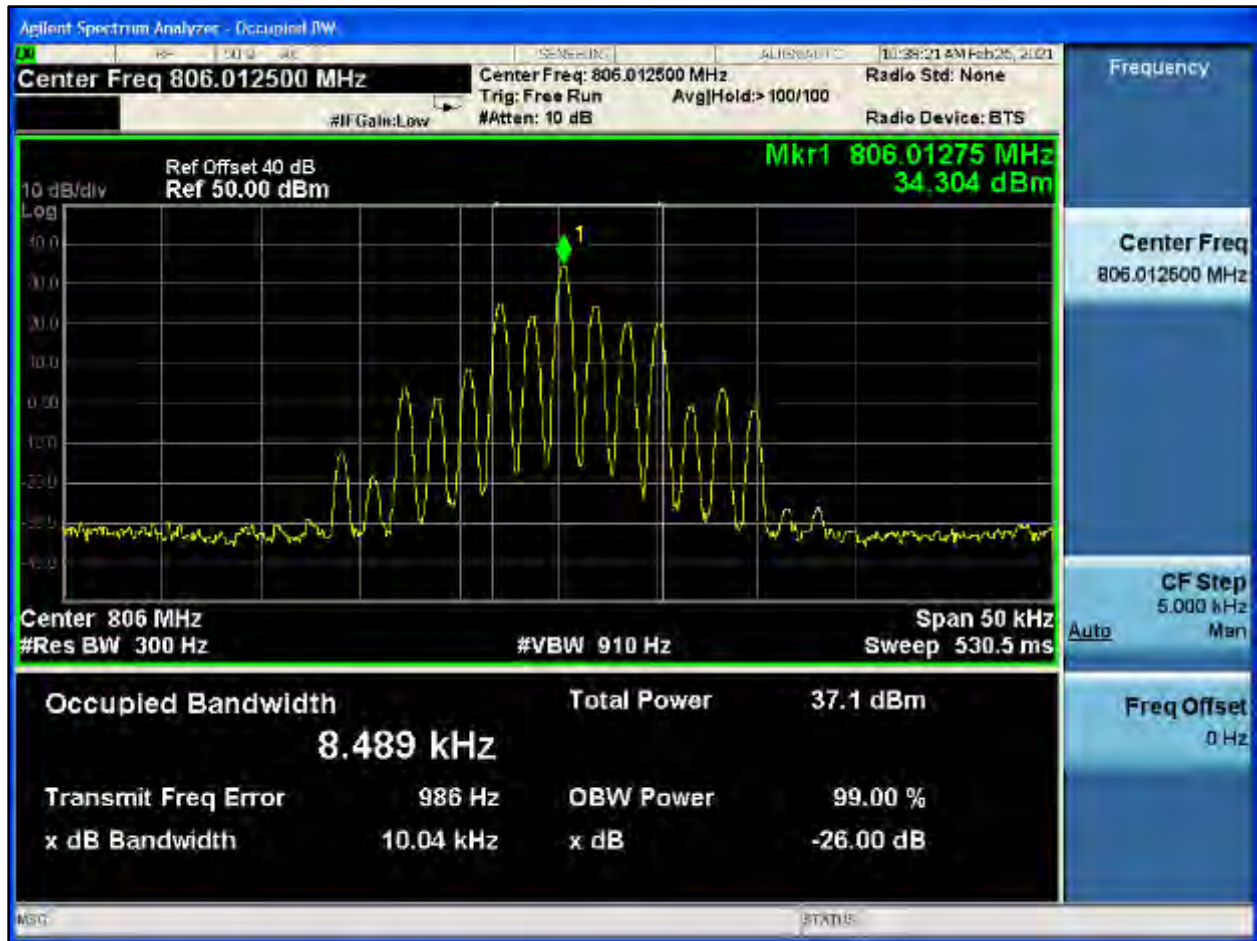


**Plot 8-563: OBW 99%, 815.0000 MHz, NB**

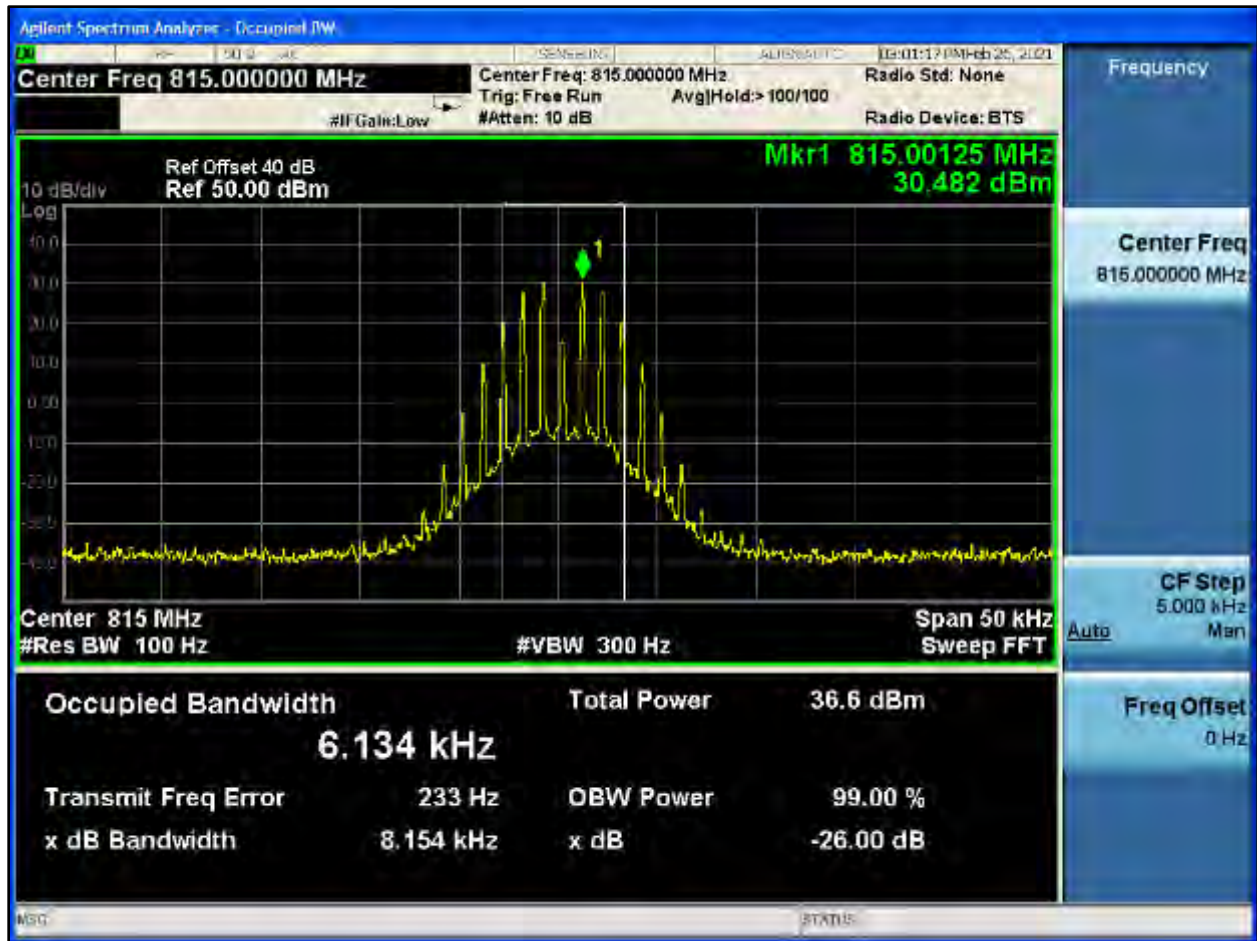




**Plot 8-564: OBW 99%, 815.0000 MHz, NPSPAC**

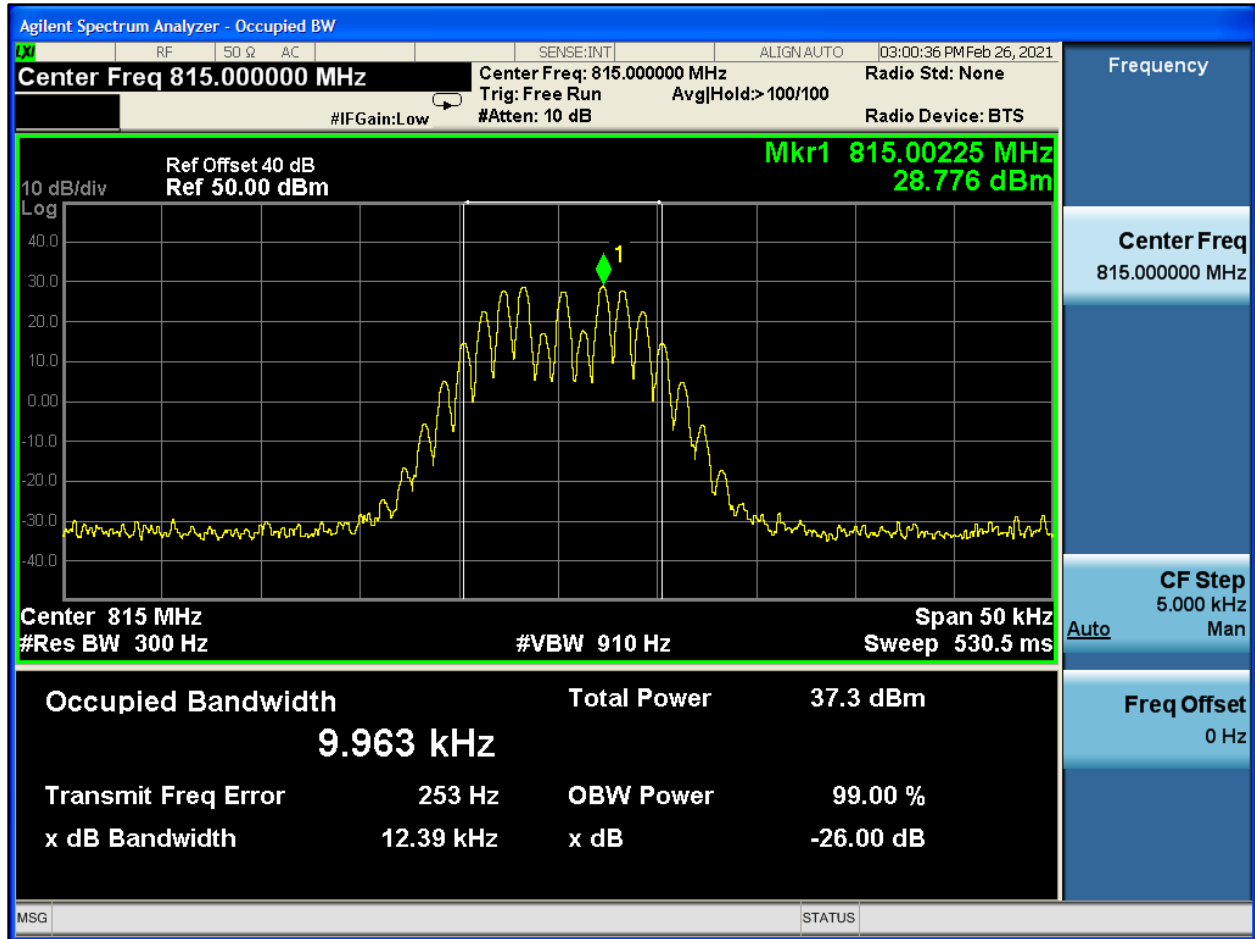


**Plot 8-565: OBW 99%, 815.0000 MHz, WB**

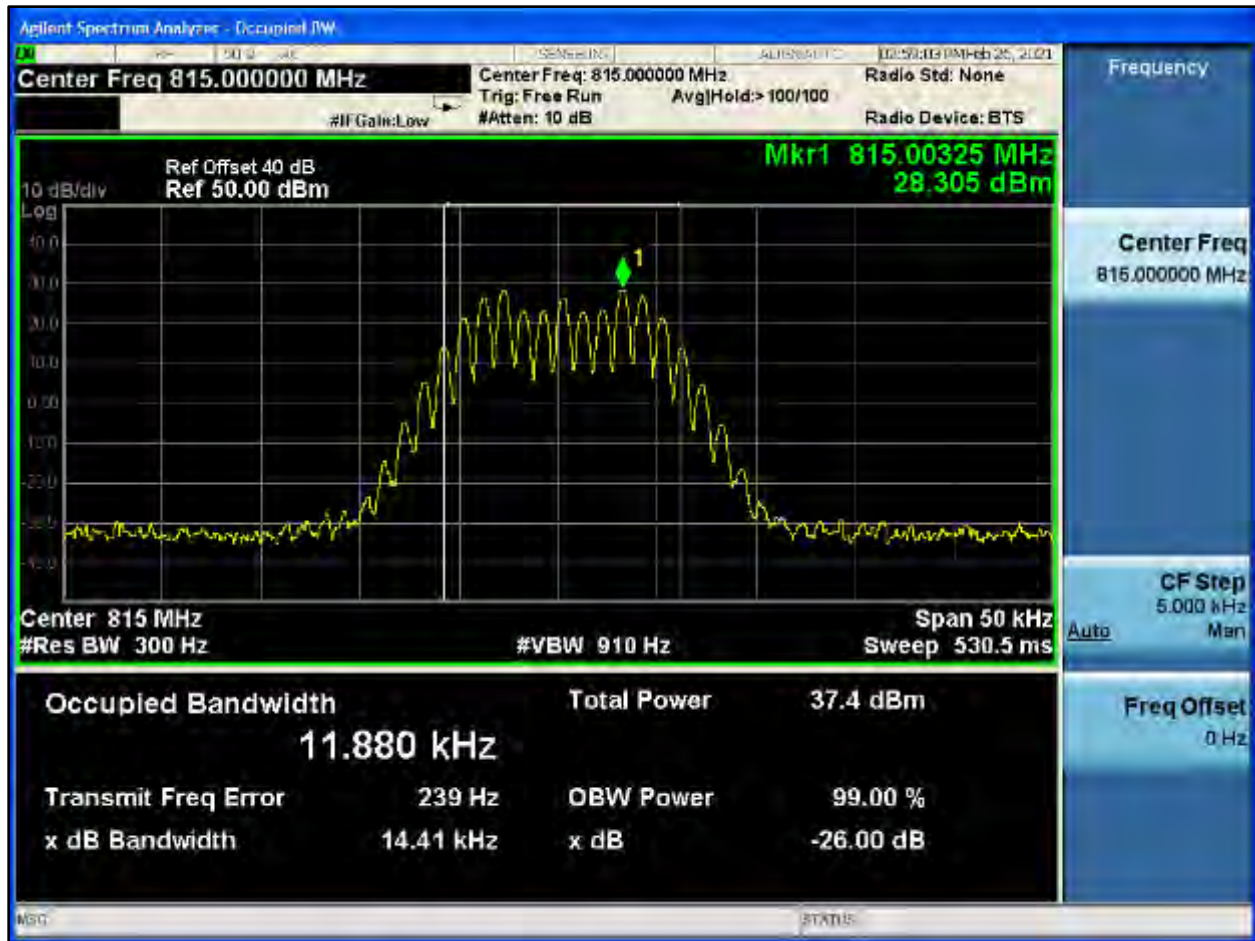

**Plot 8-566: OBW 99%, 815.0000 MHz, C4FM**




**Plot 8-567: OBW 99%, 815.0000 MHz, H-CPM TDMA**

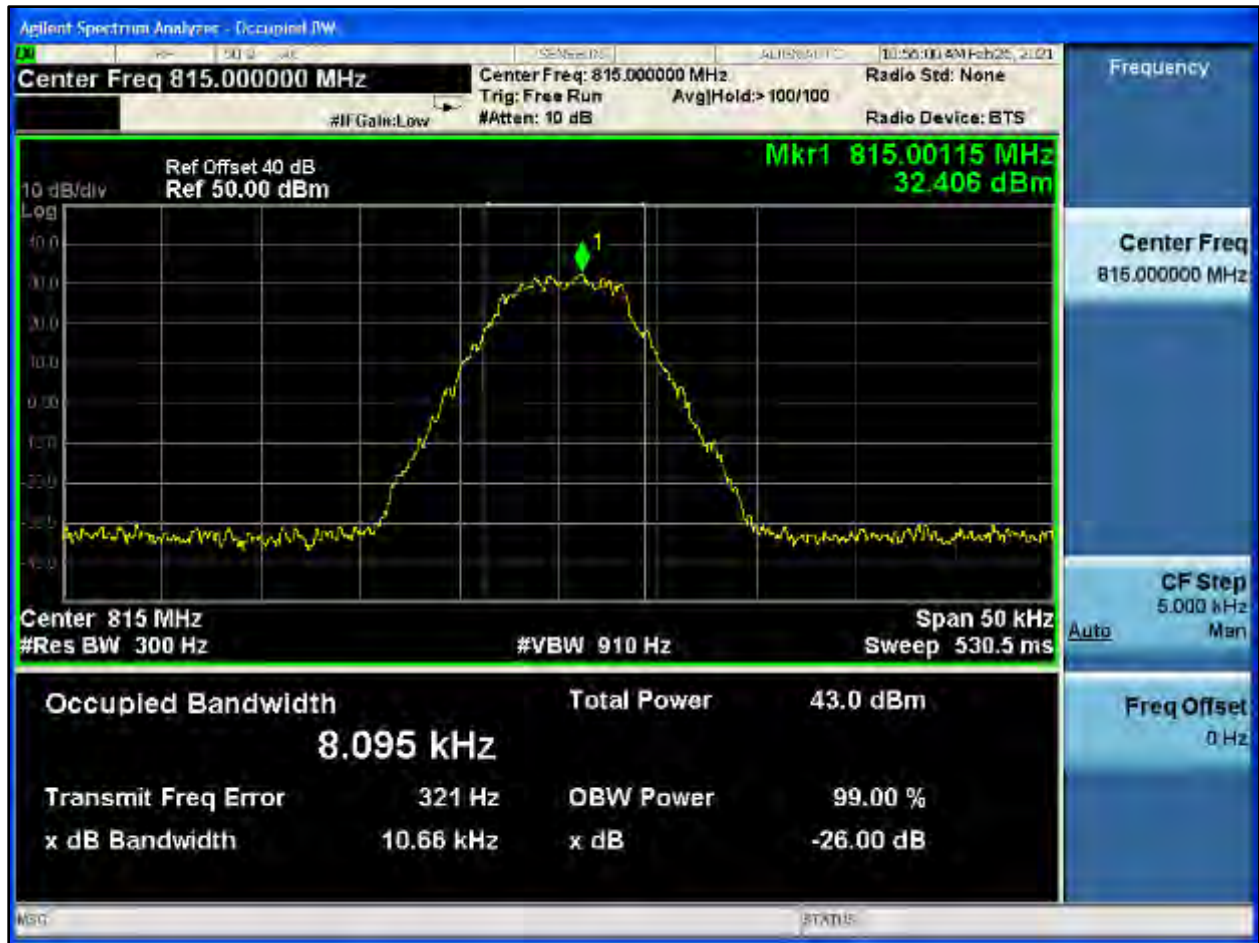

**Plot 8-568: OBW 99%, 815.0000 MHz, NB 2 FSK**




**Plot 8-569: OBW 99%, 815.0000 MHz, NPSPAC 2 FSK**

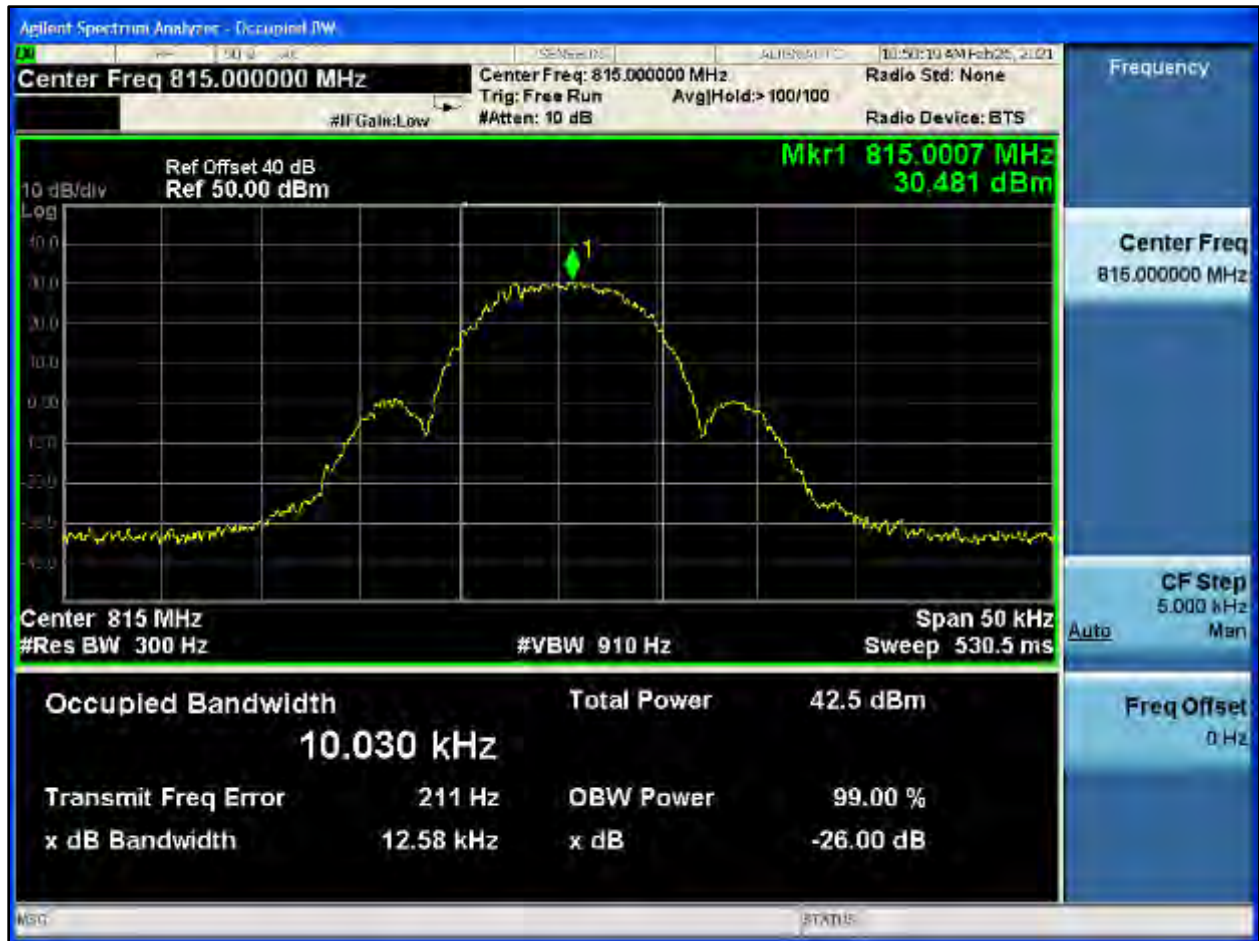

**Plot 8-570: OBW 99%, 815.0000 MHz, WB 2 FSK**




**Plot 8-571: OBW 99%, 815.0000 MHz, HVD SMR**

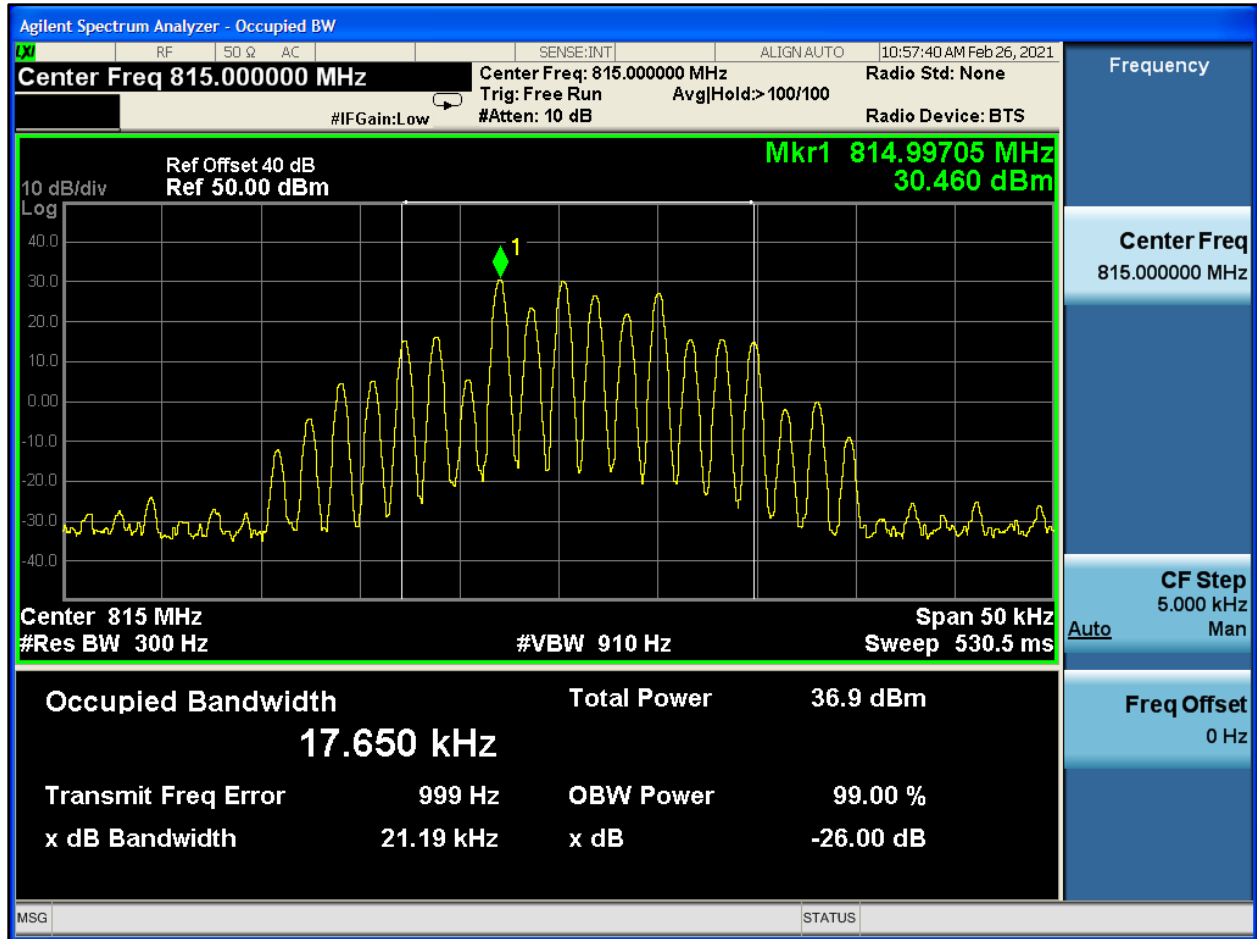





**Plot 8-572: OBW 99%, 815.0000 MHz, HVD NPSPAC**

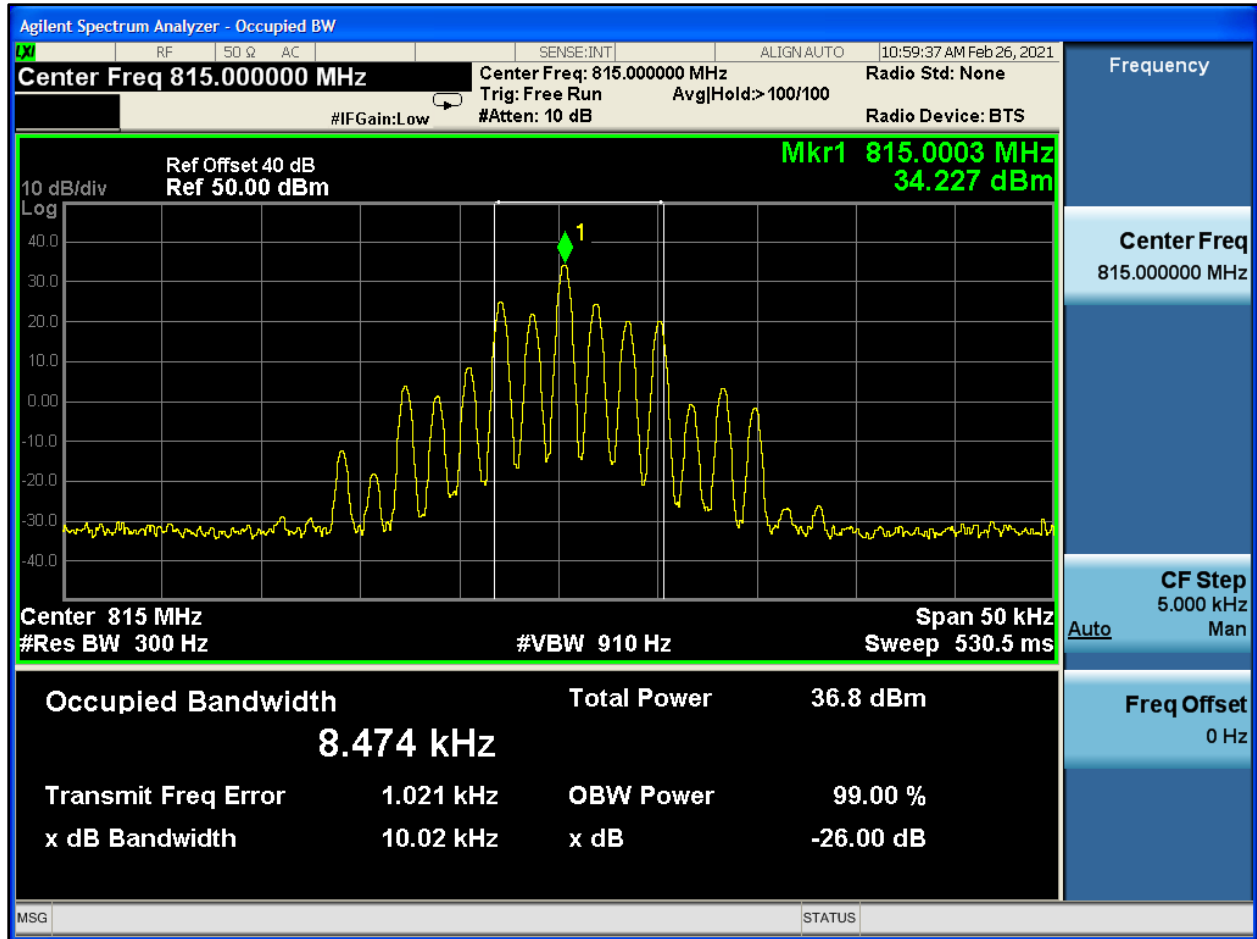


**Plot 8-573: OBW 99%, 823.9875 MHz, NB**

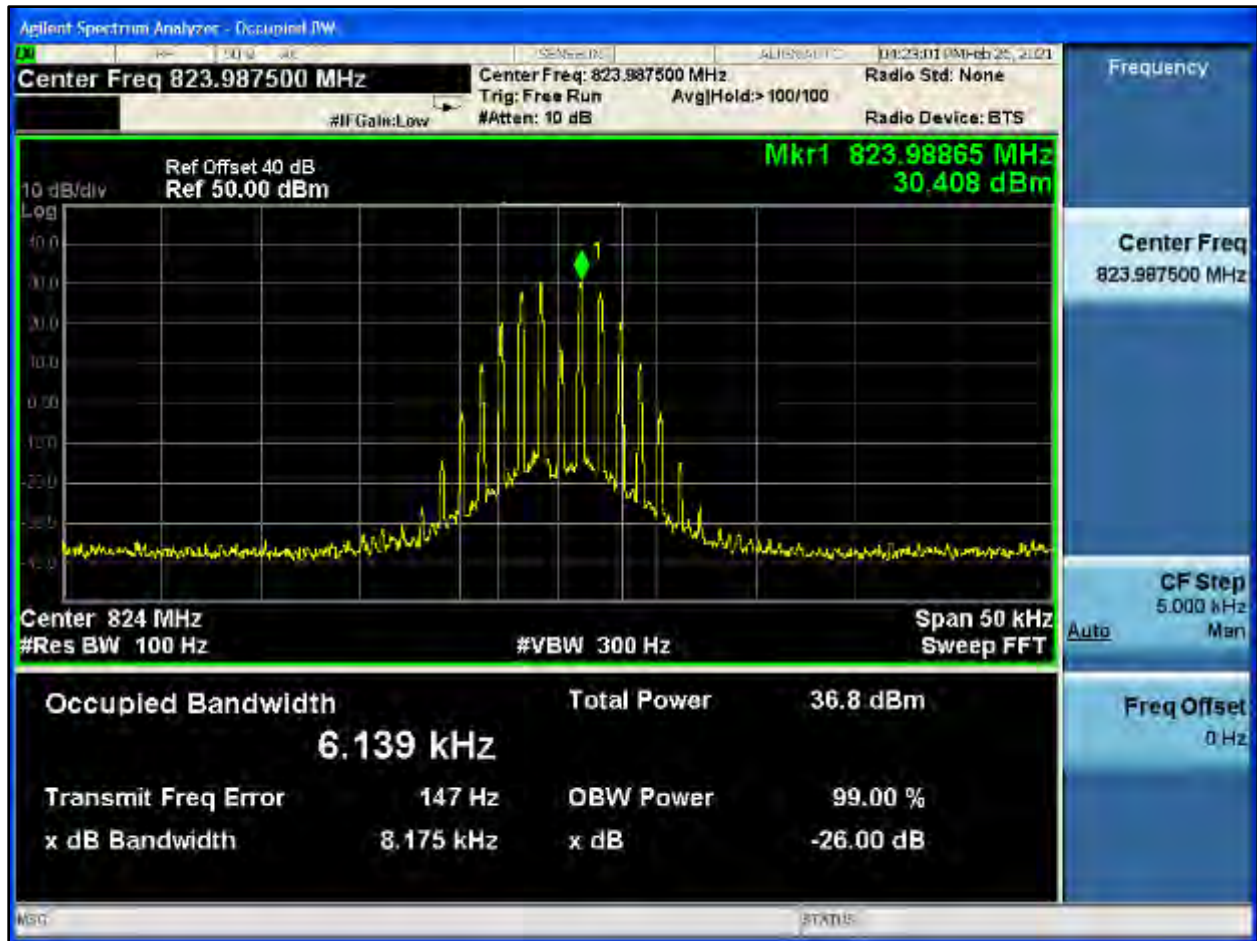


**Plot 8-574: OBW 99%, 823.9875 MHz, NPSPAC**

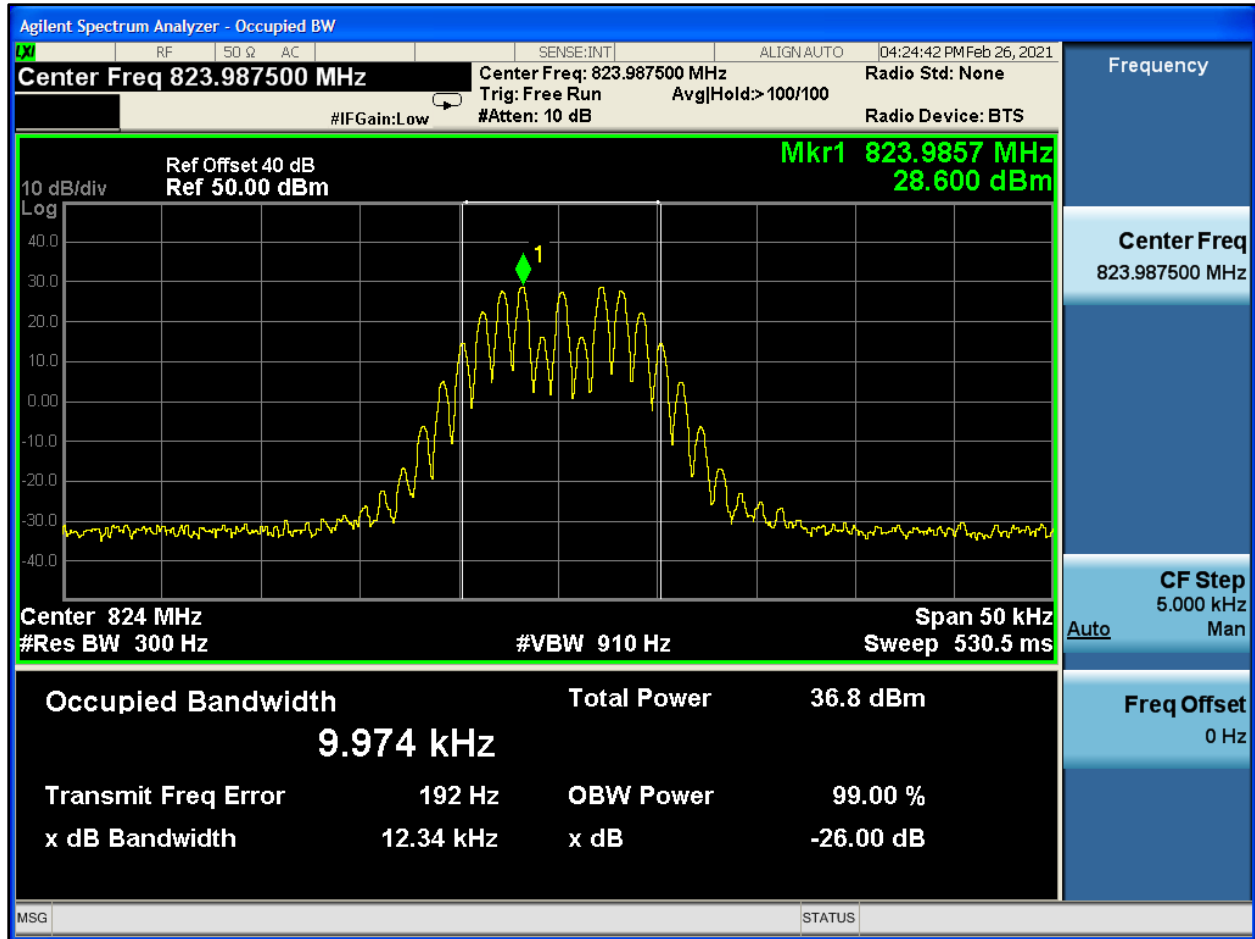

**Plot 8-575: OBW 99%, 823.9875 MHz, WB**

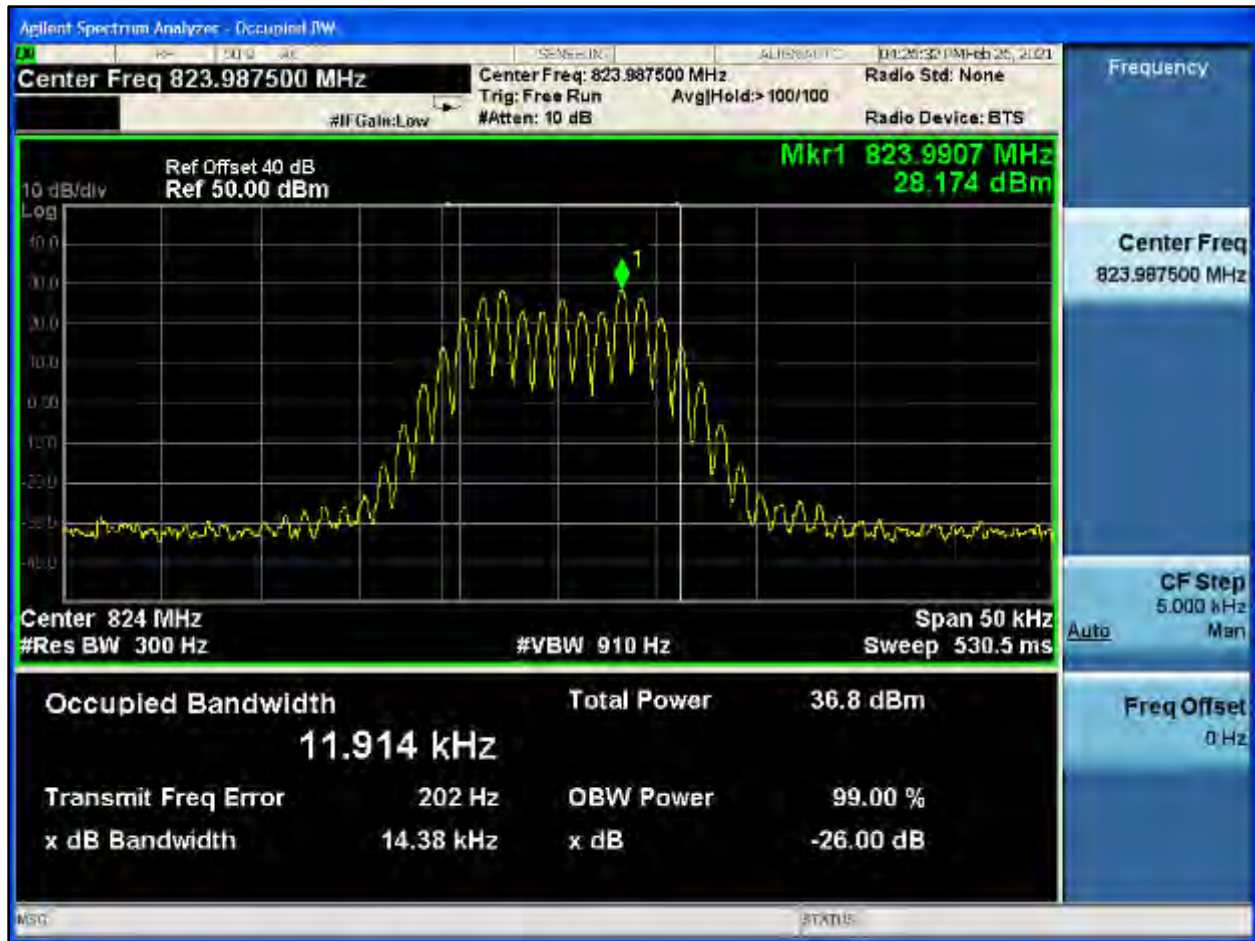

**Plot 8-576: OBW 99%, 823.9875 MHz, C4FM**

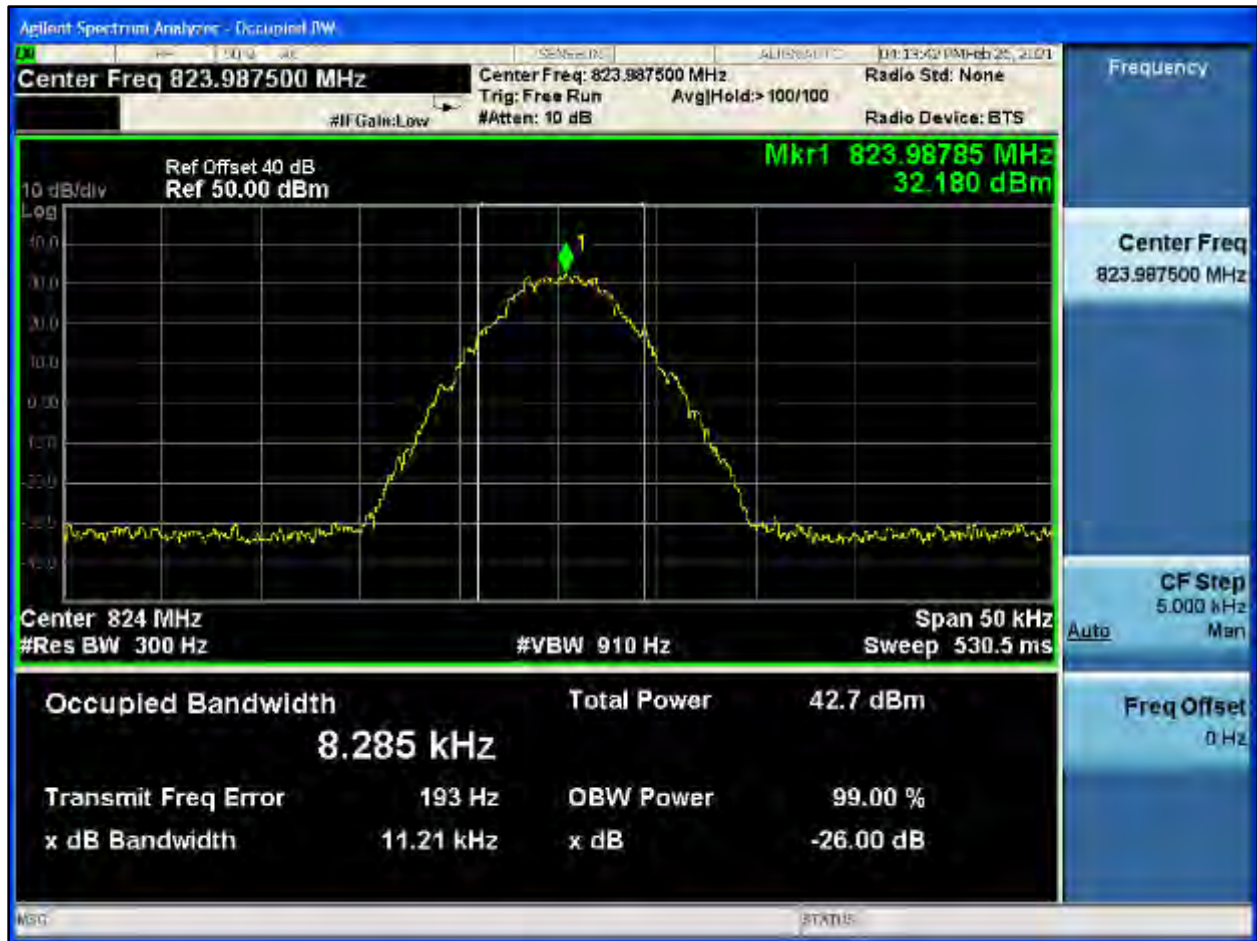


**Plot 8-577: OBW 99%, 823.9875 MHz, H-CPM TDMA**



**Plot 8-578: OBW 99%, 823.9875 MHz, NB 2 FSK**



**Plot 8-579: OBW 99%, 823.9875 MHz, NPSPAC 2 FSK**

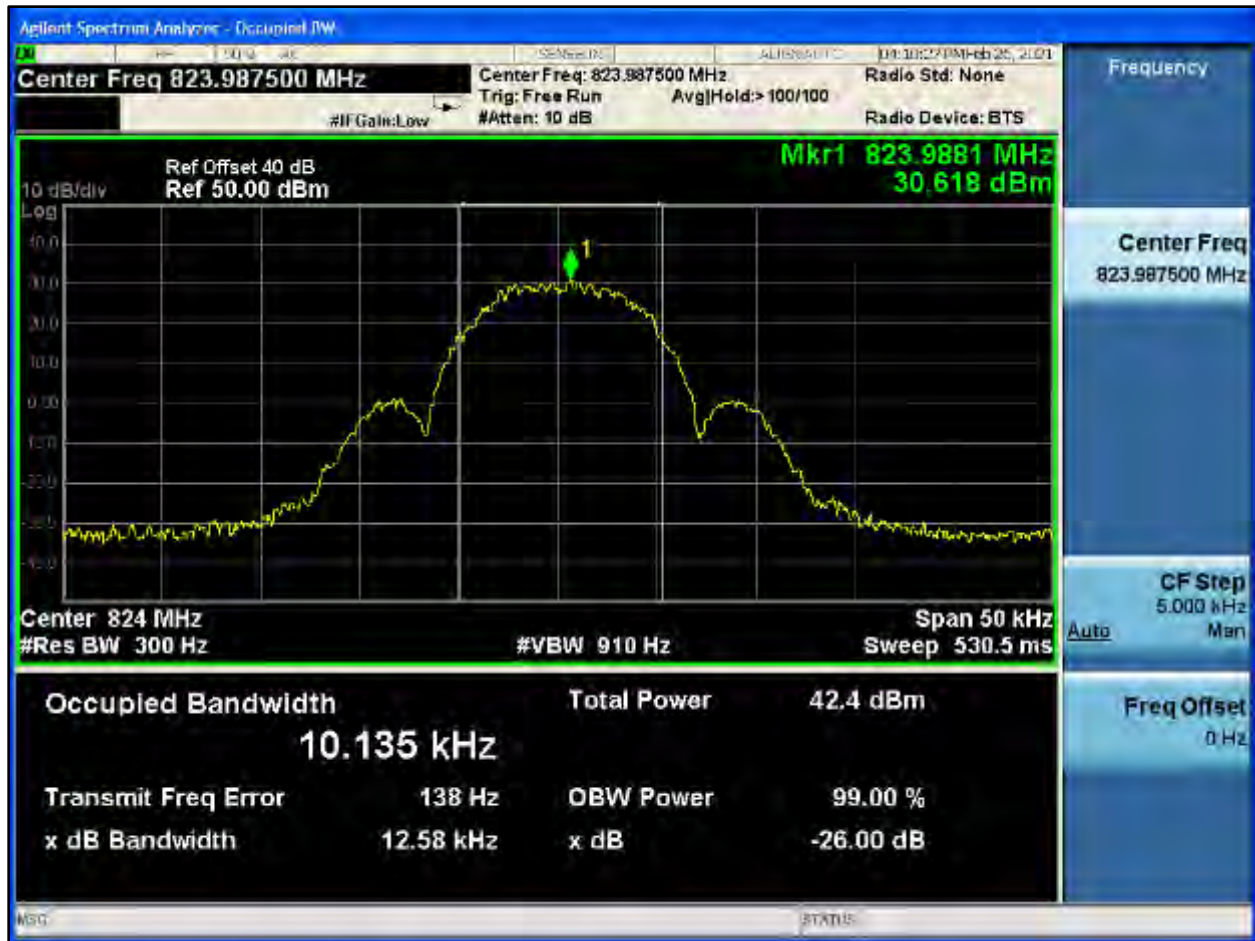





**Plot 8-580: OBW 99%, 823.9875 MHz, WB 2 FSK**




**Plot 8-581: OBW 99%, 823.9875 MHz, HVD SMR**

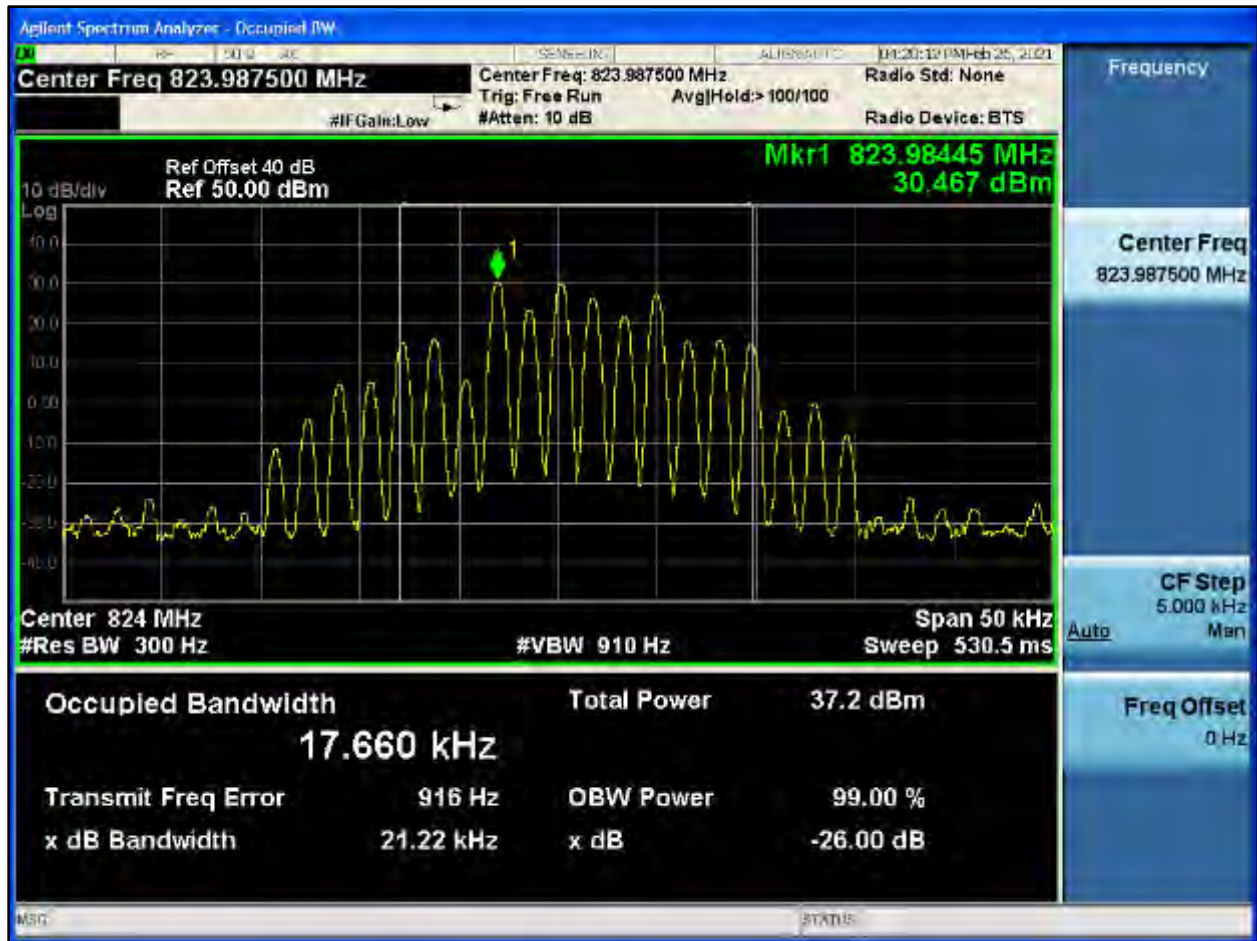


**Plot 8-582: OBW 99%, 823.9875 MHz, HVD NPSPAC**

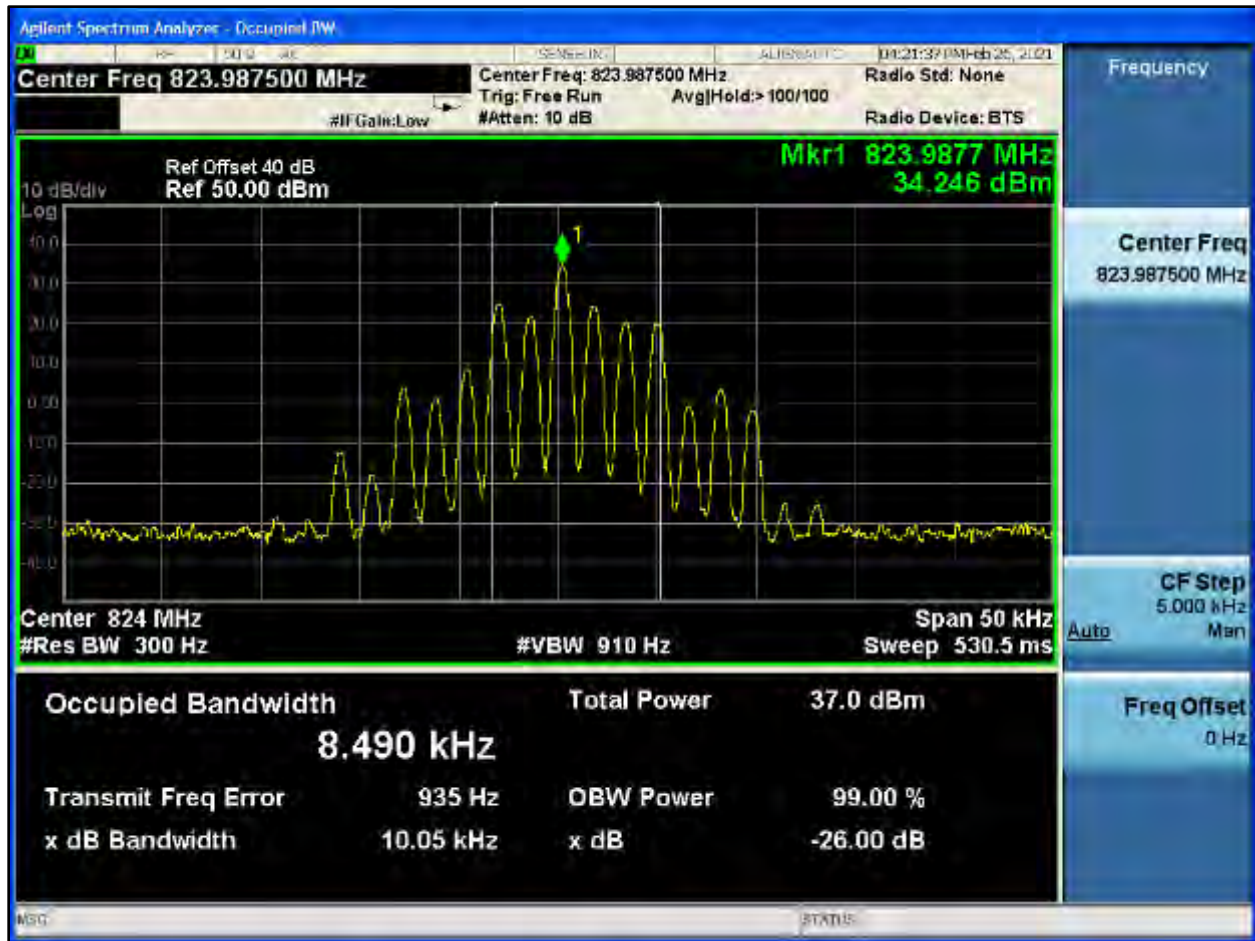


**Plot 8-583: OBW 99%, 824.9875 MHz, NB**

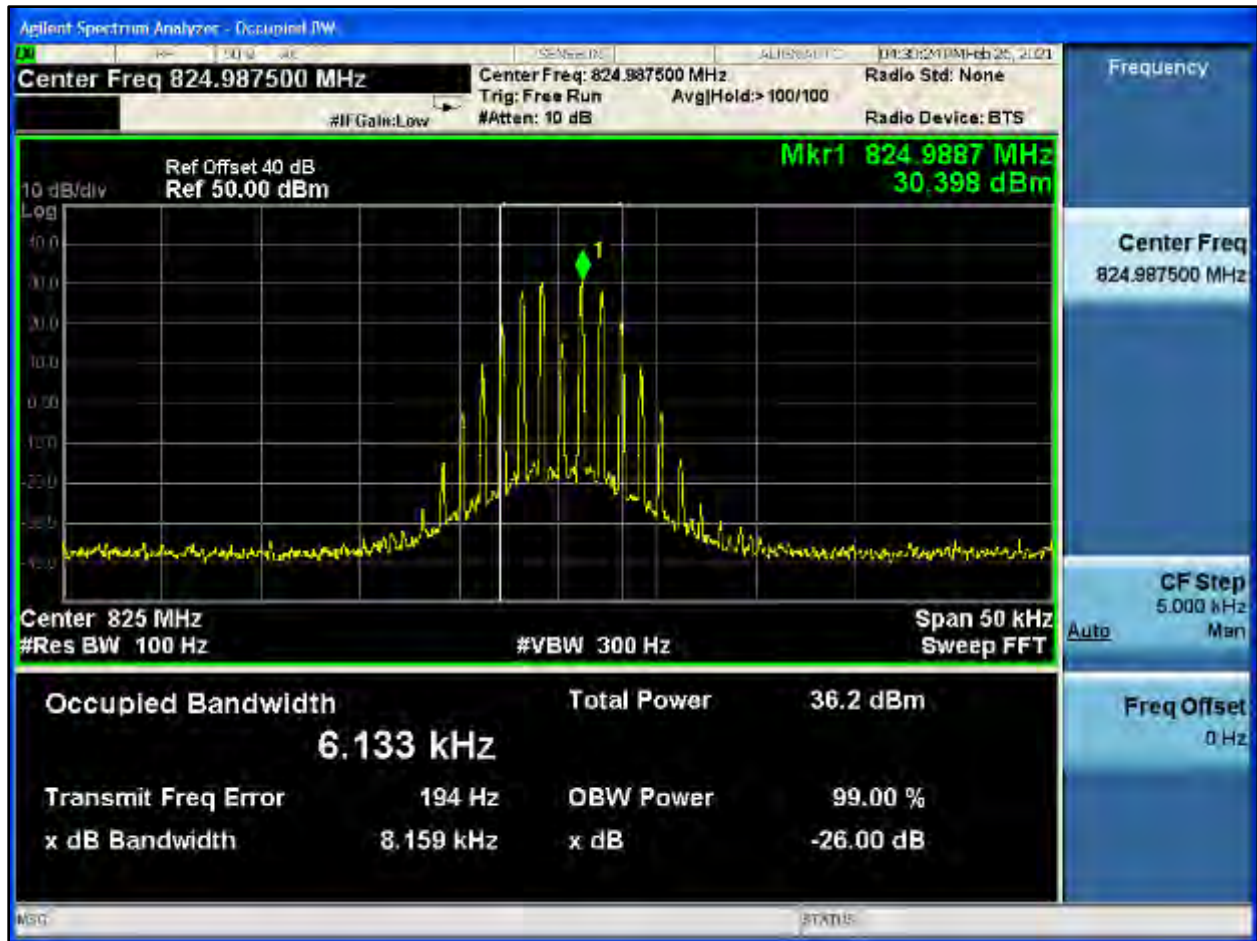


**Plot 8-584: OBW 99%, 824.9875 MHz, NPSPAC**

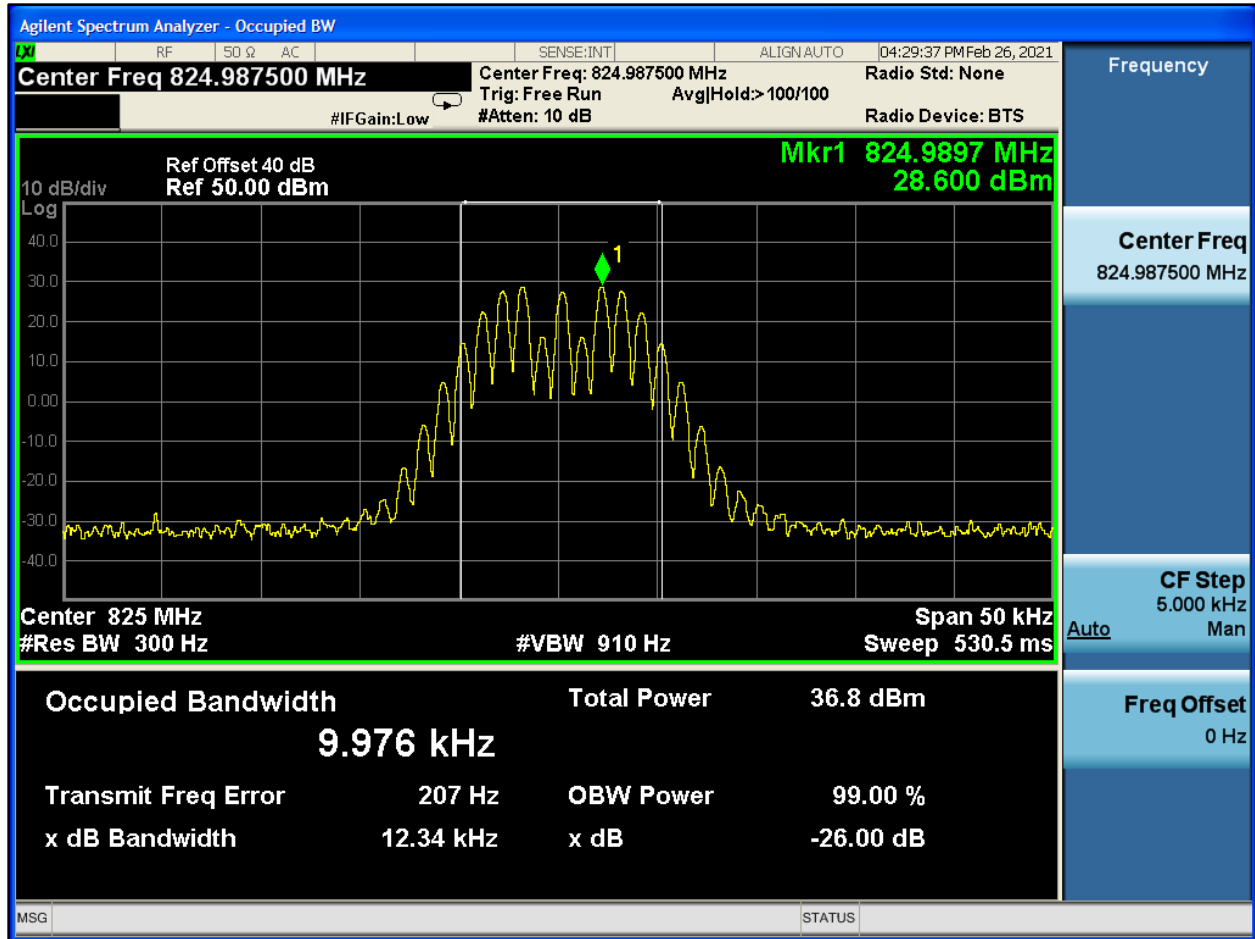

**Plot 8-585: OBW 99%, 824.9875 MHz, WB**

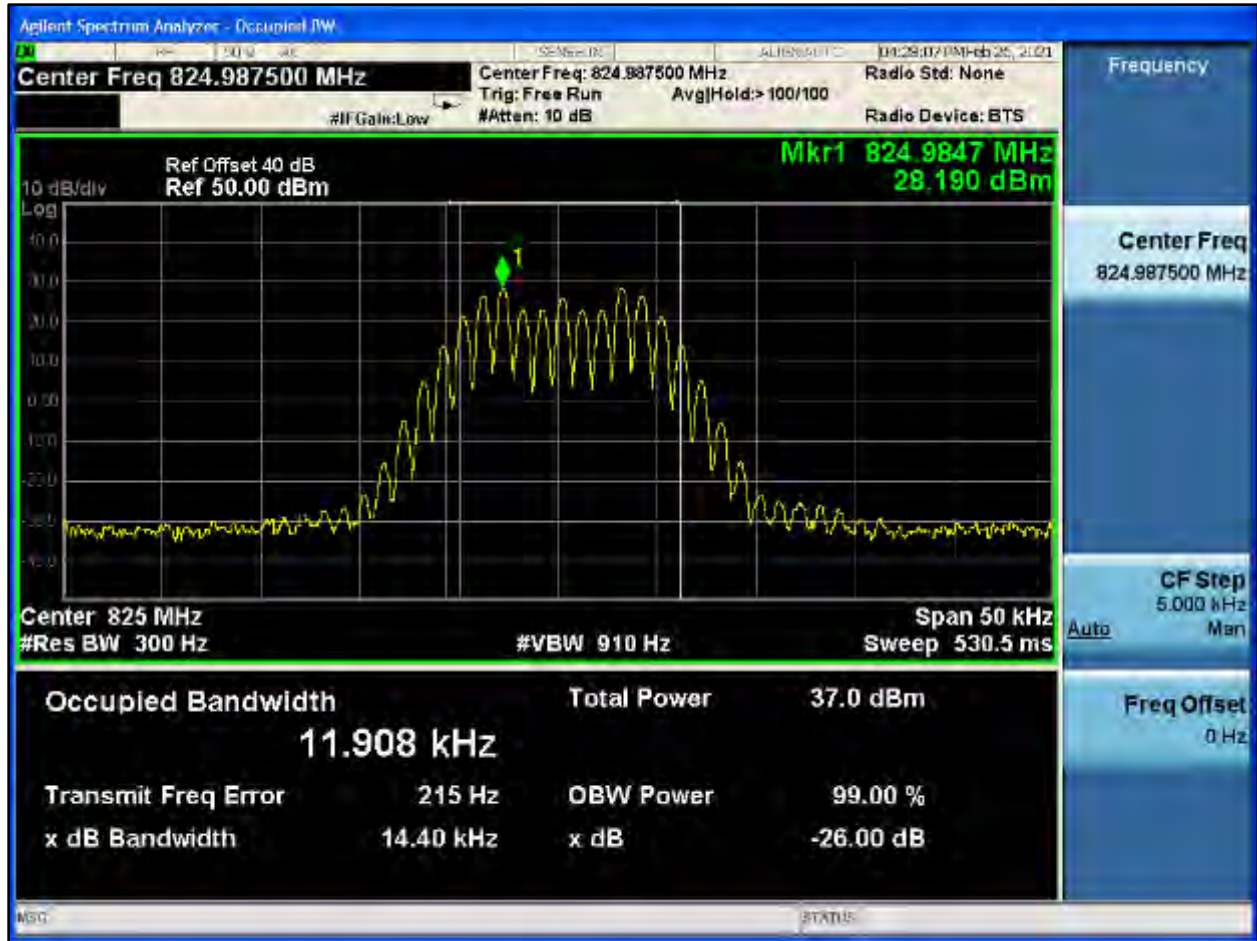

**Plot 8-586: OBW 99%, 824.9875 MHz, C4FM**

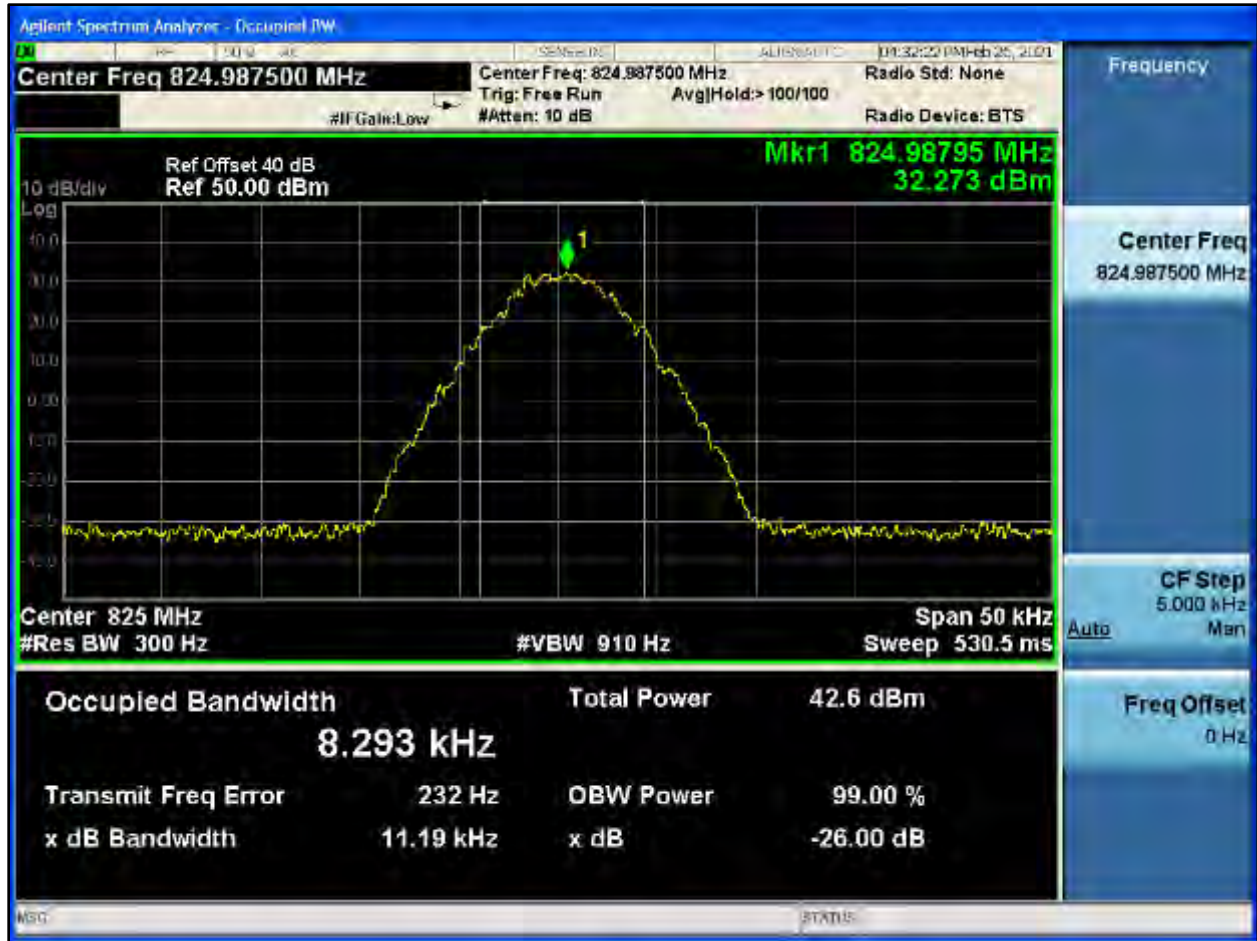

**Plot 8-587: OBW 99%, 824.9875 MHz, H-CPM TDMA**






**Plot 8-588: OBW 99%, 824.9875 MHz, NB 2 FSK**




**Plot 8-589: OBW 99%, 824.9875 MHz, NPSPAC 2 FSK**

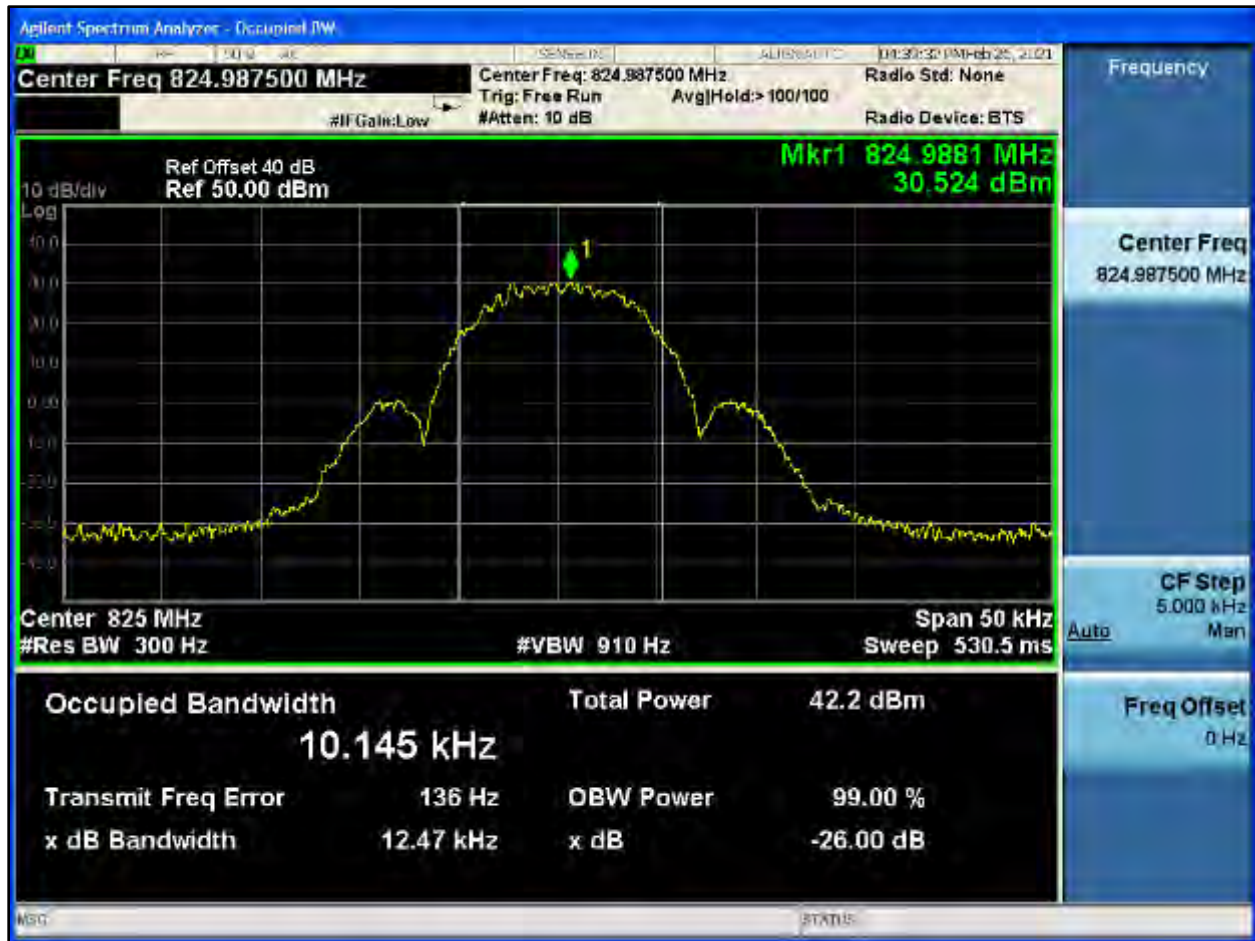


**Plot 8-590: OBW 99%, 824.9875 MHz, WB 2 FSK**




**Plot 8-591: OBW 99%, 824.9875 MHz, HVD SMR**

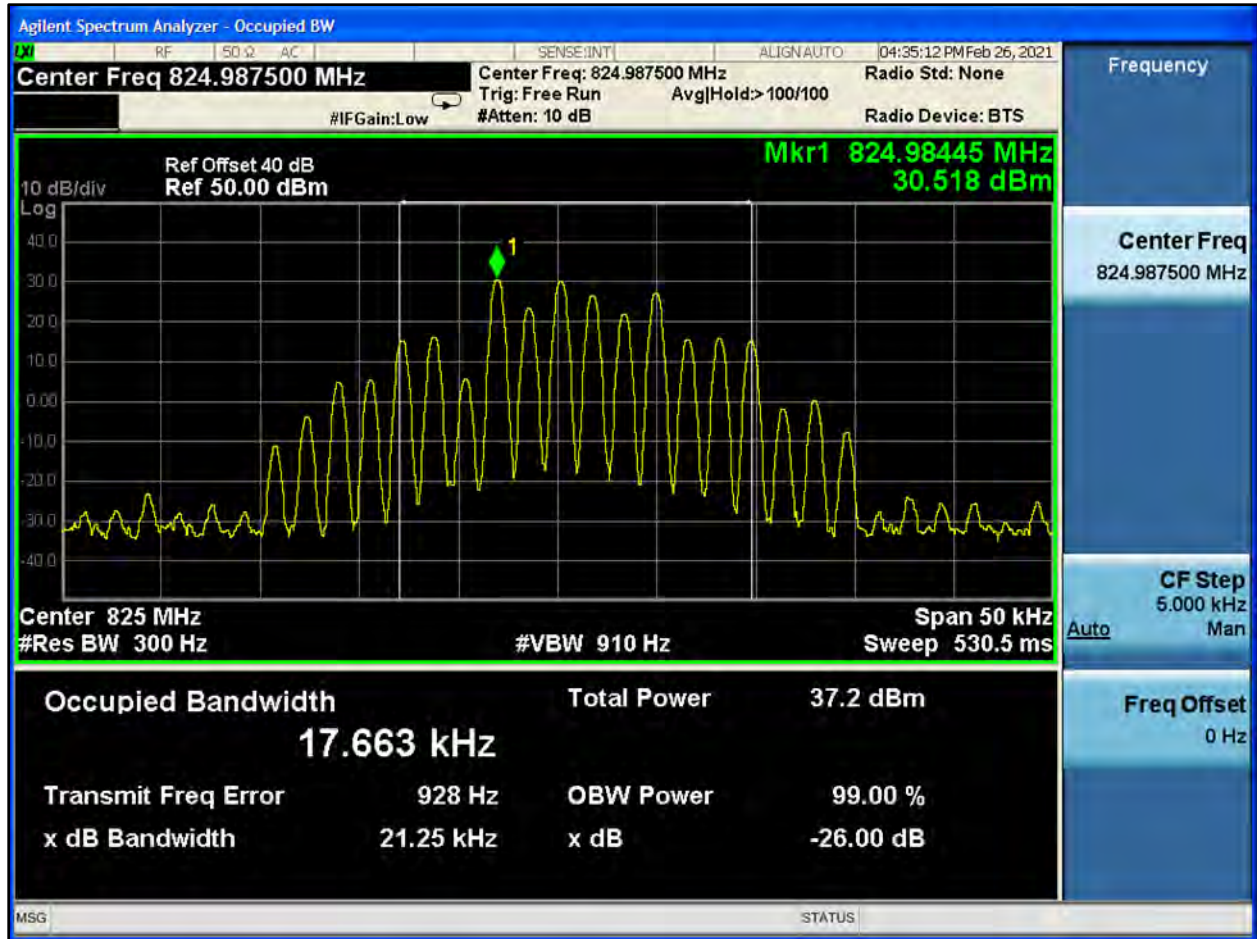

**Plot 8-592: OBW 99%, 824.9875 MHz, HVD NPSPAC**

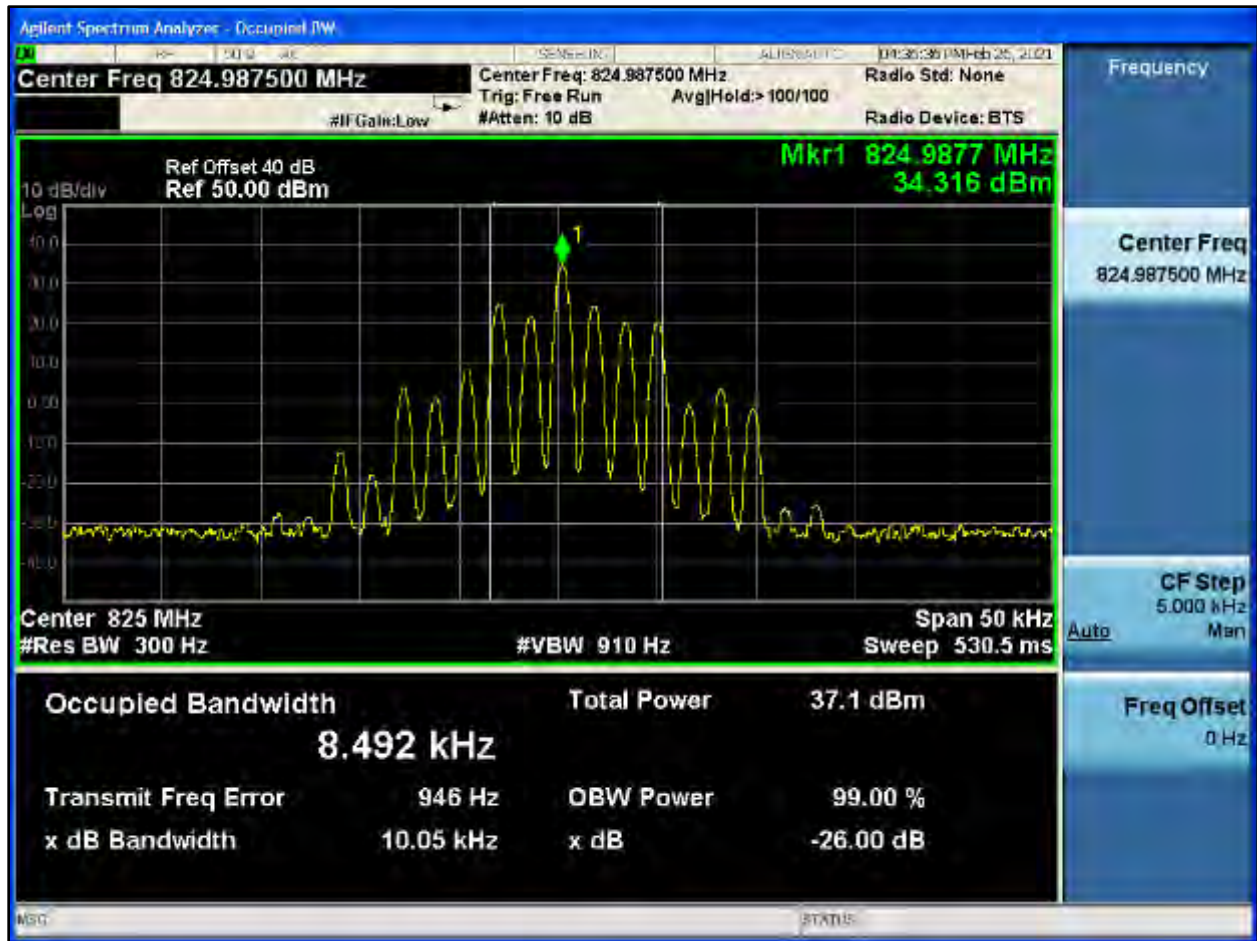


**Plot 8-593: OBW 99%, 851.0125 MHz, NB**

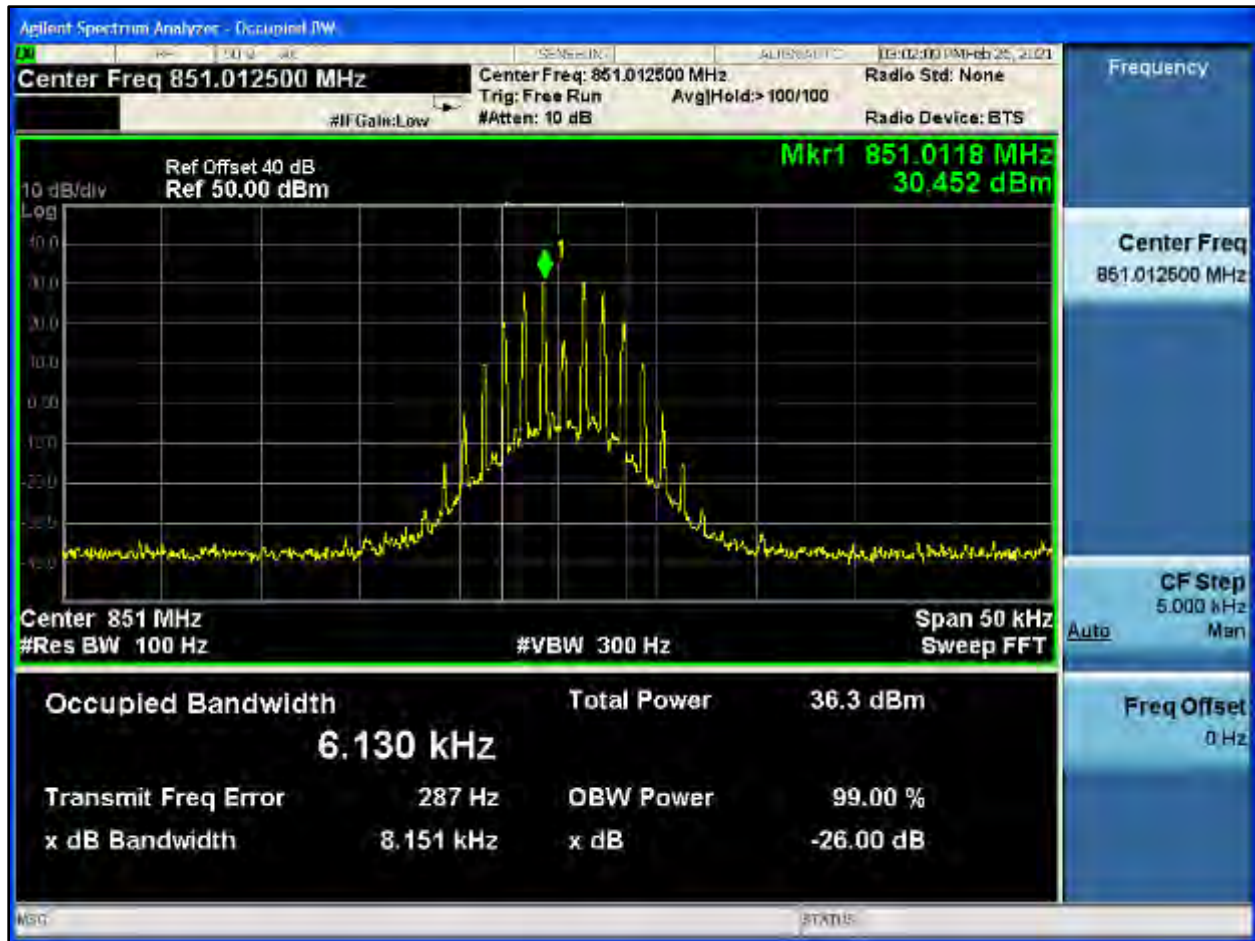

**Plot 8-594: OBW 99%, 851.0125 MHz, NPSPAC**




**Plot 8-595: OBW 99%, 851.0125 MHz, WB**

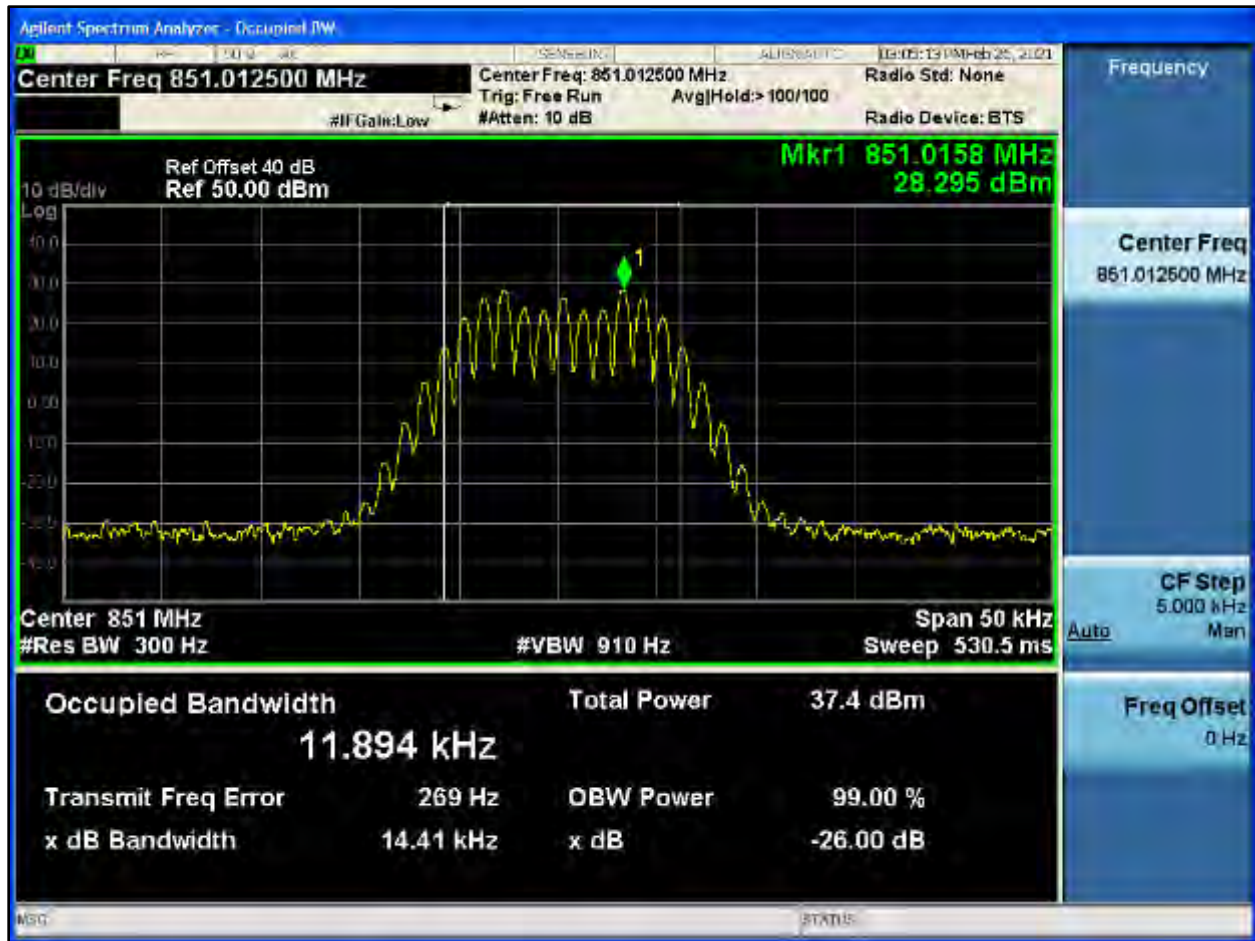




**Plot 8-596: OBW 99%, 851.0125 MHz, C4FM**

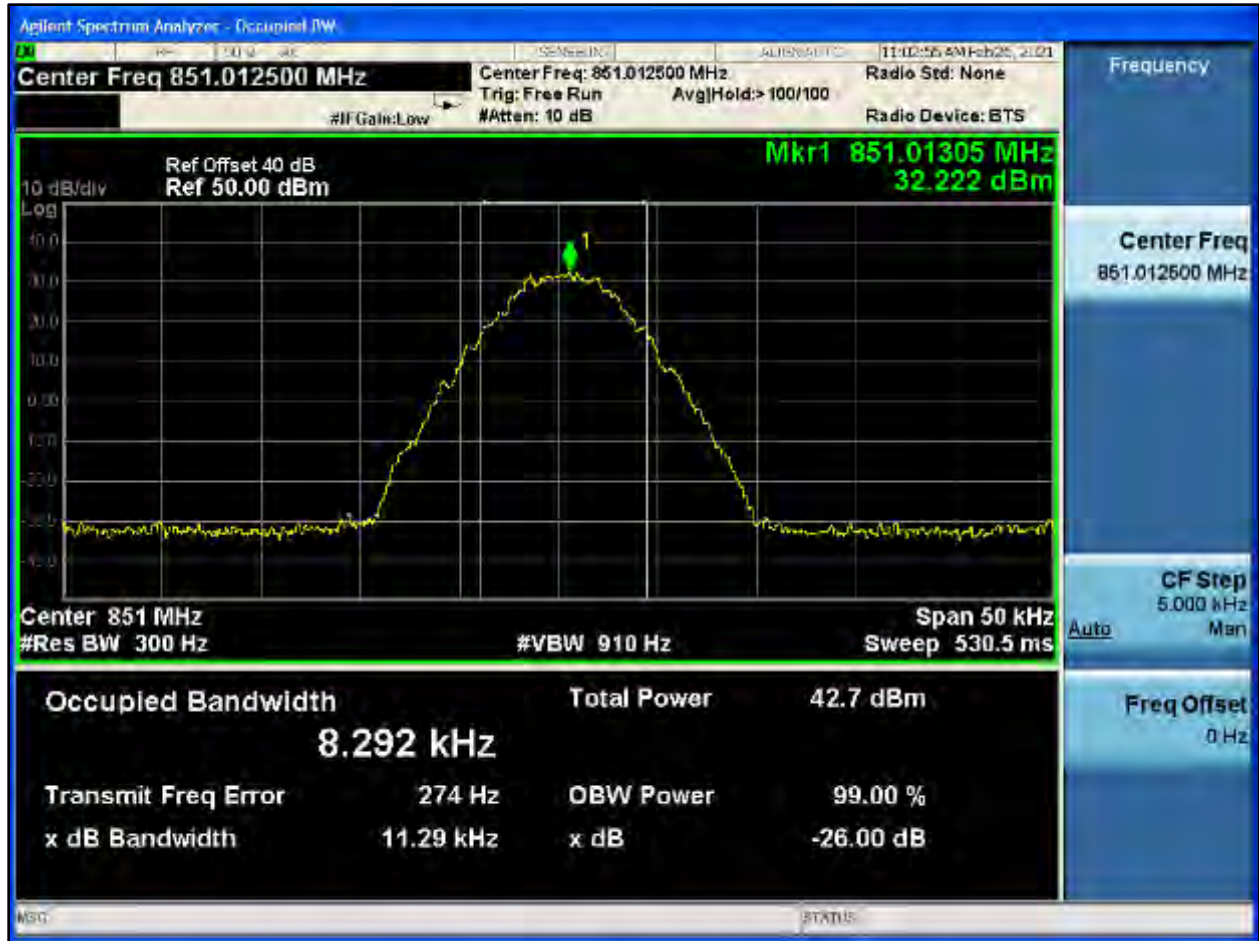


**Plot 8-597: OBW 99%, 851.0125 MHz, H-CPM TDMA**



**Plot 8-598: OBW 99%, 851.0125 MHz, NB 2 FSK**

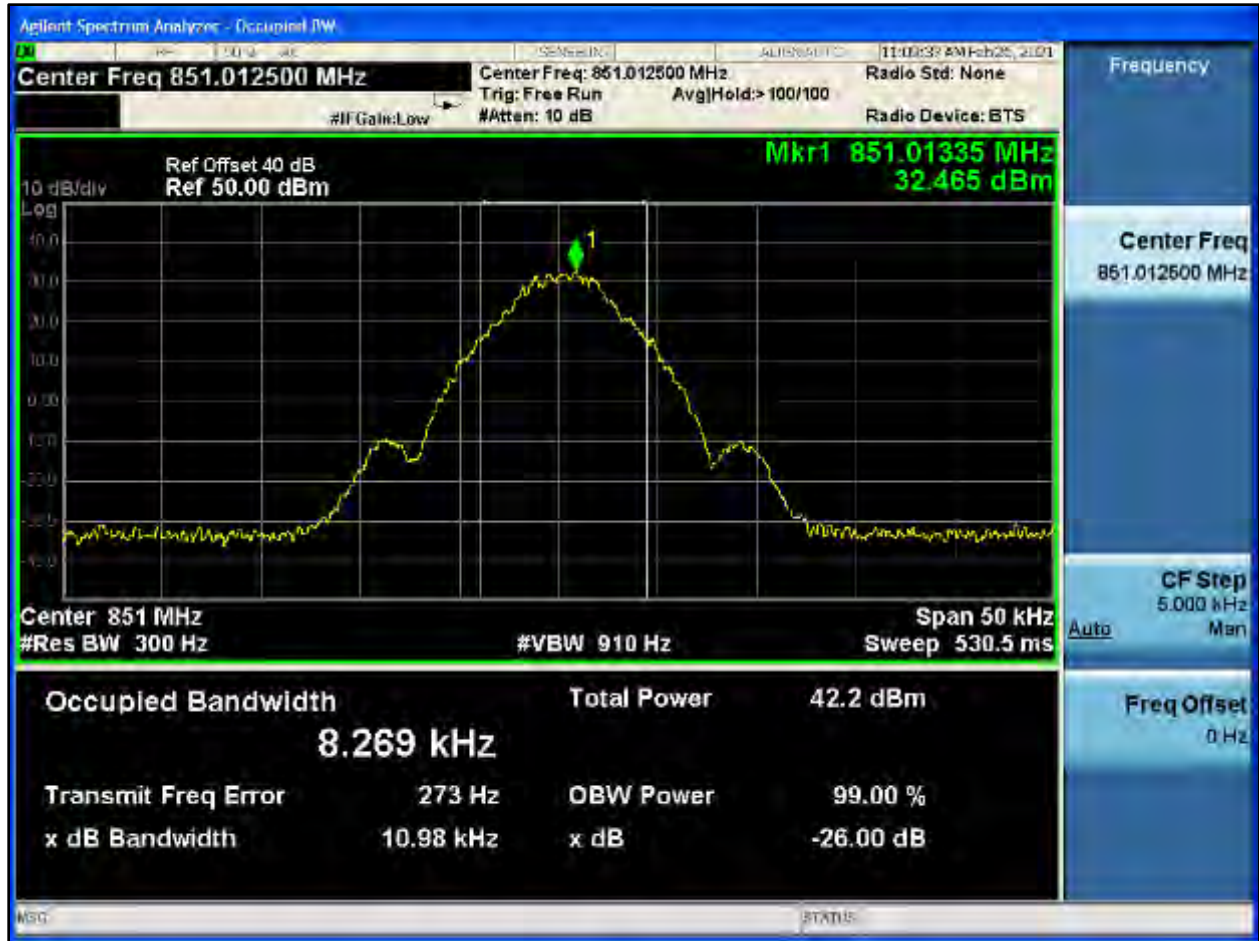


**Plot 8-599: OBW 99%, 851.0125 MHz, NPSPAC 2 FSK**

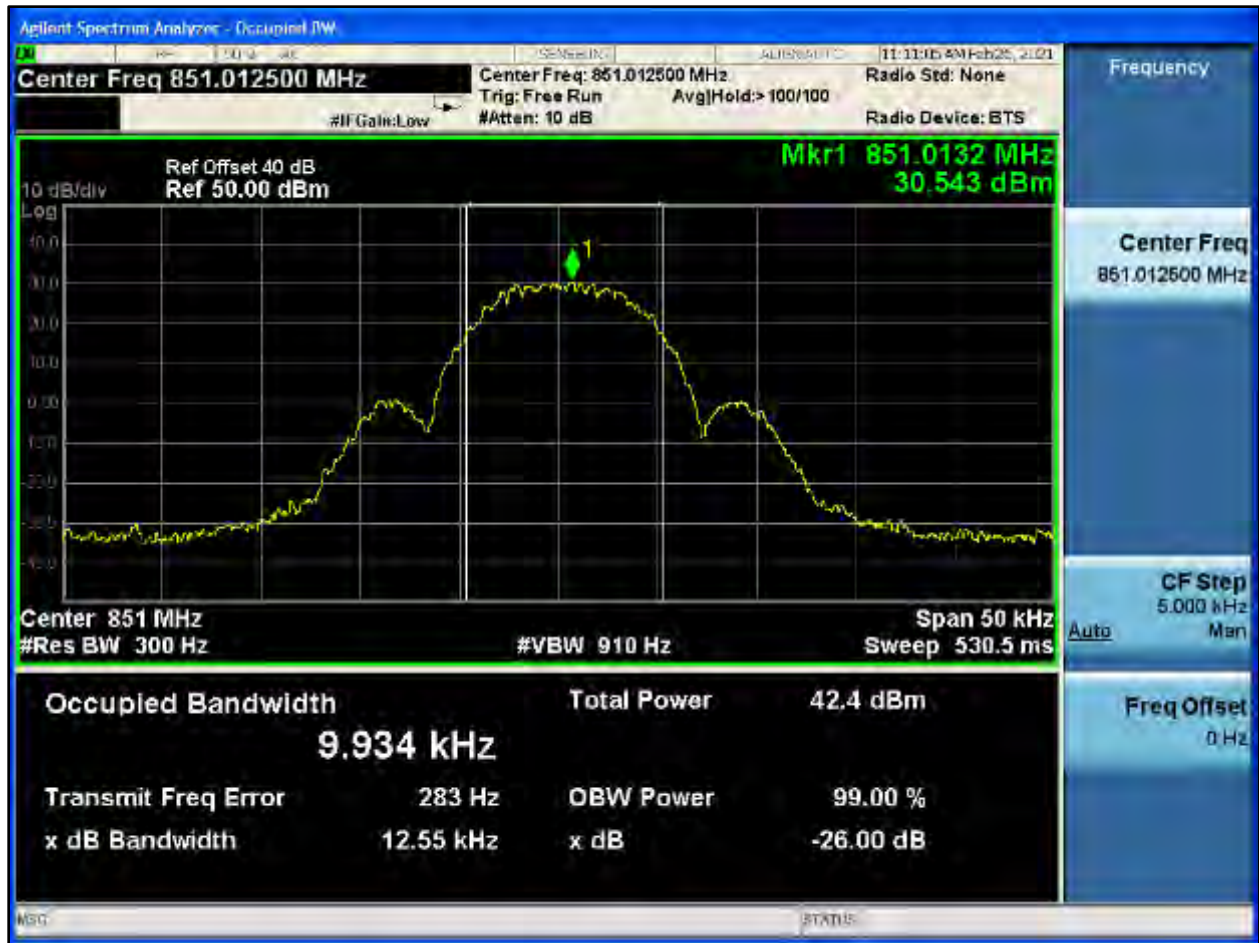


**Plot 8-600: OBW 99%, 851.0125 MHz, WB 2 FSK**




**Plot 8-601: OBW 99%, 851.0125 MHz, HVD SMR**

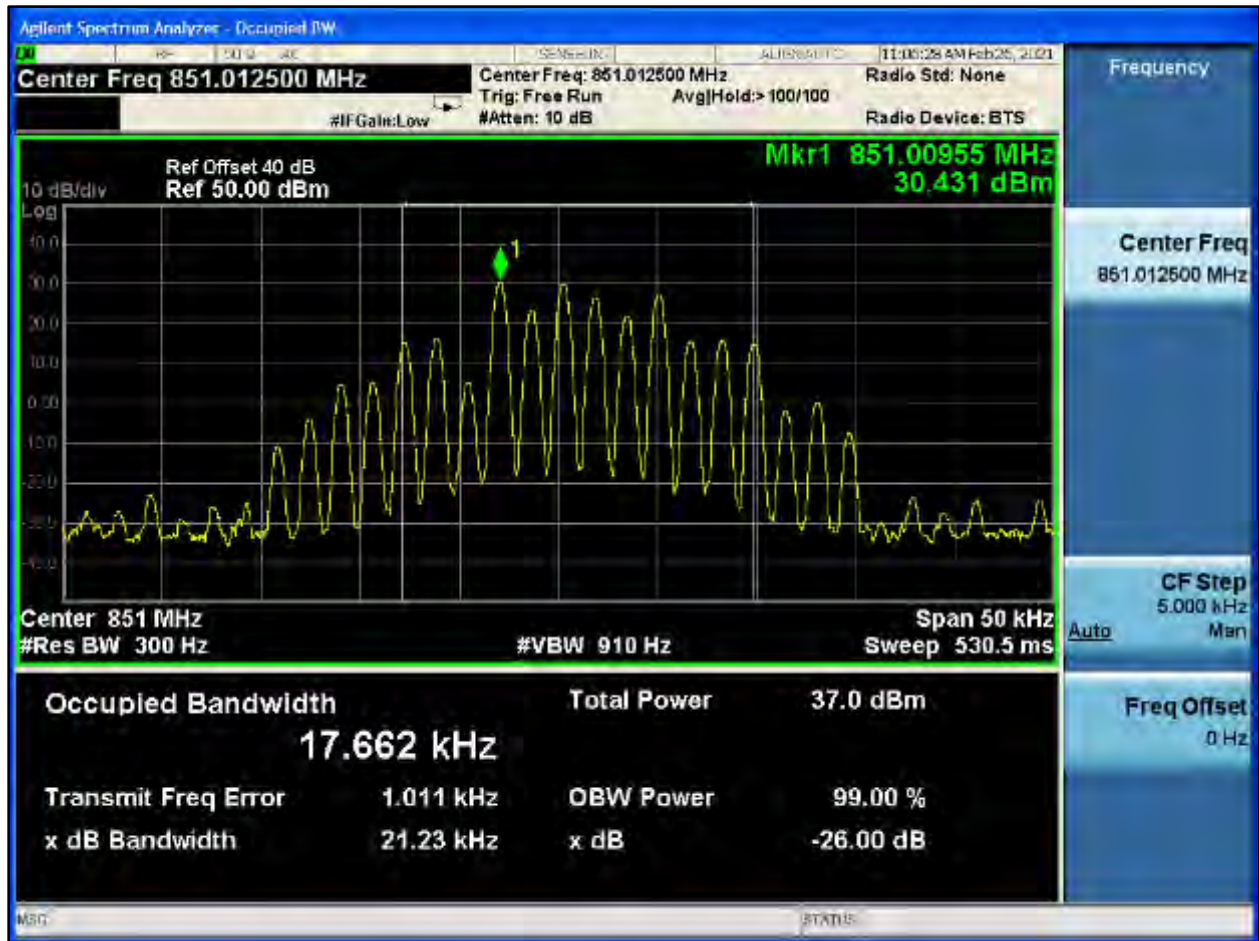

**Plot 8-602: OBW 99%, 851.0125 MHz, HVD NPSPAC**

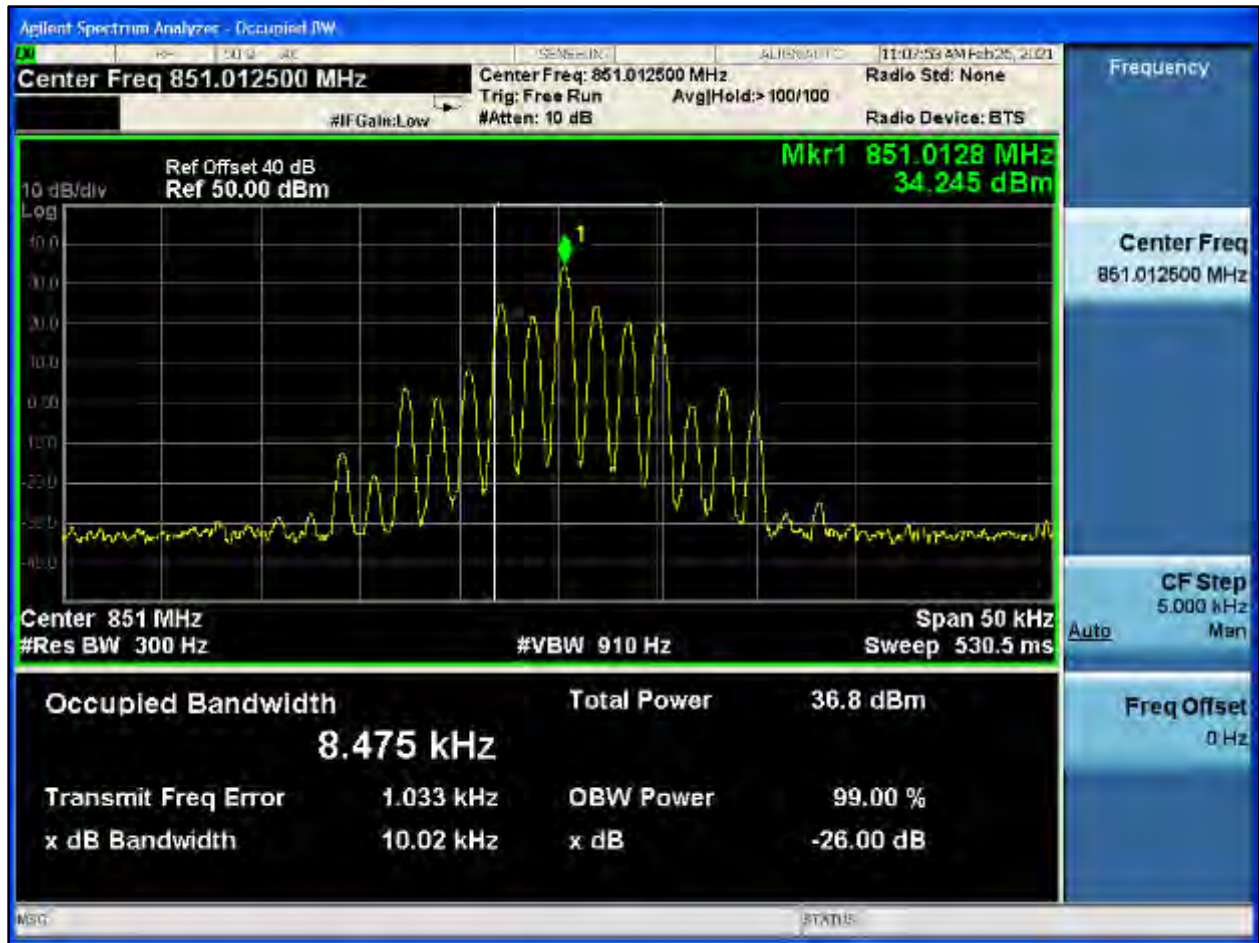


**Plot 8-603: OBW 99%, 860.0000 MHz, NB**

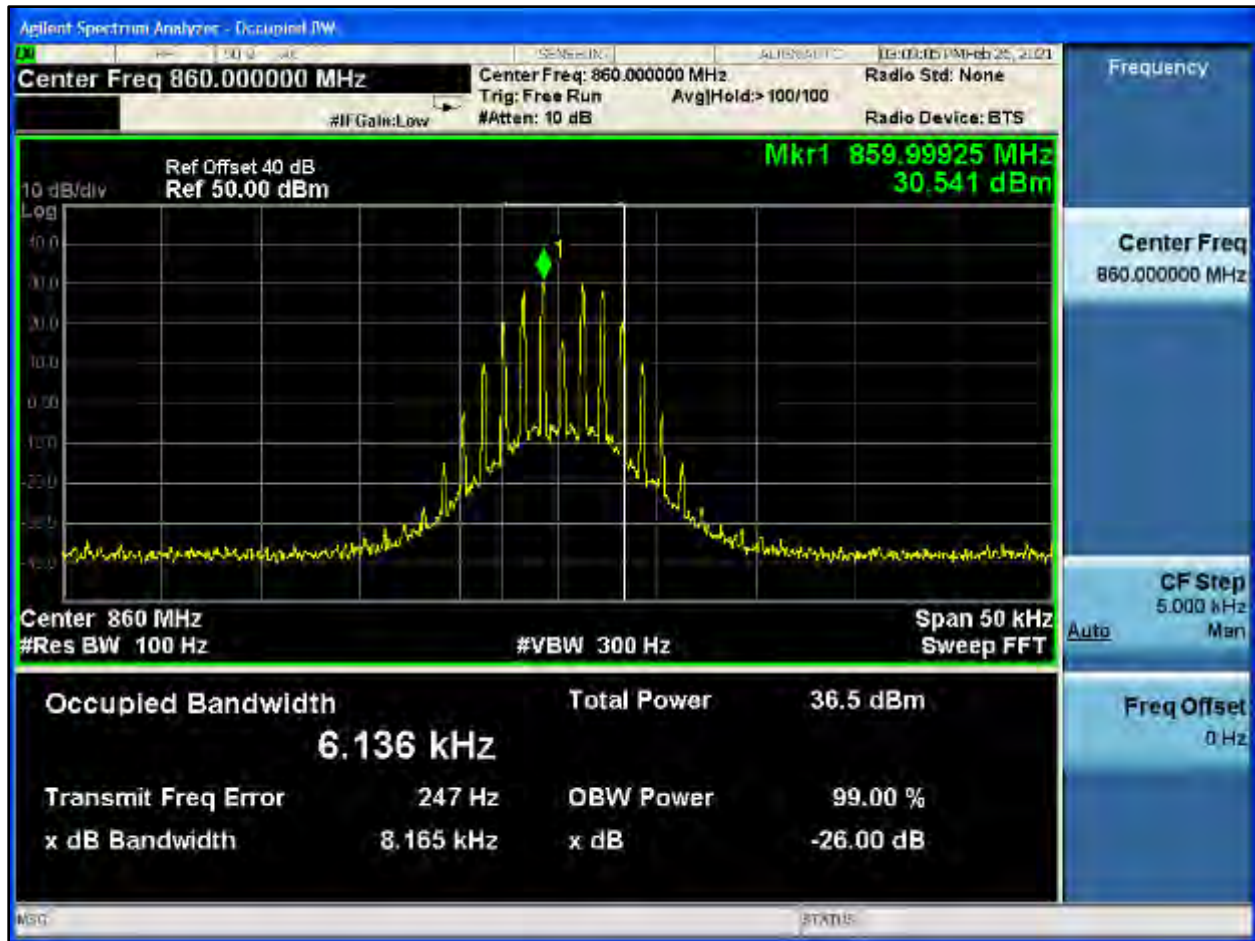




**Plot 8-604: OBW 99%, 860.0000 MHz, NPSPAC**

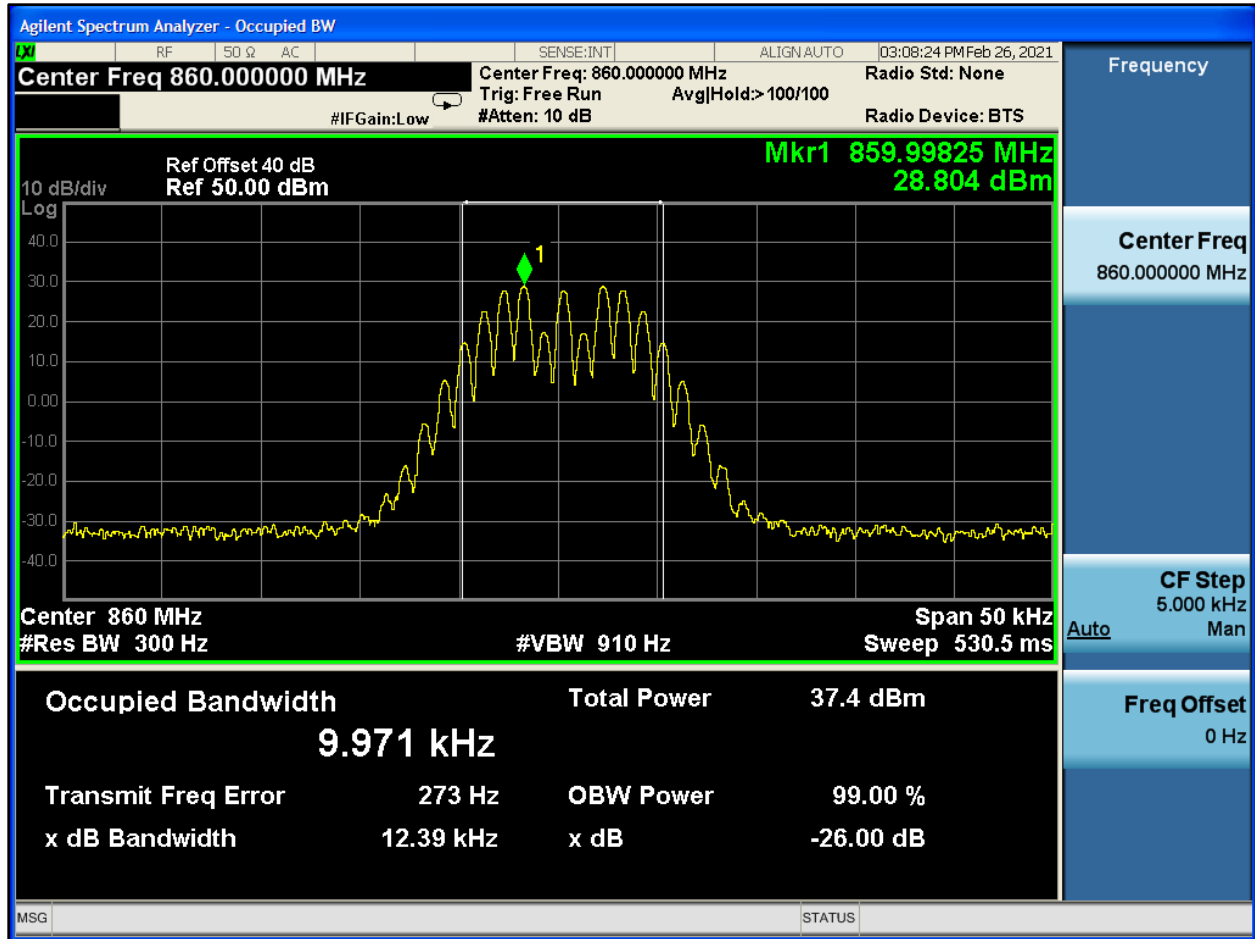


**Plot 8-605: OBW 99%, 860.0000 MHz, WB**

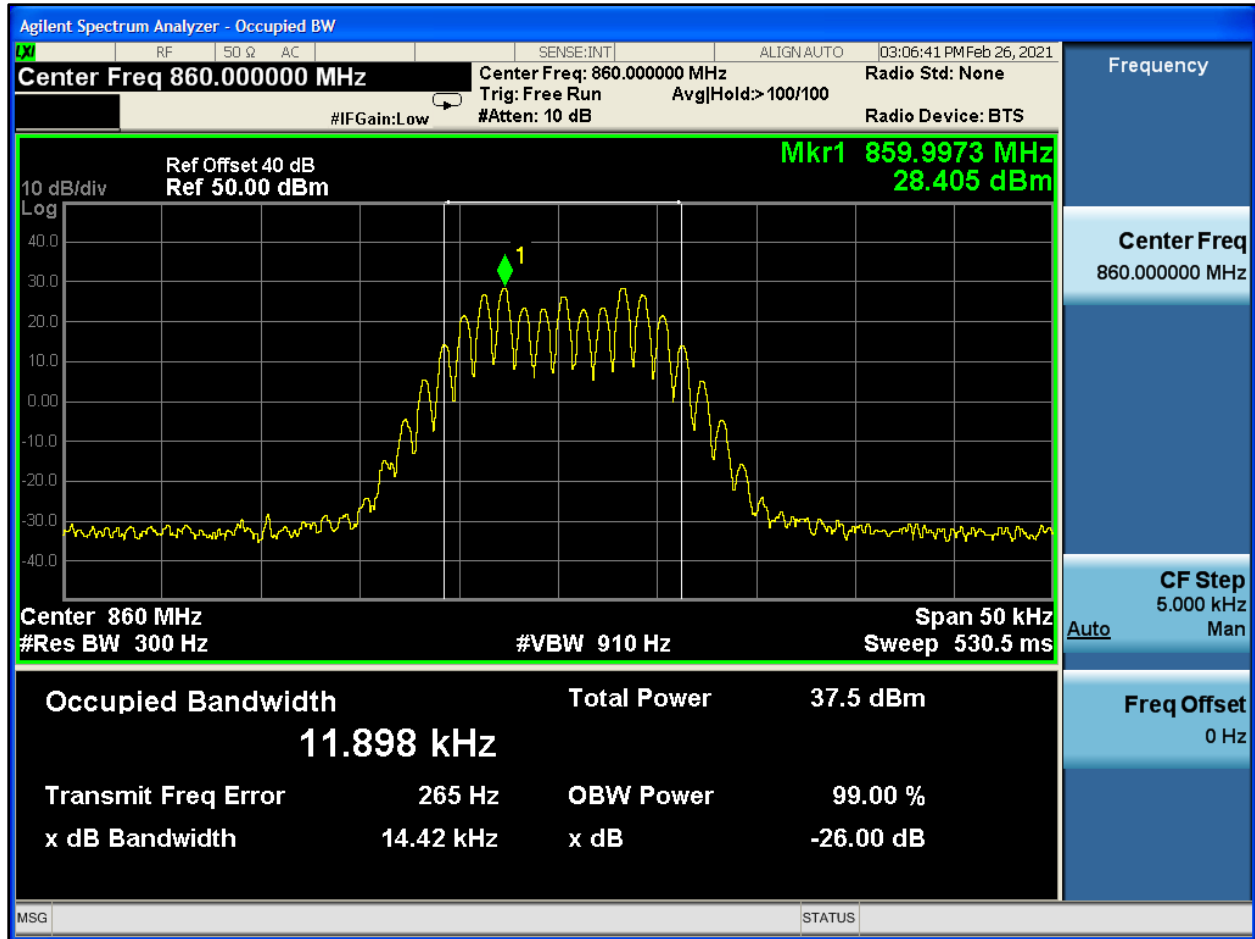

**Plot 8-606: OBW 99%, 860.0000 MHz, C4FM**



**Plot 8-607: OBW 99%, 860.0000 MHz, H-CPM TDMA**

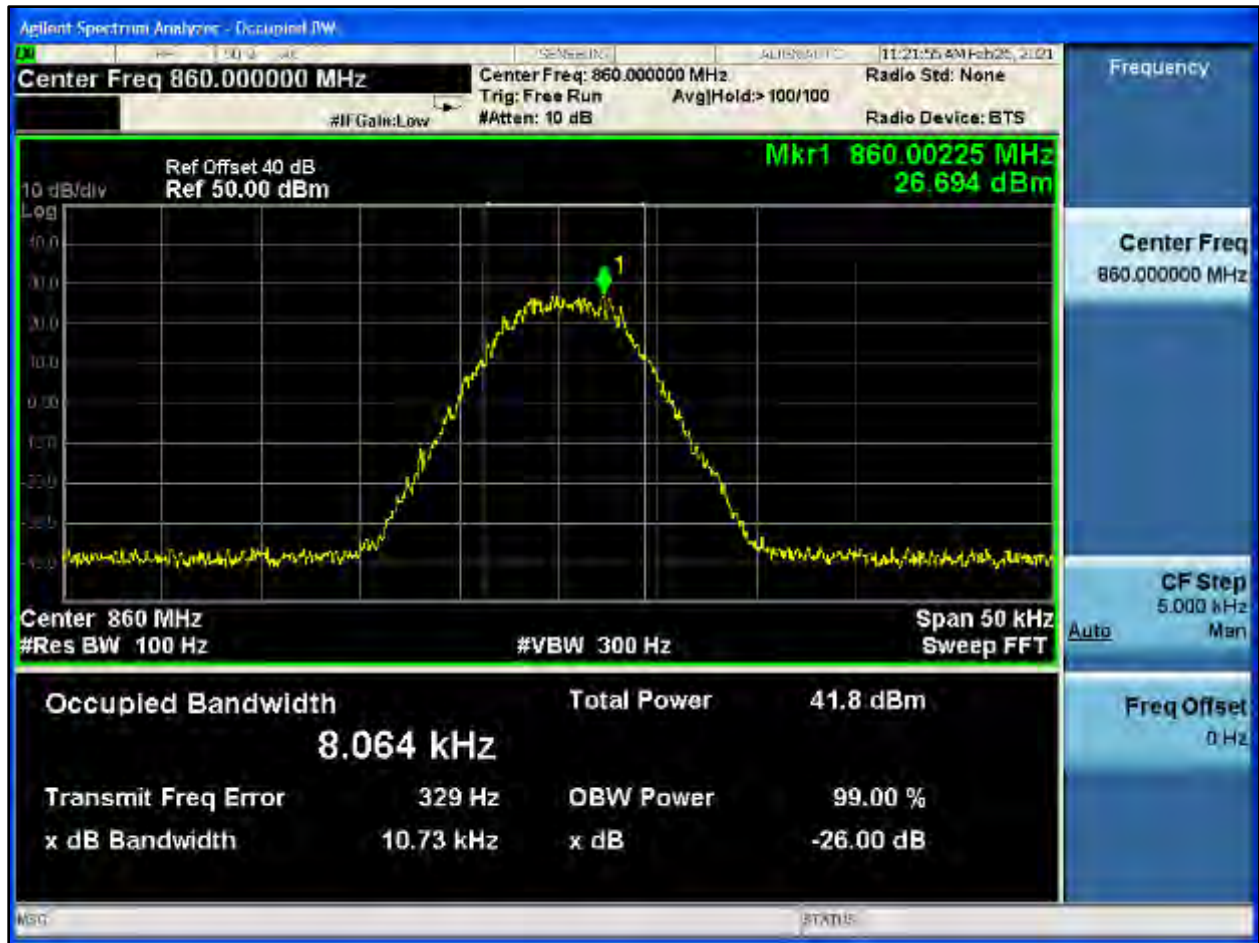

**Plot 8-608: OBW 99%, 860.0000 MHz, NB 2 FSK**




**Plot 8-609: OBW 99%, 860.0000 MHz, NPSPAC 2 FSK**



**Plot 8-610: OBW 99%, 860.0000 MHz, WB 2 FSK**




**Plot 8-611: OBW 99%, 860.0000 MHz, HVD SMR**

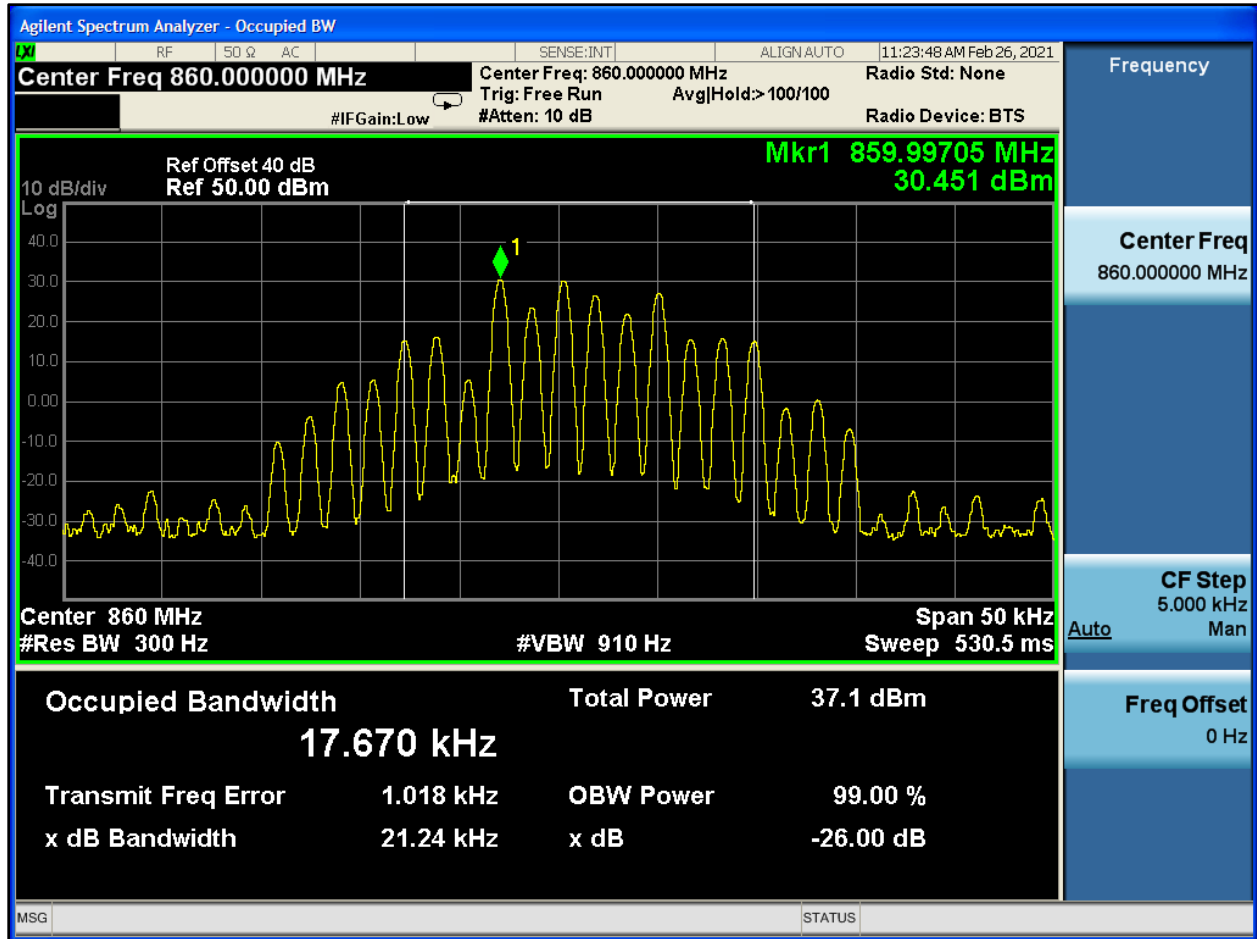





**Plot 8-612: OBW 99%, 860.0000 MHz, HVD NPSPAC**

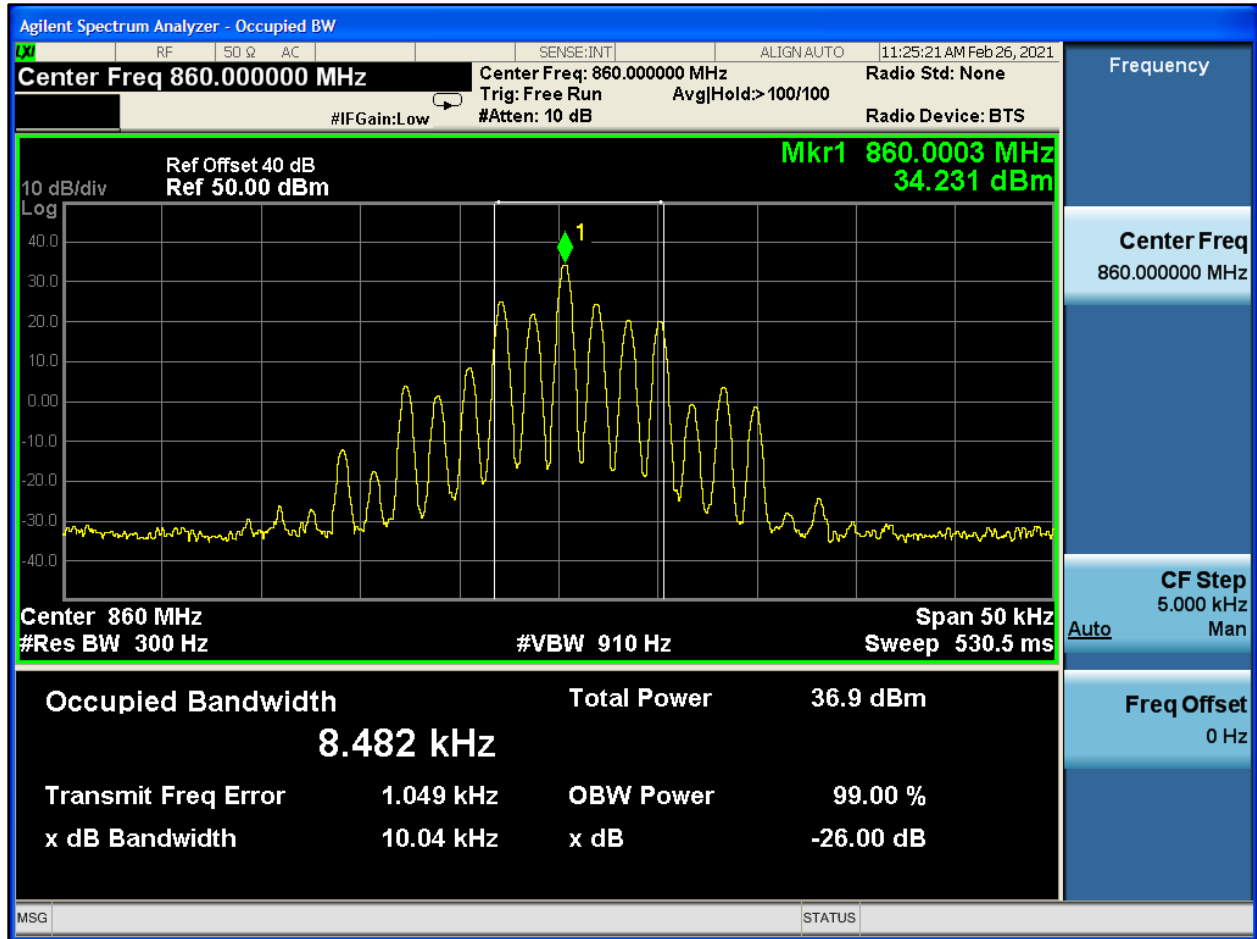


**Plot 8-613: OBW 99%, 868.9875 MHz, NB**

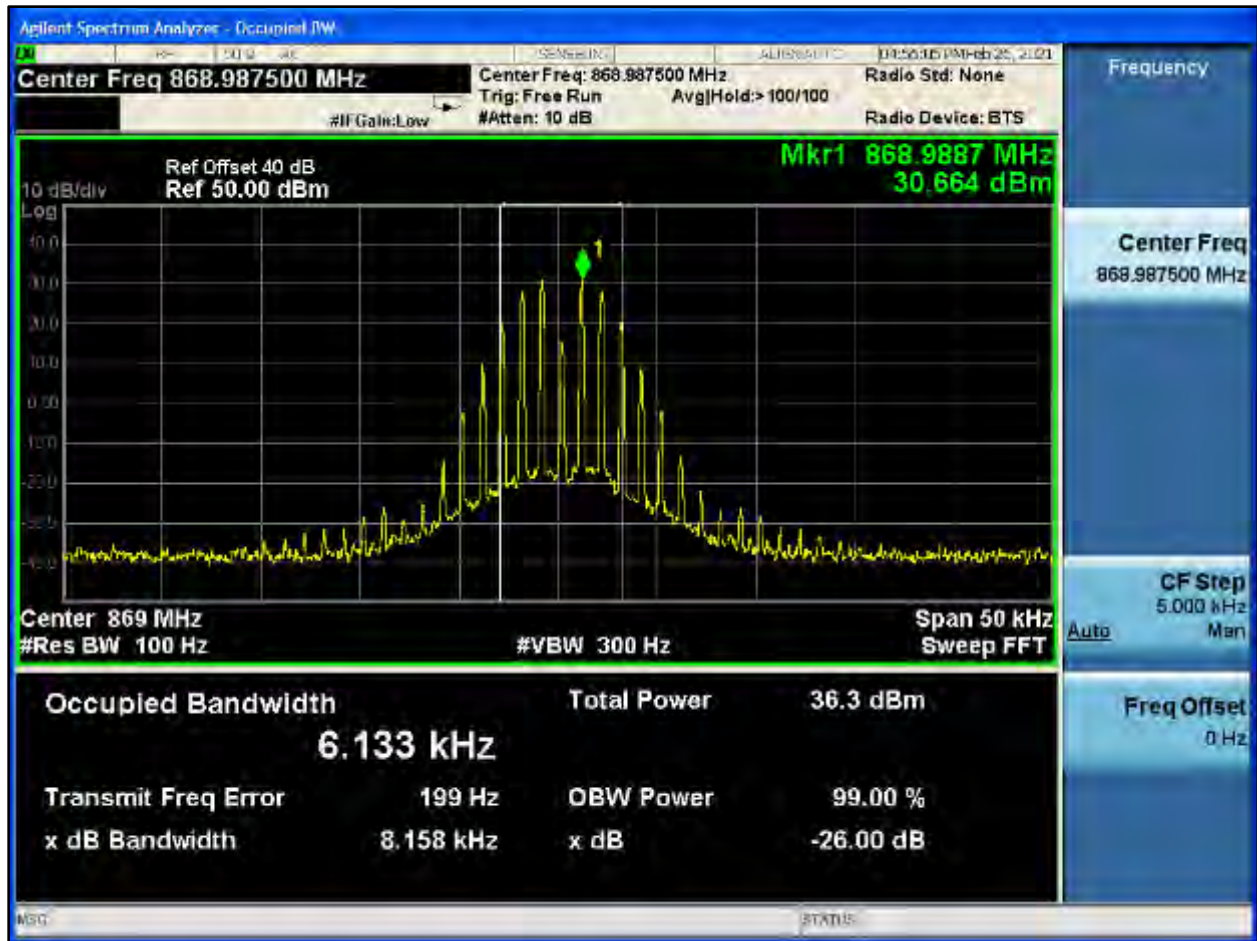

**Plot 8-614: OBW 99%, 868.9875 MHz, NPSPAC**

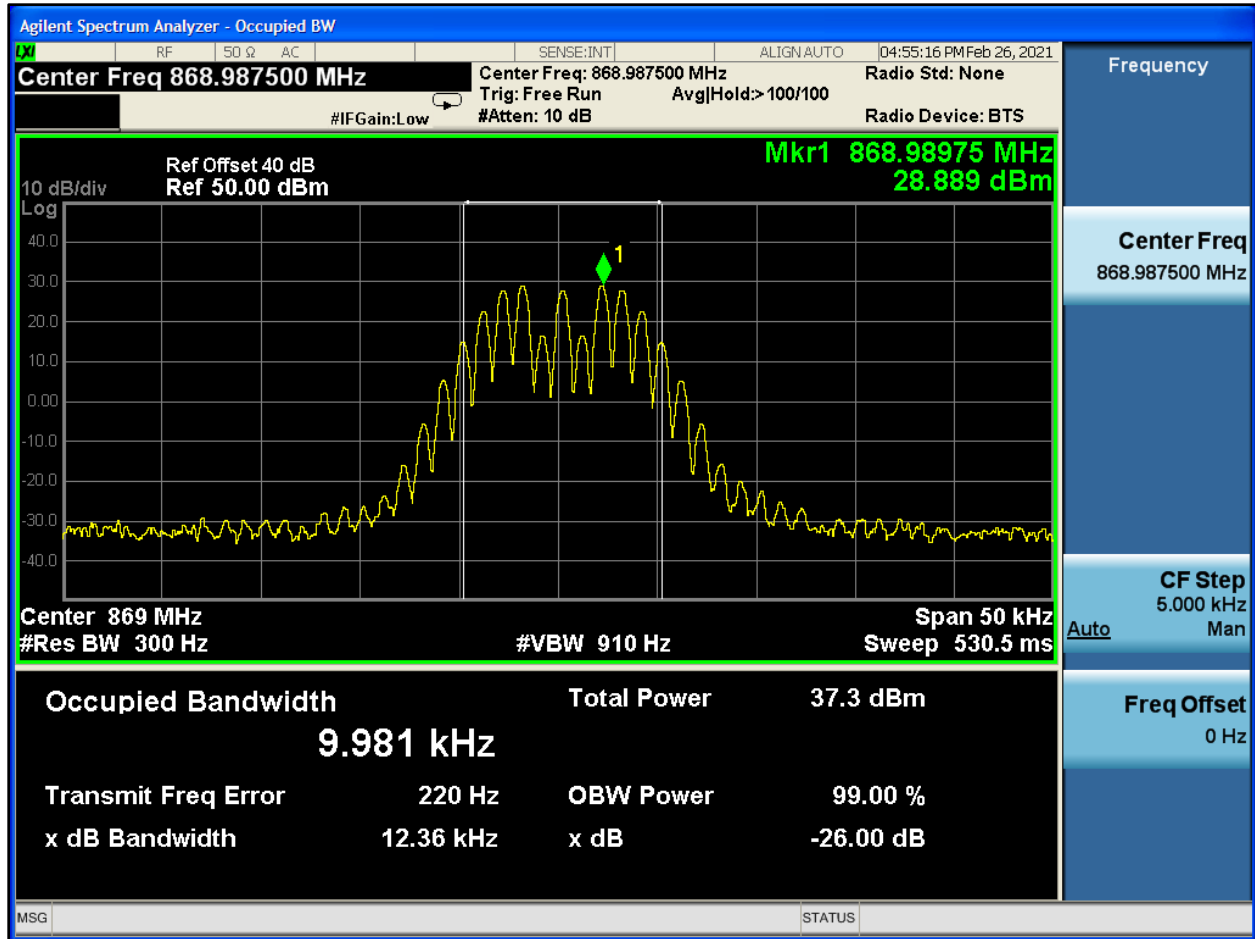

**Plot 8-615: OBW 99%, 868.9875 MHz, WB**

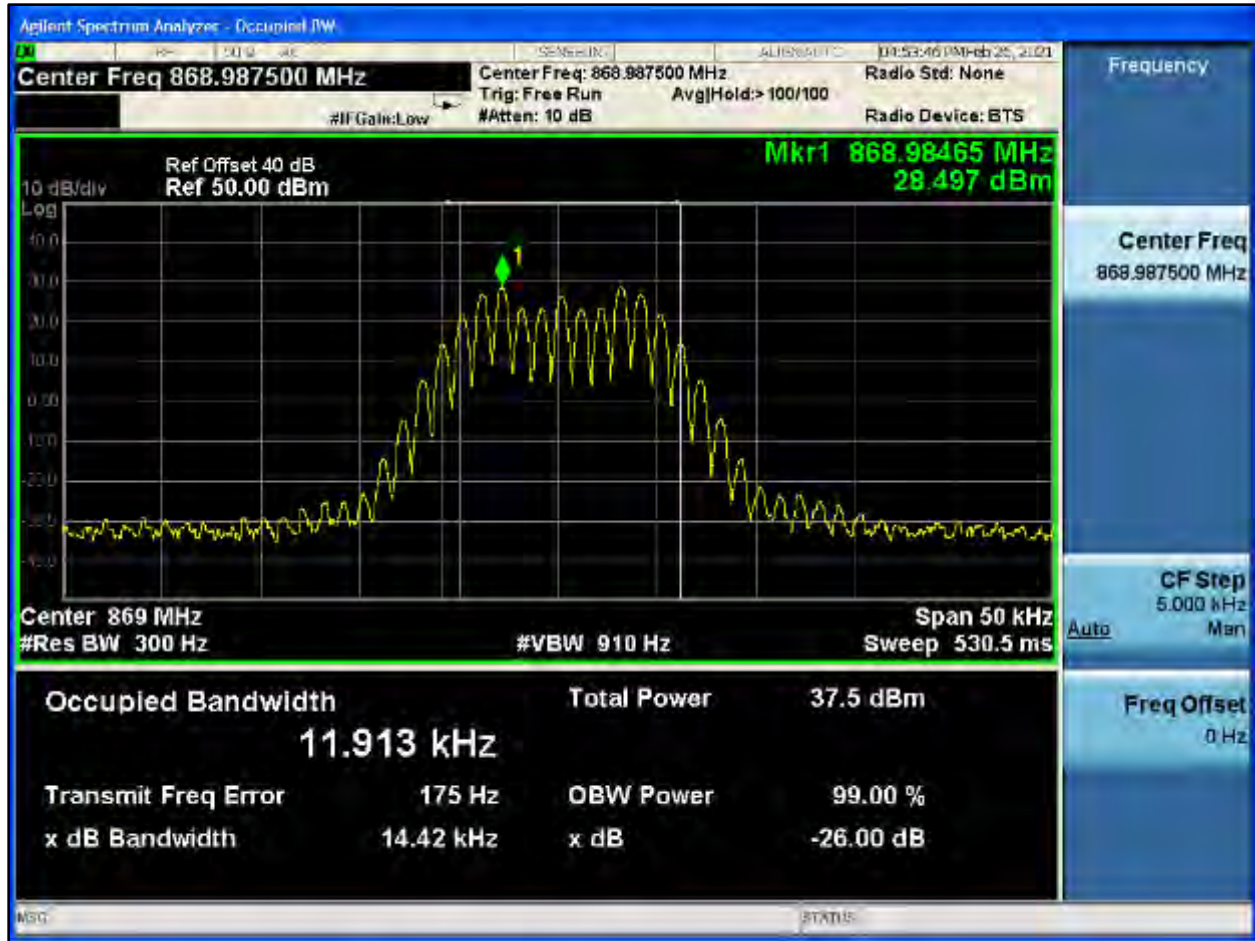

**Plot 8-616: OBW 99%, 868.9875 MHz, C4FM**




**Plot 8-617: OBW 99%, 868.9875 MHz, H-CPM TDMA**



**Plot 8-618: OBW 99%, 868.9875 MHz, NB 2 FSK**



**Plot 8-619: OBW 99%, 868.9875 MHz, NPSPAC 2 FSK**

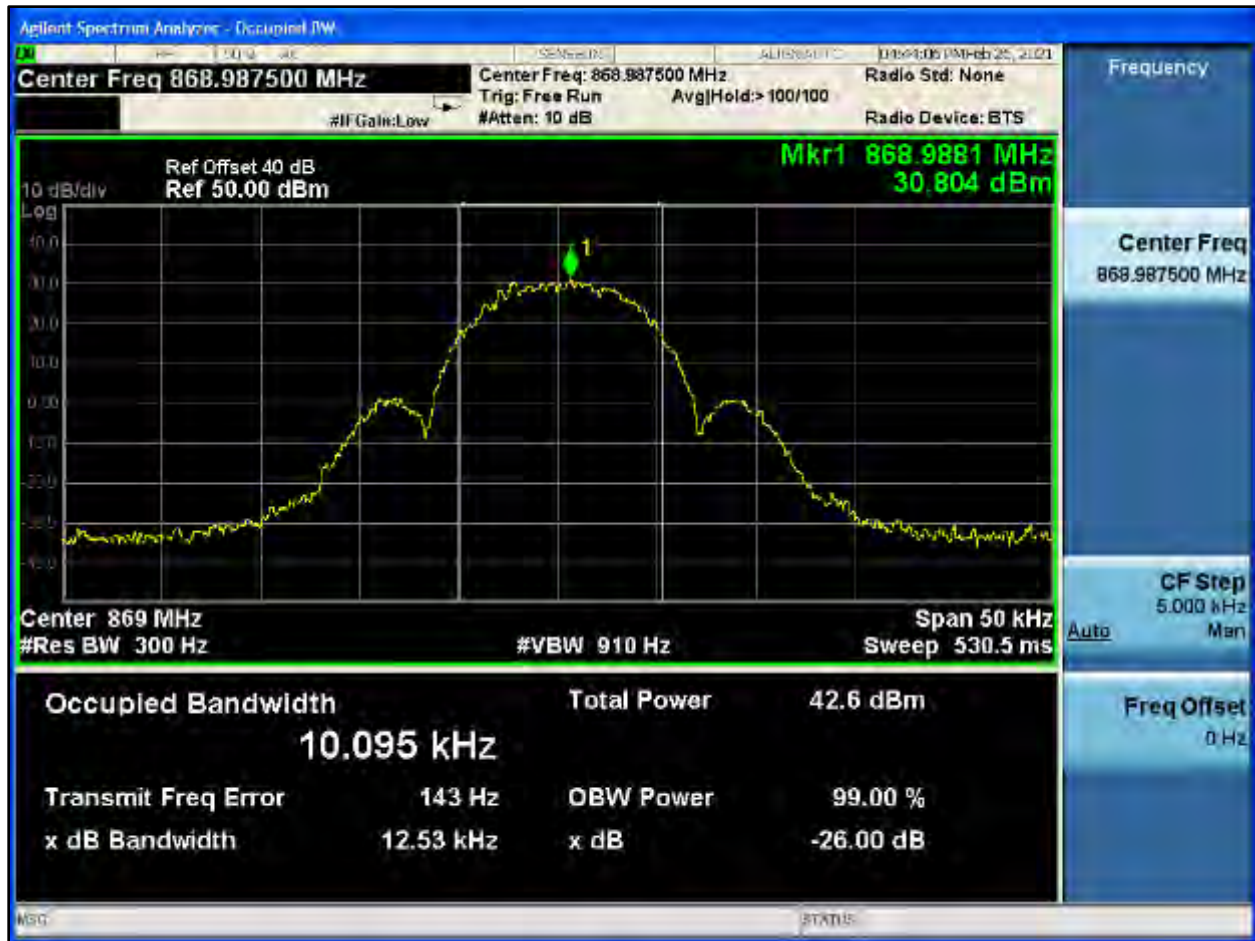





**Plot 8-620: OBW 99%, 868.9875 MHz, WB 2 FSK**




**Plot 8-621: OBW 99%, 868.9875 MHz, HVD SMR**

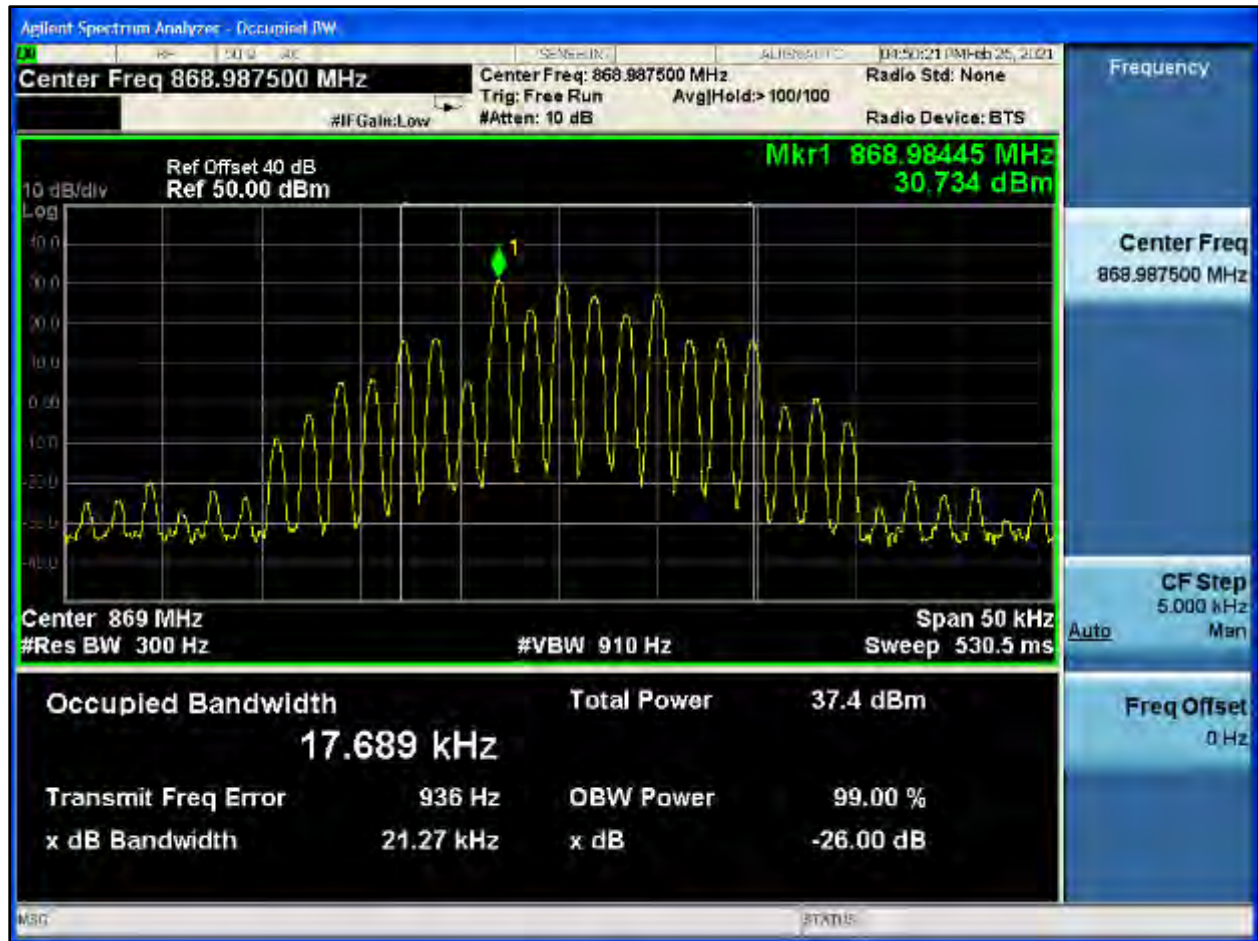


**Plot 8-622: OBW 99%, 868.9875 MHz, HVD NPSPAC**

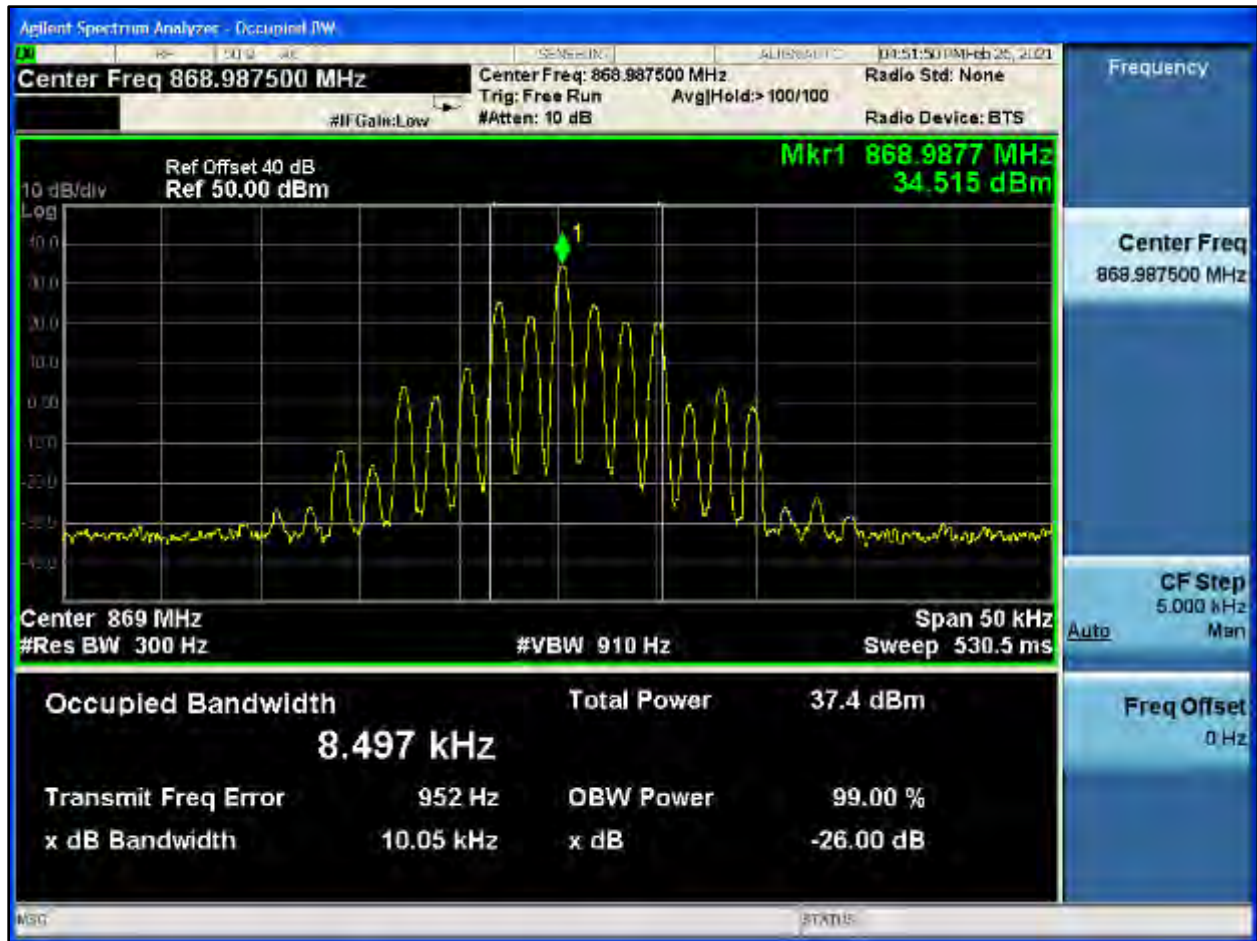


**Plot 8-623: OBW 99%, 869.9875 MHz, NB**

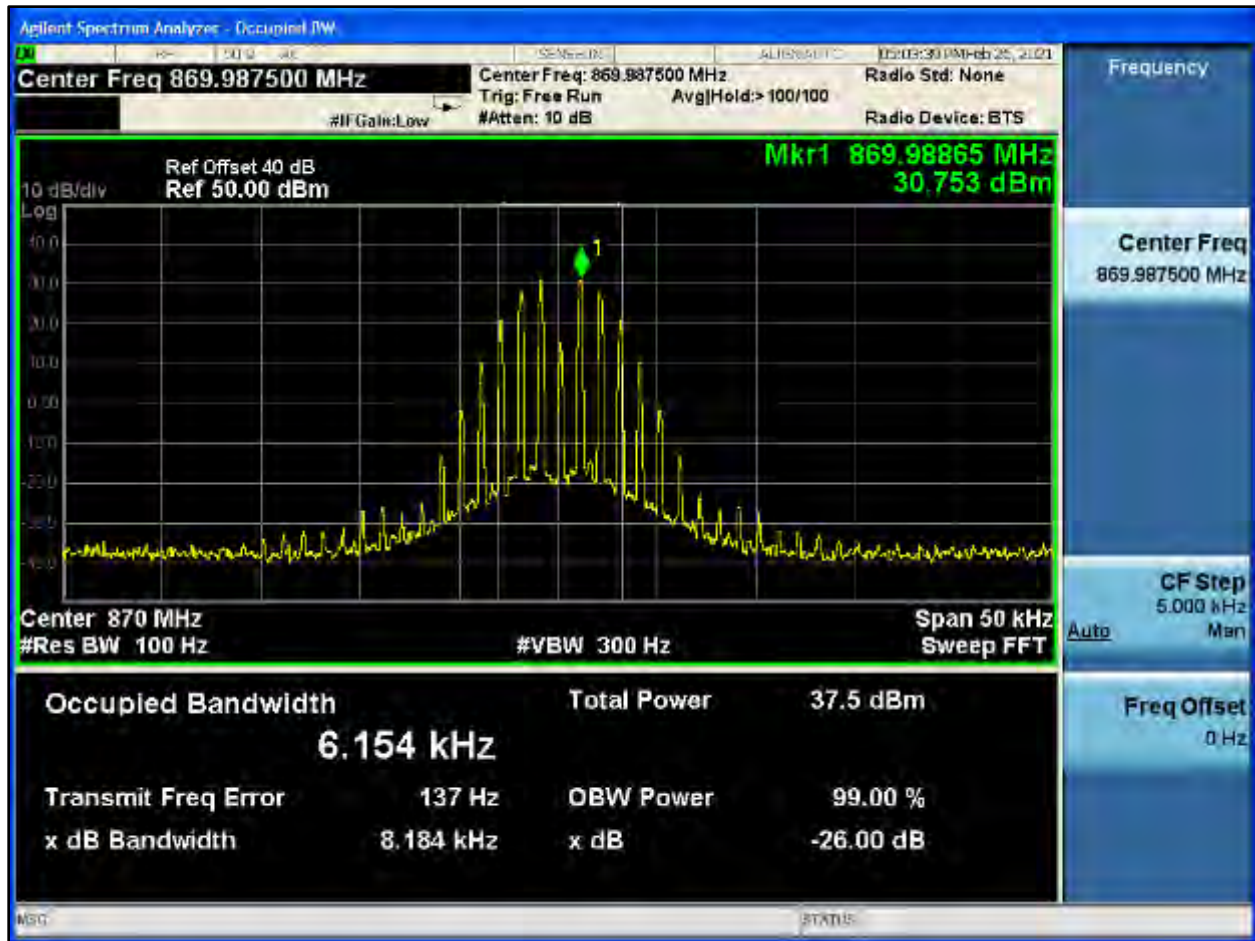

**Plot 8-624: OBW 99%, 869.9875 MHz, NPSPAC**

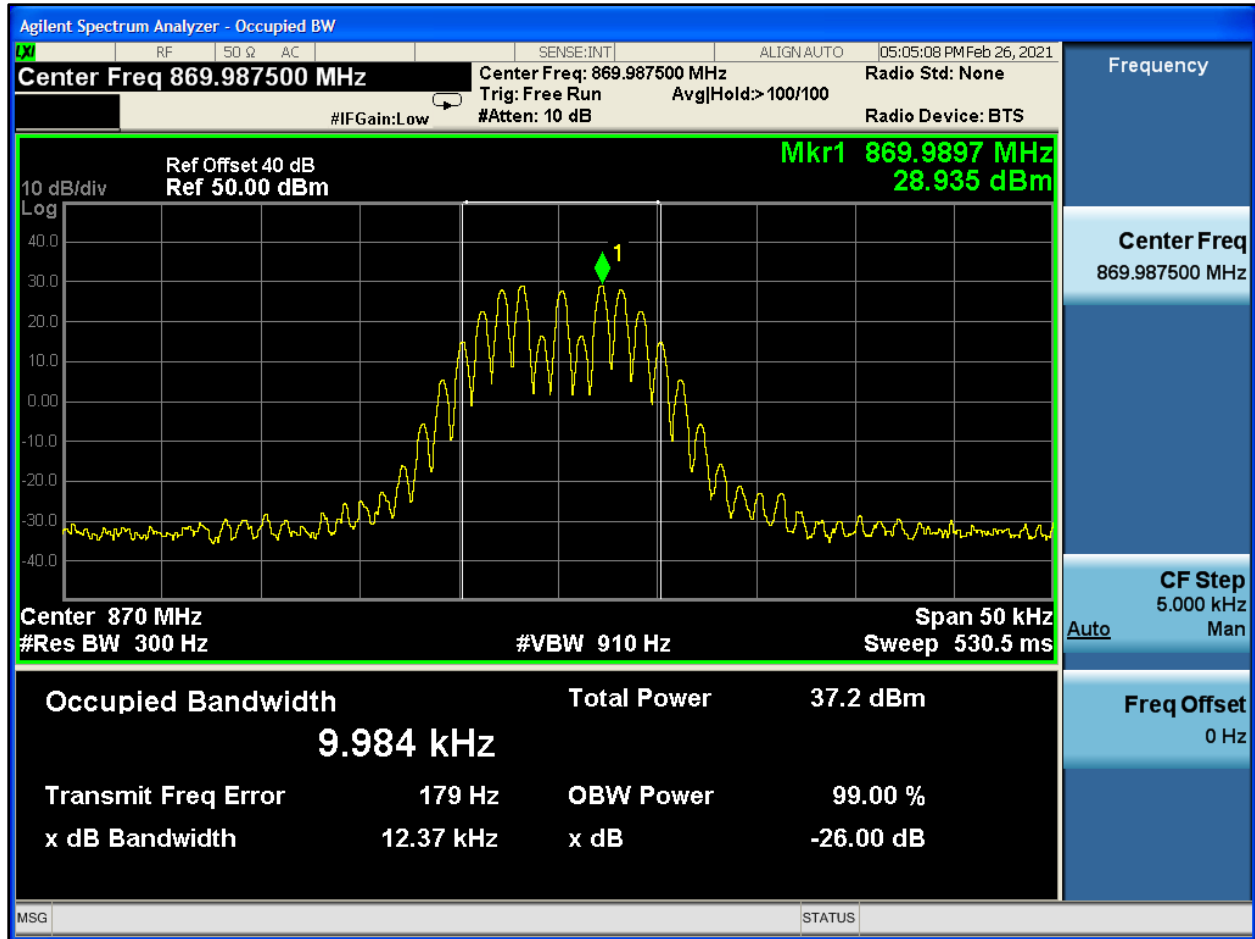


**Plot 8-625: OBW 99%, 869.9875 MHz, WB**

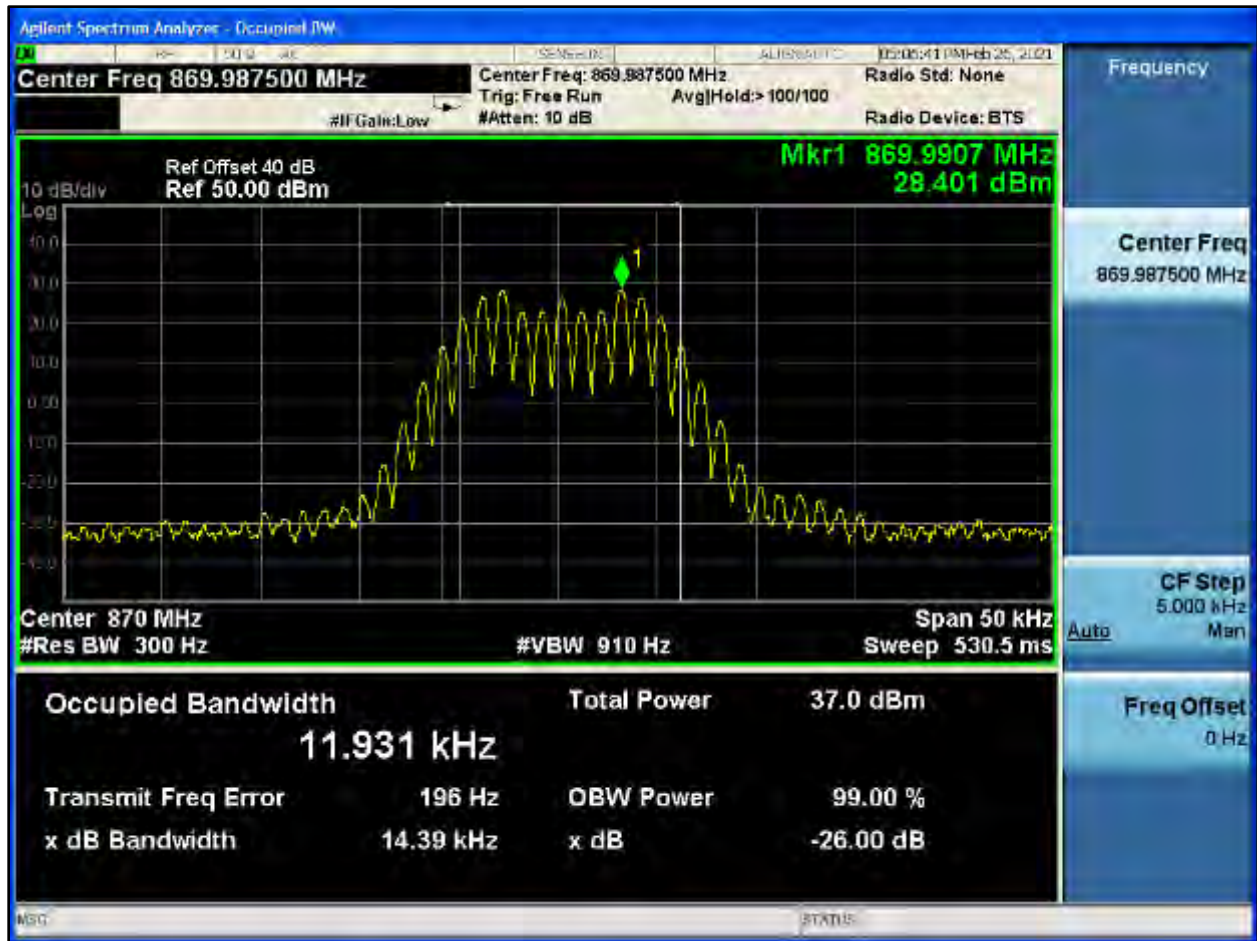

**Plot 8-626: OBW 99%, 869.9875 MHz, C4FM**



**Plot 8-627: OBW 99%, 869.9875 MHz, H-CPM TDMA**

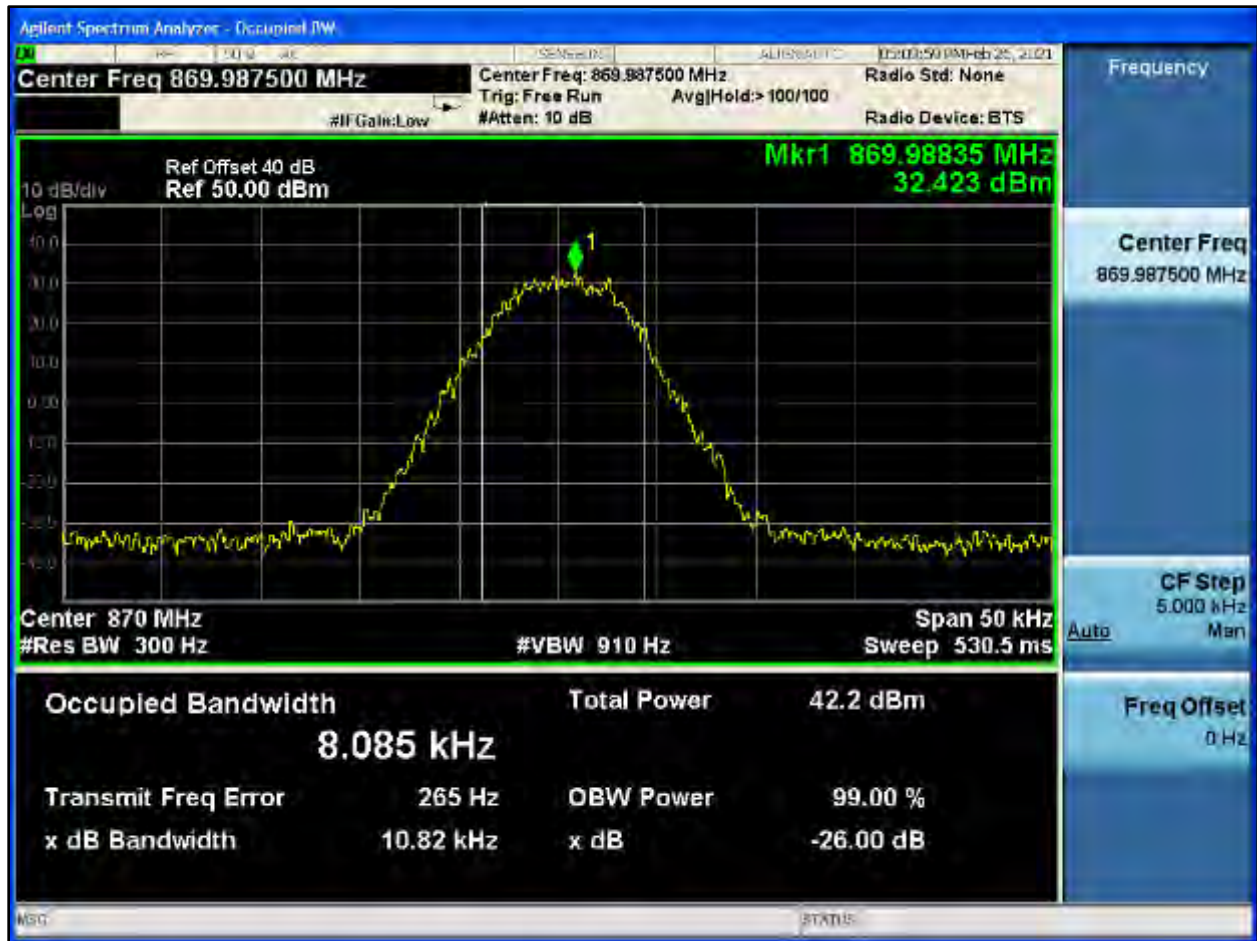




**Plot 8-628: OBW 99%, 869.9875 MHz, NB 2 FSK**




**Plot 8-629: OBW 99%, 869.9875 MHz, NPSPAC 2 FSK**

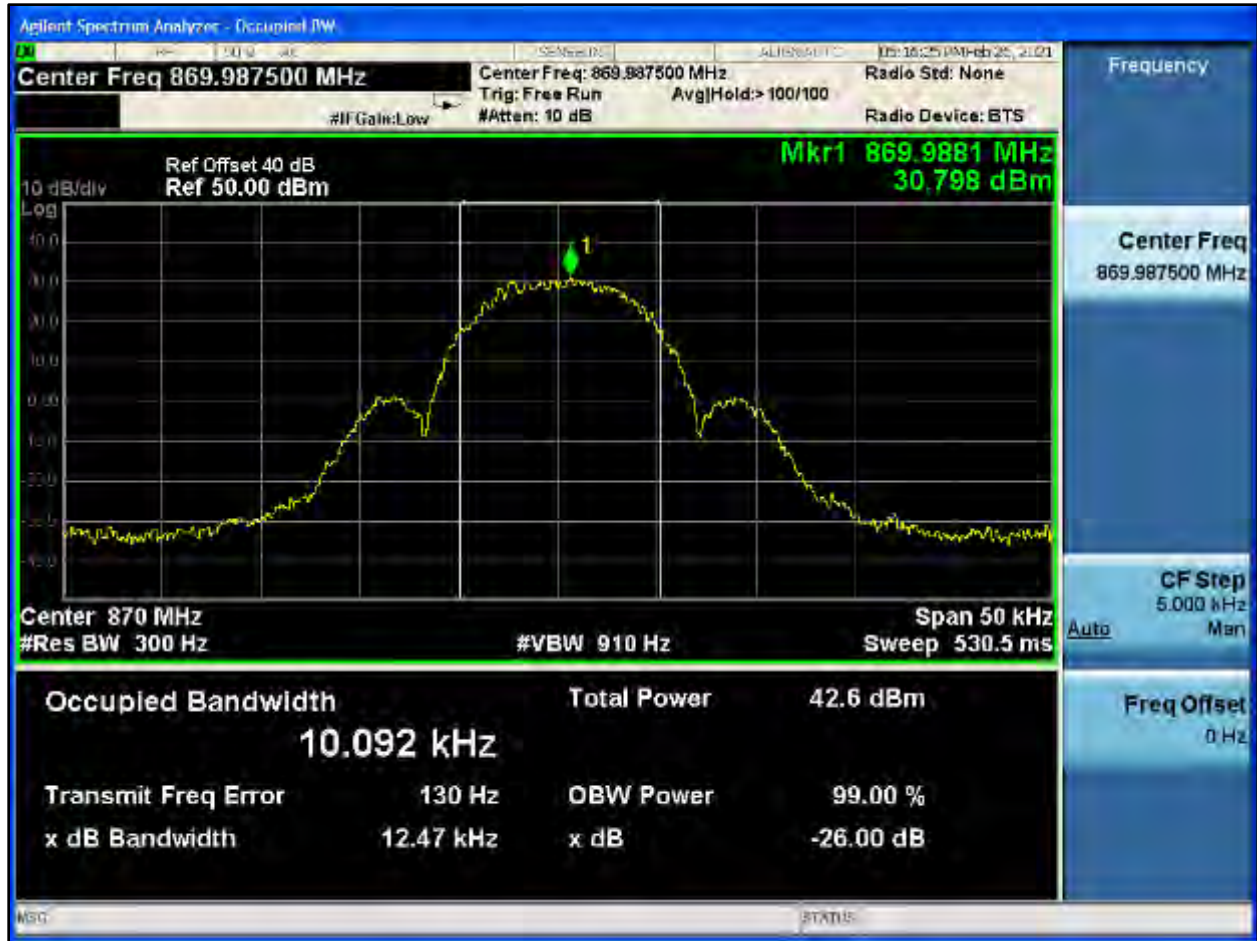


**Plot 8-630: OBW 99%, 869.9875 MHz, WB 2 FSK**



**Plot 8-631: OBW 99%, 869.9875 MHz, HVD SMR**

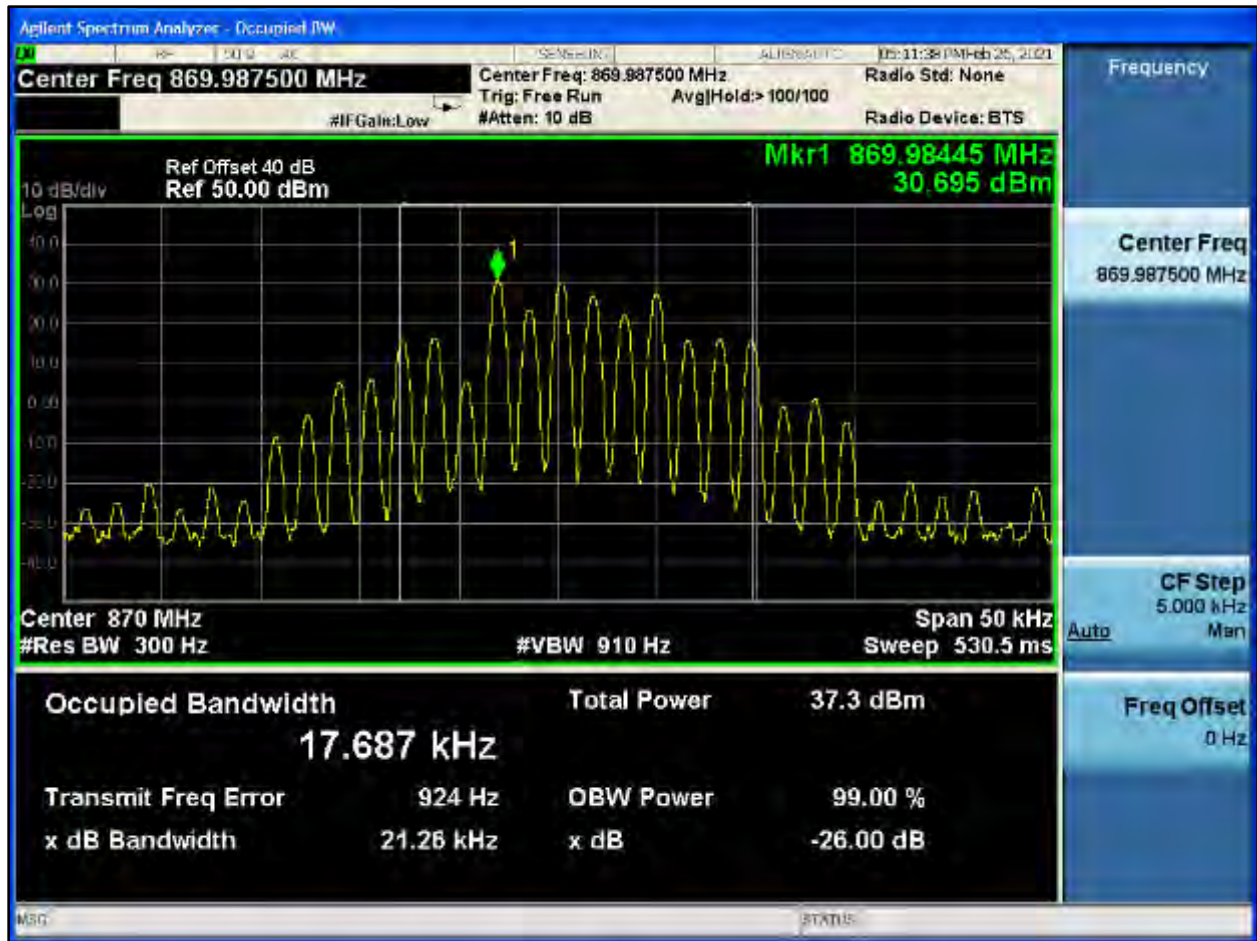

**Plot 8-632: OBW 99%, 869.9875 MHz, HVD NPSPAC**

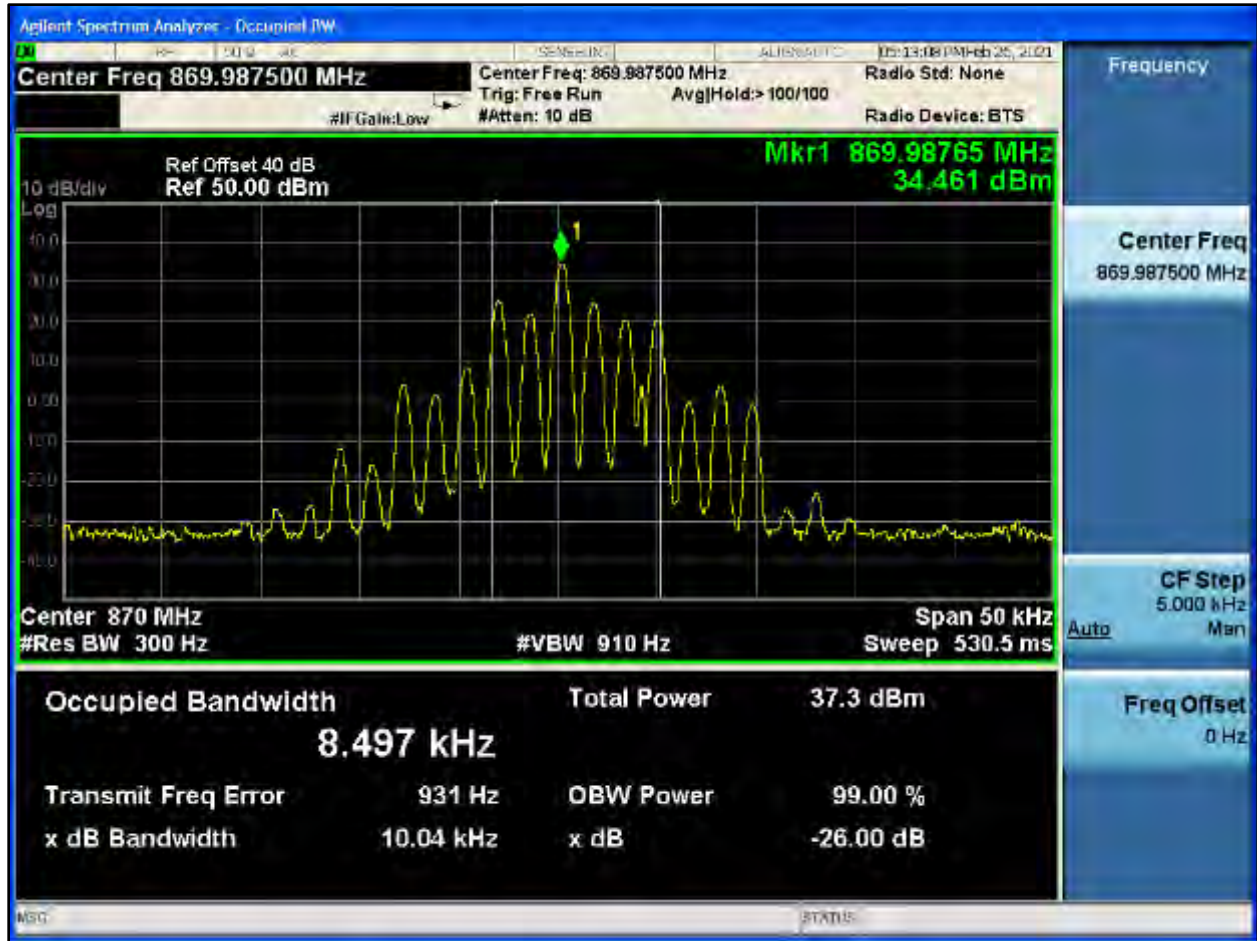


Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 Hz

**Results: Pass**

**Table 8-1: Test Equipment Used For Testing Occupied Bandwidth**

| RTL Asset # | Manufacturer         | Model                | Part Type                            | Serial Number | Calibration Due Date |
|-------------|----------------------|----------------------|--------------------------------------|---------------|----------------------|
| 901581      | Rohde & Schwarz      | FSU                  | Spectrum Analyzer                    | 1166.1660.50  | 04/26/21             |
| 901139      | Weinschel Corp.      | 48-20-34<br>DC-18GHz | Attenuator, 100W 20dB                | BK5859        | 05/04/21             |
| 901724      | API Weinschel, Inc.  | 48-40-34             | 40 dB 100W Attenuator                | CJ8921        | 9/15/21              |
| 901583      | Agilent Technologies | N9010A               | EXA Signal Analyzer (10 Hz-26.5 GHz) | MY51250846    | 3/18/22              |
| 901582      | Rohde & Schwarz      | 1167.0000.02         | Signal Generator                     | 101903        | 04/24/21             |

**Test Personnel:**

|                 |  |                                    |
|-----------------|--|------------------------------------|
|                 |  |                                    |
| Daniel Baltzell | Signature  | February 22-March 8, April 1, 2021 |
| Test Engineer   |  | Dates of Tests                     |

**9 FCC Part 2.1055: Frequency Stability; Part 22.355: Frequency Tolerance; Part 74.464; Frequency Tolerance; Part 80.209: Frequency Stability; Part 90.213, Part 90.539: Frequency Stability; ISED RSS-119 5.3: Transmitter Frequency Stability**

**9.1 Test Procedure**

ANSI C63.26, section 5.6

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C. The AFC was not locked to the base station.

The temperature was initially set to -30°C and a 1-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

**Part 22.355 Frequency tolerance.** Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

**Frequency Tolerance for Transmitters in the Public Mobile Services**

| Frequency Range (MHz) | Mobile <= 3 Watts (ppm) |
|-----------------------|-------------------------|
| 50-450                | 50.0                    |
| 450-512               | 5.0                     |
| 821-896               | 2.5                     |

**Part 74.464 Frequency tolerance.** For operations on frequencies above 25 MHz using authorized bandwidths to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter.

**Part 80.209:** 156-162 MHz 10 ppm. 400-466 MHz 5 ppm

**Part 90.213 Frequency Stability**

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

| MINIMUM FREQUENCY STABILITY<br>[Parts per million (ppm)] |                         |                           |                              |
|--|-------------------------|---------------------------|------------------------------|
| Frequency range (MHz)                                    | Fixed and base stations | Mobile stations           |                              |
|  |                         | Over 2 watts output power | 2 watts or less output power |
| Below 25 .....   | <sup>1,2,3</sup> 100    | 100                       | 200                          |
| 25-50 .....  | 20                      | 20                        | 50                           |
| 72-76 .....  | 5                       | 5                         | 50                           |
| 150-174 .....  | <sup>5,11</sup> 5       | <sup>6</sup> 5            | <sup>4,6</sup> 50            |
| 216-220 .....  | 1.0                     | 1.0                       | 1.0                          |
| 220-222 <sup>12</sup> .....                              | 0.1                     | 1.5                       | 1.5                          |
| 421-512 .....  | <sup>7,11,14</sup> 2.5  | <sup>8</sup> 5            | <sup>8</sup> 5               |
| 806-809 .....  | <sup>14</sup> 1.0       | 1.5                       | 1.5                          |
| 809-824 .....  | <sup>14</sup> 1.5       | 2.5                       | 2.5                          |
| 851-854 .....  | 1.0                     | 1.5                       | 1.5                          |
| 854-869 .....  | 1.5                     | 2.5                       | 2.5                          |
| 896-901 .....  | <sup>14</sup> 0.1       | 1.5                       | 1.5                          |
| 902-928 .....  | 2.5                     | 2.5                       | 2.5                          |
| 902-928 <sup>13</sup> .....                              | 2.5                     | 2.5                       | 2.5                          |
| 929-930 .....  | 1.5                     | 1.5                       | 1.5                          |
| 935-940 .....  | 0.1                     | 1.5                       | 1.5                          |
| 1427-1435 .....  | <sup>9</sup> 300        | 300                       | 300                          |
| Above 2450 <sup>10</sup> .....                           | .....                   | .....                     | .....                        |

Part 90.213: Mobile stations over 2 W operating power - 1.5 ppm (806-809 MHz, 851-854 MHz, 896-901 MHz, and 935-940 MHz); 2.5 ppm (809-824 MHz, and 854-869 MHz)

**Part 90.539 Frequency Stability**

Transmitters designed to operate in 769-775 MHz and 799-805 MHz frequency bands must meet the frequency stability requirements in this section.

- (a) Mobile, portable and control transmitters must normally use automatic frequency control (AFC) to lock on to the base station signal.
- (b) The frequency stability of base transmitters operating in the narrowband segment must be 100 parts per billion or better.
- (c) The frequency stability of mobile, portable and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).

The EUT was tested while the AFC was not locked, therefore, the worst case limit is 1.5 ppm. The worst-case deviation was found to be -0.07 ppm.

UHF band data is for engineering use only, and not applicable to the current equipment authorization application.



**9.2 Test Data**

**Table 9-1: Temperature Frequency Stability – 136.0125 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 136.012495              | -0.04 |
| -20              | 136.012495              | -0.04 |
| -10              | 136.012497              | -0.02 |
| 0                | 136.012495              | -0.04 |
| 10               | 136.012502              | 0.01  |
| 20 (reference)   | 136.012500              | 0.00  |
| 30               | 136.012498              | -0.01 |
| 40               | 136.012502              | 0.01  |
| 50               | 136.012505              | 0.04  |
| 55               | 136.012503              | 0.02  |
| 60               | 136.012495              | -0.04 |

**Table 9-2: Temperature Frequency Stability – 141.0125 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 141.012492              | -0.06 |
| -20              | 141.012497              | -0.02 |
| -10              | 141.012498              | -0.01 |
| 0                | 141.012495              | -0.03 |
| 10               | 141.012502              | 0.01  |
| 20 (reference)   | 141.012500              | 0.00  |
| 30               | 141.012498              | -0.01 |
| 40               | 141.012503              | 0.02  |
| 50               | 141.012505              | 0.03  |
| 55               | 141.012503              | 0.02  |
| 60               | 141.012492              | -0.06 |

**Table 9-3: Temperature Frequency Stability – 162.0125 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 162.012490              | -0.06 |
| -20              | 162.012497              | -0.02 |
| -10              | 162.012497              | -0.02 |
| 0                | 162.012497              | -0.02 |
| 10               | 162.012505              | 0.03  |
| 20 (reference)   | 162.012500              | 0.00  |
| 30               | 162.012497              | -0.02 |
| 40               | 162.012503              | 0.02  |
| 50               | 162.012508              | 0.05  |
| 55               | 162.012503              | 0.02  |
| 60               | 162.012490              | -0.06 |

**Table 9-4: Temperature Frequency Stability – 156.8 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 156.799992              | -0.05 |
| -20              | 156.799995              | -0.03 |
| -10              | 156.799997              | -0.02 |
| 0                | 156.799997              | -0.02 |
| 10               | 156.800000              | 0.00  |
| 20 (reference)   | 156.800000              | 0.00  |
| 30               | 156.799998              | -0.01 |
| 40               | 156.800005              | 0.03  |
| 50               | 156.800006              | 0.04  |
| 55               | 156.800003              | 0.02  |
| 60               | 156.799992              | -0.05 |

**Table 9-5: Temperature Frequency Stability – 418.0 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 417.999984              | -0.04 |
| -20              | 417.999999              | 0.00  |
| -10              | 417.999997              | -0.01 |
| 0                | 418.000002              | 0.00  |
| 10               | 418.000002              | 0.00  |
| 20 (reference)   | 418.000000              | 0.00  |
| 30               | 417.999996              | -0.01 |
| 40               | 418.000013              | 0.03  |
| 50               | 418.000018              | 0.04  |
| 55               | 418.000013              | 0.03  |
| 60               | 417.999984              | -0.04 |

**Table 9-6: Temperature Frequency Stability – 459.025 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 459.024974              | -0.06 |
| -20              | 459.024989              | -0.02 |
| -10              | 459.024987              | -0.03 |
| 0                | 459.024994              | -0.01 |
| 10               | 459.024992              | -0.02 |
| 20 (reference)   | 459.025000              | 0.00  |
| 30               | 459.024986              | -0.03 |
| 40               | 459.025010              | 0.02  |
| 50               | 459.025010              | 0.02  |
| 55               | 459.025003              | 0.01  |
| 60               | 459.024974              | -0.06 |

**Table 9-7: Temperature Frequency Stability – 469.9875 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 469.987473              | -0.06 |
| -20              | 469.987492              | -0.02 |
| -10              | 469.987490              | -0.02 |
| 0                | 469.987494              | -0.01 |
| 10               | 469.987516              | 0.03  |
| 20 (reference)   | 469.987500              | 0.00  |
| 30               | 469.987484              | -0.03 |
| 40               | 469.987506              | 0.01  |
| 50               | 469.987510              | 0.02  |
| 55               | 469.987503              | 0.01  |
| 60               | 469.987473              | -0.06 |

**Table 9-8: Temperature Frequency Stability – 772.0125 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 772.012457              | -0.06 |
| -20              | 772.012498              | 0.00  |
| -10              | 772.012482              | -0.02 |
| 0                | 772.012551              | 0.07  |
| 10               | 772.012482              | -0.02 |
| 20 (reference)   | 772.012500              | 0.00  |
| 30               | 772.012489              | -0.01 |
| 40               | 772.012510              | 0.01  |
| 50               | 772.012510              | 0.01  |
| 55               | 772.012506              | 0.01  |
| 60               | 772.012457              | -0.06 |

**Table 9-9: Temperature Frequency Stability – 802.0 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 801.999962              | -0.05 |
| -20              | 801.999990              | -0.01 |
| -10              | 801.999982              | -0.02 |
| 0                | 802.000048              | 0.06  |
| 10               | 801.999984              | -0.02 |
| 20 (reference)   | 802.000000              | 0.00  |
| 30               | 801.999976              | -0.03 |
| 40               | 802.000010              | 0.01  |
| 50               | 802.000016              | 0.02  |
| 55               | 802.000003              | 0.00  |
| 60               | 801.999962              | -0.05 |

**Table 9-10: Temperature Frequency Stability – 815.0 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 814.999946              | -0.07 |
| -20              | 814.999994              | -0.01 |
| -10              | 814.999984              | -0.02 |
| 0                | 815.000046              | 0.06  |
| 10               | 814.999982              | -0.02 |
| 20 (reference)   | 815.000000              | 0.00  |
| 30               | 814.999978              | -0.03 |
| 40               | 815.000024              | 0.03  |
| 50               | 815.000005              | 0.01  |
| 55               | 814.999998              | 0.00  |
| 60               | 814.999946              | -0.07 |

**Table 9-11: Temperature Frequency Stability – 860.0MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 859.999947              | -0.06 |
| -20              | 859.999990              | -0.01 |
| -10              | 859.999984              | -0.02 |
| 0                | 860.000051              | 0.06  |
| 10               | 859.999984              | -0.02 |
| 20 (reference)   | 860.000000              | 0.00  |
| 30               | 859.999965              | -0.04 |
| 40               | 860.000016              | 0.02  |
| 50               | 860.000002              | 0.00  |
| 55               | 860.000002              | 0.00  |
| 60               | 859.999947              | -0.06 |

**Table 9-12: Temperature Frequency Stability – 869.9875 MHz**

| Temperature (°C) | Measured Frequency (Hz) | ppm   |
|------------------|-------------------------|-------|
| -30              | 869.987449              | -0.06 |
| -20              | 869.987476              | -0.03 |
| -10              | 869.987479              | -0.02 |
| 0                | 869.987554              | 0.06  |
| 10               | 869.987484              | -0.02 |
| 20 (reference)   | 869.987500              | 0.00  |
| 30               | 869.987482              | -0.02 |
| 40               | 869.987514              | 0.02  |
| 50               | 869.987530              | 0.03  |
| 55               | 869.987508              | 0.01  |
| 60               | 869.987449              | -0.06 |

**Table 9-13: Frequency Stability/Voltage Variation –136.0125 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm   |
|-----------------------|-------------------------|-------|
| 6.3 Battery End-point | 136.012497              | -0.02 |
| 6.375                 | 136.012497              | -0.02 |
| 7.5(reference)        | 136.012500              | 0.00  |
| 8.625                 | 136.012500              | 0.00  |

**Table 9-14: Frequency Stability/Voltage Variation – 141.0125 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm  |
|-----------------------|-------------------------|------|
| 6.3 Battery End-point | 141.012500              | 0.00 |
| 6.375                 | 141.012500              | 0.00 |
| 7.5(reference)        | 141.012500              | 0.00 |
| 8.625                 | 141.012500              | 0.00 |

**Table 9-15: Frequency Stability/Voltage Variation – 162.0125 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm  |
|-----------------------|-------------------------|------|
| 6.3 Battery End-point | 162.012500              | 0.00 |
| 6.375                 | 162.012500              | 0.00 |
| 7.5(reference)        | 162.012500              | 0.00 |
| 8.625                 | 162.012500              | 0.00 |

**Table 9-16: Frequency Stability/Voltage Variation –156.8 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm   |
|-----------------------|-------------------------|-------|
| 6.3 Battery End-point | 156.800000              | 0.00  |
| 6.375                 | 156.799997              | -0.02 |
| 7.5(reference)        | 156.800000              | 0.00  |
| 8.625                 | 156.800000              | 0.00  |

**Table 9-17: Frequency Stability/Voltage Variation – 418 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm  |
|-----------------------|-------------------------|------|
| 6.3 Battery End-point | 418.000004              | 0.01 |
| 6.375                 | 418.000007              | 0.02 |
| 7.5(reference)        | 418.000000              | 0.00 |
| 8.625                 | 418.000004              | 0.01 |

**Table 9-18: Frequency Stability/Voltage Variation – 459.025 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm   |
|-----------------------|-------------------------|-------|
| 6.3 Battery End-point | 459.024997              | -0.01 |
| 6.375                 | 459.025000              | 0.00  |
| 7.5(reference)        | 459.025000              | 0.00  |
| 8.625                 | 459.024997              | -0.01 |

**Table 9-19: Frequency Stability/Voltage Variation –469.9875 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm   |
|-----------------------|-------------------------|-------|
| 6.3 Battery End-point | 469.987497              | -0.01 |
| 6.375                 | 469.987500              | 0.00  |
| 7.5(reference)        | 469.987500              | 0.00  |
| 8.625                 | 469.987500              | 0.00  |

**Table 9-20: Frequency Stability/Voltage Variation – 772.0125 MHz**

| Voltage (VDC)         | Measured Frequency (Hz) | ppm   |
|-----------------------|-------------------------|-------|
| 6.3 Battery End-point | 772.012497              | 0.00  |
| 6.375                 | 772.012503              | 0.00  |
| 7.5(reference)        | 772.012500              | 0.00  |
| 8.625                 | 772.012494              | -0.01 |

**Table 9-21: Frequency Stability/Voltage Variation – 802 MHz**

| Voltage (VDC)         | Measured Frequency (MHz) | ppm   |
|-----------------------|--------------------------|-------|
| 6.3 Battery End-point | 802.000891               | 1.11  |
| 6.375                 | 802.000000               | 0.00  |
| 7.5(reference)        | 802.000000               | 0.00  |
| 8.625                 | 801.999994               | -0.01 |

**Table 9-22: Frequency Stability/Voltage Variation –815 MHz**

| Voltage (VDC)         | Measured Frequency (MHz) | ppm   |
|-----------------------|--------------------------|-------|
| 6.3 Battery End-point | 814.999997               | 0.00  |
| 6. 6.3 *375           | 815.000000               | 0.00  |
| 7.5(reference)        | 815.000000               | 0.00  |
| 8.625                 | 814.999994               | -0.01 |

**Table 9-23: Frequency Stability/Voltage Variation – 860 MHz**

| Voltage (VDC)         | Measured Frequency (MHz) | ppm   |
|-----------------------|--------------------------|-------|
| 6.3 Battery End-point | 859.999994               | -0.01 |
| 6.375                 | 859.999997               | 0.00  |
| 7.5(reference)        | 860.000000               | 0.00  |
| 8.625                 | 859.999994               | -0.01 |

**Table 9-24: Frequency Stability/Voltage Variation – 869.9875 MHz**

| Voltage (VDC)         | Measured Frequency (MHz) | ppm   |
|-----------------------|--------------------------|-------|
| 6.3 Battery End-point | 869.987494               | -0.01 |
| 6.375                 | 869.987494               | -0.01 |
| 7.5(reference)        | 869.987500               | 0.00  |
| 8.625                 | 869.987494               | -0.01 |

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 Hz

**Results: Pass**

**Table 9-25: Test Equipment Used For Testing Temperature Frequency Stability**

| RTL Asset # | Manufacturer            | Model    | Part Type                         | Serial Number | Calibration Due Date |
|-------------|-------------------------|----------|-----------------------------------|---------------|----------------------|
| 901350      | Meterman                | 33XR     | Multimeter                        | 040402802     | 09/20/21             |
| 901672      | Rohde & Schwarz         | FSEM30   | Spectrum Analyzer                 | FSEM30        | 04/25/22             |
| 901724      | API Weinschel, Inc.     | 48-40-34 | 40 dB 100W Attenuator             | CJ8921        | 09/15/21             |
| N/A         | GW Instek               | PSS-3203 | Power Supply                      | 2679          | Not Required         |
| 900946      | Tenney Engineering, Inc | TH65     | Temperature Chamber with Humidity | 11380         | 04/7/22              |

**Test Personnel:**

|   |   |                                  |
|---|---|----------------------------------|
|   |  |                                  |
| Daniel W. Baltzell<br>EMC Test Engineer | Signature   | February 9, 2021<br>Date of Test |



## **10 FCC §2.1047(a)(b): Modulation Characteristics; Part 74.463: Modulation Requirements; Part 80.213: Modulation Requirements; RSS-119 5.2: Types of Modulation**

### **10.1 Test Procedures**

#### **10.1.1 Audio Frequency Response**

ANSI C63.26 2015, section 5.3.3

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

Audio Frequency Response = 20 LOG (DEVfreq/DEVref)

#### **10.1.2 Audio Low Pass Filter Response**

ANSI C63.26 2015, section 5.3

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

#### **10.1.3 Modulation Limiting**


ANSI C63.26 2015, section 5.3.2

The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level (0 dB) as a reference, the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.


UHF band data is for engineering use only, and not applicable to the current equipment authorization application.

### 10.1.4 Audio Frequency Response


Plot 10-1: Modulation Characteristics - Audio Frequency Response – 136.0125 MHz (WB)

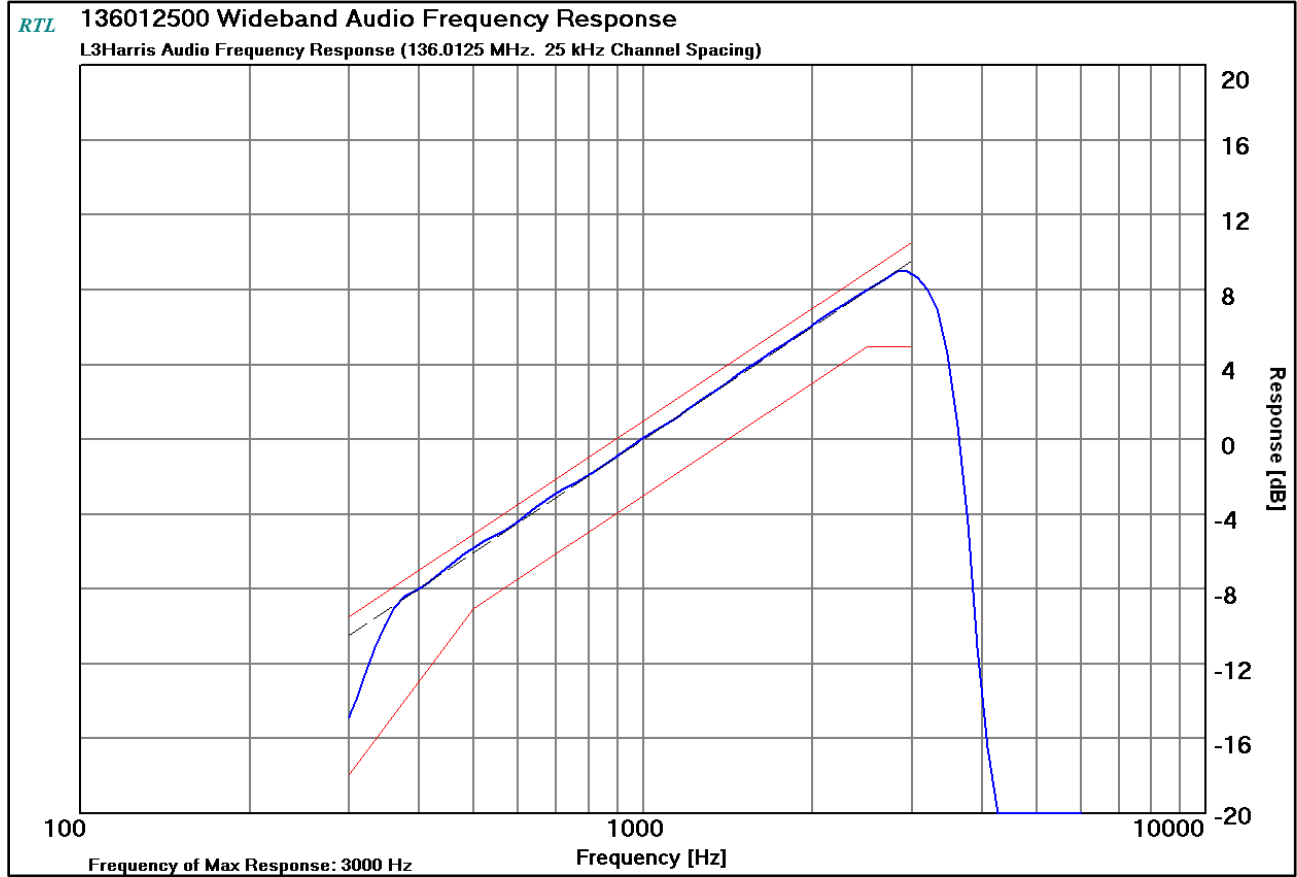


**Plot 10-2: Modulation Characteristics - Audio Frequency Response – 418.0 MHz (NB)**

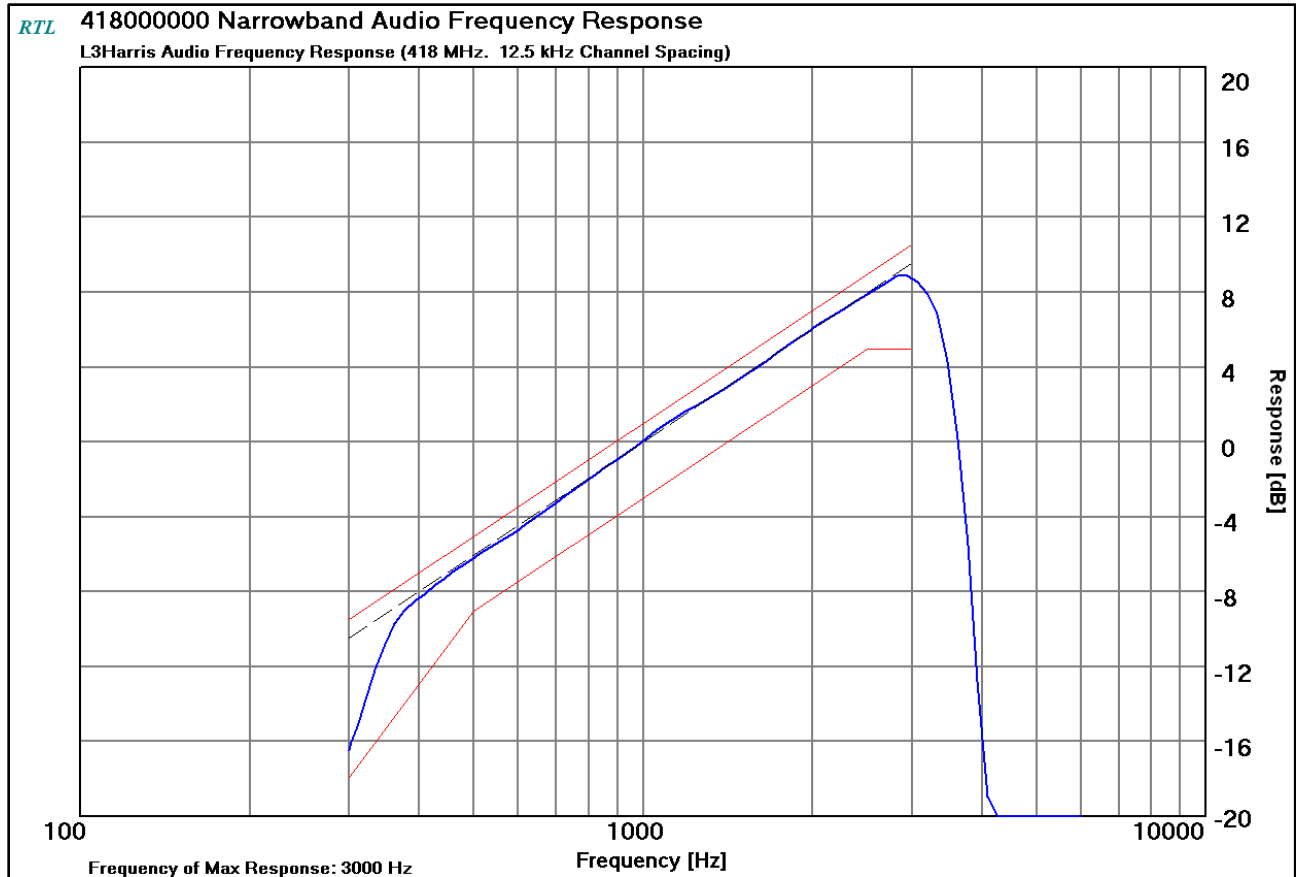

**Plot 10-3: Modulation Characteristics - Audio Frequency Response – 772.0125 MHz (NB)**

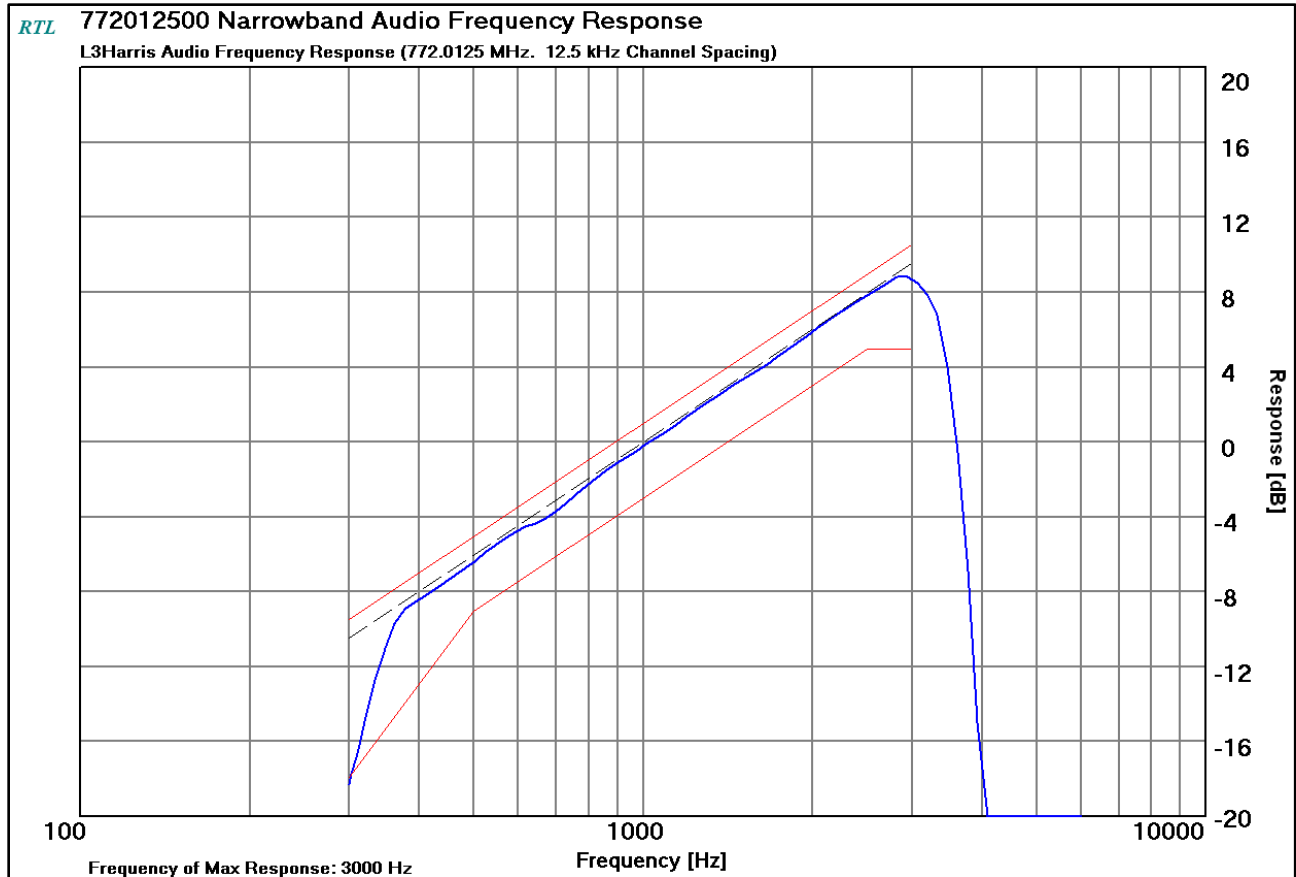


**Plot 10-4: Modulation Characteristics - Audio Frequency Response – 860.0 MHz (NPSPAC)**

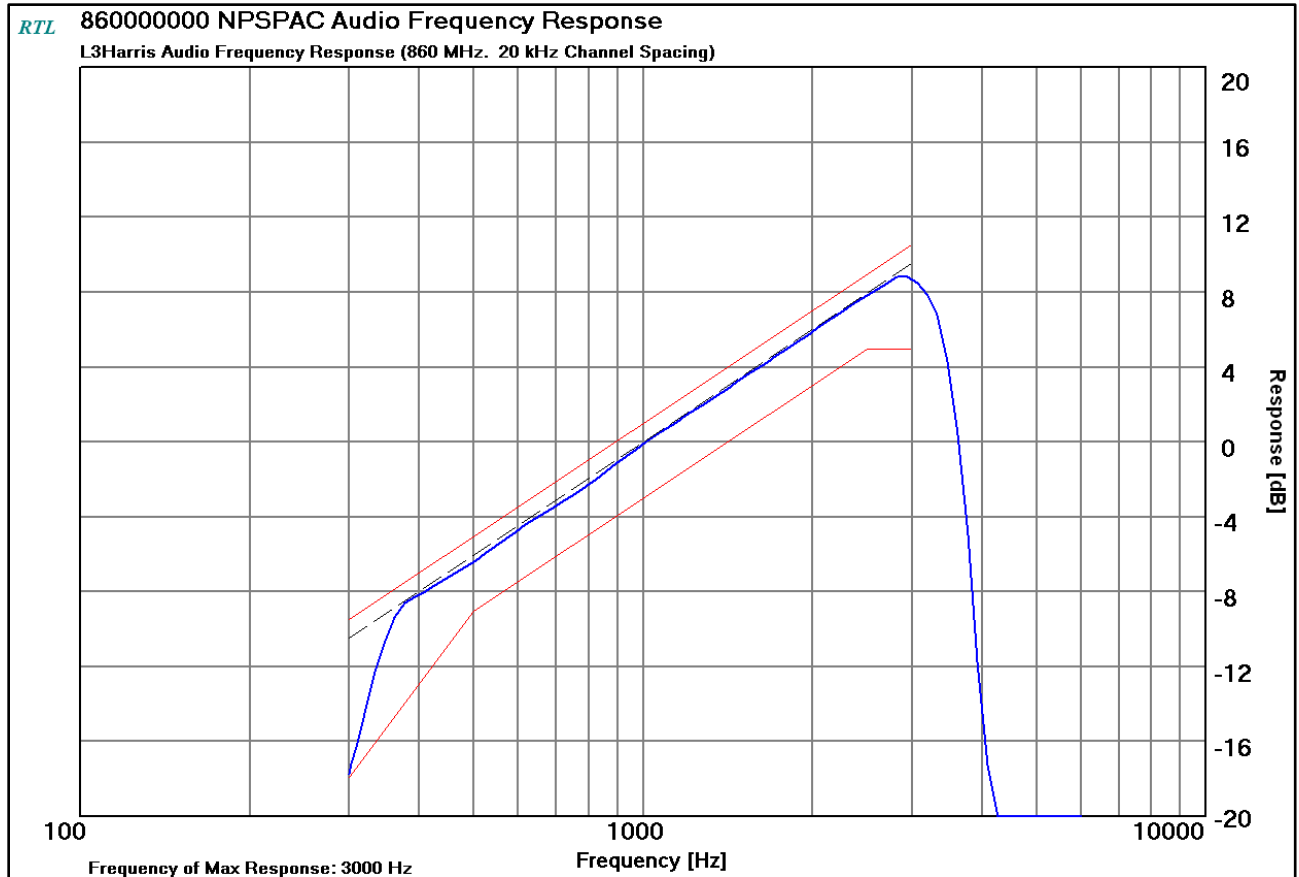


### 10.1.5 Modulation Limiting


Plot 10-5: Modulation Characteristics – Modulation Limiting – 162.0125 MHz; (WB); Positive Peak

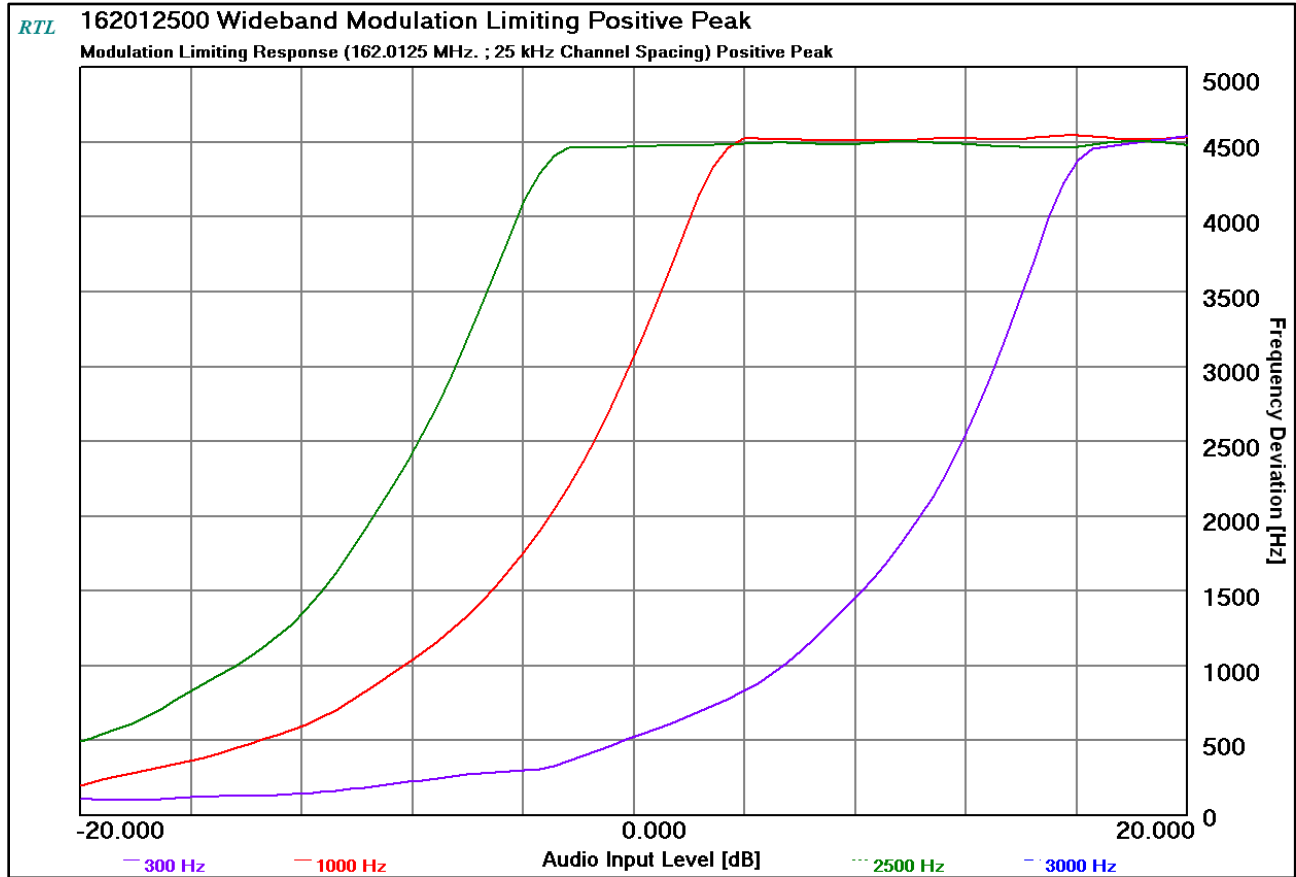

**Plot 10-6: Modulation Characteristics – Modulation Limiting - 162.0125 MHz; (WB) Negative Peak**

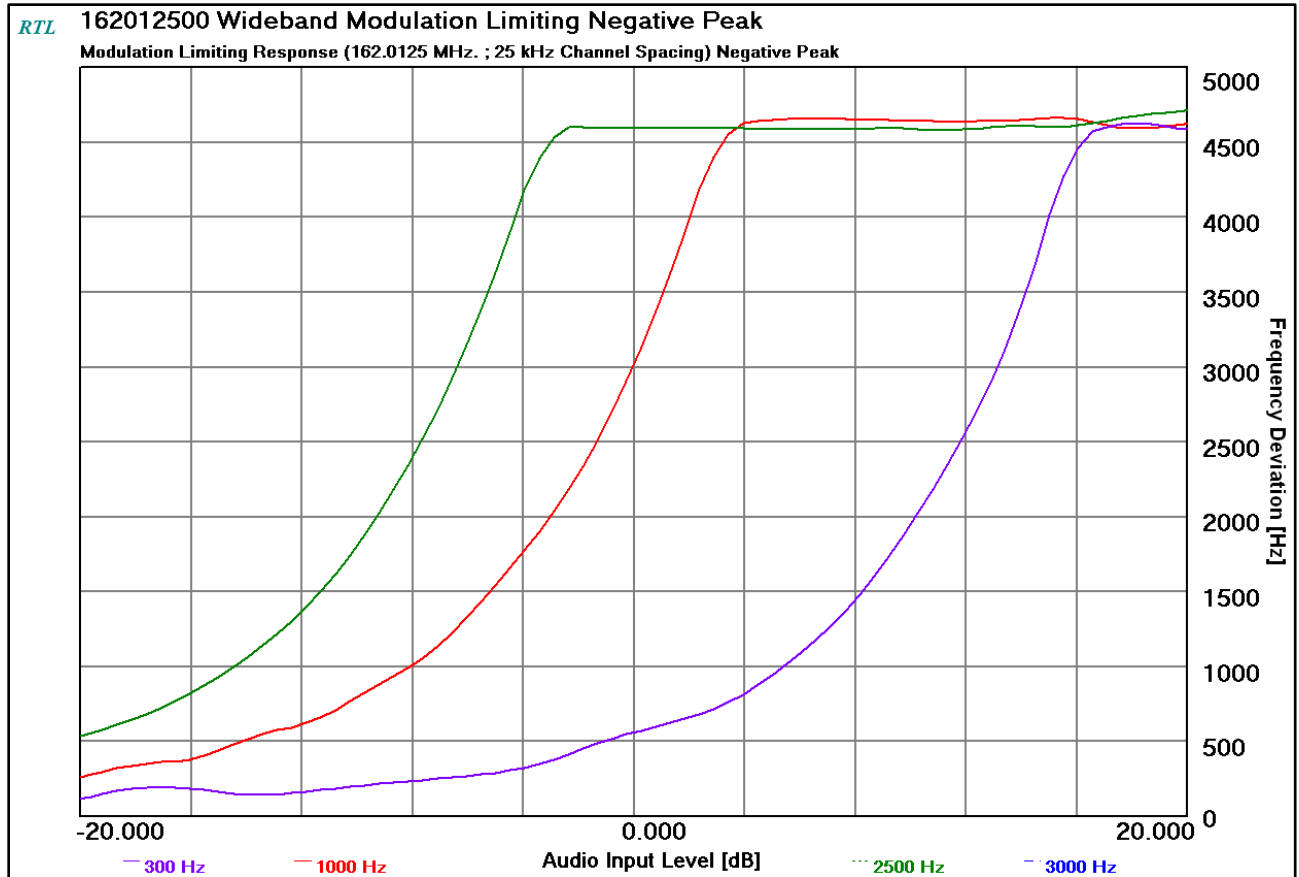


**Plot 10-7: Modulation Characteristics – Modulation Limiting – 418.0 MHz; (NB); Positive Peak**

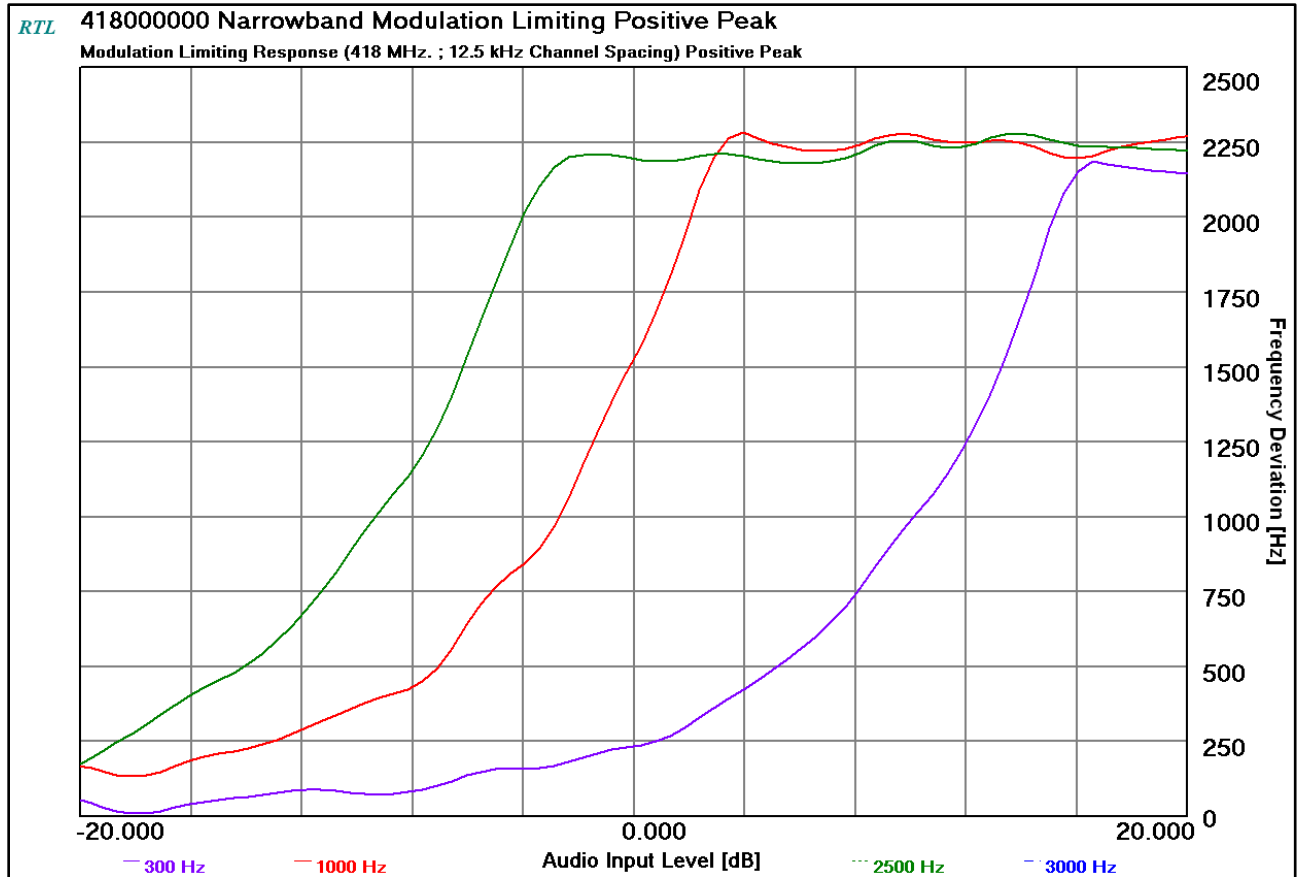





**Plot 10-8: Modulation Characteristics – Modulation Limiting – 418.0 MHz; (NB); Negative Peak**

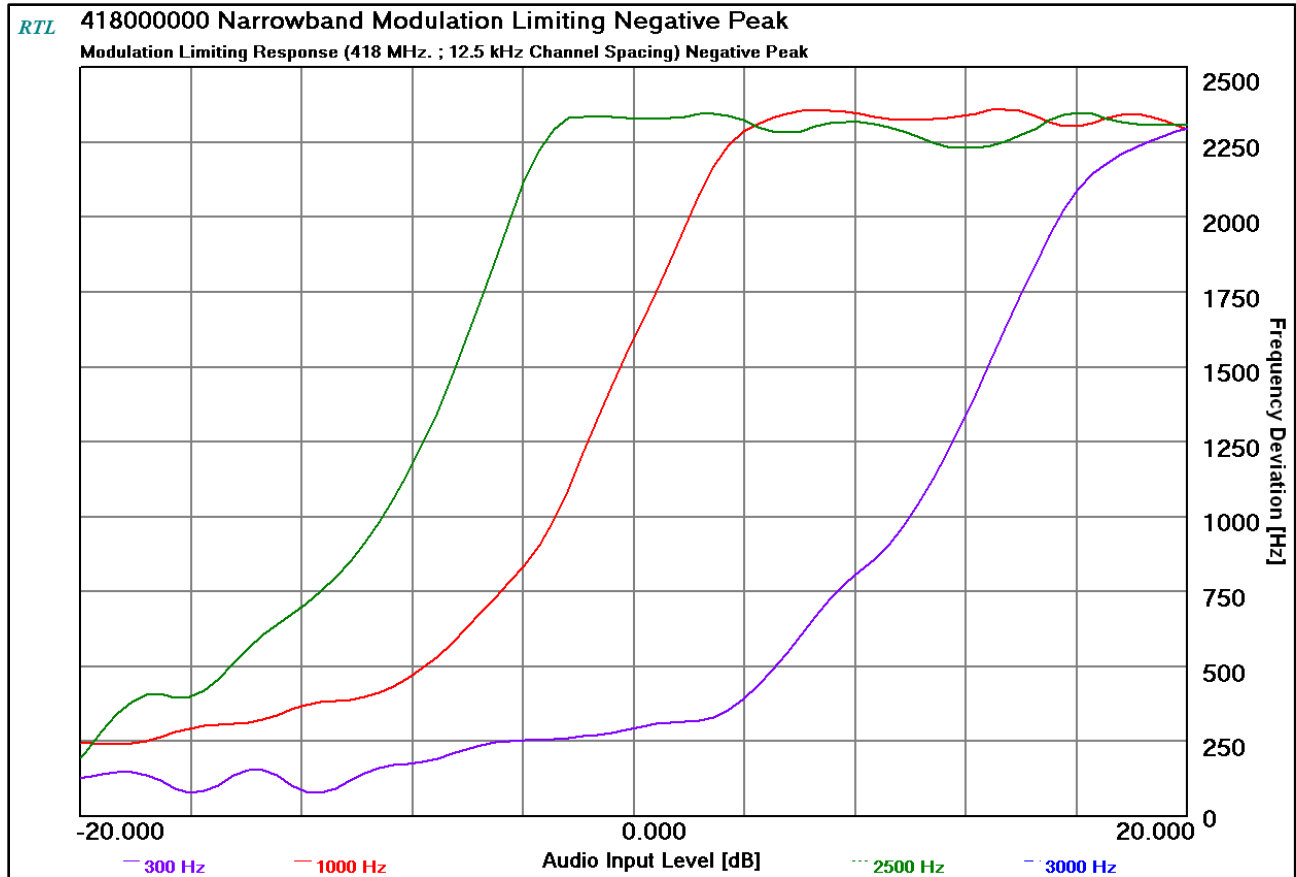


**Plot 10-9: Modulation Characteristics – Modulation Limiting – 772.0125 MHz; (NB); Positive Peak**

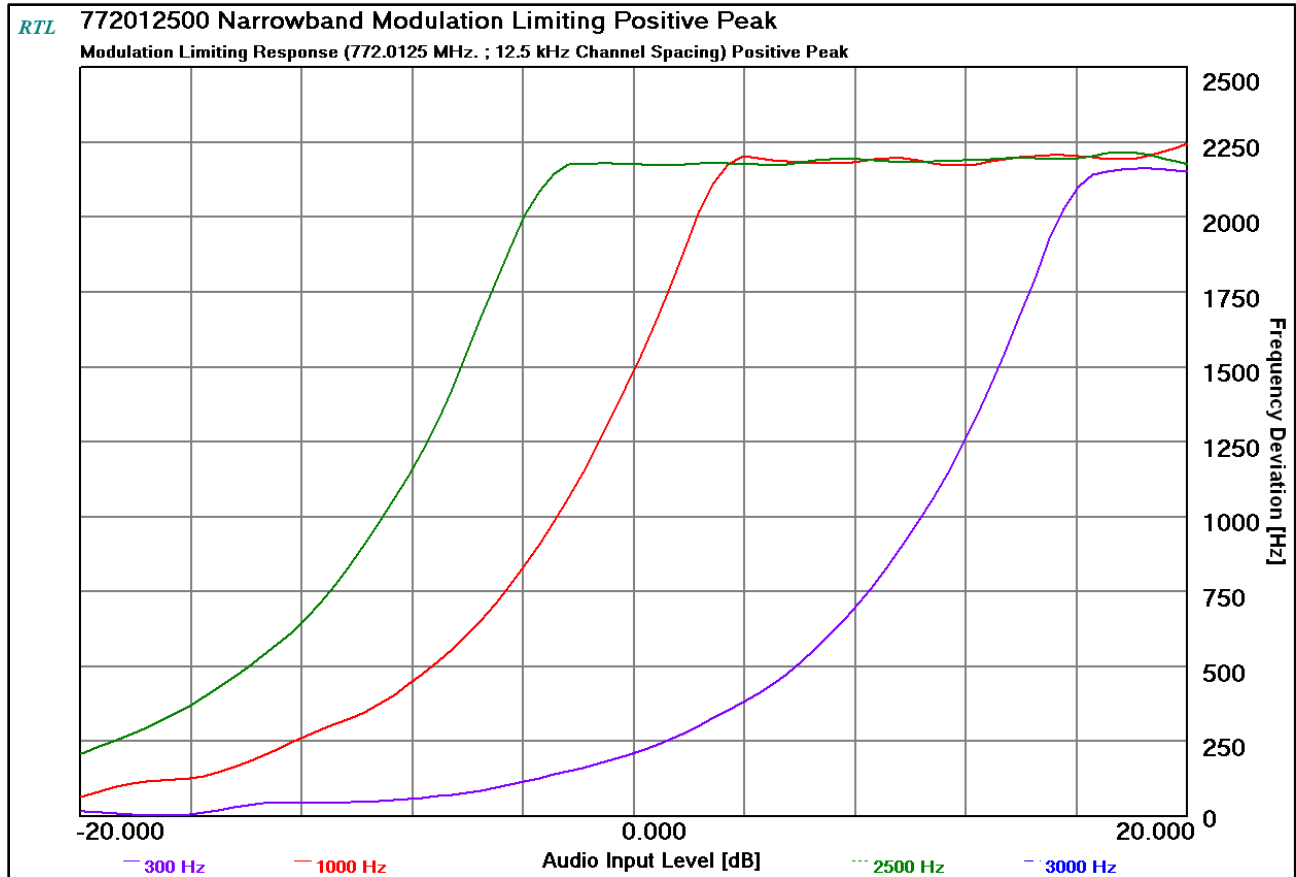


**Plot 10-10: Modulation Characteristics – Modulation Limiting – 772.0125 MHz; (NB); Negative Peak**

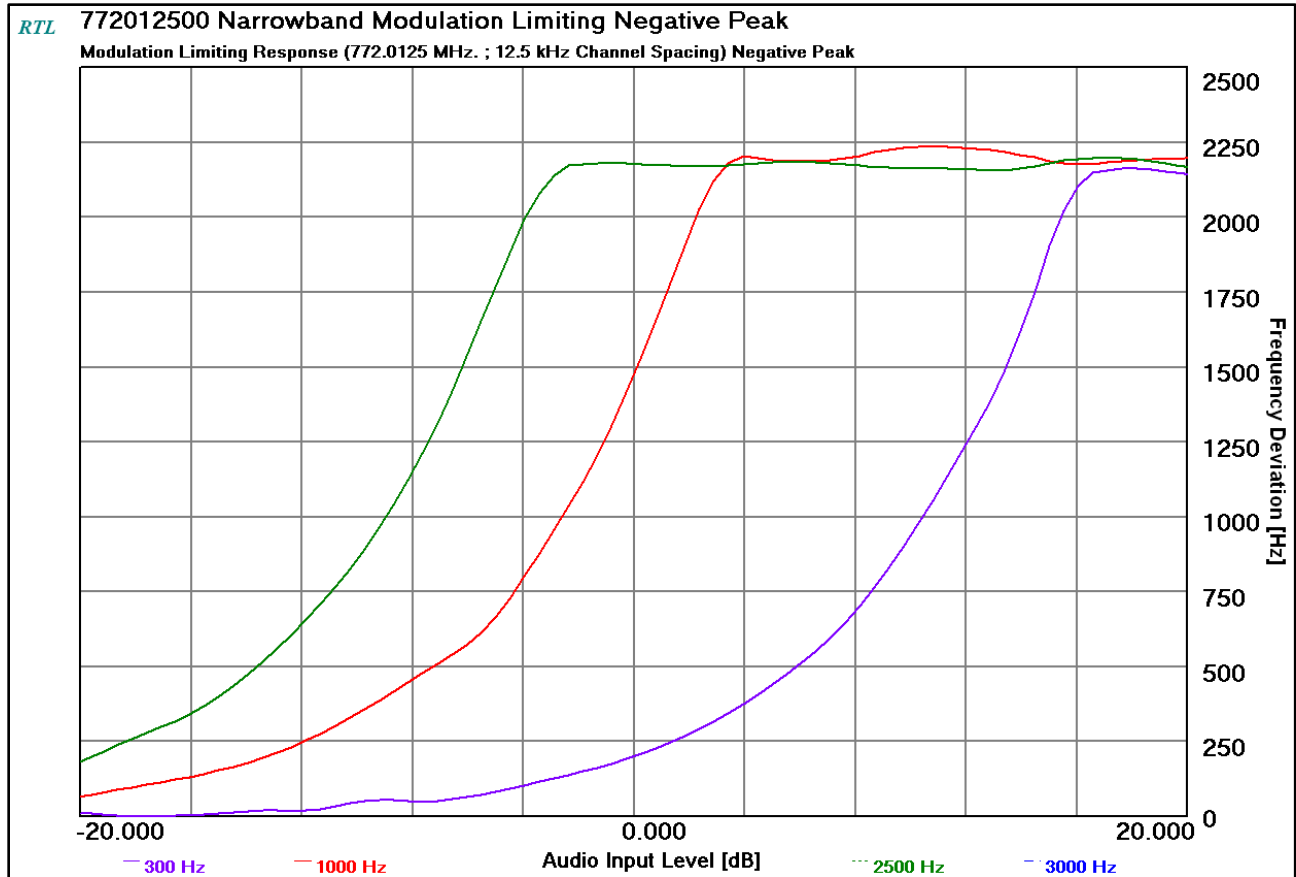

**Plot 10-11: Modulation Characteristics – Modulation Limiting – 860.0000 MHz; (NPSPAC); Positive Peak**

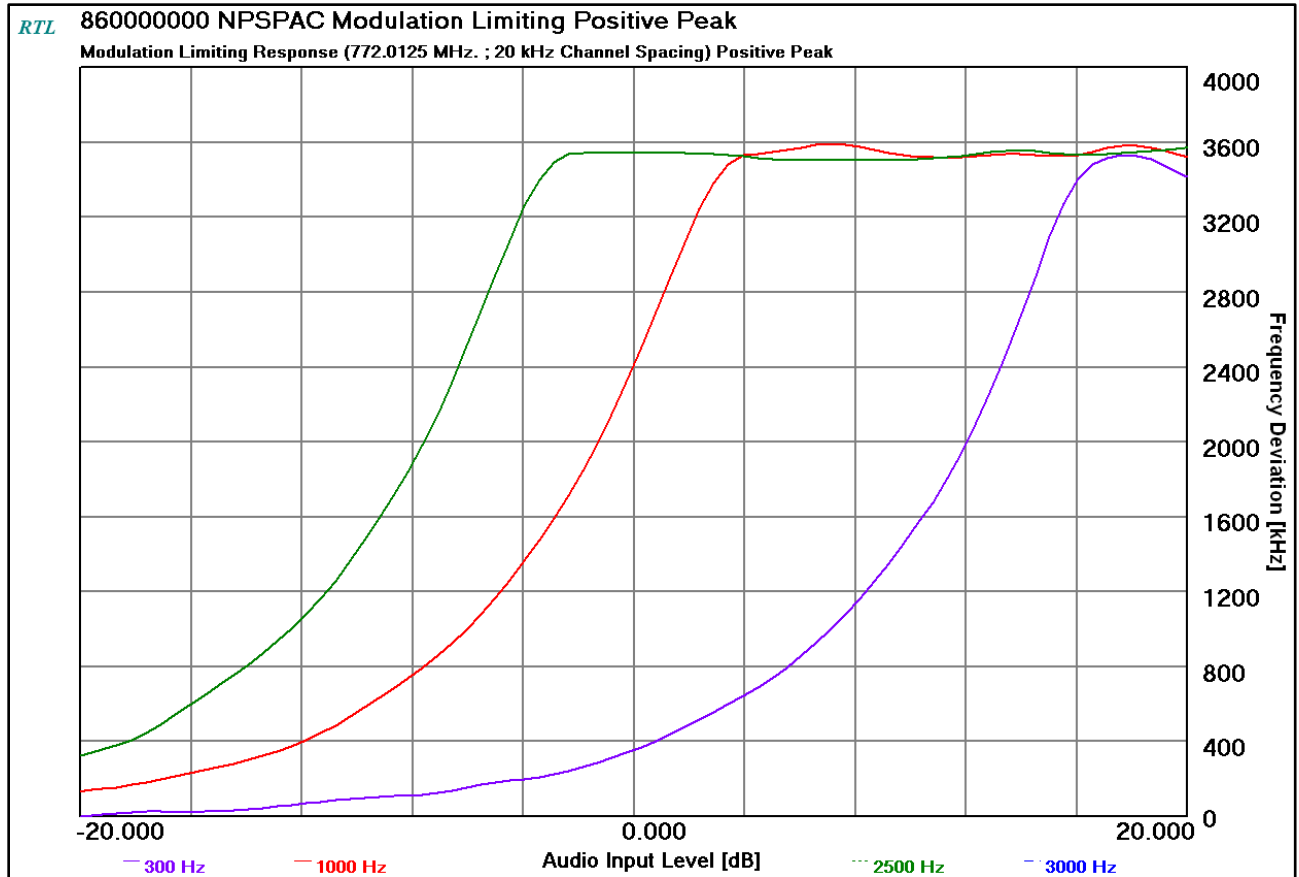

**Plot 10-12: Modulation Characteristics – Modulation Limiting – 860.0000 MHz; (NPSPAC); Negative Peak**

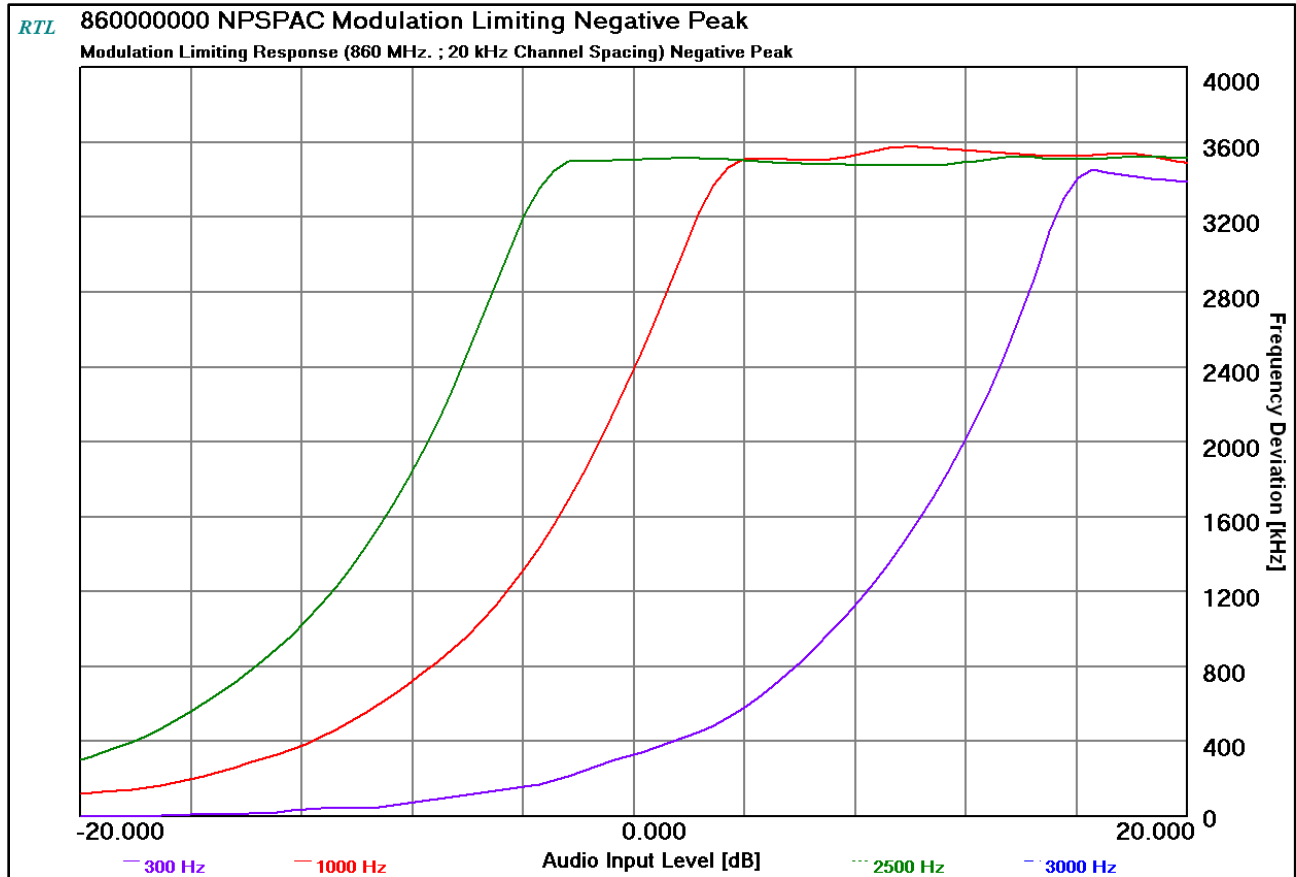

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty: ±0.5 Hz/±0.5 dB

**Results: Pass**

**Table 10-1: Test Equipment Used For Testing Modulation Requirements**

| RTL Asset # | Manufacturer          | Model                 | Part Type                          | Serial Number | Calibration Due Date |
|-------------|-----------------------|-----------------------|------------------------------------|---------------|----------------------|
| 901057      | Hewlett Packard       | 3336B                 | Synthesizer/<br>Level Generator    | 2514A02585    | 2/1/22               |
| 901118      | Hewlett Packard       | 8901A Opt.<br>002-003 | Modulation Analyzer                | 2406A00178    | 2/1/22               |
| 901759      | Hewlett Packard       | HP 3586B              | Selective Level Meter              | 2510A03886    | 7/20/21              |
| 901139      | Weinschel Corporation | 48-20-34              | Attenuator DC-18 GHz<br>20 dB 100W | BK5859        | 5/4/21               |

**Test Personnel:**

Daniel W. Baltzell  
 EMC Test Engineer

Signature

February 11, 2021  
 Date of Test

**11 FCC Rules and Regulations Part 90.214: Transient Frequency Response; Part 74.462(c): Authorized Bandwidth and Emissions; RSS-119 5.9: Transient Frequency Behavior**

**11.1 Test Procedure**

TIA-EIA-603-C 2004, section 2.2.3. Transmitter plots were taken with the radio set at high power.

**§90.214 Transient Frequency Behavior**

Transmitters designed to operate in the 150–174 MHz and 421–512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time intervals <sup>1,2</sup>   | Maximum frequency difference <sup>3</sup> | All equipment  |                |
|---|---|----------------|----------------|
|   |   | 150 to 174 MHz | 421 to 512 MHz |
| Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels   |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ±12.5 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ±25.0 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ±6.25 kHz                                 | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ±12.5 kHz                                 | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ±3.125 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ±6.25 kHz                                 | 5.0 ms         | 10.0 ms        |

<sup>1</sup> t<sub>on</sub> is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub> is the time period immediately following t<sub>on</sub>.

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.

t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

t<sub>off</sub> is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in §90.213.


<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.


UHF band data is for engineering use only, and not applicable to the current equipment authorization application.

### 11.2 Test Data

Plot 11-1: Transient Frequency Behavior – 150.0125 MHz; Wide Band; Carrier ON Time

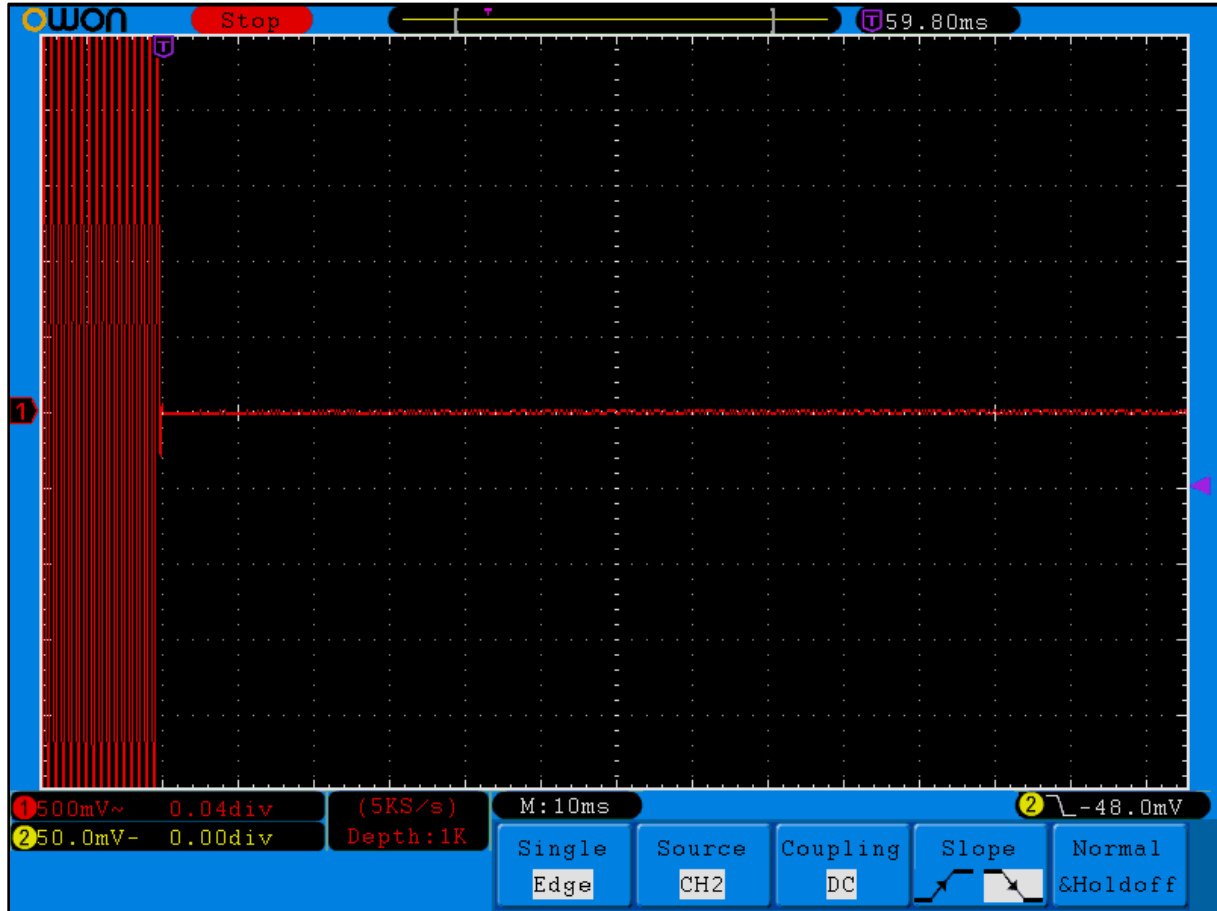


**Plot 11-2: Transient Frequency Behavior – 150.0125 MHz; Wide Band; Carrier OFF Time**

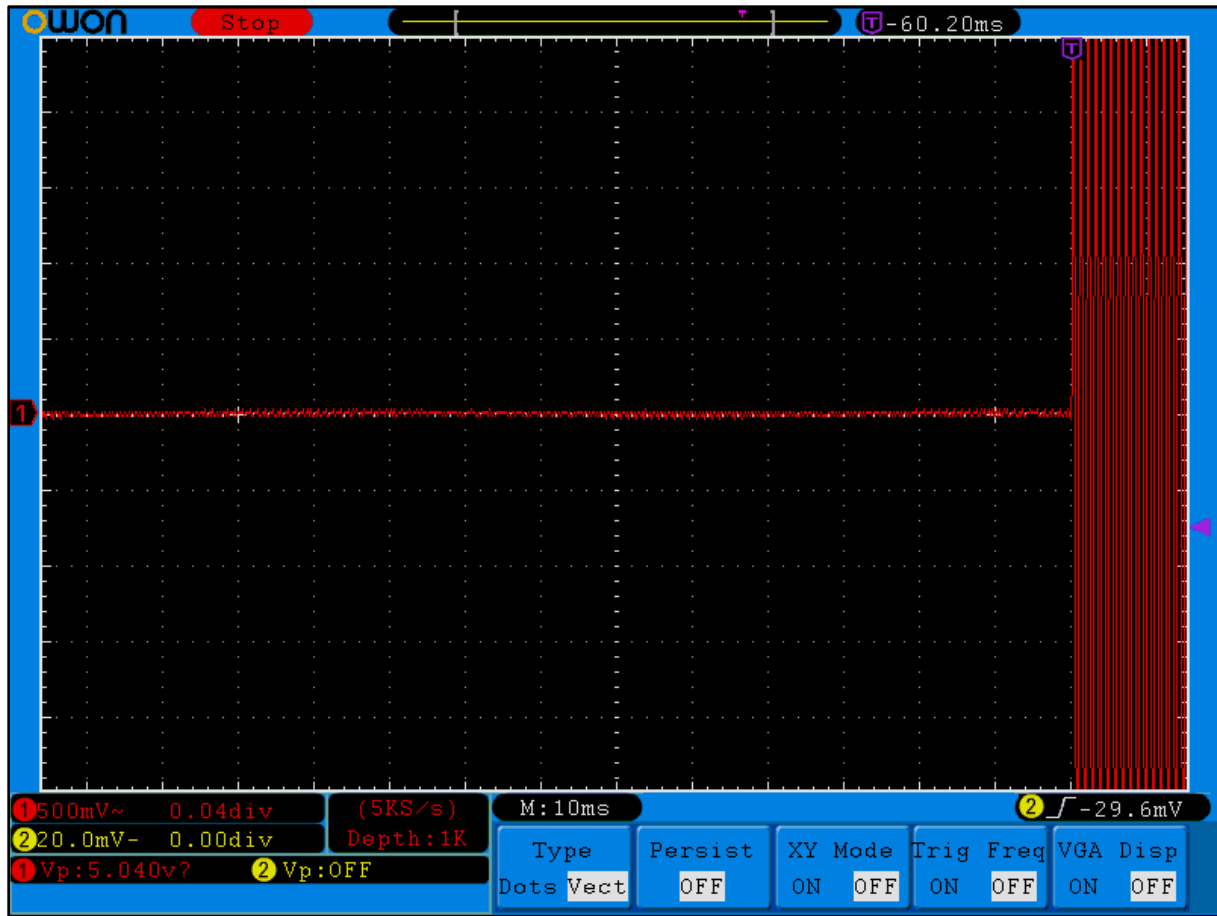





**Plot 11-3: Transient Frequency Behavior – 150.0125 MHz; Narrow Band; Carrier ON Time**

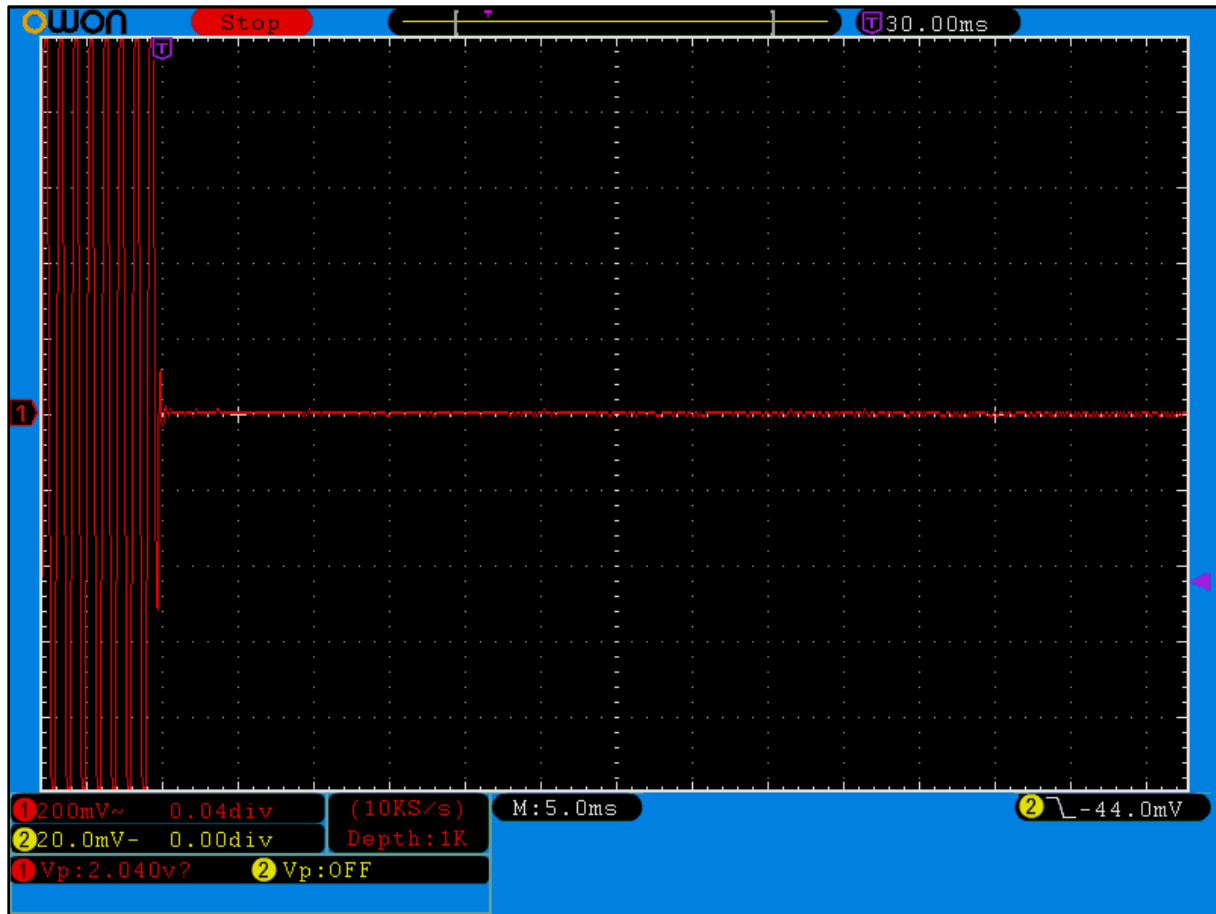


**Plot 11-4: Transient Frequency Behavior – 150.0125 MHz; Narrow Band; Carrier OFF Time**

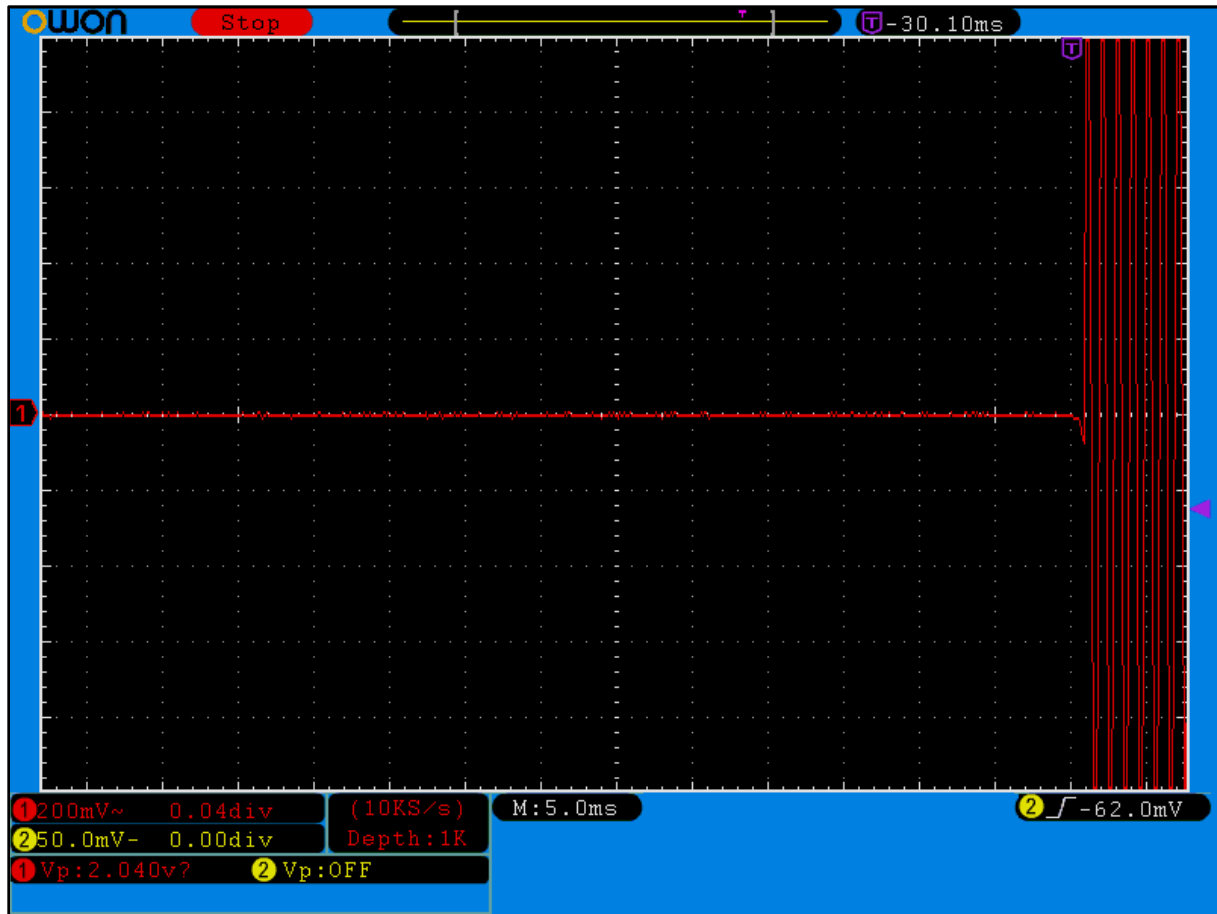


**Plot 11-5: Transient Frequency Behavior – 162.0125 MHz; Wide Band; Carrier ON Time**

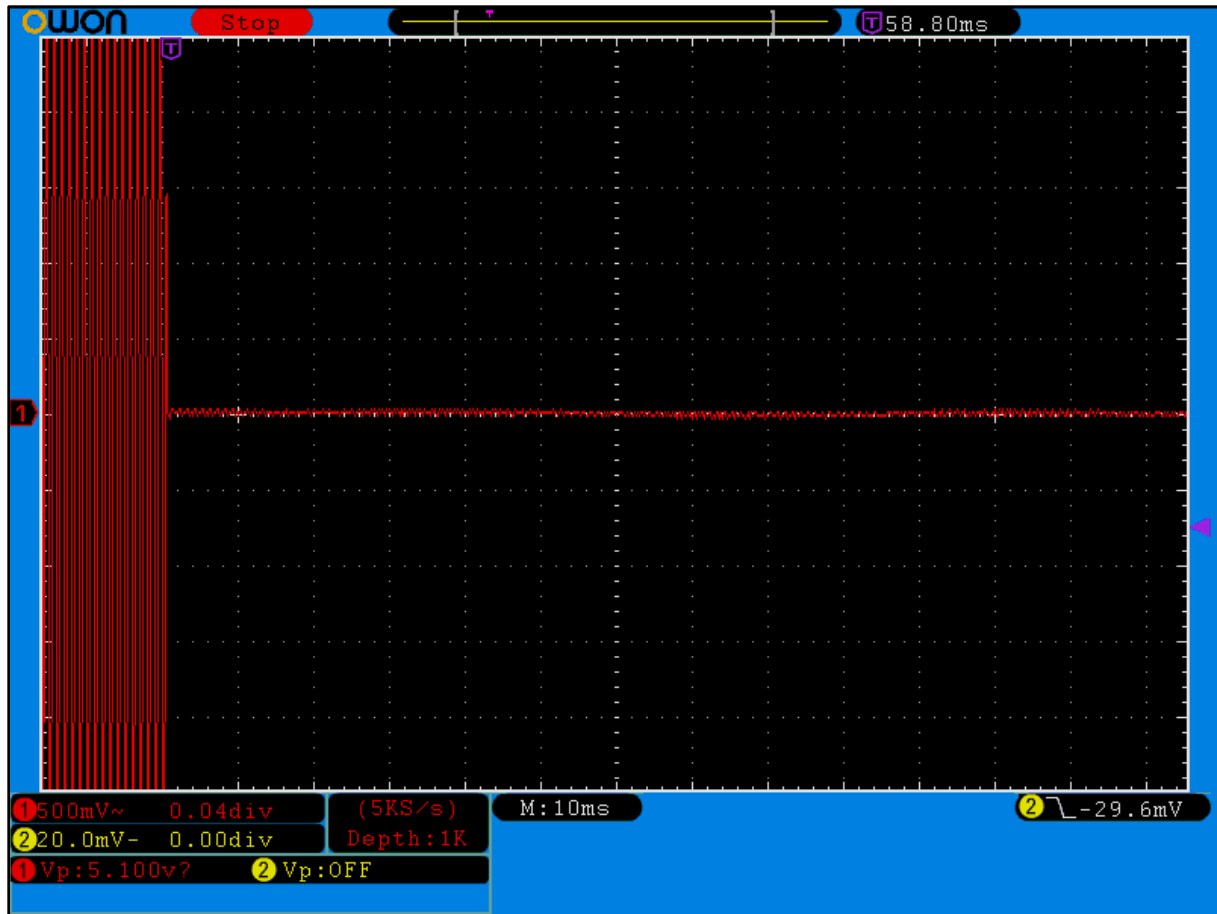


**Plot 11-6: Transient Frequency Behavior – 162.0000 MHz; Wide Band; Carrier OFF Time**

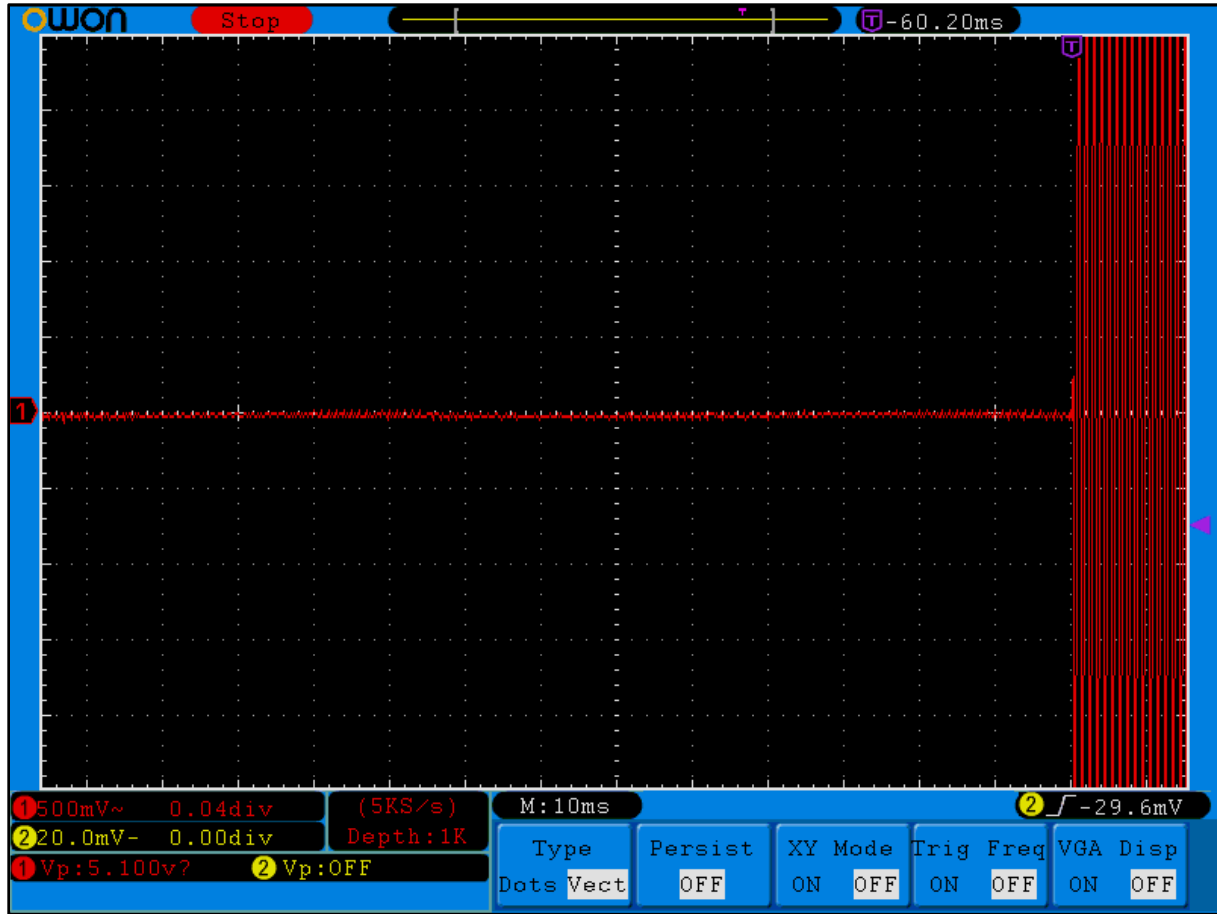


**Plot 11-7: Transient Frequency Behavior – 162.0125 MHz; Narrow Band; Carrier ON Time**

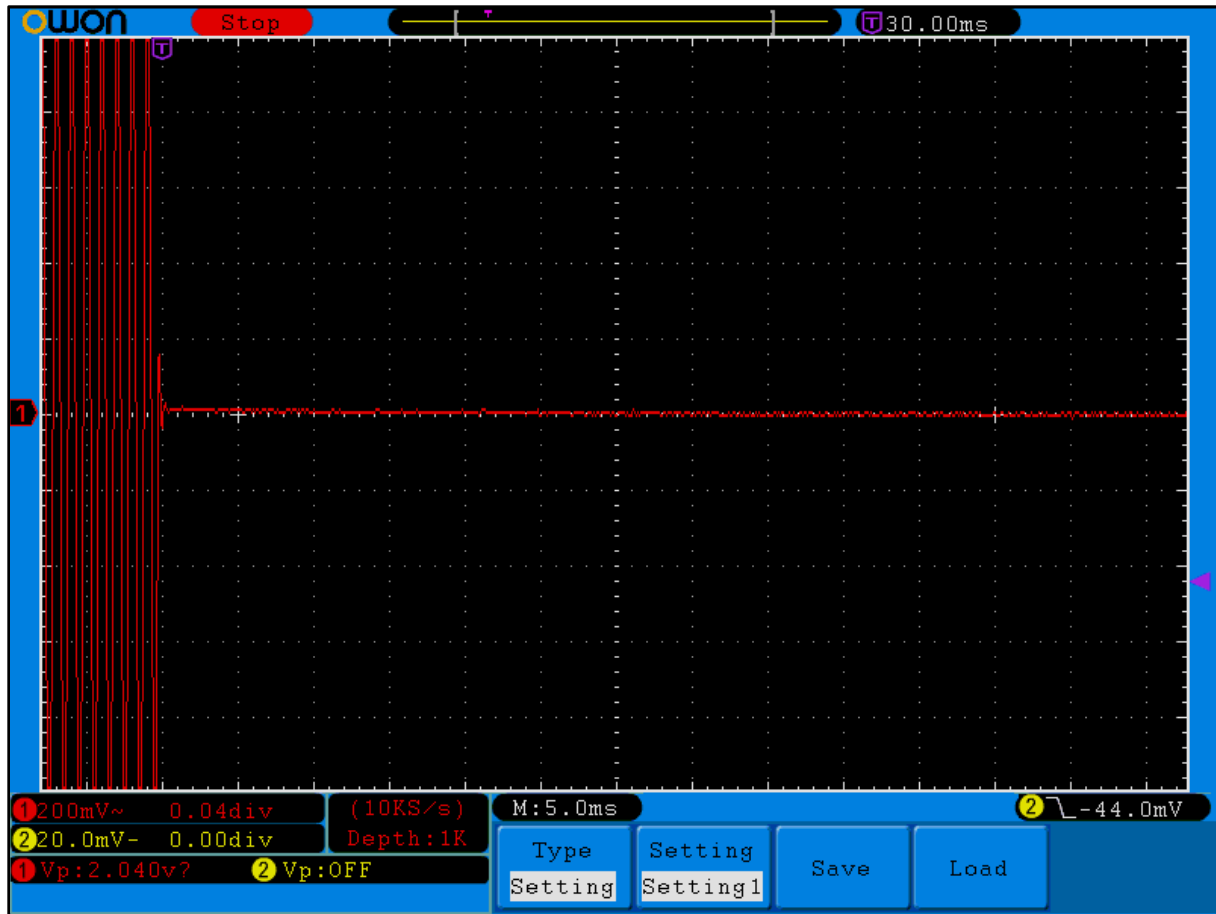


**Plot 11-8: Transient Frequency Behavior – 162.0125 MHz; Narrow Band; Carrier OFF Time**

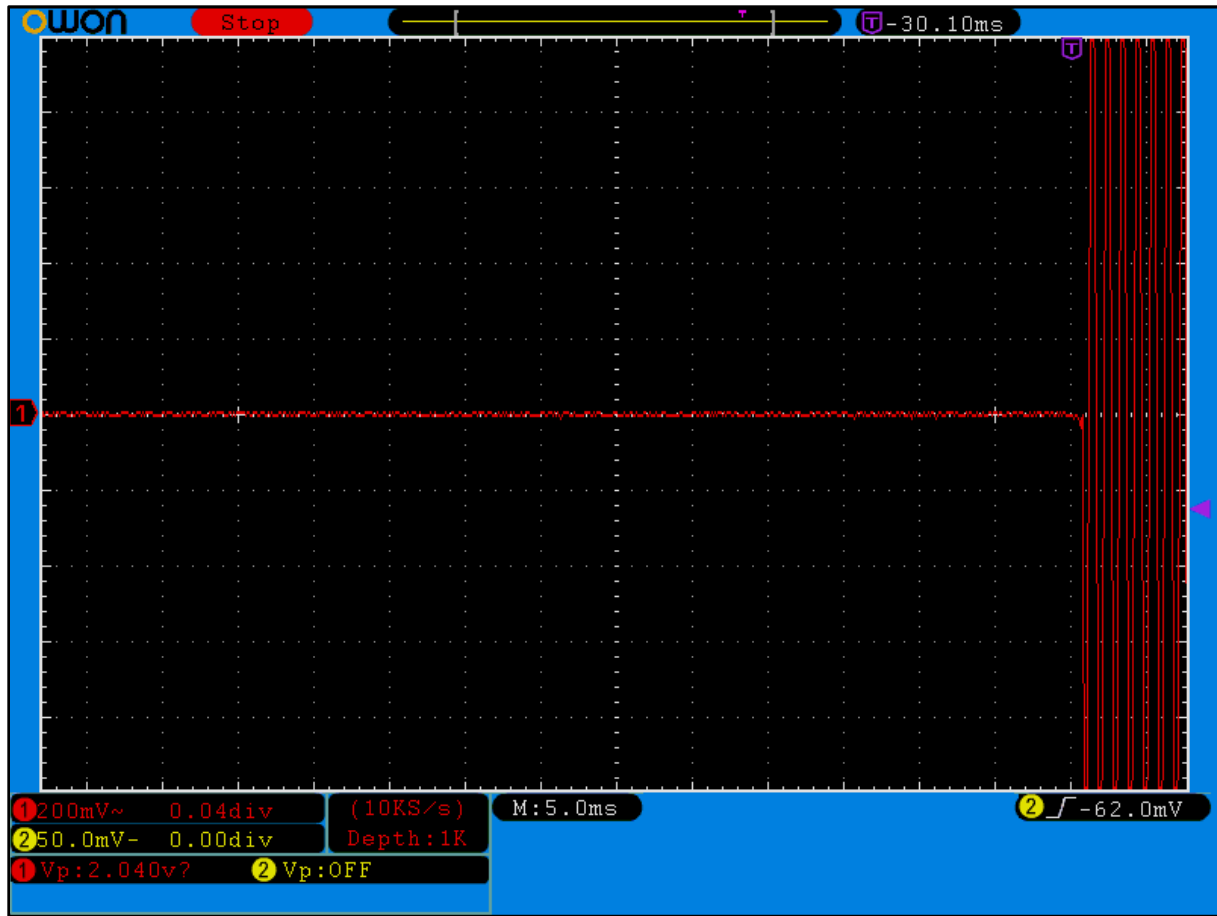

**Plot 11-9: Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier ON Time**

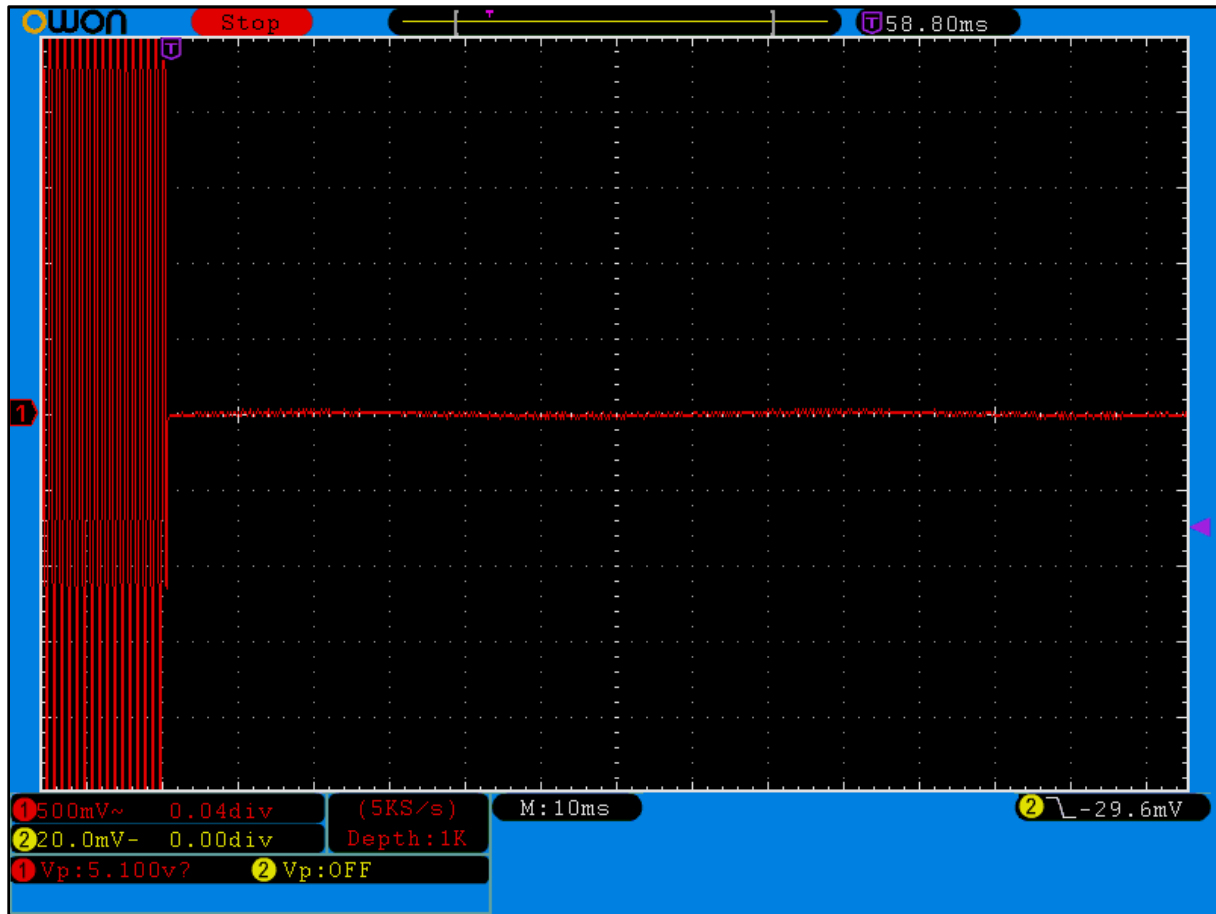


**Plot 11-10: Transient Frequency Behavior – 173.9875 MHz; Wide Band; Carrier OFF Time**

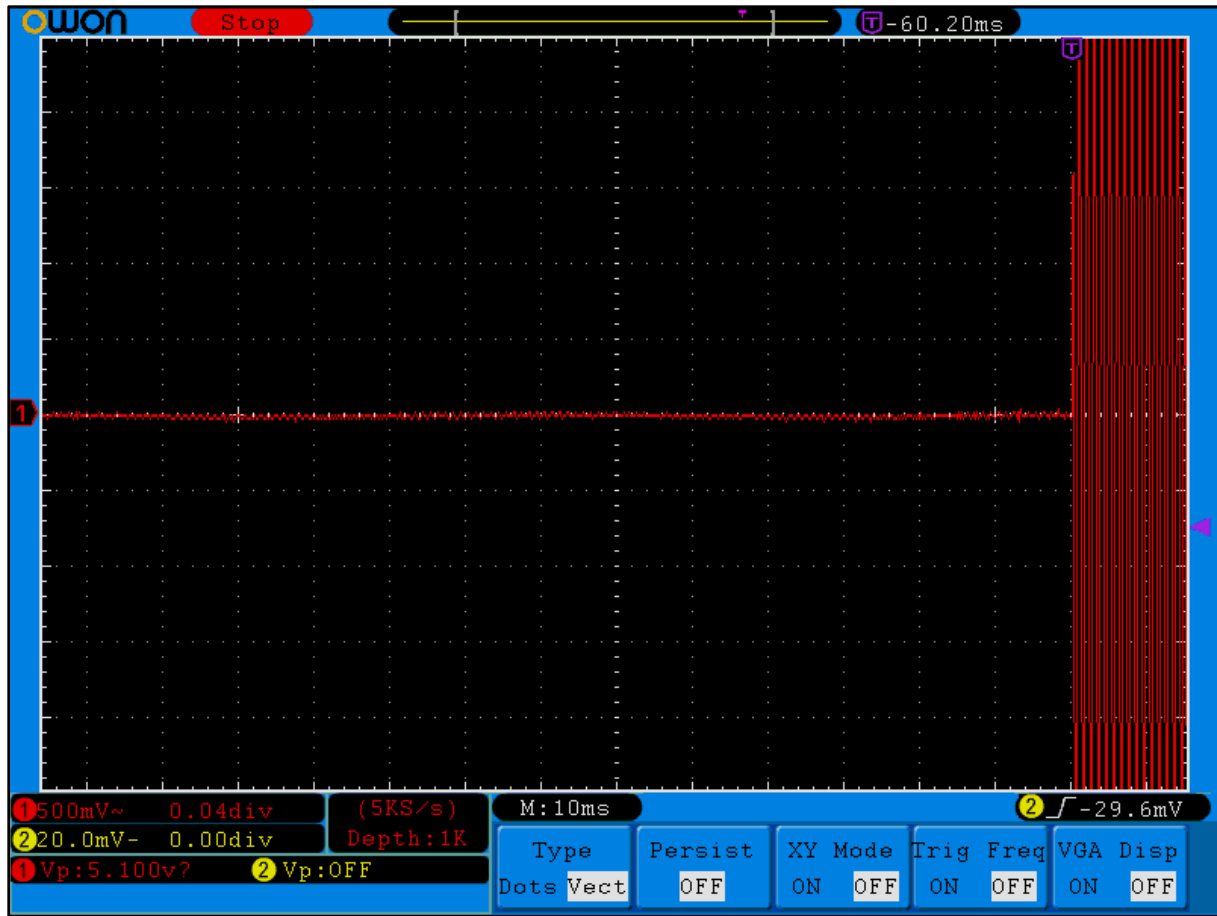





**Plot 11-11: Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier ON Time**

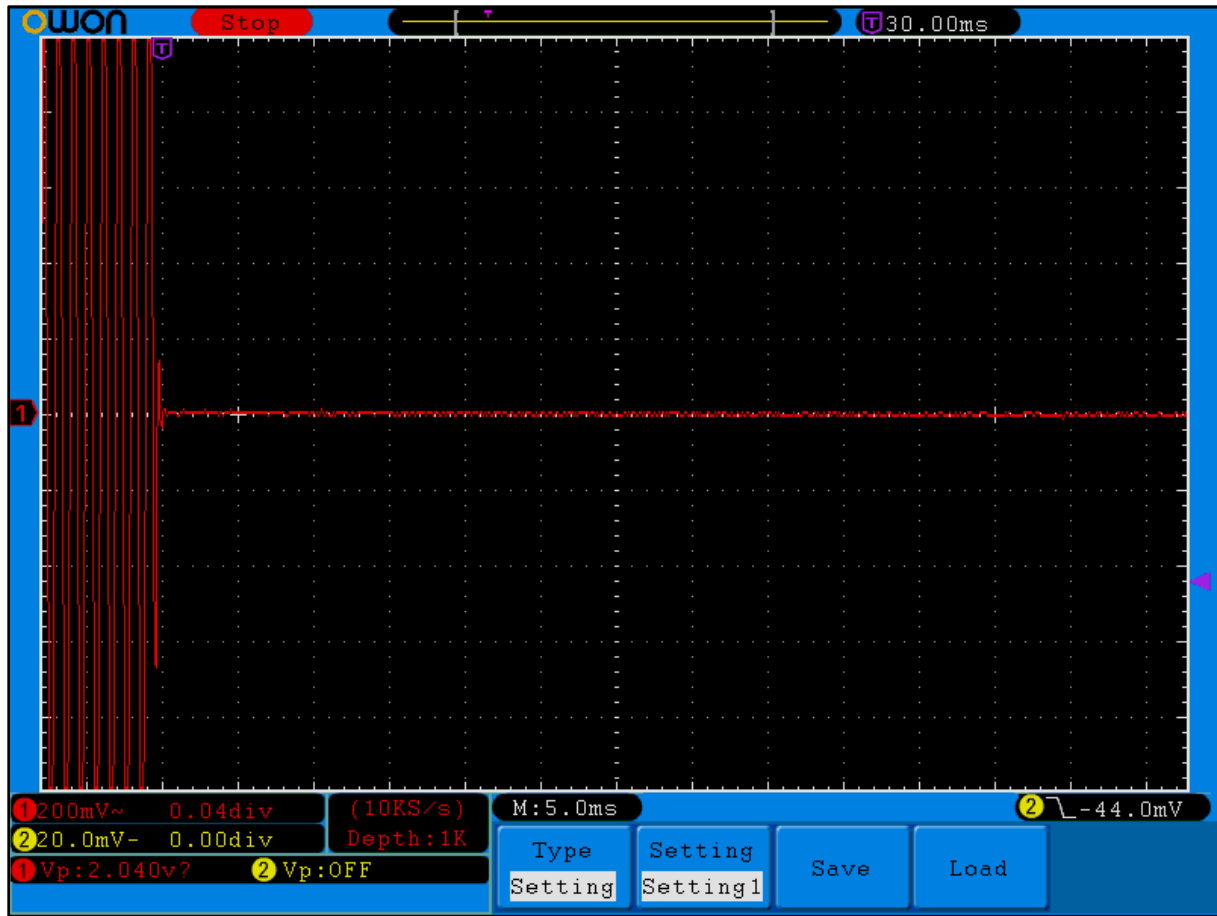


**Plot 11-12: Transient Frequency Behavior – 173.9875 MHz; Narrow Band; Carrier OFF Time**

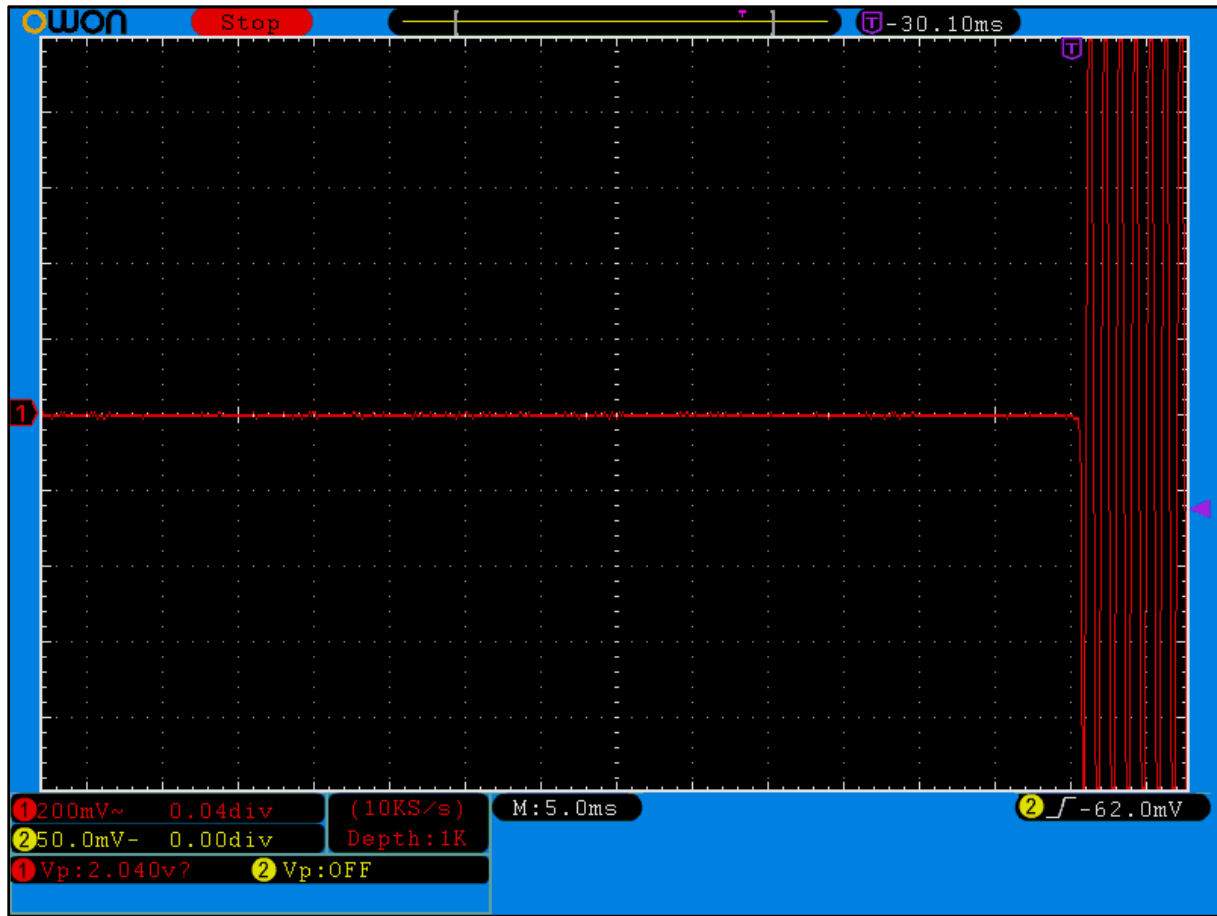


**Plot 11-13: Transient Frequency Behavior – 429.9875 MHz; Wide Band; Carrier ON Time**

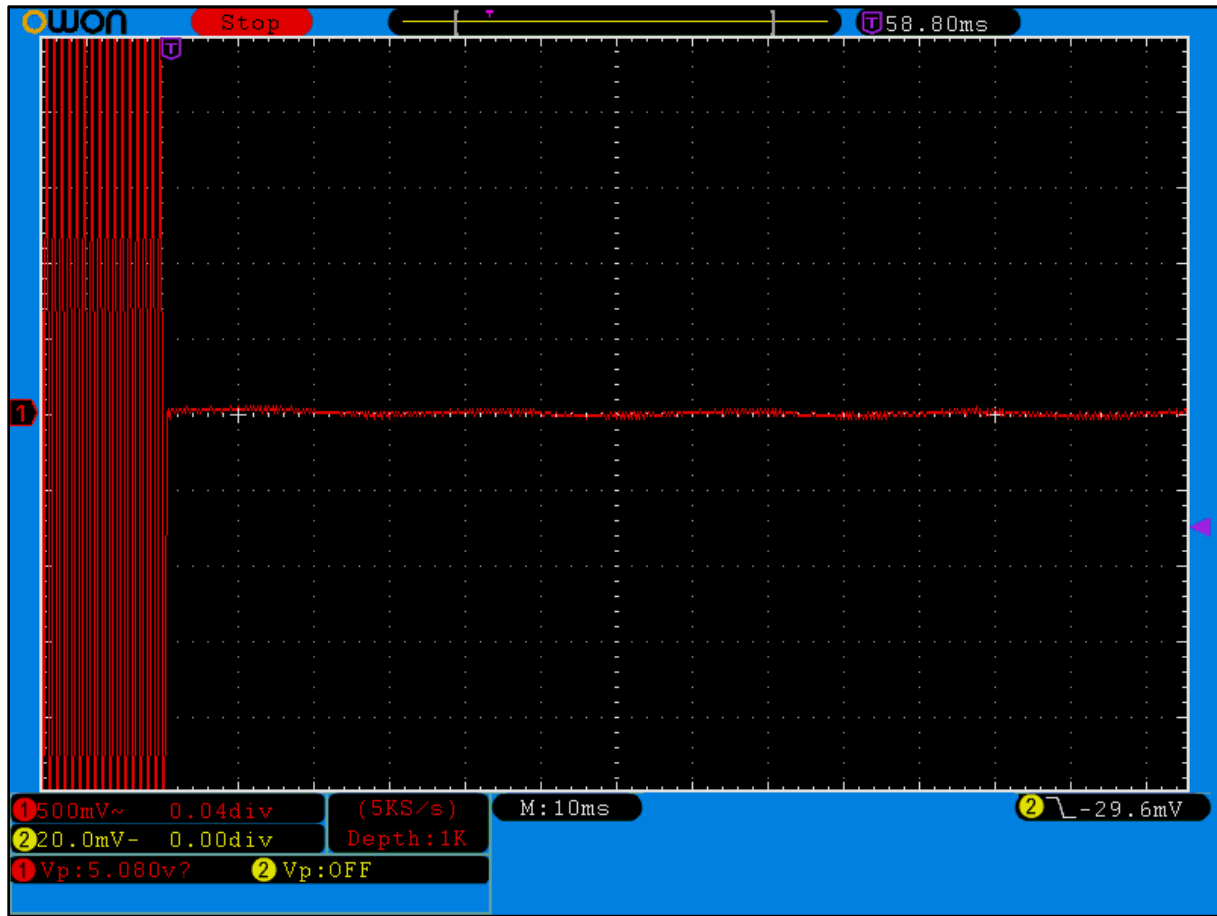


**Plot 11-14: Transient Frequency Behavior – 429.9875 MHz; Wide Band; Carrier OFF Time**

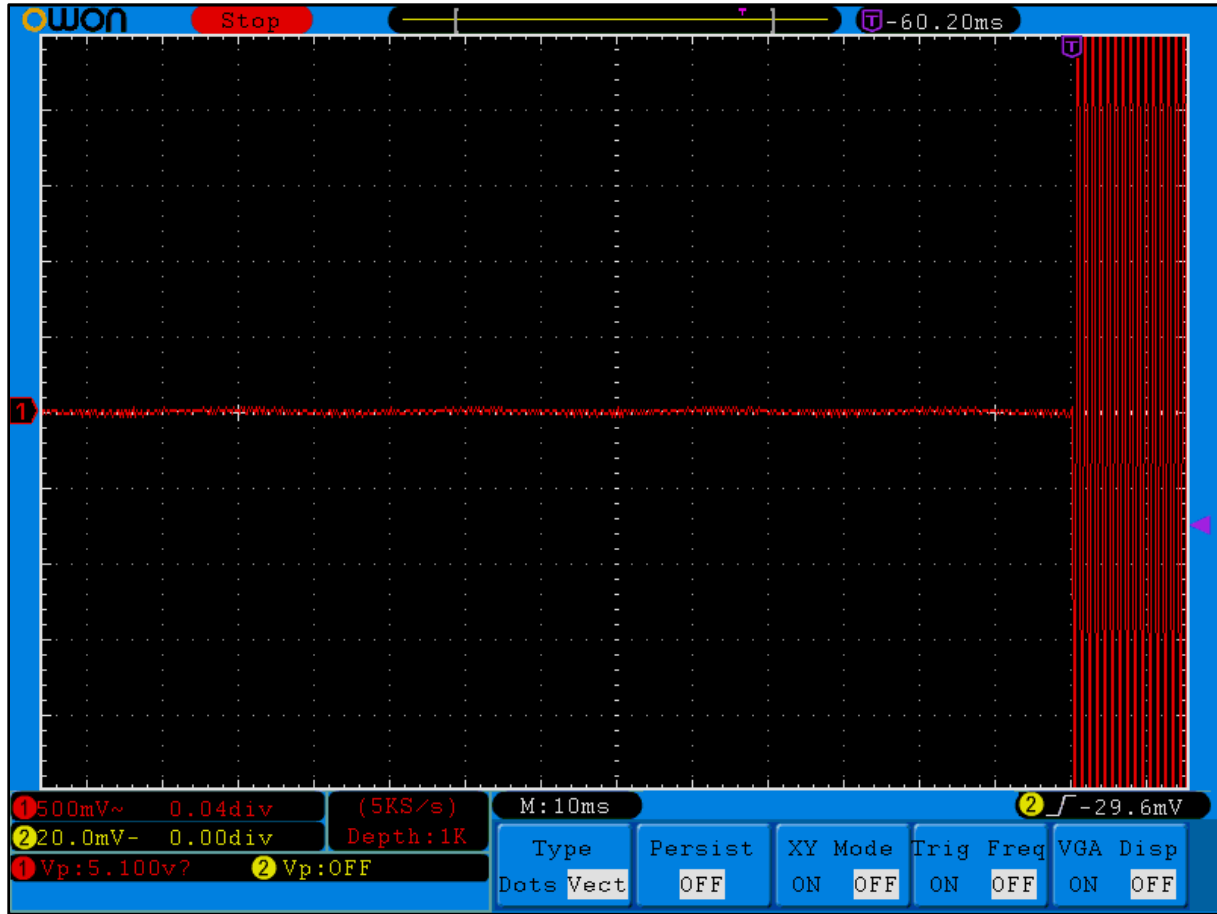


**Plot 11-15: Transient Frequency Behavior – 469.9875 MHz; Wide Band; Carrier ON Time**

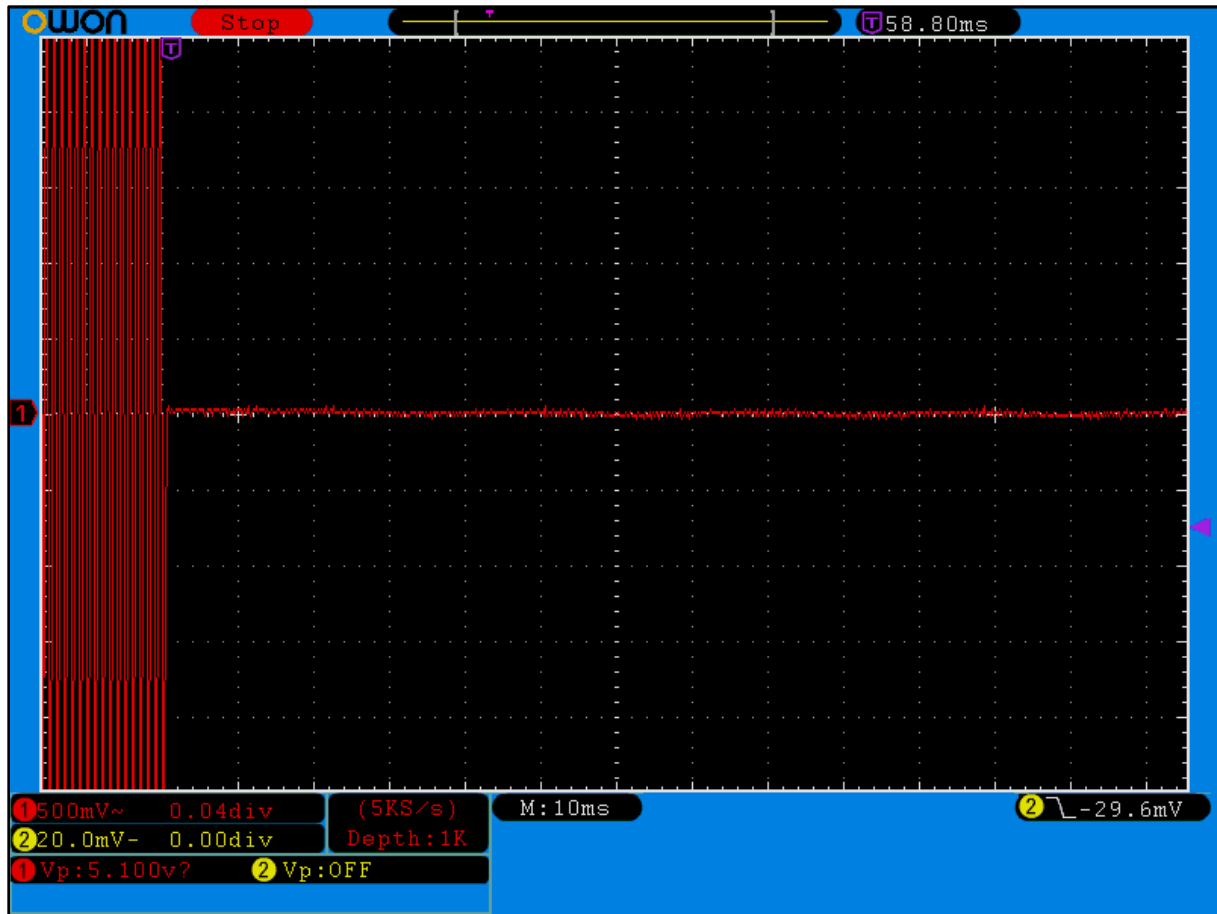


**Plot 11-16: Transient Frequency Behavior – 469.9875 MHz; Wide Band; Carrier OFF Time**

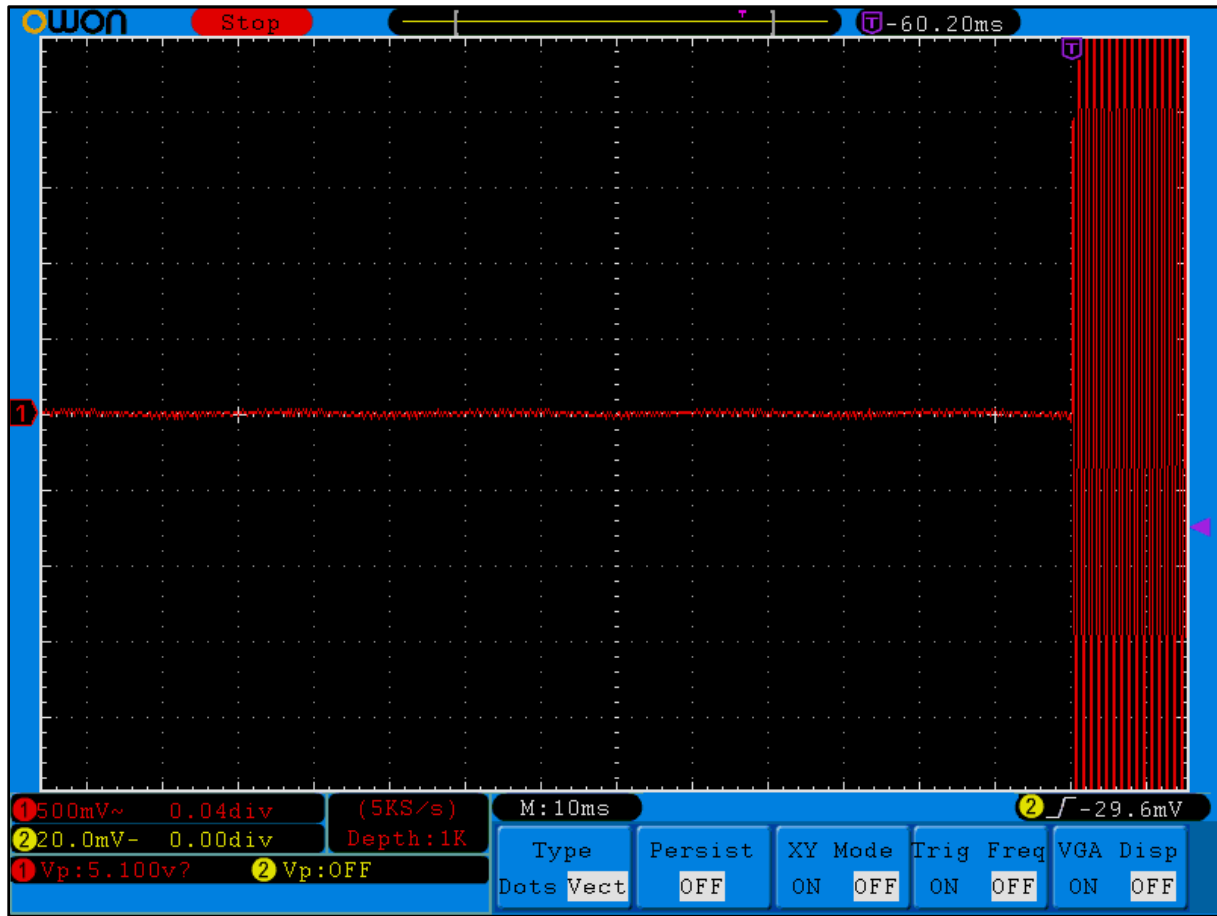

**Plot 11-17: Transient Frequency Behavior – 469.9875 MHz; Narrow Band; Carrier ON Time**

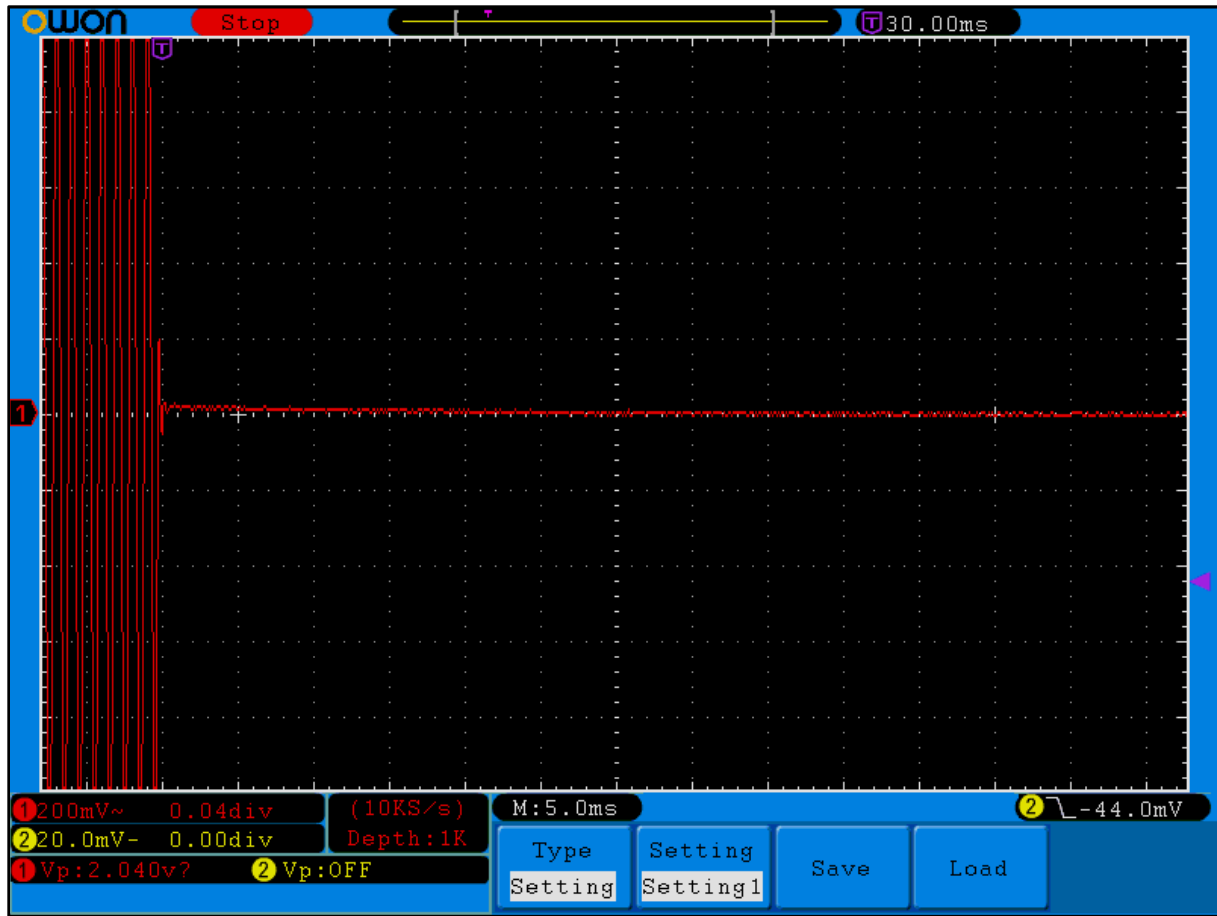


**Plot 11-18: Transient Frequency Behavior – 469.9875 MHz; Narrow Band; Carrier OFF Time**

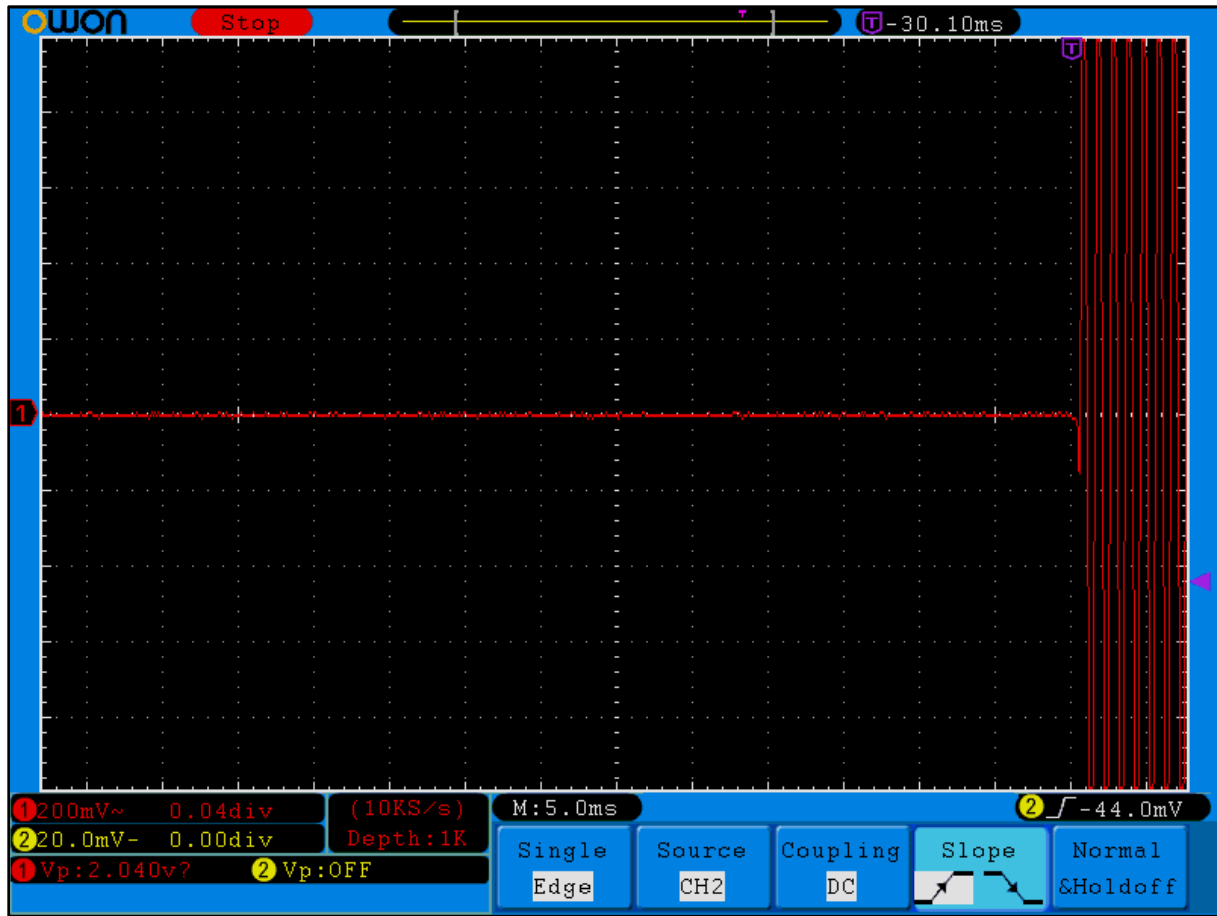





**Plot 11-19: Transient Frequency Behavior – 511.9875 MHz; Wide Band; Carrier ON Time**

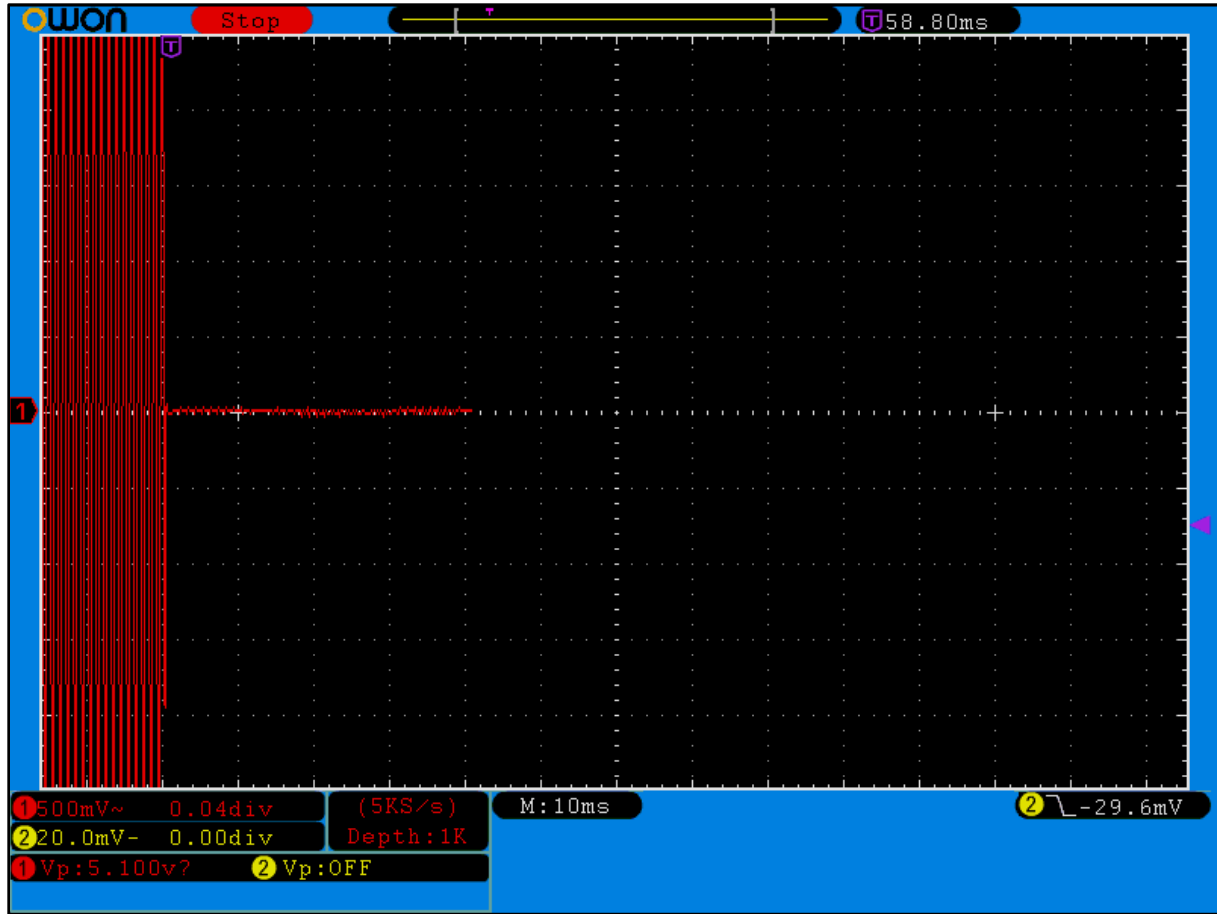


**Plot 11-20: Transient Frequency Behavior – 511.9875 MHz; Wide Band; Carrier OFF Time**

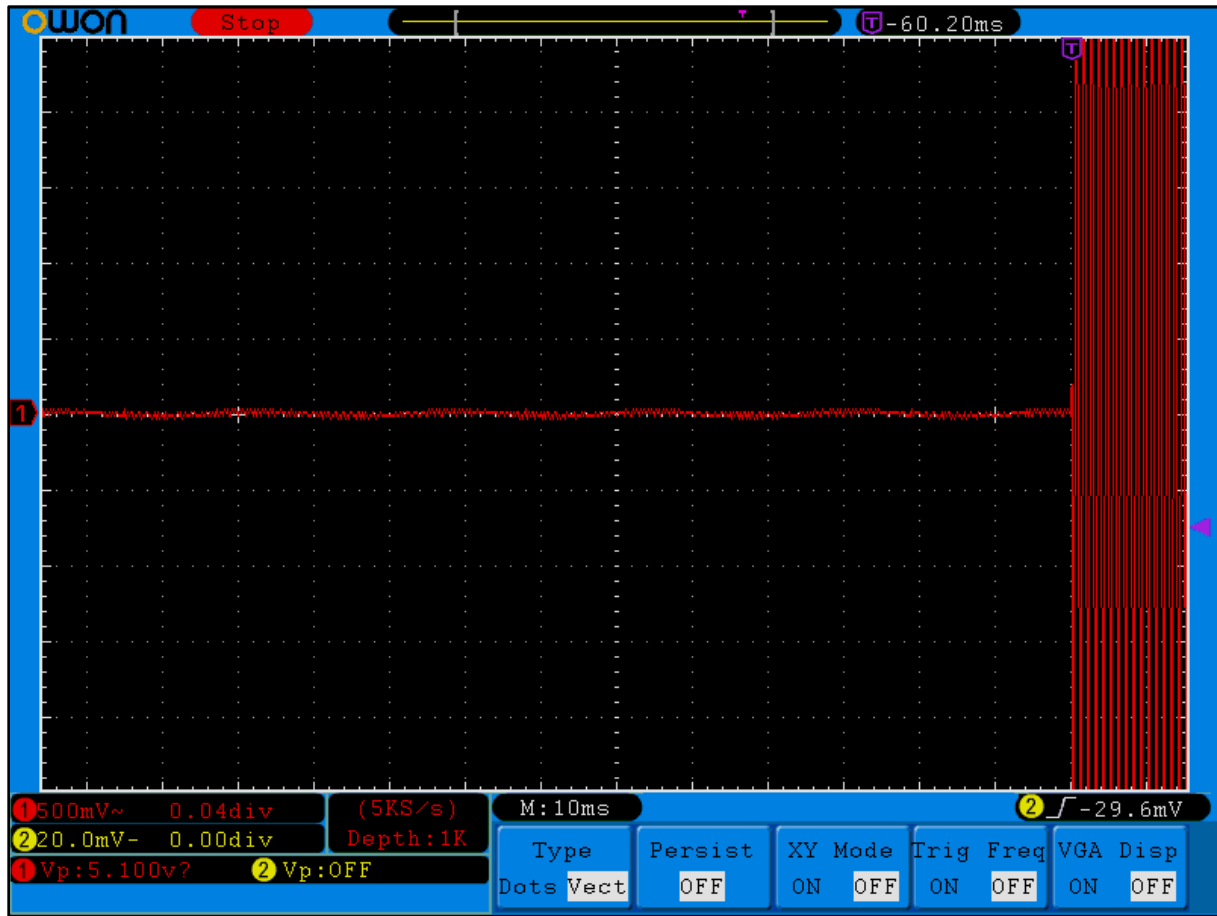

**Plot 11-21: Transient Frequency Behavior – 511.9875 MHz; Narrow Band; Carrier ON Time**

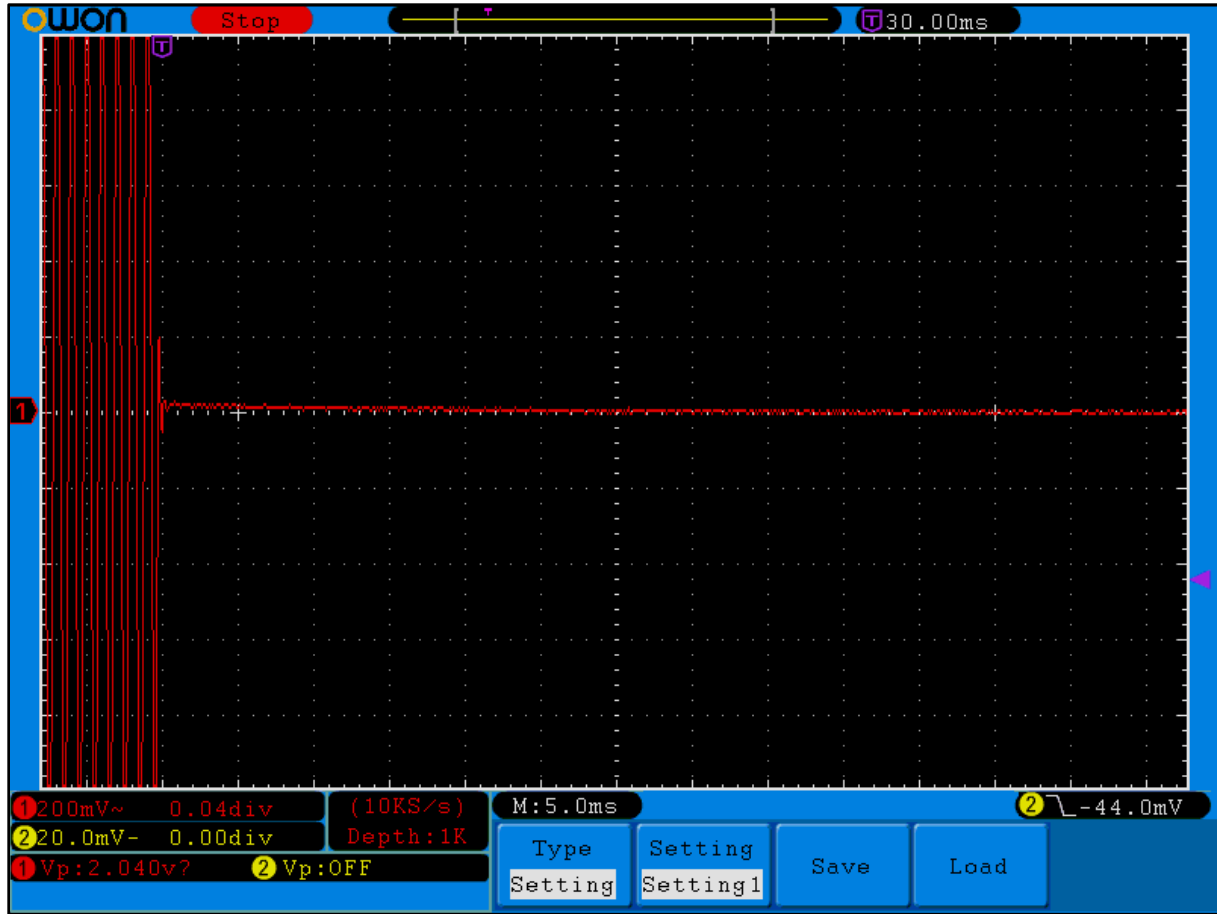

**Plot 11-22: Transient Frequency Behavior – 511.9875 MHz; Narrow Band; Carrier OFF Time**

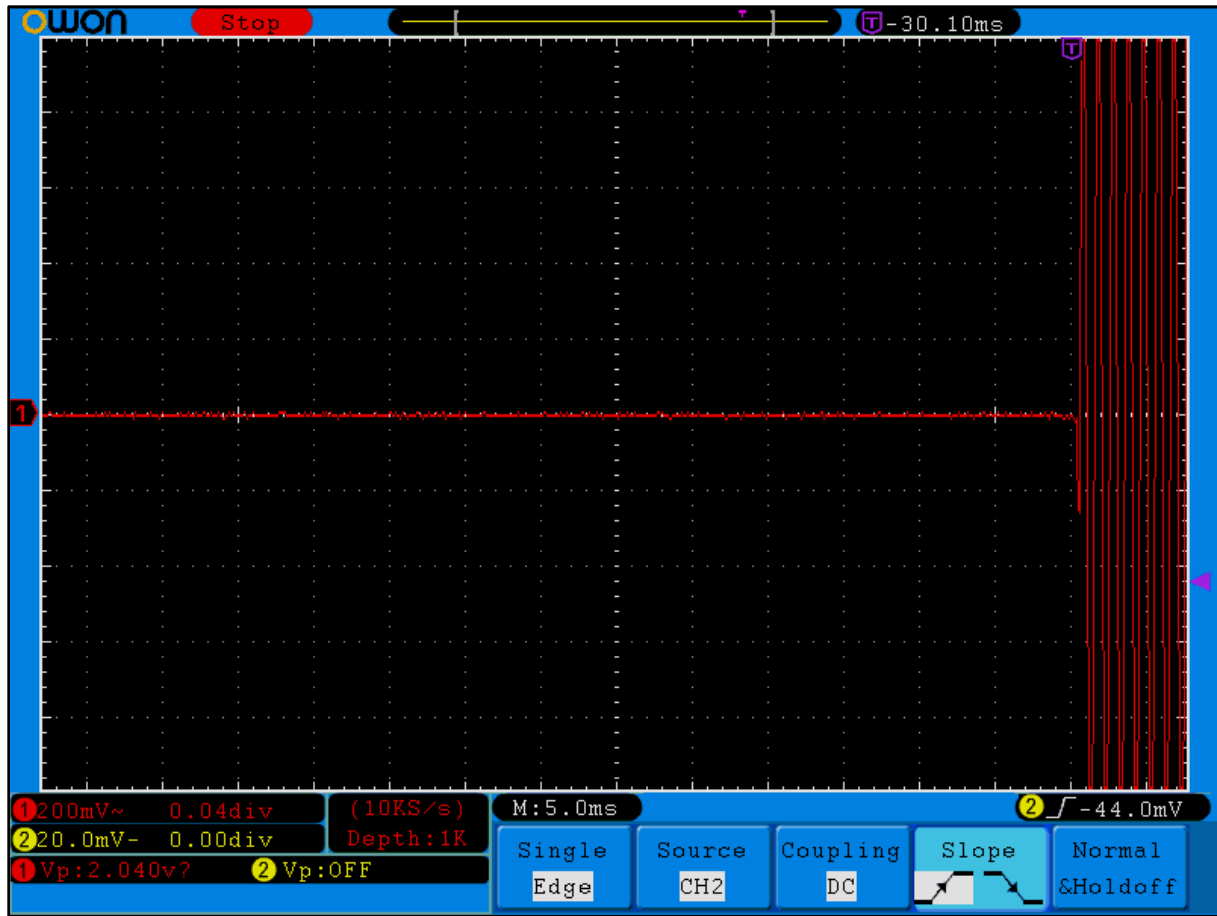

Measurement uncertainties shown for these tests are expanded uncertainties expressed at the 95% confidence level using a coverage factor K=2. Measurement uncertainty:  $\pm 0.5 \text{ Hz} / \pm 0.5 \text{ dB}$

**Results: Pass**

**Table 11-1: Test Equipment Used For Testing Transient Frequency Behavior**

| RTL Asset # | Manufacturer    | Model    | Part Type                              | Serial Number | Calibration Due Date |
|-------------|-----------------|----------|--|---------------|----------------------|
| 900917      | Rhode & Schwarz | SMF 100A | Signal Generator                       | 1167.0000.02  | 04/24/21             |
| 901118      | Hewlett Packard | HP8901B  | Modulation Analyzer (150 kHz–1300 MHz) | 2406A00178    | 02/01/22             |
| 901651      | OWON            | SDS7102V | Oscilloscope                           | B020129       | 04/02/21             |

**Test Personnel:**

Daniel Baltzell  
 Test Engineer

*Daniel W. Baltzell*  
 Signature

February 5, 2021  
 Date of Tests

## 12 FCC 2.202: Necessary Bandwidth and Emission Bandwidth

### Analog FM (Wideband)

#### Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2M + 2DK = 16.0$  kHz

Emission designator: 16K0F3E

### 2-level FSK 9600 Data/Digital Voice (Wideband)

#### Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 5600

$B_n = [9600/\log_2(4) + 2(5600)(1) = 16.000$  kHz

Emission designator: 16K0F1D, 16K0F1E

### Analog FM (NPSPAC)

#### Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 4

Constant factor (K): 1 (assumed)

$B_n = 2xM + 2xDK = 14.0$  kHz

Emission designator: 14K0F3E

### 2-level FSK 9600 Data/Digital Voice (NPSPAC)

#### Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 4600

$B_n = [9600/\log_2(4) + 2(4600)(1) = 14.000$  kHz

Emission designator: 14K0F1D, 14K0F1E

### Analog FM (Narrowband)

#### Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2xM + 2xDK = 11.0$  kHz

Emission designator: 11K0F3E

### 2-level FSK 9600 Data/Digital Voice (Narrowband)

#### Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 3450

$B_n = [9600/\log_2(4) + 2(3450)(1) = 11.700$  kHz

Emission designator: 11K7F1D, 11K7F1E

### **2-level FSK 4800 Data/Digital Voice (XNarrowband)**

Calculation:

Data rate in bps (R) = 4800

Peak deviation of carrier (D) = 1800

$B_n = [4800/\log_2(4) + 2 (2350) (1)] = 7.100 \text{ kHz}$

Emission designator: 7K10F1D, 7K10F1E

### **C4FM Data/Voice**

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = [9600/\log_2(4) + 2 (1800) (1)] = 8.400 \text{ kHz}$

Emission designator: 8K40F1D, 8K40F1E

### **H-CPM (TDMA) Data/Voice**

Calculation:

Data rate in bps (R) = 12000

Peak deviation of carrier (D) = 1050

$B_n = [12000/\log_2(4) + 2 (1050) (1)] = 8.1 \text{ kHz}$

Emission designator: 8K10DXW

### **HVD-SMR**

Calculation:

Data rate in bps (R) = 19200

Signaling states (S) = 4

$B_n = 2(19200)(.96)/\log_2(4) = 18.5 \text{ kHz}$

Emission designator: 18K5F1W

### **HVD-NPSPAC**

Calculation:

Data rate in bps (R) = 19200

Signaling states (S) = 4

$B_n = 2(19200)(.67)/\log_2(4) = 12.9 \text{ kHz}$

Emission designator: 12K9F1W

## **13 Conclusion**

The data in this measurement report shows that the Harris Corporation, Model XL-400P; FCC ID: OWDTR-0165-E, IC: 3636B-0165, complies with the applicable requirements of Parts 2, 22, 74, 80 and 90 of the FCC Rules and ISED RSS-119.