

SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 1 of 32

TEST REPORT

Application No.: FYCR2211000476AT

Applicant: Vanstone Electronic (Beijing) Co., Ltd.

3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian District, Beijing, China 100195 **Address of Applicant:**

Manufacturer: Vanstone Electronic (Beijing) Co., Ltd.

3F No.2 Building, Aisino Corporation Park 18A, Xingshikou Road, Haidian Address of Manufacturer:

District, Beijing, China 100195

Equipment Under Test (EUT):

EUT Name: Android POS Terminal

Model No.: A75 Pro

OWLA75-PRO-A FCC ID: 47 CFR Part 2

Standard(s): 47 CFR Part 22 subpart H

47 CFR Part 24 subpart E 47 CFR Part 27 subpart C

Date of Receipt: 2022-11-21

2022-12-05 to 2023-05-14 Date of Test:

2023-05-25 Date of Issue:

Pass Test Result:

Winkey Wang **EMC Technical Manager**

WinkeyWang



^{*} In the configuration tested, the EUT complied with the standards specified above.



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 2 of 32

	Revision Record					
Version	Version Chapter Date Modifier					
01		2023-05-25		Original		

Authorized for issue by:		
	Tree Zhan	
	Tree Zhan/Project Engineer	
	Winkeywarg	
	Winkey Wang/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 3 of 32

2 Test Summary

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Output Power Data	\$2.1046 \$22.913 \$24.232 \$27.50(a) \$27.50(d) \$27.50(h)	ERP≤ 7W(LTE Band 5) EIRP≤ 2W(LTE Band 2) EIRP≤ 250mW/5MHz(LTE Band 40) EIRP≤ 1W(LTE Band 4) EIRP≤ 2W(LTE Band 7,38,41)	PASS
Peak-Average Ratio	§22.913 §24.232 §27.50(a) §27.50(d)	≤13dB	PASS
Modulation Characteristics	§2.1047	Digital modulation	PASS
Bandwidth	§2.1049(h)	OBW: No limit EBW: No limit	PASS
Band Edge Compliance	§2.1051 §22.917 §24.238 §27.50(h) §27.50(m) §27.53(a)	 ≤ -13dBm (LTE Band5) ≤ -13dBm (LTE Band2) ≤ -13dBm (LTE Band4) Refer to clause 6.4 for LTE Band7,38,41 Refer to clause 6.4 for LTE Band40 	PASS
Spurious emissions at antenna terminals	§2.1051 §22.917 §24.238 §27.50(h) §27.50(m) §27.53(a)	 ≤ -13dBm (LTE Band5) ≤ -13dBm (LTE Band2) ≤ -13dBm (LTE Band4) Refer to clause 6.5 for LTE Band7,38,41 Refer to clause 6.5 for LTE Band40 	PASS
Field strength of spurious radiation	§2.1051 §22.917 §24.238 §27.50(h) §27.50(m) §27.53(a)	≤ -13dBm (LTE Band5) ≤ -13dBm (LTE Band2) ≤ -13dBm (LTE Band4) Refer to clause 6.6 for LTE Band7,38,41 Refer to clause 6.6 for LTE Band40	PASS
Frequency stability	§2.1055 §22.355 §24.235 §27.54	≤ ±2.5ppm.	PASS



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 4 of 32

Page

3 Contents

			90
1	Cov	er Page	1
2	Test	t Summary	3
3	Con	itents	1
4	Gen	eral Information	6
	4.1	Details of E.U.T	
	4.2	Test Frequency	
	4.3	Test Environment	
	4.4	Description of Support Units	
	4.5	Measurement Uncertainty	
	4.6	Test Location	
	4.7	Test Facility	
	4.8	Deviation from Standards	
	4.9	Abnormalities from Standard Conditions	
5	Equ	ipment List	11
6	Rad	io Spectrum Matter Test Results	13
	6.1	Effective (Isotropic) Radiated Output Power Data	
	6.1.		
	6.1.2		
	6.1.3	1 5	
	6.2	Peak-Average Ratio	
	6.2.	· · · · · · · · · · · · · · · · · · ·	
	6.2.2	·	
	6.2.3	, •	
	6.3	Bandwidth	15
	6.3.	1 E.U.T. Operation	15
	6.3.2	2 Test Setup Diagram	15
	6.3.3		
	6.4	Band Edge Compliance	
	6.4.		
	6.4.2	1 5	
	6.4.3		
	6.5	Spurious emissions at antenna terminals	
	6.5.	·	
	6.5.2	, g	
	6.5.3 6.6	3 Measurement Data Field strength of spurious radiation	
	6.6.	· ·	
	6.6.2		
	6.6.3		
	6.7	Frequency stability	
	6.7.		
	J		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: FYCR221100047607 Page: 5 of 32

	6.7.2 Test Setup Diagram	30
	6.7.3 Measurement Data	
(6.8 Modulation Characteristics	
	6.8.1 E.U.T. Operation	3 ²
	6.8.2 Test Setup Diagram	3 ²
	6.8.3 Measurement Data	3′
7	Test Setup Photo	32
8	EUT Constructional Details (EUT Photos)	32



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 6 of 32

4 General Information

4.1 Details of E.U.T.

Power supply: Rechargeable Li-ion battery 1: (Charged by adapter)

Battery Model: BT-901

Manufacturer: Zhuhai Greaton Electronic Technology Co., Ltd.

Rated Capacity: 3.6V 5200mAh

Rechargeable Li-ion battery 2: (Charged by adapter)

Battery Model: BT-901

Manufacturer: Shenzhen Rishengzhi Electronics Technology Co.,

Ltd.

Rated Capacity: 3.6V 5200mAh

Adapter Model: SW-1772 Input: AC 100-240V 50/60Hz

Output: DC 5V 2A

Cable(s): USB Cable: 80cm unshielded

Sample Type: Portable production

LTE Operation Frequency Band: LTE FDD Band 2,4,5,7,38,40,41

Modulation Type: QPSK, 16QAM

LTE Power Class: Level 3

Antenna Type: PIFA Antenna

Antenna Gain: B2: 2.33dBi; B4: 3.81dBi; B5: -2.56dBi; B7: 5.59dBi; B38: 5.41dBi;

B40: 2.08dBi; B41: 5.78dBi

SIM Card: This device has dual SIM Card sockets. Both the SIM sockets

have been tested. SIM1 was worst case, only record SIM1.

4.2 Test Frequency

	Nominal			
Test mode:	Bandwidth	Low (L)	Middle (M)	High (H)
	(MHz)	MHz	MHz	MHz
	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
LTE FDD	5	1852.5	1880	1907.5
Band 2	10	1855.0	1880	1905.0
	15	1857.5	1880	1902.5
	20	1860.0	1880	1900.0
Test mode:	Nominal RF Channel			
rest mode.	Bandwidth	Low (L)	Middle (M)	High (H)



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, ubject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Itention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is dvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of illent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, orgery or falsification of the content or ppearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the sesults shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only.

Interventions The Company Amy unauthorized alteration for 30 days only.**

Intervention The Company Amy unauthorized alteration for 30 days only.**

Intervention The Company Amy unauthorized alteration for 30 days only.**

Intervention The Company Amy unauthorized alteration for 30 days only.**

Intervention The Company Amy unauthorized alteration for 30 days only.**

Intervention The Company Amy unauthorized alteration for 30 days only.**

Intervention The Company Amy unauthorized alteration for 30 days only.**

Intervention The Company Amy unauthorized alterati



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 7 of 32

	(MHz)	MHz	MHz	MHz		
	` ,			1754.3		
				1754.5		
	Total					
LTE FDD				1752.5		
Dallu 4				1750.0		
				1747.5		
		1720.0		1745.0		
			RF Channel			
Test mode:		Low (L)	Middle (M)	High (H)		
	(1411 12)	MHz	1710.7 1732.5 1711.5 1732.5 1712.5 1732.5 1715.0 1732.5 1717.5 1732.5 1720.0 1732.5 RF Channel Low (L) Middle (M) MHz MHz 824.7 836.5 826.5 836.5 826.5 836.5 829.0 836.5 RF Channel Low (L) Middle (M) MHz MHz 2502.5 2535.0 2505.0 2535.0 2507.5 2535.0 2510.0 PR Channel Low (L) Middle (M) MHz MHz 2572.5 2595.0 2577.5 2595.0 2577.5 2595.0 2580.0 2595.0 RF Channel Low (L) Middle (M) MHz MHz 2572.5 2595.0 2577.5 2595.0 2580.0 2595.0 2580.0 2595.0 RF Channel Low (L) Middle (M) MHz MHz 2307.5 2310.0	MHz		
	1.4	824.7	836.5	848.3		
LTE FDD	3	825.5	836.5	847.5		
Band 5	5	826.5	836.5	846.5		
	10	829.0	836.5	844.0		
			RF Channel			
Test mode:		Low (L)	Middle (M)	High (H)		
	(IVITZ)	MHz	1732.5 1732.5 1732.5 1732.5 1732.5 1732.5 1732.5 RF Channel Middle (M) MHz 836.5 836.5 836.5 836.5 RF Channel Middle (M) MHz 2535.0 2535.0 2535.0 2535.0 RF Channel Middle (M) MHz 2595.0 2595.0 2595.0 2595.0 2595.0 RF Channel Middle (M) MHz 2310.0	MHz		
	5	2502.5	2535.0	2567.5		
LTE FDD	10	2505.0	2535.0	2565.0		
Band 7	15	1710.7 1732.5 1711.5 1732.5 1712.5 1732.5 1715.0 1732.5 1717.5 1732.5 1720.0 1732.5 1720.0 1732.5 1720.0 Middle (M) MHz MHz 824.7 836.5 826.5 836.5 829.0 836.5 829.0 836.5 829.0 836.5 829.0 836.5 829.0 836.5 829.0 836.5 829.0 836.5 829.0 836.5 829.0 RF Channel Low (L) Middle (M) MHz MHz 2502.5 2535.0 2507.5 2535.0 2507.5 2535.0 8	2562.5			
	20	2510.0	2535.0	2560.0		
			RF Channel			
Test mode:		Low (L)	Middle (M)	High (H)		
	(IVITIZ)	MHz	MHz	MHz		
	5	2572.5	2595.0	2617.5		
LTE FDD	10	2575.0	2595.0	2615.0		
Band 38	15	2577.5	2595.0	2612.5		
	To 1715.0 15 1717.5 20 1720.0 1720.0	2595.0	2610.0			
			RF Channel			
Test mode:		Low (L)	Middle (M)	High (H)		
	(IVITIZ)	MHz	MHz	MHz		
LTE FDD	5	2307.5	2310.0	2312.5		
Band 40a	10	/	2310.0	/		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 8 of 32

	Nominal		RF Channel	
Test mode:	Bandwidth	Low (L)	Middle (M)	High (H)
	(MHz)	MHz	MHz	MHz
LTE FDD	5	2352.5	2355.0	2357.5
Band 40b	10	/	2355.0	/
	Nominal			
Test mode:	Bandwidth	Low (L)	Middle (M)	High (H)
	(MHz)	MHz	MHz	MHz
	5	2498.5	2593.0	2687.5
LTE FDD	10	2501.0	2593.0	2685.0
Band 41	15	2503.5	2593.0	2682.5
	20	2506.0	2593.0	2680.0



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 9 of 32

4.3 Test Environment

Environment Parameter	Selected Values During Tests		
Temperature:	TL	-30°C	
	TN	+20°C	
	TH	+50°C	
Voltage:	VL	3.3 Vdc	
	VN	3.6 Vdc	
	VH	4.2 Vdc	

NOTE: VL= lower extreme test voltage

VN= nominal voltage

VH= upper extreme test voltage TL= lower extreme test temperature

TN= normal temperature

TH= upper extreme test temperature

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Measurement Uncertainty

No.	ltem	Measurement Uncertainty
1	Radio Frequency	± 5.4 x 10 ⁻⁸
2	Duty cycle	± 0.3%
3	Occupied Bandwidth	± 3%
4	RF conducted power	± 0.8dB
5	RF power density	± 0.4dB
6	Conducted Spurious emissions	± 2.7dB
7	Padiated Spurious emission test	± 3.1dB (Below 1GHz)
/	Radiated Spurious emission test	± 4.4dB (Above 1GHz)
8	Temperature test	± 1°C
9	Humidity test	± 3%
10	Supply voltages	± 1.5%
11	Time	± 3%



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gg.com/en/Terms-and-Conditions, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gg.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or anally. CR. Doccheck@sas.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 10 of 32

4.6 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc. Shenzhen branch.

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China

Tel: +86 755 8866 3988 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6606.01)

Compliance Certification Services (Kunshan) Inc. Shenzhen branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6606.01.

• FCC -Designation Number: CN1322

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized as an accredited testing laboratory.

Designation Number: CN1322. Test Firm Registration Number: 718073

• Innovation, Science and Economic Development Canada

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0129.

IC#: 28189.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 11 of 32

5 Equipment List

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2022/07/12	2023/07/11
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2022/07/12	2023/07/11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2022/07/12	2023/07/11
Measurement Software	TST	TST PASS V2.0	N/A	N/A	N/A
Attenuator	Huber+Suhner	6620_SMA- 50-1	SEM021-09	2022/07/12	2023/07/11
Universal Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-03	2022/03/29 2023/03/28	2023/03/28 2024/03/27
Power Sensor	KEYSIGHT	U2021XA	SEM009-15	2022/07/12	2023/07/11

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-33	2021/9/25	2024/9/24
MXE EMI receiver	Agilent	N9038A	SEM004-05	2022/07/12	2023/07/11
Pre-amplifier	HP	8447D	SEM005-02	2022/07/12	2023/07/11
Spectrum Analyzer	Rohde & Schwarz	101288	SEM004-08	2022/07/12	2023/07/11
Low Noise Amplifier	CLAVIIO	BDLNA-0118- 352810	SEM005-05	2022/07/12	2023/07/11
Substitution Antenna	Schwarzbeck	VULB9168	SEM003-18	2022/08/07	2025/08/06
Signal Generator(9kHz- 40GHz)	N5173B	MY53270267	Agilent	2022/07/12	2023/07/11
Pre-amplifier	HP	8447D	SEM005-02	2022/07/12	2023/07/11
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2021/7/11	2024/7/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-32	2021/9/26	2024/9/25
Double-ridged waveguide horn	ETS-LINDGREN	3117	SEM003-34	2021/9/25	2024/9/24
Spectrum Analyzer	Rohde & Schwarz	101288	SEM004-08	2022/07/12	2023/07/11
Low Noise Amplifier	CLAVIIO	BDLNA-0118- 352810	SEM005-05	2022/07/12	2023/07/11



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 12 of 32

Pre-amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2022/07/12	2023/07/11
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2022/07/12	2023/07/11
Substitution Antenna	ETS-Lindgren	3142C	SEM003-01	2020/06/26	2023/06/25
Universal Radio	Rohde & Schwarz	CMW 500	SEM010-03	2022/03/29	2023/03/28
Communication Tester	Ronde & Schwarz	CIVIVV 500	SEIVIO10-03	2023/03/28	2024/03/27

General used equipment										
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date					
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-22	2022/07/12	2023/07/11					
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-23	2022/07/12	2023/07/11					
Barometer	DUMAI	DYM3	SEM002-24	2022/07/12	2023/07/11					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 13 of 32

6 Radio Spectrum Matter Test Results

6.1 Effective (Isotropic) Radiated Output Power Data

Test Requirement: §2.1046,§22.913,§24.232,§27.50(a),§27.50(d),§27.50(h)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: ERP≤ 7W(LTE Band 5)

EIRP≤ 2W(LTE Band 2)

EIRP≤ 250mW/5MHz(LTE Band 40)

EIRP≤ 1W(LTE Band 4) EIRP≤ 2W(LTE Band 7,38,41)


6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 53.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode_Keep the EUT in transmitting mode

6.1.2 Test Setup Diagram

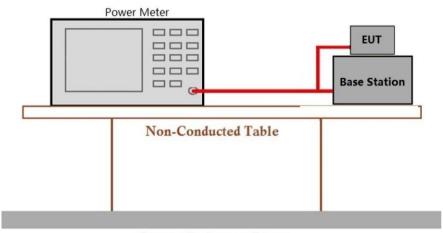

Ground Reference Plane

6.1.3 Measurement Data

Please refer to Appendix for LTE test data.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, orgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sus.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 14 of 32

6.2 Peak-Average Ratio

Test Requirement: §22.913,§24.232,§27.50(a),§27.50(d)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: ≤13dB


6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 53.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode_Keep the EUT in transmitting mode

6.2.2 Test Setup Diagram

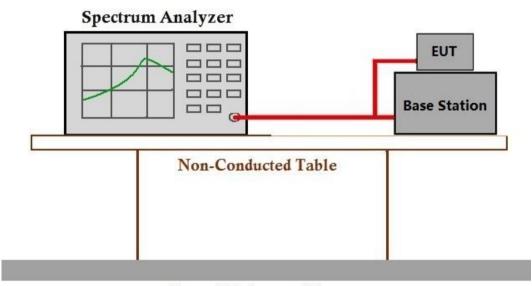

Ground Reference Plane

6.2.3 Measurement Data

Please refer to Appendix for LTE test data.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, rigery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, cerumic CMD. Doccheck@sus.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 15 of 32

6.3 Bandwidth

Test Requirement: §2.1049(h)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: OBW: No limit

EBW: No limit


6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 53.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode_Keep the EUT in transmitting mode

6.3.2 Test Setup Diagram

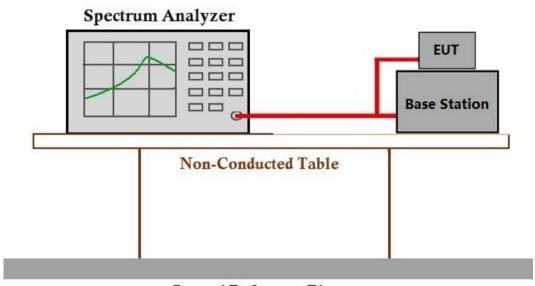

Ground Reference Plane

6.3.3 Measurement Data

Please refer to Appendix for LTE test data.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, rigery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@segs.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 16 of 32

6.4 Band Edge Compliance

Test Requirement: §2.1051,§22.917,§24.238,§27.50(h),§27.50(m),§27.53(a)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: \leq -13dBm (LTE Band2,4,5)

For Band7,38,41:

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

For Band40:

- (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;
- (iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.

6.4.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 53.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode Keep the EUT in transmitting mode



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, rigery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@ss.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 17 of 32

6.4.2 Test Setup Diagram

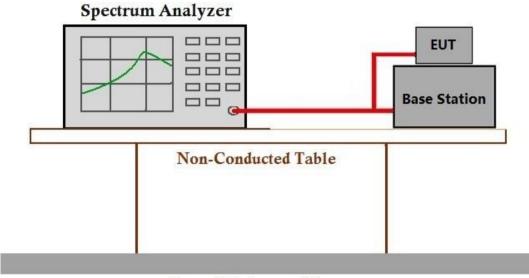

Ground Reference Plane

6.4.3 Measurement Data

Please refer to Appendix for LTE test data.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gg.com/en/Terms-and-Conditions, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gg.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 18 of 32

6.5 Spurious emissions at antenna terminals

§2.1051,§22.917,§24.238,§27.50(h),§27.50(m),§27.53(a) Test Requirement:

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

≤ -13dBm (**LTE Band2,4,5**) Limit:

For Band7,38,41:

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

For Band40:

- (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;

(iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.

6.5.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 53.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode Keep the EUT in transmitting mode



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forger or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 19 of 32

6.5.2 Test Setup Diagram

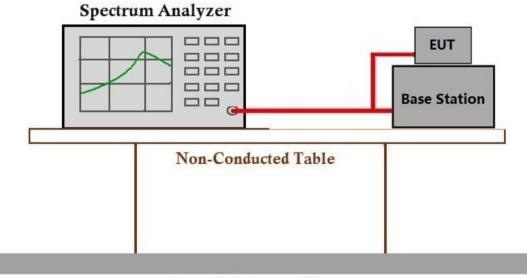

Ground Reference Plane

6.5.3 Measurement Data

Please refer to Appendix for LTE test data.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gg.com/en/Terms-and-Conditions, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gg.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, rigery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 20 of 32

6.6 Field strength of spurious radiation

Test Requirement: §2.1051,§22.917,§24.238,§27.50(h),§27.50(m),§27.53(a)

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: \leq -13dBm (LTE Band2,4,5)

For Band7,38,41:

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

For Band40

- (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;
- (iii) By a factor of not less than $43 + 10 \log (P) dB$ on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P) dB$ above 2365 MHz.

6.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C Humidity: 47.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode_Keep the EUT in transmitting mode



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 83071443.





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607

Page: 21 of 32


6.6.2 Test Setup Diagram

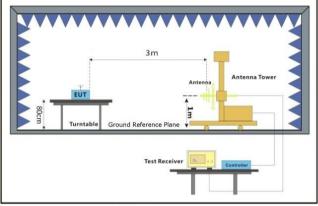


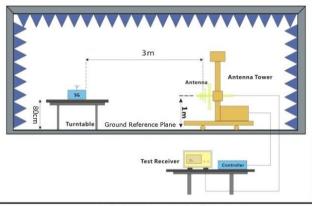

EUT

Substiute Antenna+Signal Generator

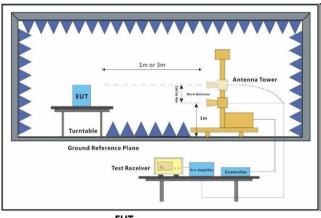

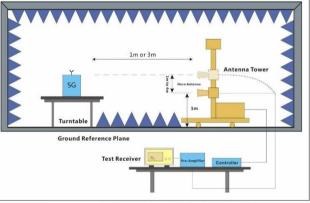

EUT

Substiute Antenna+Signal Generator



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gg.com/en/Terms-and-Conditions, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gg.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 22 of 32

6.6.3 Measurement Procedure and Data

Test Procedure:

- (1)On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall than be rotated through 360 in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, frogery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CADoccheck@sas.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 23 of 32

	FDD I	LTE Band2-Lo	w channel, Mo	odulation: (QPSK, Band	lwidth: 20MH	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3700.14	-52.58	-13	-39.58	-54.8	6.99	9.21	Horizontal	Pass
5550.21	-49.9	-13	-36.9	-52.22	8.27	10.59	Horizontal	Pass
7400.28	-47.78	-13	-34.78	-51.32	8.19	11.73	Horizontal	Pass
3700.14	-53.08	-13	-40.08	-55.3	6.99	9.21	Vertical	Pass
5550.21	-49.95	-13	-36.95	-52.27	8.27	10.59	Vertical	Pass
7400.28	-47.13	-13	-34.13	-50.67	8.19	11.73	Vertical	Pass

	FDD L	ΓΕ Band2-Mido	dle channel, M	lodulation:	QPSK, Bai	ndwidth: 20M	IHz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3758.74	-52.82	-13	-39.82	-55.04	6.99	9.21	Horizontal	Pass
5638.11	-50.7	-13	-37.7	-53.02	8.27	10.59	Horizontal	Pass
7517.48	-46.5	-13	-33.5	-50.33	8.43	12.26	Horizontal	Pass
3758.74	-50.9	-13	-37.9	-53.12	6.99	9.21	Vertical	Pass
5638.11	-50.66	-13	-37.66	-52.98	8.27	10.59	Vertical	Pass
7517.48	-47.12	-13	-34.12	-50.95	8.43	12.26	Vertical	Pass

	FDD LTE Band2-High channel, Modulation: QPSK, Bandwidth: 20MHz, 1 RB0											
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result				
3817.34	-53.16	-13	-40.16	-55.38	6.99	9.21	Horizontal	Pass				
5726.01	-48.34	-13	-35.34	-50.66	8.27	10.59	Horizontal	Pass				
7634.68	-48.06	-13	-35.06	-51.89	8.43	12.26	Horizontal	Pass				
3817.34	-52.05	-13	-39.05	-54.27	6.99	9.21	Vertical	Pass				
5726.01	-50.07	-13	-37.07	-52.39	8.27	10.59	Vertical	Pass				
7634.68	-47.5	-13	-34.5	-51.33	8.43	12.26	Vertical	Pass				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 24 of 32

	FDD LTE Band4-Low channel, Modulation: QPSK, Bandwidth: 20MHz, 1 RB0											
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result				
3420.14	-53.76	-25	-28.76	-56.34	5.72	8.3	Horizontal	Pass				
5130.21	-50.58	-25	-25.58	-52.58	8.3	10.3	Horizontal	Pass				
6840.28	-49.24	-25	-24.24	-52.79	7.7	11.25	Horizontal	Pass				
3420.14	-53.61	-25	-28.61	-56.19	5.72	8.3	Vertical	Pass				
5130.21	-50.4	-25	-25.4	-52.4	8.3	10.3	Vertical	Pass				
6840.28	-48.53	-25	-23.53	-52.08	7.7	11.25	Vertical	Pass				

	FDD L1	ΓΕ Band4-Midd	dle channel, M	lodulation:	QPSK, Bai	ndwidth: 20M	lHz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3463.74	-52.04	-25	-27.04	-54.62	5.72	8.3	Horizontal	Pass
5195.61	-50.01	-25	-25.01	-52.01	8.3	10.3	Horizontal	Pass
6927.48	-49.06	-25	-24.06	-52.61	7.7	11.25	Horizontal	Pass
3463.74	-52.54	-25	-27.54	-55.12	5.72	8.3	Vertical	Pass
5195.61	-50.31	-25	-25.31	-52.31	8.3	10.3	Vertical	Pass
6927.48	-49.41	-25	-24.41	-52.96	7.7	11.25	Vertical	Pass

	FDD L	TE Band4-Hig	gh channel, Mo	odulation: (QPSK, Band	dwidth: 20Ml	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3507.34	-53.84	-25	-28.84	-56.06	6.99	9.21	Horizontal	Pass
5261.01	-49.87	-25	-24.87	-51.87	8.3	10.3	Horizontal	Pass
7014.68	-48.8	-25	-23.8	-52.34	8.19	11.73	Horizontal	Pass
3507.34	-53.85	-25	-28.85	-56.07	6.99	9.21	Vertical	Pass
5261.01	-49.12	-25	-24.12	-51.12	8.3	10.3	Vertical	Pass
7014.68	-48.9	-25	-23.9	-52.44	8.19	11.73	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 25 of 32

	FDD I	_TE Band5-Lo	w channel, Mo	odulation: (QPSK, Band	width: 10MF	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1648.14	-47.93	-13	-34.93	-51.59	3.77	7.43	Horizontal	Pass
2472.21	-56.33	-13	-43.33	-58.66	4.75	7.08	Horizontal	Pass
3296.28	-55.04	-13	-42.04	-57.62	5.72	8.3	Horizontal	Pass
1648.14	-56.12	-13	-43.12	-59.78	3.77	7.43	Vertical	Pass
2472.21	-57.41	-13	-44.41	-59.74	4.75	7.08	Vertical	Pass
3296.28	-54.32	-13	-41.32	-56.9	5.72	8.3	Vertical	Pass

	FDD L	ΓΕ Band5-Midd	dle channel, M	lodulation:	QPSK, Bai	ndwidth: 10M	IHz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1671.74	-47.4	-13	-34.4	-51.06	3.77	7.43	Horizontal	Pass
2507.61	-57.61	-13	-44.61	-60.08	5.13	7.6	Horizontal	Pass
3343.48	-54.17	-13	-41.17	-56.75	5.72	8.3	Horizontal	Pass
1671.74	-57.4	-13	-44.4	-61.06	3.77	7.43	Vertical	Pass
2507.61	-57.56	-13	-44.56	-60.03	5.13	7.6	Vertical	Pass
3343.48	-54.03	-13	-41.03	-56.61	5.72	8.3	Vertical	Pass

	FDD L	TE Band5-Hig	gh channel, Mo	odulation: (QPSK, Band	dwidth: 10Ml	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1695.34	-52.31	-13	-39.31	-55.97	3.77	7.43	Horizontal	Pass
2543.01	-58.13	-13	-45.13	-60.6	5.13	7.6	Horizontal	Pass
3390.68	-53.14	-13	-40.14	-55.72	5.72	8.3	Horizontal	Pass
1695.34	-58.1	-13	-45.1	-61.76	3.77	7.43	Vertical	Pass
2543.01	-56.14	-13	-43.14	-58.61	5.13	7.6	Vertical	Pass
3390.68	-54.03	-13	-41.03	-56.61	5.72	8.3	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 26 of 32

	FDD LTE Band7-Low channel, Modulation: QPSK, Bandwidth: 20MHz, 1 RB0											
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result				
5000.5	-50.28	-25	-25.28	-52.28	8.3	10.3	Horizontal	Pass				
7500.75	-46.66	-25	-21.66	-50.49	8.43	12.26	Horizontal	Pass				
10001	-44.88	-25	-19.88	-47.13	11.12	13.37	Horizontal	Pass				
5000.5	-48.97	-25	-23.97	-50.97	8.3	10.3	Vertical	Pass				
7500.75	-45.82	-25	-20.82	-49.65	8.43	12.26	Vertical	Pass				
10001	-44.8	-25	-19.8	-47.05	11.12	13.37	Vertical	Pass				

	FDD L1	ΓΕ Band7-Midd	dle channel, M	lodulation:	QPSK, Bai	ndwidth: 20M	IHz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5065.5	-50.3	-25	-25.3	-52.3	8.3	10.3	Horizontal	Pass
7598.25	-47.65	-25	-22.65	-51.48	8.43	12.26	Horizontal	Pass
10131	-44.4	-25	-19.4	-46.65	11.12	13.37	Horizontal	Pass
5065.5	-49.32	-25	-24.32	-51.32	8.3	10.3	Vertical	Pass
7598.25	-48.28	-25	-23.28	-52.11	8.43	12.26	Vertical	Pass
10131	-43.66	-25	-18.66	-45.91	11.12	13.37	Vertical	Pass

	FDD L	TE Band7-Hig	gh channel, Mo	odulation: (QPSK, Band	dwidth: 20Ml	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5130.5	-50.1	-25	-25.1	-52.1	8.3	10.3	Horizontal	Pass
7695.75	-46.68	-25	-21.68	-50.51	8.43	12.26	Horizontal	Pass
10261	-45.89	-25	-20.89	-48.14	11.12	13.37	Horizontal	Pass
5130.5	-50.16	-25	-25.16	-52.16	8.3	10.3	Vertical	Pass
7695.75	-48.5	-25	-23.5	-52.33	8.43	12.26	Vertical	Pass
10261	-45.12	-25	-20.12	-47.37	11.12	13.37	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 27 of 32

	FDD LTE Band38-Low channel, Modulation: QPSK, Bandwidth: 20MHz, 1 RB0											
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result				
5140.5	-49.99	-25	-24.99	-51.99	8.3	10.3	Horizontal	Pass				
7710.75	-48.33	-25	-23.33	-52.16	8.43	12.26	Horizontal	Pass				
10281	-44.91	-25	-19.91	-47.16	11.12	13.37	Horizontal	Pass				
5140.5	-49.92	-25	-24.92	-51.92	8.3	10.3	Vertical	Pass				
7710.75	-48.45	-25	-23.45	-52.28	8.43	12.26	Vertical	Pass				
10281	-45.47	-25	-20.47	-47.72	11.12	13.37	Vertical	Pass				

	FDD LT	E Band38-Mid	dle channel, N	/lodulation:	: QPSK, Ba	ndwidth: 20N	/lHz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5185.5	-49.67	-25	-24.67	-51.67	8.3	10.3	Horizontal	Pass
7778.25	-47.3	-25	-22.3	-51.13	8.43	12.26	Horizontal	Pass
10371	-44.64	-25	-19.64	-46.89	11.12	13.37	Horizontal	Pass
5185.5	-50.68	-25	-25.68	-52.68	8.3	10.3	Vertical	Pass
7778.25	-48.16	-25	-23.16	-51.99	8.43	12.26	Vertical	Pass
10371	-45.61	-25	-20.61	-47.86	11.12	13.37	Vertical	Pass

	FDD L	TE Band38-Hi	gh channel, M	odulation:	QPSK, Ban	dwidth: 20M	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5230.5	-49.79	-25	-24.79	-51.79	8.3	10.3	Horizontal	Pass
7845.75	-47.47	-25	-22.47	-51.3	8.43	12.26	Horizontal	Pass
10461	-45.87	-25	-20.87	-48.12	11.12	13.37	Horizontal	Pass
5230.5	-48.98	-25	-23.98	-50.98	8.3	10.3	Vertical	Pass
7845.75	-46.24	-25	-21.24	-50.07	8.43	12.26	Vertical	Pass
10461	-44.99	-25	-19.99	-47.24	11.12	13.37	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 28 of 32

	FDD LTE	E Band40A-Mid	ddle channel,	Modulation	n: QPSK, B	andwidth: 10	MHz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
4600.5	-50.3	-13	-37.3	-52.89	7.47	10.06	Horizontal	Pass
6900.75	-49.12	-13	-36.12	-52.67	7.7	11.25	Horizontal	Pass
9201	-44.67	-13	-31.67	-47.38	10.75	13.46	Horizontal	Pass
4600.5	-51	-13	-38	-53.59	7.47	10.06	Vertical	Pass
6900.75	-47.39	-13	-34.39	-50.94	7.7	11.25	Vertical	Pass
9201	-45.15	-13	-32.15	-47.86	10.75	13.46	Vertical	Pass

	FDD LTE	E Band40B-Mi	ddle channel,	Modulation	n: QPSK, Ba	ındwidth: 10	MHz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
4695.5	-51.23	-13	-38.23	-53.82	7.47	10.06	Horizontal	Pass
7043.25	-47.47	-13	-34.47	-51.01	8.19	11.73	Horizontal	Pass
9391	-43.22	-13	-30.22	-45.93	10.75	13.46	Horizontal	Pass
4695.5	-51.03	-13	-38.03	-53.62	7.47	10.06	Vertical	Pass
7043.25	-48.42	-13	-35.42	-51.96	8.19	11.73	Vertical	Pass
9391	-44.23	-13	-31.23	-46.94	10.75	13.46	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 29 of 32

	FDD L	TE Band41-Lo	w channel, M	odulation:	QPSK, Band	dwidth: 20M	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
4997	-51.19	-25	-26.19	-53.78	7.47	10.06	Horizontal	Pass
7495.5	-47.14	-25	-22.14	-50.68	8.19	11.73	Horizontal	Pass
9994	-43.86	-25	-18.86	-45.89	11.49	13.52	Horizontal	Pass
4997	-50.66	-25	-25.66	-53.25	7.47	10.06	Vertical	Pass
7495.5	-46.6	-25	-21.6	-50.14	8.19	11.73	Vertical	Pass
9994	-43.99	-25	-18.99	-46.02	11.49	13.52	Vertical	Pass

	FDD LT	E Band41-Mid	dle channel, N	/lodulation:	: QPSK, Ba	ndwidth: 20N	//Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5186	-50.78	-25	-25.78	-52.78	8.3	10.3	Horizontal	Pass
7779	-48.18	-25	-23.18	-52.01	8.43	12.26	Horizontal	Pass
10372	-45.48	-25	-20.48	-47.73	11.12	13.37	Horizontal	Pass
5186	-50.84	-25	-25.84	-52.84	8.3	10.3	Vertical	Pass
7779	-48.16	-25	-23.16	-51.99	8.43	12.26	Vertical	Pass
10372	-45.36	-25	-20.36	-47.61	11.12	13.37	Vertical	Pass

	FDD L	TE Band41-Hi	gh channel, M	odulation:	QPSK, Ban	dwidth: 20M	Hz, 1 RB0	
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
5375	-50.49	-25	-25.49	-52.49	8.3	10.3	Horizontal	Pass
8062.5	-44.88	-25	-19.88	-48.13	9.43	12.68	Horizontal	Pass
10750	-43.8	-25	-18.8	-46.22	11.06	13.48	Horizontal	Pass
5375	-50.39	-25	-25.39	-52.39	8.3	10.3	Vertical	Pass
8062.5	-45.44	-25	-20.44	-48.69	9.43	12.68	Vertical	Pass
10750	-44.18	-25	-19.18	-46.6	11.06	13.48	Vertical	Pass

Note: All modes have been tested and we found QPSK test mode has the worst test result. Only record the worst test result.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gg.com/en/Terms-and-Conditions, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gg.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, rigery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or anally. CR. Doccheck@sas.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 30 of 32

6.7 Frequency stability

Test Requirement: §2.1055,§22.355,§24.235,§27.54

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: $\leq \pm 2.5$ ppm.


6.7.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 53.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode_Keep the EUT in transmitting mode

6.7.2 Test Setup Diagram

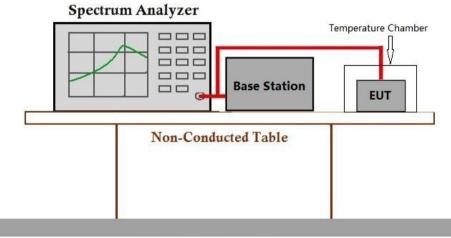

Ground Reference Plane

6.7.3 Measurement Data

Please refer to Appendix for LTE test data.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-o-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sags.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 31 of 32

6.8 Modulation Characteristics

Test Requirement: §2.1047

Test Method: ANSI C63.26-2015, KDB 971168 D01 v03r01

Limit: Digital modulation


6.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.5 °C Humidity: 53.5 % RH Atmospheric Pressure: 1020 mbar

Test mode 32: TX mode_Keep the EUT in transmitting mode

6.8.2 Test Setup Diagram

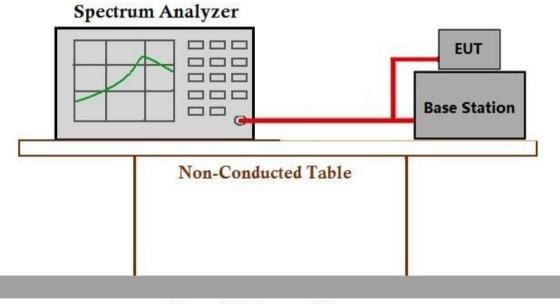

Ground Reference Plane

6.8.3 Measurement Data

Pass, it's a digital modulation device.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, orgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sus.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR221100047607 Page: 32 of 32

7 Test Setup Photo

Refer to Appendix - Test Setup Photo for FYCR2211000476AT

8 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for FYCR2211000476AT

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document its advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, cerusil EMD package Report