



1. Peak-Average Ratio

1.1 GSM850


1.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	824.2	3.59	<=13	Pass
			836.6	3.60	<=13	Pass
			848.8	3.62	<=13	Pass
	EGPRS	4 TX Slots	824.2	12.15	<=13	Pass
			836.6	11.90	<=13	Pass
			848.8	11.69	<=13	Pass


1.1.2 Test Graph

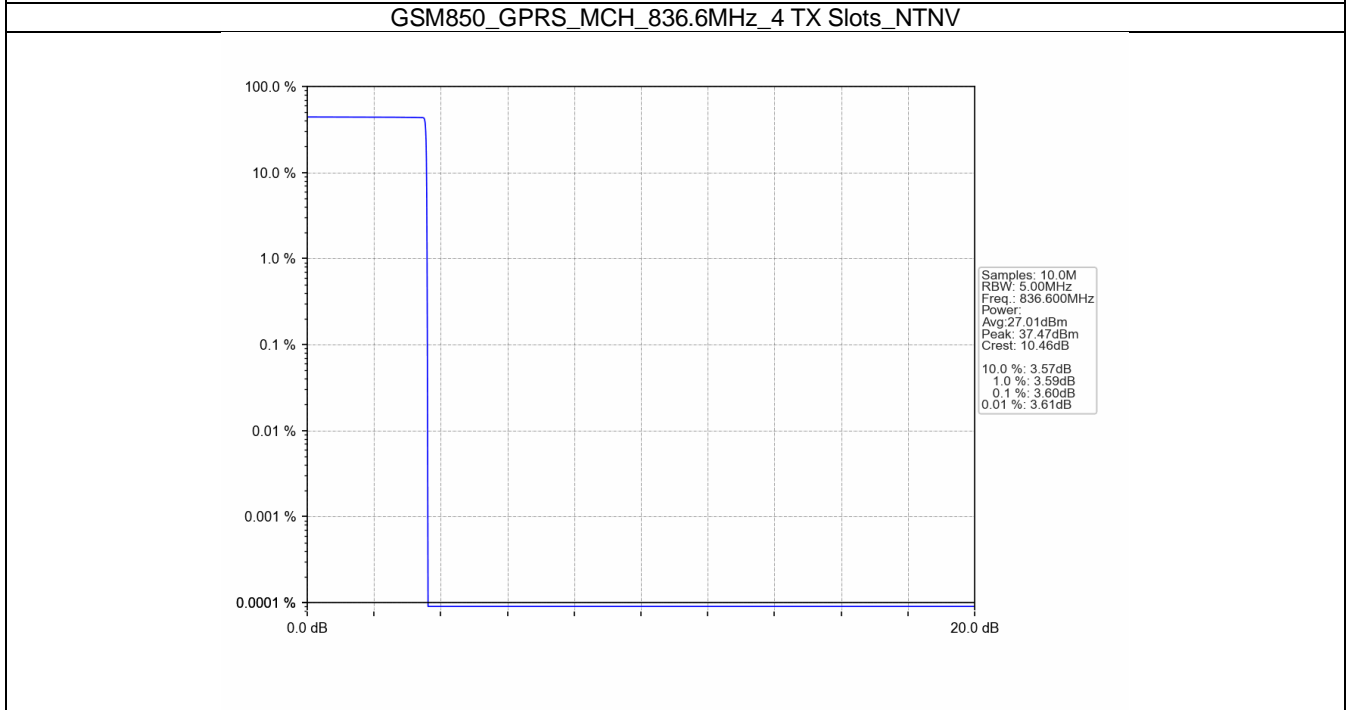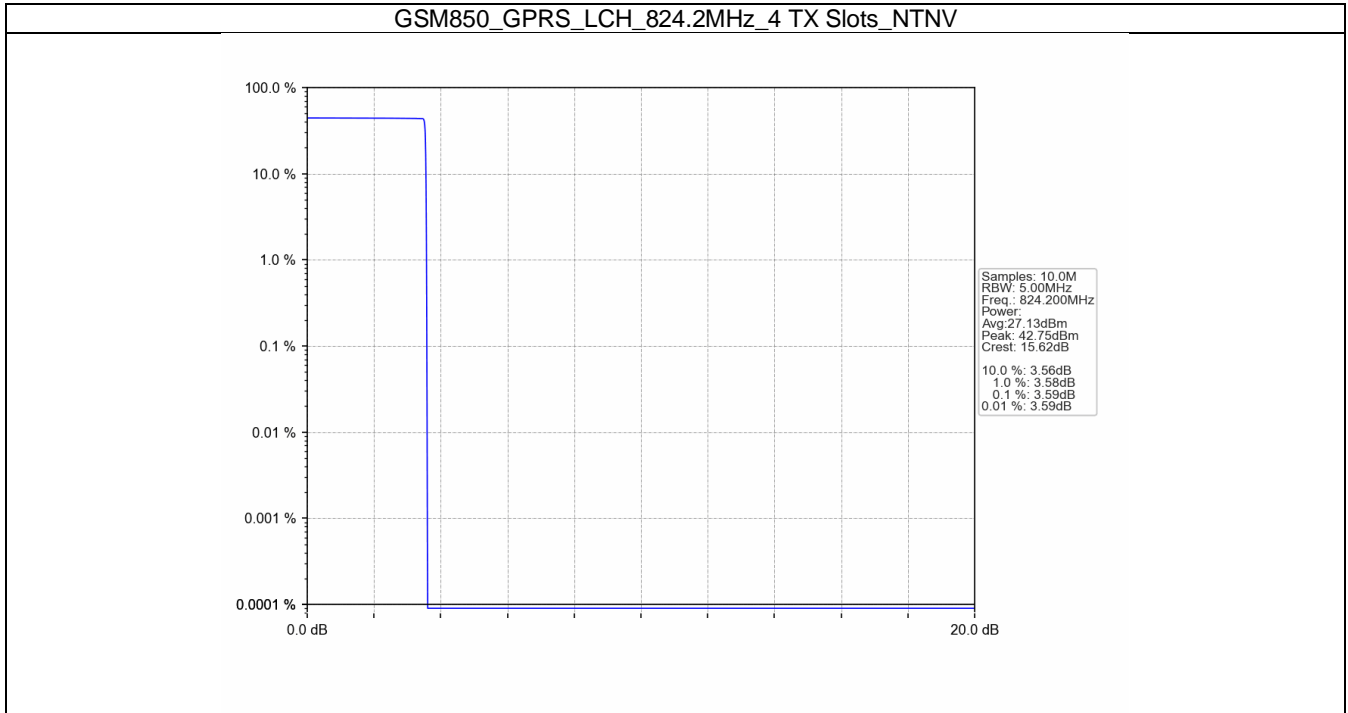


GSM850_GPRS_HCH_848.8MHz_4 TX Slots_NTNV

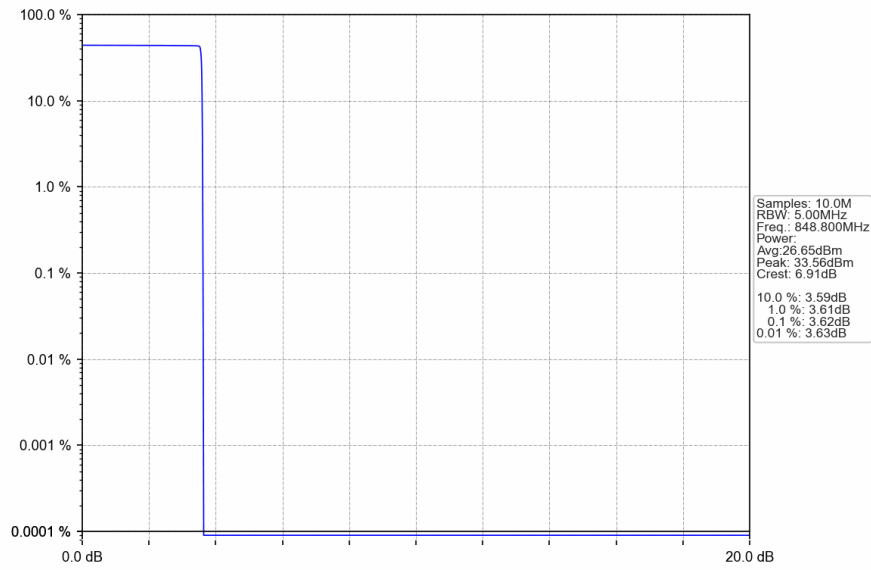


GSM850_EGPRS_LCH_824.2MHz_4 TX Slots_NTNV

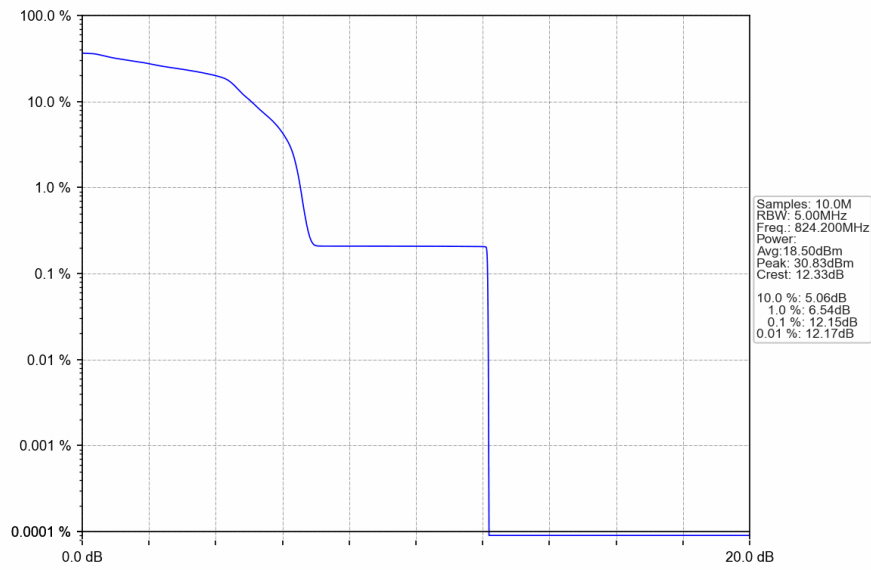

GSM850_EGPRS_MCH_836.6MHz_4 TX Slots_NTNV

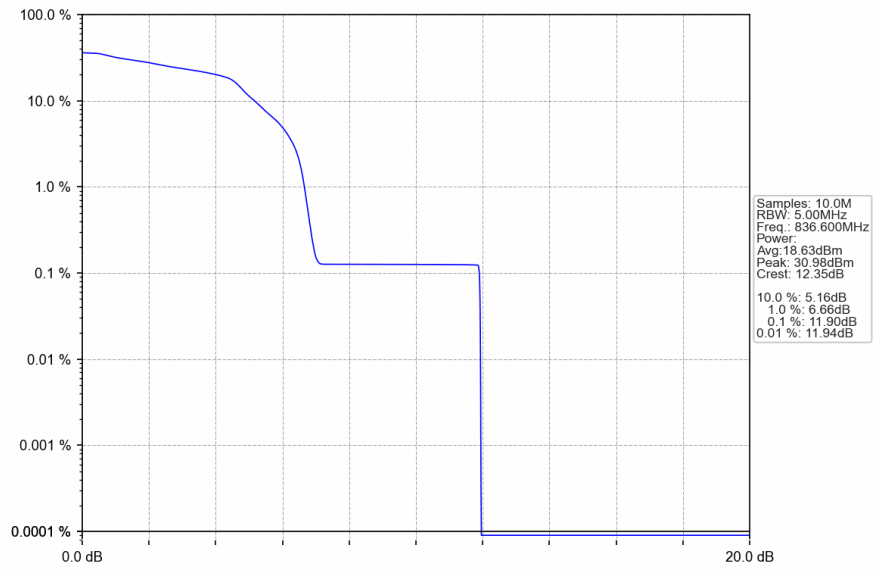

GSM850_EGPRS_HCH_848.8MHz_4 TX Slots_NTNV

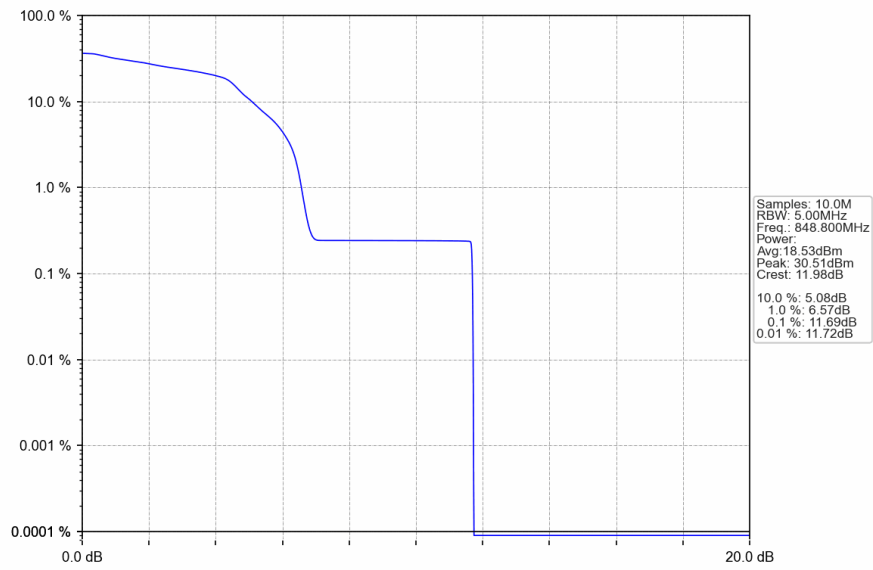


2. Peak-Average Ratio

2.1 PCS1900


2.1.1 Test Result

Band: PCS1900						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GPRS	4 TX Slots	1850.2	3.65	<=13	Pass
			1880	3.54	<=13	Pass
			1909.8	3.63	<=13	Pass
	EGPRS	4 TX Slots	1850.2	10.11	<=13	Pass
			1880	9.61	<=13	Pass
			1909.8	9.19	<=13	Pass


2.1.2 Test Graph

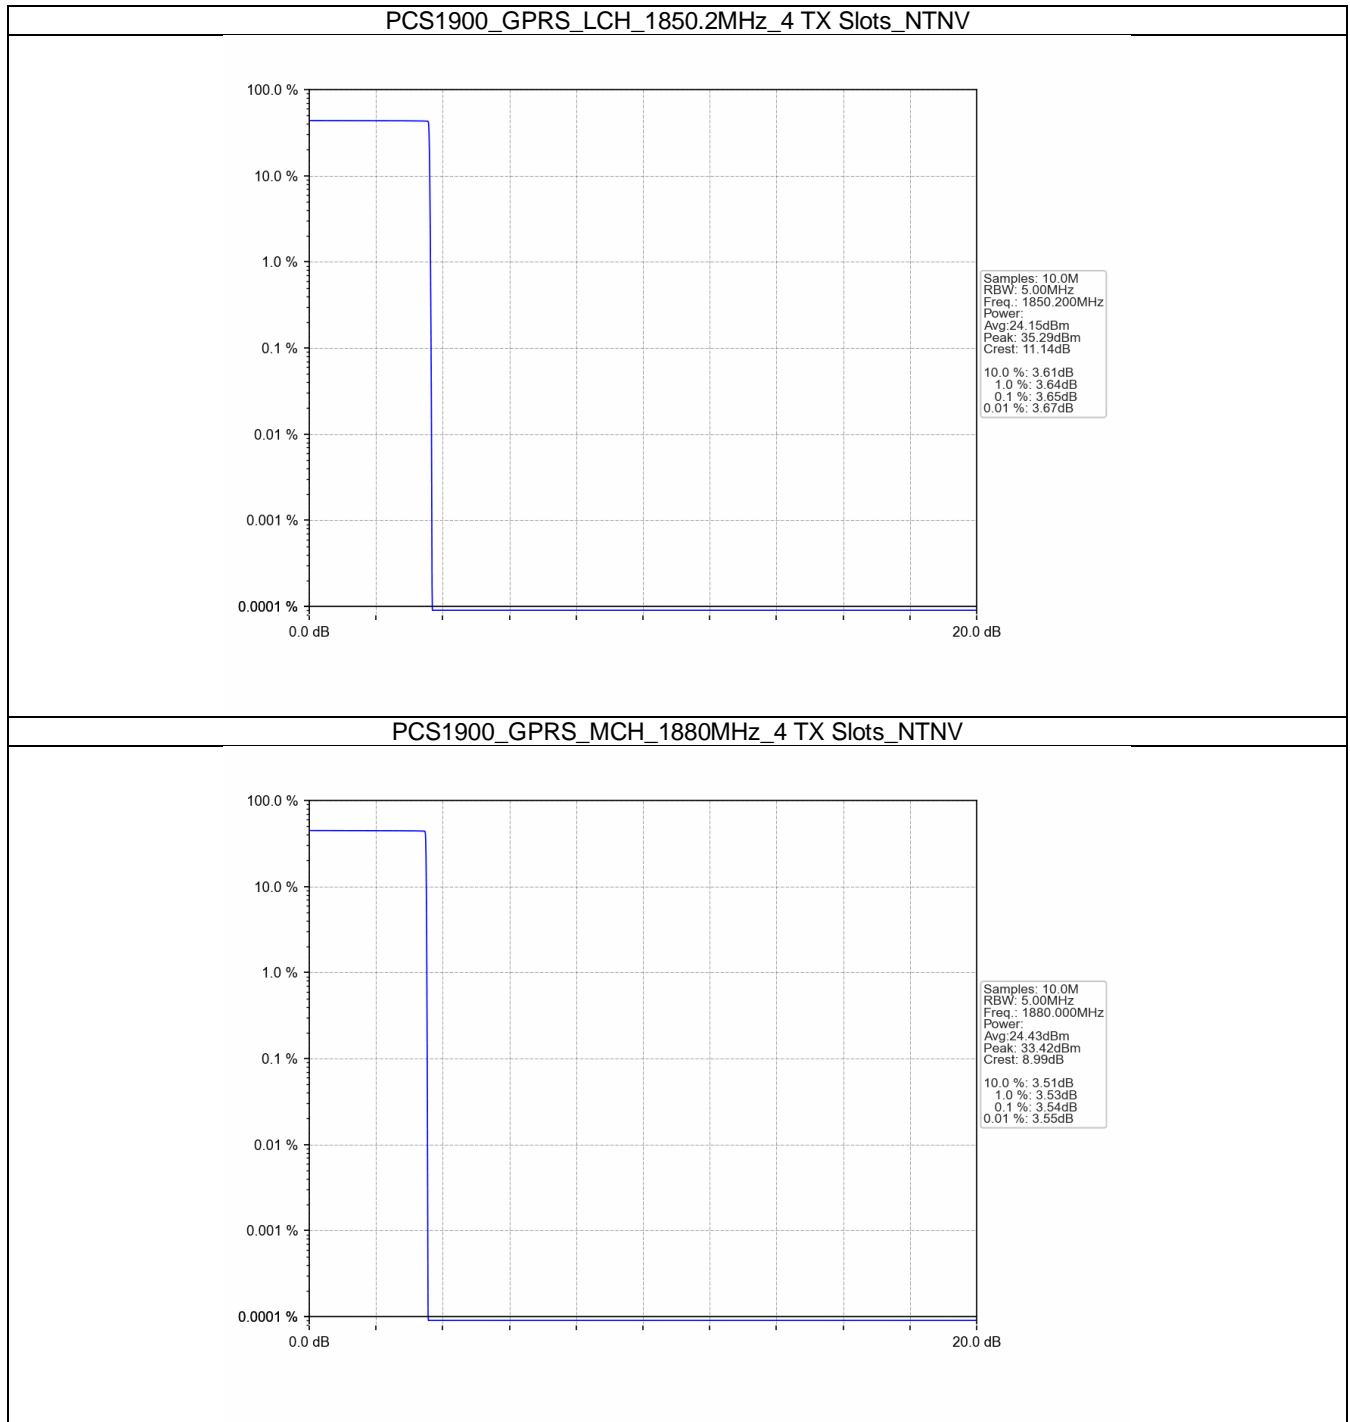


PCS1900_GPRS_HCH_1909.8MHz_4 TX Slots_NTNV

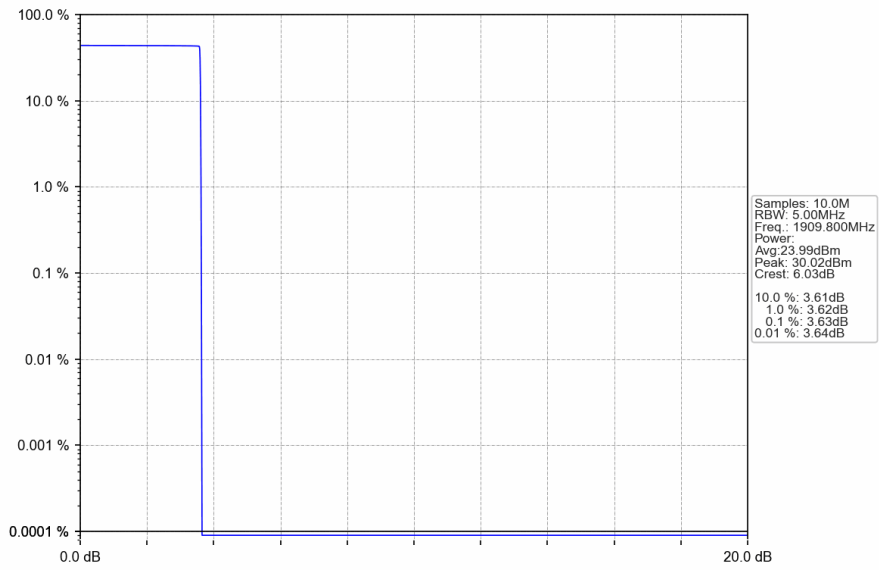

PCS1900_EGPRS_LCH_1850.2MHz_4 TX Slots_NTNV

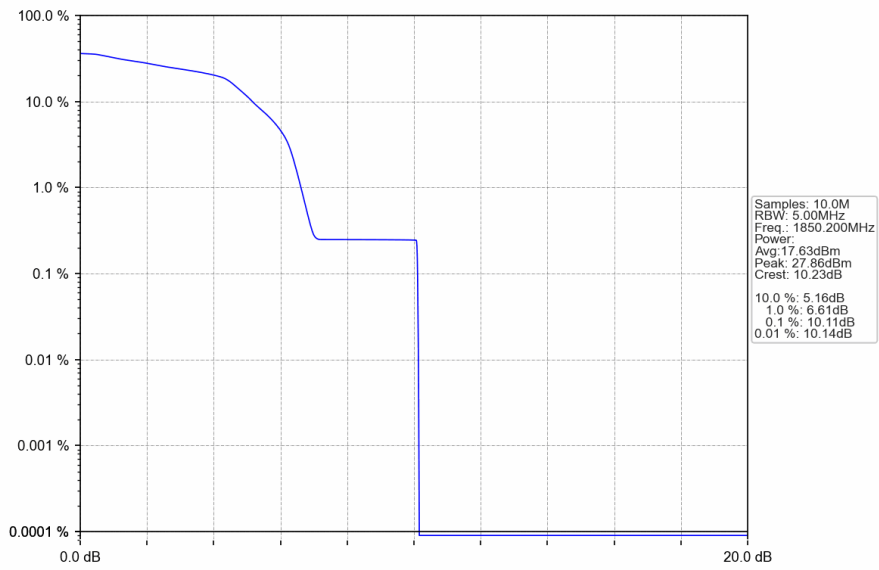

PCS1900_EGPRS_MCH_1880MHz_4 TX Slots_NTNV

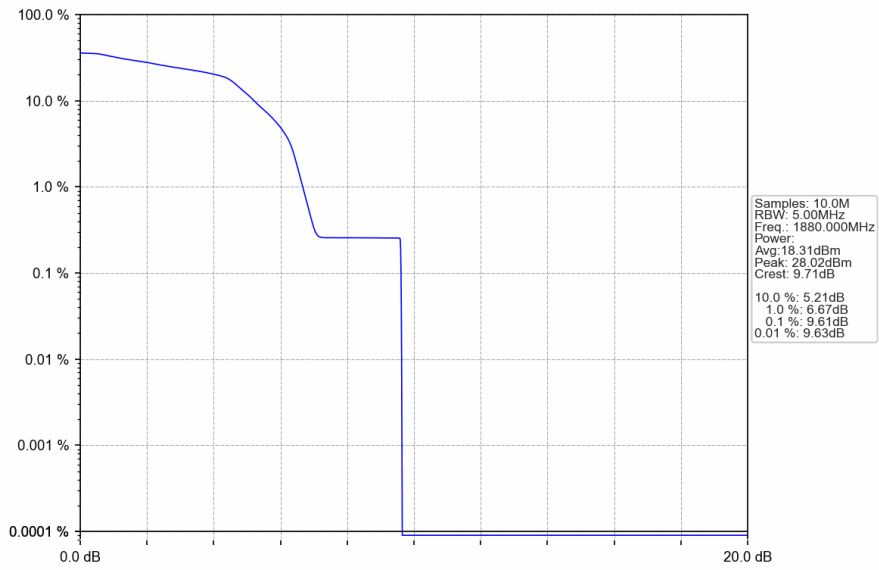

PCS1900_EGPRS_HCH_1909.8MHz_4 TX Slots_NTNV

