

Straubing, August 12, 1999

TEST - REPORT

No. 55435-90493

for

ICODE Evaluation Kit

Inductive Tag System

Applicant: Philips Semiconductors Gratkorn GmbH

Purpose of testing: To show compliance with

FCC Code of Federal Regulations,
Part 15 Subpart C,
Sections §15.205, §15.209 and
§15.225

Note:

The test data of this report relate only to the individual item which has been tested.
This report shall not be reproduced except in full extent without the written approval
of the testing laboratory.

Table of Contents

1.	Administrative Data	3
2.	Summary of Test Results	4
3.	Operation Mode of EUT.....	5
4.	Configuration of EUT and Peripheral Devices.....	6
5.	Measuring Methods	7
5.1.	Radiated Emission 9 kHz - 30 MHz (§15.209, §15.205 a,b)	8
5.2.	Radiated Emission 30 MHz - 1 GHz (§15.209)	10
5.3.	Frequency tolerance for operation within the band 13.553 - 13.567 MHz (§15.225).....	12
6.	Equipment List.....	14
7.	Photographs Taken During Testing.....	16
8.	List of Measurements	20
9.	Test Results.....	21

1. Administrative Data

Equipment Under Test (EUT): ICODE Evaluation Kit

Serial number: Prototype no. 1

Type of equipment: RF-identification system

Parts/accessories: Base unit: ICODE Evaluation Kit
RF-antenna: ICODE Demo Antenne
Tag: 526801-21

FCC-ID: OWRICODE-SLEV900

Applicant:
(full address) Philips Semiconductors Gratkorn GmbH
Mikron-Weg 1
A-8101 Gratkorn
AUSTRIA

Contract identification:

Contact person: Mr. Franz Amtmann

Manufacturer: Philips Semiconductors Gratkorn GmbH

Receipt of EUT: July 26, 1999

Date of test: July 29 to August 03, 1999

Note:

Responsible for testing: Rupert Kohlhäufel

Responsible for test report: Rupert Kohlhäufel

2. Summary of Test Results

The tested sample (including accessories) complies with the requirements set forth in the Code of Regulations Part 15 Subpart C, Sections §15.205, §15.207, §15.209 and §15.225 (intentional radiators) of the Federal Communication Commission (FCC).



Johann Roidt
Technical Manager



Rupert Kohlhäufel
Test Engineer

3. Operation Mode of EUT

Continuously reading a transponder

4. Configuration of EUT and Peripheral Devices

Configuration of cables of EUT and peripheral devices

- Interface cable RS232

Configuration of peripheral devices connected to EUT

Not applicable

5. Measuring Methods

5.1. Radiated Emission 9 kHz - 30 MHz (§15.209, §15.205 a,b)

Radiated emissions were measured over the frequency range from 9 kHz to 30 MHz. The bandwidth of the EMI-receiver was set to 200 Hz below 150 kHz and to 10 kHz above 150 kHz. According to section §15.209 (d) final measurements were performed with the detector set to CISPR quasi-peak except for the frequency bands 9 - 90 kHz and 110 - 490 kHz where average detector is employed.

The test setup was made in accordance with ANSI C63.4-1992.

Preliminary scans were taken in a shielded room with a test-distance of 3 meters and detector-function of EMI-receiver set to peak to determine the radiated EMI-profile of the EUT. EUT was rotated all around and cables and equipment were placed and moved within the range of positions likely to find their maximum emissions. Final test was performed using an open-area test-site with a test-distance of 30 meters. In cases the regulation requires testing at 300 meters distance the results will be extrapolated by using either an inverse linear distance extrapolation factor of 40 dB/decade or the extrapolation factor will be determined by making a second measurement at 10 meters distance. The provisions of §15.31 (d) and §15.31 (f) apply.

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):

03, 04, 37, 60, 63, 66

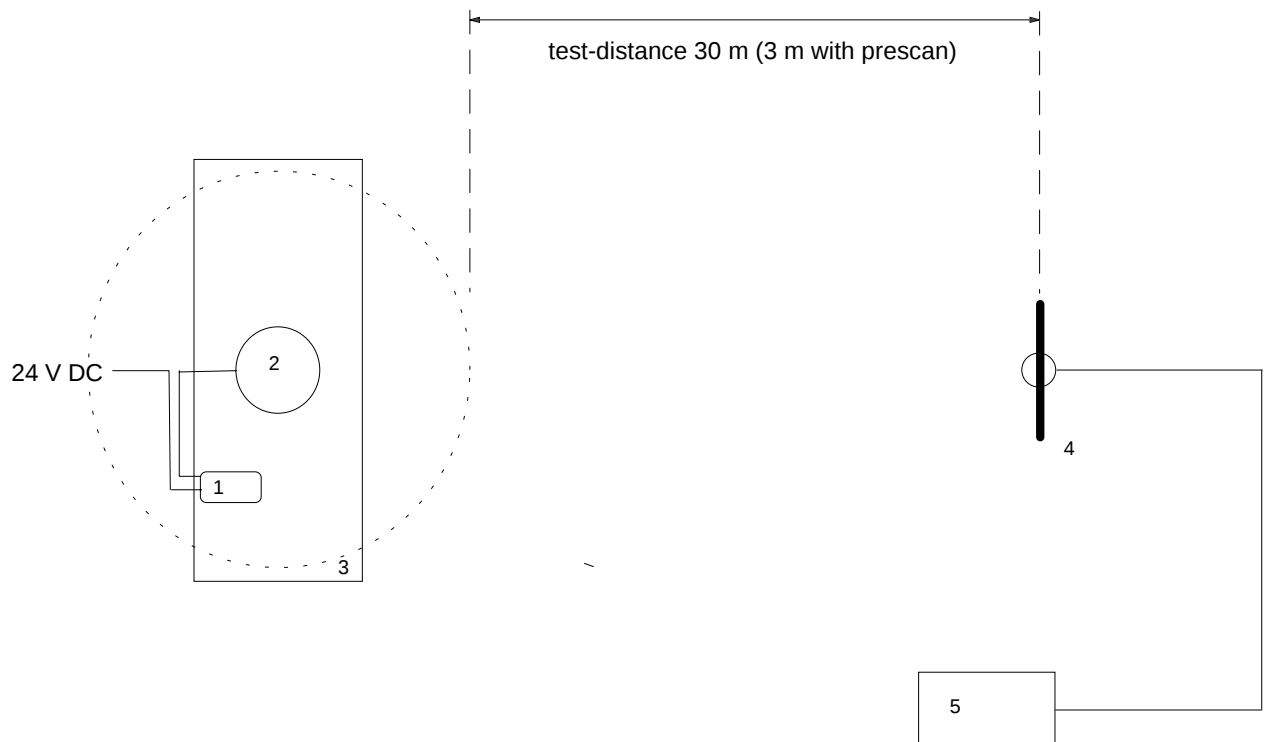


Figure 1: Measurement setup for radiated emission test below 30 MHz

- 1 Base unit (EUT)
- 2 RF-antenna (EUT)
- 3 Wooden table
- 4 Measurement antenna
- 5 Test receiver

5.2. Radiated Emission 30 MHz - 1 GHz (§15.209)

Radiated emissions were measured over the frequency range from 30 MHz to 1 GHz. The bandwidth of the EMI-receiver was set to 120 kHz and the detector-function was set to CISPR quasi-peak.

The test setup was made in accordance with ANSI C63.4-1992. Measurements were made in both the horizontal and vertical planes of polarization. Preliminary scans were taken in a semi-anechoic room using a spectrum analyzer with the detector function set to peak. All tests were performed at a test-distance of 3 meters. For final testing an open-area test-site was used. During the tests the EUT was rotated all around and the receiving-antenna was raised and lowered from 1 meter to 4 meters to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

See figure 2 for the measurement setup.

Test equipment used (see equipment list for details):

01, 06, 12, 38, 39, 40, 41, 58, 61, 64, 66

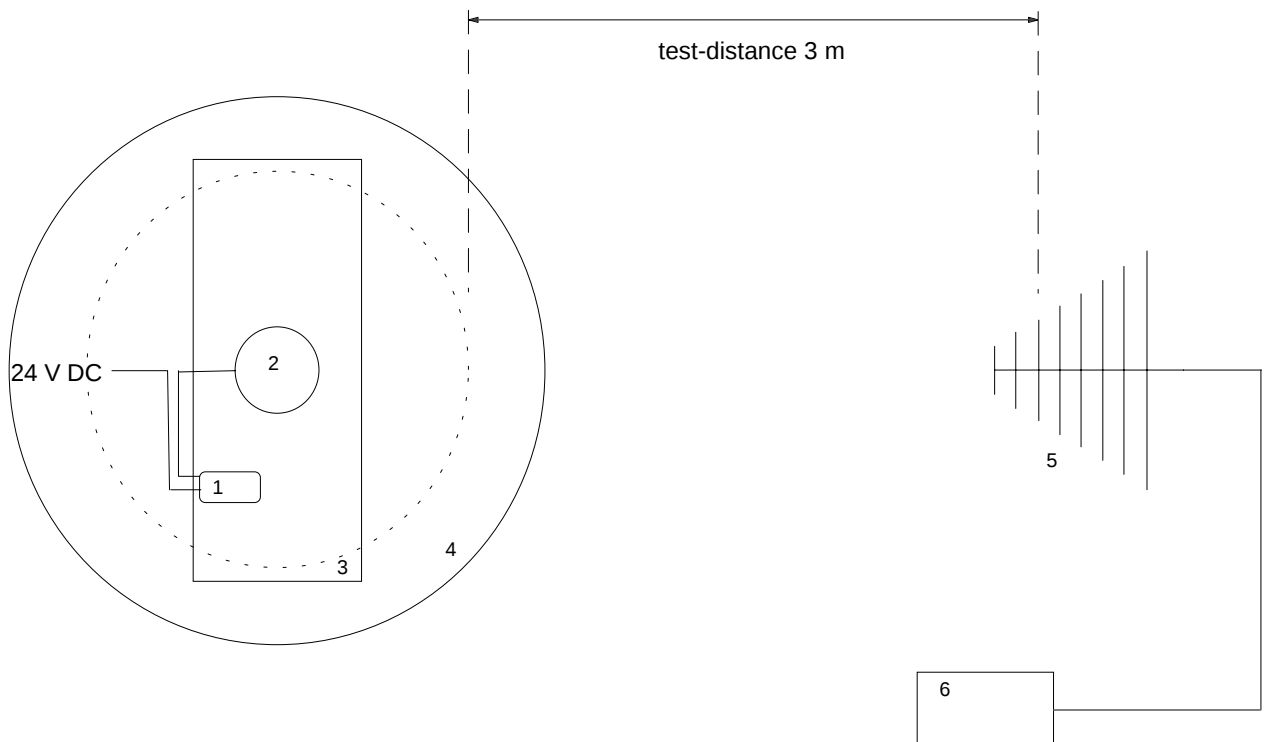


Figure 2: Measurement setup for radiated emission test above 30 MHz

- 1 Base unit (EUT)
- 2 RF-antenna (EUT)
- 3 Wooden table
- 4 Turn table
- 5 Measurement antenna
- 6 Test receiver

5.3. Frequency tolerance for operation within the band 13.553 - 13.567 MHz (§15.225)

The measurements were performed using a peak-detector with resolution and video bandwidth of the spectrum analyzer set to 30 Hz and center frequency adjusted to operating frequency of the EUT.

According to section §15.225 (c) the measured carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

For battery operated equipment, the equipment tests are performed using a new battery.

See figure 3 for the measurement setup.

Test equipment used (see equipment list for details):

02, 54, 55

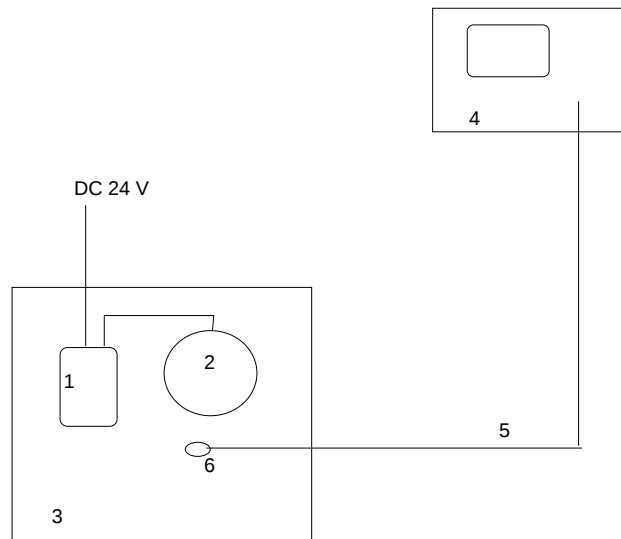


Figure 3: Measurement setup for frequency tolerance of the carrier signal

- 1 Base unit (EUT)
- 2 RF-antenna (EUT)
- 3 Temperature test chamber
- 4 Spectrum analyzer
- 5 RF cable
- 6 Test probe

6. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.


No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	R 3271	05050023	Advantest
02	EMI Test Receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
03	Test Receiver	ESH 3	880112/032	Rohde & Schwarz
04	Test Receiver	ESHS 10	860043/016	Rohde & Schwarz
05	Test Receiver	ESV	881414/009	Rohde & Schwarz
06	Test Receiver	ESVP	881120/024	Rohde & Schwarz
07	Audio Analyzer	UPA	862954	Rohde & Schwarz
08	Power Meter	NRVS	836856/015	Rohde & Schwarz
09	Power Sensor	NRV-Z52	837901/030	Rohde & Schwarz
10	Power Sensor	NRV-Z4	863828/015	Rohde & Schwarz
11	Preamplifier	ESV-Z3	860907/004	Rohde & Schwarz
12	Preamplifier	R14601		Advantest
13	Preamplifier	ACX/080-3030	32640	CTT
14	Preamplifier	ACO/180-3530	32641	CTT
15	Signal Generator	SMS	872166/039	Rohde & Schwarz
16	Signal Generator	HP 8673 D	2930A00966	Hewlett Packard
17	Waveform Generator	HP 33120 A	US34005375	Hewlett Packard
18	Attenuator 20 dB	4776-20	9503	Narda
19	Attenuator 10 dB	4776-10	9412	Narda
20	Pulse Limiter	ESH 3-Z2	1144	Rohde & Schwarz
21	Pulse Limiter	11947 A	3107A00566	Hewlett Packard
22	V-Network	ESH 3-Z5	862770/018	Rohde & Schwarz
23	V-Network	ESH 3-Z5	894785/005	Rohde & Schwarz
24	V-Network	ESH 3-Z5	830952/025	Rohde & Schwarz
25	V-Network	ESH 3-Z6	830722/010	Rohde & Schwarz
26	V-Network	NSLK 8127	8127152	Schwarzbeck
27	V-Network	NNLA 8119	8119148	Schwarzbeck
28	V-Network	SE 01	01	Senton
29	T-Network	ESH 3-Z4	890602/011	Rohde & Schwarz
30	T-Network	ESH 3-Z4	890602/012	Rohde & Schwarz
31	High Impedance Probe	TK 9416	01	Schwarzbeck
32	High Impedance Probe	TK 9416	02	Schwarzbeck
33	Current Probe	ESH 2-Z1	863366/18	Rohde & Schwarz
34	Current Probe	ESV-Z1	862553/3	Rohde & Schwarz

No.	Type	Model	Serial Number	Manufacturer
35	Absorbing Clamp	MDS 21	80911	Lüthi
36	Absorbing Clamp	MDS 21	79690	Lüthi
37	Loop Antenna	HFH2-Z2	882964/1	Rohde & Schwarz
38	Biconical Antenna	HK 116	842204/001	Rohde & Schwarz
39	Biconical Antenna	HK 116	836239/02	Rohde & Schwarz
40	Log. Periodic Antenna	HL 223	841516/023	Rohde & Schwarz
41	Log. Periodic Antenna	HL 223	834408/12	Rohde & Schwarz
42	Horn Antenna	3115	9508-4553	Emco
43	Horn Antenna	3160-03	9112-1003	Emco
44	Horn Antenna	3160-04	9112-1001	Emco
45	Horn Antenna	3160-05	9112-1001	Emco
46	Horn Antenna	3160-06	9112-1001	Emco
47	Horn Antenna	3160-07	9112-1008	Emco
48	Horn Antenna	3160-08	9112-1002	Emco
49	Horn Antenna	3160-09	9403-1025	Emco
50	Digital multimeter	199	463386	Keithley
51	DC Power Supply	NGSM 32/10	203	Rohde & Schwarz
52	DC Power Supply	NGB	2455	Rohde & Schwarz
53	DC Power Supply	NGA	386	Rohde & Schwarz
54	Temperature Test Chamber	HT4010	07065550	Heraeus
55	Cable	RG214	1309	Senton
56	Cable	200CM_001	1357	Rosenberger
57	Cable	150CM_001	1479	Rosenberger
58	Cable Set EG1	RG214	1189 - 1191	Senton
59	Cable Set Cabine 1	RG214		Senton
60	Cable Set Cabine 2	RG214		Senton
61	Cable Set Cabine 3	RG214		Senton
62	Shielded Room	No. 1	1451	Senton
63	Shielded Room	No. 2	1452	Senton
64	Semi-anechoic Chamber	No. 3	1453	Siemens
65	Shielded Room	No. 4	1454	Euroshield
66	Open Area Test Site	EG 1		Senton
67	Cable for Antenna Connector			Lucent Technologies
68	DC Block 0.01-18GHz		8037	Inmet Corp.
69	High pass filter			Lucent Technologies

7. Photographs Taken During Testing



Photos No. 7.1 - 7.2

Test setup for radiated emission test 9 kHz - 30 MHz

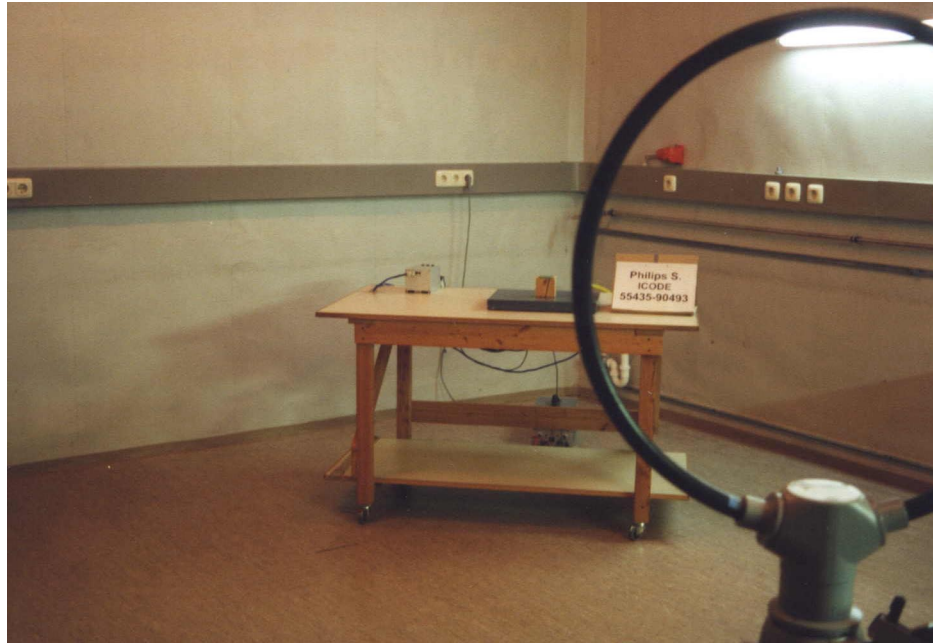

Photos No. 7.3 - 7.4

**Test setup for radiated emission pre-test 30 MHz - 1 GHz
(semi anechoic room)**

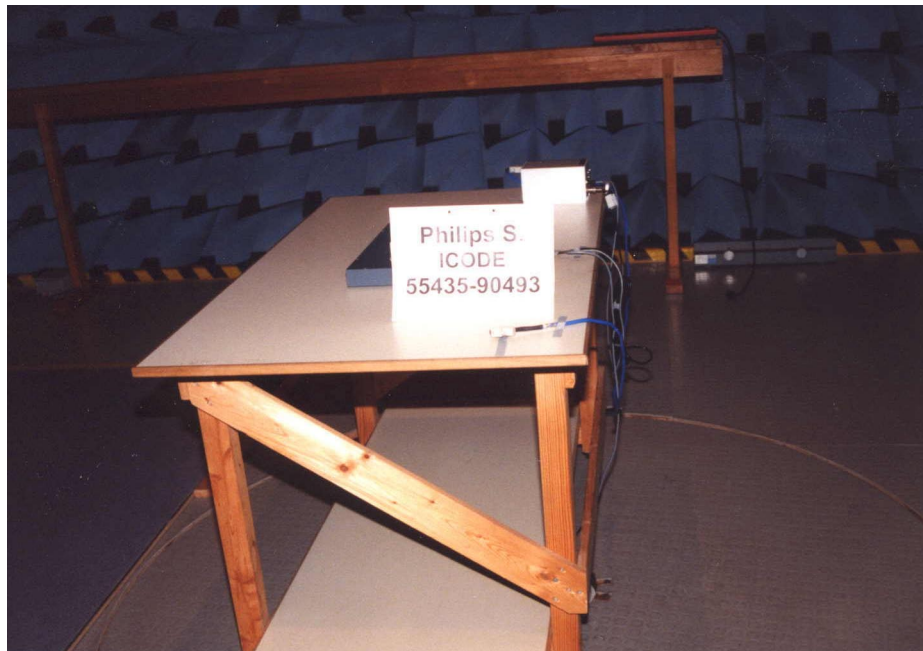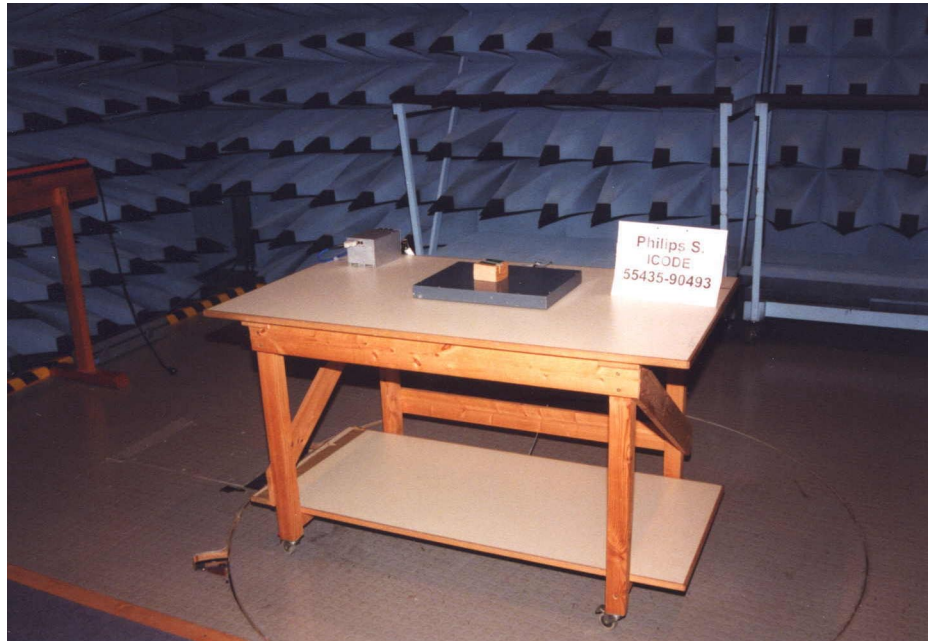

Photos No. 7.5 - 7.6

**Test setup for radiated emission final test 30 MHz - 1 GHz
(open area test site)**



8. List of Measurements

FCC Part 15 Subpart C			
Section(s):	Test	Page	Result
§15.207	Conducted emission test 450 kHz - 30 MHz		Not applicable
§15.31 d,f §15.209 §15.205.a,b	Radiated emission test 9 kHz - 30 MHz	22-26	Test passed
§15.209	Radiated emission test 30 MHz - 1 GHz	27-38	Test passed
§15.225	Frequency tolerance	39-43	Test passed

9. Test Results

Radiated Emission Test 9 kHz - 30 MHz
according to FCC Part 15 Subpart C, §15.209

Model: ICODE Evaluation Kit
Type: RF-Identification system
Serial No.: Prototype no. 1
Applicant: Philips Semiconductors Gratkorn GmbH
Test-site: Open area test-site
Test distances: 10 meters and 30 meters
Date of test: 08/02/1999
Operator: R. Kohlhäufel

Mode: - FCC test setup
- with tag (distance = 7cm)

Frequency [MHz]	Detector	Measuring Bandwidth [kHz]	Received Voltage		Correction [dB]	Fieldstrength			Limit [dBµV/m]
			10 m [dBµV]	30 m [dBµV]		10 m [dBµV/m]	30 m [dBµV/m]	300 m [dBµV/m]	
13.560	QP	10.0	56.2	35.0	20.0	76.2	55.0		
13.560	AV	10.0	55.6	34.1	20.0	75.6	54.1		30.0

Note 1: Fieldstrength value in 300 meters distance is extrapolated according to §15.31 f(2) performing two measurements in 10 and 30 meters distance

Note 2: Frequencies are selected according to prescan in shielded room with test distance 3 meters

Result: The limits are kept.

Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Shielded room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test: 08/02/1999
Operator: R. Kohlhäufel


Test performed: automatically
File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

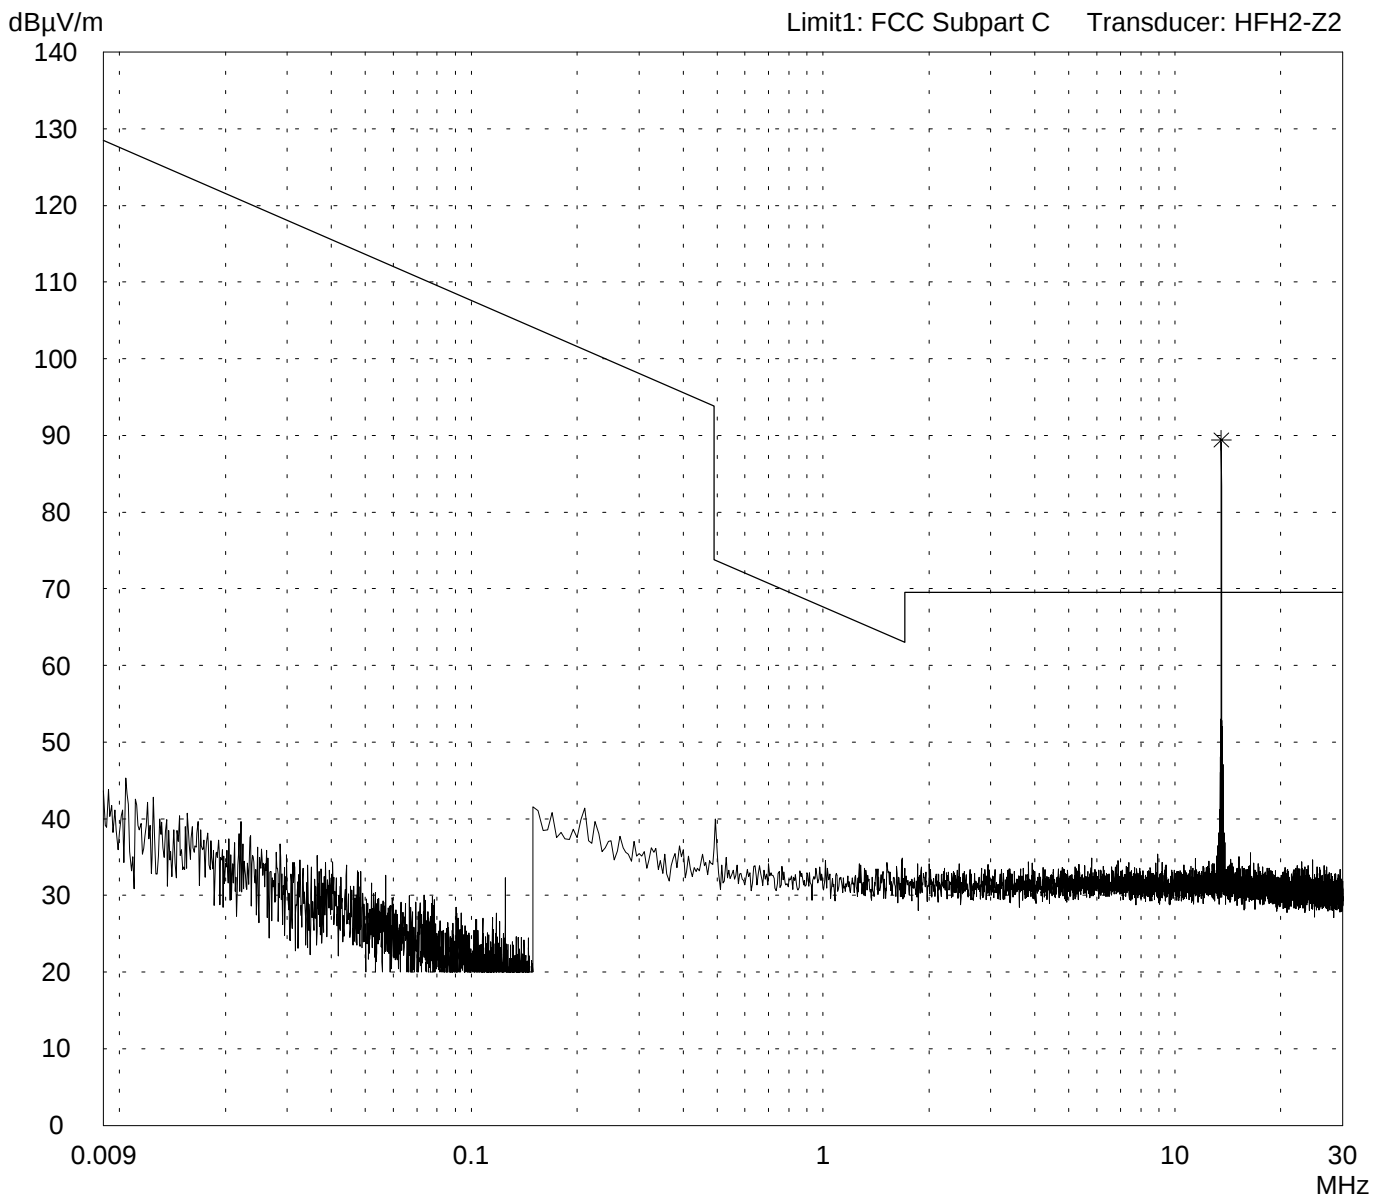

Result:
Prescan

Project file:
55435-90493

Page 23 of 43 Pages

Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: ICODE Evaluation Kit	Mode: Reading tag
Serial no.: Prototype 1	External power supply: DC 24 V
Applicant: Philips Semiconductors Gratkorn GmbH	
Test site: Shielded room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 08/02/1999	
Operator: R. Kohlhäufel	
Test performed: automatically	File name:

Detector:	Final results:
Peak / Final Results: QP	20 dB Margin 25 Subranges

Frequency MHz	Reading dBμV	Correction factor dB	Value dBμV/m	Limit dBμV/m	Limit exceeded
13.56	69.4	20.0	89.4	69.5	*

Result: Prescan	Project file: 55435-90493	Page 24 of 43 Pages
--------------------	------------------------------	---------------------

Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Shielded room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test: 08/02/1999
Operator: R. Kohlhäufel


Test performed: automatically
File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Average / Final Results: AV

Final results:
20 dB Margin 25 Subranges

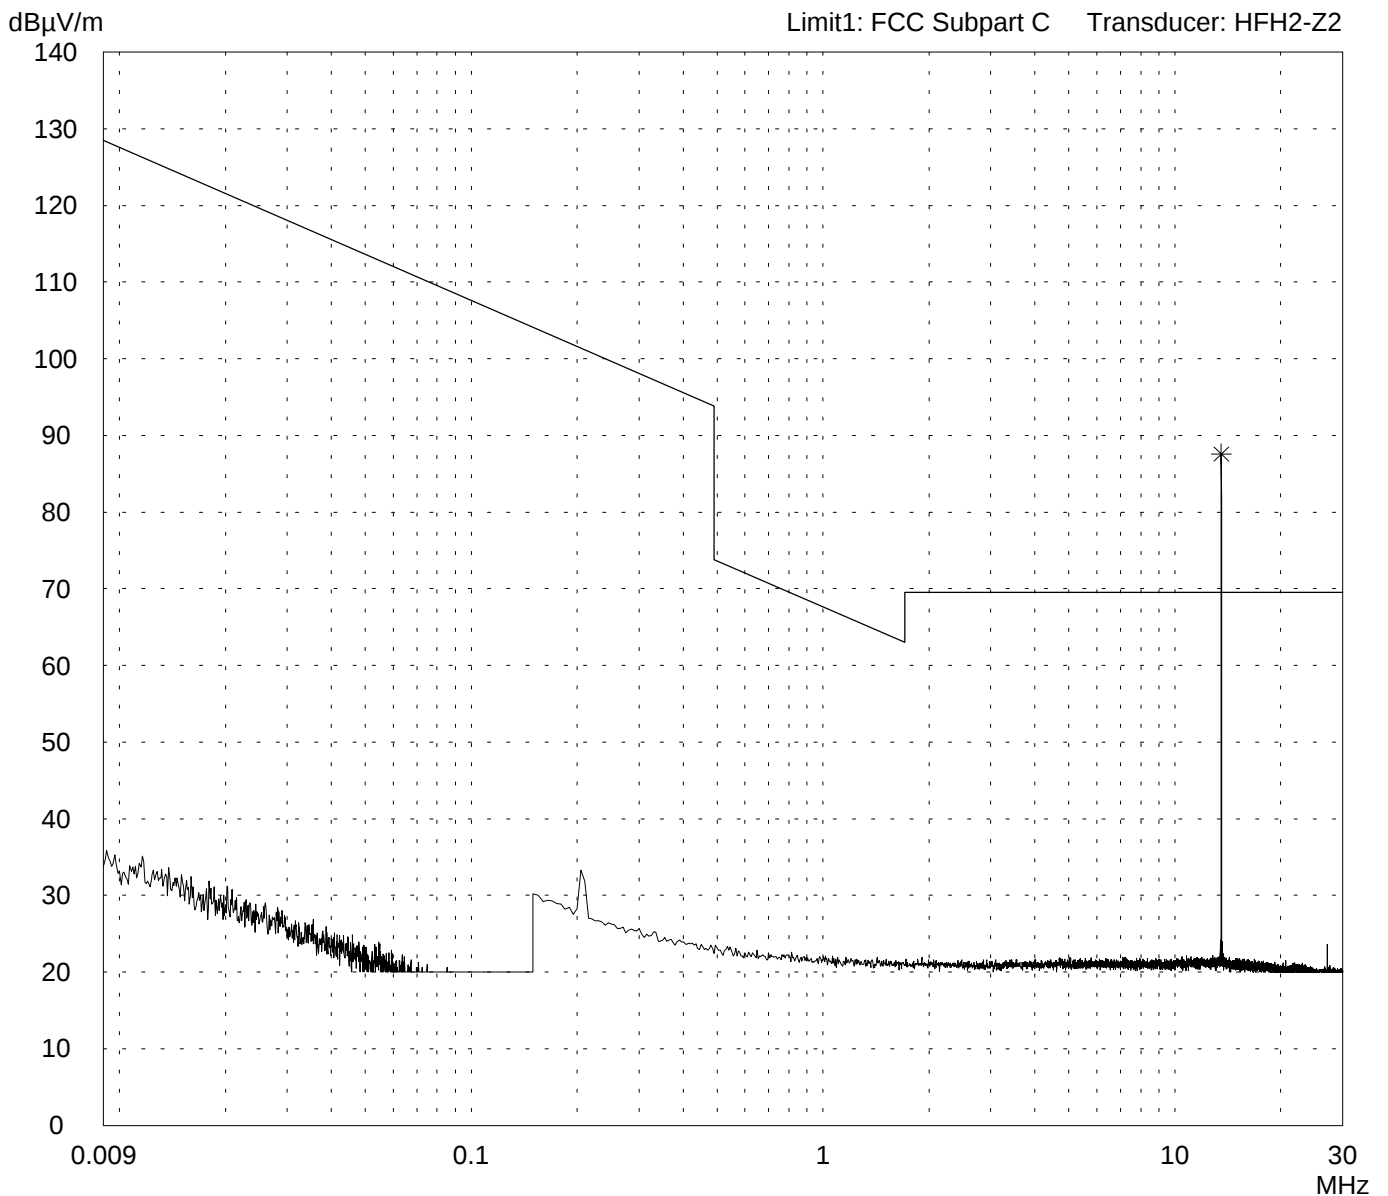

Result:
Prescan

Project file:
55435-90493

Page 25 of 43 Pages

Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: ICODE Evaluation Kit	Mode: Reading tag
Serial no.: Prototype 1	External power supply: DC 24 V
Applicant: Philips Semiconductors Gratkorn GmbH	
Test site: Shielded room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 08/02/1999	
Operator: R. Kohlhäufel	
Test performed: automatically	File name:

Detector: Average / Final Results: AV	Final results: 20 dB Margin	25 Subranges
--	--------------------------------	--------------

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
13.56	67.6	20.0	87.6	69.5	*

Result: Prescan	Project file: 55435-90493	Page 26 of 43 Pages
--------------------	------------------------------	---------------------

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Open area test-site I

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 08/02/1999 Operator:
R. Kohlhäufel


Test performed: by hand File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Quasi-Peak

List of values:
Selected by hand

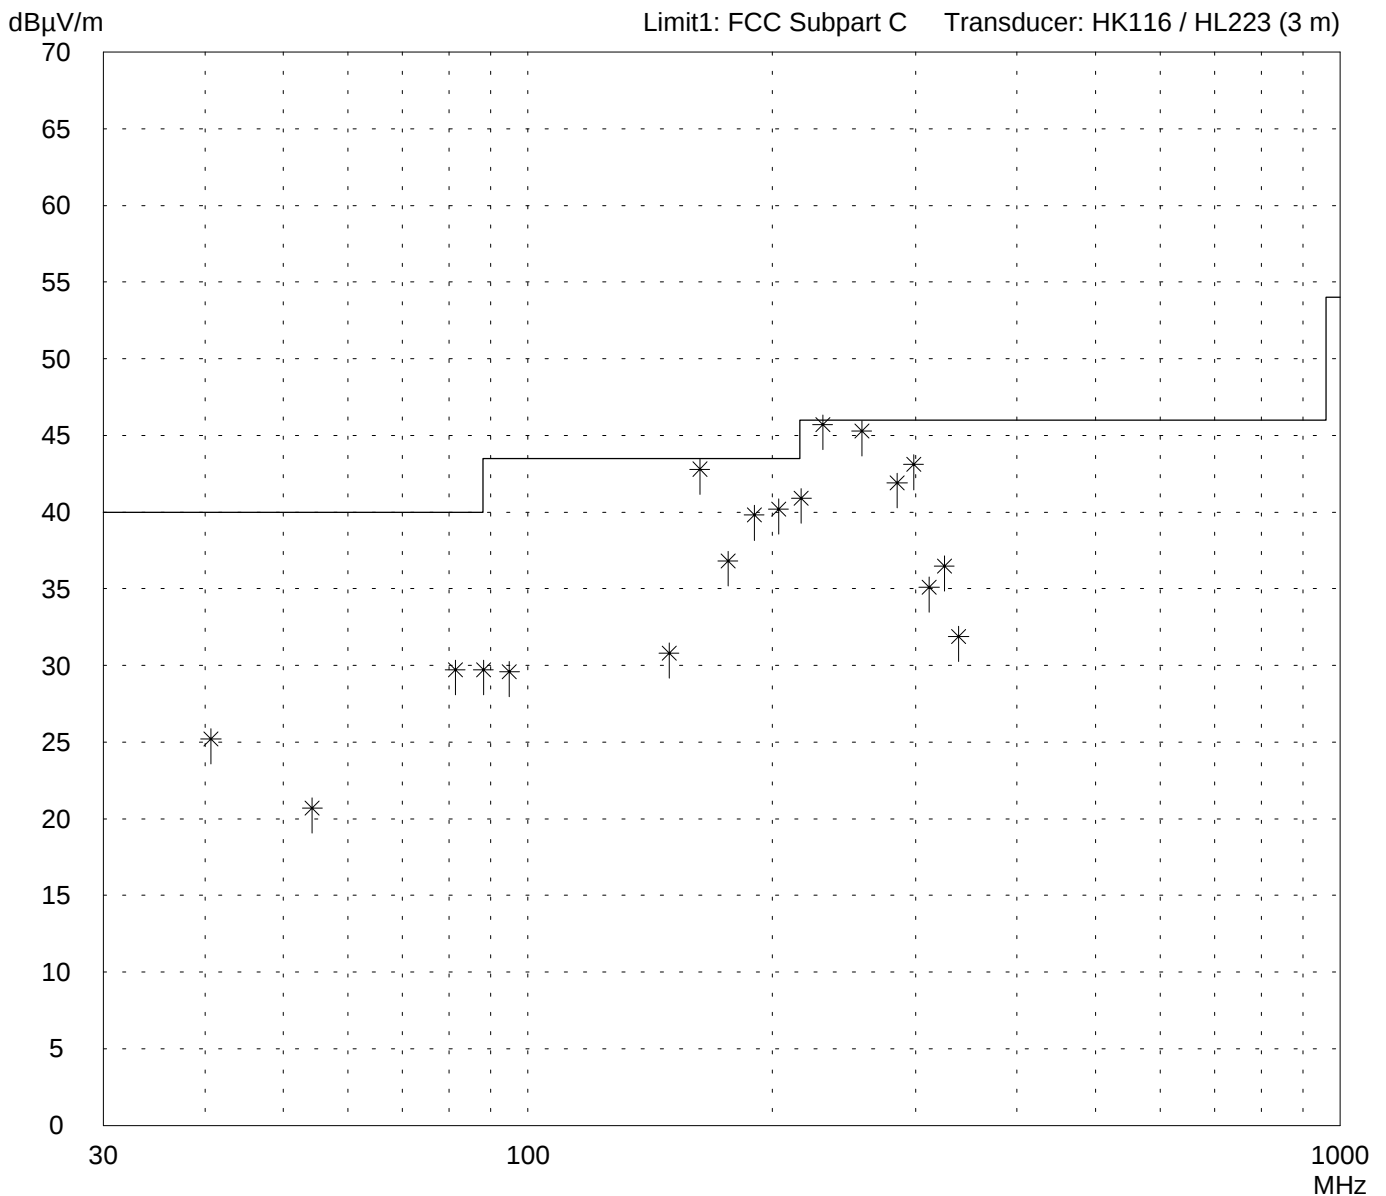

Result:
Limit kept

Project file:
55435-90493

Page 27 of 43 Pages

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Open area test-site I

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 08/02/1999 Operator:
R. Kohlhäufel

Test performed: by hand File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Quasi-Peak

List of values:
Selected by hand

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
40.69	12.9	12.3	25.2	40.0	
54.24	10.2	10.5	20.7	40.0	
81.36	19.4	10.3	29.7	40.0	
88.14	19.0	10.7	29.7	43.5	
94.88	18.5	11.1	29.6	43.5	
149.16	16.0	14.8	30.8	43.5	
162.72	27.3	15.5	42.8	43.5	
176.28	20.6	16.2	36.8	43.5	
189.84	23.1	16.7	39.8	43.5	
203.40	23.0	17.2	40.2	43.5	
216.96	23.2	17.7	40.9	46.0	
230.52	27.6	18.1	45.7	46.0	
257.64	25.9	19.4	45.3	46.0	
284.76	20.0	21.9	41.9	46.0	
298.32	20.1	23.0	43.1	46.0	
311.88	17.9	17.2	35.1	46.0	
325.45	18.7	17.8	36.5	46.0	
339.00	13.6	18.3	31.9	46.0	

Result:
Limit kept

Project file:
55435-90493

Page 28 of 43 Pages

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Open area test-site I

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 08/02/1999 Operator:
R. Kohlhäufl


Test performed: by hand File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Quasi-Peak

List of values:
Selected by hand

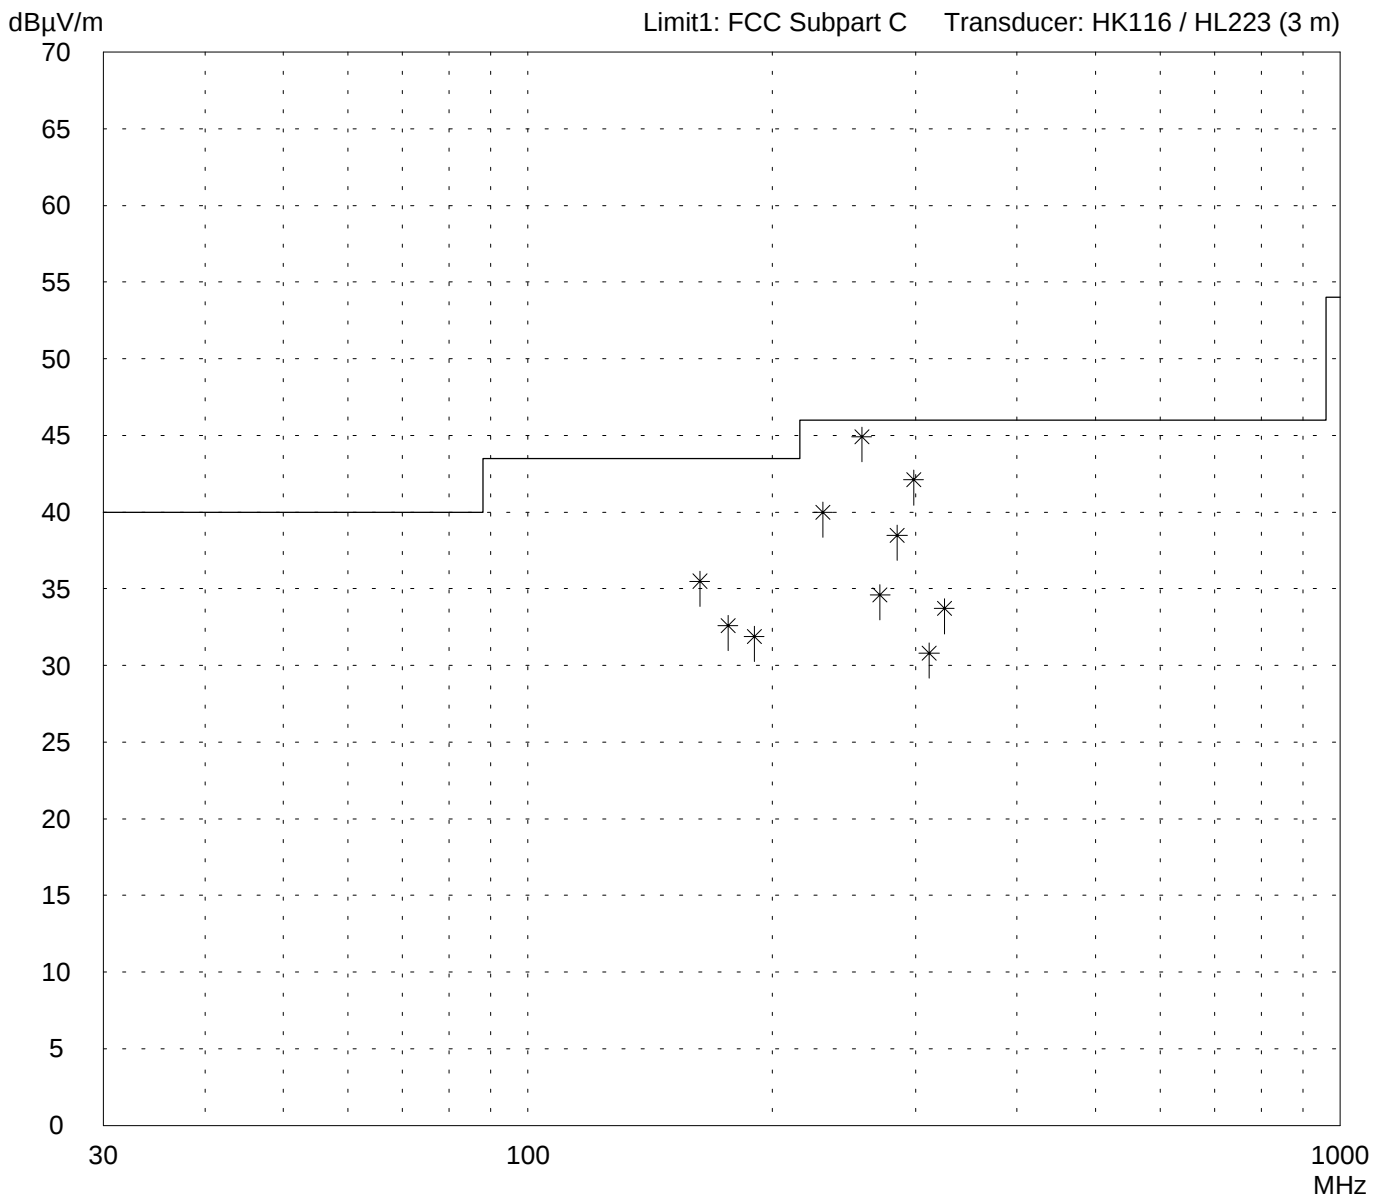

Result:
Limit kept

Project file:
55435-90493

Page 29 of 43 Pages

Radiated Emission Test 30 MHz - 1 GHz according to FCC Part 15 Subpart C

Model: ICODE Evaluation Kit	Mode: Reading tag
Serial no.:	External power supply: DC 24 V
Applicant: Philips Semiconductors Gratkorn GmbH	
Test site: Open area test-site I	
Tested on: Test distance 3 meters Vertical Polarization	
Date of test: 08/02/1999	Operator: R. Kohlhäufel
Test performed: by hand	File name:

Detector: Quasi-Peak	List of values: Selected by hand
-------------------------	-------------------------------------

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
162.72	20.0	15.5	35.5	43.5	
176.29	16.4	16.2	32.6	43.5	
189.84	15.2	16.7	31.9	43.5	
230.52	21.9	18.1	40.0	46.0	
257.64	25.5	19.4	44.9	46.0	
271.20	13.9	20.7	34.6	46.0	
284.76	16.6	21.9	38.5	46.0	
298.32	19.1	23.0	42.1	46.0	
311.88	13.6	17.2	30.8	46.0	
325.45	15.9	17.8	33.7	46.0	

Result: Limit kept	Project file: 55435-90493	Page 30 of 43 Pages
-----------------------	------------------------------	---------------------

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 07/29/1999 Operator: R. Kohlhäufel


Test performed: automatically File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

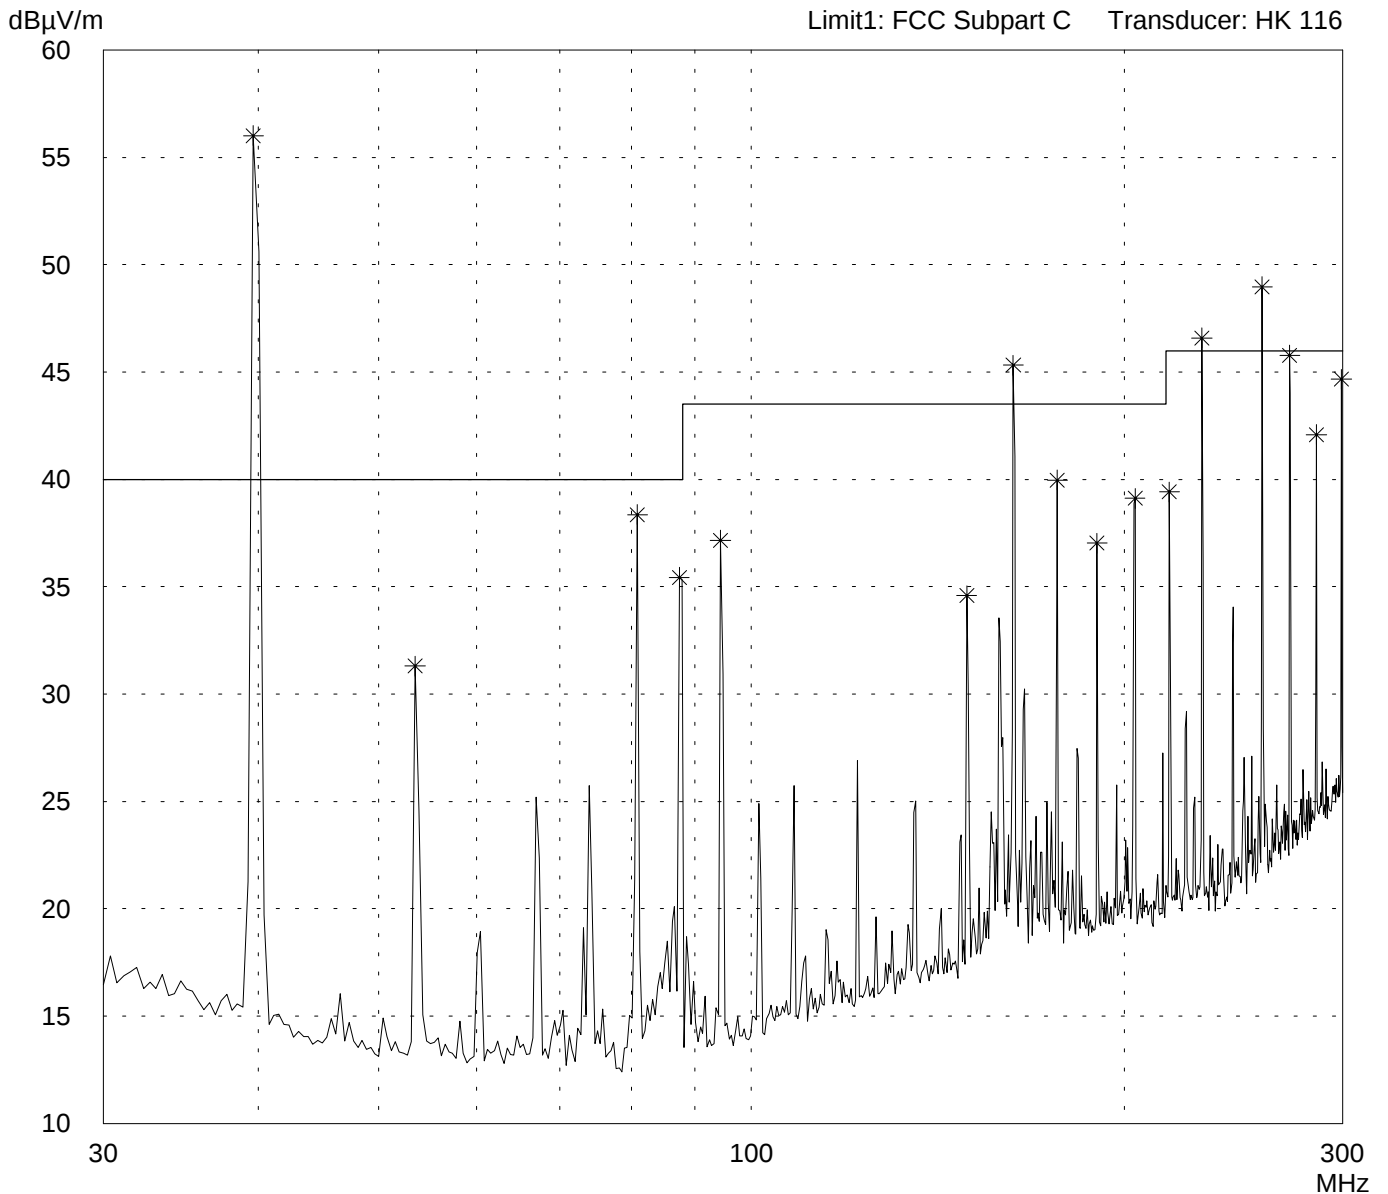

Result:
Prescan

Project file:
55435-90493

Page 31 of 43 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 07/29/1999 Operator: R. Kohlhäufel

Test performed: automatically File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

Frequency MHz	Reading dBμV	Correction factor dB	Value dBμV/m	Limit dBμV/m	Limit exceeded
39.64	38.6	17.4	56.0	40.0	*
53.53	15.8	15.5	31.3	40.0	
80.91	23.2	15.2	38.4	40.0	
87.47	19.8	15.6	35.4	40.0	
94.41	21.1	16.1	37.2	43.5	
149.19	15.0	19.6	34.6	43.5	
162.69	25.2	20.1	45.3	43.5	*
176.57	19.1	20.9	40.0	43.5	
190.07	15.5	21.5	37.0	43.5	
203.96	17.1	22.0	39.1	43.5	
217.46	16.9	22.5	39.4	46.0	
230.96	23.7	22.9	46.6	46.0	*
258.34	25.1	23.9	49.0	46.0	*
271.84	20.6	25.2	45.8	46.0	
285.73	15.6	26.5	42.1	46.0	
299.23	17.0	27.7	44.7	46.0	

Result:
Prescan

Project file:
55435-90493

Page 32 of 43 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 07/29/1999 Operator: R. Kohlhäufel


Test performed: automatically File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

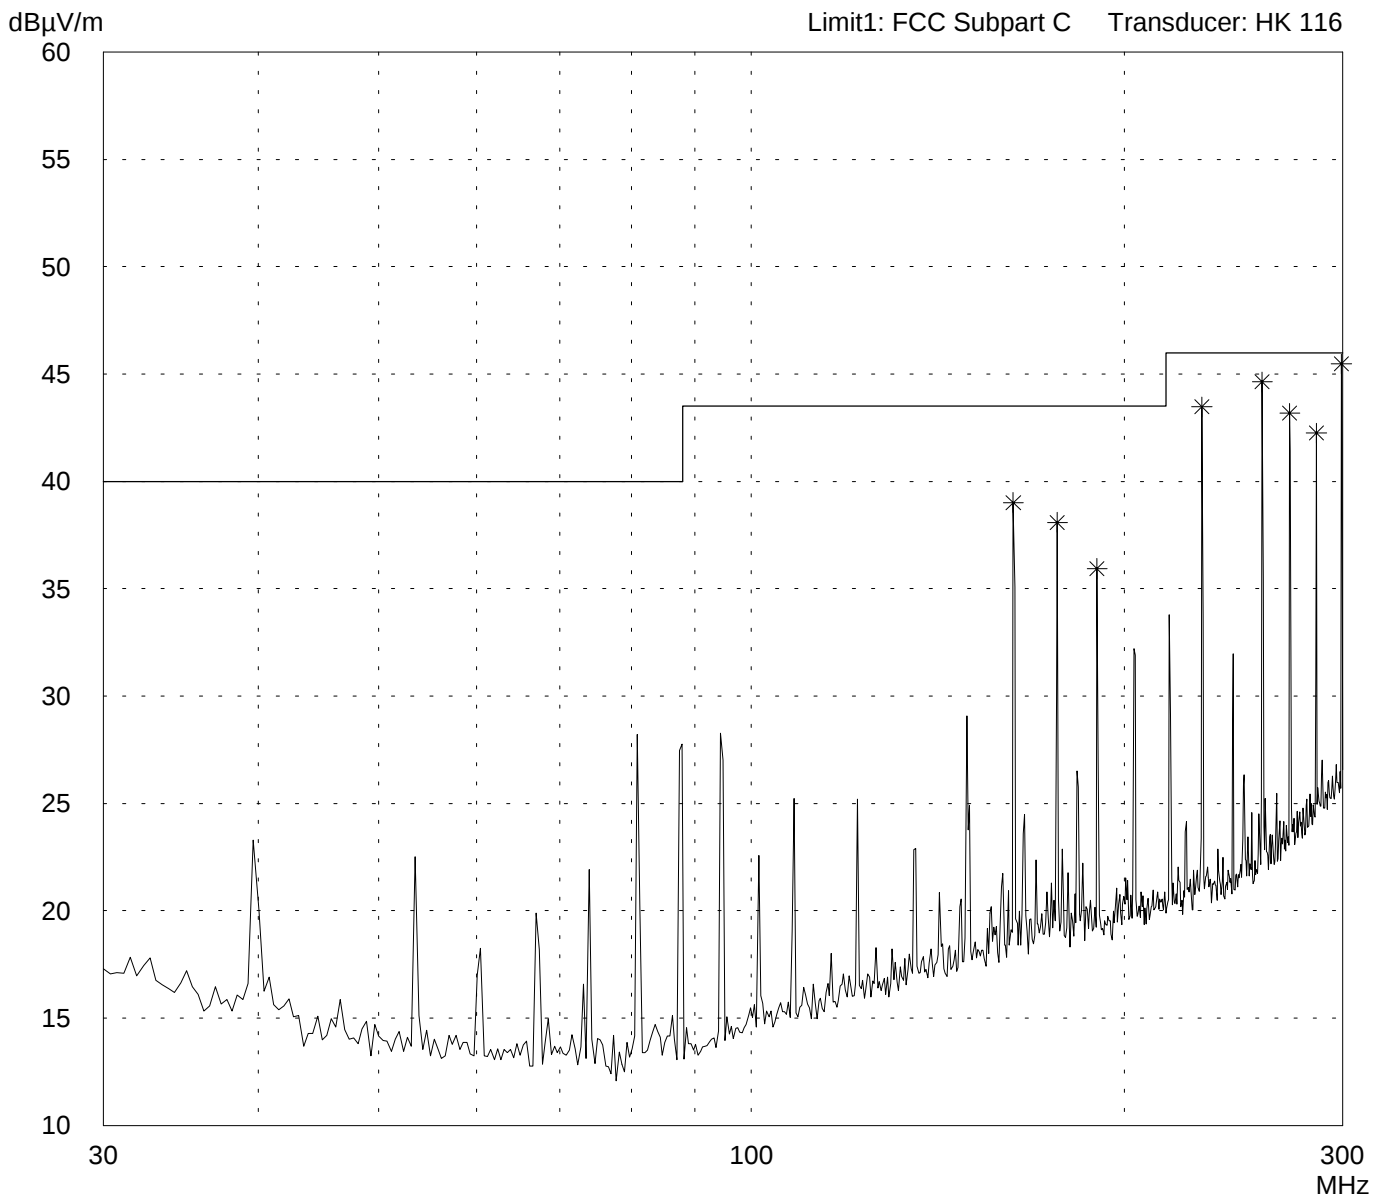

Result:
Prescan

Project file:
55435-90493

Page 33 of 43 Pages

Radiated Emission Test 30 MHz - 300 MHz according to FCC Part 15 Subpart C

Model: ICODE Evaluation Kit	Mode: Reading tag
Serial no.: Prototype 1	External power supply: DC 24 V
Applicant: Philips Semiconductors Gratkorn GmbH	
Test site: Semi anechoic room, cabin no. 3	
Tested on: Test distance 3 meters Vertical Polarization	
Date of test: 07/29/1999	Operator: R. Kohlhäufl
Test performed: automatically	File name:

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

[illegible]

Result: Prescan	Project file: 55435-90493	Page 34 of 43 Pages
--------------------	------------------------------	---------------------

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Horizontal Polarization

Date of test: 07/29/1999 Operator: R. Kohlhäufel


Test performed: automatically File name:

Mode:
Reading tag

External power supply: DC 24 V

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

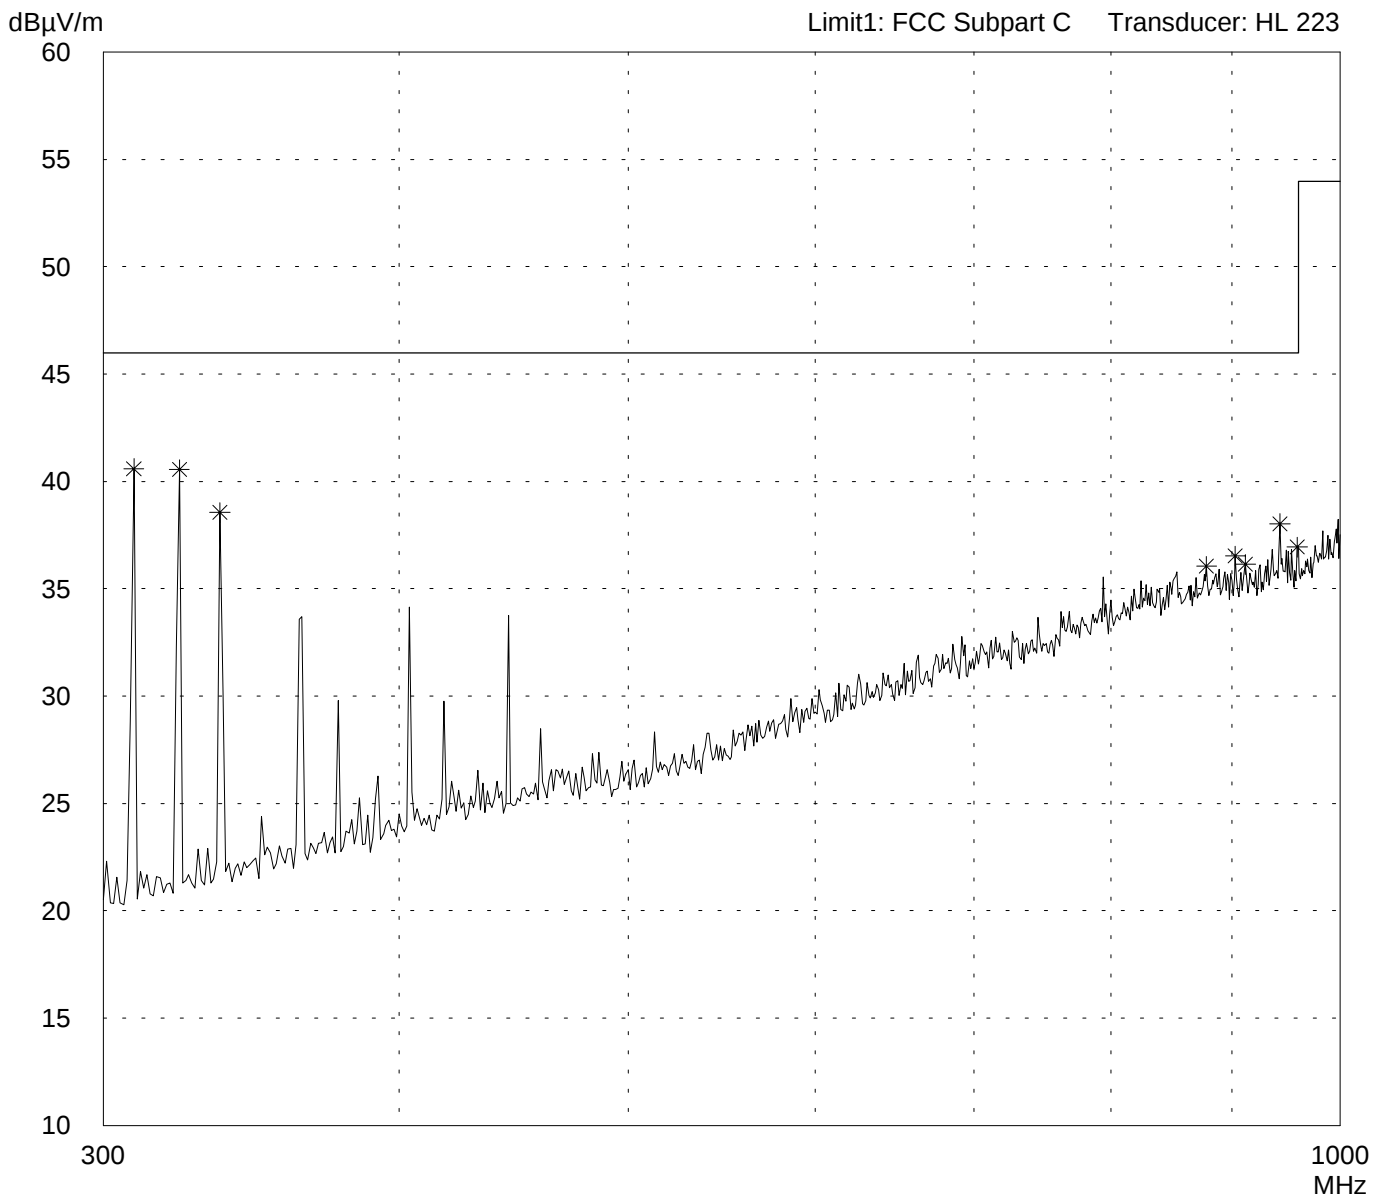

Result:
Prescan

Project file:
55435-90493

Page 35 of 43 Pages

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C
--

Model: ICODE Evaluation Kit	Mode: Reading tag
Serial no.: Prototype 1	External power supply: DC 24 V
Applicant: Philips Semiconductors Gratkorn GmbH	
Test site: Semi anechoic room, cabin no. 3	
Tested on: Test distance 3 meters Horizontal Polarization	
Date of test: 07/29/1999	
Test performed: automatically	File name:

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

[illegible]

Result: Prescan	Project file: 55435-90493	Page 36 of 43 Pages
--------------------	------------------------------	---------------------

Radiated Emission Test 300 MHz - 1 GHz according to FCC Part 15 Subpart C

Model:
ICODE Evaluation Kit

Serial no.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Test site:
Semi anechoic room, cabin no. 3

Tested on:
Test distance 3 meters
Vertical Polarization

Date of test: 07/29/1999 Operator: R. Kohlhäufel

Test performed: automatically File name:

Mode:
Reading tag


External power supply: DC 24 V

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB μ V/m

Limit1: FCC Subpart C Transducer: HL 223

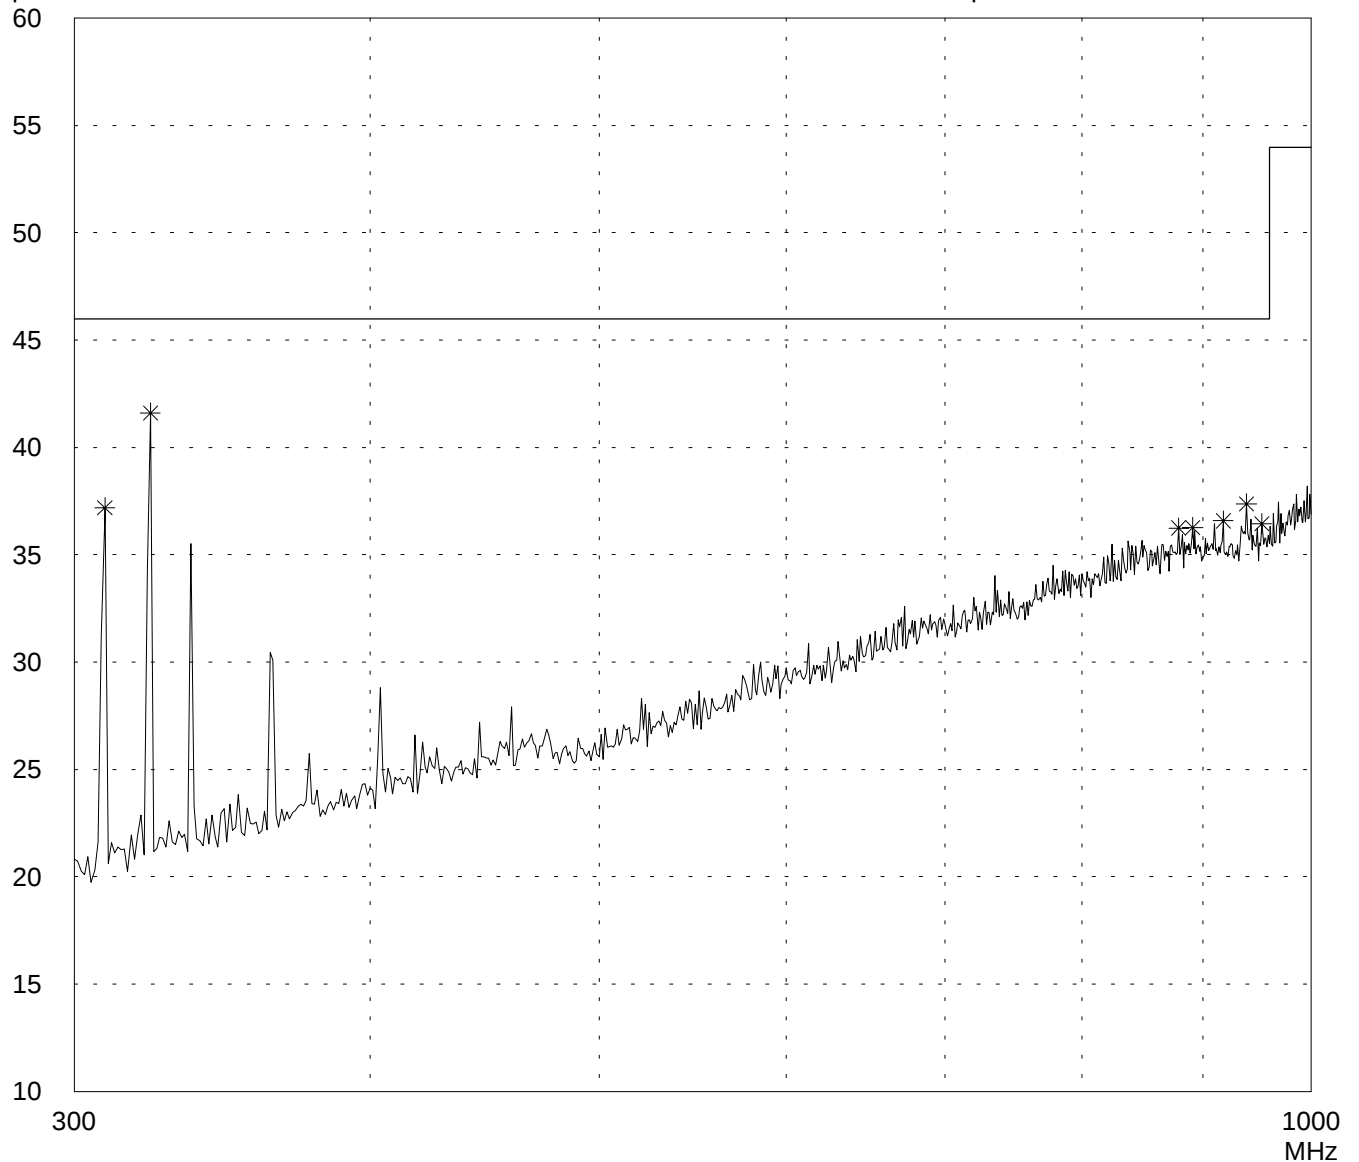

Result:
Prescan

Project file:
55435-90493

Page 37 of 43 Pages

Radiated Emission Test 300 MHz - 1 GHz
according to FCC Part 15 Subpart C

Model: ICODE Evaluation Kit	Mode: Reading tag
Serial no.: Prototype 1	External power supply: DC 24 V
Applicant: Philips Semiconductors Gratkorn GmbH	
Test site: Semi anechoic room, cabin no. 3	
Tested on: Test distance 3 meters Vertical Polarization	
Date of test: 07/29/1999	Operator: R. Kohlhäufl
Test performed: automatically	File name:

Detector: Peak	List of values: 10 dB Margin 50 Subranges
-------------------	---

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
309.0	15.2	22.0	37.2	46.0	
323.0	19.0	22.6	41.6	46.0	
879.0	1.8	34.5	36.3	46.0	
891.0	1.6	34.7	36.3	46.0	
918.0	1.9	34.7	36.6	46.0	
939.0	2.8	34.6	37.4	46.0	
953.0	1.7	34.7	36.4	46.0	

Result: Prescan	Project file: 55435-90493	Page 38 of 43 Pages
--------------------	------------------------------	---------------------

frequency tolerance according FCC Part 15 Subpart C Sect.15.225

Model:
ICODE Evaluation Kit

Serial No.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Mode:
Continuously reading tag

Normal supply voltage: DC 24.0 V

operating frequency: 13.56 MHz

supply voltage variation:
DC 20.4 V to 27.6 V (85% to 115%)


temperature variation: -20°C to +50°C

frequency tolerance: +/- 1.356 kHz (+/- 0.01%)

minimal frequency: 13.558644 MHz
maximal frequency: 13.561356 MHz

Ref.Level 80 dB μ V/m
10 dB dB/Div.

ATT 10 dB selected temperature: +20°C
selected supply voltage: DC 24.0 V

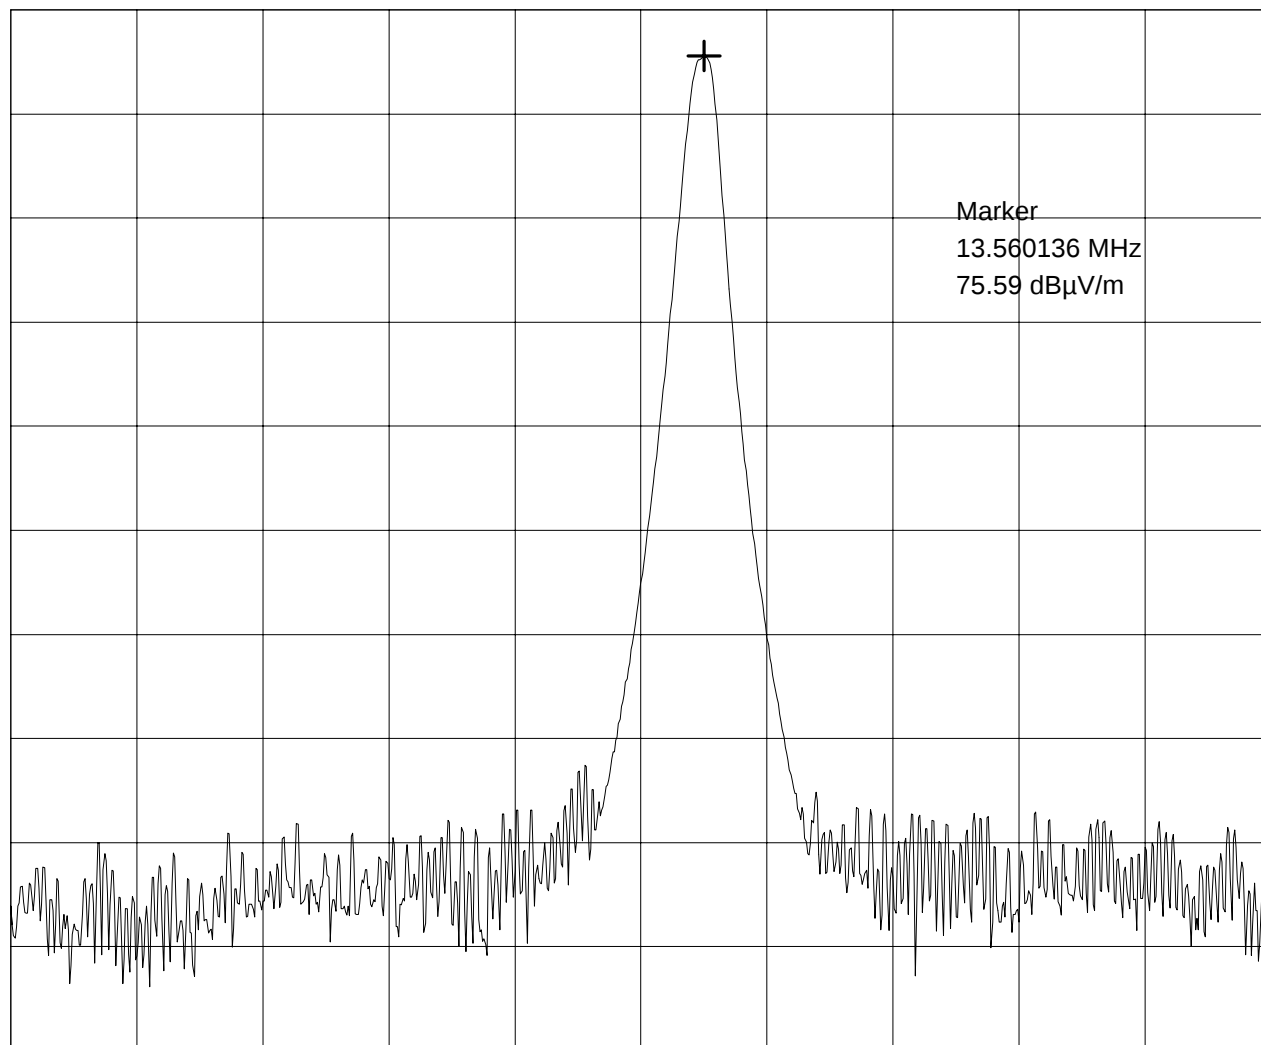

Start 13.558644 MHz
RBW 30 Hz

VBW 30 Hz

Stop 13.561356 MHz
SWP 9.20 s

Tested by:
Rupert Kohlhäufel

Date:
08/03/1999

Project-No.:
55435-90493

Page 39 of 43 Pages

frequency tolerance according FCC Part 15 Subpart C Sect.15.225

Model:
ICODE Evaluation Kit

Serial No.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Mode:
Continuously reading tag

Normal supply voltage: DC 24.0 V

operating frequency: 13.56 MHz

supply voltage variation:
DC 20.4 V to 27.6 V (85% to 115%)


temperature variation: -20°C to +50°C

frequency tolerance: +/- 1.356 kHz (+/- 0.01%)

minimal frequency: 13.558644 MHz
maximal frequency: 13.561356 MHz

Ref.Level 80 dBμV/m
10 dB dB/Div.

ATT 10 dB selected temperature: -20°C
selected supply voltage: DC 20.4 V

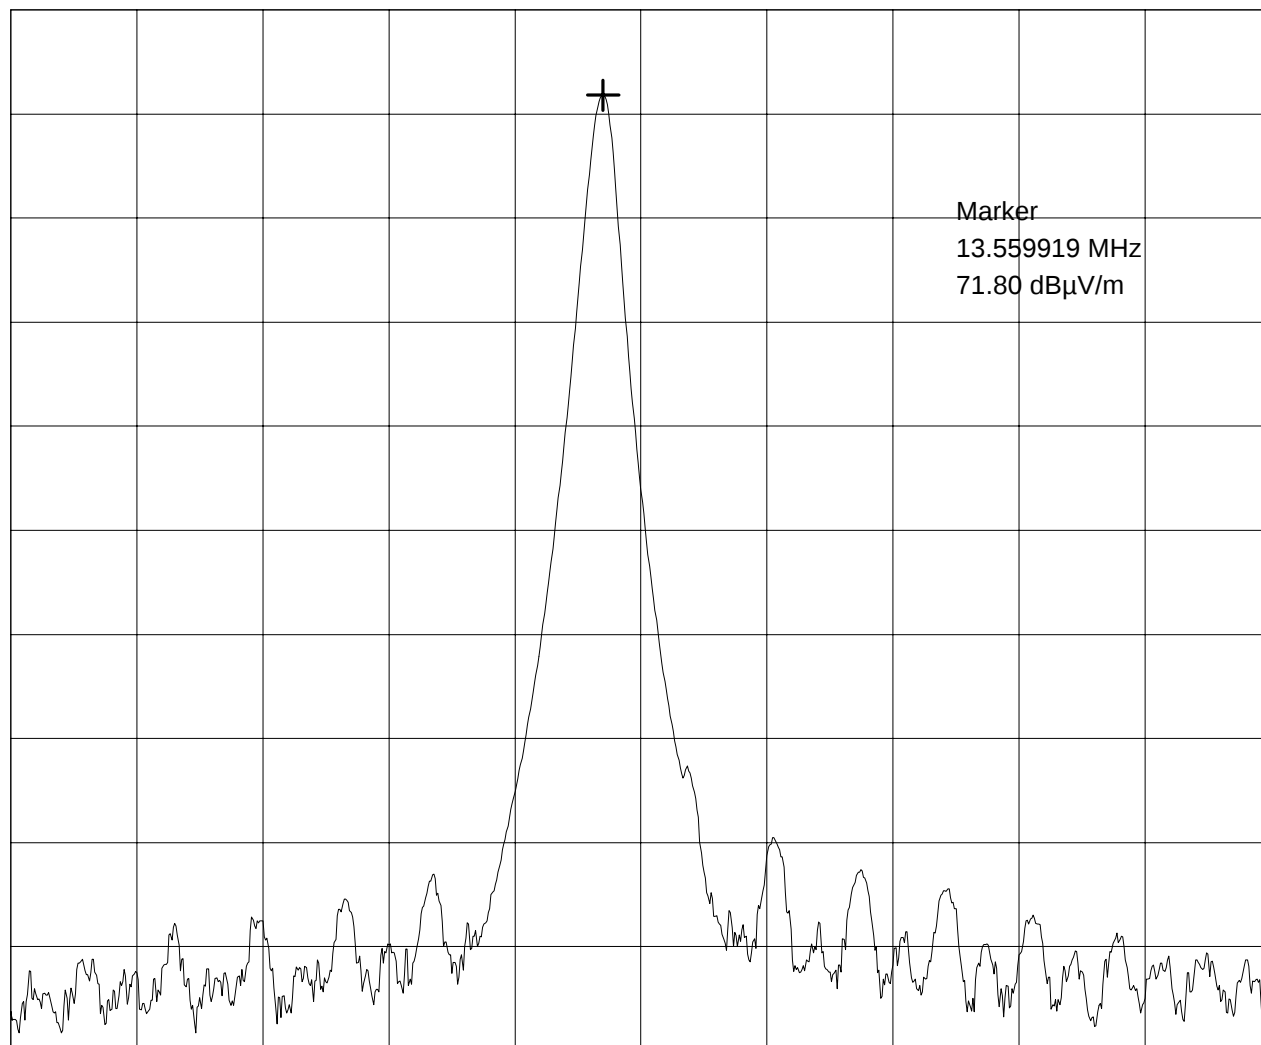

Marker
13.559919 MHz
71.80 dBμV/m

Start 13.558644 MHz
RBW 30 Hz

VBW 30 Hz

Stop 13.561356 MHz
SWP 9.20 s

Tested by:
Rupert Kohlhäufel

Date:
08/03/1999

Project-No.:
55435-90493

Page 40 of 43 Pages

frequency tolerance according FCC Part 15 Subpart C Sect.15.225

Model:
ICODE Evaluation Kit

Serial No.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Mode:
Continuously reading tag

Normal supply voltage: DC 24.0 V

operating frequency: 13.56 MHz

supply voltage variation:
DC 20.4 V to 27.6 V (85% to 115%)

temperature variation: -20°C to +50°C


frequency tolerance: +/- 1.356 kHz (+/- 0.01%)

minimal frequency: 13.558644 MHz
maximal frequency: 13.561356 MHz

Ref.Level 80 dBμV/m
10 dB dB/Div.

ATT 10 dB

selected temperature: -20°C
selected supply voltage: DC 27.6 V

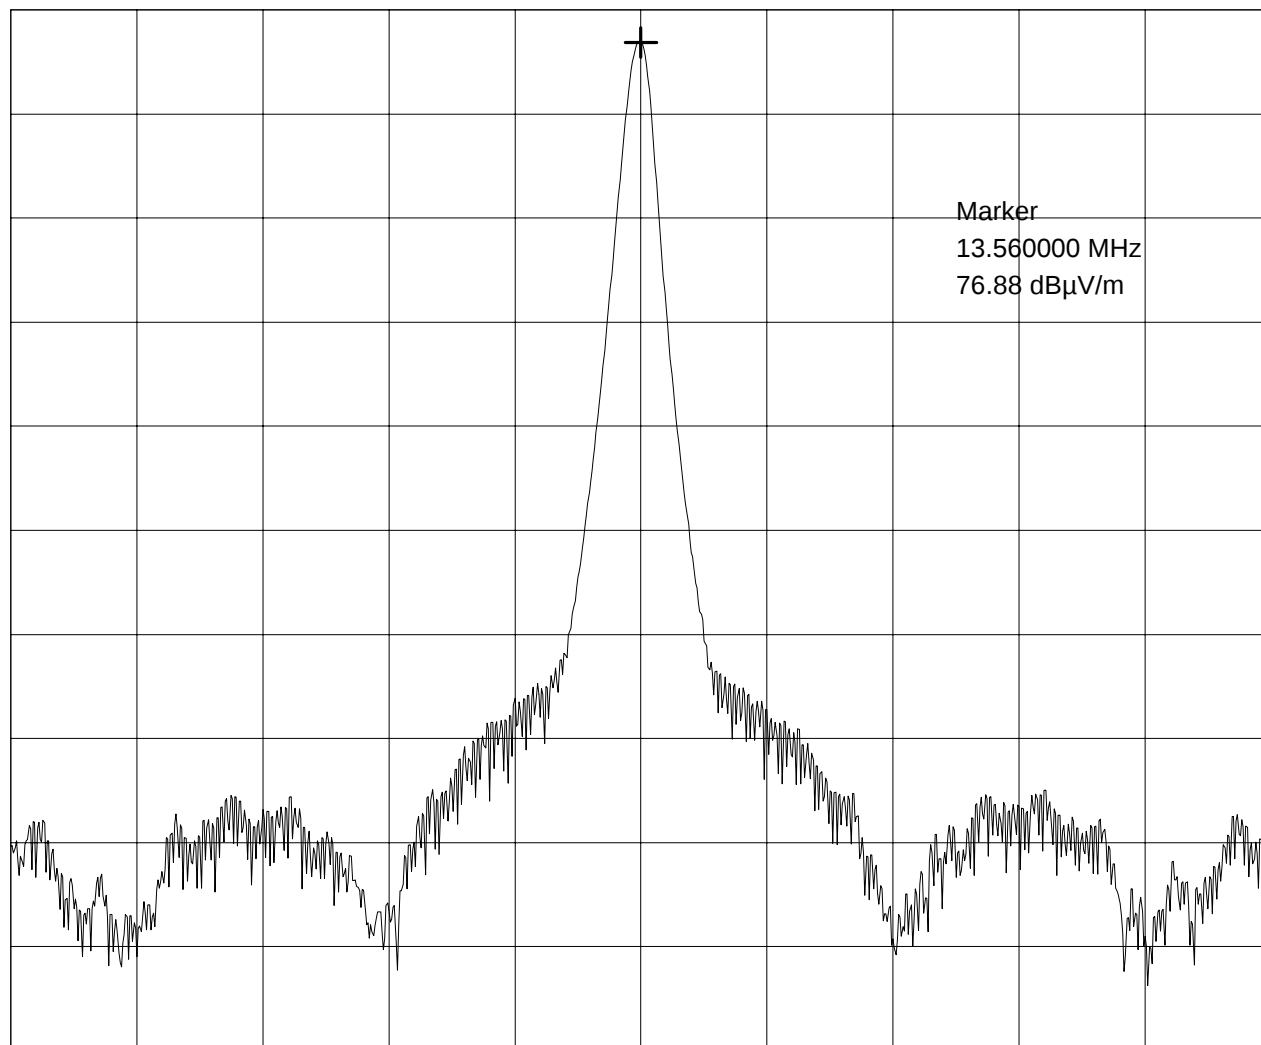

Start 13.558644 MHz
RBW 30 Hz

VBW 30 Hz

Stop 13.561356 MHz
SWP 9.20 s

Tested by:
Rupert Kohlhäufel

Date:
08/03/1999

Project-No.:
55435-90493

Page 41 of 43 Pages

frequency tolerance according FCC Part 15 Subpart C Sect.15.225

Model:
ICODE Evaluation Kit

Serial No.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Mode:
Continuously reading tag

Normal supply voltage: DC 24.0 V

operating frequency: 13.56 MHz

supply voltage variation:
DC 20.4 V to 27.6 V (85% to 115%)


temperature variation: -20°C to +50°C

frequency tolerance: +/- 1.356 kHz (+/- 0.01%)

minimal frequency: 13.558644 MHz
maximal frequency: 13.561356 MHz

Ref.Level 80 dBμV/m
10 dB dB/Div.

ATT 10 dB selected temperature: +50°C
selected supply voltage: DC 20.4 V

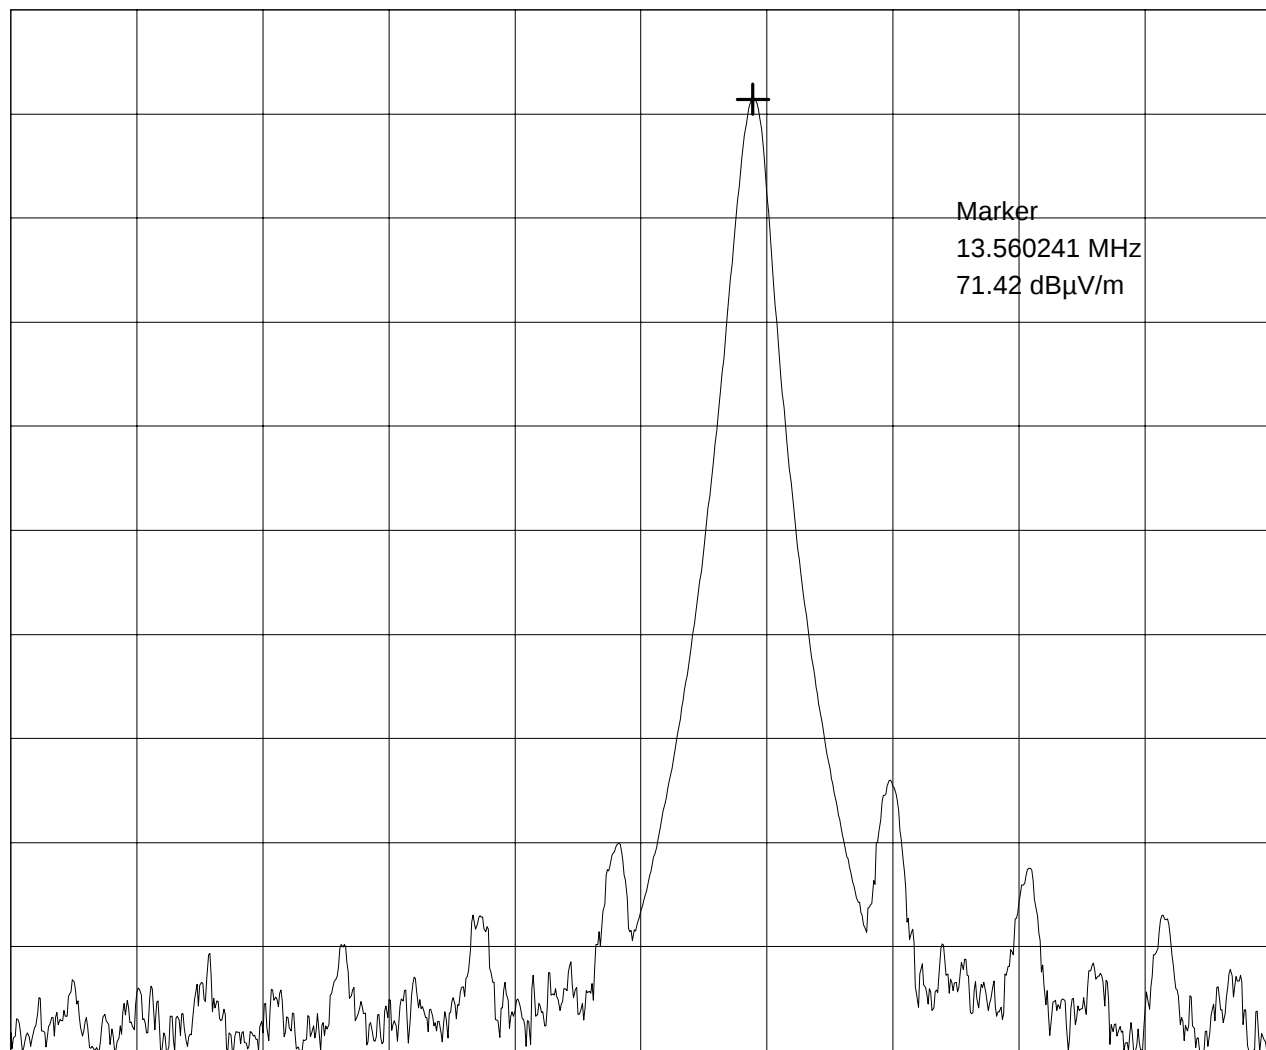

Start 13.558644 MHz
RBW 30 Hz

VBW 30 Hz

Stop 13.561356 MHz
SWP 9.20 s

Tested by:
Rupert Kohlhäufel

Date:
08/03/1999

Project-No.:
55435-90493

Page 42 of 43 Pages

frequency tolerance according FCC Part 15 Subpart C Sect.15.225

Model:
ICODE Evaluation Kit

Serial No.:
Prototype 1

Applicant:
Philips Semiconductors Gratkorn GmbH

Mode:
Continuously reading tag

Normal supply voltage: DC 24.0 V

operating frequency: 13.56 MHz

supply voltage variation:
DC 20.4 V to 27.6 V (85% to 115%)

temperature variation: -20°C to +50°C


frequency tolerance: +/- 1.356 kHz (+/- 0.01%)

minimal frequency: 13.558644 MHz
maximal frequency: 13.561356 MHz

Ref.Level 80 dBμV/m
10 dB dB/Div.

ATT 10 dB

selected temperature: +50°C
selected supply voltage: DC 27.6 V

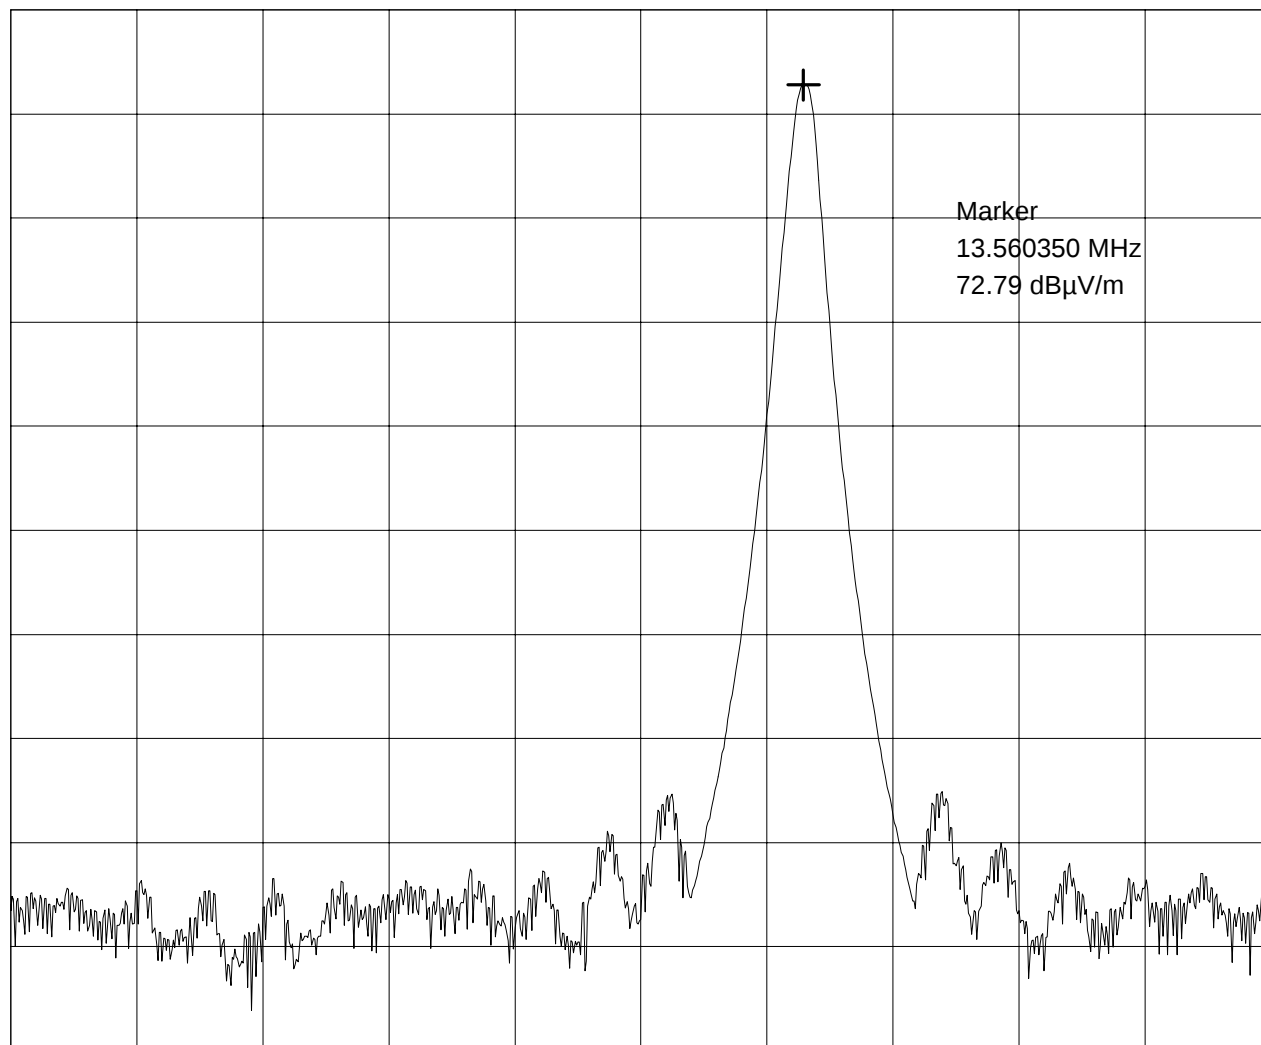

Start 13.558644 MHz
RBW 30 Hz

VBW 30 Hz

Stop 13.561356 MHz
SWP 9.20 s

Tested by:
Rupert Kohlhäufel

Date:
08/03/1999

Project-No.:
55435-90493

Page 43 of 43 Pages