



FCC Test Report
for
47CFR15, Subpart B for Unintentional Radiators, per Section 101
Equipment authorization of unintentional radiators,
and
47CFR15, Subpart C for Intentional Radiators, per Section 247
Operation within the bands 902 to 928 MHz

on
Telco Gateway
[FCC ID: OWS - 919]

model
Telco Gateway with Bandpass Filter

report number
20050602-03-F15

manufacturer
Silver Spring Networks, Inc.
13000 West Silver Spring Drive
Butler, WI 53007

judgement
Complies as tested

tests and report by
ITC Engineering Services, Inc. (ITC)
9959 Calaveras Road, P.O. Box 543
Sunol, California 94586
Tel.: (925) 862-2944
Fax: (925) 862-9013
E-Mail: docs@itcemc.com
Web Site: www.itcemc.com



Lab Code: 200172-0

EN45001 Accredited Compliance Laboratory (RES-GmbH)
Registration number: TTI-P-G 159/98-00 (RES-GmbH)

Table of Contents

PART 1	General	6
Section 1.1	Test Information.....	6
	General Information.....	6
Section 1.2	Tests Performed:.....	6
Section 1.3	Declaration/Disclaimer.....	7
Section 1.4	Test Methodology.....	8
Section 1.5	Test Facility.....	8
Section 1.6	Accuracy of Test Data.....	8
PART 2	RECEIVER MEASUREMENTS	9
OPEN FIELD RADIATED EMISSIONS		9
Section 2.1	Test Specification: 47 CFR PART 15, Sub-Part B.....	9
Section 2.2	Test Range Radiated Emissions Tests.....	10
Section 2.3	Spectrum Analyzer Configuration (swept frequency scans)-.....	10
Section 2.4	OPEN FIELD RADIATED EMISSIONS Results.....	11
Section 2.5	Administrative and Environmental Conditions Details – Radiated Emissions.....	11
Section 2.6	OPEN FIELD RADIATED EMISSIONS Test Results.....	11
Section 2.7	Test Data Summary.....	13
Section 2.8	Conclusion.....	13
Section 2.9	Radiated Emissions Test Setup Photographs.....	14
PART 3	RF MEASUREMENTS	16
Section 3.1	List of equipment used during RF Tests.....	16
Section 3.2	Setup Photographs.....	17
PART 4	MAXIMUM IN-BAND PEAK / NUMBER OF CHANNELS	18
Section 4.1	Maximum Peak Measurement.....	18
Section 4.2	Site Used – Maximum In-Band Peak Measurement.....	18
Section 4.3	Administrative AND eNVIronMENTAL details –Maximum In-Band Peak dATA.....	18
Section 4.4	Test Data – Maximum In-Band Peak Measurement.....	18
PART 5	CHANNEL SEPARATION MEASUREMENT	19
Section 5.1	Channel Separation Measurement.....	19
Section 5.2	Site Used – Channel Separation Measurement.....	19
Section 5.3	Administrative & ENVIRONMENTAL Details – Channel Separation Measurement.....	19
Section 5.4	Test Data – Channel Separation Measurement.....	19
PART 6	MAXIMUM POWER OUTPUT PER 47 CFR 15.247(B) (1)	20
Section 6.1	Maximum Power Measurement.....	20
Section 6.2	Site Used – Maximum Power Measurement.....	20
Section 6.3	Administrative Details – Maximum Power Measurement.....	20
Section 6.4	Test Data – Maximum Power Measurement (CH 0 – 903.680 MHz).....	20
Section 6.5	Test Data – Maximum Power Measurement (CH 6 – 915.97 MHz).....	21
Section 6.6	Test Data – Maximum Power Measurement (CH 11 – 926.208 MHz).....	22
PART 7	SPECTRAL DENSITY per 47 CFR 15.247(c)	23
Section 7.1	Spectral Density Measurement.....	23
Section 7.2	Site Used – Spectral Density Measurement.....	23
Section 7.3	Administrative and Environmental Details-.....	23
Section 7.4	Test Data – Spectral Density Measurement (channel 0 903.680mhz).....	24

Section 7.5 Test Data – Spectral Density Measurement (Channel 6 – 915.968MHz)..... 25

Section 7.6 Test Data – Spectral Density Measurement (Channel 11 – 926.208mhz)..... 26

Test Setup Photograph..... 27

PART 8 6dB BANDWIDTH per 47 CFR 15.247(a) (2)..... 28

Section 8.1 6dB Bandwidth Measurement..... 28

Section 8.2 Site Used – 6dB Bandwidth Measurement 28

Section 8.3 Administrative & Environmental - 6dB Bandwidth Details..... 28

Section 8.4 Test Data – 6dB Bandwidth Measurement (CHannel 0 – 903.68 MHz)..... 28

Section 8.5 Test Data – 6dB Bandwidth Measurement (CH 6 – 915.968 MHz)..... 29

Section 8.6 Test Data – 6dB Bandwidth Measurement (CH 11 – 926.208 MHz)..... 30

PART 9 6DB BANDEGE MEASUREMENT 31

6dB BAND-EDGE per 47 CFR 15.247(c) 31

Section 9.1 6dB Band-Edge Measurement 31

Section 9.2 Site Used –Band-Edge Measurement 31

Section 9.3 Administrative and Environmental Details–Band-Edge Measurement..... 31

Section 9.4 Test Data –Band-Edge Measurement (Lower BandEdge - 902MHz) 32

Section 9.5 Test Data –Band-Edge Measurement (Upper Band Edge - 928MHz) 33

PART 10 100kHz Bandwidth Out-of-Band Emissions per 47 CFR 15.247(a) (2) 34

Section 10.1 100kHz Bandwidth Out-of-Band Emissions Measurement..... 34

Section 10.2 Site Used – 100 kHz Bandwidth Out-of-Band Measurement..... 34

Section 10.3 Administrative & Environmental - (Out of Band details) 34

Section 10.4 Test Data – 100kHz Out-of-Band Measurement (In-Band Peak)..... 34

Section 10.5 Test Data – 100 kHz Bandwidth Out-of-BAND (Ch 0 – 903.680 MHz) 834 MHz to5 GHz
..... 36

Section 10.6 Test Data – 100 kHz Bandwidth Out-of-BAND (CH 0- 903.680MHz) 5 GHz to 10 GHz 37

Section 10.7 Test Data – 100 kHz Bandwidth Out-of-Band (Ch 6- 915.968) 27MHz to 940 mhz..... 38

Section 10.8 Test Data – 100 kHz Bandwidth Out-of-Band (Ch 6 – 915.968mhz) 834 MHz to 5 GHz 39

Section 10.9 Test Data – 100 kHz Bandwidth Out-of-Band (Ch 6 – 915.968MHz) 5 GHz to 10 GHz.. 40

Section 10.10 Test Data – 100 kHz Bandwidth Out-of-Band(Ch 11 – 926.208MHz)27MHz to940MHz
..... 41

Section 10.11 Test Data –100 kHz Bandwidth Out of Band (Ch 11 – 926.208Mhz) 817MHz – 5Ghz 42

Section 10.12 Test Data –100 kHz Bandwidth Out of Band (Ch 11 – 926.208Mhz) 5GHz – 10Ghz .. 43

PART 11 SPURIOUS/HARMONIC EMISSIONS IN THE RESTRICTED BANDS 44

Section 11.1 Test Specification: 44

Section 11.2 Test Range – Spurious/Harmonics Emissions:..... 44

Section 11.3 Site Used – Spurious/Harmonics Emissions Measurements 44

Section 11.4 Administrative and Environmental Details..... 44

Section 11.5 Spurious and Harmonic Emission In the Restricted Bands Data..... 45

Section 11.6 Spurious Photographs 47

PART 12 APPENDICES 49

A. EUT Technical Specification..... 49

B. EUT Photographs 49

C. Modification Letter 55

List of Tables

Table 1 Radio Device Measurement Information..... 8
Table 2 Measurement Uncertainty..... 8
Table 3 Test Equipment and Software Used– Radiated Emissions Tests 9
Table 4 Support Equipment – Radiated Emissions Tests 9
Table 5 Data Table Legend and Field Strength Calculation – Radiated Emissions Tests..... 10
Table 7 Test Data for Radiated Emissions Measurement Below 1 GHz..... 11
Table 8 Test Data for Radiated Emissions Measurement Above 1 GHz..... 12
Table 9: Support Equipment – RF Measurements..... 16
Table 10: Test Equipment – RF Measurements..... 16
Table 11 Software Used– RF Measurements Tests 16
Table 12: Data Table Legend and Field Strength Calculation..... 16
Table 13 Test Data – Spurious Emissions below 1GHz (Measurement @10m)..... 45
Table 14 Test Data – Spurious Emissions above 1GHz (Measurement at 3m)..... 45

List of Figures

Figure 1: Radiated Emissions Test Setup (Below 1 GHz) Front View 14

Figure 2 Radiated Emissions Test Setup (Below 1 GHz) Rear View..... 14

Figure 3: Radiated Emissions Test Setup at 10 meters (Above 1 GHz) Front View..... 15

Figure 4: Radiated Emissions Test Setup at 10 meters (Above 1 GHz) Rear View..... 15

Figure 5 Test Setup Photo – Front View 17

Figure 6 Test Setup Photo (Rear View)..... 17

Figure 7: Plot of In-Band Peak Measurement..... 18

Figure 8: Plot of Channel Separation Measurement at 916.98 MHz..... 19

Figure 9: Plot of Maximum Power Measurement at Channel 0 20

Figure 10: Plot of Maximum Power Measurement at Channel 6 21

Figure 11: Plot of Maximum Power Measurement at Channel 11 22

Figure 12: Plot of Spectral Density Measurement at Channel 0..... 24

Figure 13: Plot of Spectral Density Measurement at Channel 6..... 25

Figure 14: Plot of Spectral Density Measurement at Channel 11..... 26

Figure 15: Power Spectral Density Test Setup (Front view) 27

Figure 16: Power Spectral density Test Setup (Rear View) 27

Figure 17: Plot of 6dB Bandwidth Measurement at Channel 0 28

Figure 18: Plot of 6dB Bandwidth Measurement at Channel 6 29

Figure 19: Plot of 6dB Bandwidth Measurement at Channel 11 30

Figure 20: Plot of Lower Band-Edge Measurement at 902MHz..... 32

Figure 21: Plot of Band-Edge Measurement at 928MHz 33

Figure 22: Plot of 100 kHz Bandwidth Out-of-Band Measurement (In-Band-Peak)..... 34

Figure 23: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 0 (27 MHz – 940 MHz) 35

Figure 24: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 0 (834 MHz to 5 GHz)) 36

Figure 25: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 0 (5 GHz to 10 GHz) 37

Figure 26: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 6 (27MHz to 940 MHz) 38

Figure 27: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 6 (834 MHz to 5 GHz)..... 39

Figure 28: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 6 (5 to 10 GHz)..... 40

Figure 29: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 11 (27MHz to 940 MHz)..... 41

Figure 30: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 11(817 MHz to 5 GHz)..... 42

Figure 31: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 11(5 GHz – 10 GHz) 43

Figure 32: Spurious Emissions Front View (Below 1 GHz) 47

Figure 33: Spurious Emissions Rear View (Below 1 GHz) 47

Figure 34: Spurious Emissions Front View (Above 1 GHz) 48

Figure 35: Spurious Emissions Rear View (Above 1 GHz) 48

Figure 36: EUT Top View 49

Figure 37: EUT Front View 50

Figure 38: EUT Rear View 50

Figure 39: EUT Side View 51

Figure 40: EUT Internal View1 51

Figure 41: EUT Internal View2 52

Figure 42: EUT Component View 52

Figure 43: EUT Solder View 53

Figure 44: Component View with Shield off (View 1) 53

Figure 45: Component View with Shield off (View 2) 54

PART 1 General

SECTION 1.1 TEST INFORMATION

GENERAL INFORMATION

Product Type	Telco Gateway	
Model	Telco Gateway with Bandpass filter	
Manufacturer's Name	Silver Spring Networks Inc.	
Manufacturer's Address	13000 West Silver Springs Drive Butler, WI 53007 United States	
Contact	Tel: +1 (262) 364-5317 Juan Luglio, PhD	Fax: +1 (262) 783-0200 email : juan.luglio@silverspringnetworks.com
Test Laboratory	ITC Engineering Services, Inc. 9959 Calaveras Road, PO Box 543 Sunol, CA 94586-0543 Email: docs@itcemc.com Web Site: http://www.itcemc.com	Tel: +1(925) 862-2944 Fax: +1(925) 862-9013
Test Number and Report Numbers	20050602-03	20050602-03
Test Date(s) & Issue Date	June 09 –June 22,2005	June 22, 2005
Test Engineer(s)	Femi Ojo and Robert Kershaw	
Chief Engineer	Michael Gbadebo, P.E	
Documentation	George Brown.	
Test Results	<input checked="" type="checkbox"/> Complies as Tested	<input type="checkbox"/> Fail

The electromagnetic interference tests, which this report describes, were performed by an independent electromagnetic compatibility consultant, ITC Engineering Services, Inc. (ITC), in accordance with the emissions requirements specified in the FCC rules, 47CFR Part 15, Subparts B and C. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications specified in this report for compliance must be implemented in all production units for compliance to be maintained.

SECTION 1.2 TESTS PERFORMED:

Emissions Requirements:

- OPEN FIELD RADIATED EMISSIONS in accordance with the FCC 47 CFR 15.109

RF Requirements:

- MAXIMUM PEAK OUTPUT OF FUNDAMENTAL in accordance with the FCC 47 CFR 15.247(b) (1)
- OPERATING BAND in accordance with FCC 47 CFR 15.247(a)
- BAND-EDGE in accordance with the FCC 47 CFR 15.247(c)
- 6dB BANDWIDTH in accordance with FCC 47 CFR 15.247(a)(2)
- SPECTRAL DENSITY in accordance with FCC 47 CFR 15.247(d)
- HARMONIC/SPURIOUS EMISSIONS in accordance with the FCC 47 CFR 15.247(c)
- RESTRICTED BAND EMISSIONS in accordance with the FCC 47 CFR 15.205(c)

PART 1 General (Cont)

SECTION 1.3 DECLARATION/DISCLAIMER

ITC Engineering Services, Inc. (ITC) reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. ITC Engineering Services, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from ITC Engineering Services, Inc. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full with our written approval. The applicant/manufacturer shall not use this report to claim product endorsement by NVLAP or any US Government agency.

ITC Engineering Services, Inc. (ITC) is:

Accepted by the Federal Communications Commission (FCC) for FCC Methods, CISPR Methods and AUSTEL Technical Standards (Ref: NVLAP Lab Code 200172-0)

Approved by the Industry Canada for Telecom Testing

Certified by Rockford Engineering Services GmbH for EMC Testing according to the European EMC Directive 89/336/EEC per EN45001

Certified by Reg. TP for EMC Testing according to the European EMC Directive 89/336/EEC per EN45001 for RES GmbH (DAR-Registration number: TTI-P-G 159/98-00)

Certified by the Voluntary Control Council for Interference by Information Technology Equipment (VCCI) for EMC testing, in accordance with the Regulations for Voluntary Control Measures, Article 8, Registration Numbers - Site 1: C-1582 and R-1497.

PART 1 General (Cont)

SECTION 1.4 TEST METHODOLOGY

The electromagnetic interference tests, which this report describes, were performed by an independent electromagnetic compatibility consultant, ITC Engineering Services, Inc., in accordance with the FCC test procedure ANSI C63.4-2003.

SECTION 1.5 TEST FACILITY

The open area test site, the conducted measurement facility, and the test equipment used to collect the emissions data is located in Sunol, California, and is fully described in a site attenuation report. The approved site attenuation description is on file at the Federal Communications Commission.

Table 1 Radio Device Measurement Information

Product Type	Telco Gateway	
Models	Telco Gateway with Bandpass Filter	
Applicant / Manufacturer Address	Silver Spring Networks, Inc. 13000 West Silver Spring Drive Butler, WI 53007	
Contact	Mr Juan Luglio Tel: (262) 364-5317	juan.luglio@silverspringnetworks.com Fax: (262) 783-0200
Test Results	<input checked="" type="checkbox"/> Complies	<input type="checkbox"/> Not Compliant
Total Number of Pages including Appendices	55 Pages	
Test Report File No.	20050602-03-F15	

Table 2 Measurement Uncertainty

RF frequency	$\pm 1 \times 10^{-7}$ HP8565E
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Conducted emission of transmitter, valid up to 1 GHz	± 1.5 dB
Conducted emission of transmitter, valid up to 18 GHz	± 1.5 dB
Conducted emission of receivers	± 1.5 dB
Radiated emission of transmitter, valid up to 1 GHz	± 1.5 dB
Radiated emission of transmitter, valid up to 18 GHz	± 1.5 dB
Radiated emission of transmitter, valid up to 26 GHz	± 3 dB
Radiated emission of transmitter, valid up to 40 GHz	± 3 dB
Radiated emission of transmitter, valid up to 75 GHz	± 3 dB

SECTION 1.6 ACCURACY OF TEST DATA

The test results contained in this report accurately represent the emissions generated by the sample equipment under test. ITC Engineering Services, Inc. (ITC) as an independent testing laboratory declares that the equipment as tested complies with the requirements of:

1. FCC standard 47CFR15.247.

for Intentional Radiators Operation within the bands 902MHz to 928MHz

PART 2 RECEIVER MEASUREMENTS

OPEN FIELD RADIATED EMISSIONS

SECTION 2.1 TEST SPECIFICATION: 47 CFR PART 15, SUB-PART B

The Telco Gateway (or the EUT) was set up at 3 or 10 meters in accordance with the suggested configuration given in FCC Measurement Procedure ANSI C63.4-2003. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was set up on a wooden non-conductive tabletop, 80 cm above the ground reference plane, in an open field. The transmit function was de-activated for the tests. For measurements below 1GHz, the EUT was set up at a 10 meters distance from the search antenna with the EUT running in a continuous mode. The EUT was rotated 360 degrees azimuth and the search antenna height varied 1 to 4m in order to maximize the emissions. Significant peaks from the EUT were then recorded to determine margin to the limits. For measurements above 1GHz, the EUT running in continuous mode was set up at a 3 meter distance from the search antenna and was rotated 360 degrees azimuth and also rotated in its x-y-z axis positions to determine the precise amplitude of the emissions

Table 3 Test Equipment and Software Used– Radiated Emissions Tests

Equipment Description	Manufacturer	Model Name	Serial Number	Calibration Due
Spectrum Analyzer	Hewlett-Packard	8568B	2841A04315	11-29-05
Spectrum Analyzer Display	Hewlett-Packard	85662A	2848A17028	11-29-05
Quasi Peak Adapter	Hewlett-Packard	85650	2521A00871	11-29-05
Preselector	Hewlett-Packard	85685A	2620A00265	11-29-05
Spectrum Analyzer	Hewlett-Packard	8565E	2618A02909	03-29-06
Signal Generator	Hewlett-Packard	83650A	3420A00599	09-09-06
Power Supply	BK Precision	1688	2250558	No Cal. Needed
Biconical Antenna	EMCO	3104	3667	02-03-06
L. P. Ant. (200-1000 MHz)	EMCO	3146	9510-4202	02-03-06
Horn Antenna (Below 18GHz)	EMCO	3115	8812-3050	12-19-05

Software Used	Manufacturer	Model Name	Version Number	Calibration/Validation Date
Test Software	ITC	1.04b1	Rev. 4	02-05-06
Antenna Software	ITC	L.P-V/H 10m	Rev. 4	02-05-06
Antenna Software	ITC	B-V/H 10m	Rev. 4	02-05-06
Cable Software	ITC	OATS 30MHz-1GHz	Rev. 4	02-01-06

Table 4 Support Equipment – Radiated Emissions Tests

No	Description	Manufacturer	Model Name	Serial Number
1	NOTEBOOK	SONY	PCG – 974L	283293303418746

Test Voltage: 120V/480V, 60Hz

OPEN FIELD RADIATED EMISSIONS (cont)

SECTION 2.2 TEST RANGE RADIATED EMISSIONS TESTS

The frequency search range investigated was from 30 MHz to 5.55 GHz.

SECTION 2.3 SPECTRUM ANALYZER CONFIGURATION (SWEPT FREQUENCY SCANS)-

- IF Bandwidth..... 120 kHz
- Measurements below 1000 MHz (unless stated otherwise)
 - Analyzer Mode (for Peak Measurements) Peak/Log
 - Resolution Bandwidth..... 100 kHz
 - Video Bandwidth..... 100 kHz
 - Analyzer Mode (for Quasi-Peak Measurements)
 - Quasi-Peak/Linear Resolution Bandwidth..... 1000 kHz
 - Video Bandwidth..... 1000 kHz
- Measurements above 1000 MHz (unless stated otherwise)
 - Quasi-Peak Adapter Mode Disabled
 - Analyzer Mode (for Peak Measurements) Peak
 - Resolution Bandwidth..... 1000 kHz
 - Video Bandwidth..... 1000 kHz
 - Analyzer Mode (for Average Measurements)..... Video Filter
 - Resolution Bandwidth..... 1000 kHz
 - Video Bandwidth..... 10 Hz

Table 5 Data Table Legend and Field Strength Calculation – Radiated Emissions Tests

Detector mode: Peak (P) or Quasi-Peak (QP) or Average (A)

	Polarization	Antenna	Freq Range (MHz)
VB	Vertical	EMCO 3104/sn 3549 Biconical	30 – 200
HB	Horizontal	EMCO 3104/sn 3549 Biconical	30 – 200
VL	Vertical	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
HL	Horizontal	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
VH1	Vertical	EMC 3115/sn. 2362 Horn	Below 18000
HH1	Horizontal	EMC 3115/sn. 2362 Horn	Below 18000
VH2	Vertical	EMC 3116/sn. 2655 Horn	Below 26500
HH2	Horizontal	EMC 3116/sn. 2655 Horn	Below 26500
VH4	Vertical	S&D DBD-520 Horn	Below 75000
HH4	Horizontal	S&D DBD-520 Horn	Below 75000

The margin in the Table 6 is calculated as follows:

Margin = Corrected Amplitude – Limit, where Corrected Amplitude = Spectrum Analyzer Amplitude + Cable Loss + Antenna Factor – Pre-Amp Gain.

SECTION 2.4 OPEN FIELD RADIATED EMISSIONS RESULTS

- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 2.5 ADMINISTRATIVE AND ENVIRONMENTAL CONDITIONS DETAILS – RADIATED EMISSIONS

Test Date:	June 21 st , 2005
Test Engineer:	Bob Kershaw and Femi Ojo
Temperature	78°F
Humidity	52%

SECTION 2.6 OPEN FIELD RADIATED EMISSIONS TEST RESULTS

Table 6 Test Data for Radiated Emissions Measurement Below 1 GHz

The table below shows a summary of the highest amplitudes of the radiated emissions from the equipment under test at various antenna heights, antenna polarization, and EUT orientations.

INDICATED FREQ MHz	AMPL dBuV/m	CORRECTION		CORR AMPL dBuV/m	TURNTABLE ANG DEG	ANT HT m	POL	CLASS A		CLASS B		FILTER MODE	NOTES
		ANT dB	CAB dB					AMPL dBuV/m	MARG dB	AMPL dBuV/m	MARG db		
50.11	7.7	11.1	2.2	21.0	0	1.0	VB	-	-	30.0	-9.0	P	
86.93	15.0	8.6	3.0	26.6	90	1.0	VB	-	-	30.0	-3.4	P	
133.39	14.6	12.4	3.4	30.4	180	1.0	HB	-	-	33.0	-2.6	P	
133.40	10.8	12.4	3.4	26.6	180	3.0	HB	-	-	33.0	-6.4	P	
133.42	12.1	12.4	3.4	27.9	180	1.0	VB	-	-	33.0	-5.1	P	
166.73	7.1	14.9	3.9	25.8	90	1.0	VB	-	-	33.0	-7.2	P	
166.73	8.8	14.9	3.9	27.5	270	1.0	HB	-	-	33.0	-5.5	P	
166.77	8.1	14.9	3.9	26.8	180	3.0	HB	-	-	33.0	-6.2	P	
200.06	5.3	11.7	3.9	20.9	90	1.0	HL	-	-	33.0	-12.1	P	
746.06	2.3	20.5	10.9	33.7	90	1.0	HL	-	-	36.0	-2.3	P	

Note: No emissions of significant levels were observed between 30MHz-50.11MHz and 746.06MHz-1000MHz.

Table 7 Test Data for Radiated Emissions Measurement Above 1 GHz

The table below shows a summary of the highest amplitudes of the radiated emissions from the equipment under test at various antenna heights, antenna polarization, and EUT orientations.

INDICATED		CORRECTION		CORR	TURNTABLE ANT			CLASS A		CLASS B			
FREQ	AMPL	ANT	CAB	AMPL	ANG	HT	POL	AMPL	MARG	AMPL	MARG	FILTER	
MHz	dBuV/m	dB	dB	dBuV/m	DEG	m	-	dBuV/m	dB	dBuV/m	db	MODE	NOTES
1000.00	15.5	24.2	2.0	41.7	45	1.0	VH	-	-	54.0	-12.3	P	
1019.00	16.5	24.2	2.0	42.8	0	1.0	HH	-	-	54.0	-11.2	P	
1078.00	14.8	24.3	2.2	41.3	45	1.0	HH	-	-	54.0	-12.7	P	
1094.00	16.3	24.4	2.2	42.9	180	1.0	HH	-	-	54.0	-11.1	P	
1099.00	16.2	24.4	2.2	42.7	45	1.0	VH	-	-	54.0	-11.3	P	
1138.00	16.8	24.4	2.3	43.6	90	1.0	HH	-	-	54.0	-10.4	P	
1143.00	15.7	24.5	2.3	42.4	45	1.0	HH	-	-	54.0	-11.6	P	
1167.00	15.8	24.5	2.3	42.7	90	1.0	VH	-	-	54.0	-11.3	P	
1192.00	14.0	24.5	2.4	40.9	90	1.0	HH	-	-	54.0	-13.1	P	
1200.00	16.8	24.6	2.4	43.8	90	1.0	HH	-	-	54.0	-10.2	P	
1200.00	16.7	24.6	2.4	43.6	90	1.0	VH	-	-	54.0	-10.4	P	
1330.00	14.0	24.8	2.6	41.4	180	1.0	HH	-	-	54.0	-12.6	P	
1343.00	15.8	24.8	2.6	43.2	180	1.0	HH	-	-	54.0	-10.8	P	
1346.00	15.0	24.8	2.6	42.4	45	1.0	VH	-	-	54.0	-11.6	P	
1505.00	13.8	25.1	2.7	41.7	180	1.0	VH	-	-	54.0	-12.3	P	
1516.00	14.8	25.2	2.8	42.8	90	1.0	HH	-	-	54.0	-11.2	P	
1596.00	14.7	25.6	3.0	43.3	45	1.0	HH	-	-	54.0	-10.7	P	
1685.00	14.7	26.1	3.3	44.1	90	1.0	HH	-	-	54.0	-9.9	P	
1694.00	14.3	26.1	3.3	43.8	45	1.0	VH	-	-	54.0	-10.2	P	
1807.00	20.7	26.7	3.4	50.8	180	1.0	VH	-	-	54.0	-3.2	A	
1809.00	16.8	26.8	3.4	47.0	45	1.0	HH	-	-	54.0	-7.0	P	
1875.00	14.8	27.2	3.3	45.3	90	1.0	HH	-	-	54.0	-8.7	P	
1993.00	14.0	27.9	3.0	44.9	180	1.0	HH	-	-	54.0	-9.1	P	
2152.00	14.8	28.1	2.7	45.6	90	1.0	HH	-	-	54.0	-8.4	P	
2194.00	14.3	28.0	2.6	45.0	90	1.0	VH	-	-	54.0	-9.0	P	
2261.00	13.8	28.3	2.5	44.6	180	1.0	HH	-	-	54.0	-9.4	P	
2446.00	15.2	28.5	2.9	46.6	45	1.0	VH	-	-	54.0	-7.4	P	
2526.00	14.3	28.7	3.0	46.0	90	1.0	HH	-	-	54.0	-8.0	P	
2700.00	17.2	29.2	2.8	49.2	180	1.0	HH	-	-	54.0	-4.8	P	
2712.00	15.7	29.2	2.8	47.7	180	1.0	HH	-	-	54.0	-6.3	P	
2712.00	15.7	29.2	2.8	47.7	45	1.0	VH	-	-	54.0	-6.3	P	
2843.00	15.0	29.6	2.8	47.5	90	1.0	VH	-	-	54.0	-6.5	P	
3096.00	12.7	30.3	3.8	46.8	90	1.0	HH	-	-	54.0	-7.2	P	
3286.00	13.3	30.7	4.9	49.0	90	1.0	VH	-	-	54.0	-5.0	P	
3354.00	12.7	30.9	4.8	48.4	90	1.0	HH	-	-	54.0	-5.6	P	
3362.00	12.8	30.9	4.8	48.5	45	1.0	VH	-	-	54.0	-5.5	P	
3448.00	13.7	31.2	4.6	49.4	180	1.0	HH	-	-	54.0	-4.6	P	
3603.00	12.3	31.5	4.6	48.5	90	1.0	VH	-	-	54.0	-5.5	P	
3607.00	12.8	31.6	4.6	49.1	90	1.0	HH	-	-	54.0	-4.9	P	
3862.00	12.8	32.3	4.9	50.0	90	1.0	VH	-	-	54.0	-4.0	P	
3896.00	12.7	32.4	4.9	50.0	45	1.0	HH	-	-	54.0	-4.0	P	
4269.00	12.7	32.5	5.0	50.2	45	1.0	VH	-	-	54.0	-3.8	P	
4500.00	11.3	32.4	5.0	48.7	180	1.0	VH	-	-	54.0	-5.3	P	
4503.00	12.5	32.4	5.0	49.9	90	1.0	HH	-	-	54.0	-4.1	P	

4661.00	11.5	32.7	5.0	49.2	180	1.0	VH	-	-	54.0	-4.8	P	
4805.00	10.8	32.9	5.0	48.8	45	1.0	HH	-	-	54.0	-5.2	P	
5403.00	10.2	34.0	5.0	49.2	90	1.0	VH	-	-	54.0	-4.8	P	
5455.00	11.3	34.1	5.0	50.4	90	1.0	VH	-	-	54.0	-3.6	P	
5549.00	10.3	34.2	5.1	49.7	45	1.0	VH	-	-	54.0	-4.3	P	

Note: No emissions of significant level was observed between 5549MHz-10000MHz.

SECTION 2.7 TEST DATA SUMMARY

The margin is calculated as follows:

Margin = Corrected Amplitude - Limit; where Corrected Amplitude = Amplitude + Cable Loss + Antenna Factor.

SECTION 2.8 CONCLUSION

The Telco Gateway with Bandpass Filter, Model T-313 meets the requirements of FCC Part 15, Class B for open field radiated emissions.

OPEN FIELD RADIATED EMISSIONS (cont)

SECTION 2.9 RADIATED EMISSIONS TEST SETUP PHOTOGRAPHS



Figure 1: Radiated Emissions Test Setup (Below 1 GHz) Front View



Figure 2 Radiated Emissions Test Setup (Below 1 GHz) Rear View

OPEN FIELD RADIATED EMISSIONS (cont)



Figure 3: Radiated Emissions Test Setup at 10 meters (Above 1 GHz) Front View



Figure 4: Radiated Emissions Test Setup at 10 meters (Above 1 GHz) Rear View

PART 3 RF MEASUREMENTS

SECTION 3.1 LIST OF EQUIPMENT USED DURING RF TESTS

Table 8: Support Equipment – RF Measurements

No	Description	Manufacturer	Model Name	Serial Number
1	PLOTTER	HEWLETT PACKARD	7440A	N/A
2	NOTEBOOK	SONY	PCG – 974L	283293303418746

Table 9: Test Equipment – RF Measurements

Equipment Description	Manufacturer	Model Name	Serial Number	Calibration Due
Spectrum Analyzer	Hewlett-Packard	8568B	2841A04315	11-29-05
Spectrum Analyzer Display	Hewlett-Packard	85662A	2848A17028	11-29-05
Quasi Peak Adapter	Hewlett-Packard	85650	2521A00871	11-29-05
Preselector	Hewlett-Packard	85685A	2620A00265	11-29-05
Spectrum Analyzer	Hewlett-Packard	8565E	2618A02909	03-29-06
Signal Generator	Hewlett-Packard	83650A	3420A00599	09-09-06
Power Supply	BK Precision	1688	2250558	No Cal. Needed
Biconical Antenna	EMCO	3104	3667	02-03-06
L. P. Ant. (200-1000 MHz)	EMCO	3146	9510-4202	02-03-06
Horn Antenna (Below 18GHz)	EMCO	3115	8812-3050	12-19-05

Table 10 Software Used– RF Measurements Tests

Software Used	Manufacturer	Model Name	Version Number	Calibration/Validation Date
Test Software	ITC	1.04b1	Rev. 4	02-05-06
Antenna Software	ITC	L.P-V/H 10m	Rev. 4	02-05-06
Antenna Software	ITC	B-V/H 10m	Rev. 4	02-05-06
Cable Software	ITC	OATS 30MHz-1GHz	Rev. 4	02-01-06

Table 11: Data Table Legend and Field Strength Calculation

Detector mode: Peak (P) or Quasi-Peak (QP) or Average (A)

	Polarization	Antenna	Freq Range (MHz)
VB	Vertical	EMCO 3104/sn 3549 Biconical	30 – 200
HB	Horizontal	EMCO 3104/sn 3549 Biconical	30 – 200
VL	Vertical	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
HL	Horizontal	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
VH1	Vertical	EMC 3115/sn. 2362 Horn	Below 18000
HH1	Horizontal	EMC 3115/sn. 2362 Horn	Below 18000
VH2	Vertical	EMC 3116/sn. 2655 Horn	Below 26500
HH2	Horizontal	EMC 3116/sn. 2655 Horn	Below 26500
VH4	Vertical	S&D DBD-520 Horn	Below 75000
HH4	Horizontal	S&D DBD-520 Horn	Below 75000

RF Conducted Measurements

SECTION 3.2 SETUP PHOTOGRAPHS



Figure 5 Test Setup Photo – Front View

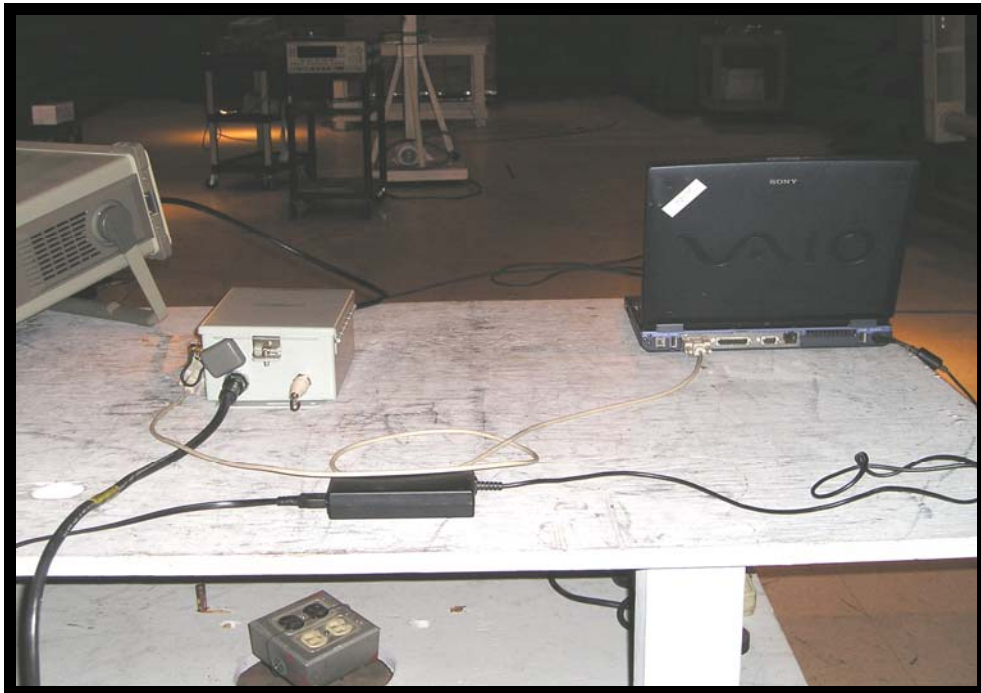


Figure 6 Test Setup Photo (Rear View)

PART 4 MAXIMUM IN-BAND PEAK / NUMBER OF CHANNELS

SECTION 4.1 MAXIMUM PEAK MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 4.2 SITE USED – MAXIMUM IN-BAND PEAK MEASUREMENT

- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 4.3 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS –MAXIMUM IN-BAND PEAK DATA

Test Date(s):	June 22nd, 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	44%

SECTION 4.4 TEST DATA – MAXIMUM IN-BAND PEAK MEASUREMENT

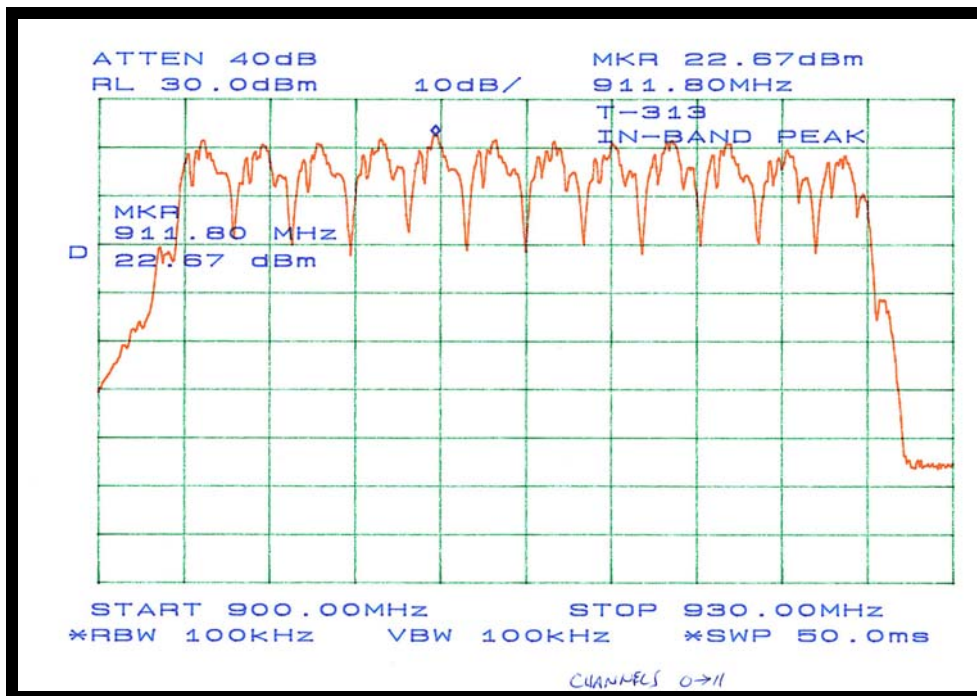


Figure 7: Plot of In-Band Peak Measurement

Test-Data Summary – Peak Measurement:

Peak Frequency = 911.80 MHz
Peak Level: = 22.67 dBm
Number of Channels = 11

PART 5 CHANNEL SEPARATION MEASUREMENT

SECTION 5.1 CHANNEL SEPARATION MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 5.2 SITE USED – CHANNEL SEPARATION MEASUREMENT

- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 5.3 ADMINISTRATIVE & ENVIRONMENTAL DETAILS – CHANNEL SEPARATION MEASUREMENT

Test Date(s):	June 22nd, 2005
Test Engineer(s):	Femi Ojo and Bob Kershaw
Temperature	65°F
Humidity	44%

SECTION 5.4 TEST DATA – CHANNEL SEPARATION MEASUREMENT

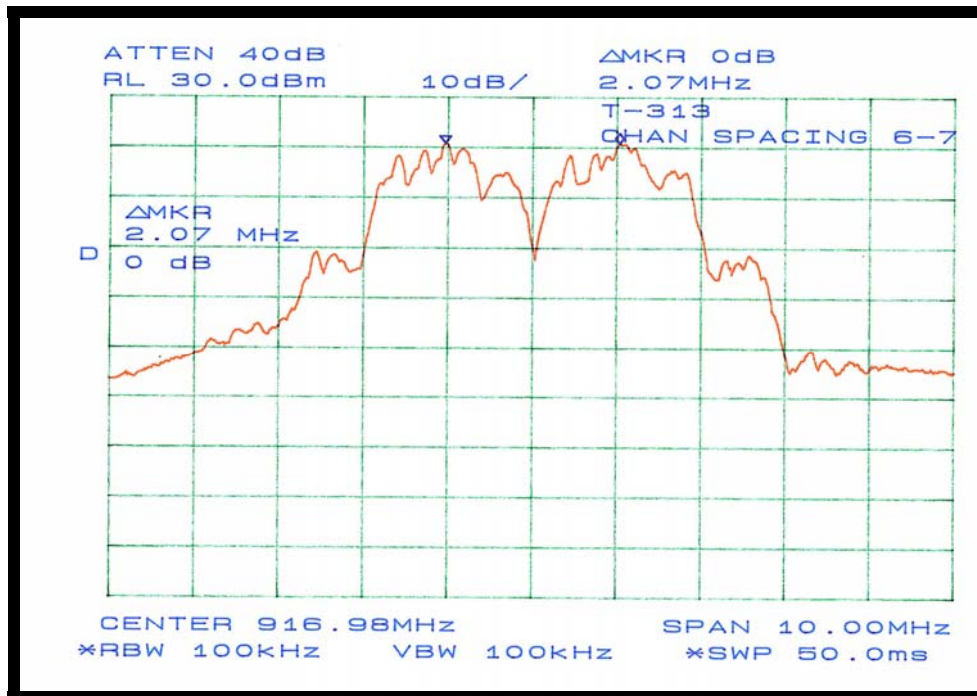


Figure 8: Plot of Channel Separation Measurement at 916.98 MHz

Test-Data Summary – Channel Separation Measurement:

Peak Frequencies = (CH 6) at 915.968 MHz and (CH 7) at 918.106 MHz
 Channel Separation (measured) = 2.07 MHz

PART 6 MAXIMUM POWER OUTPUT PER 47 CFR 15.247(B) (1)

SECTION 6.1 MAXIMUM POWER MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 6.2 SITE USED – MAXIMUM POWER MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 6.3 ADMINISTRATIVE DETAILS – MAXIMUM POWER MEASUREMENT

Test Date(s):	June 20 th , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	68°F
Humidity	45%

SECTION 6.4 TEST DATA – MAXIMUM POWER MEASUREMENT (CH 0 – 903.680 MHz)

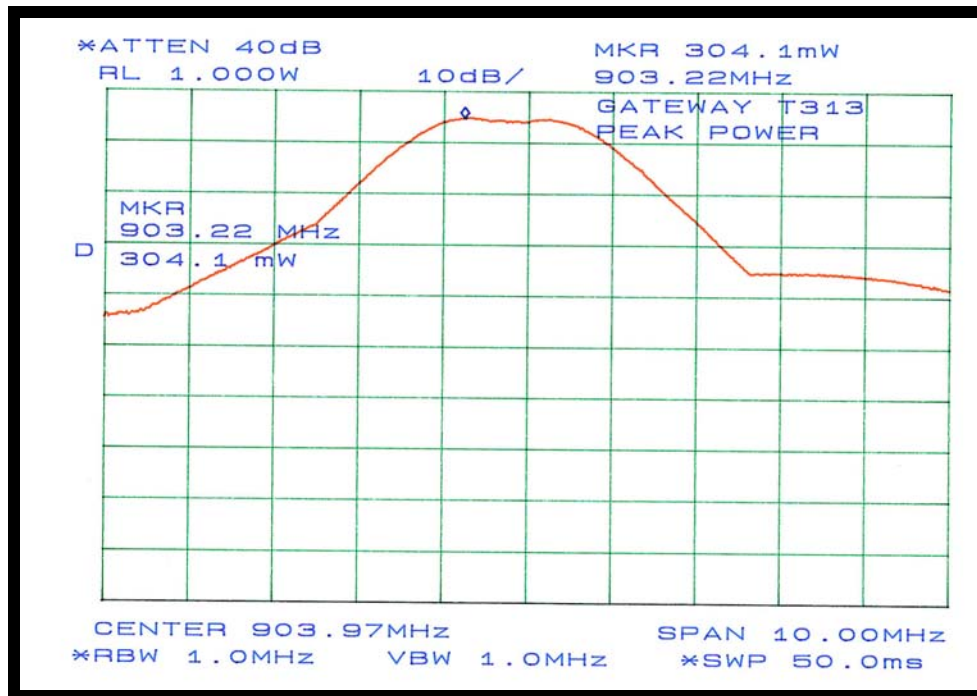


Figure 9: Plot of Maximum Power Measurement at Channel 0

Test-Data Summary – Peak Measurement (CH 0 – 903.680 MHz):

Center Frequency = 903.97 MHz
 Peak Level: = 304.1 mW
 Limit per 15.247(b)(1) = 1 W

SECTION 6.5 TEST DATA – MAXIMUM POWER MEASUREMENT (CH 6 – 915.97 MHz)

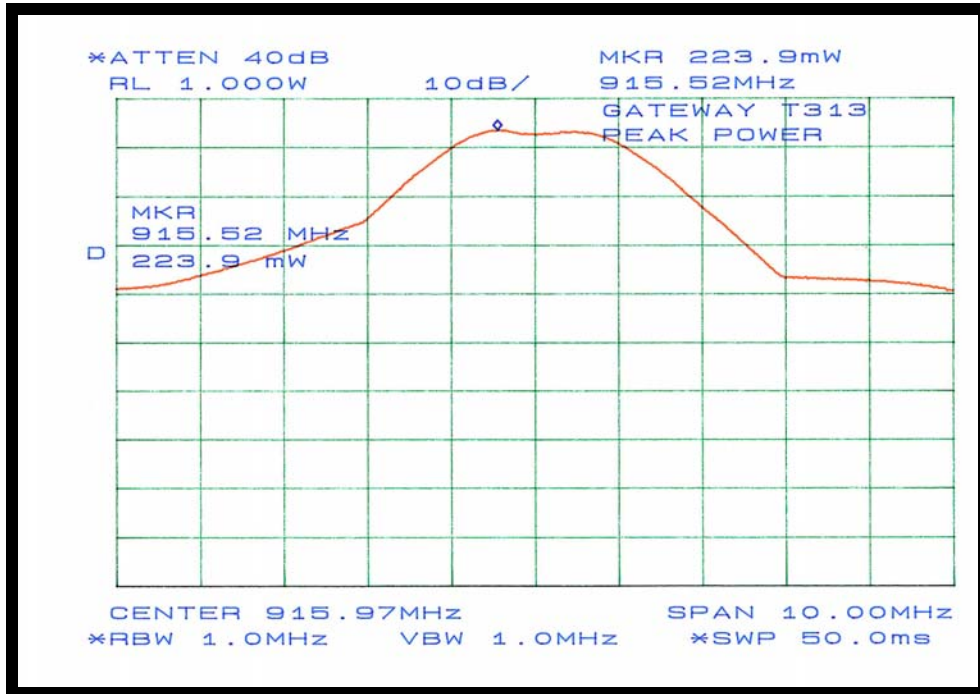


Figure 10: Plot of Maximum Power Measurement at Channel 6

Test-Data Summary – Maximum Power Measurement (CH 6 – 915.968 MHz):

Center Frequency = 915.97 MHz
Peak Level: = 223.9 mW
Limit per 15.247(b)(1) = 1 W

SECTION 6.6 TEST DATA – MAXIMUM POWER MEASUREMENT (CH 11 – 926.208 MHz)

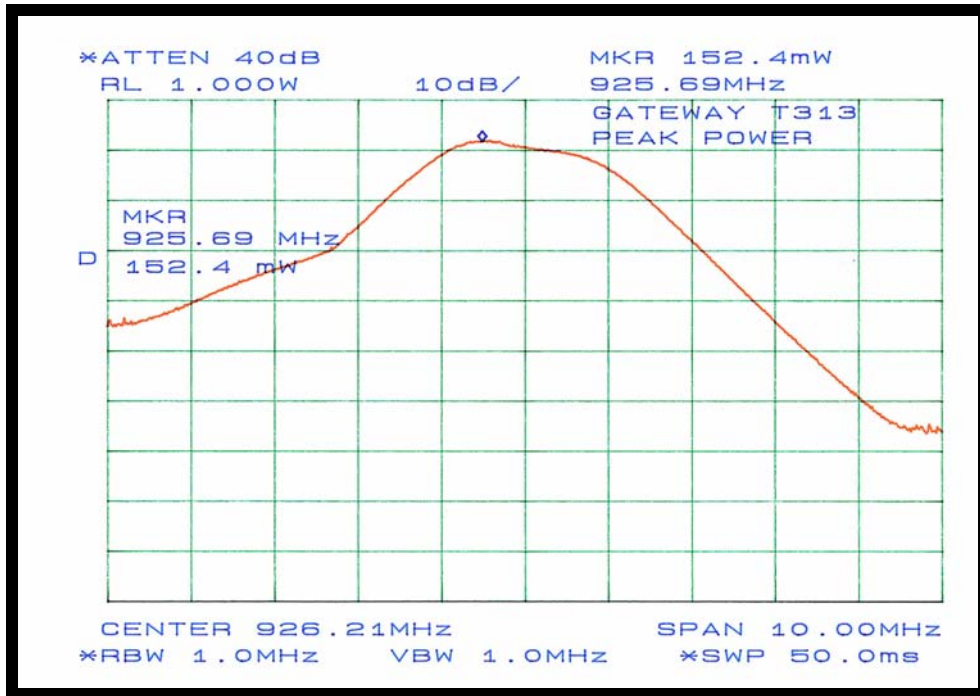


Figure 11: Plot of Maximum Power Measurement at Channel 11

Test-Data Summary – Maximum Power Measurement (CH 11 – 926.208 MHz):

Center Frequency = 926.21 MHz
 Peak Level: = 152.4 mW
 Limit per 15.247(b)(1) = 1 W

PART 7 SPECTRAL DENSITY per 47 CFR 15.247(c)

SECTION 7.1 SPECTRAL DENSITY MEASUREMENT

The EUT was set up at 3m in accordance with the suggested configuration given in FCC Alternative Measurement Procedure. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in FCC Standard. The EUT was set up on a wooden non-conductive tabletop, 80 cm above the ground reference plane, in a semi-anechoic absorber lined shielded room.

The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 7.2 SITE USED – SPECTRAL DENSITY MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 7.3 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS-

Test Date(s):	June 22 nd , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	44%

SECTION 7.4 TEST DATA – SPECTRAL DENSITY MEASUREMENT (CHANNEL 0 903.680MHZ)

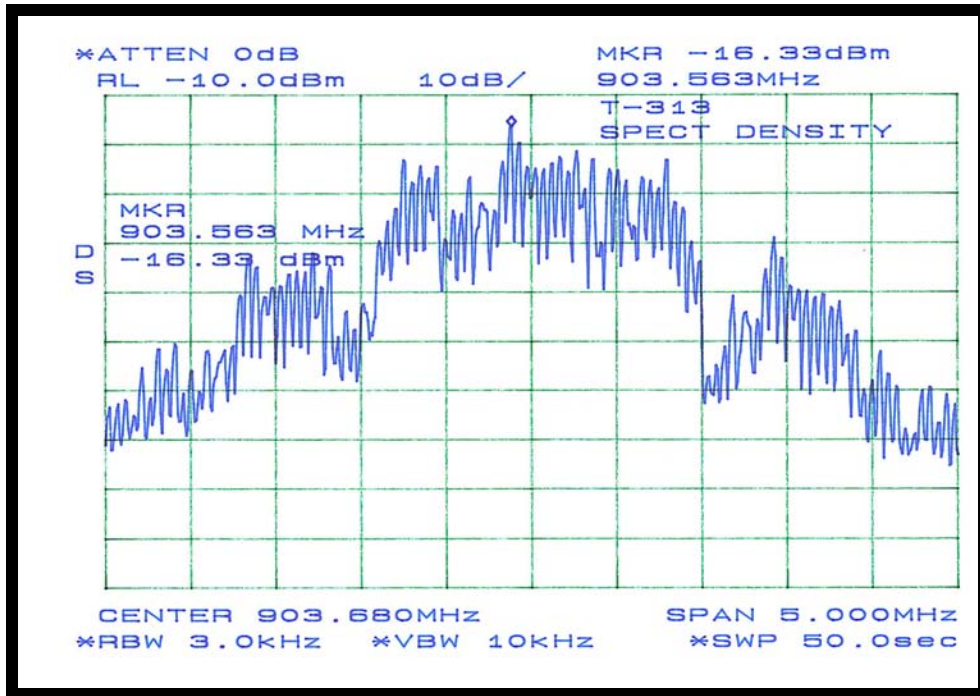


Figure 12: Plot of Spectral Density Measurement at Channel 0

Test-Data Summary – Spectral Density Measurement (903.563MHz):

Center Frequency = 903.680 MHz
 Peak Level: = -16.33dBm = 90.67dBμV
 Field Strength: = 90.67+22.4+1.0=114.07dBμV
 114.07dBμV = 7.07dBm.

Power Spectral Density (alternate method) per FCC Appendix C

$$P = (Ed)^2 / (30G)$$

$$P = (7.07 \times 3)^2 / (30 \times 5.0) = 3.0dBm$$

P = Power Spectral Density
 E = Field strength = 7.07dBm.
 d = Distance (m) = 3m
 G = Gain of the antenna = 5.0
 Limit per 15.247(c) = 8dBm

SECTION 7.5 TEST DATA – SPECTRAL DENSITY MEASUREMENT (CHANNEL 6 – 915.968MHZ)

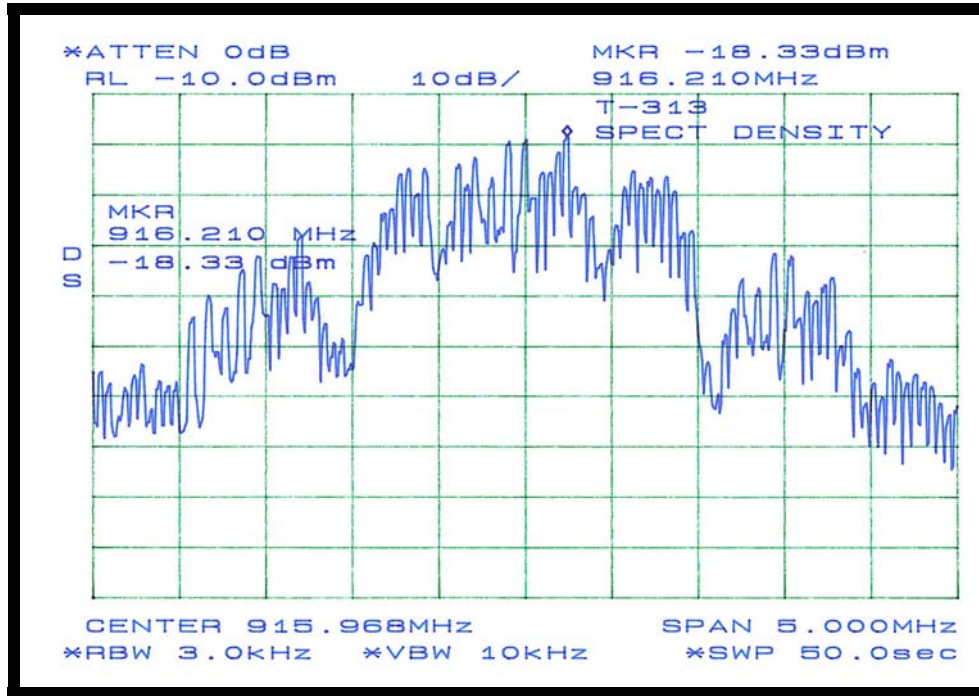


Figure 13: Plot of Spectral Density Measurement at Channel 6

Test-Data Summary – Spectral Density Measurement (916.210 MHz)

Center Frequency = 915.968 MHz
 Peak Level: = -18.33dBm = 88.67dBμV
 Field Strength: = 88.67+22.5+1.0=112.17dBμV
 112.17dBμV = 5.17dBm.

Power Spectral Density (alternate method) per FCC Appendix C

$$P = (Ed)^2 / (30G)$$

$$P = (5.17 \times 3)^2 / (30 \times 5.0) = 1.6dBm$$

P = Power Spectral Density
 E = Field strength = 5.17dBm.
 d = Distance (m) = 3m
 G = Gain of the antenna = 5.0

Limit per 15.247(c) = 8dBm

SECTION 7.6 TEST DATA – SPECTRAL DENSITY MEASUREMENT (CHANNEL 11 – 926.208MHZ)

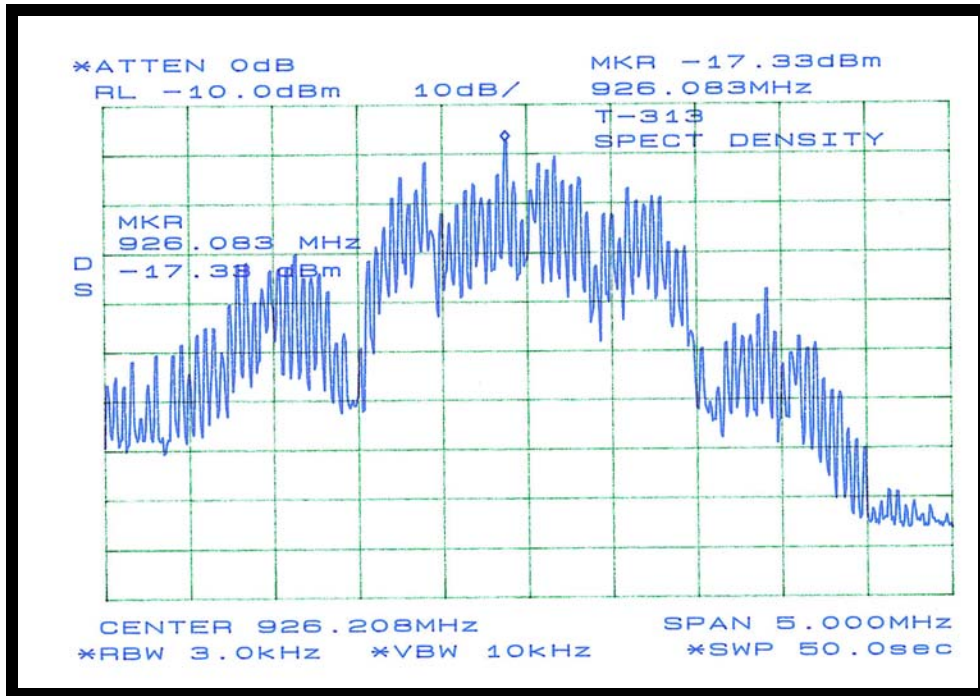


Figure 14: Plot of Spectral Density Measurement at Channel 11

Test-Data Summary – Spectral Density Measurement (926.083 MHz)

Center Frequency = 926.208 MHz
 Peak Level: = -17.33dBm = 89.67dBμV
 Field Strength: = 89.67+22.6+1.0=113.27dBμV
 113.27dBμV = 6.27dBm.

Power Spectral Density (alternate method) per FCC Appendix C

$$P = (Ed)^2 / (30G)$$

$$P = (6.27 \times 3)^2 / (30 \times 5.0) = 2.4dBm$$

P = Power Spectral Density
 E = Field strength = 6.27dBm.
 d = Distance (m) = 3m
 G = Gain of the antenna = 5.0
 Limit per 15.247(c) = 8dBm

Test Setup Photograph



Figure 15: Power Spectral Density Test Setup (Front view)



Figure 16: Power Spectral density Test Setup (Rear View)

PART 8 6dB BANDWIDTH per 47 CFR 15.247(a) (2)

SECTION 8.1 6DB BANDWIDTH MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 8.2 SITE USED – 6DB BANDWIDTH MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 8.3 ADMINISTRATIVE & ENVIRONMENTAL - 6DB BANDWIDTH DETAILS

Test Date(s):	June 22 nd , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	44%

SECTION 8.4 TEST DATA – 6DB BANDWIDTH MEASUREMENT (CHANNEL 0 – 903.68 MHZ)

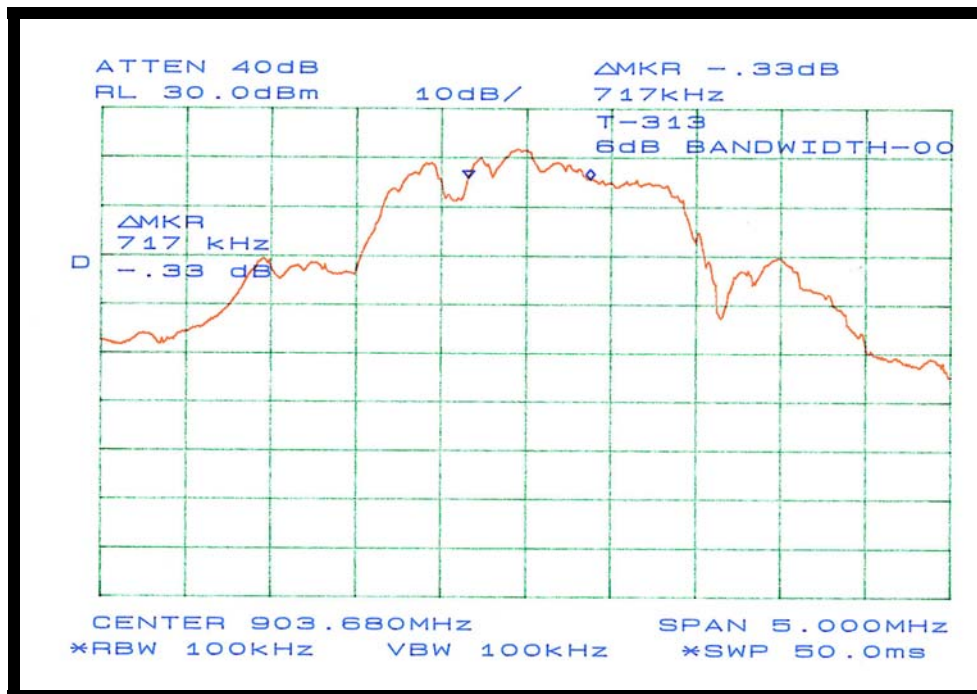


Figure 17: Plot of 6dB Bandwidth Measurement at Channel 0

Test-Data Summary – 6dB Bandwidth Measurement (CH 0 – 903.68 MHz):

Center Frequency = 903.68 MHz
 6dB Bandwidth = 717 KHz
 Limit per 15.247(a)(2) = 500KHz minimum

SECTION 8.5 TEST DATA – 6DB BANDWIDTH MEASUREMENT (CH 6 – 915.968 MHZ)

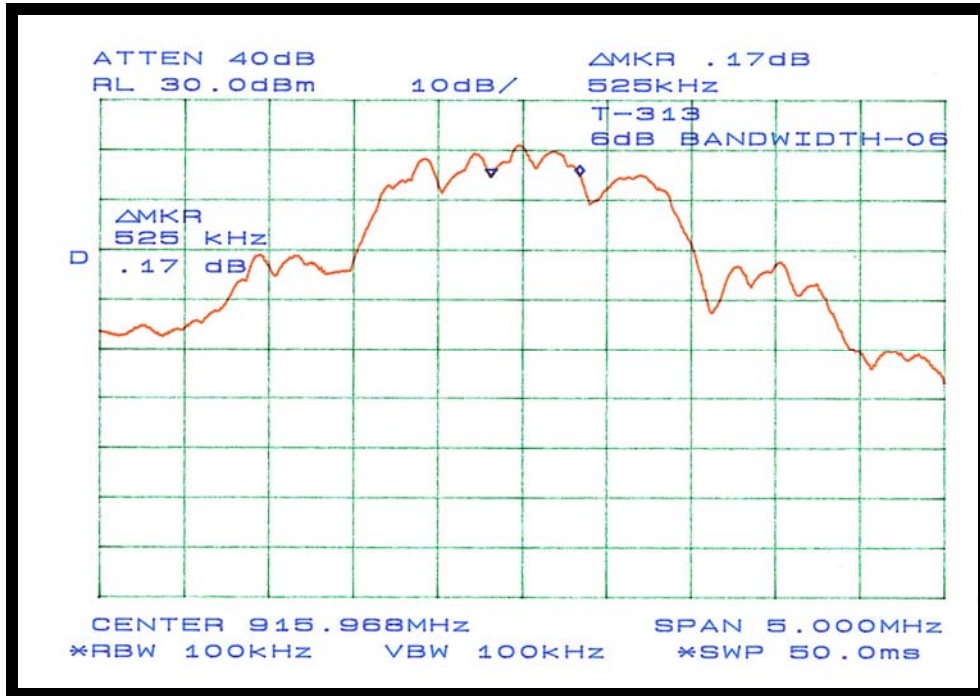


Figure 18: Plot of 6dB Bandwidth Measurement at Channel 6

Test-Data Summary – 6dB Bandwidth Measurement (CH 6 – 915.968 MHz):

Center Frequency = 915.968 MHz
 6dB Bandwidth = 525 KHz
 Limit per 15.247(a)(2) = 500KHz minimum

SECTION 8.6 TEST DATA – 6DB BANDWIDTH MEASUREMENT (CH 11 – 926.208 MHZ)

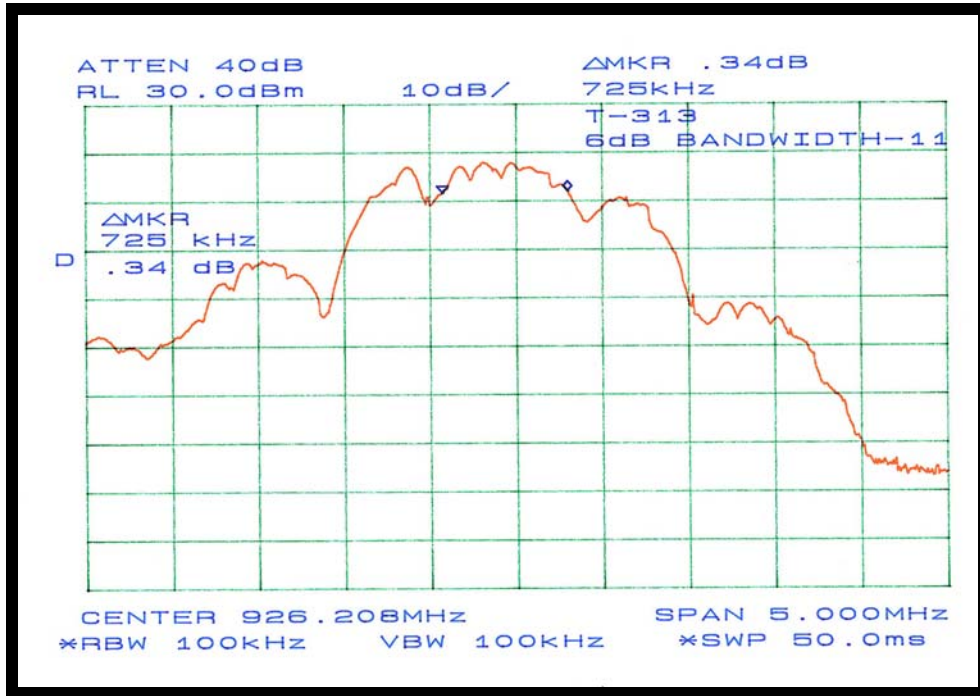


Figure 19: Plot of 6dB Bandwidth Measurement at Channel 11

Test-Data Summary – 6dB Bandwidth Measurement (CH11 - 926.208MHz).

Center Frequency = 926.208 MHz
 6dB Bandwidth = 725 KHz
 Limit per 15.247(a)(2) = 500KHz minimum

PART 9 6DB BANDEDGE MEASUREMENT

6dB BAND-EDGE per 47 CFR 15.247(c)

SECTION 9.1 6DB BAND-EDGE MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 9.2 SITE USED –BAND-EDGE MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room
- Other: _____

SECTION 9.3 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS–BAND-EDGE MEASUREMENT

Test Date(s):	June 22 nd , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	44%

SECTION 9.4 TEST DATA –BAND-EDGE MEASUREMENT (LOWER BANDEGE - 902MHZ)

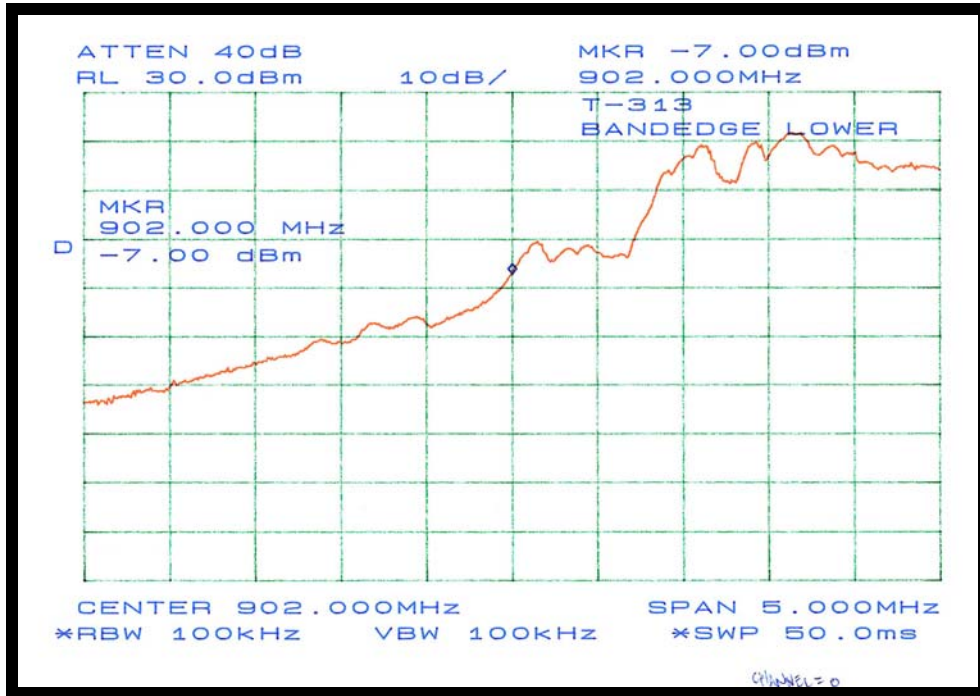


Figure 20: Plot of Lower Band-Edge Measurement at 902MHz

Test-Data Summary –Band-Edge Measurement (Lower Band Edge – 902MHz):

Center Frequency = 902 MHz
 Band-Edge Level = -7.0dBm
 Limit per 15.247(c) = 20dB below in-band peak (or -20dB)

SECTION 9.5 TEST DATA –BAND-EDGE MEASUREMENT (UPPER BAND EDGE - 928MHZ)

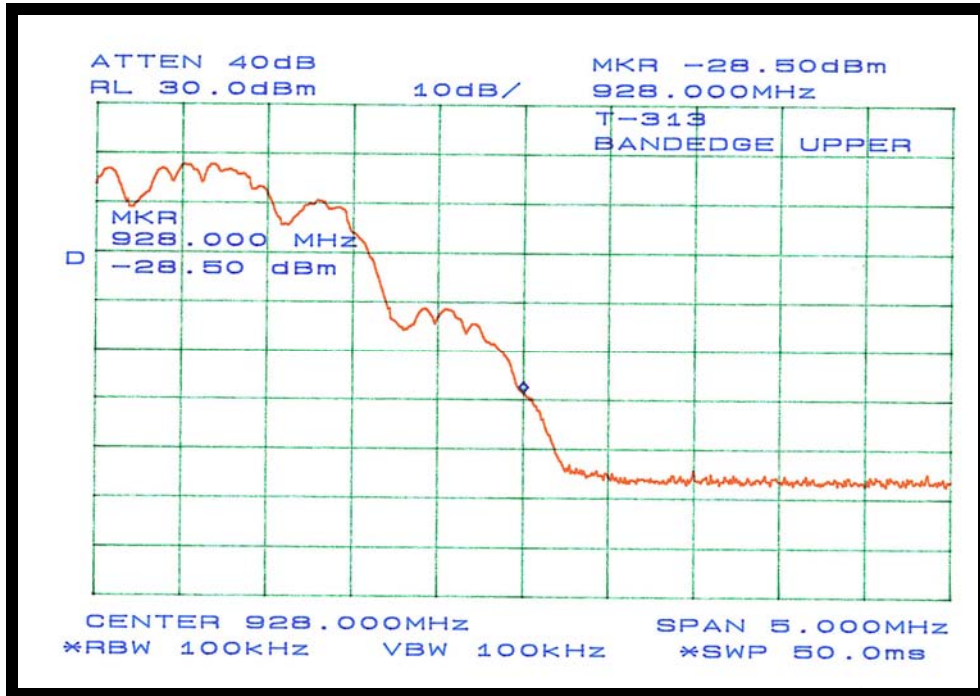


Figure 21: Plot of Band-Edge Measurement at 928MHz

Test-Data Summary –Band-Edge Measurement (Upper Band Edge – 928MHz):

Center Frequency = 928MHz
 Band-Edge Level = -28.50dBm
 Limit per 15.247(c) = 20dB below in-band peak (or -20dB)

PART 10 100kHz Bandwidth Out-of-Band Emissions per 47 CFR 15.247(a) (2)

SECTION 10.1 100KHZ BANDWIDTH OUT-OF-BAND EMISSIONS MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 10.2 SITE USED – 100 KHZ BANDWIDTH OUT-OF-BAND MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 10.3 ADMINISTRATIVE & ENVIRONMENTAL - (OUT OF BAND DETAILS)

Test Date(s):	June 22 nd , 2005
Test Engineer(s):	Femi Ojo and Bob Kershaw
Temperature	65°F
Humidity	44%

SECTION 10.4 TEST DATA – 100KHZ OUT-OF-BAND MEASUREMENT (IN-BAND PEAK)



Figure 22: Plot of 100 kHz Bandwidth Out-of-Band Measurement (In-Band-Peak)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (In-Band Peak):

Center Frequency = 903.68 MHz
 Center Frequency Peak = 21.83dBm
 20dB Limit (measured) per 15.247(c) = 1.83dBm

Prepared By: ITC Engineering Services, Inc. 9959 Calaveras Road, PO Box 543 Sunol, California 94586-0543 Tel: [925] 862-2944 Fax: [925] 862-9013 Email: docs@itcenc.com Web: www.itcenc.com	Product: Telco Gateway Model :Telco Gateway With Bandpass Filter FCC ID: OWS - 919
---	--

Test-Data – 100 kHz Bandwidth Out-of-Band Measurement (Ch 0-903.680 MHz) 27MHz to 940MHz

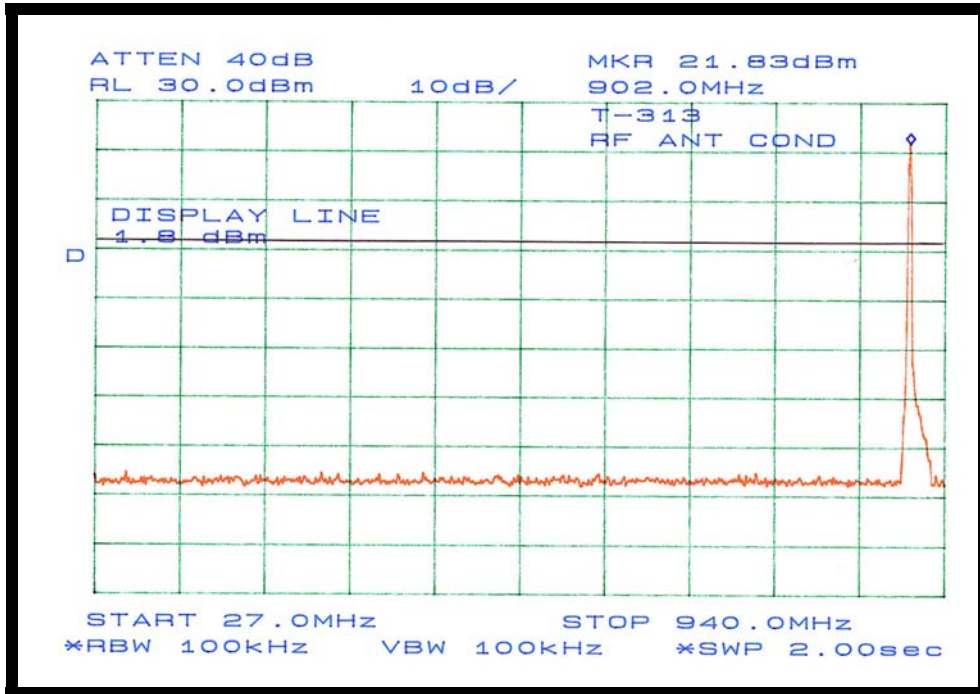


Figure 23: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 0 (27 MHz – 940 MHz)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement Ch 0 – 903.680MHz (27MHz – 940MHz)

Peak Frequency (Fundamental) = 902 MHz
 Maximum Peak (27MHz to 940MHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = 1.8dBm

SECTION 10.5 TEST DATA – 100 KHZ BANDWIDTH OUT-OF-BAND (CH 0 – 903.680 MHZ) 834 MHZ TO 5 GHZ

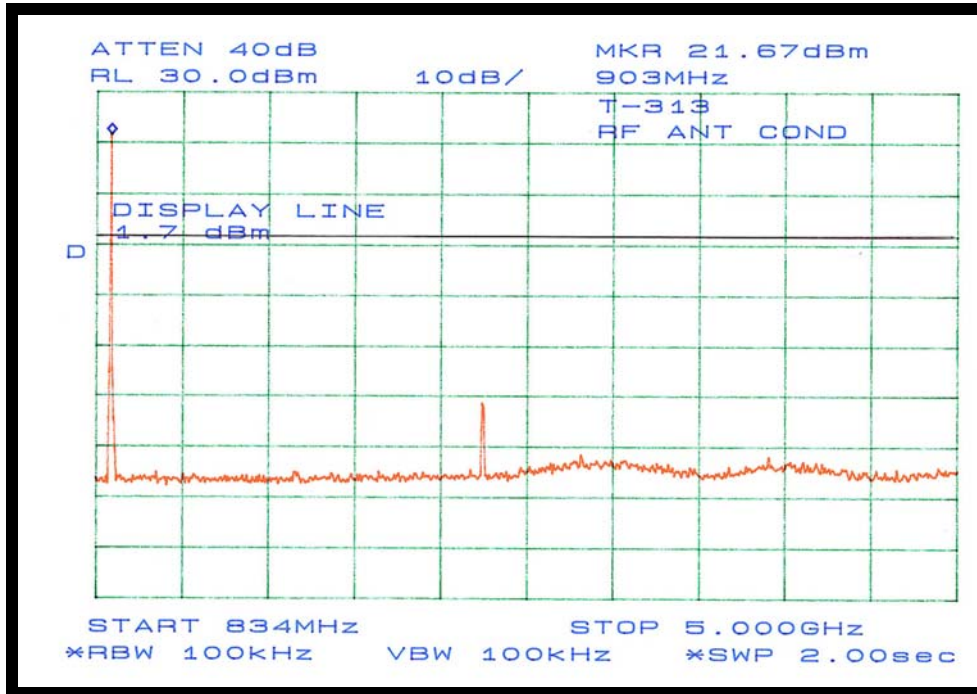


Figure 24: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 0 (834 MHz to 5 GHz))

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement Ch 0 – 903.680MHz (834MHz – 5GHz)

Peak Frequency (Fundamental) = 903 MHz
Maximum Peak (834MHz to 5GHz) = Below 20dB limit
20dB Limit (measured) per 15.247(c) = 1.7dBm

SECTION 10.6 TEST DATA – 100 KHZ BANDWIDTH OUT-OF-BAND (CH 0- 903.680MHZ) 5 GHZ TO 10 GHZ

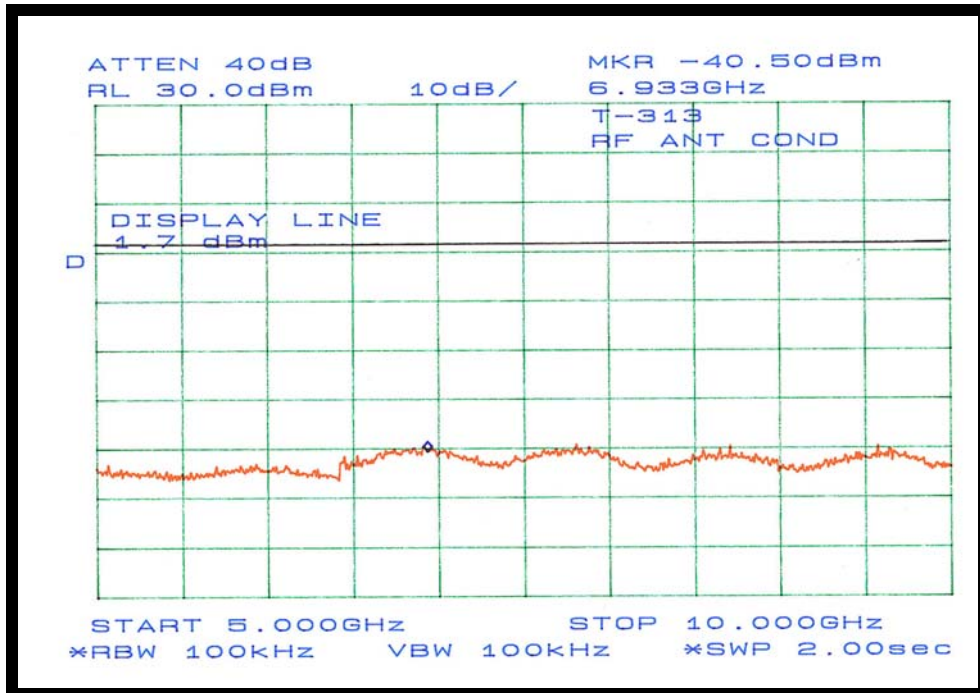


Figure 25: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 0 (5 GHz to 10 GHz)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement Ch 0 903.680MHz (5 GHz to 10 GHz)

Peak Frequency (Fundamental) = 903.680MHz
 Maximum Peak (5GHz to 10GHz) = Noise Floor
 20dB Limit (measured) per 15.247(c) = 1.7dBm

SECTION 10.7 TEST DATA – 100 KHZ BANDWIDTH OUT-OF-BAND (CH 6- 915.968) 27MHZ TO 940 MHZ

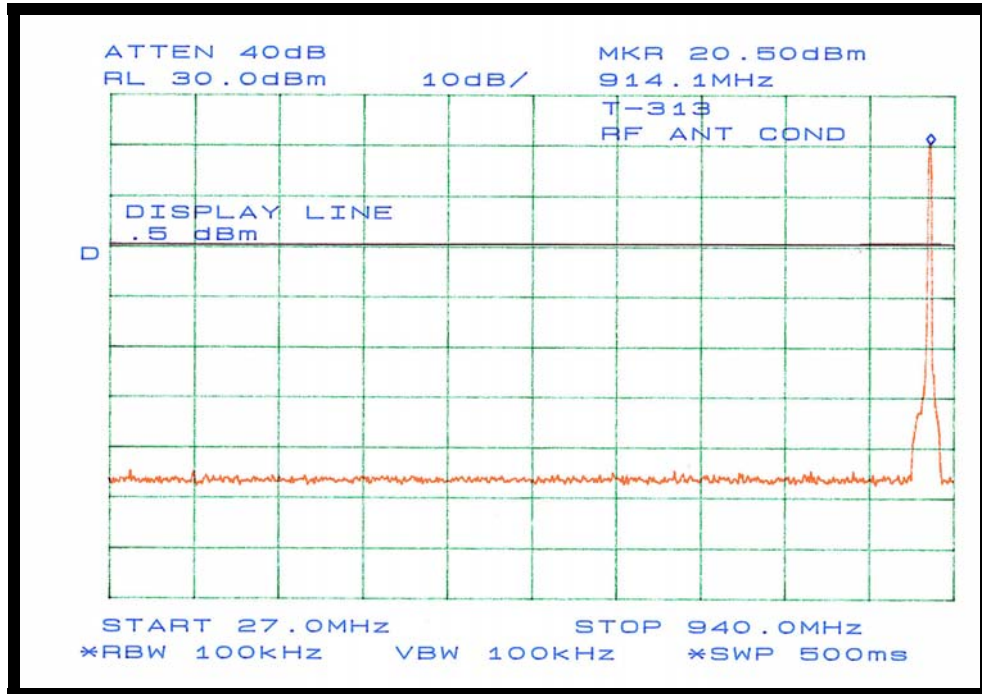


Figure 26: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 6 (27MHz to 940 MHz)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement Ch 6- 915.968MHz (27MHz to 940 MHz)

Peak Frequency (Fundamental) = 914.14 MHz
 Maximum Peak (27MHz to 940MHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = 0.5dBm

SECTION 10.8 TEST DATA – 100 KHZ BANDWIDTH OUT-OF-BAND (CH 6 – 915.968MHZ) 834 MHZ TO 5 GHZ

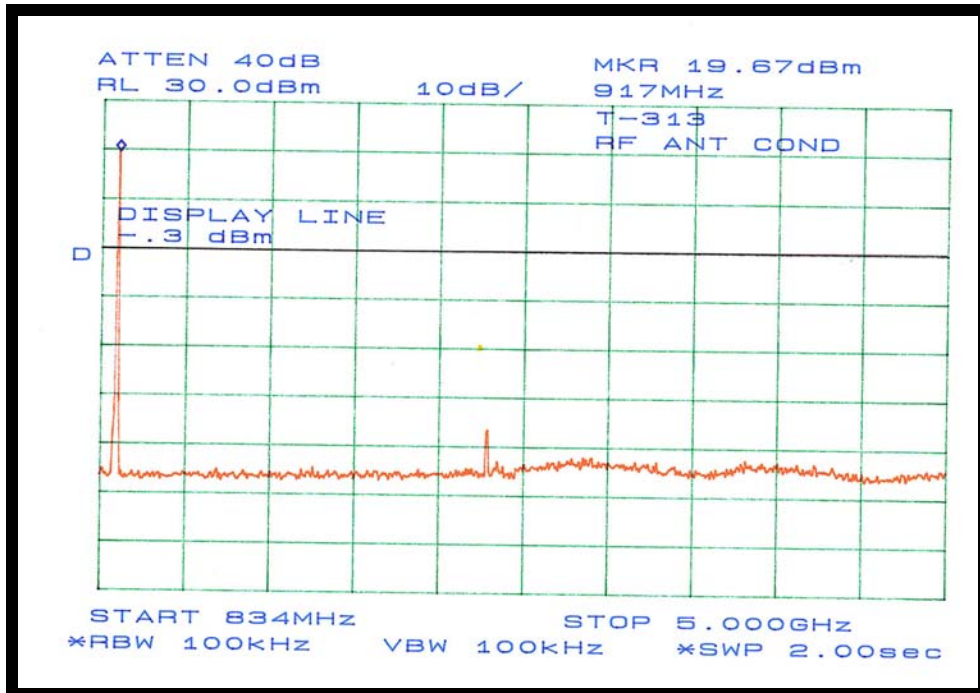


Figure 27: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 6 (834 MHz to 5 GHz)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement Ch 6 – 915.968MHz (834 MHz to 5 GHz):

Peak Frequency (Fundamental)	=	917 MHz
Maximum Peak (834MHz to 5GHz)	=	Below 20dB limit
20dB Limit (measured) per 15.247(c)	=	-0.3dBm

SECTION 10.9 TEST DATA – 100 KHZ BANDWIDTH OUT-OF-BAND (CH 6 – 915.968MHZ) 5 GHZ TO 10 GHZ

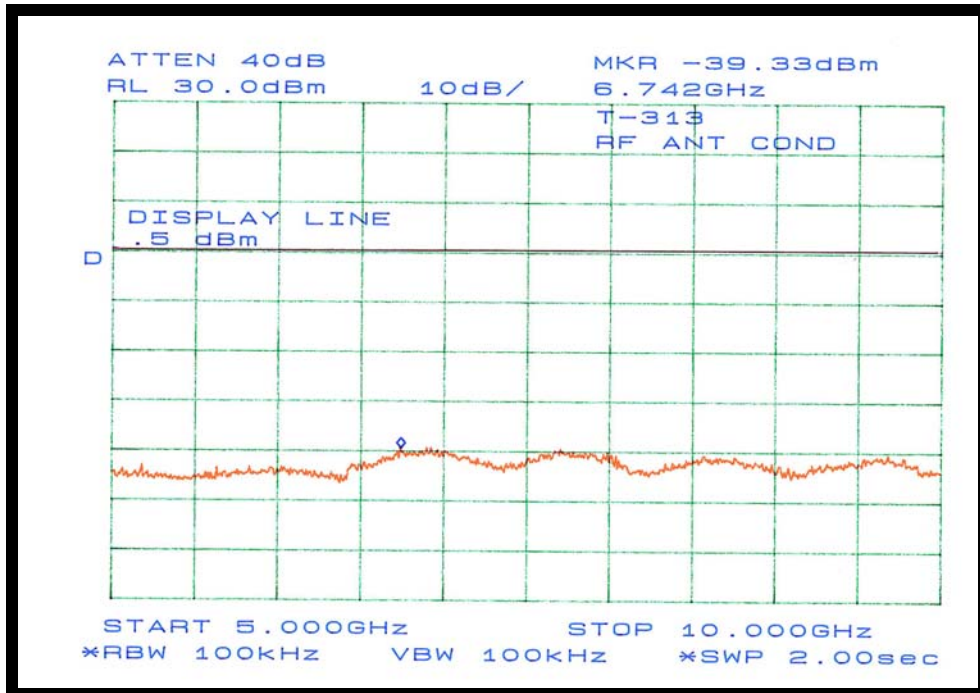


Figure 28: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 6 (5 to 10 GHz)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement Ch 6 - 915.968MHz (5 to 10 GHz)

Peak Frequency (Fundamental) = 915.968MHz
 Maximum Peak (5GHz to 10GHz) = Noise Floor
 20dB Limit (measured) per 15.247(c) = 0.5dBm

SECTION 10.10 TEST DATA – 100 KHZ BANDWIDTH OUT-OF-BAND(CH 11 – 926.208MHZ) 27 MHZ TO 940 MHZ

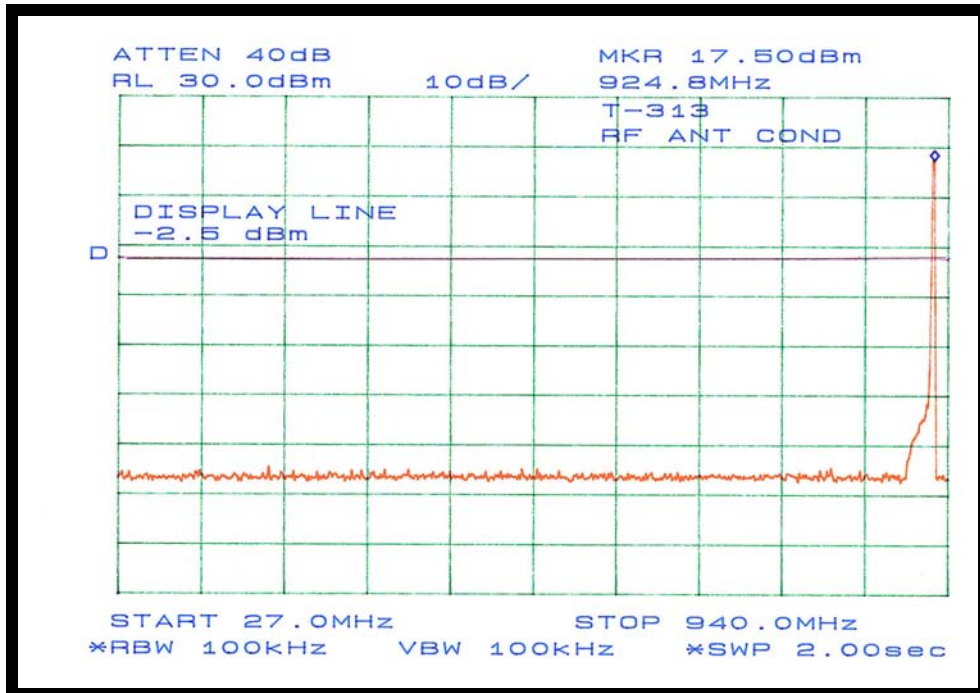


Figure 29: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 11 (27MHz to 940 MHz)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement Ch 11-926.208MHz (27MHz to 940 MHz)

Peak Frequency (Fundamental) = 924.8 MHz
Maximum Peak (27MHz to 940 MHz) = Noise floor
20dB Limit (measured) per 15.247(c) = -2.5dBm

SECTION 10.11 TEST DATA -100 KHZ BANDWIDTH OUT OF BAND (CH 11 - 926.208MHZ) 817MHZ - 5GHZ

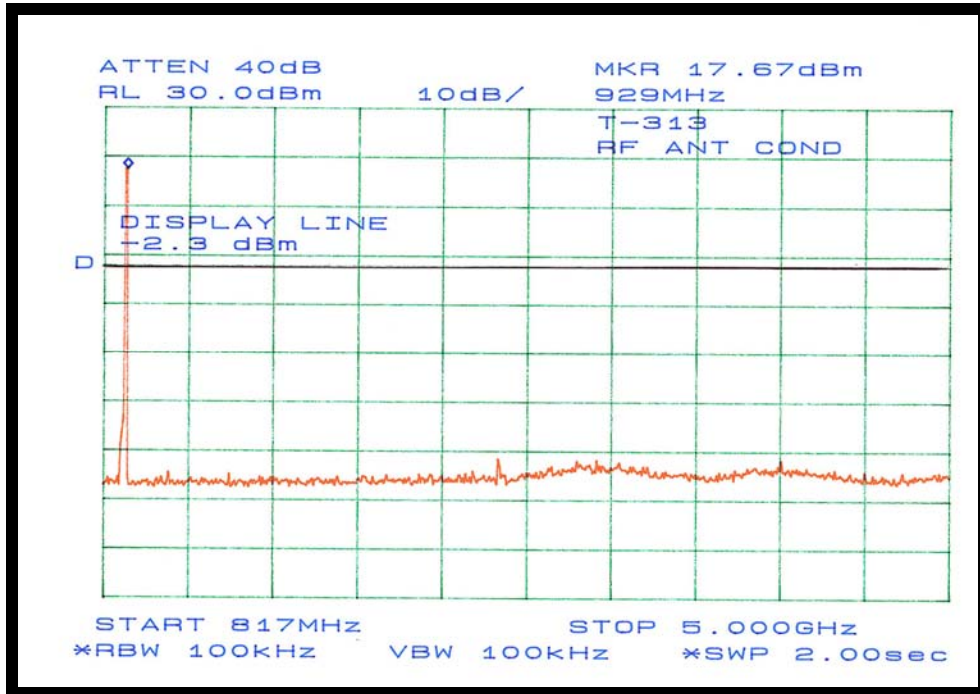


Figure 30: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 11(817 MHz to 5 GHz)

Test-Data Summary -100 kHz Bandwidth Out-of-Band Measurement Ch 11- 926.208MHz (817 MHz to 5 GHz)

Peak Frequency (Fundamental) = 929 MHz
 Maximum Peak (817MHz to 5GHz) = Below 20dB limit
 20dB Limit (measured) per 15.247(c) = -2.3dBm

SECTION 10.12 TEST DATA –100 KHZ BANDWIDTH OUT OF BAND (CH 11 – 926.208MHZ) 5GHZ – 10GHZ

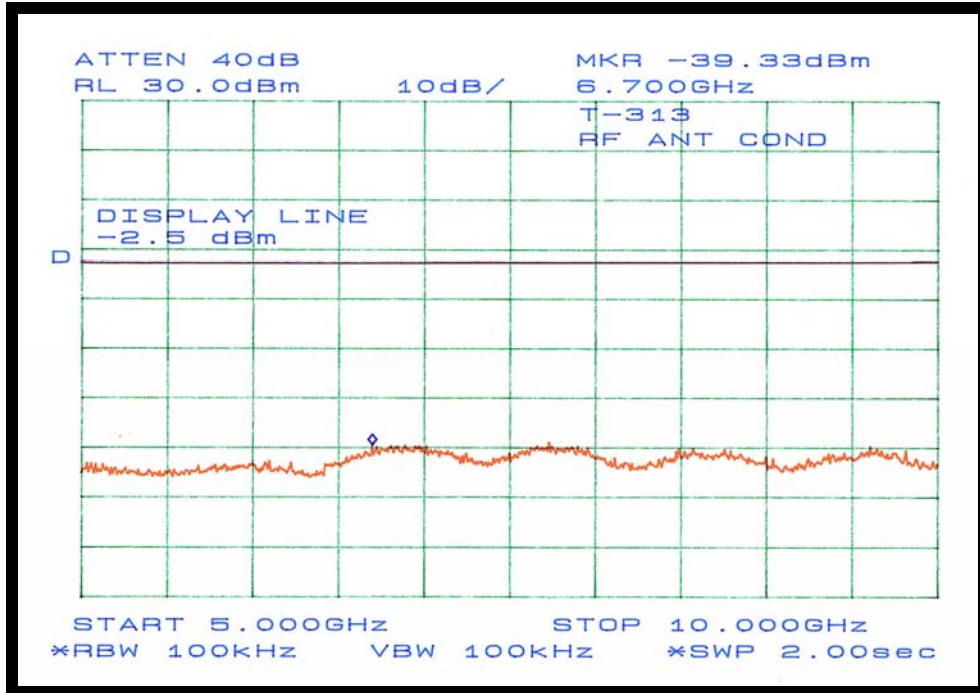


Figure 31: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Ch 11(5 GHz – 10 GHz)

Test-Data Summary –100 kHz Bandwidth Out-of-Band Measurement Ch 11- 926.208MHz (5 GHz – 10 GHz)

Peak Frequency (Fundamental) = 926.208 MHz
 Maximum Peak (924.2 to 5000 MHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = -2.5dBm

PART 11 SPURIOUS/HARMONIC EMISSIONS IN THE RESTRICTED BANDS

SECTION 11.1 TEST SPECIFICATION:

FCC PART 15 SECTION 47 CFR 15.205
 FCC PART 15 SECTION 47 CFR 15.247(c)

SECTION 11.2 TEST RANGE – SPURIOUS/HARMONICS EMISSIONS:

The measurement range investigated was from 30 MHz to 10GHz.

SECTION 11.3 SITE USED – SPURIOUS/HARMONICS EMISSIONS MEASUREMENTS

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room
- Other: _____

SECTION 11.4 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS

Test Date:	June 21 st , 2005
Test Engineer:	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	44%

SECTION 11.5 SPURIOUS AND HARMONIC EMISSION IN THE RESTRICTED BANDS DATA

Table 12 Test Data – Spurious Emissions below 1GHz (Measurement @10m)

The table below shows the summary of the highest amplitudes of the spurious RF radiated emissions from the equipment under test.

INDICATED FREQ MHz	CORRECTION AMPL dBuV/m	CORRECTION		CORR AMPL dBuV/m	TURNTABLE ANG DEG	ANT HT m	ANT POL -	CLASS A		CLASS B		FILTER MODE	NOTES
		ANT dB	CAB dB					AMPL dBuV/m	MARG dB	AMPL dBuV/m	MARG db		
50.11	7.7	11.1	2.2	21.0	0	1.0	VB	-	-	30.0	-9.0	P	
86.93	15.0	8.6	3.0	26.6	90	1.0	VB	-	-	30.0	-3.4	P	
133.39	14.6	12.4	3.4	30.4	180	1.0	HB	-	-	33.0	-2.6	P	
133.40	10.8	12.4	3.4	26.6	180	3.0	HB	-	-	33.0	-6.4	P	
133.42	12.1	12.4	3.4	27.9	180	1.0	VB	-	-	33.0	-5.1	P	
166.73	7.1	14.9	3.9	25.8	90	1.0	VB	-	-	33.0	-7.2	P	
166.73	8.8	14.9	3.9	27.5	270	1.0	HB	-	-	33.0	-5.5	P	
166.77	8.1	14.9	3.9	26.8	180	3.0	HB	-	-	33.0	-6.2	P	
200.06	5.3	11.7	3.9	20.9	90	1.0	HL	-	-	33.0	-12.1	P	
746.06	2.3	20.5	10.9	33.7	90	1.0	HL	-	-	36.0	-2.3	P	

Note: No emissions of significant levels were observed between 30MHz-50.11MHz and 746.06MHz-1000MHz.

Table 13 Test Data – Spurious Emissions above 1GHz (Measurement at 3m)

The table below shows the summary of the highest amplitudes of the spurious RF radiated emissions from the equipment under test.

INDICATED		CORRECTION		CORR AMPL dBuV/m	TURNTABLE ANG DEG	ANT HT m	ANT POL -	CLASS A		CLASS B		FILTER MODE	NOTES
FREQ MHz	AMPL dBuV/m	ANT dB	CAB dB					AMPL dBuV/m	MARG dB	AMPL dBuV/m	MARG db		
903.60	32.5	23.9	4.3	60.6	90	1.0	HH	-	-	143.0	-82.4	P	
903.80	31.8	23.9	4.3	60.0	90	1.0	VH	-	-	143.0	-83.0	P	
916.20	10.5	23.9	3.9	38.3	45	1.0	HH	-	-	46.0	-7.7	P	
929.70	13.3	24.0	4.6	41.9	90	1.0	VH	-	-	46.0	-4.1	P	
929.90	0.0	24.0	4.7	28.6	180	1.0	HH	-	-	46.0	-17.4	P	
940.30	10.5	24.0	3.2	37.7	45	1.0	HH	-	-	46.0	-8.3	P	
960.00	6.7	24.1	3.8	34.6	45	1.0	VH	-	-	46.0	-11.4	P	
966.80	6.8	24.1	3.3	34.1	90	1.0	HH	-	-	54.0	-19.9	P	
973.20	8.8	24.1	3.3	36.3	180	1.0	VH	-	-	54.0	-17.7	P	
976.90	4.6	24.1	3.7	32.4	45	1.0	HH	-	-	54.0	-21.6	P	
1000.00	15.5	24.2	2.0	41.7	45	1.0	VH	-	-	54.0	-12.3	P	
1019.00	16.5	24.2	2.0	42.8	0	1.0	HH	-	-	54.0	-11.2	P	
1078.00	14.8	24.3	2.2	41.3	45	1.0	HH	-	-	54.0	-12.7	P	
1094.00	16.3	24.4	2.2	42.9	180	1.0	HH	-	-	54.0	-11.1	P	
1099.00	16.2	24.4	2.2	42.7	45	1.0	VH	-	-	54.0	-11.3	P	
1138.00	16.8	24.4	2.3	43.6	90	1.0	HH	-	-	54.0	-10.4	P	
1143.00	15.7	24.5	2.3	42.4	45	1.0	HH	-	-	54.0	-11.6	P	
1167.00	15.8	24.5	2.3	42.7	90	1.0	VH	-	-	54.0	-11.3	P	
1192.00	14.0	24.5	2.4	40.9	90	1.0	HH	-	-	54.0	-13.1	P	
1200.00	16.8	24.6	2.4	43.8	90	1.0	HH	-	-	54.0	-10.2	P	
1200.00	16.7	24.6	2.4	43.6	90	1.0	VH	-	-	54.0	-10.4	P	
1330.00	14.0	24.8	2.6	41.4	180	1.0	HH	-	-	54.0	-12.6	P	
1343.00	15.8	24.8	2.6	43.2	180	1.0	HH	-	-	54.0	-10.8	P	
1346.00	15.0	24.8	2.6	42.4	45	1.0	VH	-	-	54.0	-11.6	P	
1505.00	13.8	25.1	2.7	41.7	180	1.0	VH	-	-	54.0	-12.3	P	
1516.00	14.8	25.2	2.8	42.8	90	1.0	HH	-	-	54.0	-11.2	P	

1596.00	14.7	25.6	3.0	43.3	45	1.0	HH	-	-	54.0	-10.7	P
1685.00	14.7	26.1	3.3	44.1	90	1.0	HH	-	-	54.0	-9.9	P
1694.00	14.3	26.1	3.3	43.8	45	1.0	VH	-	-	54.0	-10.2	P
1807.00	20.7	26.7	3.4	50.8	180	1.0	VH	-	-	54.0	-3.2	A
1809.00	16.8	26.8	3.4	47.0	45	1.0	HH	-	-	54.0	-7.0	P
1875.00	14.8	27.2	3.3	45.3	90	1.0	HH	-	-	54.0	-8.7	P
1993.00	14.0	27.9	3.0	44.9	180	1.0	HH	-	-	54.0	-9.1	P
2152.00	14.8	28.1	2.7	45.6	90	1.0	HH	-	-	54.0	-8.4	P
2194.00	14.3	28.0	2.6	45.0	90	1.0	VH	-	-	54.0	-9.0	P
2261.00	13.8	28.3	2.5	44.6	180	1.0	HH	-	-	54.0	-9.4	P
2446.00	15.2	28.5	2.9	46.6	45	1.0	VH	-	-	54.0	-7.4	P
2526.00	14.3	28.7	3.0	46.0	90	1.0	HH	-	-	54.0	-8.0	P
2700.00	17.2	29.2	2.8	49.2	180	1.0	HH	-	-	54.0	-4.8	P
2712.00	15.7	29.2	2.8	47.7	180	1.0	HH	-	-	54.0	-6.3	P
2712.00	15.7	29.2	2.8	47.7	45	1.0	VH	-	-	54.0	-6.3	P
2843.00	15.0	29.6	2.8	47.5	90	1.0	VH	-	-	54.0	-6.5	P
3096.00	12.7	30.3	3.8	46.8	90	1.0	HH	-	-	54.0	-7.2	P
3286.00	13.3	30.7	4.9	49.0	90	1.0	VH	-	-	54.0	-5.0	P
3354.00	12.7	30.9	4.8	48.4	90	1.0	HH	-	-	54.0	-5.6	P
3362.00	12.8	30.9	4.8	48.5	45	1.0	VH	-	-	54.0	-5.5	P
3448.00	13.7	31.2	4.6	49.4	180	1.0	HH	-	-	54.0	-4.6	P
3603.00	12.3	31.5	4.6	48.5	90	1.0	VH	-	-	54.0	-5.5	P
3607.00	12.8	31.6	4.6	49.1	90	1.0	HH	-	-	54.0	-4.9	P
3862.00	12.8	32.3	4.9	50.0	90	1.0	VH	-	-	54.0	-4.0	P
3896.00	12.7	32.4	4.9	50.0	45	1.0	HH	-	-	54.0	-4.0	P
4269.00	12.7	32.5	5.0	50.2	45	1.0	VH	-	-	54.0	-3.8	P
4500.00	11.3	32.4	5.0	48.7	180	1.0	VH	-	-	54.0	-5.3	P
4503.00	12.5	32.4	5.0	49.9	90	1.0	HH	-	-	54.0	-4.1	P
4661.00	11.5	32.7	5.0	49.2	180	1.0	VH	-	-	54.0	-4.8	P
4805.00	10.8	32.9	5.0	48.8	45	1.0	HH	-	-	54.0	-5.2	P
5403.00	10.2	34.0	5.0	49.2	90	1.0	VH	-	-	54.0	-4.8	P
5455.00	11.3	34.1	5.0	50.4	90	1.0	VH	-	-	54.0	-3.6	P
5549.00	10.3	34.2	5.1	49.7	45	1.0	VH	-	-	54.0	-4.3	P

Note: No emissions of significant level was observed between 5549MHz-10000MHz.

Conclusion

The Telco Gateway with Bandpass filter, model T-313, meets the requirements of the test reference for Spurious and Harmonics emissions levels specified in the 47CFR15.209

SECTION 11.6 SPURIOUS PHOTOGRAPHS



Figure 32: Spurious Emissions Front View (Below 1 GHz)



Figure 33: Spurious Emissions Rear View (Below 1 GHz)



Figure 34: Spurious Emissions Front View (Above 1 GHz)



Figure 35: Spurious Emissions Rear View (Above 1 GHz)

PART 12 APPENDICES

A. EUT TECHNICAL SPECIFICATION

Applicant	Silver Spring Networks
General Description	Telco Gateway with Bandpass filter
Model	T-313,
Dimension	H= 4" ,L=9.5" ,W= 7.5" , WEIGHT = 7lbs
Power Input	120/480V , 60 Hz.

B.EUT PHOTOGRAPHS



Figure 36: EUT Top View



Figure 37: EUT Front View



Figure 38: EUT Rear View



Figure 39: EUT Side View

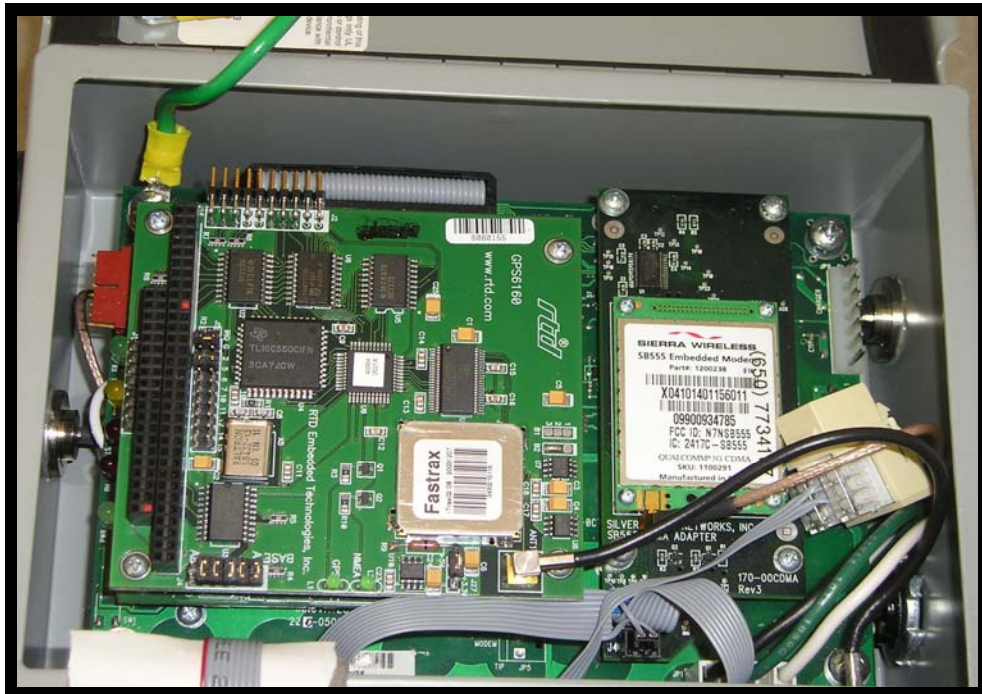


Figure 40: EUT Internal View1

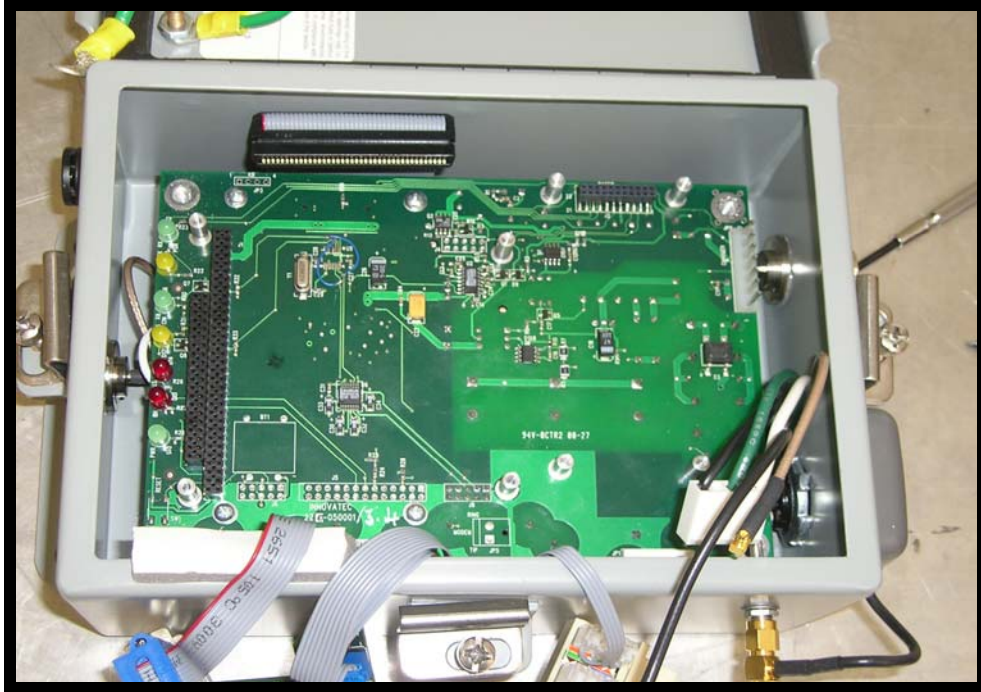


Figure 41: EUT Internal View2



Figure 42: EUT Component View



Figure 43: EUT Solder View

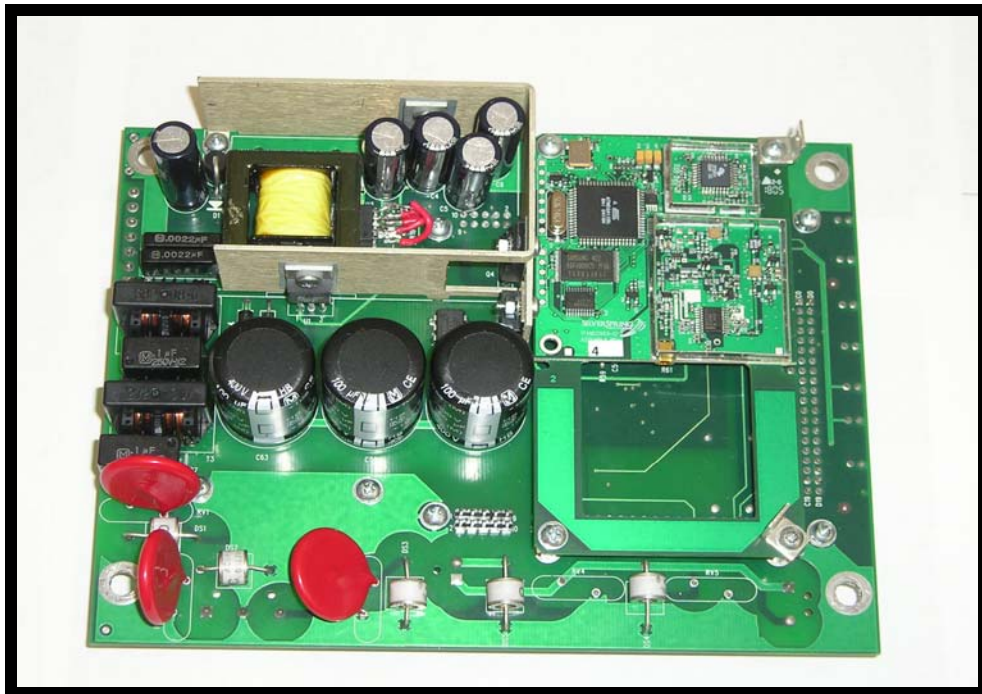


Figure 44: Component View with Shield off (View 1)

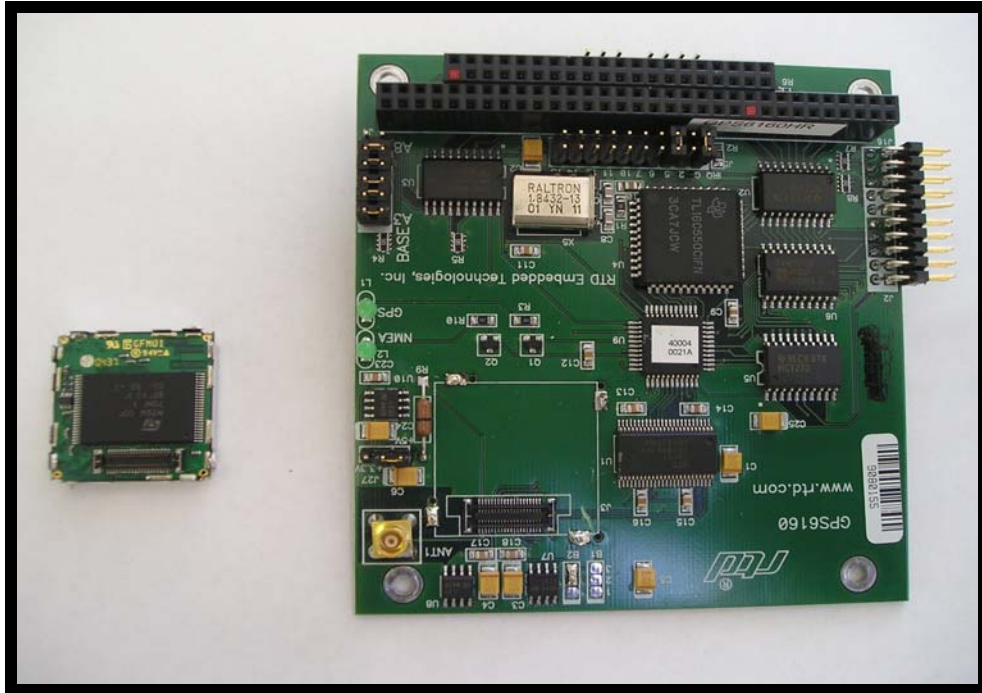


Figure 45: Component View with Shield off (View 2)

C. MODIFICATION LETTER

To Whom It May Concern:

This is to certify that no modifications were required for TELCO Gateway with Bandpass Filter, Model T-313 to comply with the requirements of the standard listed below.

FCC Rules and Regulations per 47 CFR 15.247

It is the manufacturer's responsibility to ensure that additional production units of the TELCO Gateway with Bandpass Filter are manufactured with identical electrical and mechanical characteristics.

For further information, please contact the manufacturer at:

Silver Spring Network, Inc.
13000 West Silver Spring Drive
Butler, WI 53007

ATTN: Juan Luglio, PhD
Tel: (262) 364-5317
juan.luglio@silverspringnetworks.com