



FCC Test Report
for
47CFR15, Subpart B for Unintentional Radiators, per Section 101
Equipment authorization of unintentional radiators,
and
47CFR15, Subpart C for Intentional Radiators, per Section 247
Operation within the bands 902 to 928 MHz

on
IMU Water Meter
[FCC ID: OWS – 940]

report number
20050519-01-F15

manufacturer
Silver Spring Networks, Inc.
13000 West Silver Spring Drive
Butler, WI 53007

judgement
Complies as tested

tests and report by
ITC Engineering Services, Inc.
9959 Calaveras Road, P.O. Box 543
Sunol, California 94586
Tel.: (925) 862-2944
Fax: (925) 862-9013
E-Mail: docs@itcemc.com
Web Site: www.itcemc.com



Lab Code: 200172-0

EN45001 Accredited Compliance Laboratory (RES-GmbH)
Registration number: TTI-P-G 159/98-00 (RES-GmbH)

List of Tables

Table 1 Radio Device Measurement Information.....	8
Table 2 Measurement Uncertainty.....	8
Table 3 Test Equipment Used– Radiated Emissions Tests.....	9
Table 4 Software Used– Radiated Emissions Tests.....	9
Table 5 Support Equipment – Radiated Emissions Tests.....	9
Table 6 Data Table Legend and Field Strength Calculation – Radiated Emissions Tests.....	10
Table 7 Test Data for Radiated Emissions Measurement (Below 1 GHz).....	11
Table 8 Test Data for Radiated Emissions Measurement (Above 1 GHz).....	12
Table 9: Support Equipment – RF Measurements.....	15
Table 10: Test Equipment – RF Measurements.....	15
Table 11: Data Table Legend and Field Strength Calculation.....	15
Table 12 Test Data – Spurious Emissions (Below 1 GHz).....	34
Table 13 Test Data – Spurious and Harmonics Emissions (Above 1 GHz).....	34

List of Figures

Figure 1: Radiated Emissions Test Setup (Below 1 GHz) Front View 13

Figure 2 Radiated Emissions Test Setup (Below 1 GHz) Rear View..... 13

Figure 3: Radiated Emissions Test Setup (Above 1 GHz) Front View 14

Figure 4: Radiated Emissions Test Setup (Above 1 GHz) Rear View 14

Figure 5 Test Set Up Photos – (Front View) 16

Figure 6 Test Set Up Photos (Rear View) 16

Figure 7: Plot of In-Band Peak Measurement..... 17

Figure 8: Plot of Channel Separation Measurement at 916.98 MHz..... 18

Figure 9: Plot of Maximum Power Measurement at Channel 0 19

Figure 10: Plot of Maximum Power Measurement at Channel 6 20

Figure 11: Plot of Maximum Power Measurement at Channel 11 20

Figure 12: Plot of Spectral Density Measurement at Channel 0..... 21

Figure 13: Plot of Spectral Density Measurement at Channel 6..... 22

Figure 14: Plot of Spectral Density Measurement at Channel 11..... 22

Figure 15: Plot of 6dB Bandwidth Measurement at Channel 0 23

Figure 16: Plot of Maximum Power Measurement at Channel 6 24

Figure 17: Plot of 6dB Bandwidth Measurement at Channel 11 24

Figure 18: Plot of Lower Band-Edge Measurement at 902MHz..... 25

Figure 19: Plot of Band-Edge Measurement at 928MHz 26

Figure 20: Plot of 100 kHz Bandwidth Out-of-Band Measurement (In-Band Peak) 27

Figure 21: Plot of 100 kHz Bandwidth Out-of-Band Measurement at CH 0 28

Figure 22: Plot of 100 kHz Bandwidth Out-of-Band Measurement at CH 0 28

Figure 23: Plot of 100 kHz Bandwidth Out-of-Band Measurement at CH 0 29

Figure 24: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 6..... 29

Figure 25: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 6..... 30

Figure 26: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 6..... 30

Figure 27: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 11..... 31

Figure 28: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 11..... 31

Figure 29: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 11..... 32

Figure 30: Spurious Emissions Front View (Below 1 GHz) 36

Figure 31: Spurious Emissions Rear View (Below 1 GHz) 36

Figure 32: Spurious Emissions Front View (Above 1 GHz)..... 37

Figure 33: Spurious Emissions Rear View (Above 1 GHz) 37

Figure 34: EUT Front View 38

Figure 35: EUT Rear View 39

Figure 36: EUT Top View 39

Figure 37: EUT Side View 40

Figure 38: EUT Internal View 40

Figure 39: Component View..... 41

Figure 40: Component Solder View 41

Figure 41: Component with Shield off 42

PART 1 GENERAL INFORMATION

SECTION 1.1 TEST INFORMATION

Product Type	IMU Water Meter	
Model	REV3 – 0000N	
Manufacturer's Name Manufacturer's Address	Silver Spring Networks Inc. 13000 West Silver Springs Drive Butler, WI 53007 United States Tel: +1 (262) 364-5317	Fax: +1 (262) 783-0205 email : juan.luglio@silverspringnetworks.com
Contact	Juan Luglio, PhD	
Test Laboratory	ITC Engineering Services, Inc. 9959 Calaveras Road, PO Box 543 Sunol, CA 94586-0543 Email: docs@itcemc.com Web Site: http://www.itcemc.com	Tel: +1(925) 862-2944 Fax: +1(925) 862-9013
Test Number and Report Numbers	20050519-01	20050519-01-F15
Test Date(s) & Issue Date	June 08 th - June 10 th , 2005	June 22 nd , 2005
Test Engineer(s)	Femi Ojo and Robert Kershaw	
Chief Engineer	Michael Gbadebo, P.E	
Documentation	George Brown.	
Test Results	<input checked="" type="checkbox"/> Complies as Tested	<input type="checkbox"/> Fail

The electromagnetic interference tests, which this report describes, were performed by an independent electromagnetic compatibility consultant, ITC Engineering Services, Inc. (ITC), in accordance with the emissions requirements specified in the FCC rules, 47CFR Part 15, Subparts B and C. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications specified in this report for compliance must be implemented in all production units for compliance to be maintained.

SECTION 1.2 TESTS PERFORMED:

Emissions Requirements:

- OPEN FIELD RADIATED EMISSIONS in accordance with the FCC 47 CFR 15.109

RF Requirements:

- MAXIMUM PEAK OUTPUT OF FUNDAMENTAL in accordance with the FCC 47 CFR 15.247(b) (1)
- OPERATING BAND in accordance with FCC 47 CFR 15.247(a)
- BAND-EDGE in accordance with the FCC 47 CFR 15.247(c)
- 6dB BANDWIDTH in accordance with FCC 47 CFR 15.247(a)(2)
- SPECTRAL DENSITY in accordance with FCC 47 CFR 15.247(d)
- HARMONIC/SPURIOUS EMISSIONS in accordance with the FCC 47 CFR 15.247(c)
- RESTRICTED BAND EMISSIONS in accordance with the FCC 47 CFR 15.205(c)

PART 1 General (Cont)

SECTION 1.3 DECLARATION/DISCLAIMER

ITC Engineering Services, Inc. (ITC) reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. ITC Engineering Services, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from ITC Engineering Services, Inc. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full with our written approval. The applicant/manufacturer shall not use this report to claim product endorsement by NVLAP or any US Government agency.

ITC Engineering Services, Inc. (ITC) is:

Accepted by the Federal Communications Commission (FCC) for FCC Methods, CISPR Methods and AUSTEL Technical Standards (Ref: NVLAP Lab Code 200172-0)

Approved by the Industry Canada for Telecom Testing

Certified by Rockford Engineering Services GmbH for EMC Testing according to the European EMC Directive 89/336/EEC per EN45001

Certified by Reg. TP for EMC Testing according to the European EMC Directive 89/336/EEC per EN45001 for RES GmbH (DAR-Registration number: TTI-P-G 159/98-00)

Certified by the Voluntary Control Council for Interference by Information Technology Equipment (VCCI) for EMC testing, in accordance with the Regulations for Voluntary Control Measures, Article 8, Registration Numbers - Site 1: C-1582 and R-1497.

PART 1 General (Cont)

SECTION 1.4 TEST METHODOLOGY

The electromagnetic interference tests, which this report describes, were performed by an independent electromagnetic compatibility consultant, ITC Engineering Services, Inc., in accordance with the FCC test procedure ANSI C63.4-2003.

SECTION 1.5 TEST FACILITY

The open area test site, the conducted measurement facility, and the test equipment used to collect the emissions data is located in Sunol, California, and is fully described in a site attenuation report. The approved site attenuation description is on file at the Federal Communications Commission.

Table 1 Radio Device Measurement Information

Product Type	IMU Water Meter	
Models	REV3 – 0000N	
Applicant / Manufacturer Address	Silver Spring Networks, Inc. 13000 West Silver Spring Drive Butler, WI 53007	
Contact	Mr Juan Luglio Tel: (262) 364-5317	juan.luglio@silverspringnetworks.com Fax: (262) 783-0205
Test Results	<input checked="" type="checkbox"/> Complies	<input type="checkbox"/> Not Compliant
Total Number of Pages including Appendices	43 Pages	
Test Report File No.	20050519-01-F15	

Table 2 Measurement Uncertainty

RF frequency	$\pm 1 \times 10^{-7}$ HP8565E
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Conducted emission of transmitter, valid up to 1 GHz	± 1.5 dB
Conducted emission of transmitter, valid up to 18 GHz	± 1.5 dB
Conducted emission of receivers	± 1.5 dB
Radiated emission of transmitter, valid up to 1 GHz	± 1.5 dB
Radiated emission of transmitter, valid up to 18 GHz	± 1.5 dB
Radiated emission of transmitter, valid up to 26 GHz	± 3 dB
Radiated emission of transmitter, valid up to 40 GHz	± 3 dB
Radiated emission of transmitter, valid up to 75 GHz	± 3 dB

SECTION 1.6 ACCURACY OF TEST DATA

The test results contained in this report accurately represent the emissions generated by the sample equipment under test. ITC Engineering Services, Inc. (ITC) as an independent testing laboratory declares that the equipment as tested complies with the requirements of:

1. FCC standard 47CFR15.247.

for Intentional Radiators Operation within the bands 902MHz to 928MHz

PART 2 RECEIVER MEASUREMENTS

OPEN FIELD RADIATED EMISSIONS

SECTION 2.1 TEST SPECIFICATION: 47 CFR PART 15, SUB-PART B

The IMU Water Meter (or the EUT) was set up at 3 or 10 meters in accordance with the suggested configuration given in FCC Measurement Procedure ANSI C63.4-2003. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was set up on a wooden non-conductive tabletop, 80 cm above the ground reference plane, in an open field. The transmit function was de-activated for the tests. For measurements below 1GHz, IMU Water Meter (or the EUT) was set up at a 10 meters distance from the search antenna with the EUT running in a continuous mode. The EUT was rotated 360 degrees azimuth and the search antenna height varied 1 to 4m in order to maximize the emissions. Significant peaks from the EUT were then recorded to determine margin to the limits. For measurements above 1GHz, the EUT running in continuous mode was set up at a 3 meter distance from the search antenna and was rotated 360 degrees azimuth and also rotated in its x-y-z axis positions to determine the precise amplitude of the emissions

Table 3 Test Equipment Used– Radiated Emissions Tests

Equipment Description	Manufacturer	Model Name	Serial Number	Calibration Due
Spectrum Analyzer	Hewlett-Packard	8568B	2841A04315	11-29-05
Spectrum Analyzer Display	Hewlett-Packard	85662A	2848A17028	11-29-05
Quasi Peak Adapter	Hewlett-Packard	85650	2521A00871	11-29-05
Preselector	Hewlett-Packard	85685A	2620A00265	11-29-05
Spectrum Analyzer	Hewlett-Packard	8565E	2618A02909	03-29-06
Signal Generator	Hewlett-Packard	83650A	3420A00599	09-09-06
Power Supply	BK Precision	1688	2250558	No Cal. Needed
Biconical Antenna	EMCO	3104	3667	02-03-06
L. P. Ant. (200-1000 MHz)	EMCO	3146	9510-4202	02-03-06
Horn Antenna (Below 18GHz)	EMCO	3115	8812-3050	12-19-05

Table 4 Software Used– Radiated Emissions Tests

Software Used	Manufacturer	Model Name	Version Number	Calibration/Validation Date
Test Software	ITC	1.04b1	Rev. 4	02-05-06
Antenna Software	ITC	L.P-V/H 10m	Rev. 4	02-05-06
Antenna Software	ITC	B-V/H 10m	Rev. 4	02-05-06
Cable Software	ITC	OATS 30MHz-1GHz	Rev. 4	02-01-06

Table 5 Support Equipment – Radiated Emissions Tests

No	Description	Manufacturer	Model Name	Serial Number
1	FSU	N/A	N/A	BF00000034
2	NOTEBOOK	SONY	PCG – 974L	283293303418746

Test Voltage: 120V/480V, 60Hz

OPEN FIELD RADIATED EMISSIONS (cont)

SECTION 2.2 TEST RANGE RADIATED EMISSIONS TESTS

The frequency search range investigated was from 30 MHz to 2.48 GHz.

SECTION 2.3 SPECTRUM ANALYZER CONFIGURATION (SWEPT FREQUENCY SCANS)-

- IF Bandwidth..... 120 kHz
- Measurements below 1000 MHz (unless stated otherwise)
 - Analyzer Mode (for Peak Measurements) Peak/Log
 - Resolution Bandwidth..... 100 kHz
 - Video Bandwidth..... 100 kHz
 - Analyzer Mode (for Quasi-Peak Measurements)
 - Quasi-Peak/Linear Resolution Bandwidth..... 1000 kHz
 - Video Bandwidth..... 1000 kHz
- Measurements above 1000 MHz (unless stated otherwise)
 - Quasi-Peak Adapter Mode Disabled
 - Analyzer Mode (for Peak Measurements) Peak
 - Resolution Bandwidth..... 1000 kHz
 - Video Bandwidth..... 1000 kHz
 - Analyzer Mode (for Average Measurements)..... Video Filter
 - Resolution Bandwidth..... 1000 kHz
 - Video Bandwidth..... 10 Hz

Table 6 Data Table Legend and Field Strength Calculation – Radiated Emissions Tests

Detector mode: Peak (P) or Quasi-Peak (QP) or Average (A)

	Polarization	Antenna	Freq Range (MHz)
VB	Vertical	EMCO 3104/sn 3549 Biconical	30 – 200
HB	Horizontal	EMCO 3104/sn 3549 Biconical	30 – 200
VL	Vertical	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
HL	Horizontal	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
VH1	Vertical	EMC 3115/sn. 2362 Horn	Below 18000
HH1	Horizontal	EMC 3115/sn. 2362 Horn	Below 18000
VH2	Vertical	EMC 3116/sn. 2655 Horn	Below 26500
HH2	Horizontal	EMC 3116/sn. 2655 Horn	Below 26500
VH4	Vertical	S&D DBD-520 Horn	Below 75000
HH4	Horizontal	S&D DBD-520 Horn	Below 75000

The margin in the Table 6 is calculated as follows:

Margin = Corrected Amplitude – Limit, where Corrected Amplitude = Spectrum Analyzer Amplitude + Cable Loss + Antenna Factor – Pre-Amp Gain.

SECTION 2.4 OPEN FIELD RADIATED EMISSIONS RESULTS

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room
- Other: _____

SECTION 2.5 ADMINISTRATIVE AND ENVIRONMENTAL CONDITIONS DETAILS – RADIATED EMISSIONS

Test Date:	June 8 th - June 10 th 2005
Test Engineer:	Bob Kershaw and Femi Ojo
Temperature	78°F
Humidity	52%

SECTION 2.6 OPEN FIELD RADIATED EMISSIONS TEST RESULTS

Table 7 Test Data for Radiated Emissions Measurement Below 1 GHz

The table below shows a summary of the highest amplitudes of the radiated emissions from the equipment under test at various antenna heights, antenna polarization, and EUT orientations. The EUT was tested for radiated emissions at the low, mid and high frequency and the worst case was recorded at mid frequency(915.97MHz).

INDICATED		CORRECTION		CORR	TURNTABLE ANT			CLASS A		CLASS B		FILTER	
FREQ	AMPL	ANT	CAB	AMPL	ANG	HT	POL	AMPL	MARG	AMPL	MARG	MODE	NOTES
MHz	dBuV/m	dB	dB	dBuV/m	DEG	m	-	dBuV/m	dB	dBuV/m	db		
48.06	5.8	11.4	2.4	19.5	0	1.0	VB	-	-	30.0	-10.5	P	
65.22	6.0	8.0	2.6	16.6	90	1.0	VB	-	-	30.0	-13.4	P	
72.22	8.1	7.1	2.7	17.9	0	1.0	VB	-	-	30.0	-12.1	P	
79.86	12.2	7.5	2.9	22.6	0	1.0	VB	-	-	30.0	-7.4	P	
79.86	6.7	7.5	2.9	17.1	90	1.0	VB	-	-	30.0	-12.9	P	
114.22	5.2	12.7	3.2	21.2	0	1.0	VB	-	-	33.0	-11.8	P	
114.86	-1.8	12.9	3.2	14.3	90	1.0	VB	-	-	33.0	-18.7	P	
147.55	3.0	11.8	3.8	18.6	90	1.0	VB	-	-	33.0	-14.4	P	
177.02	5.8	16.3	3.8	25.9	0	1.0	HB	-	-	33.0	-7.1	P	
185.80	5.2	18.0	3.8	27.0	0	1.0	HB	-	-	33.0	-6.0	P	
221.30	6.6	10.8	3.8	21.2	0	1.0	HL	-	-	36.0	-14.8	P	
229.12	6.3	10.9	4.0	21.2	0	1.0	HL	-	-	36.0	-14.8	P	
248.97	8.1	11.4	5.0	24.5	90	1.0	HL	-	-	36.0	-11.5	P	
260.63	10.5	12.0	5.7	28.3	90	1.0	HL	-	-	36.0	-7.7	P	
288.16	4.7	13.3	6.5	24.5	90	1.0	HL	-	-	36.0	-11.5	P	
325.81	6.1	14.0	6.3	26.4	0	3.0	HL	-	-	36.0	-9.6	P	
325.81	11.7	14.0	6.3	32.0	0	0.0	HL	-	-	36.0	-4.0	P	
349.31	9.1	14.3	6.3	29.7	90	0.0	HL	-	-	36.0	-6.3	P	

No emissions of significant level were observed between 30MHz – 48.06MHz and 349.91MHz -1GHz.

Table 8 Test Data for Radiated Emissions Measurement (Above 1 GHz)

The table below shows a summary of the highest amplitudes of the radiated emissions from the equipment under test at various antenna heights, antenna polarization, and EUT orientations. The EUT was tested for radiated emissions at the low, mid and high frequency and the worst case was recorded at mid frequency(915.97MHz)..

INDICATED		CORRECTION		CORR	TURNTABLE ANT			CLASS A		CLASS B		FILTER	
FREQ	AMPL	ANT	CAB	AMPL	ANG	HT	POL	AMPL	MARG	AMPL	MARG	MODE	NOTES
MHz	dBuV/m	dB	dB	dBuV/m	DEG	m	-	dBuV/m	dB	dBuV/m	db		
915.79	42.8	23.9	3.9	70.6	0	1.0	HH	-	-	143.0	-72.4	P	
915.79	43.3	23.9	3.9	71.1	0	1.0	VH	-	-	143.0	-71.9	P	
917.05	10.5	23.9	3.8	38.2	0	1.0	HH	-	-	46.0	-7.8	P	
917.05	10.7	23.9	3.8	38.4	90	1.0	VH	-	-	46.0	-7.6	P	
945.00	11.5	24.0	3.4	38.9	0	1.0	HH	-	-	46.0	-7.1	P	
1802.00	15.3	26.8	3.4	45.5	90	1.0	VH	-	-	54.0	-8.5	P	
1802.00	15.7	26.8	3.4	45.9	180	1.0	HH	-	-	54.0	-8.1	P	
1829.00	16.8	26.9	3.3	47.1	180	1.0	HH	-	-	54.0	-6.9	P	
1829.00	18.2	26.8	3.3	48.3	0	1.0	VH	-	-	54.0	-5.7	P	
1831.00	17.7	26.8	3.3	47.8	45	1.0	VH	-	-	54.0	-6.2	P	
1831.00	15.2	27.0	3.3	45.5	45	1.0	HH	-	-	54.0	-8.5	P	
2633.00	12.5	29.0	2.9	44.4	0	1.0	VH	-	-	54.0	-9.6	P	
2633.00	12.3	29.0	2.9	44.2	0	1.0	HH	-	-	54.0	-9.8	P	
2744.00	12.2	29.3	2.8	44.3	180	1.0	HH	-	-	54.0	-9.7	P	
2744.00	12.3	29.3	2.8	44.4	90	1.0	VH	-	-	54.0	-9.6	P	
2746.00	15.0	29.3	2.8	47.1	180	1.0	VH	-	-	54.0	-6.9	P	
3055.00	13.3	30.2	3.4	47.0	180	1.0	HH	-	-	54.0	-7.0	P	
3055.00	13.8	30.2	3.4	47.5	180	1.0	VH	-	-	54.0	-6.5	P	
3155.00	6.5	30.4	4.2	41.2	180	1.0	VH	-	-	54.0	-12.8	P	
3370.00	9.8	31.0	4.8	45.6	0	1.0	HH	-	-	54.0	-8.4	P	
3370.00	10.2	30.9	4.8	45.8	0	1.0	VH	-	-	54.0	-8.2	P	
3378.00	8.2	30.9	4.7	43.8	90	1.0	VH	-	-	54.0	-10.2	P	
3378.00	10.2	31.0	4.7	45.9	0	1.0	HH	-	-	54.0	-8.1	P	
3421.00	9.2	31.0	4.7	44.9	90	1.0	VH	-	-	54.0	-9.1	P	
3421.00	8.3	31.1	4.7	44.1	90	1.0	HH	-	-	54.0	-9.9	P	
4573.00	6.3	32.5	5.0	43.9	180	1.0	VH	-	-	54.0	-10.1	P	
4573.00	6.2	32.5	5.0	43.7	90	1.0	HH	-	-	54.0	-10.3	P	
4579.00	6.8	32.5	5.0	44.4	0	1.0	HH	-	-	54.0	-9.6	P	
4579.00	6.5	32.5	5.0	44.0	90	1.0	VH	-	-	54.0	-10.0	P	
5487.00	6.8	34.2	5.0	46.0	0	1.0	HH	-	-	54.0	-8.0	P	
5487.00	7.3	34.2	5.0	46.5	0	1.0	VH	-	-	54.0	-7.5	P	
6407.00	7.8	34.4	6.7	48.9	90	1.0	HH	-	-	54.0	-5.1	P	
6407.00	8.8	34.5	6.7	50.0	90	1.0	VH	-	-	54.0	-4.0	P	
7320.00	5.0	36.1	7.5	48.7	180	1.0	VH	-	-	54.0	-5.3	P	
7320.00	4.3	36.1	7.5	47.9	180	1.0	HH	-	-	54.0	-6.1	P	
8235.00	3.3	36.9	9.2	49.5	0	1.0	HH	-	-	54.0	-4.5	P	
9167.00	2.0	37.4	12.5	51.9	0	1.0	VH	-	-	54.0	-2.1	P	

No emission of significant level was observed between 9.167 GHz -10 GHz

SECTION 2.7 TEST DATA SUMMARY

The margin is calculated as follows:

Margin = Corrected Amplitude - Limit; where Corrected Amplitude = Amplitude + Cable Loss + Antenna Factor.

SECTION 2.8 CONCLUSION

The IMU Water Meter meets the requirements of FCC Part 15, Class B for Open Field Radiated Emissions.

OPEN FIELD RADIATED EMISSIONS Results (cont)

SECTION 2.9 RADIATED EMISSIONS TEST SETUP PHOTOGRAPHS



Figure 1: Radiated Emissions Test Setup (Below 1 GHz) Front View



Figure 2 Radiated Emissions Test Setup (Below 1 GHz) Rear View

OPEN FIELD RADIATED EMISSIONS Results (cont)



Figure 3: Radiated Emissions Test Setup (Above 1 GHz) Front View



Figure 4: Radiated Emissions Test Setup (Above 1 GHz) Rear View

PART 3 RF MEASUREMENTS

SECTION 3.1 LIST OF EQUIPMENT USED DURING RF TESTS

Table 9: Support Equipment – RF Measurements

No	Description	Manufacturer	Model Name	Serial Number
1	FSU	N/A	N/A	BF00000034
2	PLOTTER	HEWLETT PACKARD	7440A	N/A
3	NOTEBOOK	SONY	PCG – 974L	283293303418746

Table 10: Test Equipment – RF Measurements

Equipment Description	Manufacturer	Model Name	Serial Number	Calibration Due
Spectrum Analyzer	Hewlett-Packard	8568B	2841A04315	11-29-05
Spectrum Analyzer Display	Hewlett-Packard	85662A	2848A17028	11-29-05
Quasi Peak Adapter	Hewlett-Packard	85650	2521A00871	11-29-05
Preselector	Hewlett-Packard	85685A	2620A00265	11-29-05
Spectrum Analyzer	Hewlett-Packard	8565E	2618A02909	03-29-06
Signal Generator	Hewlett-Packard	83650A	3420A00599	09-09-06
Power Supply	BK Precision	1688	2250558	No Cal. Needed
Biconical Antenna	EMCO	3104	3667	02-03-06
L. P. Ant. (200-1000 MHz)	EMCO	3146	9510-4202	02-03-06
Horn Antenna (Below 18GHz)	EMCO	3115	8812-3050	12-19-05

Software Used	Manufacturer	Model Name	Version Number	Calibration/Validation Date
Test Software	ITC	1.04b1	Rev. 4	02-05-06
Antenna Software	ITC	L.P-V/H 10m	Rev. 4	02-05-06
Antenna Software	ITC	B-V/H 10m	Rev. 4	02-05-06
Cable Software	ITC	OATS 30MHz-1GHz	Rev. 4	02-01-06

Table 11: Data Table Legend and Field Strength Calculation

Detector mode: Peak (P) or Quasi-Peak (QP) or Average (A)

	Polarization	Antenna	Freq Range (MHz)
VB	Vertical	EMCO 3104/sn 3549 Biconical	30 – 200
HB	Horizontal	EMCO 3104/sn 3549 Biconical	30 – 200
VL	Vertical	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
HL	Horizontal	EMCO 3146/sn. 2075 Log Periodic	200 – 1000
VH1	Vertical	EMC 3115/sn. 2362 Horn	Below 18000
HH1	Horizontal	EMC 3115/sn. 2362 Horn	Below 18000
VH2	Vertical	EMC 3116/sn. 2655 Horn	Below 26500
HH2	Horizontal	EMC 3116/sn. 2655 Horn	Below 26500
VH4	Vertical	S&D DBD-520 Horn	Below 75000
HH4	Horizontal	S&D DBD-520 Horn	Below 75000

RF Conducted Measurements

SECTION 3.2 SETUP PHOTOGRAPHS



Figure 5 Test Set Up Photos – (Front View)

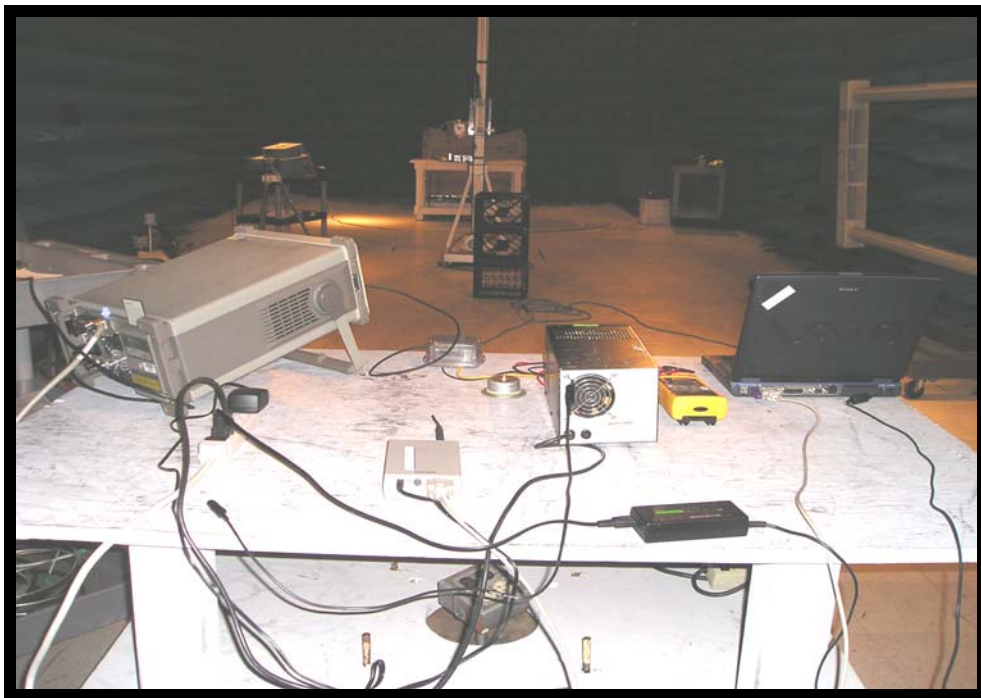


Figure 6 Test Set Up Photos (Rear View)

PART 4 MAXIMUM IN-BAND PEAK / NUMBER OF CHANNELS

SECTION 4.1 MAXIMUM PEAK MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 4.2 SITE USED – MAXIMUM IN-BAND PEAK MEASUREMENT

- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 4.3 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS –MAXIMUM IN-BAND PEAK DATA

Test Date(s):	June 8 th - June 10 th , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	50%

SECTION 4.4 TEST DATA – MAXIMUM IN-BAND PEAK MEASUREMENT

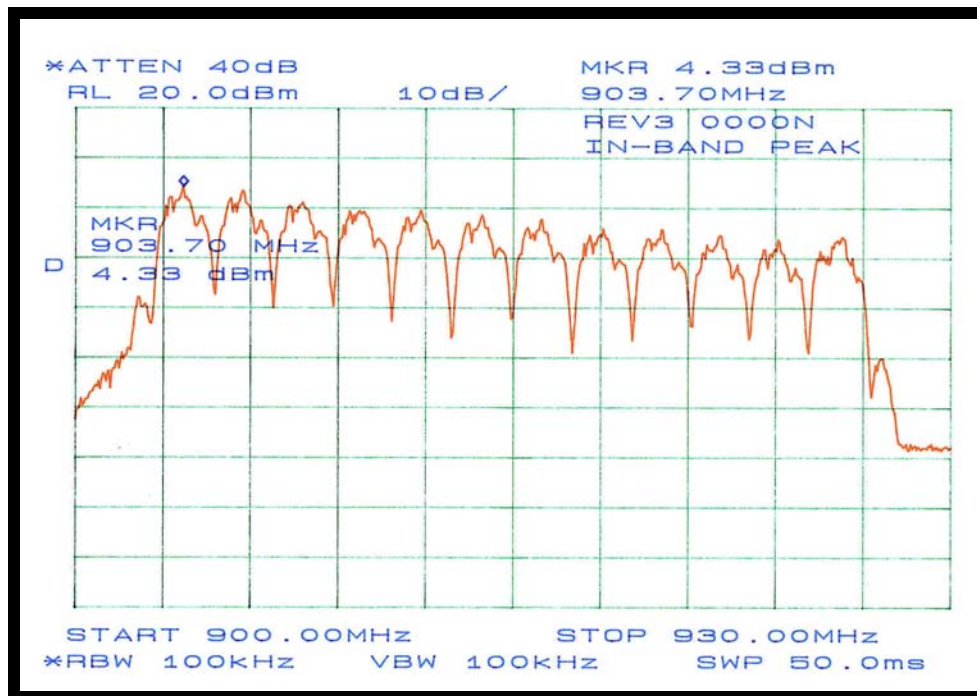


Figure 7: Plot of In-Band Peak Measurement

Test-Data Summary – Peak Measurement:

Peak Frequency = 903.7MHz
 Peak Level: = 4.33dBm
 Number of Channels = 11

PART 5 CHANNEL SEPARATION MEASUREMENT

SECTION 5.1 CHANNEL SEPARATION MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 5.2 SITE USED – CHANNEL SEPARATION MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 5.3 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS – CHANNEL SEPARATION MEASUREMENT

Test Date(s):	June 8 th - June 10 th , 2005
Test Engineer(s):	Femi Ojo and Bob Kershaw
Temperature	65°F
Humidity	50%

SECTION 5.4 TEST DATA – CHANNEL SEPARATION MEASUREMENT

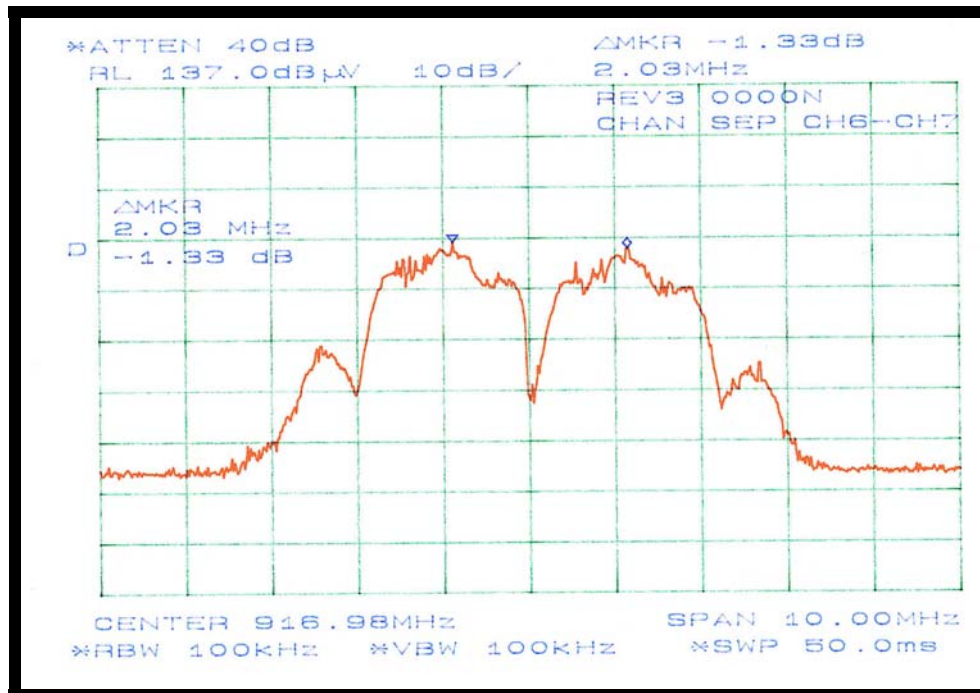


Figure 8: Plot of Channel Separation Measurement at 916.98 MHz

Test-Data Summary – Channel Separation Measurement:

Peak Frequencies = 915.968 MHz (CH 6) & 918.016MHz (CH 7)
 Channel Separation (measured) = 2.03MHz.

PART 6 MAXIMUM POWER OUTPUT PER 47 CFR 15.247(B) (1)

SECTION 6.1 MAXIMUM POWER MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 6.2 SITE USED – MAXIMUM POWER MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 6.3 ADMINISTRATIVE DETAILS – MAXIMUM POWER MEASUREMENT

Test Date(s):	June 8 th - June 10 th ,2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	50%

SECTION 6.4 TEST DATA – MAXIMUM POWER MEASUREMENT (CH 0 -903.68MHZ)

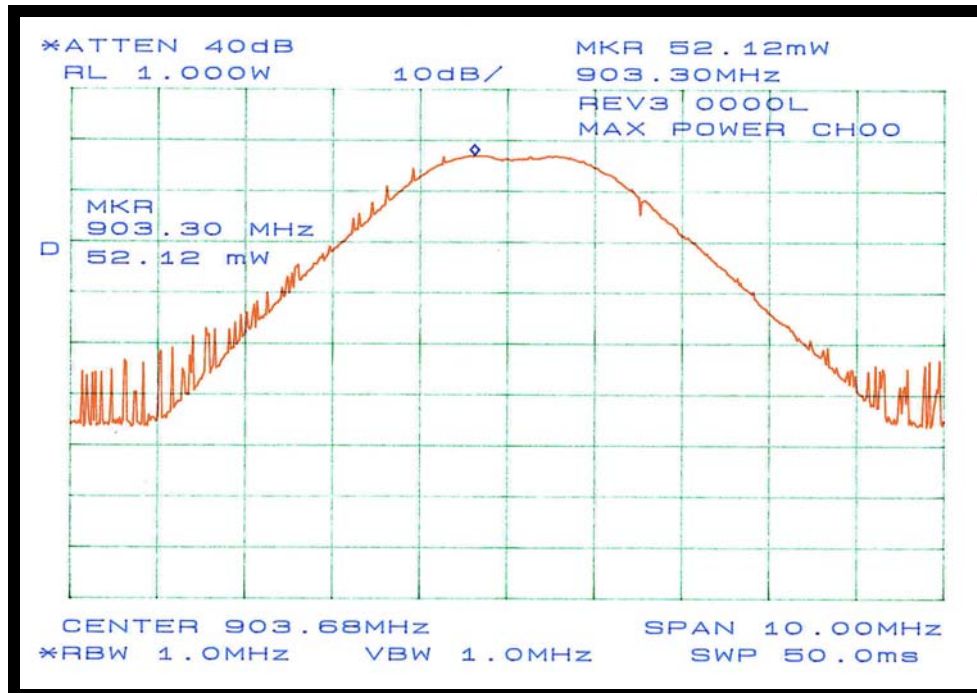


Figure 9: Plot of Maximum Power Measurement at Channel 0

Test-Data Summary – Peak Measurement (CH 0– 903.68MHz)

Center Frequency = 903.68MHz
 Peak Level: = 52.12mW
 Limit per 15.247(b)(1) = 1 W

SECTION 6.5 TEST DATA – MAXIMUM POWER MEASUREMENT (CH 6 – 915.968MHZ)

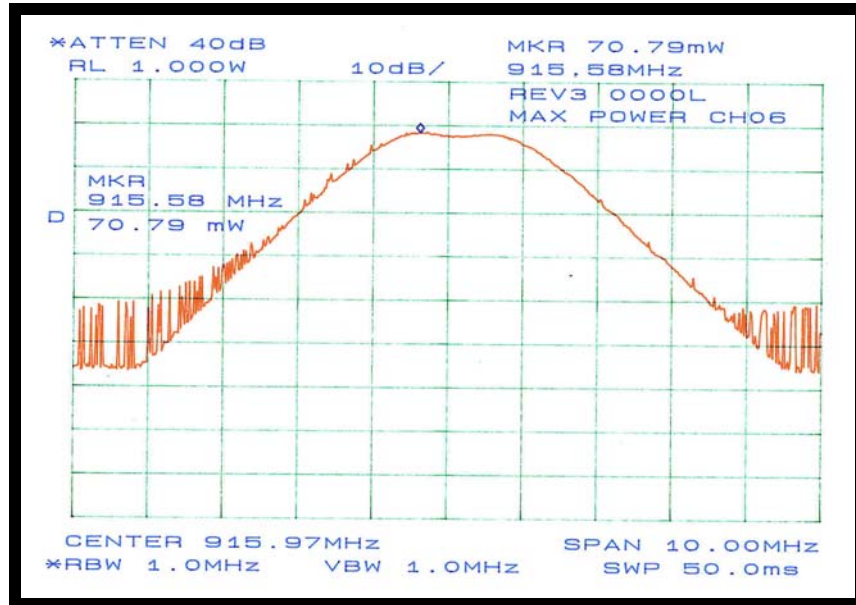


Figure 10: Plot of Maximum Power Measurement at Channel 6

Test-Data Summary – Maximum Power Measurement (CH 6 – 915.968MHz)

Center Frequency = 915.97MHz
 Peak Level: = 70.79 mW
 Limit per 15.247(b)(1) = 1 W

SECTION 6.5 TEST DATA – MAXIMUM POWER MEASUREMENT (CH 11 – 926.208MHZ)

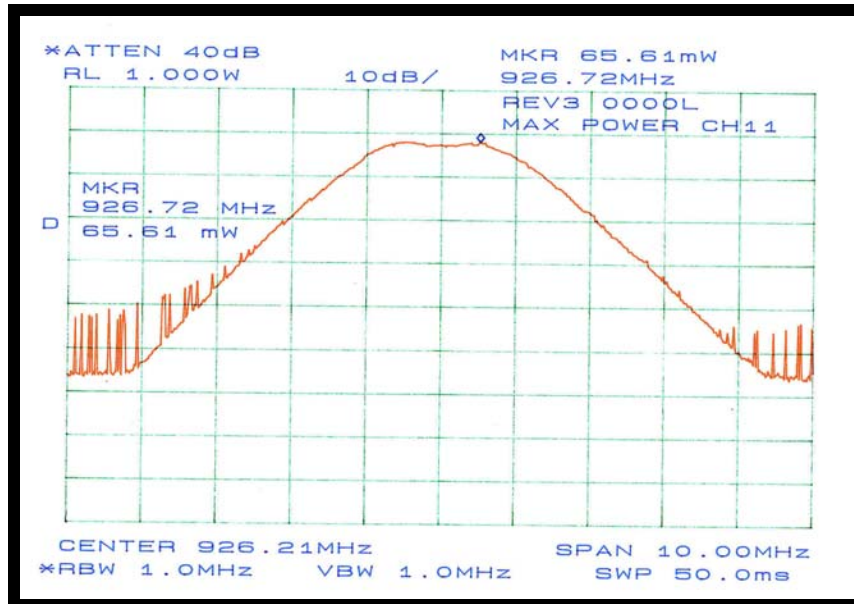


Figure 11: Plot of Maximum Power Measurement at Channel 11

Test-Data Summary – Maximum Power Measurement (CH 11 – 926.208MHz)

Center Frequency = 926.21MHz
 Peak Level: = 65.61mW
 Limit per 15.247(b)(1) = 1 W

PART 7 SPECTRAL DENSITY per 47 CFR 15.247(c)

SECTION 7.1 SPECTRAL DENSITY MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 7.2 SITE USED – SPECTRAL DENSITY MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 7.3 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS-

Test Date(s):	June 8 th - June 10 th , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	50%

SECTION 7.4 TEST DATA – SPECTRAL DENSITY MEASUREMENT (CHANNEL 0 -903.680MHZ)

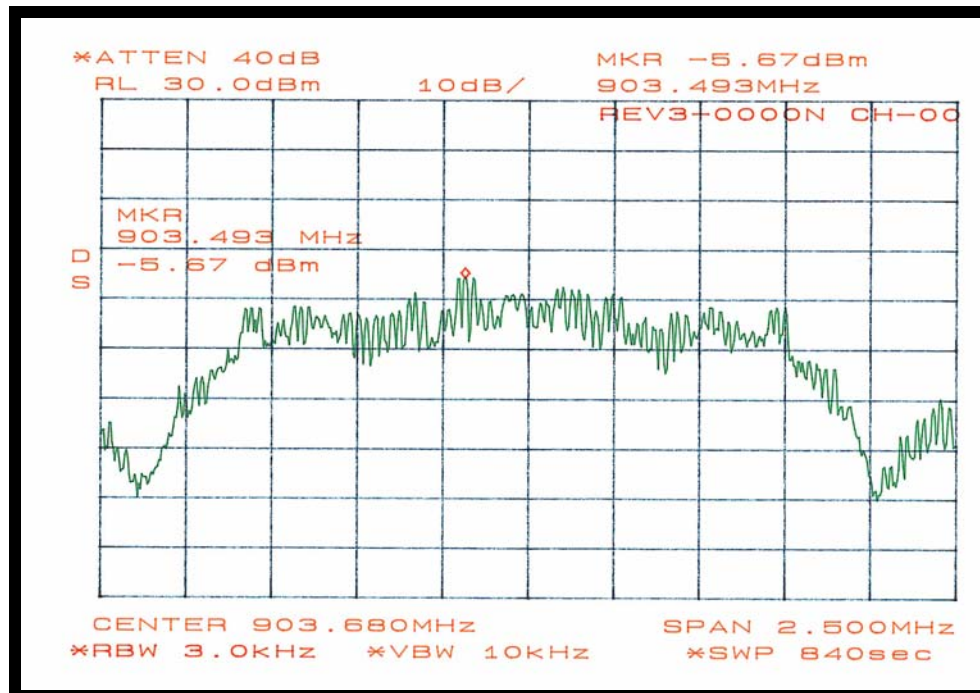


Figure 12: Plot of Spectral Density Measurement at Channel 0

Test-Data Summary – Spectral Density Measurement (Channel 0 – 903.680MHz)

Center Frequency = 903.680MHz
 Peak Level: = -5.67dBm
 Limit per 15.247(c) = 8dBm

SECTION 7.5 TEST DATA – SPECTRAL DENSITY MEASUREMENT (CHANNEL 6 – 915.968MHZ)

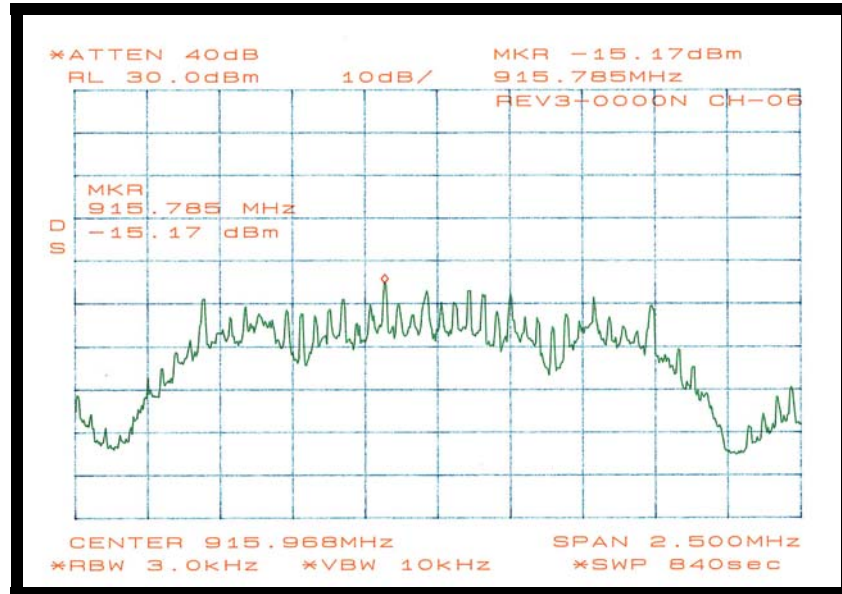


Figure 13: Plot of Spectral Density Measurement at Channel 6

Test-Data Summary – Spectral Density Measurement (Channel 6 – 915.968MHz)

Center Frequency = 915.968MHz
 Peak Level: = -15.17dBm
 Limit per 15.247(c) = 8dBm

SECTION 7.6 TEST DATA – SPECTRAL DENSITY MEASUREMENT (CHANNEL 11 – 926.208MHZ)

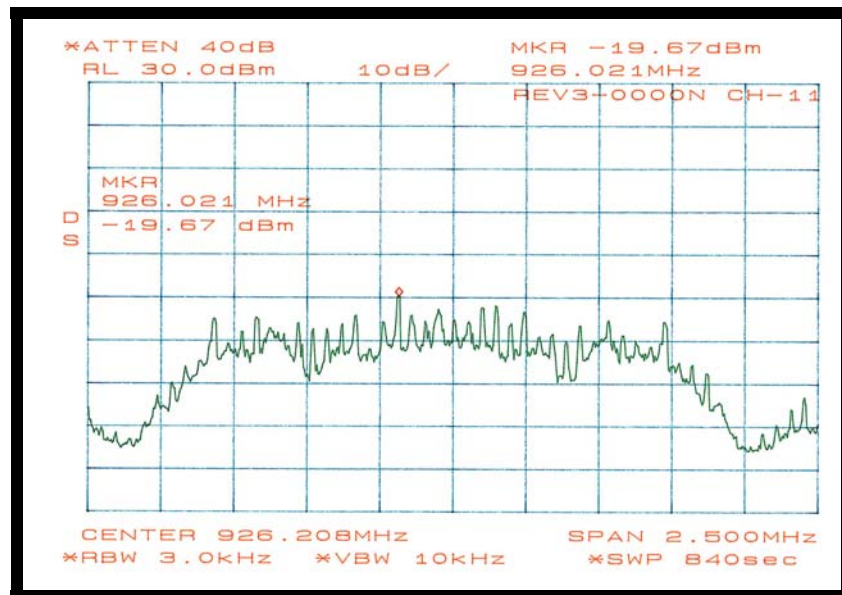


Figure 14: Plot of Spectral Density Measurement at Channel 11

Test-Data Summary – Spectral Density Measurement (Channel 11 – 926.208)

Center Frequency = 926.208MHz
 Peak Level: = -19.67dBm
 Limit per 15.247(c) = 8dBm

PART 8 6dB BANDWIDTH per 47 CFR 15.247(a) (2)

SECTION 8.1 6DB BANDWIDTH MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 8.2 SITE USED – 6DB BANDWIDTH MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 8.3 ADMINISTRATIVE & ENVIRONMENTAL - 6DB BANDWIDTH DETAILS

Test Date(s):	June 8 th - June 10 th , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	50%

SECTION 8.4 TEST DATA – 6DB BANDWIDTH MEASUREMENT (CH 0– 903.680MHZ)

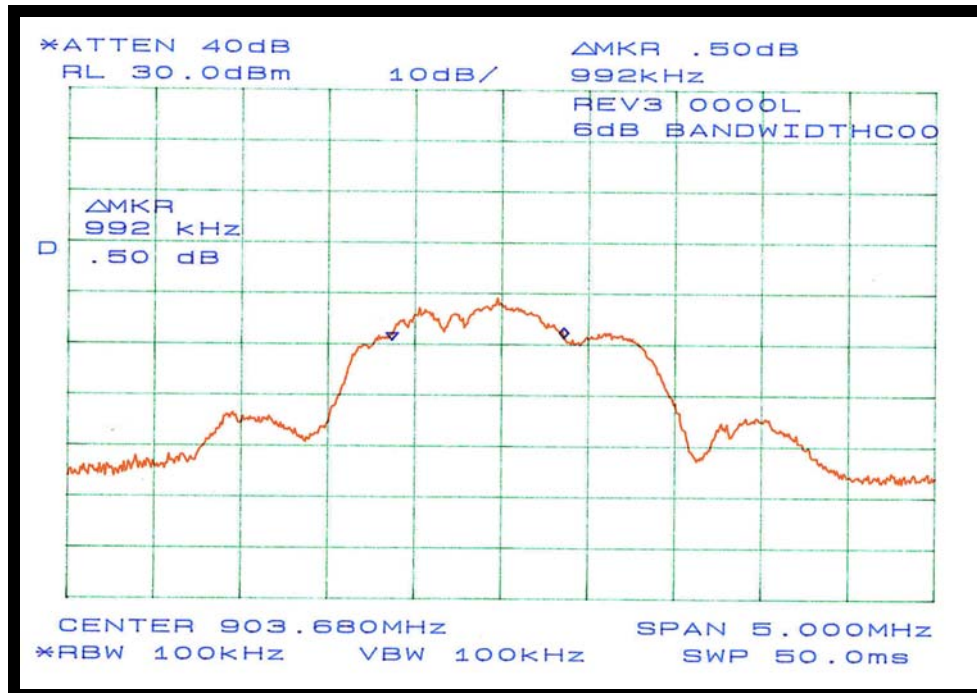


Figure 15: Plot of 6dB Bandwidth Measurement at Channel 0

Test-Data Summary – 6dB Bandwidth Measurement (Channel 0 – 903.680MHz)

Center Frequency = 903.680MHz
 6dB Bandwidth = 992kHz
 Limit per 15.247(a)(2) = 500kHz minimum

SECTION 8.5 TEST DATA – 6DB BANDWIDTH MEASUREMENT (CH 6 – 915.680MHZ)

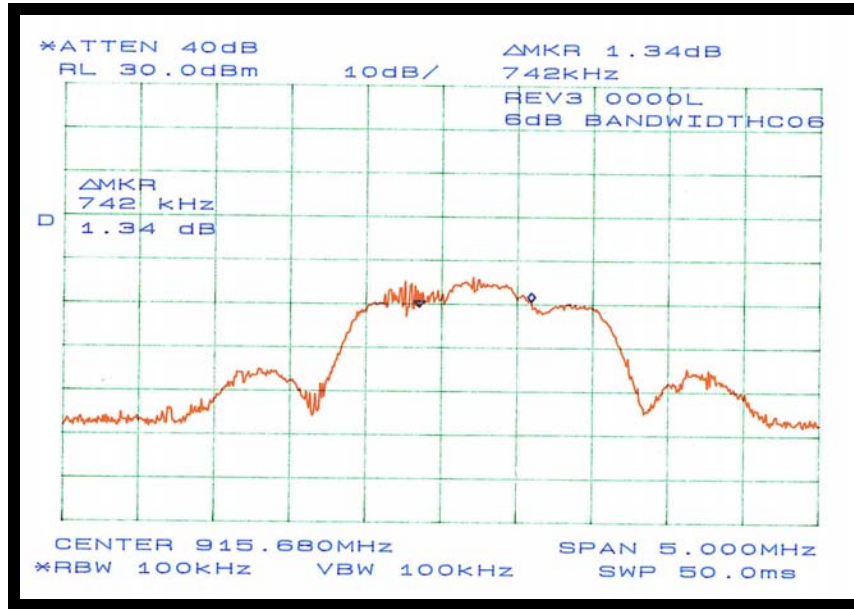


Figure 16: Plot of Maximum Power Measurement at Channel 6

Test-Data Summary – 6dB Bandwidth Measurement (Channel 6 – 915.680MHz)

Center Frequency = 915.680MHz
 6dB Bandwidth = 742 kHz
 Limit per 15.247(a)(2) = 500kHz minimum

SECTION 8.6 TEST DATA – 6DB BANDWIDTH MEASUREMENT (CH 11 – 926.208MHZ)

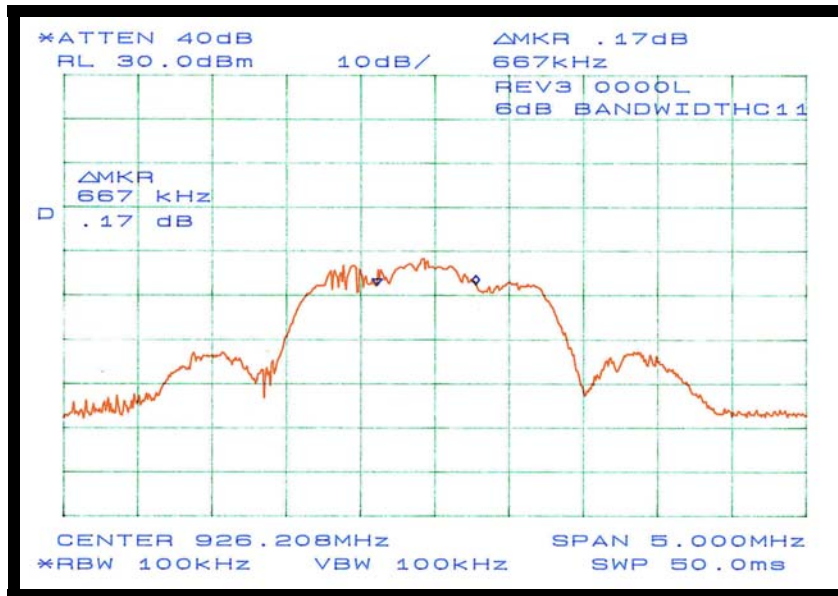


Figure 17: Plot of 6dB Bandwidth Measurement at Channel 11

Test-Data Summary – 6dB Bandwidth Measurement (Channel 11 – 926.208MHz)

Center Frequency = 926.208MHz
 6dB Bandwidth = 667 kHz
 Limit per 15.247(a)(2) = 500kHz minimum

PART 9 6DB BANDEDGE MEASUREMENT

6dB BAND-EDGE per 47 CFR 15.247(c)

SECTION 9.1 6DB BAND-EDGE MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 9.2 SITE USED –BAND-EDGE MEASUREMENT

- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 9.3 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS–BAND-EDGE MEASUREMENT

Test Date(s):	June 8 th - June 10 th , 2005
Test Engineer(s):	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	50%

SECTION 9.4 TEST DATA –BAND-EDGE MEASUREMENT (LOWER BANDEDGE - 902MHZ)

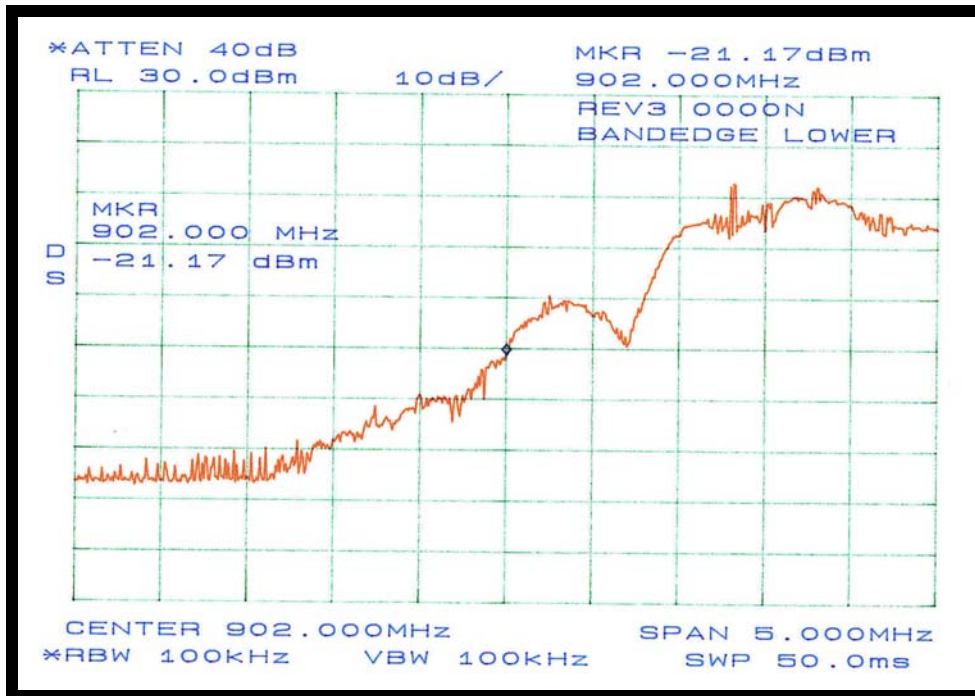


Figure 18: Plot of Lower Band-Edge Measurement at 902MHz

Test-Data Summary –Band-Edge Measurement (Lower Band Edge – 902MHz):

Center Frequency = 902 MHz
 Band-Edge Level = -21.17dBm
 Limit per 15.247(c) = 20dB below in-band peak (or -20dB)

BAND-EDGE MEASUREMENT (cont)

SECTION 9.5 TEST DATA –BAND-EDGE MEASUREMENT (UPPER BAND EDGE - 928MHZ)

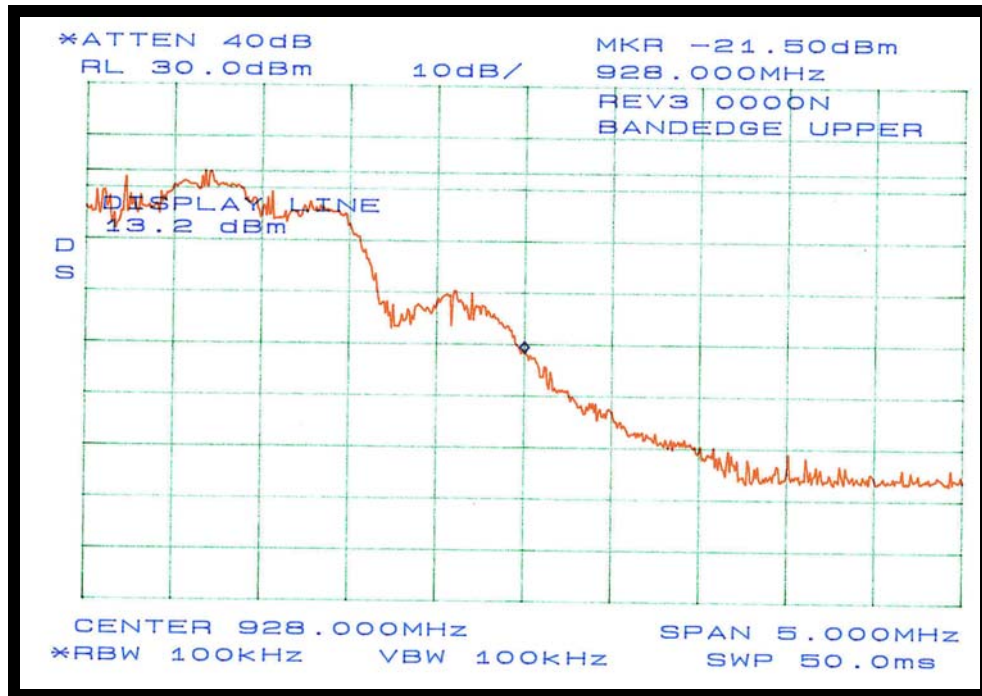


Figure 19: Plot of Band-Edge Measurement at 928MHz

Test-Data Summary –Band-Edge Measurement (Upper Band Edge – 928MHz):

Center Frequency = 928MHz
 Band-Edge Level = -21.50dBm
 Limit per 15.247(c) = 20dB below in-band peak (or -20dB)

PART 10 100kHz Bandwidth Out-of-Band Emissions per 47 CFR 15.247(a) (2)

SECTION 10.1 100KHZ BANDWIDTH OUT-OF-BAND EMISSIONS MEASUREMENT

The EUT was set up on a wooden non-conductive tabletop, attached at the antenna connector to the measuring device. The measurement instrumentation used was a receiver with bandwidth parameters as stipulated in ANSI C63.4-2003. The EUT was configured to run in continuous mode during the tests. The measurement data below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

SECTION 10.2 SITE USED – 100 KHZ BANDWIDTH OUT-OF-BAND MEASUREMENT

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 10.3 ADMINISTRATIVE & ENVIRONMENTAL - (OUT OF BAND DETAILS)

Test Date(s):	June 8 th - June 10 th , 2005
Test Engineer(s):	Femi Ojo and Bob Kershaw
Temperature	65°F
Humidity	50%

SECTION 10.4 TEST DATA – 100KHZ (OUT-OF-BAND) MEASUREMENT (IN-BAND PEAK)

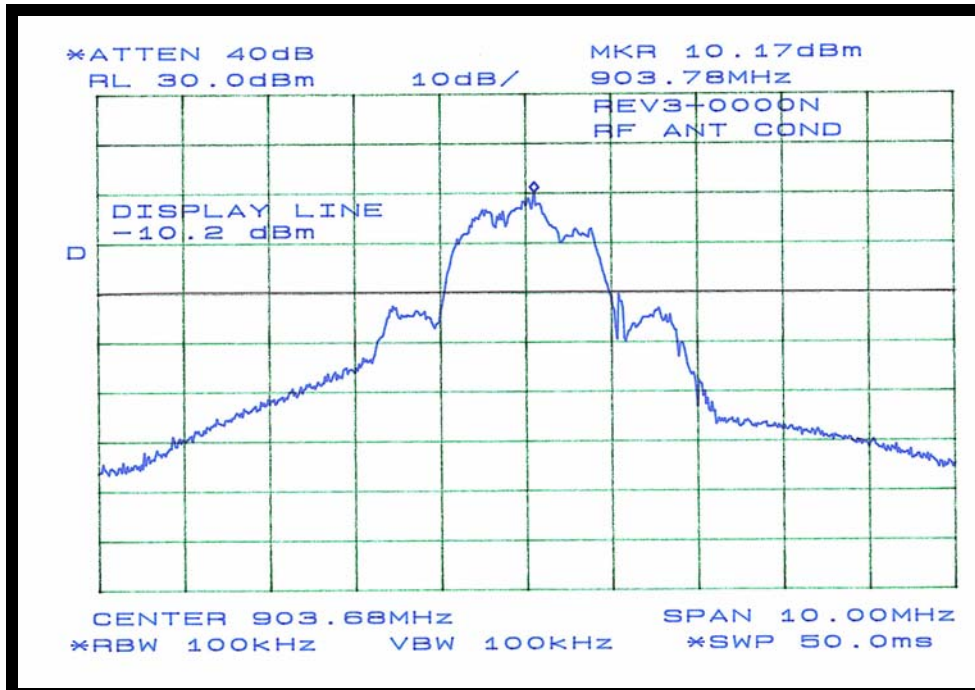


Figure 20: Plot of 100 kHz Bandwidth Out-of-Band Measurement (In-Band Peak)

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (In-Band Peak):

Center Frequency = 903.68 MHz
 Center Frequency Peak = 10.17dB
 20dB Limit (measured) per 15.247(c) = -10.2dBm

SECTION 10.5 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL) 27MHZ-930MHZ

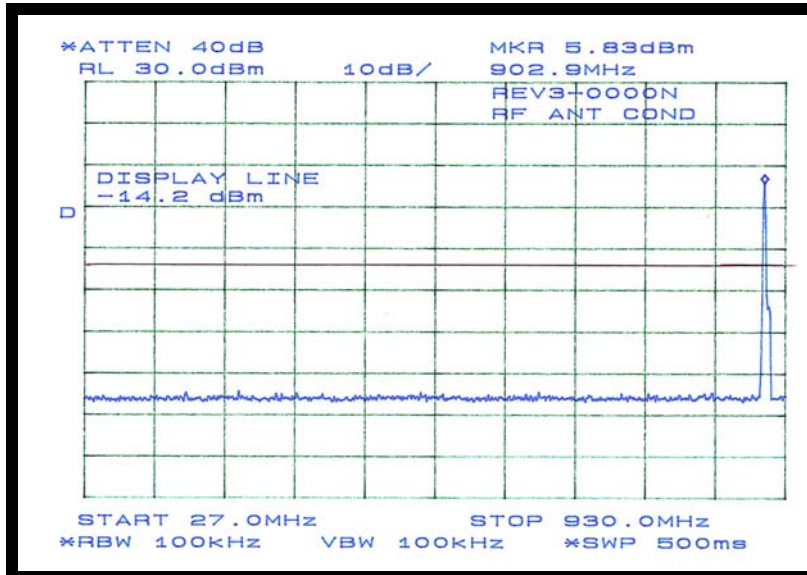


Figure 21: Plot of 100 kHz Bandwidth Out-of-Band Measurement at CH 0

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 0)27MHz- 930MHz

Peak Frequency (Fundamental) = 902.9 MHz
 Maximum Peak (27MHz – 930MHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = -14.2dBm

SECTION 10.6 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 0-) 817 MHZ-5 GHZ

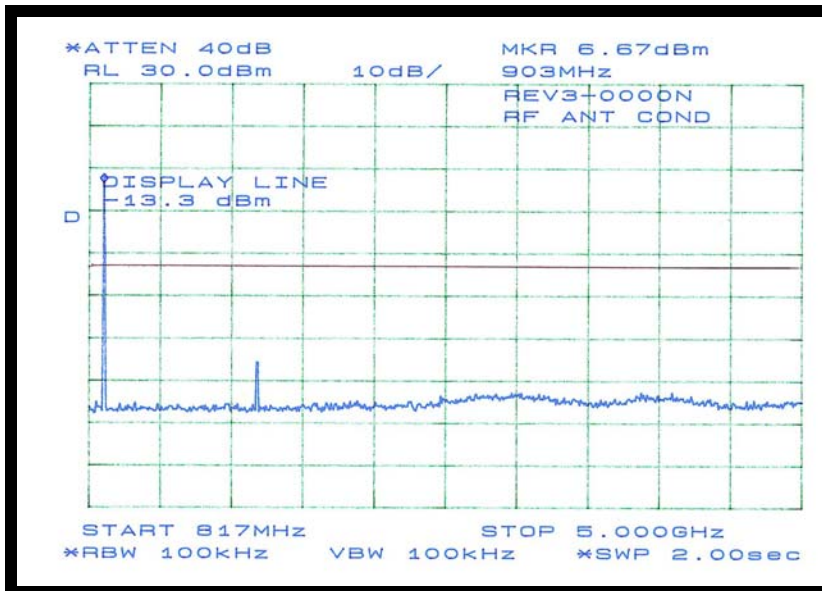


Figure 22: Plot of 100 kHz Bandwidth Out-of-Band Measurement at CH 0

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 0) 817 MHz- 5 GHz

Peak Frequency (Fundamental) = 903 MHz
 Maximum Peak (27MHz – 930MHz) = Below 20dB limit
 20dB Limit (measured) per 15.247(c) = -13.3dBm

SECTION 10.7 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 0) 5 GHZ-10 GHZ

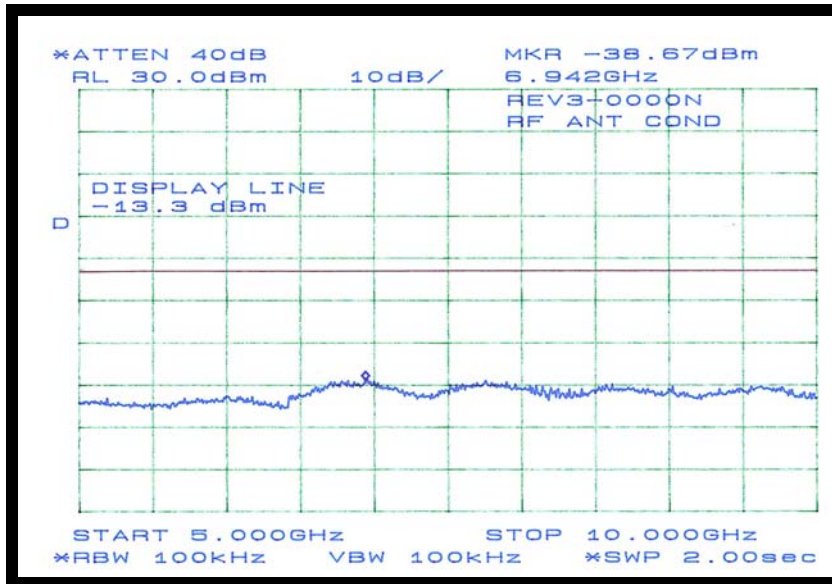


Figure 23: Plot of 100 kHz Bandwidth Out-of-Band Measurement at CH 0

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 0) 5 GHz to 10 GHz

Peak Frequency (Fundamental) = 903.680MHz
 Maximum Peak (27MHz – 930MHz) = -6.7 dBm
 20dB Limit (measured) per 15.247(c) = Noise floor

SECTION 10.8 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 6) 27MHZ-930MHZ

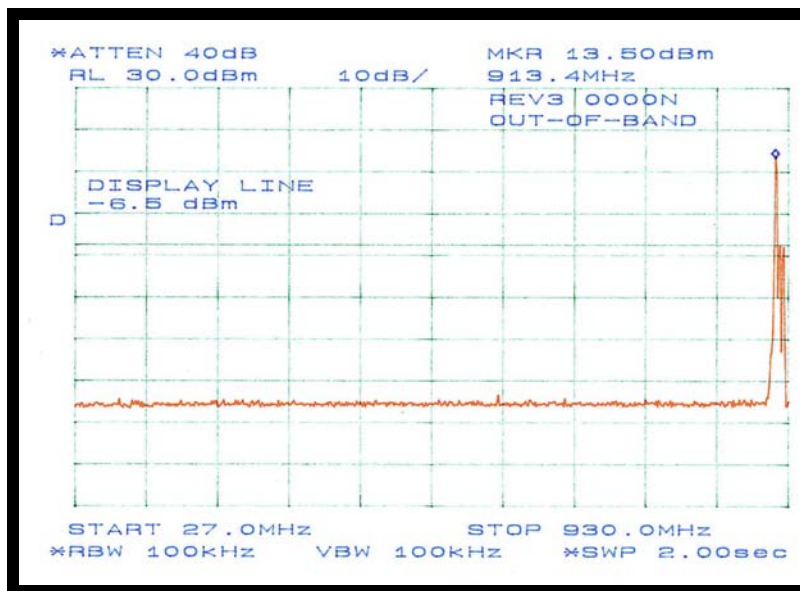


Figure 24: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 6

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 6) 27MHz- 930MHz

Peak Frequency (Fundamental) = 913.4MHz
 Maximum Peak (27MHz – 930MHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = -6.5dBm

SECTION 10.9 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 6) 860MHZ- 5GHZ

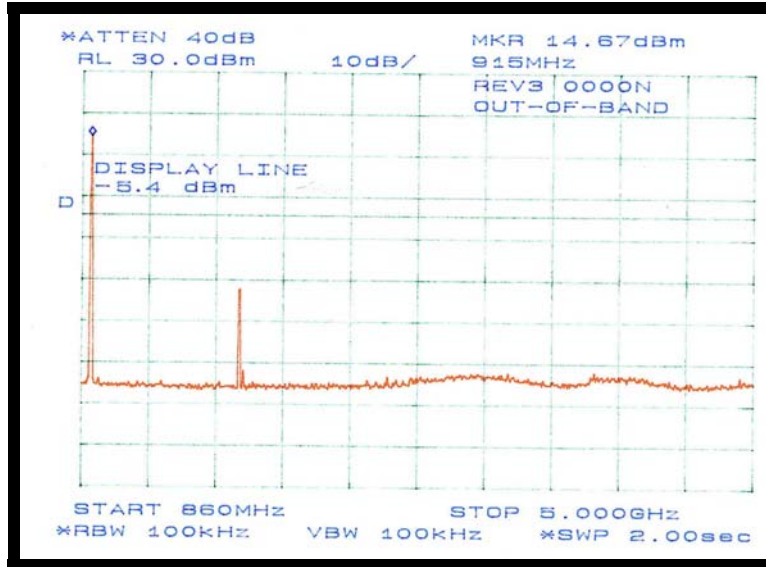


Figure 25: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 6

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 6) 860MHz – 5GHz.

Peak Frequency (Fundamental) = 915MHz
 Maximum Peak (860MHz – 5GHz) = Below 20dB limit
 20dB Limit (measured) per 15.247(c) = -5.4dBm

SECTION 10.10 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 6) 5GHZ – 10GHZ

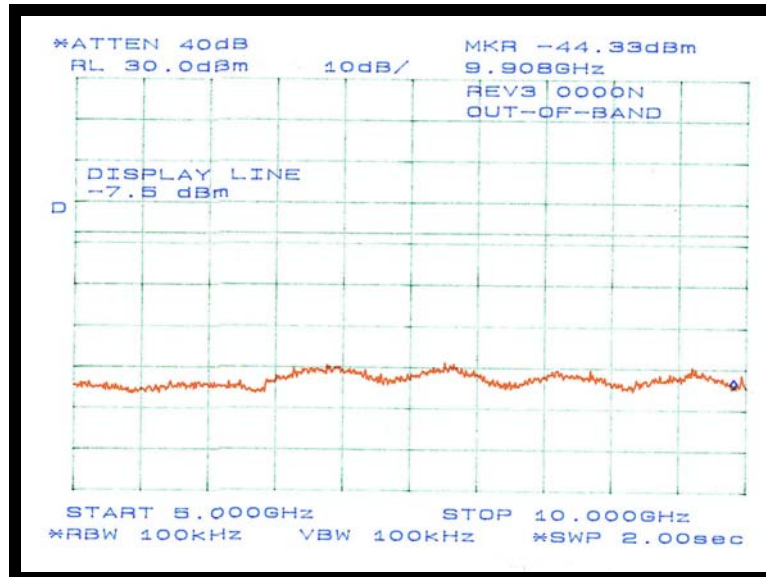


Figure 26: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 6

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 6) 5GHz – 10GHz.

Peak Frequency (Fundamental) = 915.968MHz
 Maximum Peak (5GHz – 10GHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = -7.5dBm

SECTION 10.11 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 11) 27MHZ – 940MHZ

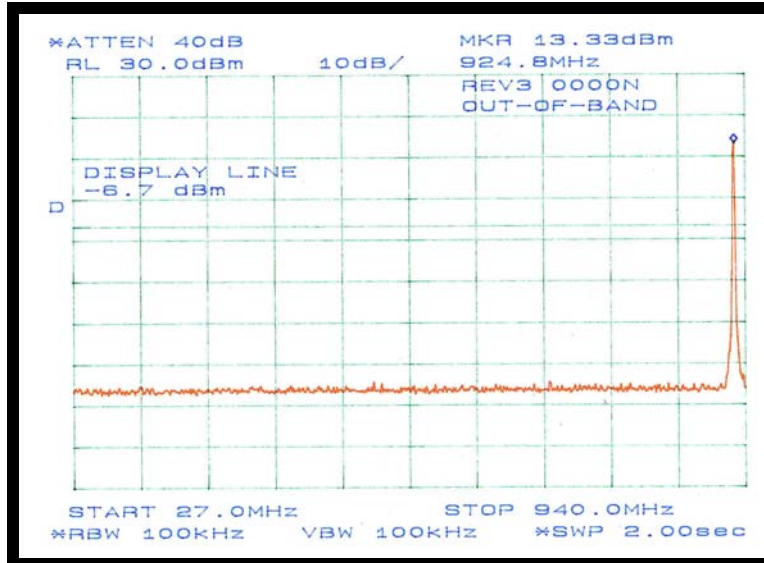


Figure 27: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 11

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 11) 27MHz – 940MHz.

Peak Frequency (Fundamental) = 924.8MHz
 Maximum Peak (27MHz – 940MHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = -6.7dBm

SECTION 10.12 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 11) 830MHZ – 5GHZ

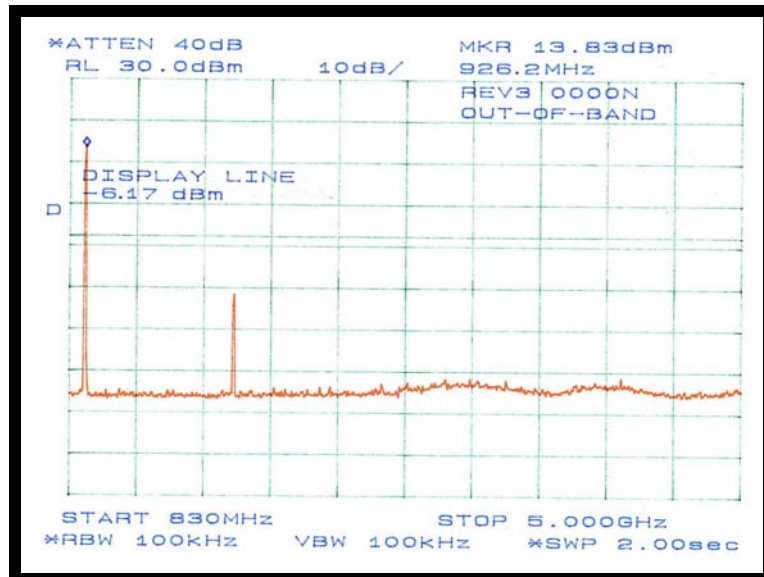


Figure 28: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 11

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 11) 830MHz – 5GHz

Peak Frequency (Fundamental) = 926.2 MHz
 Maximum Peak (830MHz – 5GHz) = Below 20dB limit
 20dB Limit (measured) per 15.247(c) = -6.17dBm

SECTION 10.13 TEST DATA – 100 KHZ BANDWIDTH (OUT-OF-BAND) (CHANNEL 11) 5GHZ – 10GHZ

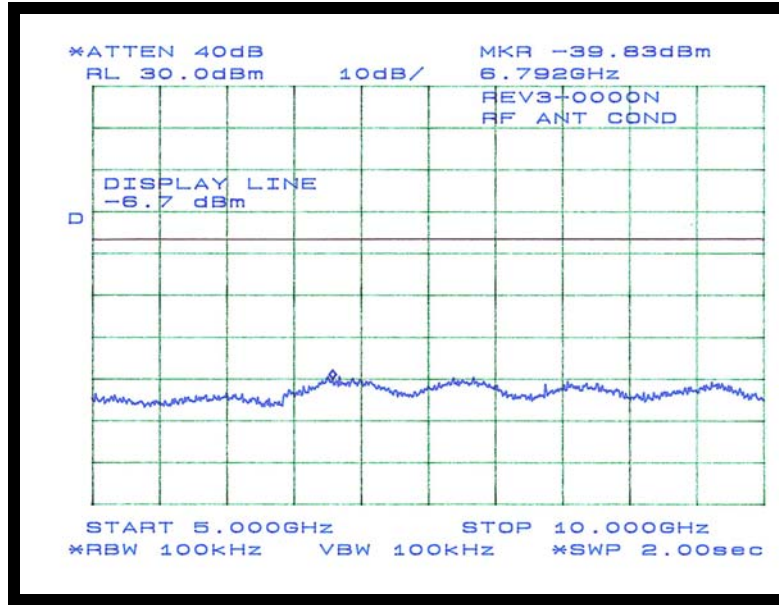


Figure 29: Plot of 100 kHz Bandwidth Out-of-Band Measurement at Channel 11

Test-Data Summary – 100 kHz Bandwidth Out-of-Band Measurement (Channel 11) 5GHz – 10GHz

Peak Frequency (Fundamental) = 926.208MHz
 Maximum Peak (830MHz – 5GHz) = Noise floor
 20dB Limit (measured) per 15.247(c) = -6.7dBm

PART 11 SPURIOUS/HARMONIC EMISSIONS IN THE RESTRICTED BANDS

SECTION 11.1 TEST SPECIFICATION:

FCC PART 15 SECTION 47 CFR 15.205
 FCC PART 15 SECTION 47 CFR 15.247(c)

SECTION 11.2 TEST RANGE – SPURIOUS/HARMONICS EMISSIONS:

The measurement range investigated was from 30 MHz to 10GHz.

SECTION 11.3 SITE USED – SPURIOUS/HARMONICS EMISSIONS MEASUREMENTS

- Test Site 1 - Shielded Room: 16' x 12' x 9'
- Test Site 1 - 3m Open Field Radiated Site
- Test Site 1 - 10m Open Field Radiated Site
- Test Site 2 - Environmental Lab
- EMC Lab 1 - Test Laboratory
- Semi-Anechoic Absorber Lined Shielded Room

SECTION 11.4 ADMINISTRATIVE AND ENVIRONMENTAL DETAILS

Test Date:	June 8 th - June 10 th ,2005
Test Engineer:	Bob Kershaw and Femi Ojo
Temperature	65°F
Humidity	50%

SECTION 11.5 SPURIOUS AND HARMONIC EMISSION IN THE RESTRICTED BANDS

Table 12 Test Data – Spurious Emissions (Below 1 GHz)

The table below shows the summary of the highest amplitudes of the spurious RF radiated emissions from the equipment under test. The EUT was tested for spurious emissions at the low, mid and high frequency and the worst case was recorded at mid frequency(915.97MHz).

INDICATED		CORRECTION		CORR	TURNTABLE ANT			CLASS A		CLASS B		FILTER	
FREQ	AMPL	ANT	CAB	AMPL	ANG	HT	POL	AMPL	MARG	AMPL	MARG	MODE	NOTES
MHz	dBuV/m	dB	dB	dBuV/m	DEG	m	-	dBuV/m	dB	dBuV/m	db		
48.06	5.8	11.4	2.4	19.5	0	1.0	VB	-	-	30.0	-10.5	P	
65.22	6.0	8.0	2.6	16.6	90	1.0	VB	-	-	30.0	-13.4	P	
72.22	8.1	7.1	2.7	17.9	0	1.0	VB	-	-	30.0	-12.1	P	
79.86	12.2	7.5	2.9	22.6	0	1.0	VB	-	-	30.0	-7.4	P	
79.86	6.7	7.5	2.9	17.1	90	1.0	VB	-	-	30.0	-12.9	P	
114.22	5.2	12.7	3.2	21.2	0	1.0	VB	-	-	33.0	-11.8	P	
114.86	-1.8	12.9	3.2	14.3	90	1.0	VB	-	-	33.0	-18.7	P	
147.55	3.0	11.8	3.8	18.6	90	1.0	VB	-	-	33.0	-14.4	P	
177.02	5.8	16.3	3.8	25.9	0	1.0	HB	-	-	33.0	-7.1	P	
185.80	5.2	18.0	3.8	27.0	0	1.0	HB	-	-	33.0	-6.0	P	
221.30	6.6	10.8	3.8	21.2	0	1.0	HL	-	-	36.0	-14.8	P	
229.12	6.3	10.9	4.0	21.2	0	1.0	HL	-	-	36.0	-14.8	P	
248.97	8.1	11.4	5.0	24.5	90	1.0	HL	-	-	36.0	-11.5	P	
260.63	10.5	12.0	5.7	28.3	90	1.0	HL	-	-	36.0	-7.7	P	
288.16	4.7	13.3	6.5	24.5	90	1.0	HL	-	-	36.0	-11.5	P	
325.81	6.1	14.0	6.3	26.4	0	3.0	HL	-	-	36.0	-9.6	P	
325.81	11.7	14.0	6.3	32.0	0	0.0	HL	-	-	36.0	-4.0	P	
349.31	9.1	14.3	6.3	29.7	90	0.0	HL	-	-	36.0	-6.3	P	

No emissions of significant level were observed between 30MHz – 48.06MHz and 349.91MHz -1GHz.

Table 13 Test Data – Spurious and Harmonics Emissions (Above 1 GHz)

The table below shows the summary of the highest amplitudes of the spurious RF radiated emissions from the equipment under test at various antenna heights, antenna polarization, and EUT orientations The EUT was tested for spurious emissions at the low, mid and high frequency and the worst case was recorded at mid frequency(915.97MHz)..

INDICATED		CORRECTION		CORR	TURNTABLE ANT			CLASS A		CLASS B		FILTER	
FREQ	AMPL	ANT	CAB	AMPL	ANG	HT	POL	AMPL	MARG	AMPL	MARG	MODE	NOTES
MHz	dBuV/m	dB	dB	dBuV/m	DEG	m	-	dBuV/m	dB	dBuV/m	db		
915.79	42.8	23.9	3.9	70.6	0	1.0	HH	-	-	143.0	-72.4	P	
915.79	43.3	23.9	3.9	71.1	0	1.0	VH	-	-	143.0	-71.9	P	
917.05	10.5	23.9	3.8	38.2	0	1.0	HH	-	-	46.0	-7.8	P	
917.05	10.7	23.9	3.8	38.4	90	1.0	VH	-	-	46.0	-7.6	P	
945.00	11.5	24.0	3.4	38.9	0	1.0	HH	-	-	46.0	-7.1	P	
1802.00	15.3	26.8	3.4	45.5	90	1.0	VH	-	-	54.0	-8.5	P	
1802.00	15.7	26.8	3.4	45.9	180	1.0	HH	-	-	54.0	-8.1	P	
1829.00	16.8	26.9	3.3	47.1	180	1.0	HH	-	-	54.0	-6.9	P	
1829.00	18.2	26.8	3.3	48.3	0	1.0	VH	-	-	54.0	-5.7	P	
1831.00	17.7	26.8	3.3	47.8	45	1.0	VH	-	-	54.0	-6.2	P	
1831.00	15.2	27.0	3.3	45.5	45	1.0	HH	-	-	54.0	-8.5	P	
2633.00	12.5	29.0	2.9	44.4	0	1.0	VH	-	-	54.0	-9.6	P	
2633.00	12.3	29.0	2.9	44.2	0	1.0	HH	-	-	54.0	-9.8	P	
2744.00	12.2	29.3	2.8	44.3	180	1.0	HH	-	-	54.0	-9.7	P	
2744.00	12.3	29.3	2.8	44.4	90	1.0	VH	-	-	54.0	-9.6	P	
2746.00	15.0	29.3	2.8	47.1	180	1.0	VH	-	-	54.0	-6.9	P	
3055.00	13.3	30.2	3.4	47.0	180	1.0	HH	-	-	54.0	-7.0	P	

Prepared By: ITC Engineering Services, Inc.
 9959 Calaveras Road, PO Box 543
 Sunol, California 94586-0543
 Tel: [925] 862-2944 Fax: [925] 862-9013
 Email: docs@itcenc.com Web: www.itcenc.com

Product: IMU Water Meter

FCC ID:OWS - 940

3055.00	13.8	30.2	3.4	47.5	180	1.0	VH	-	-	54.0	-6.5	P	
3155.00	6.5	30.4	4.2	41.2	180	1.0	VH	-	-	54.0	-12.8	P	
3370.00	9.8	31.0	4.8	45.6	0	1.0	HH	-	-	54.0	-8.4	P	
3370.00	10.2	30.9	4.8	45.8	0	1.0	VH	-	-	54.0	-8.2	P	
3378.00	8.2	30.9	4.7	43.8	90	1.0	VH	-	-	54.0	-10.2	P	
3378.00	10.2	31.0	4.7	45.9	0	1.0	HH	-	-	54.0	-8.1	P	
3421.00	9.2	31.0	4.7	44.9	90	1.0	VH	-	-	54.0	-9.1	P	
3421.00	8.3	31.1	4.7	44.1	90	1.0	HH	-	-	54.0	-9.9	P	
4573.00	6.3	32.5	5.0	43.9	180	1.0	VH	-	-	54.0	-10.1	P	
4573.00	6.2	32.5	5.0	43.7	90	1.0	HH	-	-	54.0	-10.3	P	
4579.00	6.8	32.5	5.0	44.4	0	1.0	HH	-	-	54.0	-9.6	P	
4579.00	6.5	32.5	5.0	44.0	90	1.0	VH	-	-	54.0	-10.0	P	
5487.00	6.8	34.2	5.0	46.0	0	1.0	HH	-	-	54.0	-8.0	P	
5487.00	7.3	34.2	5.0	46.5	0	1.0	VH	-	-	54.0	-7.5	P	
6407.00	7.8	34.4	6.7	48.9	90	1.0	HH	-	-	54.0	-5.1	P	
6407.00	8.8	34.5	6.7	50.0	90	1.0	VH	-	-	54.0	-4.0	P	
7320.00	5.0	36.1	7.5	48.7	180	1.0	VH	-	-	54.0	-5.3	P	
7320.00	4.3	36.1	7.5	47.9	180	1.0	HH	-	-	54.0	-6.1	P	
8235.00	3.3	36.9	9.2	49.5	0	1.0	HH	-	-	54.0	-4.5	P	
9167.00	2.0	37.4	12.5	51.9	0	1.0	VH	-	-	54.0	-2.1	P	

No emission of significant level was observed between 9.167 GHz -10 GHz

SECTION 11.6 TEST DATA SUMMARY

The margin is calculated as follows:

Margin = Corrected Amplitude - Limit; where Corrected Amplitude = Amplitude + Cable Loss + Antenna Factor.

SECTION 11.7 CONCLUSION

The IMU Water Meter meets the requirements of the test reference for Spurious and Restricted Bands emissions levels specified in the 47CFR15.209

SECTION 11.8 SPURIOUS PHOTOGRAPHS



Figure 30: Spurious Emissions Front View (Below 1 GHz)



Figure 31: Spurious Emissions Rear View (Below 1 GHz)



Figure 32: Spurious Emissions Front View (Above 1 GHz)



Figure 33: Spurious Emissions Rear View (Above 1 GHz)

PART 12 APPENDICES

A EUT TECHNICAL SPECIFICATION

Applicant	Silver Spring Networks
General Description	IMU Water Meter
Model	REV3 0000N
Dimension	H= 2.155in ,L=4.82in ,W= 3.76ins, Weight= 0.625lbs
Power Input	3.6Vdc

B EUT PHOTOGRAPHS.



Figure 34: EUT Front View

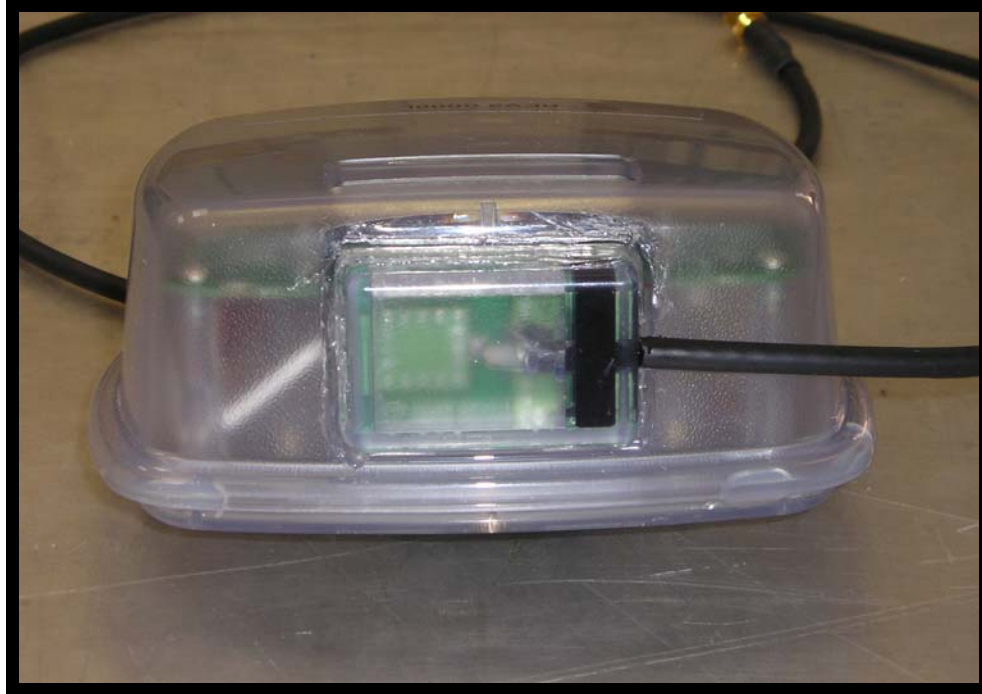


Figure 35: EUT Rear View



Figure 36: EUT Top View



Figure 37: EUT Side View



Figure 38: EUT Internal View

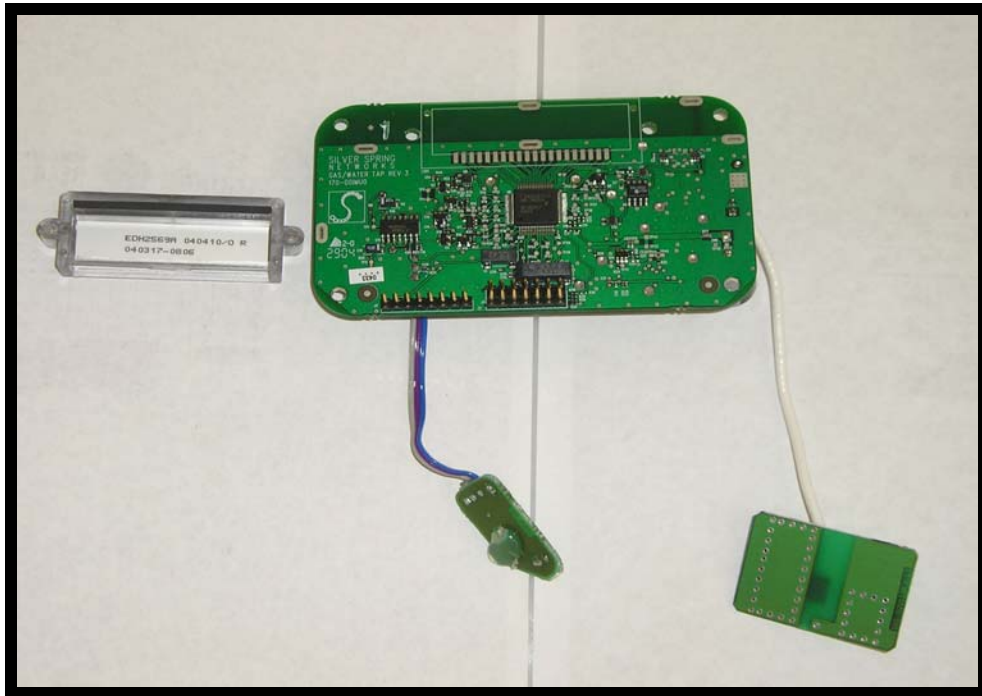


Figure 39: Component View

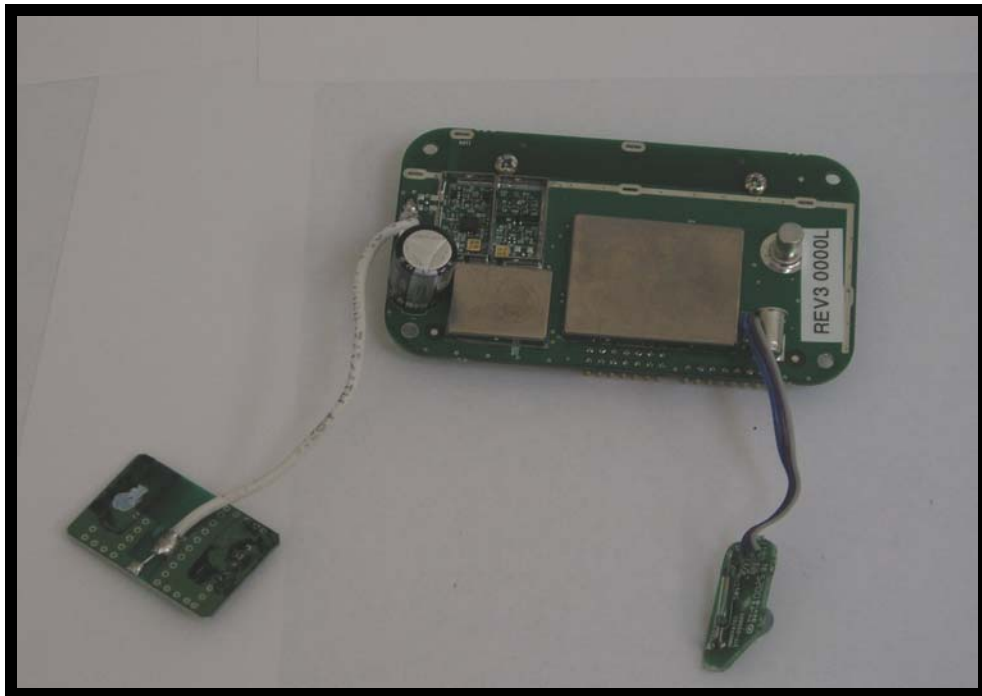


Figure 40: Component Solder View

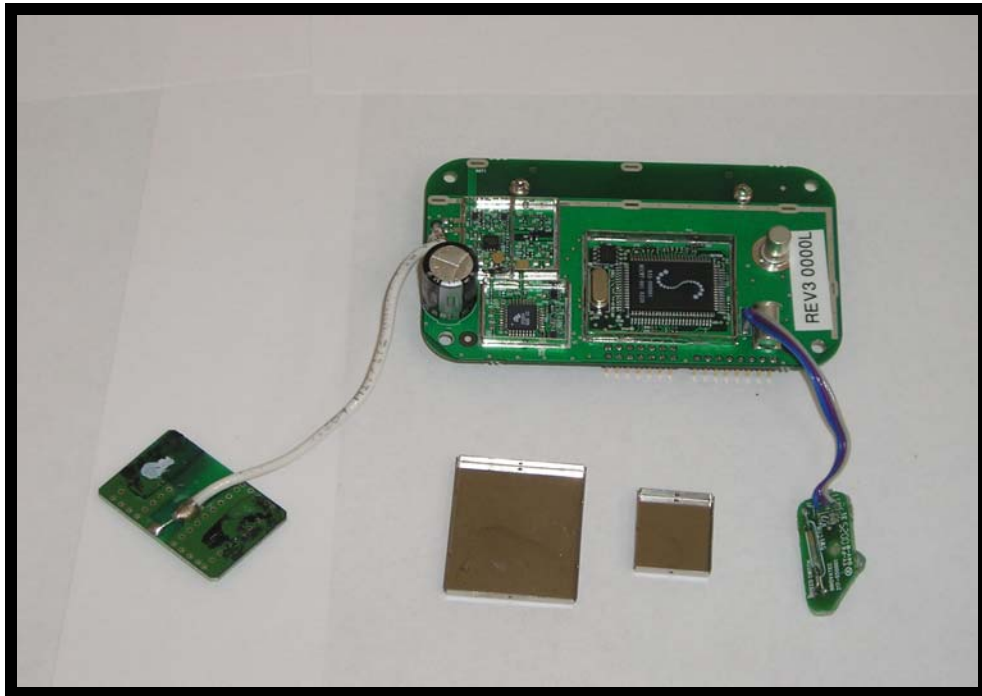


Figure 41: Component with Shield off

C. MODIFICATION LETTER

To Whom It May Concern:

This is to certify that no modifications were necessary for IMU Water meter to comply with the requirements of the standard listed below.

FCC Rules and Regulations per 47 CFR 15.247

It is the manufacturer's responsibility to ensure that additional production units of the IMU Water Meter are manufactured with identical electrical and mechanical characteristics.

For further information, please contact the manufacturer at:

Silver Spring Network, Inc.
13000 West Silver Spring Drive
Butler, WI 53007

ATTN: Mr Juan Luglio
Tel: (262) 364-5317
juan.luglio@silverspringnetworks.com