

## **EMISSIONS TEST REPORT FOR A LOW POWER TRANSMITTER**

### **I. GENERAL INFORMATION**

Requirement: FCC  
Test Requirements: FCC Part 15

Applicant: Silver Spring Networks  
575 Broadway Street  
Redwood City, CA 94063

**FCC ID:** OWS-NIC508  
**Model No.:** 174-000084

### **II. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)**

The Silver Spring Networks (SSN) model 174-000084 is a radio module for electric power meter communications use. The board incorporates a 900 MHz frequency hopping i210 Mesh radio, a 900 MHz Zigbee Home area Network (HAN) radio, and a 2.4GHz HAN radio.

### **III. TEST DATES AND TEST LOCATION**

Testing was performed on various dates between 15 August – 2 October 2008. Radiated emissions, 900 MHz and 2.4 GHz antenna conducted power, 2.4 GHz antenna conducted spurious, and AC line conducted emissions tests were performed at:

Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538

All other antenna port conducted tests were performed at Silver Spring Networks.



T.N. Cokenias  
EMC Consultant/Agent for Silver Spring Networks

13 October 2008

### 15.203 Antenna connector requirement

The EUT uses a custom permanently attached integral antenna, a special sheet metal antenna manufactured by Silver Spring Networks for electric meters

Antenna description	Mfr.	Model No.	Gain
Built-in sheet metal electric meter	SSN	n/a	2.4 dBi at 915 MHz 1.5 dBi at 2.4 GHz

**NOTE: Although all three radios share the same antenna, only one radio at a time is operating, either in receive or transmit mode.**

### TEST PROCEDURES

All tests were performed in accordance with the applicable procedures called out in the following documents, unless otherwise noted:

FCC 47CFR15

RSS-210 Issue 7: Low power license exempt radio frequency devices (July 2007)

RSS-Gen, Issue 2:

RSS-212: Test Facilities and Test Methods for Radio Equipment

ANSI C63.4 – 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

For each radio, tests were performed at three frequencies:

#### 900 MHz HAN Radio

Channel 1 (LOW) – 906.25 MHz

Channel 5 (MID) – 914.25 MHz

Channel 10 (HIGH) – 924.3 MHz

#### 2.4 GHz HAN Radio

Channel 11 (LOW) – 2405.8 MHz

Channel 18 (MID) – 2440.8 MHz

Channel 26 (HIGH) – 2480.9 MHz

#### 900 MHz FHSS

Channel 0 (LOW) – 902.3 MHz

Channel 42 (MID) -914.9 MHz

Channel 82 (HIFH) – 926.9 MHz

**Test Equipment**


Compliance Certification Services:

Equipment	Mfr	Model	Asset No.	Cal Due
Spectrum analyzer (radiated emissions 2.4GHz Pout, spurs)	Agilent	E4446A	C01159	10/27/08
EMI Receiver	HP	8542E	C00967	09/10/09
Bilog antenna	Sunol Sciences	JBI	C01016	09/28/08
Pre-amplifier	Agilent	HP8447D	C00885	03/31/09
Horn antenna	EMCO	3115	C00872	03/31/09
Pre-amplifier	Agilent	HP 8449B	C00749	09/27/08
EMI Receiver	R & S	ESHS-20	827129/006	01/27/09
LISN	FCC	LISN50/250-25-2	2023	09/27/08

Silver Spring Networks:

Equipment	Mfr	Model	Asset No.	Cal Date
Spectrum analyzer	Agilent	E44053	1077004	06/29/08

**Test Set-up Diagram**

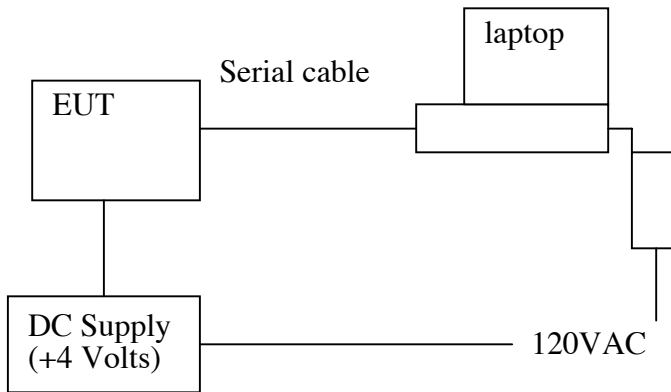

**Support Equipment**

Equipment	Mfr	Model	Asset No.
DC Power Supply	Agilent	E3610A	2844
Laptop PC	Dell	PP01L	TW-0791UH1280-OC9-6558
AC/DC adapter	CUI Inc.	DSA-60W-20	2607HB

# FREQUENCY HOPPING SPREAD SPECTRUM RADIO EMISSIONS

## TEST RESULTS

### Radiated Test Set-up, 30 MHz-26 GHz

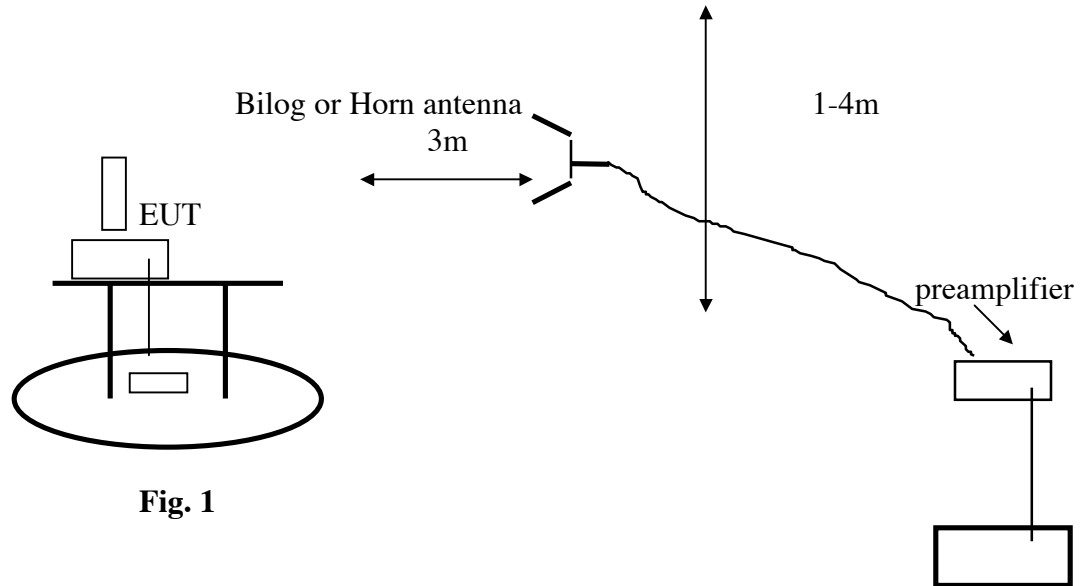


Fig. 1

### Test Procedures

Radiated emissions generated by the transmitter portion of the EUT were measured.

1. The EUT was placed on a wooden table resting on a turntable on the test site. The search antenna was placed 3m from the EUT. The EUT antenna was mounted in the with the EUT TX antenna pointed directly to the search antenna.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205.
3. Emissions were investigated to the 10<sup>th</sup> harmonic of the fundamental.
6. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

**Test Results:** Worst-case results are presented. Refer to data sheets below. Restricted band emissions meet 54 dBuV/m. Other undesired emissions from the transmitter meet the -20 dBc requirement in 15.247(d).

**15.205 Restricted Frequency Bands**

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505 (1)	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

**15.209 General Field Strength Limits**

<b>Frequency (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

### Radiated Emissions Above 1 GHz, Low Channel

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

Company: Silver Spring Network  
 Project #: 08U11890  
 Date: 8/15/08  
 Test Engineer: Thanh Nguyen  
 Configuration: EUT at Y position  
 Mode: Transmit

**Test Equipment:**

Horn 1-18GHz: T73; S/N: 6717 @3m  
 Pre-amplifier 1-26GHz: T144 Miteq 3008A00931  
 Pre-amplifier 26-40GHz:   
 Horn > 18GHz:   
 2 foot cable:   
 3 foot cable:   
 12 foot cable: Gordon 203134001  
 HPF: HPP\_1.5GHz  
 Reject Filter:   
 Peak Measurements: RBW=VBW=1MHz  
 Average Measurements: RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Setting ATTS112=7</b>															
<b>Low CH 902.325 MHz ATS 107= 0</b>															
2.707	3.0	50.72	46.90	29.2	8.6	-37.4	0.0	0.6	51.6	47.8	74	54	-22.4	-6.2	V
3.609	3.0	42.15	30.69	31.6	9.6	-36.9	0.0	0.6	47.0	35.5	74	54	-27.0	-18.5	V
4.512	3.0	42.28	33.48	33.0	10.6	-36.5	0.0	0.6	50.0	41.2	74	54	-24.0	-12.8	V
5.414	3.0	42.43	33.55	33.8	11.2	-36.3	0.0	0.5	51.6	42.7	74	54	-22.4	-11.3	V
8.121	3.0	40.70	29.31	35.5	13.1	-36.2	0.0	0.7	53.7	42.3	74	54	-20.3	-11.7	V
9.023	3.0	40.31	28.15	36.5	13.5	-36.7	0.0	0.7	54.4	42.2	74	54	-19.6	-11.8	Noise floor
2.707	3.0	53.06	51.24	29.2	8.6	-37.4	0.0	0.6	54.0	52.2	74	54	-20.0	-1.8	H
3.609	3.0	42.18	33.75	31.6	9.6	-36.9	0.0	0.6	47.0	38.6	74	54	-27.0	-15.4	H
4.512	3.0	43.67	36.12	33.0	10.6	-36.5	0.0	0.6	51.3	43.8	74	54	-22.7	-10.2	H
5.414	3.0	43.65	36.85	33.8	11.2	-36.3	0.0	0.5	52.8	46.0	74	54	-21.2	-8.0	H
8.121	3.0	43.89	34.97	35.5	13.1	-36.2	0.0	0.7	56.9	48.0	74	54	-17.1	-6.0	H
9.023	3.0	41.43	28.02	36.5	13.5	-36.7	0.0	0.7	55.5	42.1	74	54	-18.5	-11.9	Noise floor

f Measurement Frequency      Amp Preamp Gain      Avg Lim Average Field Strength Limit  
 Dist Distance to Antenna      D Corr Distance Correct to 3 meters      Pk Lim Peak Field Strength Limit  
 Read Analyzer Reading      Avg Average Field Strength @ 3 m      Avg Mar Margin vs. Average Limit  
 AF Antenna Factor      Peak Calculated Peak Field Strength      Pk Mar Margin vs. Peak Limit  
 CL Cable Loss      HPF High Pass Filter

### Radiated Emissions Above 1 GHz, Mid Channel

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

Company: Silver Spring Network  
 Project #: 08U11890  
 Date: 8/15/08  
 Test Engineer: Thanh Nguyen  
 Configuration: EUT at Y position  
 Mode: Transmit MID Channel 914.95MHZ

**Test Equipment:**

Horn 1-18GHz: T73; S/N: 6717 @3m  
 Pre-amplifer 1-26GHz: T144 Miteq 3008A00931  
 Pre-amplifer 26-40GHz:   
 Horn > 18GHz:   
 HI Frequency Cables:   
 2 foot cable:   
 3 foot cable:   
 12 foot cable: Gordon 203134001  
 HPF: HPF\_1.5GHz  
 Reject Filter:   
 Peak Measurements: RBW=VBW=1MHz  
 Average Measurements: RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Mid CH 914.950MHz															
Power Setting ATSI12=20															
Channel setting ATSI07=42															
2.744	3.0	54.03	52.29	29.3	8.7	-37.4	0.0	0.6	55.1	53.4	74	54	-18.9	-0.6	V
3.660	3.0	48.72	44.62	31.7	9.7	-36.9	0.0	0.6	53.8	49.7	74	54	-20.2	-4.3	V
4.575	3.0	41.50	29.09	33.1	10.7	-36.5	0.0	0.6	49.3	36.9	74	54	-24.7	-17.1	V
7.319	3.0	44.99	37.88	35.0	12.7	-36.2	0.0	0.6	57.1	49.9	74	54	-16.9	-4.1	V
8.234	3.0	40.55	30.32	35.6	13.1	-36.3	0.0	0.7	53.7	43.5	74	54	-20.3	-10.5	V
9.149	3.0	39.90	28.09	36.5	13.6	-36.7	0.0	0.7	54.1	42.3	74	54	-19.9	-11.7	Noise floor
2.744	3.0	47.37	43.10	29.3	8.7	-37.4	0.0	0.6	48.4	44.2	74	54	-25.6	-9.8	H
3.660	3.0	50.90	44.53	31.7	9.7	-36.9	0.0	0.6	56.0	49.6	74	54	-18.0	-4.4	H
4.575	3.0	42.73	33.78	33.1	10.7	-36.5	0.0	0.6	50.5	41.6	74	54	-23.5	-12.4	H
7.319	3.0	47.15	41.87	35.0	12.7	-36.2	0.0	0.6	59.2	53.9	74	54	-14.8	-0.1	H
8.234	3.0	43.94	35.94	35.6	13.1	-36.3	0.0	0.7	57.1	49.1	74	54	-16.9	-4.9	H
9.149	3.0	40.89	28.54	36.5	13.6	-36.7	0.0	0.7	55.1	42.7	74	54	-18.9	-11.3	Noise floor

f Measurement Frequency      Amp Preamp Gain      Avg Lim Average Field Strength Limit  
 Dist Distance to Antenna      D Corr Distance Correct to 3 meters      Pk Lim Peak Field Strength Limit  
 Read Analyzer Reading      Avg Average Field Strength @ 3 m      Avg Mar Margin vs. Average Limit  
 AF Antenna Factor      Peak Calculated Peak Field Strength      Pk Mar Margin vs. Peak Limit  
 CL Cable Loss      HPF High Pass Filter



### Radiated Emissions Above 1 GHz, High Channel


High Frequency Measurement																																														
Compliance Certification Services, Morgan Hill Open Field Site																																														
Company:		Silver Spring Network																																												
Project #:		08U11890																																												
Date:		6/16/08																																												
Test Engineer:		Thanh Nguyen																																												
Configuration:		EUT at XY position																																												
Mode:		Transmit High Channel 926.866MHZ																																												
Test Equipment:																																														
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz																																					
T73; S/N: 6717 @3m			T144 Miteq 3008A00931																																											
Hi Frequency Cables																																														
2 foot cable			3 foot cable			12 foot cable			HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																																	
						Gordon 203134001			HPF_1.5GHz																																					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																															
Power Setting ATSI12-7																																														
Channel setting ATSI107-82																																														
2.781	3.0	47.5	43.7	29.4	8.7	-37.4	0.0	0.6	48.7	44.9	74	54	-25.3	-9.1	V																															
3.707	3.0	42.1	32.1	31.8	9.7	-36.8	0.0	0.6	47.4	37.4	74	54	-26.6	-16.6	V																															
4.634	3.0	43.8	37.3	33.1	10.7	-36.5	0.0	0.6	51.7	45.2	74	54	-22.3	-8.8	V																															
7.415	3.0	42.6	30.7	35.0	12.7	-36.2	0.0	0.6	54.8	42.9	74	54	-19.2	-11.1	V																															
8.342	3.0	41.1	28.7	35.7	13.2	-36.3	0.0	0.7	54.4	42.0	74	54	-19.6	-12.0	V																															
2.781	3.0	51.85	49.04	29.4	8.7	-37.4	0.0	0.6	53.1	50.3	74	54	-20.9	-3.7	H																															
3.707	3.0	46.10	39.90	31.8	9.7	-36.8	0.0	0.6	51.4	45.2	74	54	-22.6	-8.8	H																															
4.634	3.0	47.20	42.86	33.1	10.7	-36.5	0.0	0.6	55.1	50.8	74	54	-18.9	-3.2	H																															
7.415	3.0	42.27	29.33	35.0	12.7	-36.2	0.0	0.6	54.4	41.5	74	54	-19.6	-12.5	H																															
8.342	3.0	40.75	28.92	35.7	13.2	-36.3	0.0	0.7	54.0	42.2	74	54	-20.0	-11.8	H																															
<table style="width:100%; border: none;"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>																	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																									
CL	Cable Loss	HPF	High Pass Filter																																											

## **Radiated Emissions Below 1 GHZ**



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 24 File#: 08U11890.emi Date: 08-22-2008 Time: 11:07:00

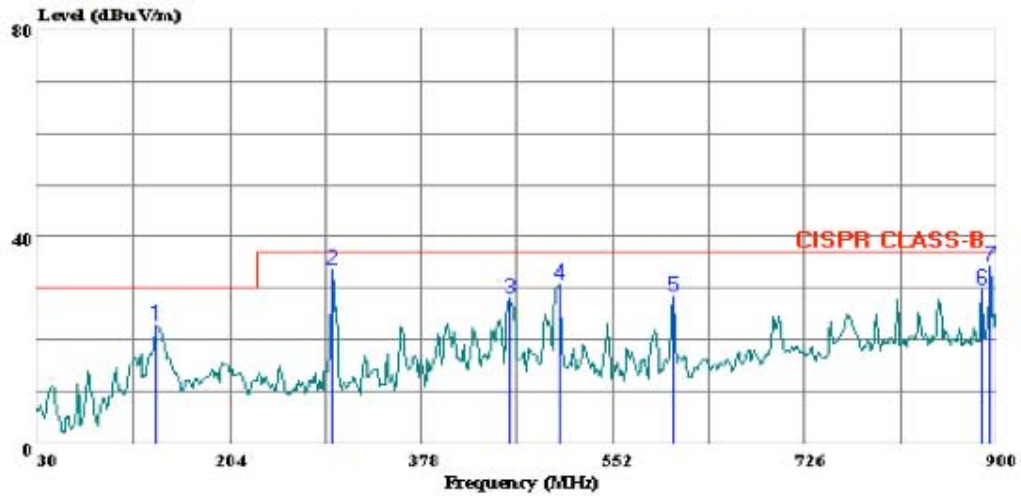

Trace: 23

Ref Trace:

Condition: CISPR CLASS-B HORIZONTAL  
 Test Operator:: William Zhuang  
 Project #: : 08U11890  
 Company: : Silver Spring  
 Configuration: : EUT with Laptop  
 Mode : : Tx, 900MHz, Hopping Max Power  
 Target: : CISPR Class B


Page: 1

	Read	Read	Limit	Over		
Freq	Level	Factor	Level	Limit	Limit	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	137.880	40.83	-17.92	22.91	30.00	-7.09 Peak
2	297.090	49.38	-15.65	33.73	37.00	-3.27 Peak
3	458.040	39.10	-11.01	28.09	37.00	-8.91 Peak
4	503.280	40.50	-9.82	30.68	37.00	-6.32 Peak
5	605.940	36.93	-8.39	28.54	37.00	-8.46 Peak
6	886.080	32.61	-2.65	29.96	37.00	-7.04 Peak
7	894.780	36.66	-2.40	34.26	37.00	-2.74 Peak



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 32 File#: 08U11890.emi Date: 08-22-2008 Time: 11:32:22

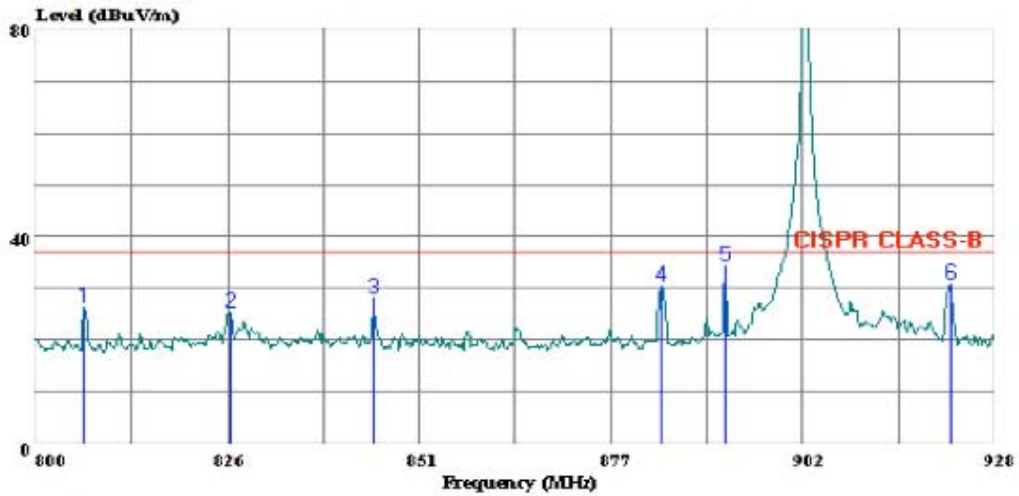

Trace: 31

Ref Trace:

Condition: CISPR CLASS-B HORIZONTAL  
 Test Operator:: William Zhuang  
 Project #: : 08U11890  
 Company: : Silver Spring  
 Configuration: : EUT with Laptop  
 Mode : : Tx, 900MHz, Hopping Max Power  
 Target: : CISPR Class B


Page: 1

	Read	Read	Limit	Over			
	Freq	Level	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Remark
1	806.272	30.81	-4.35	26.46	37.00	-10.54	Peak
2	825.856	29.17	-3.96	25.21	37.00	-11.79	Peak
3	845.056	31.69	-3.59	28.10	37.00	-8.90	Peak
4	883.584	33.13	-2.72	30.40	37.00	-6.60	Peak
5	892.032	36.84	-2.49	34.36	37.00	-2.64	Peak
6	922.112	32.54	-1.83	30.71	37.00	-6.29	Peak



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 26 File#: 08U11890.emi Date: 08-22-2008 Time: 11:13:25

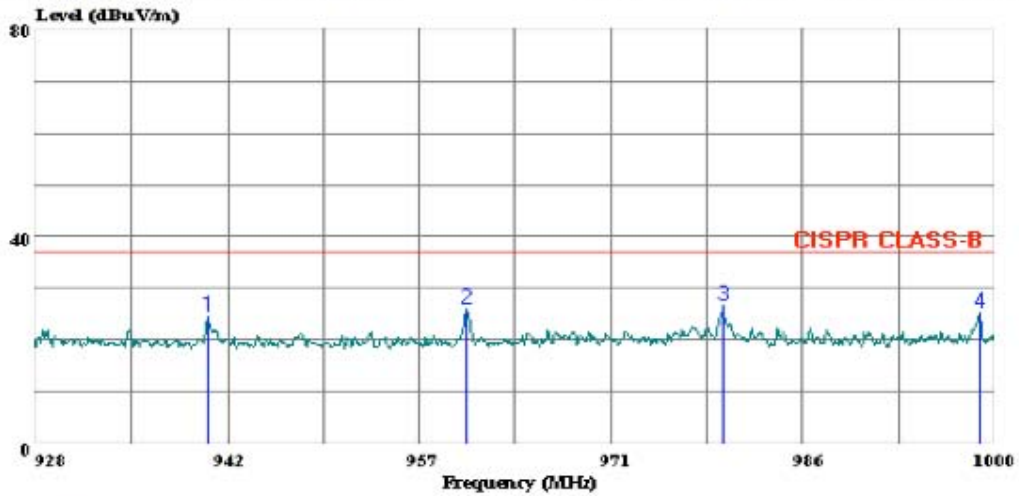

Trace: 25

Ref Trace:

Condition: CISPR CLASS-B HORIZONTAL  
 Test Operator:: William Zhuang  
 Project #: : 08U11890  
 Company: : Silver Spring  
 Configuration: : EUT with Laptop  
 Mode : : Tx, 900MHz, Hopping Max Power  
 Target: : CISPR Class B


Page: 1

	Read Freq	Read Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	940.888	25.96	-1.53	24.43	37.00	-12.57	Peak
2	960.328	27.13	-1.01	26.12	37.00	-10.88	Peak
3	979.624	27.31	-0.70	26.61	37.00	-10.39	Peak
4	998.848	25.71	-0.30	25.41	37.00	-11.59	Peak



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 22 File#: 08U11890.emi Date: 08-22-2008 Time: 11:00:29

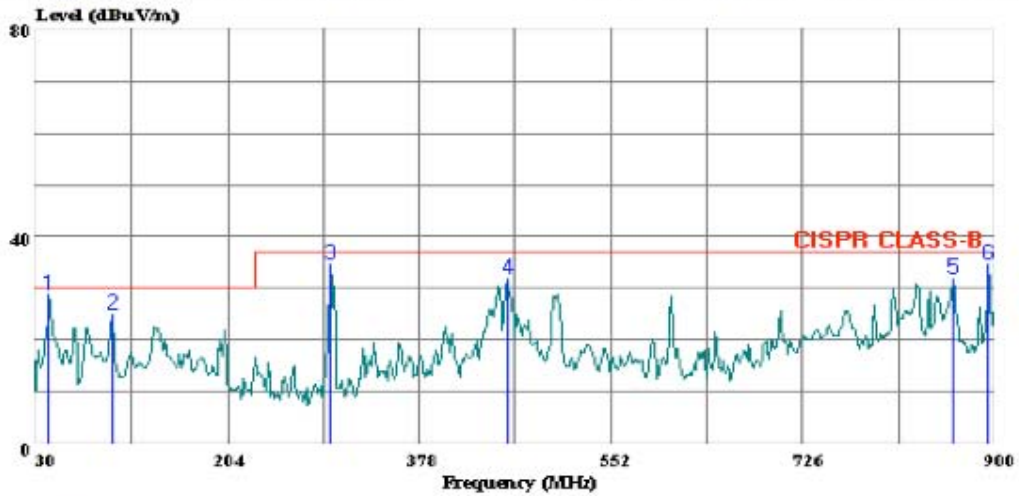

Trace: 21

Ref Trace:

Condition: CISPR CLASS-B VERTICAL  
 Test Operator:: William Zhuang  
 Project #: : 08U11890  
 Company: : Silver Spring  
 Configuration: : EUT with Laptop  
 Mode : : Tx, 900MHz, Hopping Max Power  
 Target: : CISPR Class B


Page: 1

	Freq	Read	Limit	Over		
	MHz	Level	Factor	Level	Line	Limit Remark
		dBuV	dB	dBuV/m	dBuV/m	dB
1	42.180	48.70	-19.82	28.89	30.00	-1.11 Peak
2	98.730	46.34	-21.40	24.94	30.00	-5.06 Peak
3	297.090	50.18	-15.65	34.53	37.00	-2.47 Peak
4	458.040	42.79	-11.01	31.78	37.00	-5.22 Peak
5	862.590	34.91	-3.16	31.75	37.00	-5.25 Peak
6	894.780	37.05	-2.40	34.65	37.00	-2.35 Peak



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 30 File#: 08U11890.emi Date: 08-22-2008 Time: 11:26:33

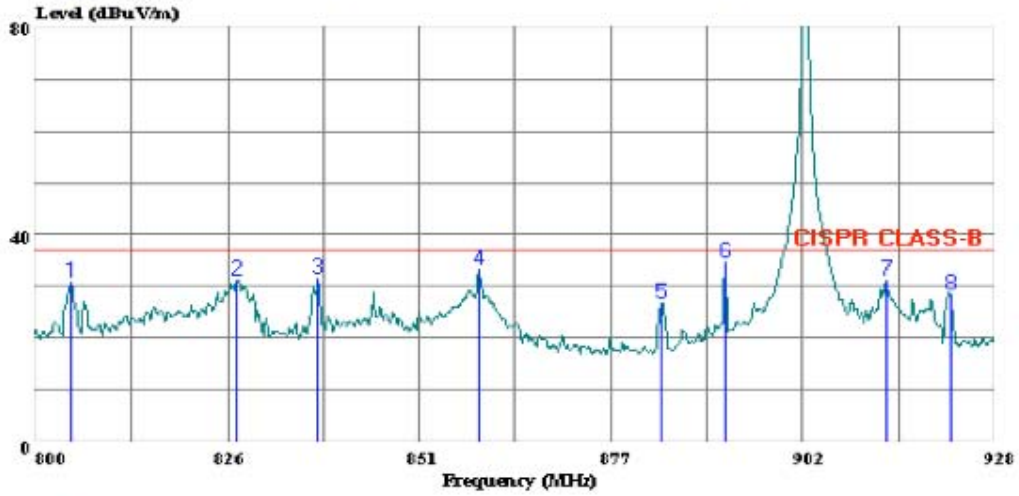

Trace: 29

Ref Trace:

Condition: CISPR CLASS-B VERTICAL  
 Test Operator:: William Zhuang  
 Project #: : 08U11890  
 Company: : Silver Spring  
 Configuration: : EUT with Laptop  
 Mode : : Tx, 900MHz, Hopping Max Power  
 Target: : CISPR Class B


Page: 1

	Read	Read	Limit	Over		
	Level	Factor	Level	Limit	Limit	Remark
	dBuV	dB	dBuV/m	dBuV/m	dB	
	MHz					
1	804.736	35.12	-4.40	30.72	37.00	-6.28 Peak
2	826.880	35.19	-3.94	31.25	37.00	-5.75 Peak
3	837.632	35.11	-3.73	31.38	37.00	-5.62 Peak
4	859.136	36.57	-3.22	33.35	37.00	-3.65 Peak
5	883.584	29.47	-2.72	26.75	37.00	-10.25 Peak
6	892.032	37.07	-2.49	34.59	37.00	-2.41 Peak
7	913.536	33.20	-2.07	31.13	37.00	-5.87 Peak
8	922.112	30.29	-1.83	28.46	37.00	-8.54 Peak



Compliance Certification Services  
 47173 Benicia Street  
 Fremont, CA 94538  
 Tel: (510) 771-1000  
 Fax: (510) 661-0888

Data#: 28 File#: 08U11890.emi Date: 08-22-2008 Time: 11:20:03

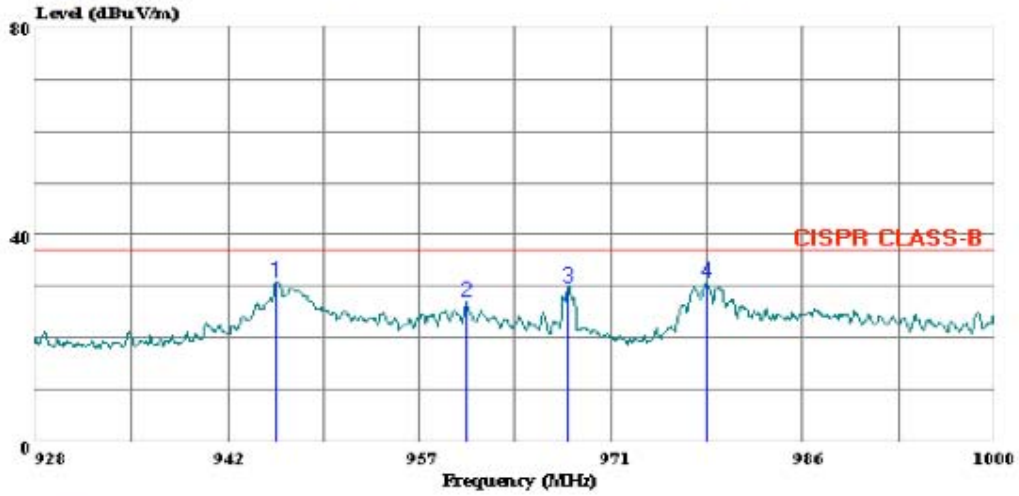

Trace: 27

Ref Trace:

Condition: CISPR CLASS-B VERTICAL  
 Test Operator:: William Zhuang  
 Project #: : 08U11890  
 Company: : Silver Spring  
 Configuration: : EUT with Laptop  
 Mode : : Tx, 900MHz, Hopping Max Power  
 Target: : CISPR Class B

Page: 1

	Read	Read	Limit	Over		
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	946.072	32.15	-1.41	30.73	37.00	-6.27 Peak
2	960.328	27.90	-1.01	26.89	37.00	-10.11 Peak
3	968.032	30.85	-0.93	29.92	37.00	-7.08 Peak
4	978.328	31.51	-0.75	30.76	37.00	-6.24 Peak



## **20 dB Bandwidth**

### **LIMIT**

None; for reporting purposes only.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to approximately 5% of the 20 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.


### **RESULTS**

No non-compliance noted:


<b>Channel</b>	<b>Frequency (MHz)</b>	<b>20 dB Bandwidth (kHz)</b>
Low	902.3	222.5
Middle	914.9	220
High	926.9	215

Emission Designator: 223KF1D


**20 dB BANDWIDTH LOW CHANNEL**

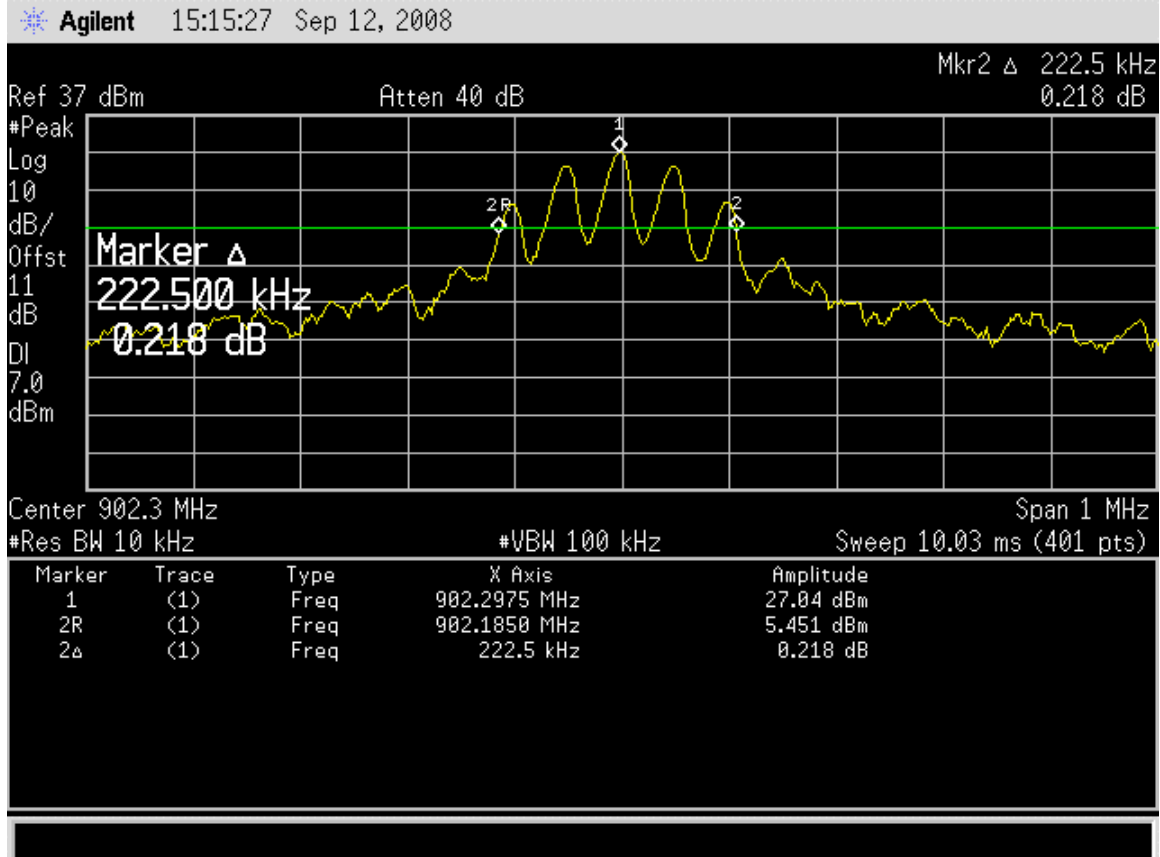

**20 dB BANDWIDTH MID CHANNEL**

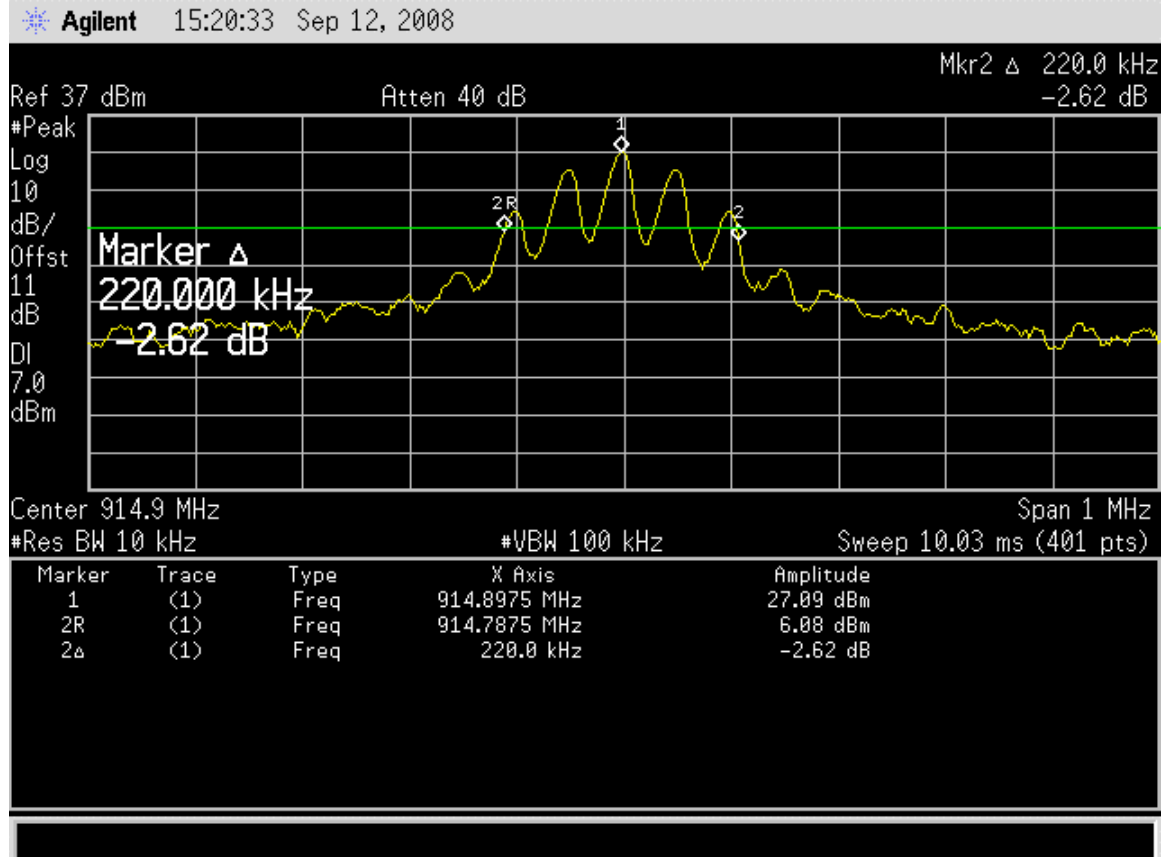

**20 dB BANDWIDTH HIGH CHANNEL**

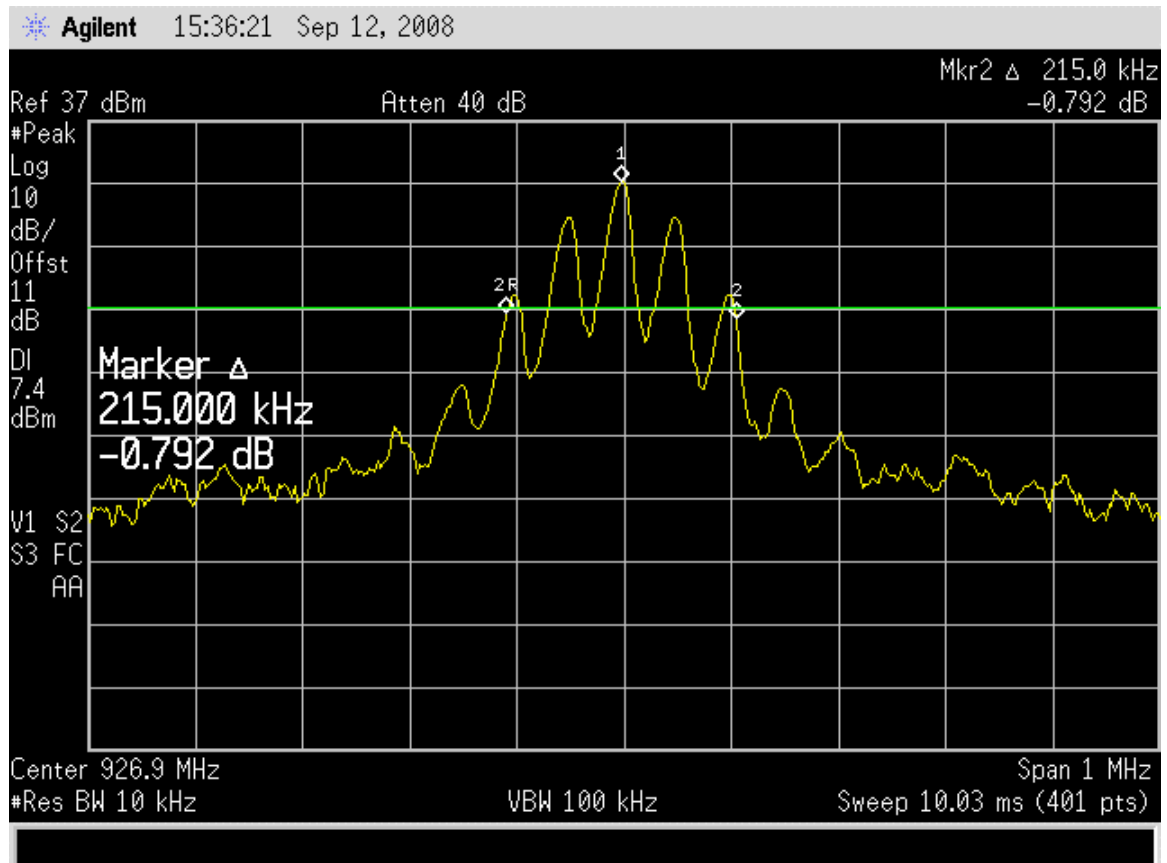

## **HOPPING FREQUENCY SEPARATION**

### **LIMIT**

§15.247 (a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The RBW is set to 10 kHz and the VBW is set to 30 kHz. The sweep time is coupled.

### **RESULTS**

No non-compliance noted:

The separation is 312.5KHz.

**HOPPING FREQUENCY SEPARATION**

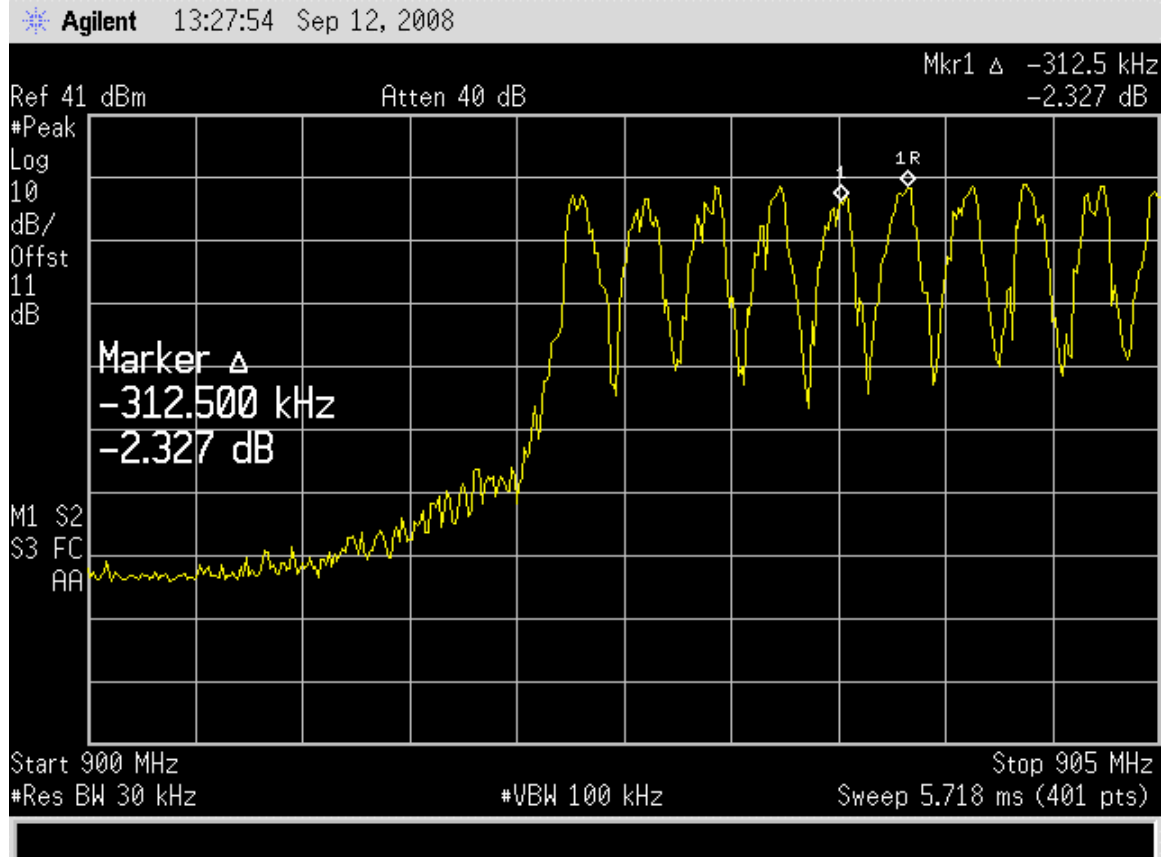

## **NUMBER OF HOPPING CHANNELS**

### **LIMIT**

§15.247 (a) (1) (i) For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 3 % of the span. The analyzer is set to Max Hold.

### **RESULTS**

No non-compliance noted:

83 Channels observed.

**NUMBER OF HOPPING CHANNELS**

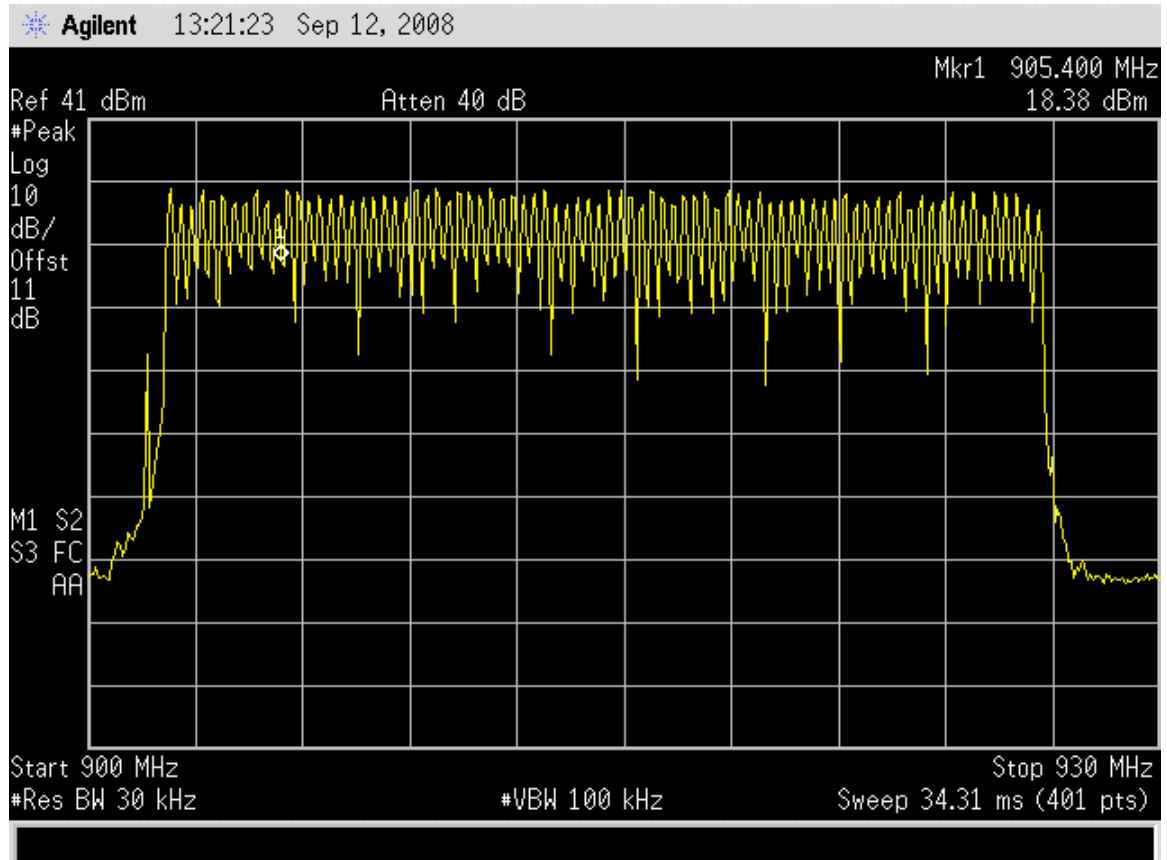



## **AVERAGE TIME OF OCCUPANCY**

### **LIMIT**

§15.247 (a) (1) (i) For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 20 second scan, to enable resolution of each occurrence.


### **RESULTS**

No non-compliance noted:


There are 3 pulses within the 20-second period. The on time for each pulse is 90 msec.

Therefore, the average time of occupancy in the specified 20-second period is 270 sec.

**PULSE WIDTH**

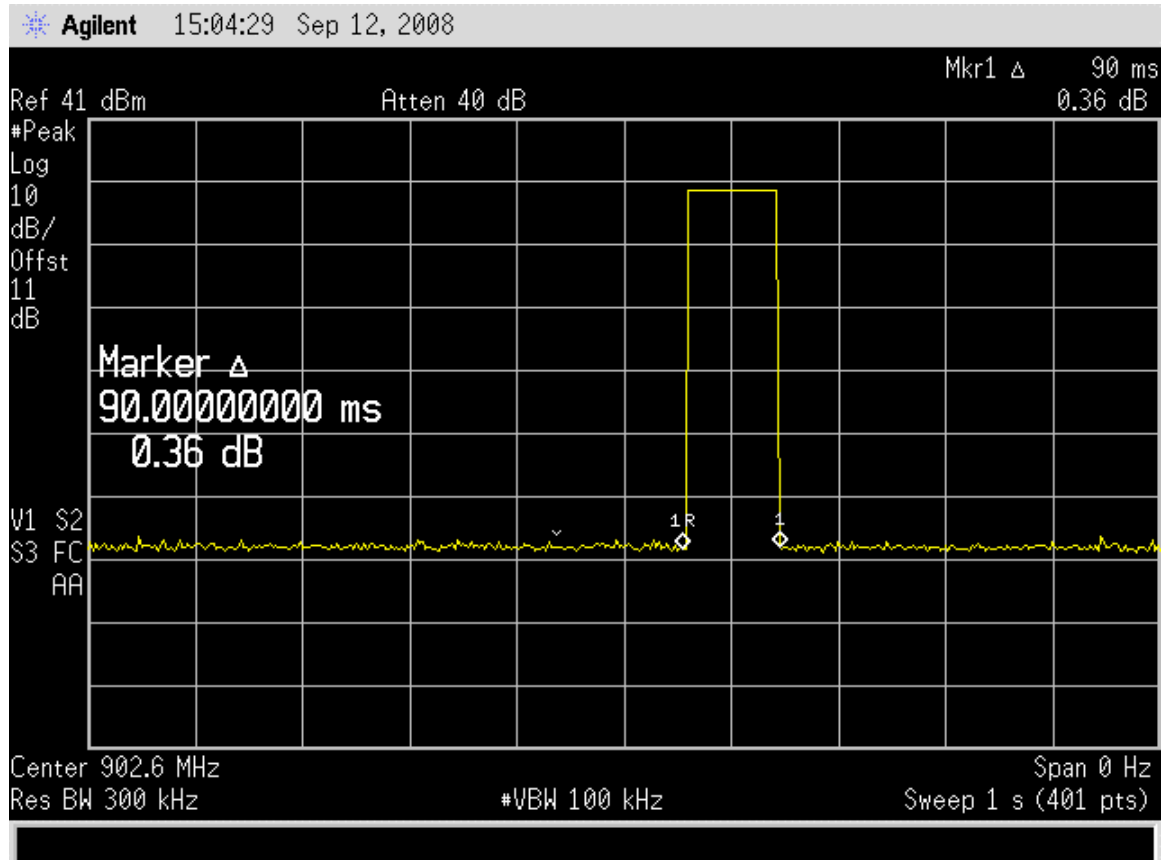

**NUMBER OF PULSES IN 20 SECOND OBSERVATION PERIOD**

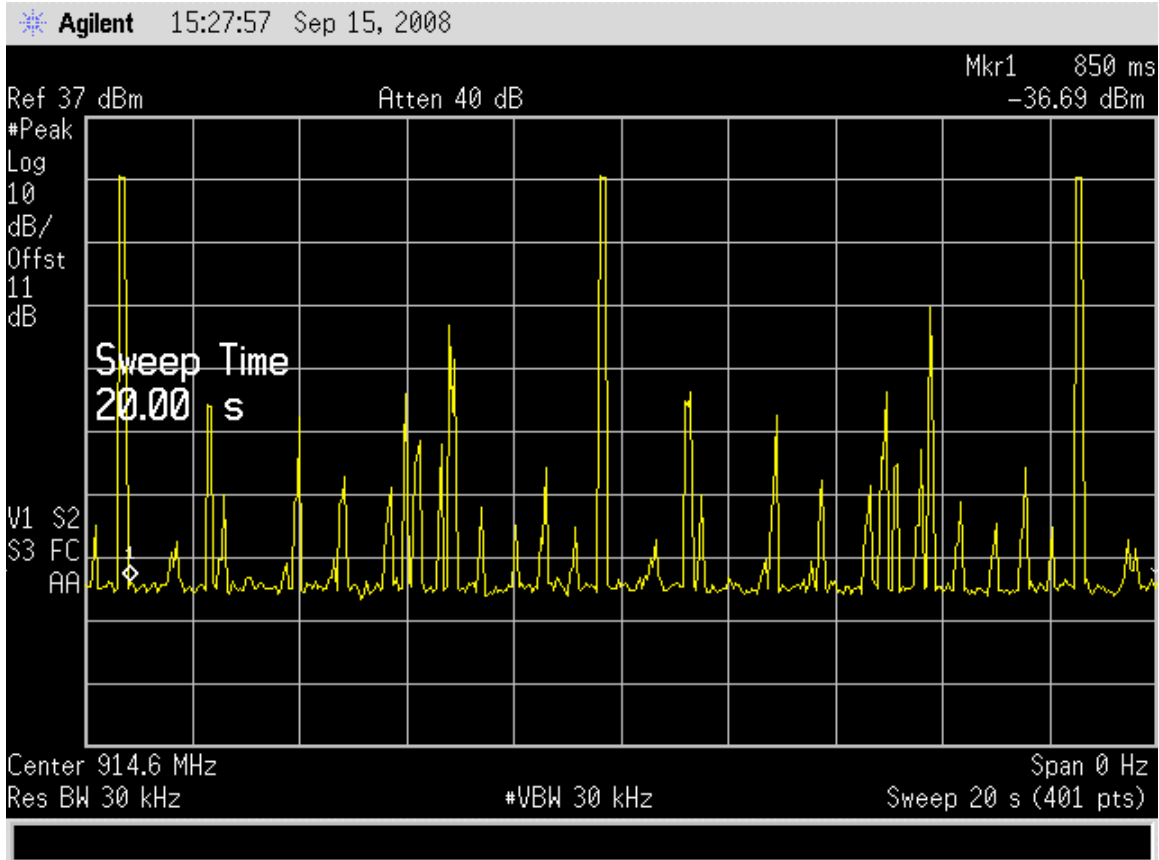

**PEAK OUTPUT POWER**

**PEAK POWER LIMIT**

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (2) For frequency hopping systems operating in the 902-928 MHz band, employing at least 50 hopping channels: 1 watt; and employing less than 50 hopping channels, but at least 25 hopping channels: 0.25 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 2.4 dBi, therefore the power limit is 30 dBm.

**TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer and the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

**RESULTS**


No non-compliance noted:

<b>Channel</b>	<b>Frequency</b>	<b>P out</b>
Low	902.3	29.56
Mid	914.9	29.22
High	926.9	28.84


**OUTPUT POWER LOW CHANNEL**

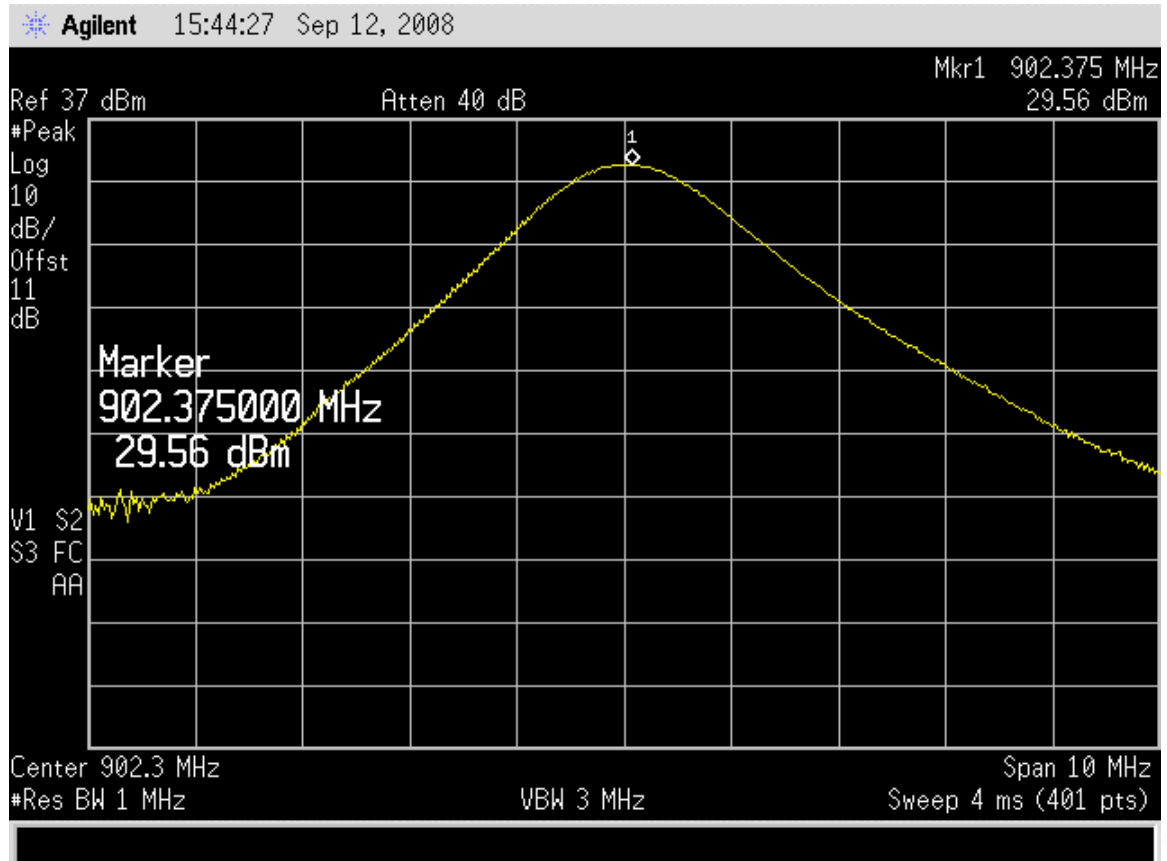

**OUTPUT POWER MID CHANNEL**

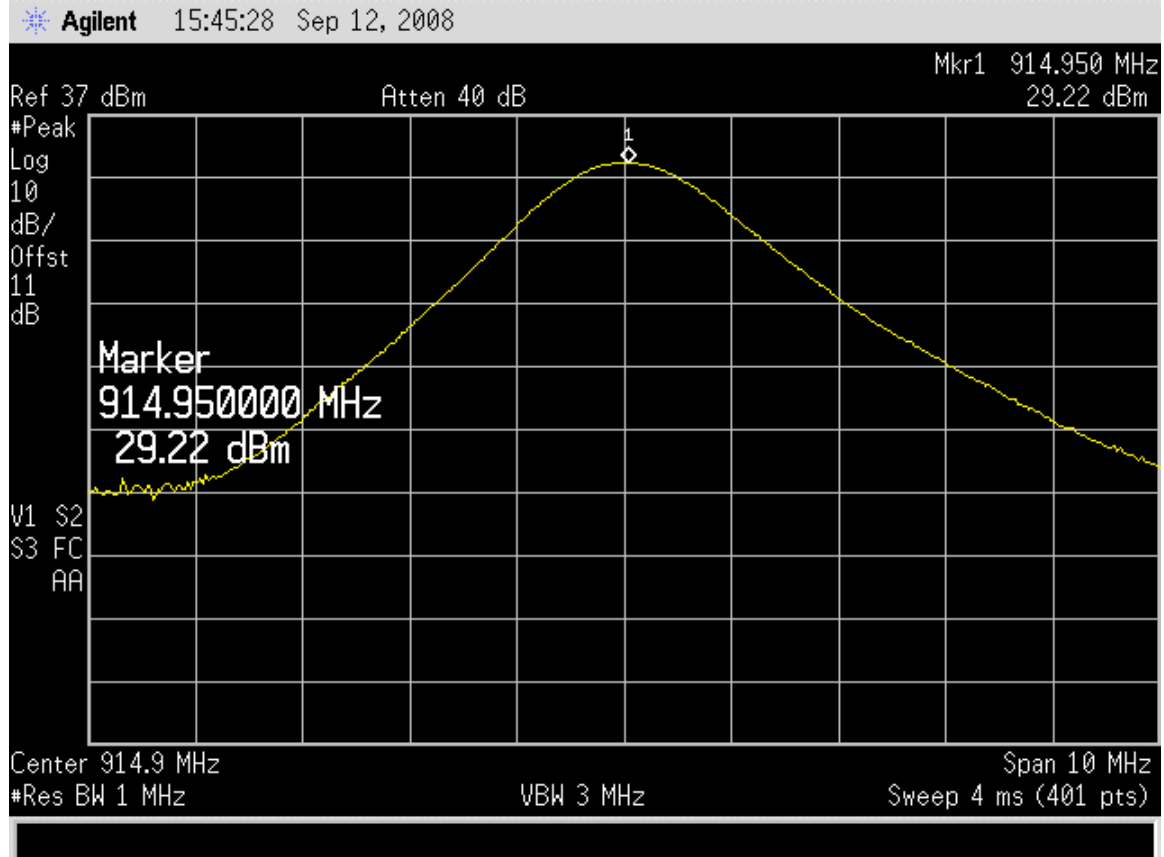

**OUTPUT POWER HIGH CHANNEL**

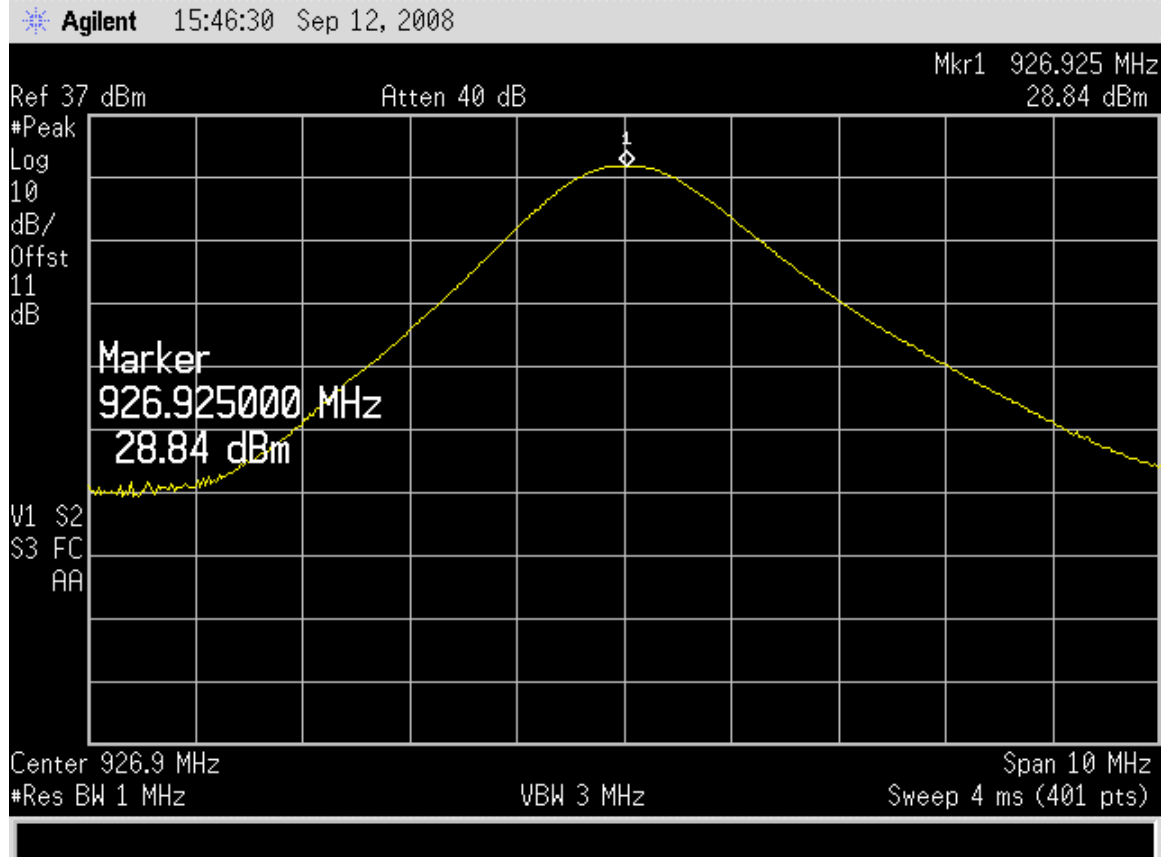

## MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.



### CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

**LIMITS**

From §1.1310 Table 1 (B),  $S = 0.6 \text{ mW/cm}^2$

**RESULTS**

No non-compliance noted:

<b>Power Density Limit (mW/cm<sup>2</sup>)</b>	<b>Output Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>S, mW/cm<sup>2</sup> at 20cm</b>
0.6	29.56	2.40	0.31

MPE Distance: 14.4 cm

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## **CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 10 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


### **RESULTS**

No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL, HOPPING**

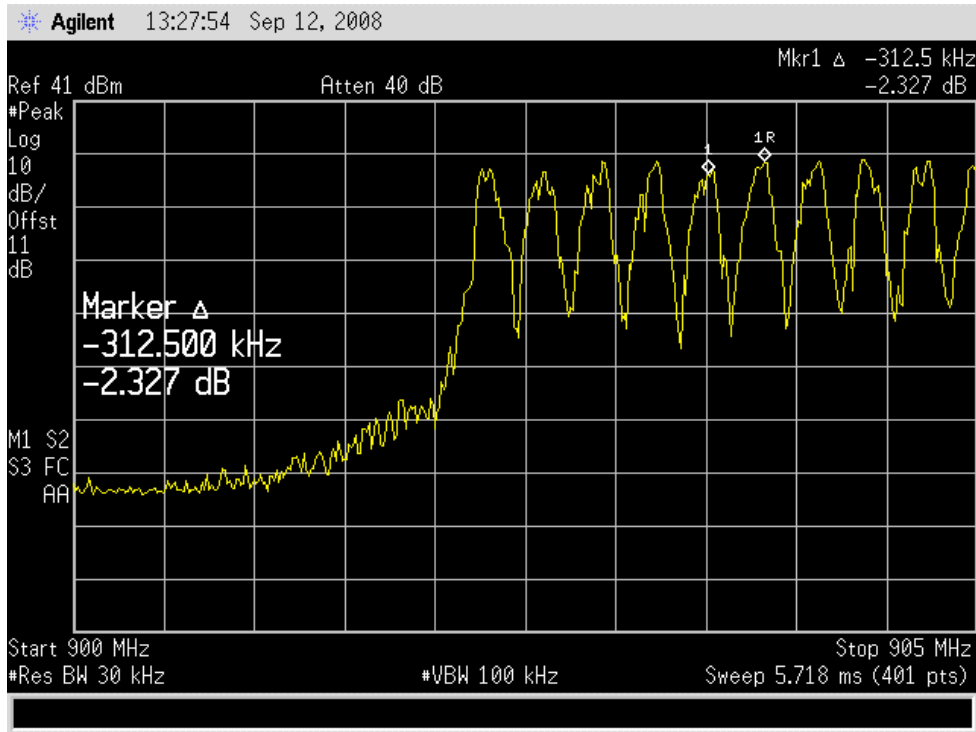


**SPURIOUS EMISSIONS, LOW CHANNEL**

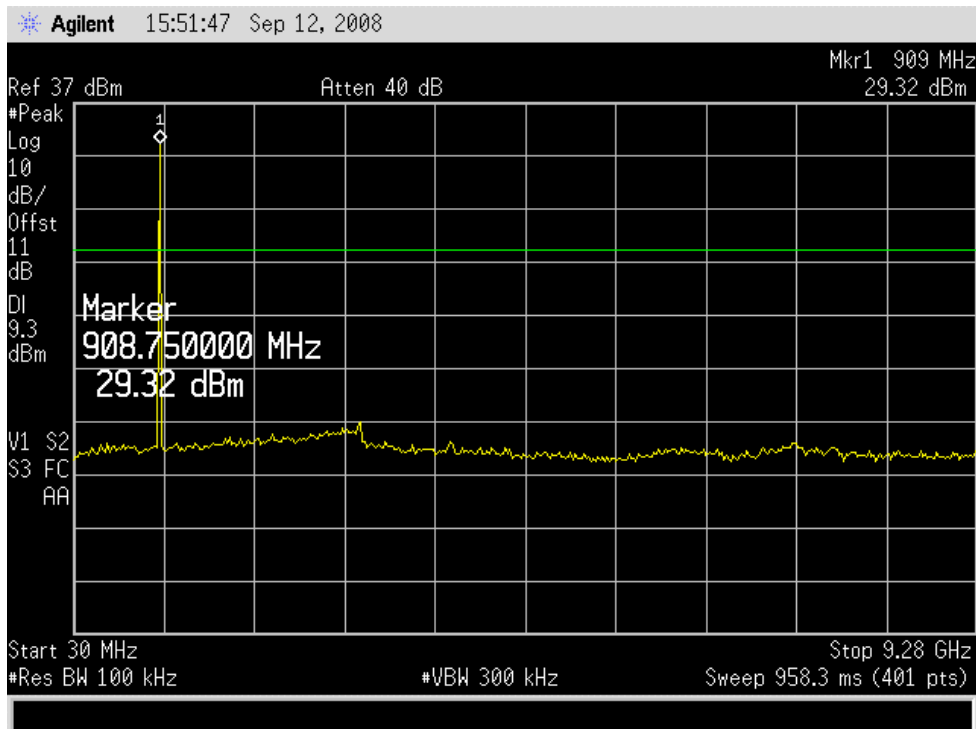


**SPURIOUS EMISSIONS, MID CHANNEL**

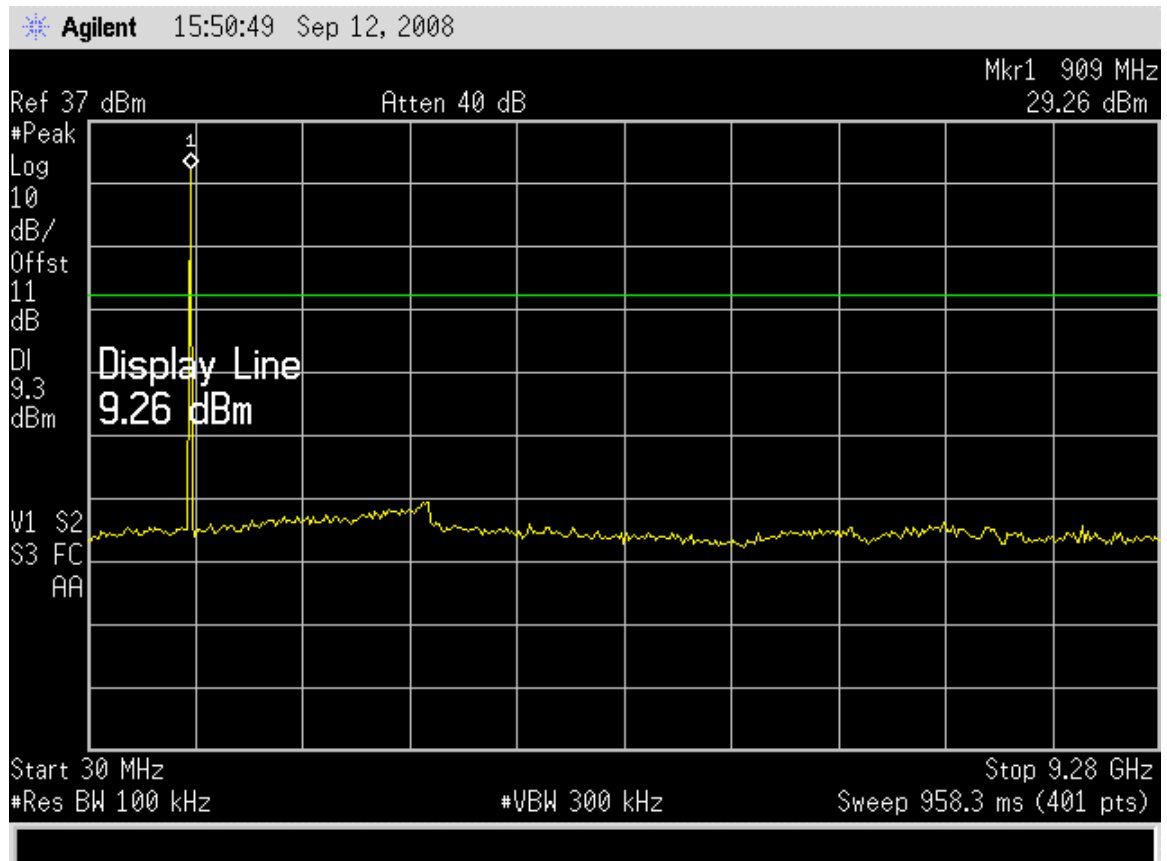

### SPURIOUS EMISSIONS, HIGH CHANNEL, HOPPING

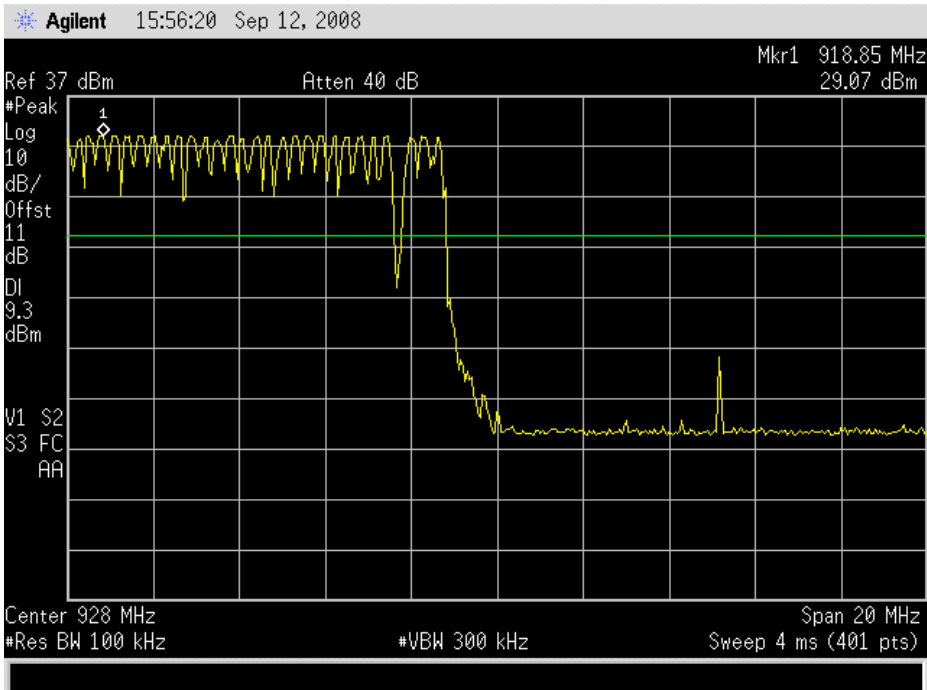

### SPURIOUS EMISSIONS, HIGH CHANNEL, HOPPING

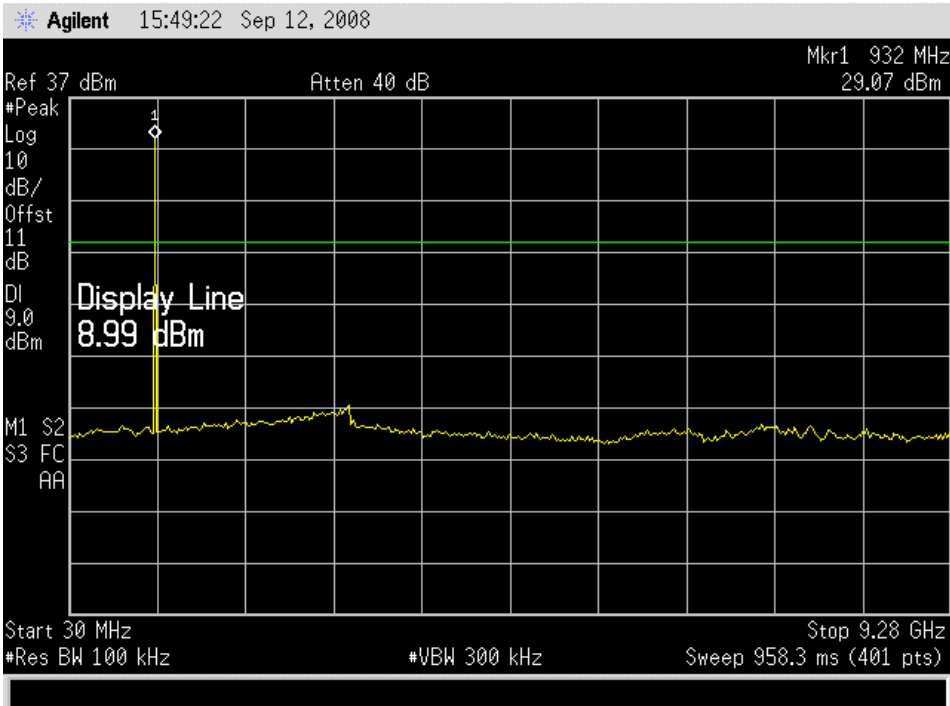

## 4.4 POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS


No non-compliance noted:

**900 HAN, LINE 1 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 21 File#: 08U11890\_LC.EMI Date: 08-22-2008 Time: 14:25:48

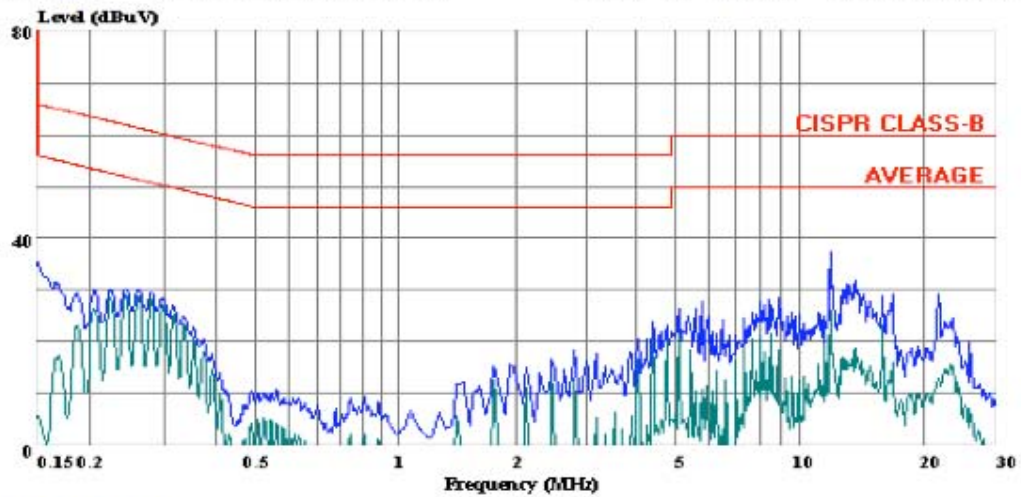

(Line Conduction)

Trace: 19

Ref Trace:

Condition: CISPR CLASS-B  
Test Operator:: William Zhuang  
Project #: : 08U11890  
Company: : Silver Spring Networks  
Configuration:: EUT With support equipment  
Mode: : Worst case (900MHz, 802.15.4)  
Target: : FCC Class B  
Voltage: : 115VAC / 60 Hz  
: L1: Peak ( Blue ), Average ( Green )




**900 HAN, LINE 2 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 28 File#: 08U11890\_LC.EMI Date: 08-22-2008 Time: 14:32:59

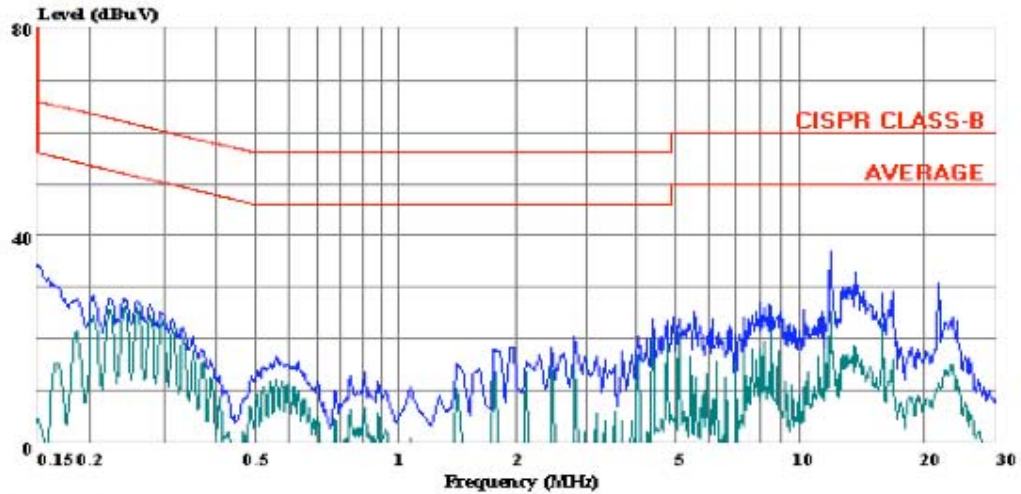

(Line Conduction)

Trace: 26

Ref Trace:


Condition: CISPR CLASS-B  
Test Operator:: William Zhuang  
Project #: : 08U11890  
Company: : Silver Spring Networks  
Configuration:: EUT With support equipment  
Mode: : Worst case (900MHz, 802.15.4)  
Target: : FCC Class B  
Voltage: : 115VAC / 60 Hz  
: L2: Peak ( Blue ), Average ( Green )

**2.4 GHz HAN, LINE 1 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 42 File#: 08U11890 LC.EMI Date: 09-24-2008 Time: 10:59:25

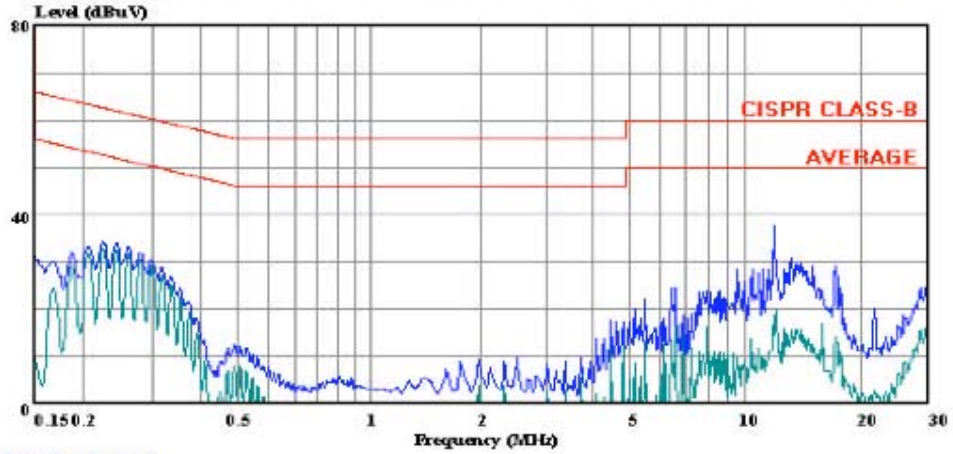

(Line Conduction)  
Trace: 40

Ref Trace:


Condition: CISPR CLASS-B  
Test Operator:: Thanh Nguyen  
Project #: : 08U11890  
Company: : Silver Spring Networks  
Configuration:: EUT With support equipment  
Mode: : Worst case (2400MHz, 802.15.4)  
Target: : FCC Class B  
Voltage: : 115VAC / 60 Hz  
: L1: Peak ( Blue ), Average ( Green )

**2.4 GHz HAN, LINE 2 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 35 File#: 08U11890 LC.EMI Date: 09-24-2008 Time: 10:51:08

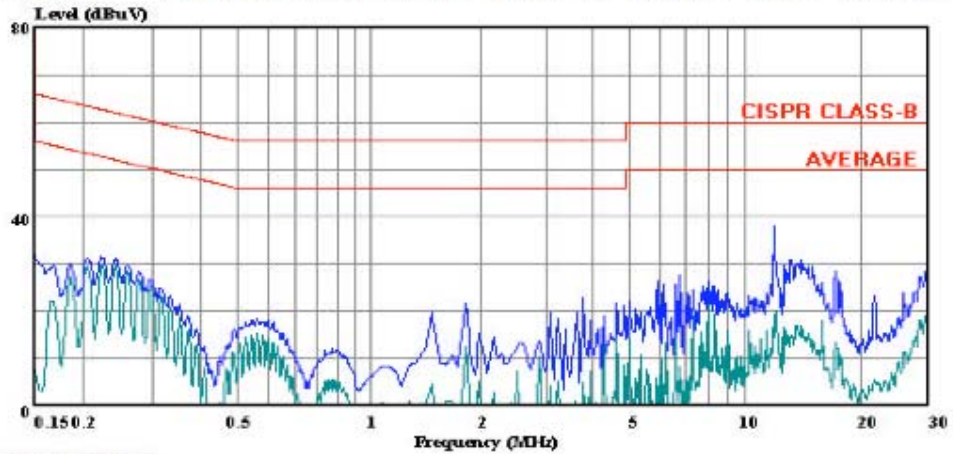

(Line Conduction)  
Trace: 33

Ref Trace:


Condition: CISPR CLASS-B  
Test Operator:: Thanh Nguyen  
Project #: : 08U11890  
Company: : Silver Spring Networks  
Configuration:: EUT With support equipment  
Mode: : Worst case (2400MHz, 802.15.4)  
Target: : FCC Class B  
Voltage: : 115VAC / 60 Hz  
: L2: Peak ( Blue ), Average ( Green )

**900 MHz FHSS, LINE 1 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 7 File#: 08U11890\_LC.EMI Date: 08-22-2008 Time: 14:05:31

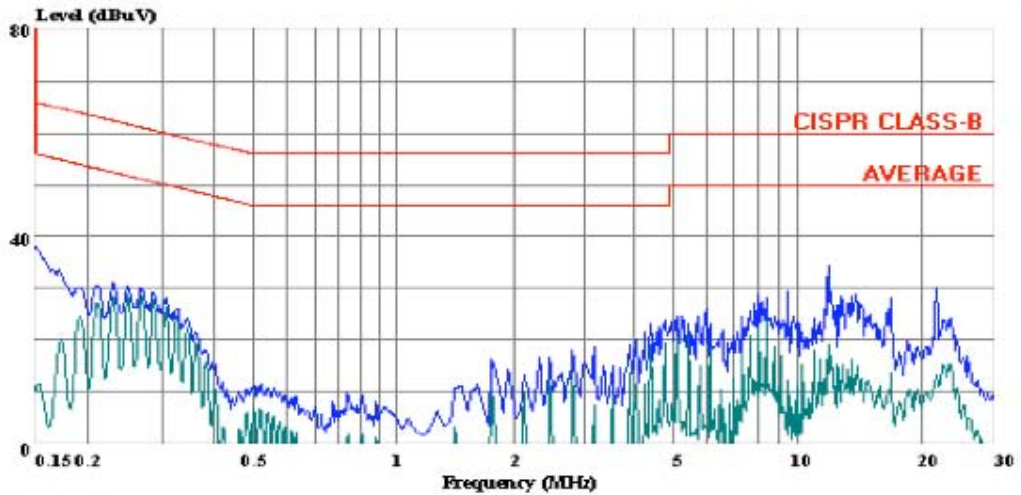

(Line Conduction)

Trace: 5

Ref Trace:


Condition: CISPR CLASS-B  
Test Operator:: William Zhuang  
Project #: : 08U11890  
Company: : Silver Spring Networks  
Configuration:: EUT With support equipment  
Mode: : Normal (Hopping, Max Power)  
Target: : FCC Class B  
Voltage: : 115VAC / 60 Hz  
: L1: Peak ( Blue ), Average ( Green )

**900 MHz FHSS, LINE 2 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 14 File#: 08U11890\_LC.EMI Date: 08-22-2008 Time: 14:15:32

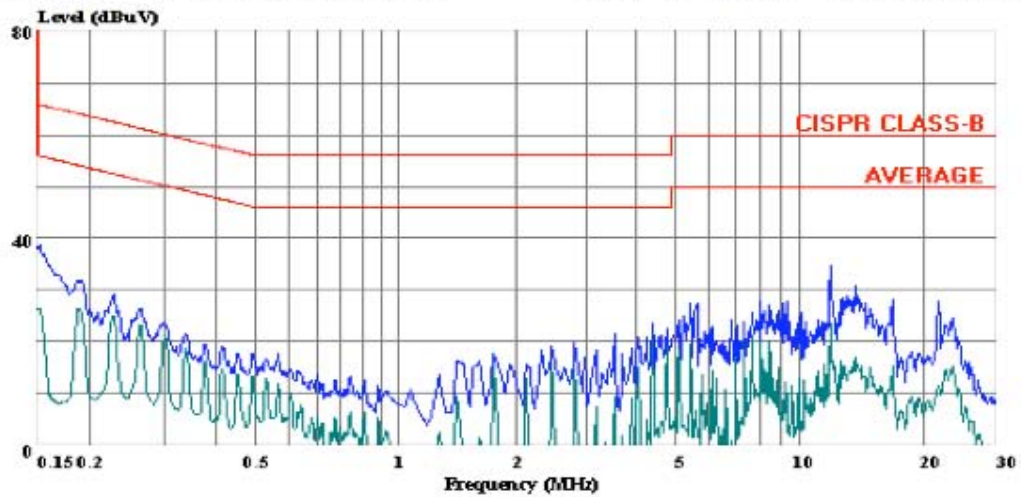

(Line Conduction)


Trace: 12

Ref Trace:

Condition: CISPR CLASS-B  
Test Operator:: William Zhuang  
Project #: : 08U11890  
Company: : Silver Spring Networks  
Configuration:: EUT With support equipment  
Mode: : Normal (Hopping, Max Power)  
Target: : FCC Class B  
Voltage: : 115VAC / 60 Hz  
: L2: Peak ( Blue ), Average ( Green )

## SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP, SILVER SPRING NETWORKS

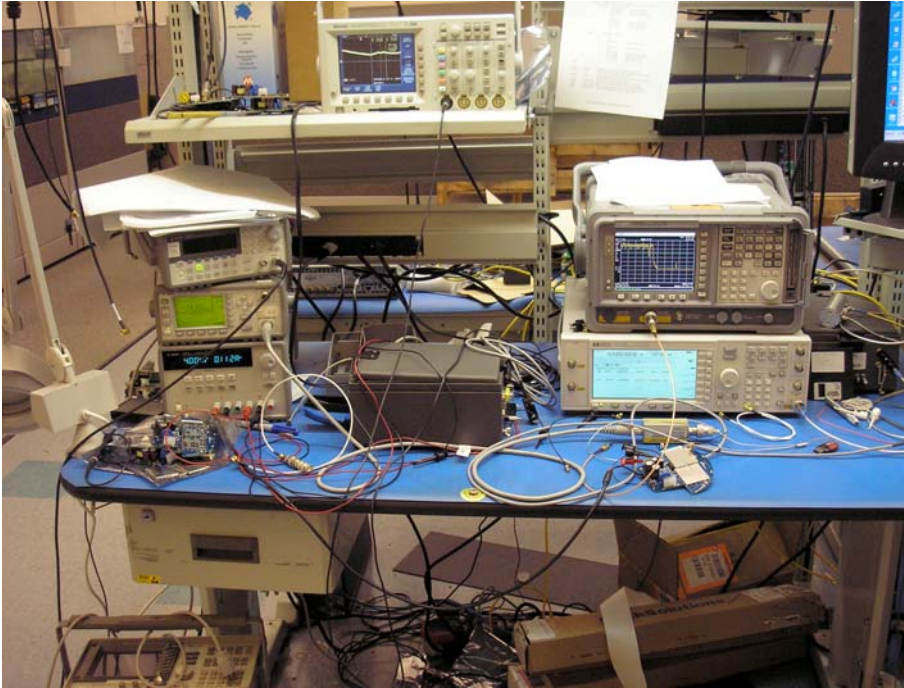


### ANTENNA PORT CONDUCTED TESTS, CCS



**RADIATED RF MEASUREMENT SETUP**



**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

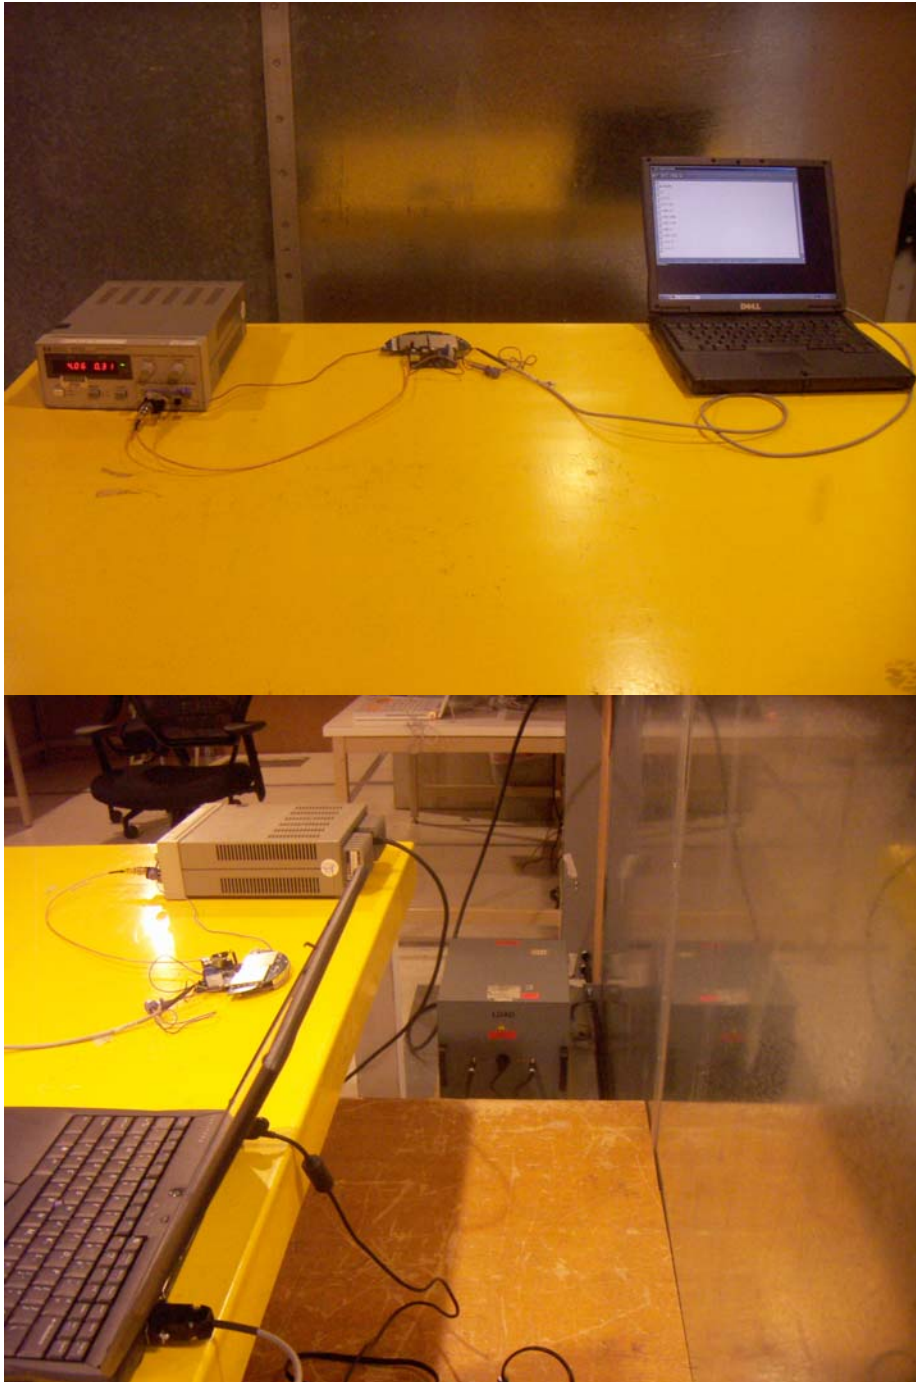

**END OF REPORT**



### Report Revision History

Revision No.	Revision Description	Pages Revised	Revised by	Date
-	Original Issue		T. Cokenias	10/12/08